



(11) **EP 2 638 852 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**24.04.2019 Bulletin 2019/17**

(51) Int Cl.:  
**A61B 5/00 (2006.01) A61B 5/046 (2006.01)**

(21) Application number: **13157938.5**

(22) Date of filing: **06.03.2013**

(54) **Cardiac muscle excitation waveform detector**

Wellenformdetektor zur Herzmuskelanregung

Détecteur de forme d'onde d'excitation du muscle cardiaque

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**

(30) Priority: **15.03.2012 JP 2012058748**

(43) Date of publication of application:  
**18.09.2013 Bulletin 2013/38**

(73) Proprietor: **Nihon Kohden Corporation**  
**Shinjuku-ku**  
**Tokyo (JP)**

(72) Inventors:  
• **Takizawa, Koji**  
**Shinjuku-ku, Tokyo (JP)**  
• **Nishihara, Tatsuo**  
**Shinjuku-ku, Tokyo (JP)**

- **Iwanaga, Yuuho**  
**Shinjuku-ku, Tokyo (JP)**
- **Suzuki, Satoshi**  
**Shinjuku-ku, Tokyo (JP)**
- **Hattori, Naoki**  
**Shinjuku-ku, Tokyo (JP)**
- **Yuze, Hiroki**  
**Shinjuku-ku, Tokyo (JP)**

(74) Representative: **Grünecker Patent- und Rechtsanwälte**  
**PartG mbB**  
**Leopoldstraße 4**  
**80802 München (DE)**

(56) References cited:  
**WO-A1-2010/054409 US-A1- 2007 208 260**  
**US-A1- 2008 188 765 US-B1- 7 437 190**

**EP 2 638 852 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### BACKGROUND OF THE INVENTION

**[0001]** The invention relates to a cardiac muscle excitation waveform detector for detecting excitation in cardiac muscle (hereinafter simply referred to as a "cardiac muscle excitation") caused by atrial fibrillation and to a detection program.

**[0002]** The atrial fibrillation is high frequency tachyarrhythmia, and a mechanism of how the atrial fibrillation is maintained and medical treatment for the atrial fibrillation are under study. Medical treatment includes pharmacotherapeutics (palliative treatment), catheter ablation (curative treatment), and the like. Of these treatments, catheter ablation is for analyzing, on the basis of an intracardiac electrocardiogram, behavior of the heart experiencing atrial fibrillation; locating a region where an electric signal (an excitation waveform) called re-entry, develops, and removing the region, to thus inhibit occurrence of the re-entry.

**[0003]** For instance, CFE-mean (Complex Fractionated Electrogram Mean which is hereunder also called a "mean conduction time") calculation algorithm has also been proposed as a technique for analyzing an intracardiac electrocardiogram of the heart experiencing atrial fibrillation (see Non-Patent Literature 1).

**[0004]** [Non-Patent Literature 1] Martin K. Stiles et al., "The Effect of Electrogram Duration on Quantification of Complex Fractionated Atrial Electrograms and Dominant Frequency", Journal of Cardiovascular Electrophysiology Vol. 19, No. 3, March 2008

**[0005]** US 2007/0208260 A1 relates to a system and a method for mapping complex fractionated electrogram information. US 7 437 190 B1 relates to a cardiac stimulation device with adjustable blanking intervals. Other relevant prior art is described in WO 2010/054409 A1 and US 2008/0188765 A1.

### SUMMARY

**[0006]** The CFE-mean calculation algorithm is for detecting cardiac muscle excitation from an intracardiac electrocardiogram of an atrium of the heart experiencing atrial fibrillation and calculating a mean conduction time from a plurality of thus-detected patterns pertinent to the cardiac muscle excitation. First, waveform data are acquired for a predetermined period from the intracardiac electrocardiogram, and waveform contour conditions are applied to the thus-acquired waveform, thereby detecting a waveform meeting the conditions as a waveform of the cardiac muscle excitation. Next, a predetermined period subsequent to detection of the waveform of the cardiac muscle excitation is set as a detection-of-excitation-in-cardiac-muscle exclusion period. Waveforms of cardiac muscle excitation developed in the exclusion period (referred to as "Refractory" in Non-Patent Literature 1) are excluded without detection. A waveform again meeting

the contour conditions after elapse of the exclusion period is detected as a waveform of cardiac muscle excitation. A mean conduction time is calculated from the thus-detected waveform of the cardiac muscle excitation.

**[0007]** However, under the method for calculating the mean conduction time of cardiac muscle excitation disclosed in Non-Patent Literature 1, the waveform contour is employed as conditions to be met. Therefore, for instance, when noise occurs and when a waveform of the noise meets the contour conditions, there arises a problem of the noise waveform being detected as a waveform of cardiac muscle excitation. For this reason, the following has sometimes occurred. Namely, when the noise waveform is detected as a waveform of cardiac muscle excitation, true cardiac muscle excitation that has developed in the exclusion period subsequent to detection of the noise waveform cannot be detected. Or the noise waveform is detected as a waveform of cardiac muscle excitation, and a waveform of cardiac muscle excitation is also detected. As a consequence, the noise and the cardiac muscle excitation are doubly counted. In these cases, therefore, the mean conduction time cannot be calculated correctly. This might make it impossible to precisely locate a region in the heart where re-entry occurs.

**[0008]** Accordingly, the invention has been conceived in light of the problems and aims at providing a cardiac muscle excitation waveform detector that is enhanced in accuracy of detection of a waveform of cardiac muscle excitation and that calculates a mean conduction time of cardiac muscle excitation more accurately, and a detection program. The invention is defined in the independent claims.

**[0009]** It is therefore an aspect of the invention to provide a cardiac muscle excitation waveform detector comprising:

a waveform acquisition section that acquires, in a preset waveform analysis period, a waveform from an intracardiac electrocardiogram measured in middle of occurrence of atrial fibrillation;

a waveform detection condition setting section that sets conditions for detecting a waveform of cardiac muscle excitation, which shows occurrence of excitation in cardiac muscle, from among waveforms that are acquired by the waveform acquisition section in the waveform analysis period; and

an excitation waveform detection section that detects a waveform of cardiac muscle excitation from the waveforms belonging to the waveform analysis period on the basis of the conditions set by the waveform detection condition setting section, wherein the waveform detection condition setting section includes

a candidate waveform detection condition setting section that sets conditions based on a contour of a waveform in order to detect candidates for the waveform of cardiac muscle excitation,

a search period setting section that sets a search period for searching for a waveform of cardiac muscle excitation from among the candidate waveforms detected according to the conditions based on the contour of the waveform; and  
 a detection exclusion period setting section that sets a preset period subsequent to detection as a detection exclusion period during which the candidate waveforms are not detected as a waveform of cardiac muscle excitation when the waveform of cardiac muscle excitation is detected from the candidate waveforms.

**[0010]** The cardiac muscle excitation waveform detector can diminish chances of erroneous detection and double counting of a waveform of cardiac muscle excitation and a noise waveform and enhance accuracy in detecting the waveform of cardiac muscle excitation.

**[0011]** The conditions for searching for the waveform of cardiac muscle excitation in the search period set by the search period setting section may be based on a maximum P-P value of the candidate waveform belonging to the search period.

**[0012]** The cardiac muscle excitation waveform detector may take a waveform of the closest region as a waveform of cardiac muscle excitation and can diminish erroneous detection of the waveform of cardiac muscle excitation and the noise, so that accuracy in detecting the waveform of cardiac muscle excitation can be enhanced.

**[0013]** The search period setting section sets the search period so as to become shorter than the detection exclusion period.

**[0014]** The cardiac muscle excitation waveform detector can diminish chances of erroneous detection of the waveform of cardiac muscle excitation and the noise waveform to a much greater extent.

**[0015]** The cardiac muscle excitation waveform detector may further comprise a mean conduction time calculation section that calculates a mean conduction time during which cardiac muscle excitation is conducted, from the plurality of waveforms of cardiac muscle excitation detected by the excitation waveform detection section.

**[0016]** The cardiac muscle excitation waveform detector may accurately calculate a mean conduction time of cardiac muscle excitation and correctly locate a position of a region where re-entry has occurred.

**[0017]** It is another aspect of the invention to provide a cardiac muscle excitation waveform detection program for causing a computer to execute processing pertinent to:

a waveform acquisition procedure for measuring a size of a waveform which occurs in a preset waveform analysis period of an intracardiac electrocardiogram measured in middle of occurrence of atrial fibrillation, thereby acquiring a waveform meeting predetermined conditions as a candidate for a waveform of cardiac muscle excitation;

a cardiac muscle excitation detection procedure for taking as a cardiac muscle excitation search period a preset period that continues from occurrence of the waveform first acquired as the candidate waveform and detecting a candidate waveform which has the maximum P-P value in the cardiac muscle excitation search period as a waveform of cardiac muscle excitation; and

a cardiac muscle excitation exclusion procedure for taking as a waveform detection exclusion period a preset period that continues from occurrence of the waveform detected as a candidate for a waveform of cardiac muscle excitation and detecting the candidate waveform belonging to the waveform detection exclusion period as a waveform of cardiac muscle excitation, wherein the search period is shorter than the detection exclusion period.

**[0018]** The cardiac muscle excitation waveform detection program of the invention makes it possible to diminish chances of erroneous detection and double counting of a waveform of cardiac muscle excitation and a noise waveform and enhance accuracy in detecting the waveform of cardiac muscle excitation.

**[0019]** The cardiac muscle excitation waveform detection program for causing a computer to perform processing may further comprise:

processing pertinent to a procedure for iterating processing pertinent to the cardiac muscle excitation detection procedure and the cardiac muscle excitation exclusion procedure after elapse of the waveform detection exclusion period; and

processing pertinent to a mean conduction time calculation procedure for calculating a mean conduction time during which cardiac muscle excitation is conducted, from a plurality of detected waveforms of cardiac muscle excitation.

**[0020]** The cardiac muscle excitation waveform detection program makes it possible to accurately calculate a mean conduction time of cardiac muscle excitation and correctly locate a position of a region where re-entry has occurred.

**[0021]** The invention makes it possible to inhibit occurrence of erroneous detection and double counting of a waveform of cardiac muscle excitation and a noise waveform and enhance accuracy in detecting the waveform of cardiac muscle excitation. Moreover, the invention also makes it possible to accurately calculate a mean conduction time of cardiac muscle excitation and correctly locate a position of a region where re-entry has occurred.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0022]**

Fig. 1 is a block diagram showing a configuration of a cardiac muscle excitation waveform detector according to an embodiment of the invention;

Figs. 2A to 2C are waveforms showing detection conditions for detecting a waveform of cardiac muscle excitation, wherein Fig. 2A shows contour conditions for a waveform to be detected, Fig. 2B shows conditions for a waveform search period, and Fig. 2C shows conditions for a waveform detection exclusion period;

Fig. 3 is a flowchart showing procedures of processing for detecting a waveform of cardiac muscle excitation;

Fig. 4 is a chart showing procedures for detecting a waveform of cardiac muscle excitation from a waveform of an obtained intracardiac electrocardiogram; and

Figs. 5A to 5C are charts showing an embodiment, wherein Fig. 5A shows an intracardiac electrocardiogram waveform of the heart experiencing atrial fibrillation, Fig. 5B shows a result of a mean conduction time being calculated under a related-art analysis technique, and Fig. 5C shows a result of a mean conduction time being calculated under an analysis technique of the invention.

#### DETAILED DESCRIPTION OF EMBODIMENTS

**[0023]** An embodiment of a cardiac muscle excitation waveform detector of the invention is hereunder described by reference to the accompanying drawings.

**[0024]** A cardiac muscle excitation waveform detector 1 shown in Fig. 1 has a waveform acquisition section 2 that acquires a waveform meeting predetermined conditions from among measured intracardiac electrocardiogram waveforms; a waveform detection condition setting section 3 that sets terms and conditions for detecting a waveform of cardiac muscle excitation; an excitation waveform detection section 4 that detects a waveform of cardiac muscle excitation according to the conditions set by the waveform detection condition setting section 3; a mean conduction time calculation section 9 that calculates a mean conduction time during which cardiac muscle excitation is conducted; and a control section 5 that controls these sections.

**[0025]** The waveform detection condition setting section 3 is equipped with a candidate waveform detection condition setting section 6 that sets conditions for detecting a candidate for a waveform of cardiac muscle excitation, a search period setting section 7 that sets a search period for searching a waveform of cardiac muscle excitation from among candidate waveforms, and a detection exclusion period setting section 8 that sets a detection exclusion period not for detecting the candidate waveform as the waveform of cardiac muscle excitation.

**[0026]** Further, reference numeral 15 shown in Fig. 1 schematically shows the heart whose intra-atrial intracardiac electrocardiogram is under measurement. A cardiac catheter 16 is inserted in an atrium from a peripheral blood vessel, and an intracardiac electrocardiogram is acquired by way of electrodes (not shown) attached to

the cardiac catheter 16. The thus-acquired intracardiac electrocardiogram waveform are sent to the cardiac muscle excitation waveform detector 1 by way of the cardiac catheter 16 and acquired by the waveform acquisition section 2 of the cardiac muscle excitation waveform detector 1.

**[0027]** The waveform acquisition section 2 acquires intracardiac electrocardiogram waveform data on the basis of a waveform acquisition control signal sent from the control section 5. The waveform acquisition control signal includes control signals, like timing and an acquisition period for acquiring intracardiac electrocardiogram waveform data. A waveform analysis period according to the embodiment of the invention is an example of a period for acquiring intracardiac electrocardiogram waveform data, and a preset waveform analysis period is sent from the control section 5 to the waveform acquisition section 2 as a control signal pertinent to an acquisition period. The waveform acquisition section 2 received the control signal acquires from acquisition timing intracardiac electrocardiogram waveform data belonging to the waveform analysis period. The thus-acquired intracardiac electrocardiogram waveform data are sent to the excitation waveform detection section 4 and stored and retained in RAM 12 provided in the control section 5.

**[0028]** The waveform detection condition setting section 3 sets conditions for detecting, from a waveform that has been acquired by the waveform acquisition section 2 and that belongs to an intracardiac electrocardiogram waveform data acquisition period (e.g., the waveform analysis period), a waveform of cardiac muscle excitation which shows occurrence of excitation in cardiac muscle (i.e., an electrical signal of an excitation waveform).

**[0029]** In order to detect a candidate for the waveform of excitation in cardiac muscle, the candidate waveform detection condition setting section 6 provided in the waveform detection condition setting section 3 sets detection conditions on the basis of the data pertinent to a contour of a waveform. For instance, data pertinent to a horizontal width and a vertical width of an electric potential indicated by the intracardiac electrocardiogram waveform belonging to the waveform analysis period are set as analysis conditions. A waveform shown in Fig. 2A represents an example of acquired intracardiac electrocardiogram waveform data. A horizontal width and a vertical width of a waveform (an electric potential) set as detection conditions are set as an arrowheaded width  $d_1$  and an arrowheaded height  $h_1$ , respectively. Specifically, the detection conditions for detecting a candidate for the waveform of cardiac muscle excitation are set to; for instance, the horizontal width  $d_1$  of an intracardiac electrocardiogram waveform being 10 msec or less and the vertical width  $h_1$  being 0.1 mV or more. The data pertinent to the waveform contour that serves as the conditions for detecting a set candidate waveform are sent to the control section 5 and stored and retained in the RAM 12 provided in the control section 5.

**[0030]** Data pertinent to the waveform contour that

serves as conditions for detecting a candidate waveform are sent from the control section 5 to the excitation waveform detection section 4. The excitation waveform detection section 4 detects, from the intracardiac electrocardiogram waveform data acquired by the waveform acquisition section 2, a waveform meeting the candidate waveform detection conditions and determines the thus-detected waveform as a candidate waveform of cardiac muscle excitation.

**[0031]** The search period setting section 7 provided in the waveform detection condition setting section 3 sets a search period for searching for a waveform of cardiac muscle excitation from an intracardiac electrocardiogram waveform that meets the detection conditions based on the data pertinent to the waveform contour set by the candidate waveform detection condition setting section 6 and that is detected by the excitation waveform detection section 4 as a candidate waveform for cardiac muscle excitation. The search period is a period that is set in order to inhibit erroneous detection of a noise waveform as a waveform of cardiac muscle excitation. The search period is set to a period that is shorter than the detection exclusion period (which will be described later). Data pertinent to the thus-set search period are sent to the control section 5 and stored and retained in the RAM 12 provided in the control section 5.

**[0032]** Also, data pertinent to the search period are sent from the control section 5 to the excitation waveform detection section 4. The excitation waveform detection section 4 measures a maximum P-P value (a value from the highest positive value to the highest negative value of the waveform) of the candidate waveform of cardiac muscle excitation belonging to the search period. Data based on the thus-measured maximum P-P value are set as conditions for searching for a waveform of cardiac muscle excitation. Specifically, there are set, as conditions, searching for a candidate waveform of cardiac muscle excitation with the maximum P-P value from candidate waveforms of cardiac muscle excitation belonging to the search period. The excitation waveform detection section 4 determines as a waveform of cardiac muscle excitation a candidate waveform with the maximum P-P value that is detected by the search. As a result of the search period being set as mentioned above, when a plurality of candidate waveforms are present in the search period, only the candidate waveform with the maximum P-P value can be determined as a waveform of cardiac muscle excitation. Accordingly, it is possible to inhibit a noise waveform from being erroneously detected as a waveform of cardiac muscle excitation.

**[0033]** Data pertinent to the thus-determined waveform of cardiac muscle excitation are sent to the control section 5 and stored and retained in the RAM 12 provided in the control section 5. Fig. 2B is a drawing schematically showing a set search period. A period, depicted by an arrow 24, from a peak (depicted by an outlined circle) 22 to an outlined square 23 of a candidate waveform 21 of cardiac muscle excitation that was first detected by the

excitation waveform detection section 4 is set as a search period. The candidate waveform that belongs the search period and that exhibits the maximum P-P value is defined as a waveform of cardiac muscle excitation. In the search period shown in Fig. 2B, only one candidate waveform 21 is present in the search period 24, and hence the candidate waveform 21 is determined as a waveform of cardiac muscle excitation.

**[0034]** When the waveform of cardiac muscle excitation is detected from the candidate waveform detected by the excitation waveform detection section 4, the detection exclusion period setting section 8 provided in the waveform detection condition setting section 3 sets a pre-set period subsequent to detection as a detection exclusion period during which cardiac muscle excitation is not detected. The detection exclusion period is a period provided in order to inhibit a candidate waveform including a noise waveform from being doubly counted. The detection exclusion period can be set to; for instance, 50 msec by physiologically determining a cycle of local activation in the heart.

**[0035]** Data pertinent to the set detection exclusion period are sent to the control section 5 and stored and retained in the RAM 12 provided in the control section 5. Fig. 2C is a drawing which schematically shows the set detection exclusion period. A period, depicted by an arrow 28, from a peak (depicted by an outlined circle) 26 to an outlined triangle 27 of a waveform 25 of cardiac muscle excitation that was determined by the excitation waveform detection section 4 is set as a detection exclusion period. Candidate waveforms of cardiac muscle excitation that are present in the period are excluded from a target of analysis. In the case shown in Fig. 2C, only the waveform 25 of cardiac muscle excitation is present in the detection exclusion period 28, and other candidate waveforms are not present, and, hence, a target waveform to be excluded from analysis is not present either.

**[0036]** Details of the conditions set by the waveform detection condition setting section 3 (including the candidate waveform detection condition setting section 6, the search period setting section 7, and the detection exclusion period setting section 8) can be set and changed from the outside. Setting condition input means (omitted from the drawings) which is connected to and provided in the waveform detection condition setting section 3 may also be enabled to input and change the details.

**[0037]** In accordance with the detection control signal sent from the control section 5, the excitation waveform detection section 4 detects the candidate waveform fulfilling the conditions set by the waveform detection condition setting section 3 (the candidate waveform detection condition setting section 6, the search period setting section 7, and the detection exclusion period setting section 8) as a waveform of cardiac muscle excitation. The excitation waveform detection section 4 also has, such as those mentioned above, a function of determining a candidate waveform of cardiac muscle excitation on the

basis of the set conditions and a function of defining a waveform of cardiac muscle excitation on the basis of the same. Data detected and defined by the excitation waveform detection section 4 are sent to the control section 5 and stored and retained in the RAM 12 provided in the control section 5.

**[0038]** In accordance with a calculation control signal sent from the control section 5, the mean conduction time calculation section 9 calculates a mean conduction time during which cardiac muscle excitation is conducted, from the data pertinent to the plurality of waveforms of cardiac muscle excitation detected by the excitation waveform detection section 4. The time during which cardiac muscle excitation is conducted refers to a time interval between detected waveforms of cardiac muscle excitation. An average of the time intervals is taken as a mean conduction time. Data pertinent to a mean conduction time calculated by the mean conduction time calculation section 9 are transmitted to the control section 5 and stored and retained in the RAM 12 provided in the control section 5.

**[0039]** The control section 5 controls the individual sections (the waveform acquisition section 2, the excitation waveform detection section 4, and the mean conduction time calculation section 9) of the cardiac muscle excitation waveform detector 1 on the basis of the conditions set by the waveform detection condition setting section 3 (the candidate waveform detection condition setting section 6, the search period setting section 7, and the detection exclusion period setting section 8). The control section 5 is equipped with a CPU 10 that supervises control; ROM 11, as a computer readable media, that retains programs for executing processing of various processing procedures pertinent to the CPU; and the RAM 12 that stores various data for the respective sections (the acquisition section, the setting sections, the detection section, and the calculation section, and others) that serve as a work area of the CPU.

**[0040]** By adoption of the configuration, such as that mentioned above, erroneous detection of a noise waveform can be inhibited, so that accuracy in detecting a waveform of cardiac muscle excitation can be enhanced. Accordingly, an accurate conduction time of cardiac muscle excitation can be measured, and a more correct mean conduction time can be calculated. Further, the functions of the cardiac muscle excitation waveform detector are also effective in analyzing a waveform of cardiac muscle excitation in real time and analyzing the waveform of cardiac muscle excitation for reviewing and commenting purposes and the like.

**[0041]** Processing procedures of cardiac muscle excitation waveform detection processing are now described along a flowchart shown in Fig. 3. Incidentally, on the occasion of explanation of the processing procedures, explanations are provided by reference to Fig. 4 that shows procedures for detecting a waveform of cardiac muscle excitation.

**[0042]** When processing for detecting a waveform of

cardiac muscle excitation is commenced, settings of parameters for detecting a waveform of cardiac muscle excitation are first made (step S101). For instance, there are set parameters based on contour data on a waveform that are set by the candidate waveform detection condition setting section 6 in order to detect a candidate for a waveform of cardiac muscle excitation. Specifically, a horizontal width and a vertical width of an intracardiac electrocardiogram waveform (an electric potential) acquired by the waveform acquisition section 2 are set to a value of 10 msec or less and a value of 0.1 mV or more, respectively. Next, there are set parameters pertinent to a detection exclusion period (an analysis target exclusion period) that is set by the detection exclusion period setting section 8 and during which none of the candidate waveforms are detected as a waveform of cardiac muscle excitation. Specifically, the detection exclusion period is set to 50 msec. Subsequently, there are set parameters pertinent to a search period that is set by the search period setting section 7 in order to search for a waveform of cardiac muscle excitation. Specifically, a search period is set to 49 msec. The search period is at this time set to a period of time that is shorter than the detection exclusion period.

**[0043]** The waveform shown in Fig. 4 is a part of a waveform that the waveform acquisition section 2 acquired, in the waveform analysis period, from the intracardiac electrocardiogram waveform measured in the middle of occurrence of atrial fibrillation. The waveform analysis period is a preset period (set to 5 sec in the embodiment) and is sent as an analysis control signal from the control section 5 to the waveform acquisition section 2. In accordance with the analysis control signal, the waveform acquisition section 2 acquires a waveform during a period of five seconds.

**[0044]** Subsequently, all waveforms meeting the conditions set in S101; namely, the horizontal width (10 msec or less) and the vertical width (0.1 mV or more), are detected as candidates for a waveform of cardiac muscle excitation from the intracardiac electrocardiogram waveform that occurred in the waveform analysis period and was acquired by the waveform acquisition section 2 (step S102). Step S102 is an example of waveform acquisition procedures of the invention. In Fig. 4, seven waveforms belonging to squares 31 to 37 designated by broken lines are detected as candidates for a waveform of cardiac muscle excitation.

**[0045]** Subsequently, a waveform of cardiac muscle excitation is selected from among the candidates for a waveform of cardiac muscle excitation detected in step S102 (step S103). In Fig. 4, the excitation waveform detection section 4 measures a P-P value of the first detected candidate waveform (i.e., a waveform belonging to the square 31 designated by broken lines). Next, a search is made as to whether or not another candidate waveform (another waveform belonging to the square designated by broken lines) is in a period that ranges from a point designated by an outlined circle 31a to a

point designated by an outlined square 31b until which the search period (49 msec) elapsed from the point 31a. In Fig. 4, there is not any other candidate waveform except the waveform belonging to the square 31 designated by broken lines. Hence, the waveform belonging to the square 31 designated by broken lines is defined as a first waveform of cardiac muscle excitation. A period ranging from the first peak (designated by the solid circle 31a) of the thus-defined waveform of cardiac muscle excitation to a point designated by a solid triangle 31c until which a detection exclusion period (50 msec) elapsed from the first peak 31a is taken as an analysis target exclusion period during which no waveforms are detected.

**[0046]** After elapse of the analysis target exclusion period (subsequent to the solid triangle 31c), the excitation waveform detection section 4 measures a P-P value of a candidate waveform (a waveform belonging to the square 32 designated by broken lines) first detected. Next, a search is made as to whether or not another candidate waveform (another waveform belonging to the square designated by broken lines) is in a period that ranges from a point designated by a solid circle 32a to a point designated by a solid square 32b until which the search period (49 msec) elapsed from the point 32a. When there is another candidate waveform, a P-P value of the candidate waveform is measured and compared with the P-P value of the waveform included in the square 32 designated by broken lines. In Fig. 4, since another candidate waveform (a waveform belonging to the square 33 designated by broken lines) belongs to a period which ranges from the solid circle 32a to the solid square 32b, a P-P value of the candidate waveform is measured and compared with the P-P value of the waveform belonging to the square 32 designated by broken lines. When a plurality of candidate waveforms are present in the search period, a candidate waveform having the largest P-P value is detected and defined as a waveform of cardiac muscle excitation. When the P-P value of the waveform belonging to the square 32 designated by broken lines is compared with the P-P value of the waveform belonging to the square 33 designated by broken lines, the P-P value of the waveform belonging to the square 33 designated by broken lines is, as is obvious from Fig. 4, larger than the P-P value of the waveform belonging to the square 32 designated by broken lines. Accordingly, the candidate waveform belonging to the square 33 designated by broken lines is defined as a waveform of cardiac muscle excitation. The reason why the waveform having the largest P-P value is defined as a waveform of cardiac muscle excitation by comparison of the plurality of candidate waveforms is for taking, as a waveform of cardiac muscle excitation, an intracardiac electrocardiogram waveform appeared at a region closest to an electrode (not shown) that acquires the intracardiac electrocardiogram waveform. The waveform that is not defined as a waveform of cardiac muscle excitation and belongs to the square 32 designated by broken lines is not hereafter used as a waveform for the purpose of

calculating a mean conduction time during which cardiac muscle excitation is conducted. A period ranging from the first peak (designated by a solid circle 33a) of the thus-defined waveform of cardiac muscle excitation to a point designated by a solid triangle 33c until which a detection exclusion period (50 msec) elapsed from the first peak 33a is taken as an analysis target exclusion period during which no waveforms are detected. Foregoing detection processing is iterated until the waveform analysis period ends, thereby repeatedly detecting a waveform of cardiac muscle excitation.

**[0047]** Next, -dv/dt point in the selected waveform of cardiac muscle excitation is detected after completion of detection of the waveform of cardiac muscle excitation (step S104). In Fig. 4, points 31d, 33d, 34d, 36d, and 37d all of which are designated by broken lines are detected. Points detected from the waveform are not limited to the -dv/dt point, and a dv/dt point can also be detected.

**[0048]** Subsequently, a duration between the -dv/dt points detected in step S104; namely, a conduction time during which cardiac muscle excitation was conducted, is measured, and a mean conduction time is calculated from the thus-measured respective conduction times (step S105). In Fig.4, a duration between the points 31d and 33d, a duration between the points 33d and 34d, a duration between the points 34d and 36d, and a duration between the points 36d and 37d are respectively measured as conduction times 41, 42, 43, and 44 during which cardiac muscle excitation is conducted. A mean conduction time is calculated from the conduction times.

**[0049]** Explanations are now given to a result of calculation of a mean conduction time (see Fig. 5B) by subjecting the intracardiac electrocardiogram waveform (see Fig. 5A) appeared in the middle of occurrence of atrial fibrillation to the related art analysis technique (the technique described in connection with Non-Patent Literature 1) and a result of calculation of a mean conduction time (see Fig. 5C) by subjecting the intracardiac electrocardiogram waveform (see Fig. 5A) appeared in the middle of occurrence of atrial fibrillation to the analysis technique of the invention.

**[0050]** The parameters pertinent to the conditions for detecting a waveform are set to a horizontal width of 10 msec or less, a vertical width of 0.1 mV or more, a detection exclusion period of 50 msec, and a search period of 49 msec.

**[0051]** Symbols A and B in Fig. 5B designate regions where the noise waveform was detected as a waveform of cardiac muscle excitation as a result of having fulfilled the contour waveform conditions. It can be ascertained that a waveform of true cardiac muscle excitation followed the noise waveform designated by symbol A but was not detected under influence of the detection exclusion period. Moreover, it can also be ascertained that the waveform of true cardiac muscle excitation following the noise waveform designated by symbol B was detected and that both the noise waveform and the true excitation waveform were detected (a so-called double count).

**[0052]** As above, the waveform of cardiac muscle excitation was detected by means of the related art analysis technique, and the mean conduction time was calculated from the thus-detected waveform of cardiac muscle excitation. The mean conduction time was 96 msec. In the regions where both the noise waveform and the waveform of true cardiac muscle excitation were detected, a duration between the waveforms is short, and the conduction time is also short. For these reasons, it can be inferred that a mean conduction time becomes smaller than a true value under the influence of the noise waveform. It can also be inferred that the noise waveform also affects the accuracy of the calculated mean conduction time even in the regions where the noise waveform is detected in place of the waveform of true cardiac muscle excitation.

**[0053]** In the meantime, when the analysis technique of the invention was conducted, the occurrence of erroneous detection of the noise waveform is significantly diminished as shown in Fig. 5C, and almost all detected waveforms represent waveforms of true cardiac muscle excitation. As a result of the mean conduction time being calculated from the thus-detected waveforms of cardiac muscle excitation, it can be confirmed that the mean conduction time is 112 msec and that influence of the noise waveform is eliminated. In other words, it can be confirmed that the mean conduction time can be calculated more accurately than that is calculated by the related art analysis technique.

**[0054]** The processing procedures described in connection with the embodiment of the invention can also be embodied as a method including a series of procedures. Alternatively, the series of procedures can also be materialized as an invention of a program that causes a computer to execute processing pertinent to the series of procedures. In this case, the program is recorded in a computer readable media. As a computer readable media, ROM can be used as described above. In addition, any kinds of well known computer readable media can be utilized to record the program. Even in these cases, advantages similar to that mentioned in connection with the embodiment can also be yielded.

## Claims

1. A cardiac muscle excitation waveform detector comprising:

a waveform acquisition section (2) configured to acquire, in a preset waveform analysis period, a waveform from an intracardiac electrocardiogram measured in middle of occurrence of atrial fibrillation;

a waveform detection condition setting section (3) configured to set conditions for detecting a waveform of cardiac muscle excitation, which shows occurrence of excitation in cardiac mus-

cle, from among waveforms that are acquired by the waveform acquisition section (2) in the waveform analysis period; and an excitation waveform detection section (4) configured to detect a waveform of cardiac muscle excitation from the waveforms belonging to the waveform analysis period on the basis of the conditions set by the waveform detection condition setting section (3), wherein the waveform detection condition setting section (3) includes

a candidate waveform detection condition setting section (6) configured to set conditions based on a contour of a waveform in order to detect candidates for the waveform of cardiac muscle excitation,

### characterized by

a search period setting section (7) configured to set a search period for searching for a waveform of cardiac muscle excitation from among the candidate waveforms detected according to the conditions based on the contour of the waveform, the search period being set after a candidate waveform is detected; and

a detection exclusion period setting section (8) configured to set a preset period subsequent to detection as a detection exclusion period during which the candidate waveforms are not detected as a waveform of cardiac muscle excitation when the waveform of cardiac muscle excitation is detected from the candidate waveforms,

wherein the search period setting section sets the search period so as to become shorter than the detection exclusion period.

2. The cardiac muscle excitation waveform detector according to claim 1, wherein the conditions for searching for the waveform of cardiac muscle excitation in the search period set by the search period setting section (7) are based on a maximum P-P value of the candidate waveform belonging to the search period.
3. The cardiac muscle excitation waveform detector according to claim 1 or 2, further comprising a mean conduction time calculation section (9) configured to calculate a mean conduction time during which cardiac muscle excitation is conducted, from the plurality of waveforms of cardiac muscle excitation detected by the excitation waveform detection section (4).
4. A cardiac muscle excitation waveform detection program for causing a computer to execute processing pertinent to:

a waveform acquisition procedure for measuring a size of a waveform which occurs in a preset waveform analysis period of an intracardiac electrocardiogram measured in middle of occurrence of atrial fibrillation, thereby acquiring a waveform meeting predetermined conditions as a candidate for a waveform of cardiac muscle excitation;

a cardiac muscle excitation detection procedure for taking as a cardiac muscle excitation search period a preset period that continues from occurrence of the waveform first acquired as the candidate waveform and detecting a candidate waveform which has the maximum P-P value in the cardiac muscle excitation search period as a waveform of cardiac muscle excitation; and **characterized by**

a cardiac muscle excitation exclusion procedure for taking as a waveform detection exclusion period a preset period that continues from occurrence of the waveform detected as a candidate for a waveform of cardiac muscle excitation and detecting the candidate waveform belonging to the waveform detection exclusion period as a waveform of cardiac muscle excitation, wherein the search period is shorter than the detection exclusion period.

5. The cardiac muscle excitation waveform detection program for causing a computer to perform processing according to claim 4, further comprising:

processing pertinent to a procedure for iterating processing pertinent to the cardiac muscle excitation detection procedure and the cardiac muscle excitation exclusion procedure after elapse of the waveform detection exclusion period; and processing pertinent to a mean conduction time calculation procedure for calculating a mean conduction time during which cardiac muscle excitation is conducted, from a plurality of detected waveforms of cardiac muscle excitation.

## Patentansprüche

1. Detektor für Signalform zur Herzmuskelanregung, mit:

einem Signalformerfassungsabschnitt (2), der ausgebildet ist, in einer vorgegebenen Signalformaustwertperiode eine Signalform aus einem Herzelektrokardiogramm, das in der Mitte des Auftretens einer Fibrillation der Herzvorhöfe gemessen wird, zu erfassen; einem Signalformdetektionsbedingungseinstellabschnitt (3), der ausgebildet ist, Bedingun-

gen für eine Erfassung einer Signalform einer Herzmuskelanregung, die ein Auftreten einer Anregung in einem Herzmuskel zeigt, aus Signalformen einzustellen, die durch den Signalformerfassungsabschnitt (2) in der Signalformaustwertperiode erfasst werden; und einem Anregungssignalformdetektionsabschnitt (4), der ausgebildet ist, eine Signalform einer Herzmuskelanregung aus Signalformen, die zu der Signalformaustwertperiode gehören, auf der Grundlage der Bedingungen zu erfassen, die durch den Signalformdetektierbedingungseinstellabschnitt (3) eingestellt sind, wobei der Signalformdetektierbedingungseinstellabschnitt (3) aufweist

einen Kandidatensignalformdetektierbedingungseinstellabschnitt (6), der ausgebildet ist, Bedingungen auf der Grundlage einer Kontur einer Signalform so einzustellen, dass Kandidaten für die Signalform einer Herzmuskelanregung erfasst werden,

### gekennzeichnet durch

einen Suchperiodeneinstellabschnitt (7), der ausgebildet ist, eine Suchperiode zum Suchen nach einer Signalform einer Herzmuskelanregung aus den Kandidaten der Signalformen, die gemäß den auf der Grundlage der Kontur der Kandidaten der Signalformen erfasst sind, einzustellen, wobei die Suchperiode eingestellt wird, nachdem ein Kandidat der Signalformen erfasst ist; und

einen Detektionsausschlussperiodeneinstellabschnitt (8), der ausgebildet ist, eine vorgegebene Periode nach der Erfassung als eine Detektionsausschlussperiode einzustellen, während welcher die Kandidaten der Signalformen nicht als eine Signalform einer Herzmuskelanregung erfasst werden, wenn die Signalform einer Herzmuskelanregung aus den Kandidaten der Signalformen erfasst wird,

wobei der Suchperiodeneinstellabschnitt die Suchperiode so einstellt, dass sie kürzer ist als die Detektionsausschlussperiode.

2. Detektor für Signalform zur Herzmuskelanregung nach Anspruch 1, wobei die Bedingungen zum Suchen nach der Signalform einer Herzmuskelanregung in der Suchperiode, die durch den Suchperiodeneinstellabschnitt (7) eingestellt ist, auf einem maximalen P-P-Wert des Kandidaten der Signalform, der zu der Suchperiode gehört, beruht.
3. Detektor für Signalform zur Herzmuskelanregung

nach Anspruch 1 oder 2, der ferner einen Durchschnittsausführungszeitberechnungsabschnitt (9) aufweist, der ausgebildet ist, eine Durchschnittsausführungszeit, während welcher eine Herzmuskelanregung ausgeführt wird, aus den mehreren Signalformen einer Herzmuskelanregung, die durch den Anregungssignalformdetektionsabschnitt (4) erfasst werden, zu berechnen.

4. Programm zur Erfassung einer Signalform zur Herzmuskelanregung, das bewirkt, das ein Computer eine Verarbeitung ausführt gemäß:

einer Signalformerfassungsprozedur zum Messen einer Größe einer Signalform, die in einer vorgegebenen Signalauswerteperiode eines Herzelektrokardiogramms auftritt, das in der Mitte des Auftretens einer Fibrillation der Herzvorhöfe gemessen wird, wodurch eine Signalform, die vorbestimmte Bedingungen erfüllt, als ein Kandidat für eine Signalform zur Herzmuskelanregung erfasst wird;

einer Herzmuskelanregungsdetektionsprozedur zur Verwendung, als eine Herzmuskelanregungssuchperiode, einer vorgegebenen Periode, die sich von dem Auftreten der Signalform, die zuerst als der Kandidat einer Signalform erfasst wurde, fortsetzt, und Erfassen eines Kandidaten einer Signalform, der den maximalen P-P-Wert in der Herzmuskelanregungssuchperiode hat, als eine Signalform einer Herzmuskelanregung;

**gekennzeichnet durch**

eine Herzmuskelanregungsausschlussprozedur zur Verwendung, als eine Signalformdetektionsausschlussperiode, einer vorgegebenen Periode, die sich ab dem Auftreten der Signalform, die als ein Kandidat für eine Signalform einer Herzmuskelanregung erfasst wird, fortsetzt, und zum Erfassen des Kandidaten der Signalform, der zu der Signalformdetektionsausschlussperiode gehört, als eine Signalform einer Herzmuskelanregung, wobei die Suchperiode kürzer ist als die Detektionsausschlussperiode.

5. Programm zur Erfassung einer Signalform für Herzmuskelanregung, das einen Computer veranlasst, eine Verarbeitung nach Anspruch 4 auszuführen, und das ferner umfasst:

Ausführen einer Verarbeitung gemäß einer Prozedur zur Iteration einer Verarbeitung gemäß der Herzmuskelanregungsdetektionsprozedur und der Herzmuskelanregungsausschlussprozedur nach Ablauf der Signalformdetektionsausschlussperiode; und  
Ausführen einer Verarbeitung gemäß einer

Durchschnittsausführungszeitberechnungsprozedur zur Berechnung einer Durchschnittsausführungszeit, während welcher die Herzmuskelanregung ausgeführt wird, aus mehreren erfassten Signalformen zur Herzmuskelanregung.

**Revendications**

1. Détecteur de forme d'onde d'excitation de muscle cardiaque comprenant :

une section d'acquisition de forme d'onde (2) configurée pour acquérir, dans une période d'analyse de forme d'onde prédéfinie, une forme d'onde à partir d'un électrocardiogramme intracardiaque mesuré au milieu de l'apparition de la fibrillation atriale ;

une section de définition des conditions de détection de forme d'onde (3) configurée pour définir les conditions de détection d'une forme d'onde d'excitation de muscle cardiaque, qui montre l'apparition d'excitation dans le muscle cardiaque, parmi les formes d'onde qui sont acquises par la section d'acquisition de forme d'onde (2) dans la période d'analyse de forme d'onde ; et

une section de détection de forme d'onde d'excitation (4) configurée pour détecter une forme d'onde d'excitation de muscle cardiaque à partir des formes d'onde appartenant à la période d'analyse de forme d'onde sur la base des conditions définies par la section de définition des conditions de détection de forme d'onde (3), la section de définition des conditions de détection de forme d'onde (3) comprenant

une section de définition des conditions de détection de forme d'onde candidate (6) configurée pour définir les conditions sur la base d'un contour d'une forme d'onde afin de détecter les candidates de forme d'onde d'excitation de muscle cardiaque,

**caractérisée par**

une section de définition de période de recherche (7) configurée pour définir une période de recherche pour rechercher une forme d'onde d'excitation de muscle cardiaque parmi les formes d'onde candidates détectées selon les conditions sur la base du contour de la forme d'onde, la période de recherche étant définie après qu'une forme d'onde candidate soit détectée ; et

une section de définition de période d'exclusion de détection (8) configurée pour définir une période prédéfinie ultérieure à la détection comme période d'exclusion de

détection durant laquelle les formes d'onde candidates ne sont pas détectées comme forme d'onde d'excitation de muscle cardiaque lorsque la forme d'onde d'excitation de muscle cardiaque est détectée à partir des formes d'onde candidates,

la section de définition de la période de recherche définit la période de recherche afin qu'elle devienne plus courte que la période d'exclusion de détection.

2. Détecteur de forme d'onde d'excitation de muscle cardiaque selon la revendication 1, les conditions de recherche pour la forme d'onde d'excitation de muscle cardiaque dans la période de recherche définie par la section de définition de période de recherche (7) étant basées sur une valeur P-P maximale de la forme d'onde candidate appartenant à la période de recherche.
3. Détecteur de forme d'onde d'excitation de muscle cardiaque selon la revendication 1 ou 2, comprenant en outre une section de calcul du temps de conduction moyen (9) configurée pour calculer un temps de conduction moyen durant lequel l'excitation du muscle cardiaque est conduite, à partir de la pluralité des formes d'onde d'excitation de muscle cardiaque détectées par la section de détection de forme d'onde d'excitation (4).
4. Programme de détection de forme d'onde d'excitation de muscle cardiaque pour amener un ordinateur à exécuter le traitement pertinent pour :
  - une procédure d'acquisition de forme d'onde destinée à mesurer une taille d'une forme d'onde qui apparaît dans une période d'analyse de forme d'onde prédéfinie d'un électrocardiogramme intracardiaque mesuré au milieu de l'apparition de la fibrillation atriale, acquérant ainsi une forme d'onde satisfaisant les conditions prédéterminées comme candidate de forme d'onde d'excitation de muscle cardiaque ;
  - une procédure de détection d'excitation de muscle cardiaque pour prendre comme période de recherche d'excitation de muscle cardiaque une période préfinie qui continue à partir de l'apparition de la forme d'onde acquise en premier comme forme d'onde candidate et détecter une forme d'onde candidate qui a la valeur P-P maximale dans la période de recherche d'excitation de muscle cardiaque comme forme d'onde d'excitation de muscle cardiaque ; et
  - caractérisée par**
  - une procédure d'exclusion d'excitation de muscle cardiaque en prenant comme période d'exclusion de détection de forme d'onde une période

de prédéfinie qui continue à partir de l'apparition de la forme d'onde détectée comme candidate de forme d'onde d'excitation de muscle cardiaque et détecter la forme d'onde candidate appartenant à la période d'exclusion de détection de forme d'onde comme forme d'onde d'excitation de muscle cardiaque, la période de recherche étant plus courte que la période d'exclusion de détection.

5. Programme de détection de forme d'onde d'excitation de muscle cardiaque pour amener un ordinateur à exécuter le traitement selon la revendication 4, comprenant en outre ;
  - le traitement pertinent pour une procédure d'itération du traitement pertinent à la procédure de détection d'excitation de muscle cardiaque et de la procédure d'exclusion d'excitation de muscle cardiaque après l'écoulement de la période d'exclusion de détection de forme d'onde ; et
  - le traitement pertinent à une procédure de calcul du temps de conduction moyen pour calculer un temps de conduction moyen durant lequel l'excitation du muscle cardiaque est conduite, à partir d'une pluralité de formes d'onde détectées d'excitation de muscle cardiaque.

FIG. 1

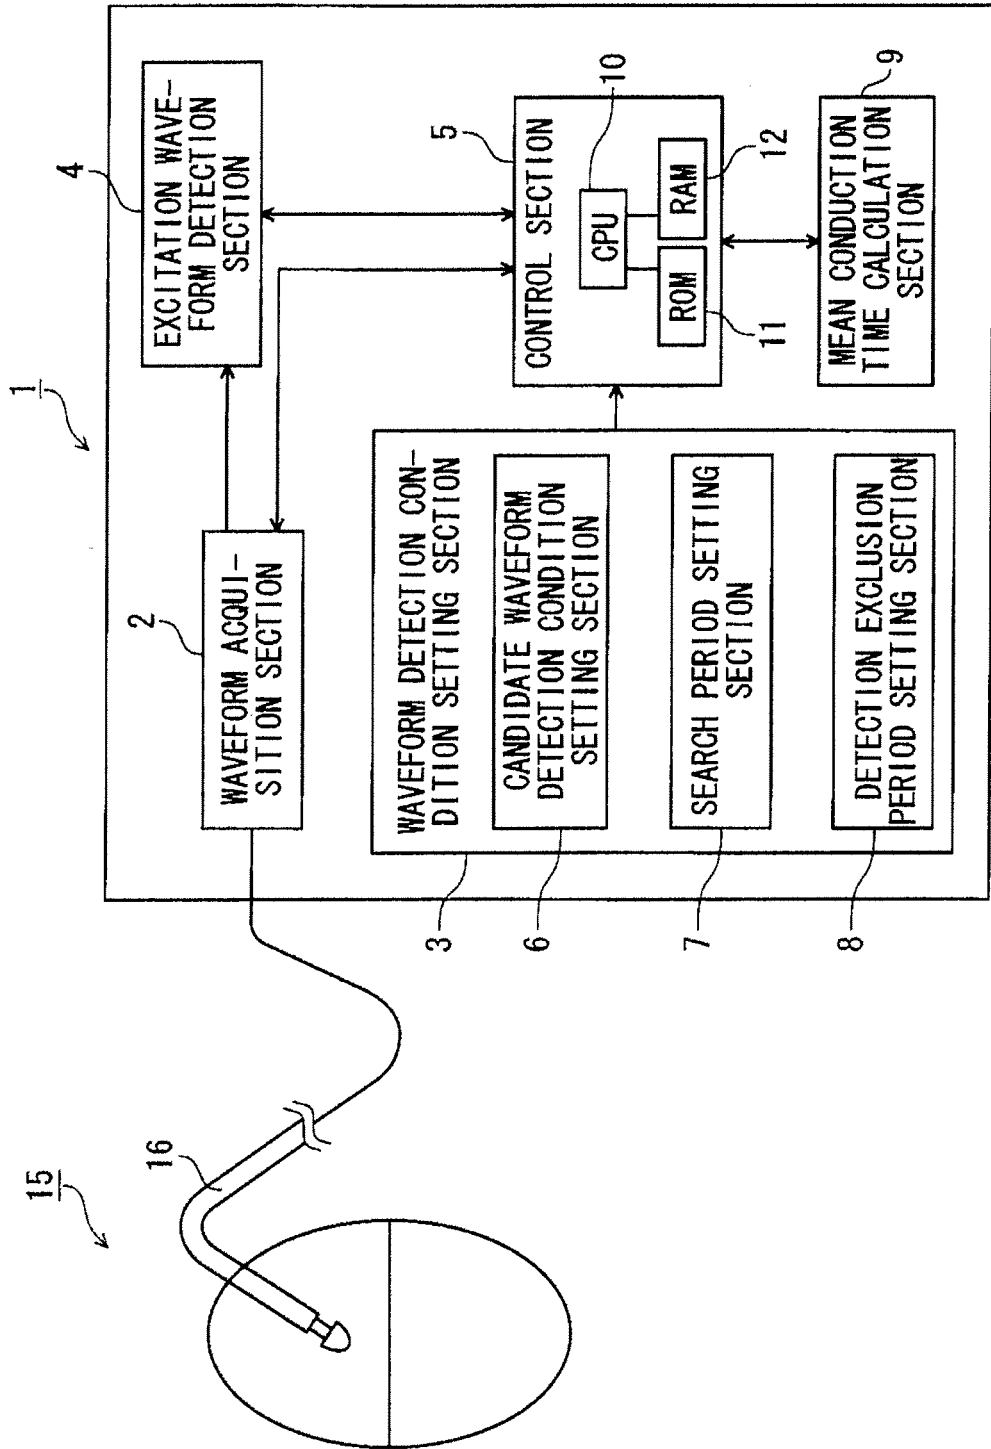


FIG. 2C

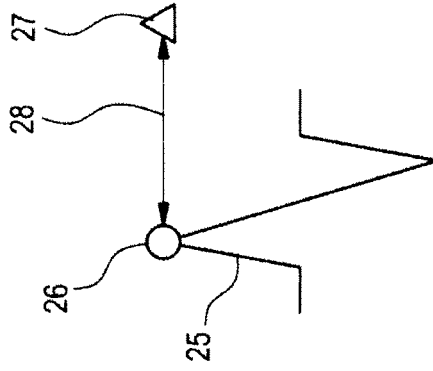


FIG. 2B

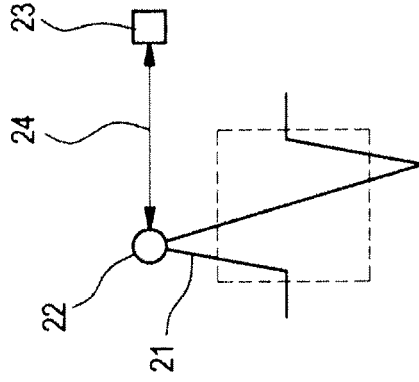


FIG. 2A

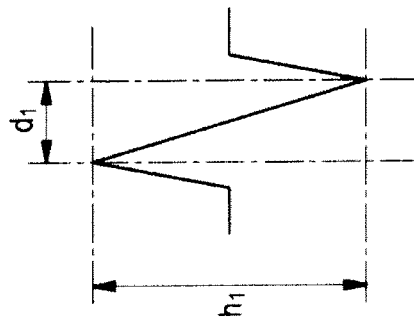
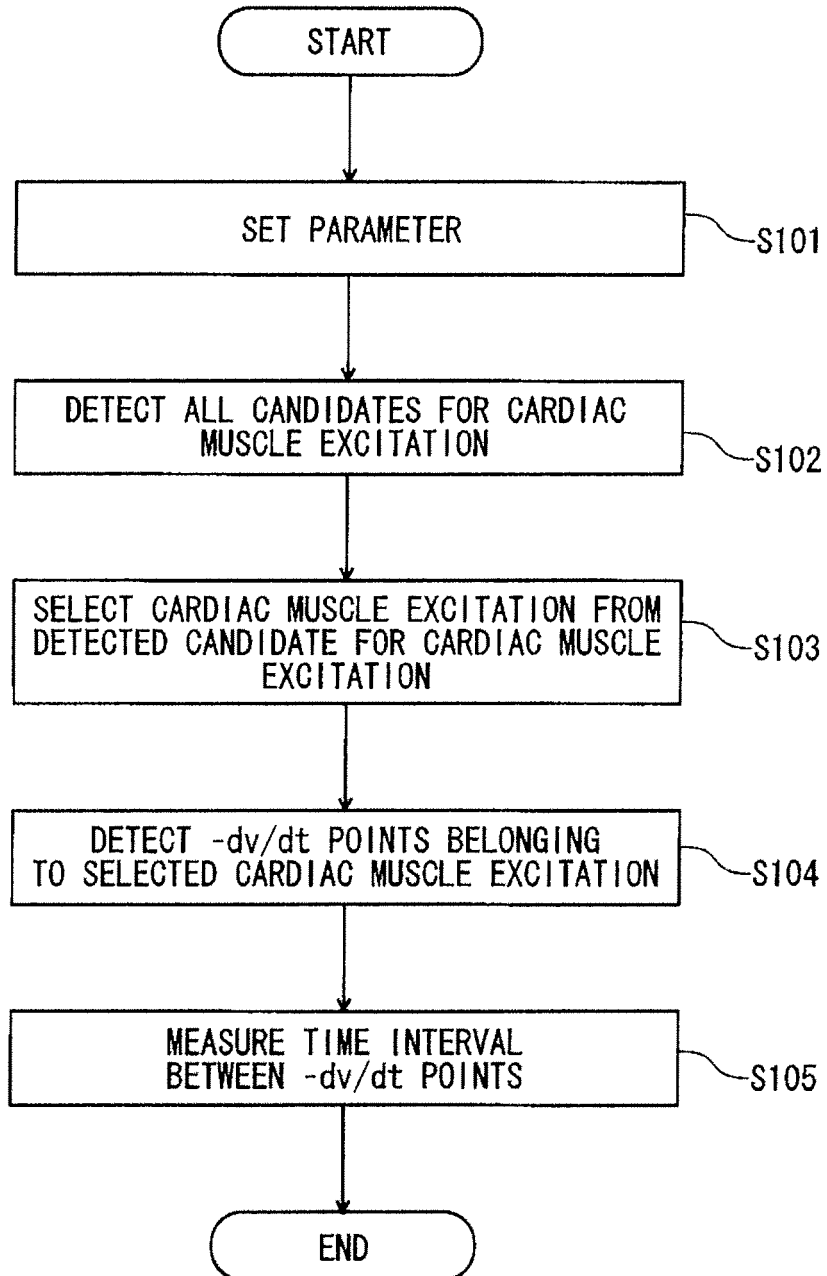
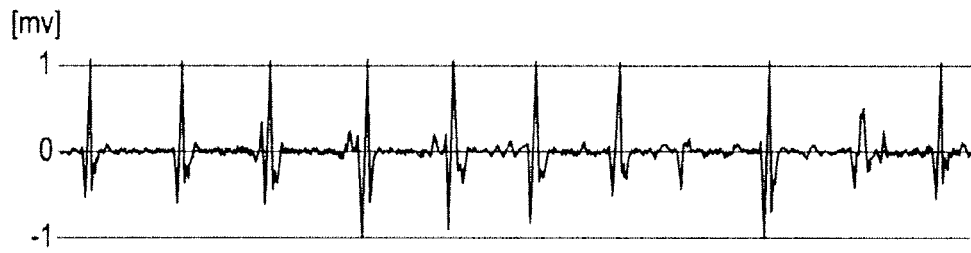


FIG. 3

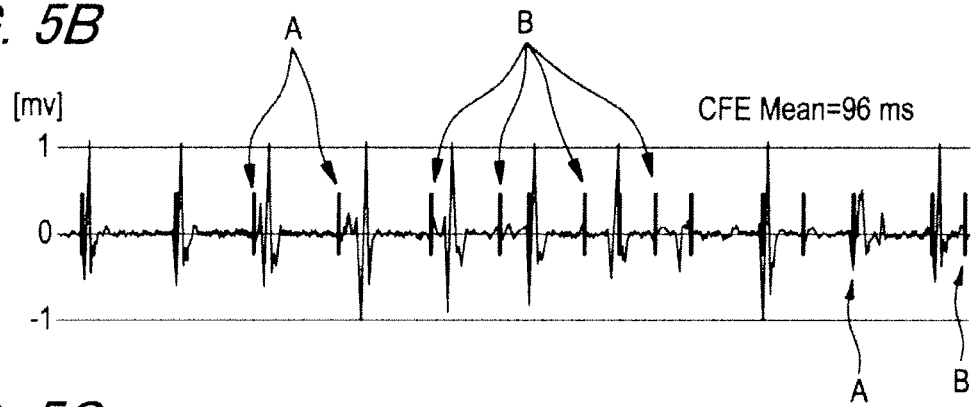




**FIG. 5A**



**FIG. 5B**



**FIG. 5C**



**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 20070208260 A1 [0005]
- US 7437190 B1 [0005]
- WO 2010054409 A1 [0005]
- US 20080188765 A1 [0005]

**Non-patent literature cited in the description**

- **MARTIN K. STILES et al.** The Effect of Electrogram Duration on Quantification of Complex Fractionated Atrial Electrograms and Dominant Frequency. *Journal of Cardiovascular Electrophysiology*, March 2008, vol. 19 (3) [0004]

专利名称(译)	心肌激励波形检测器		
公开(公告)号	<a href="#">EP2638852B1</a>	公开(公告)日	2019-04-24
申请号	EP2013157938	申请日	2013-03-06
[标]申请(专利权)人(译)	日本光电工业株式会社		
申请(专利权)人(译)	日本光电公司		
当前申请(专利权)人(译)	日本光电公司		
[标]发明人	TAKIZAWA KOJI NISHIHARA TATSUO IWANAGA YUUHO SUZUKI SATOSHI HATTORI NAOKI YUZE HIROKI		
发明人	TAKIZAWA, KOJI NISHIHARA, TATSUO IWANAGA, YUUHO SUZUKI, SATOSHI HATTORI, NAOKI YUZE, HIROKI		
IPC分类号	A61B5/00 A61B5/046		
CPC分类号	A61B5/046 A61B5/7235		
优先权	2012058748 2012-03-15 JP		
其他公开文献	EP2638852A1		
外部链接	<a href="#">Espacenet</a>		

摘要(译)

一种心肌激励波形检测器，包括：波形获取部分，其在预设时间段内从在心房颤动发生的中间测量的心内心电图获取波形；波形检测条件设定部，设定检测心肌激励波形的条件；激励波形检测部分，基于条件从波形检测心肌激励的波形，其中波形检测条件设置部分包括基于波形的轮廓设置条件的部分，以检测心脏波形的候选。肌肉激发，设定搜索心肌激发波形的搜索周期的部分；以及将检测后的预设期间设定为检测排除期间的部分，在检测排除期间，在检测出心肌激励波形时未检测到候选波形。

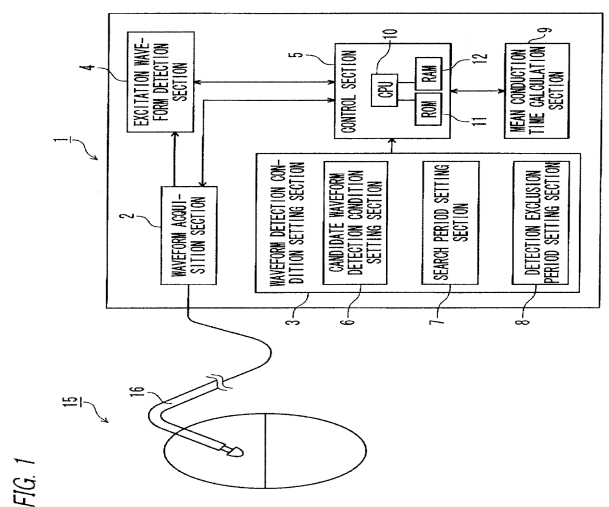


FIG. 1