



(11)

EP 3 281 579 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
14.02.2018 Bulletin 2018/07

(51) Int Cl.:
A61B 5/0452 ^(2006.01) **A61B 5/046** ^(2006.01)
A61B 5/0464 ^(2006.01) **A61B 5/0468** ^(2006.01)
A61B 5/0472 ^(2006.01) **A61B 5/042** ^(2006.01)
A61B 5/00 ^(2006.01)

(21) Application number: **17185489.6**

(22) Date of filing: **09.08.2017**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(30) Priority: **10.08.2016 US 201662372969 P**
11.07.2017 US 201715646344

(71) Applicant: **Biosense Webster (Israel), Ltd.**
Yokneam, 2066717 (IL)

(72) Inventors:
• **NAKAR, Elad**
2066717 Yokneam (IL)
• **BEN-DOR, Amir**
2066717 Yokneam (IL)
• **GAFNI, Noam Seker**
Irvine, CA California 92618 (US)

(74) Representative: **Small, Gary James**
Carpmaels & Ransford LLP
One Southampton Row
London WC1B 5HA (GB)

(54) **IDENTIFYING ECG SIGNALS HAVING THE SAME MORPHOLOGY**

(57) A method, including selecting an initial set of electrocardiograph (ECG) signals taken over a single heartbeat of a human subject, the set having respective morphologies to be used as a template for an arrhythmia of the subject, and receiving a subsequent set of ECG signals taken over a subsequent heartbeat of the human subject. The method also includes performing a

cross-correlation between the initial set and the subsequent set, so as to generate a correlation coefficient that is a measure of a goodness of fit between geometries of the initial set and the subsequent set, and, when the correlation coefficient exceeds a threshold coefficient, accepting the subsequent heartbeat as having been caused by the arrhythmia.

EP 3 281 579 A1

Description**CROSS-REFERENCE TO RELATED APPLICATION**

- 5 **[0001]** This application claims the benefit of U.S. Provisional Patent Application 62/372,969, filed August 10, 2016, which is incorporated herein by reference.

FIELD OF THE INVENTION

- 10 **[0002]** This invention relates generally to electrocardiograph (ECG) signals, and specifically to detecting ECG signals having similar morphologies.

BACKGROUND OF THE INVENTION

- 15 **[0003]** For correctly mapping regions of a heart chamber which generate an arrhythmia, it is essential that only signals, or beats, exhibiting that specific arrhythmia are captured. Signals from effects such as ectopic beats, mechanical stimulation of the tissue, and arrhythmia changes in morphology due to alternative activation patterns with the same cycle length, should be ignored. Introducing results from such signals into a map will cause inaccuracies in the local activation map, and the deformed visualization of the arrhythmia makes it difficult to clearly identify the arrhythmia mechanisms.
- 20 **[0004]** Documents incorporated by reference in the present patent application are to be considered an integral part of the application except that, to the extent that any terms are defined in these incorporated documents in a manner that conflicts with definitions made explicitly or implicitly in the present specification, only the definitions in the present specification should be considered.

SUMMARY OF THE INVENTION

- 25 **[0005]** An embodiment of the present invention provides a method, including:

- 30 selecting an initial set of electrocardiograph (ECG) signals taken over a single heartbeat of a human subject, the set having respective morphologies to be used as a template for an arrhythmia of the subject;
 receiving a subsequent set of ECG signals taken over a subsequent heartbeat of the human subject;
 performing a cross-correlation between the initial set and the subsequent set, so as to generate a correlation coefficient that is a measure of a goodness of fit between geometries of the initial set and the subsequent set; and
 when the correlation coefficient exceeds a threshold coefficient, accepting the subsequent heartbeat as having been
 35 caused by the arrhythmia.

- [0006]** A disclosed embodiment includes delineating an initial set time window of interest (initial set WOI) around an initial set assumed time of occurrence of the initial set, delineating a subsequent set time window of interest (subsequent set WOI) around a subsequent set assumed time of occurrence of the subsequent set, and using signals of the initial set within the initial set WOI, and signals of the subsequent set within the subsequent WOI in performing the cross-correlation. Typically, the initial set WOI and the subsequent set WOI have a common temporal width.

- [0007]** A further disclosed embodiment includes applying a phase shift between the initial set and the subsequent set prior to performing the cross-correlation. The further disclosed embodiment may also include iteratively altering the phase shift to determine a maximum correlation coefficient, and accepting the subsequent heartbeat as having been
 45 caused by the arrhythmia when the maximum correlation coefficient exceeds the threshold coefficient.

- [0008]** In a yet further disclosed embodiment accepting the subsequent heartbeat as having been caused by the arrhythmia includes incorporating an indication of a location of the arrhythmia into a map of a heart of the human subject.

- [0009]** The ECG signals may be body surface (BS) ECG signals.

- [0010]** Alternatively or additionally, the ECG signals may be intra-cardiac (IC) ECG signals.

- 50 **[0011]** There is further provided, according to an embodiment of the present invention, apparatus, including:

- a set of electrodes, configured to receive an initial set of electrocardiograph (ECG) signals taken over a single heartbeat of a human subject, the set having respective morphologies to be used as a template for an arrhythmia of the subject, and to receive a subsequent set of ECG signals taken over a subsequent heartbeat of the human
 55 subject; and
 a processor, configured to perform a cross-correlation between the initial set and the subsequent set, so as to generate a correlation coefficient that is a measure of a goodness of fit between geometries of the initial set and the subsequent set, and when the correlation coefficient exceeds a threshold coefficient, accept the subsequent

heartbeat as having been caused by the arrhythmia.

[0012] The present disclosure will be more fully understood from the following detailed description of the embodiments thereof, taken together with the drawings, in which:

BRIEF DESCRIPTION OF THE DRAWINGS

[0013]

Fig. 1 is a schematic illustration of an invasive medical procedure, according to an embodiment of the present invention;

Fig. 2 is a schematic block diagram illustrating inputs and outputs of an ECG morphology matching algorithm, according to an embodiment of the present invention;

Fig. 3 is a schematic block diagram illustrating the ECG morphology matching algorithm, according to an embodiment of the present invention; and

Figs. 4, 5, and 6 are schematic diagrams illustrating operations of blocks of the algorithm, according to an embodiment of the present invention.

DETAILED DESCRIPTION OF EMBODIMENTS

OVERVIEW

[0014] Embodiments of the present invention provide an ECG morphology matching algorithm which aims to identify all beats representing the same morphology in ECG signals. The algorithm is compatible with body surface (BS) (typically 12 leads) signals and/or intra-cardiac (IC) signals. The algorithm receives a morphology pattern of ECG signals as an input and searches for the same morphology in continuous ECG signals.

[0015] A user of the present invention selects the input morphology pattern by defining a window of interest (WOI) around a specific annotation. The algorithm compares the morphology of the selected pattern with the morphology of incoming ECG signals. Beats that are within a predetermined weighted correlation threshold are considered to represent the same morphology. The algorithm operates in real-time, as beat signals are acquired by a probe in the heart.

[0016] By using the results of the algorithm, regions of the heart that are the source of the matched beats may be indicated automatically on a map of the heart.

[0017] An embodiment of the present invention provides a method, comprising selecting an initial set of electrocardiograph (ECG) signals taken over a single heartbeat of a human subject, the set having respective morphologies to be used as a template for an arrhythmia of the subject, and receiving a subsequent set of ECG signals taken over a subsequent heartbeat of the human subject. The method further comprises performing a cross-correlation between the initial set and the subsequent set, so as to generate a correlation coefficient that is a measure of a goodness of fit between geometries of the initial set and the subsequent set. When the correlation coefficient exceeds a threshold coefficient, the subsequent heartbeat is accepted as having been caused by the arrhythmia.

DESCRIPTION OF EMBODIMENTS

[0018] Fig. 1 is a schematic illustration of an invasive medical procedure using an apparatus 20, according to an embodiment of the present invention. The procedure is performed by a medical professional 22, and, by way of example, the procedure in the description hereinbelow is assumed to comprise acquisition of intra-cardiac electrocardiogram (IC ECG) signals from a heart 24 of a human patient 26. While embodiments of the present invention analyze either IC ECG or BS (body surface) ECG signals, for simplicity and clarity the following description, except where otherwise stated, assumes that IC ECG signals are analyzed.

[0019] In order to acquire the IC ECG signals, professional 22 inserts a probe 28 into a sheath 30 that has been pre-positioned in a lumen of the patient. Sheath 30 is positioned so that a distal end 32 of the probe may enter the heart of the patient, after exiting a distal end 34 of the sheath, and contact tissue of the heart.

[0020] Probe 28 may comprise any type of catheter that can be inserted into the heart of the patient, and that can be tracked, typically using a magnetic tracking system and/or an impedance measuring system. For example, probe 28 may comprise a lasso catheter, a shaft-like catheter, or a pentaRay catheter, produced by Biosense Webster of Diamond Bar, CA, or catheters generally similar to these catheters. Biosense Webster also produces a magnetic tracking system and an impedance measuring system that may be used in embodiments of the present invention.

[0021] Probe 28 comprises one or more electrodes 36, which are used to acquire the ECG signals used by a processor 40, comprised in apparatus 20, in performing the algorithms described herein. Processor 40, in addition to acting as a

central processing unit, may comprise real-time noise reduction circuitry 44, typically configured as a field programmable gate array (FPGA), followed by an analog-to-digital (A/D) signal conversion integrated circuit 46. The processor can pass the signal from A/D circuit 46 to another processor and can be programmed to perform the algorithms disclosed herein.

[0022] Processor 40 is located in an operating console 60 of the apparatus. Console 60 comprises controls 62 which are used by professional 22 to communicate with the processor. During the procedure, processor 40 communicates with an ECG module 66 in a module bank 70, in order to acquire ECG signals as well as to perform the algorithms disclosed herein.

[0023] ECG module 66 receives ECG signals from electrode 36. In one embodiment the signals are transferred, in module 66, through a low noise pre-amplifier 68, and via low pass and high pass filters 71A, 71B, to a main amplifier 72. Module 436 also comprises an analog to digital converter (ADC) 74, which transfers digitized values of the ECG signals to processor 40, for implementation by the processor of the algorithms described herein. Typically, processor 40 controls the operation of pre-amplifier 68, filters 71A, 71B, amplifier 72, and ADC 74.

[0024] For simplicity Fig. 1 illustrates ECG module 66 as having one channel for receiving signals from electrode 36. However, it will be understood that the module typically comprises multiple channels substantially similar to that shown. For example, module 66 may comprise 12 such channels, which may be used to receive signals from 12 body surface electrodes.

[0025] ECG module 66 enables processor 40 to acquire and analyze EP (electrophysiological) signals received by electrode 36, including the ECG signals referred to herein. The signals are typically presented to professional 22 as voltage-time graphs, which are updated in real time, on a display screen 80.

[0026] The software for processor 40 and module bank 70 may be downloaded to the processor in electronic form, over a network, for example. Alternatively or additionally, the software may be provided on non-transitory tangible media, such as optical, magnetic, or electronic storage media.

[0027] In order to operate apparatus 20, module bank 70 typically comprises modules other than the ECG module described above, such as one or more tracking modules allowing the processor to track the distal end of probe 28. For simplicity, such other modules are not illustrated in Fig. 1. All modules may comprise hardware as well as software elements.

[0028] In addition to display screen 80 presenting ECG signals acquired by electrode 411, results of the algorithms described herein may also be presented to the algorithm user on the display screen. For example, the results may be incorporated into a map 82 of heart 24.

[0029] Fig. 2 is a schematic block diagram illustrating inputs and outputs of an ECG morphology matching algorithm, according to an embodiment of the present invention. The algorithm is implemented by processor 40, and acts as a morphology matching filter 100 which accepts as inputs:

- A set 102 of ECG signals which have been processed as described above, by multiple channels of ECG module 66.
- Reference annotations 104 of the signals, computed by processor 40. An annotation of a signal is an assumed time of occurrence of the signal. In one embodiment the annotation corresponds to the time of occurrence of the largest positive value on one selected ECG signal. Several criteria options exist for the reference annotation (positive value, negative value, largest negative slope, largest positive slope) and for IC ECG signals the time of occurrence typically corresponds to the time of activation of the section of myocardium generating the signal. Criteria for choosing the ECG signal for annotations, corresponding to that described above or other criteria, may be defined by professional 22. The professional also selects the ECG channels to be used to acquire the signals being analyzed. For BS ECG signals there are typically 12 channels; for IC ECG signals the number of channels corresponds to the number of electrodes 36 being used.
- A morphology pattern 106. This is a set of ECG signals that is selected by professional 22, and that is captured at a specific point in time, with a window of interest (WOI) around annotations of the signals that are defined by the professional. The WOI defines the time period for the morphology matching algorithm. Morphology pattern 106 acts as a template against which other ECG signals are compared, and the pattern may also be referred to herein as a template.
- A correlation threshold 108, set by professional 22, to be used by the algorithm in deciding if a beat matches the morphology pattern.

[0030] Outputs of the algorithm are:

- A beat status 110. I.e., an accepted beat having the same morphology as the input morphology pattern 106, or a rejected beat having a different morphology from the input pattern. In one embodiment a location of an accepted beat is incorporated into a map of the heart generating the ECG signals.
- A correlation score 112 for each channel of set 102 of signals (in some embodiments these scores may not be

presented to professional 22).

- A weighted correlation score 114, calculated over all the channels, for each beat.

[0031] Fig. 3 is a schematic block diagram illustrating the ECG morphology matching algorithm, and Figs. 4, 5, and 6 are schematic diagrams illustrating operations of blocks of the algorithm, according to an embodiment of the present invention. By way of example processor 40 is assumed to operate the algorithm. In other embodiments the processor may be a stand-alone processor, and/or a general purpose processor that is typically operating a computer.

[0032] In a first step of the algorithm, corresponding to the "single Channel Correlation" block 120, the processor performs a correlation, with stored morphology pattern 106, within the WOI period as defined by professional 22, for every channel of an incoming beat. Fig. 4 illustrates how the correlation is performed. As shown in Fig. 4, the processor uses as inputs:

- Morphology pattern 106 (Pattern i) described above with reference to Fig. 2.
- An ECG signal to be tested (ECG i,j). The signal to be tested has a WOI temporal width corresponding to the WOI width of the morphology pattern defined by professional 22. The temporal position of the WOI is selected to include a real-time annotation, calculated by the processor, of the signal.

[0033] i is a numerical index defining the channel of the pattern (typically, for BS ECG, i = 1, 2, ... 12), and j is a numerical index defining a position of an annotation of the ECG signal.

[0034] The processor calculates, for each channel, a correlation coefficient according to the following equation:

$$\text{Correlation (x,y)} = \frac{\sum_k (x - \bar{x})(y - \bar{y})}{\sqrt{\sum_k (x - \bar{x})^2 (y - \bar{y})^2}} \quad (1)$$

where

x is the sample value of the template reference ECG data,

$\bar{x}$ is the average value of the template reference ECG data,

y is the sample value of the current beat ECG data being tested,

$\bar{y}$ is the average value of the current beat ECG data being tested, and

k is a numerical index defining which data sample of the ECG signal is being analyzed. For example, if the WOI is for 120 msec, from -50 msec (before the reference annotation) to +70 msec (after the reference annotation), and we sample every msec, then k is a set of 120 values for the 120 samples.

[0035] It will be understood that the correlation performed by equation (1) compares the geometries, or shapes, of the template reference ECG data with the current beat ECG data. A high value of Correlation (x,y), i.e., close to unity, means that the two geometries, of the template and of the current beat, are similar.

[0036] In a second step of the algorithm, corresponding to an "Overall Weighted Correlation" block 124 of Fig. 3, the processor calculates an overall correlation, for a specific beat, using the values of the correlation coefficient calculated in the first step, i.e., according to equation (1).

[0037] Fig. 5 illustrates how the correlation is performed. As shown in Fig. 5, the processor uses as inputs:

- The correlation score, i.e., the output of equation (1) for each channel of a beat being tested. The beat being tested is the ECG signal (of the particular channel) which is in a WOI around a current annotation.
- The ECG signal (beat) being tested.
- The morphology pattern (Pattern i) described above with reference to Fig. 1.

[0038] Also as shown in Fig. 5, the processor calculates an absolute maximum amplitude $A_{i,j}$ of the ECG signal being tested, and an absolute maximum amplitude B_i of the morphology pattern.

[0039] The processor uses the sum of $A_{i,j}$ and B_i as weights to calculate an overall correlation according to equation (2) :

$$\text{Overall Correlation} = \frac{\sum_{i=1}^N (A_{i,j} + B_i) \text{Corr}_{i,j}}{\sum_{i=1}^N (A_{i,j} + B_i)} \quad (2)$$

[0040] Where $\text{Corr}_{i,j}$ is the correlation coefficient calculated by equation (1), and N is the number of ECG channels being analyzed. In the case of BS signals, N is typically 12.

[0041] The overall correlation coefficient calculated by equation (2) depends on the phase of the ECG signal being tested relative to the phase of the morphology pattern.

[0042] In a third step of the algorithm, corresponding to a "Phase Shift" block 128 of Fig. 3, the processor iteratively changes the phase, of the ECG signal being tested, relative to the phase of the morphology pattern. The processor uses as inputs:

- The value of the overall correlation from equation (2).
- The correlation threshold 108 (Fig. 2) as set by professional 22. The threshold may be between 0 and 1, and a typical value is 0.9.

[0043] Fig. 6 explains, in an iteration set of blocks, the iterative process performed by single channel correlation block 120, overall weighted correlation block 124, and phase shift block 128. As shown in Fig. 6, at each iteration, the processor repeats the first two steps described above, in a "shifted single channel correlation" block 120' and a "shifted overall correlation" Block 124'. During the iterations the processor determines a maximum value of the overall correlation as the result of equation (2).

[0044] Fig. 6 illustrates that phase shift iterations are performed every 1 msec in a ± 40 msec time frame measured from the annotation of the beat being analyzed. An index k defines the phase shift being evaluated, and $k = \{-40, \dots, 0, \dots, +40\}$. At each iteration the value of the shifted overall correlation is compared to a previous maximum correlation in a comparison block 130, and if comparison 130 returns positive the overall correlation is updated in an update block 134.

[0045] If the return is negative control continues to a comparison block 138, which checks if there are any more values of index k to be iterated. If there are, k is incremented in an incremental block 142, the new value of k is applied to the ECG signal in a signal block 146, and the flowchart returns to block 120'.

[0046] If the iterations have completed, then control continues to a final comparison block 152, where the output of the iteration set of blocks, the maximum value of the overall correlation that is in block 134 is compared to the input threshold value. If the comparison returns positive, the beat is assumed to represent the same arrhythmia as the morphology pattern. In this case processor 40 may add this beat information into collective information of map 82 of the heart (Fig. 1). If the comparison returns negative, the beat is assumed to represent a different arrhythmia from the morphology pattern, and therefore the information is not added to the map collective information.

[0047] It will be appreciated that the embodiments described above are cited by way of example, and that the present invention is not limited to what has been particularly shown and described hereinabove. Rather, the scope of the present invention includes both combinations and subcombinations of the various features described hereinabove, as well as variations and modifications thereof which would occur to persons skilled in the art upon reading the foregoing description and which are not disclosed in the prior art.

Claims


1. A method, comprising:

selecting an initial set of electrocardiograph (ECG) signals taken over a single heartbeat of a human subject, the set having respective morphologies to be used as a template for an arrhythmia of the subject;
receiving a subsequent set of ECG signals taken over a subsequent heartbeat of the human subject;
performing a cross-correlation between the initial set and the subsequent set, so as to generate a correlation coefficient that is a measure of a goodness of fit between geometries of the initial set and the subsequent set; and
when the correlation coefficient exceeds a threshold coefficient, accepting the subsequent heartbeat as having been caused by the arrhythmia.

2. The method according to claim 1, and comprising delineating an initial set time window of interest (initial set WOI) around an initial set assumed time of occurrence of the initial set, delineating a subsequent set time window of interest (subsequent set WOI) around a subsequent set assumed time of occurrence of the subsequent set, and using signals of the initial set within the initial set WOI, and signals of the subsequent set within the subsequent WOI in performing the cross-correlation.

3. The method according to claim 2, wherein the initial set WOI and the subsequent set WOI have a common temporal width.

4. The method according to claim 1, and comprising applying a phase shift between the initial set and the subsequent set prior to performing the cross-correlation.
5. The method according to claim 4, and comprising iteratively altering the phase shift to determine a maximum correlation coefficient, and accepting the subsequent heartbeat as having been caused by the arrhythmia when the maximum correlation coefficient exceeds the threshold coefficient.
6. The method according to claim 1, wherein accepting the subsequent heartbeat as having been caused by the arrhythmia comprises incorporating an indication of a location of the arrhythmia into a map of a heart of the human subject.
7. Apparatus, comprising:
 - a set of electrodes, configured to receive an initial set of electrocardiograph (ECG) signals taken over a single heartbeat of a human subject, the set having respective morphologies to be used as a template for an arrhythmia of the subject, and to receive a subsequent set of ECG signals taken over a subsequent heartbeat of the human subject; and
 - a processor, configured to perform a cross-correlation between the initial set and the subsequent set, so as to generate a correlation coefficient that is a measure of a goodness of fit between geometries of the initial set and the subsequent set, and when the correlation coefficient exceeds a threshold coefficient, accept the subsequent heartbeat as having been caused by the arrhythmia.
8. The apparatus according to claim 7, and comprising delineating an initial set time window of interest (initial set WOI) around an initial set assumed time of occurrence of the initial set, delineating a subsequent set time window of interest (subsequent set WOI) around a subsequent set assumed time of occurrence of the subsequent set, and using signals of the initial set within the initial set WOI, and signals of the subsequent set within the subsequent WOI in performing the cross-correlation.
9. The apparatus according to claim 8, wherein the initial set WOI and the subsequent set WOI have a common temporal width.
10. The apparatus according to claim 7, wherein the processor is configured to apply a phase shift between the initial set and the subsequent set prior to performing the cross-correlation.
11. The apparatus according to claim 10, wherein the processor is configured to iteratively alter the phase shift to determine a maximum correlation coefficient, and to accept the subsequent heartbeat as having been caused by the arrhythmia when the maximum correlation coefficient exceeds the threshold coefficient.
12. The apparatus according to claim 7, wherein accepting the subsequent heartbeat as having been caused by the arrhythmia comprises incorporating an indication of a location of the arrhythmia into a map of a heart of the human subject.
13. The method according to claim 1 or the apparatus according to claim 7, wherein the ECG signals are body surface (BS) ECG signals.
14. The method according to claim 1 or the apparatus according to claim 7, wherein the ECG signals are intra-cardiac (IC) ECG signals.

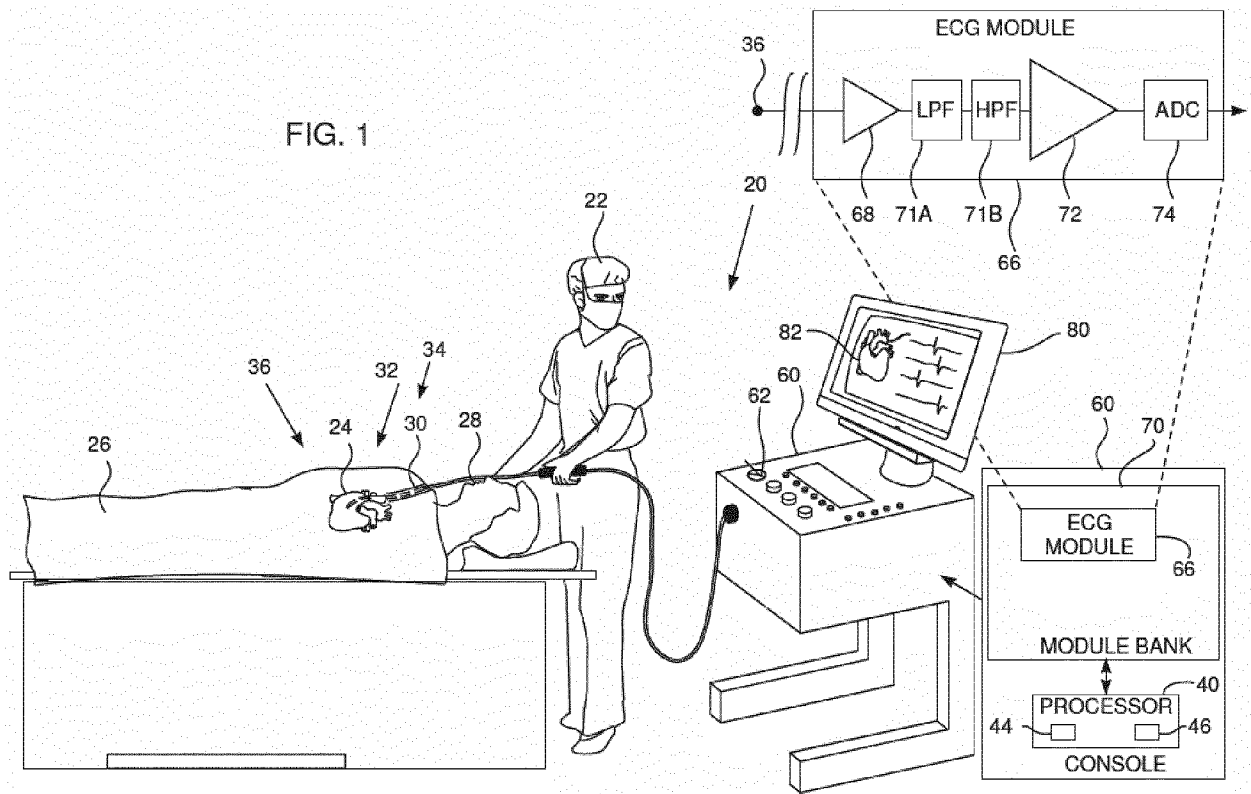



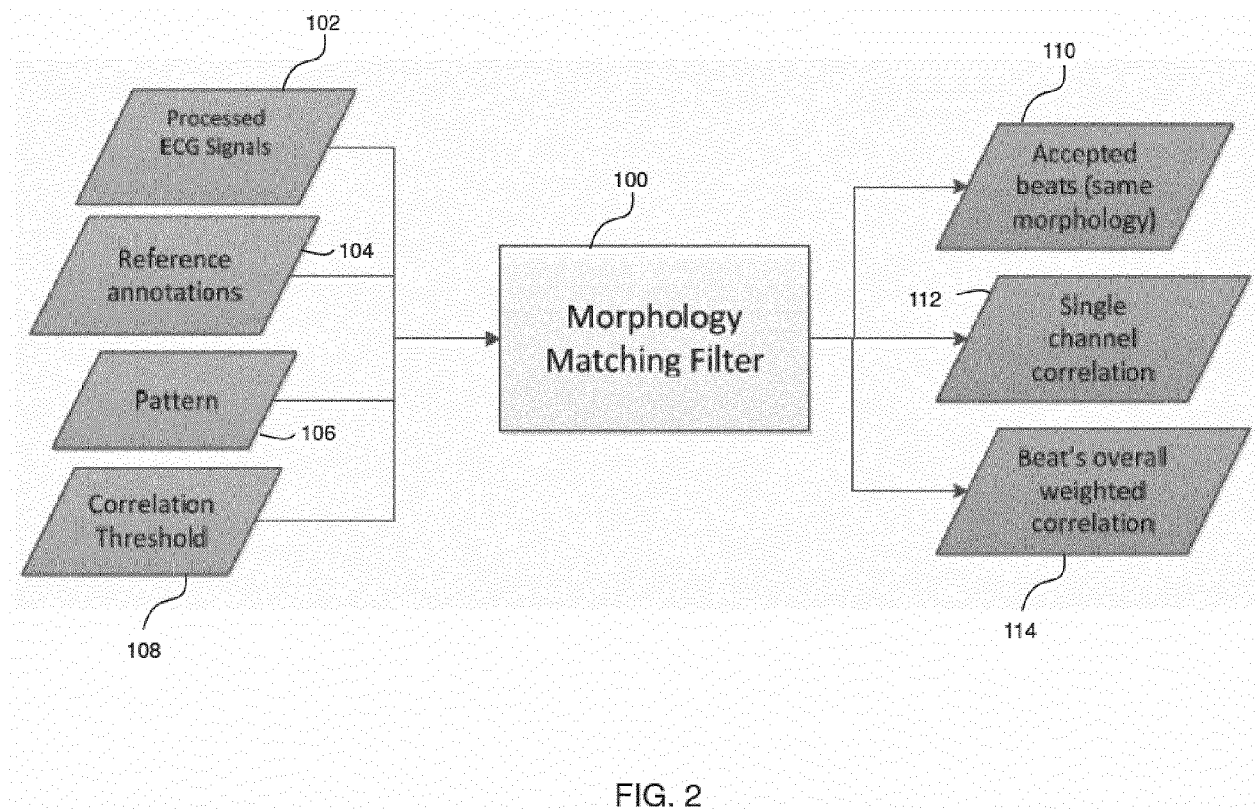


FIG. 2

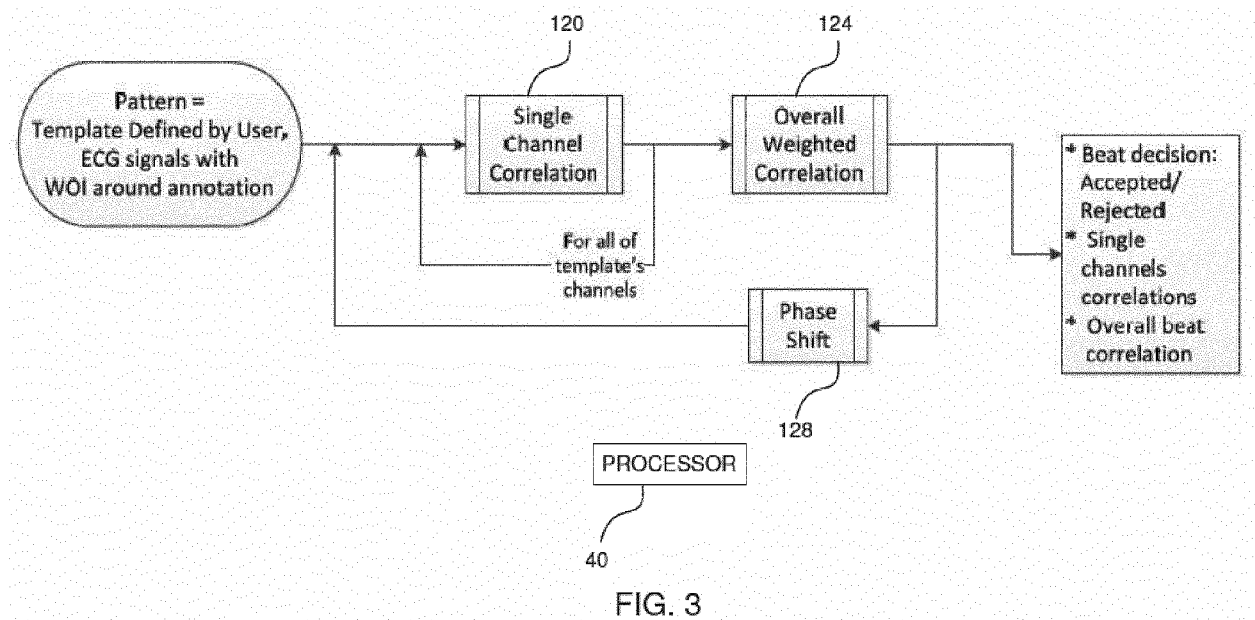

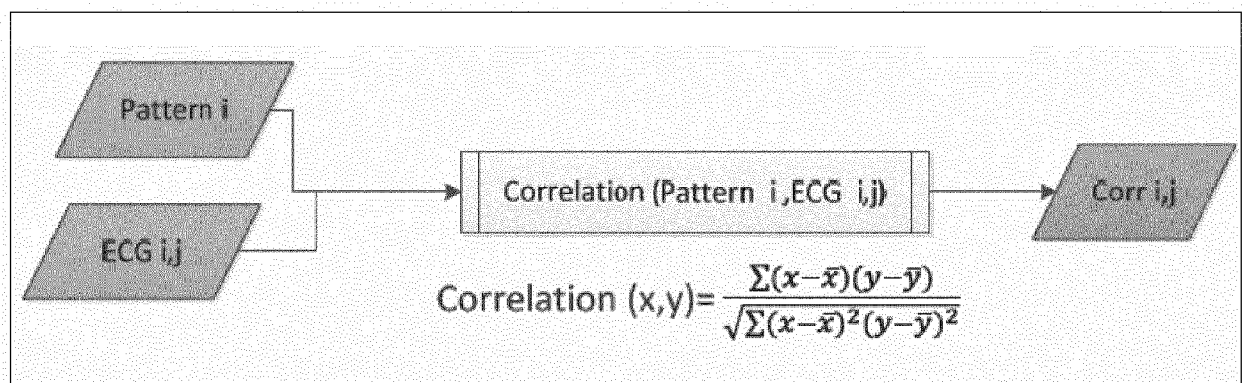

120

FIG. 4

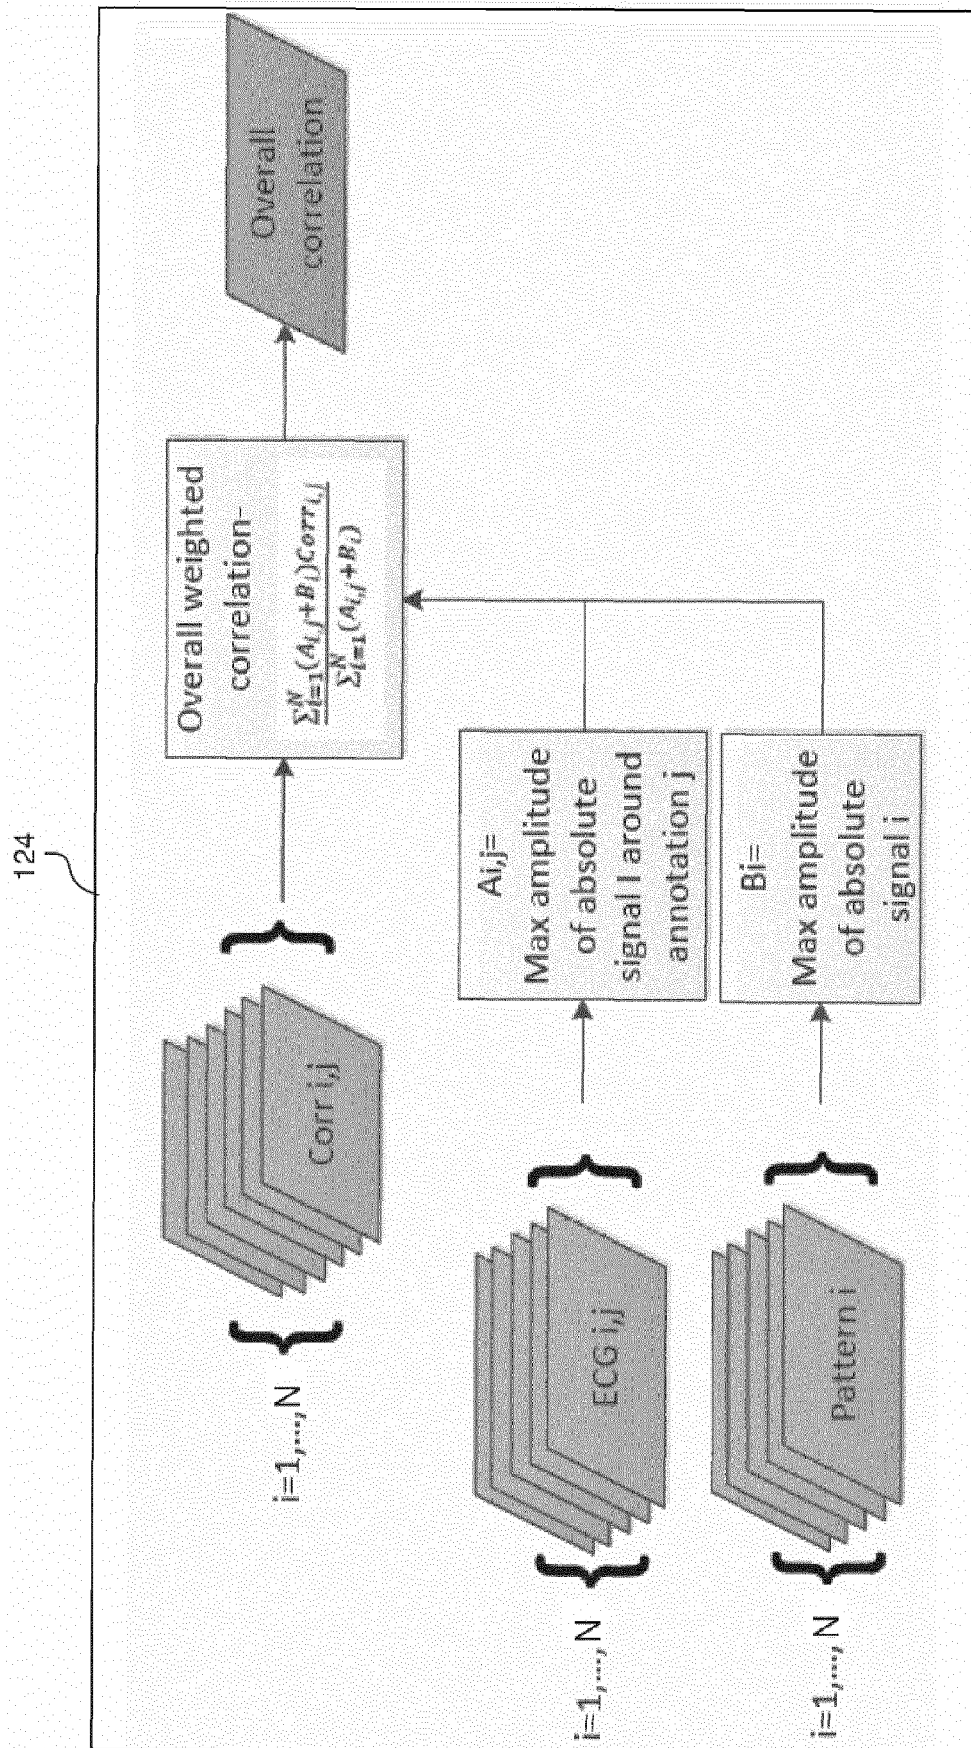


FIG. 5

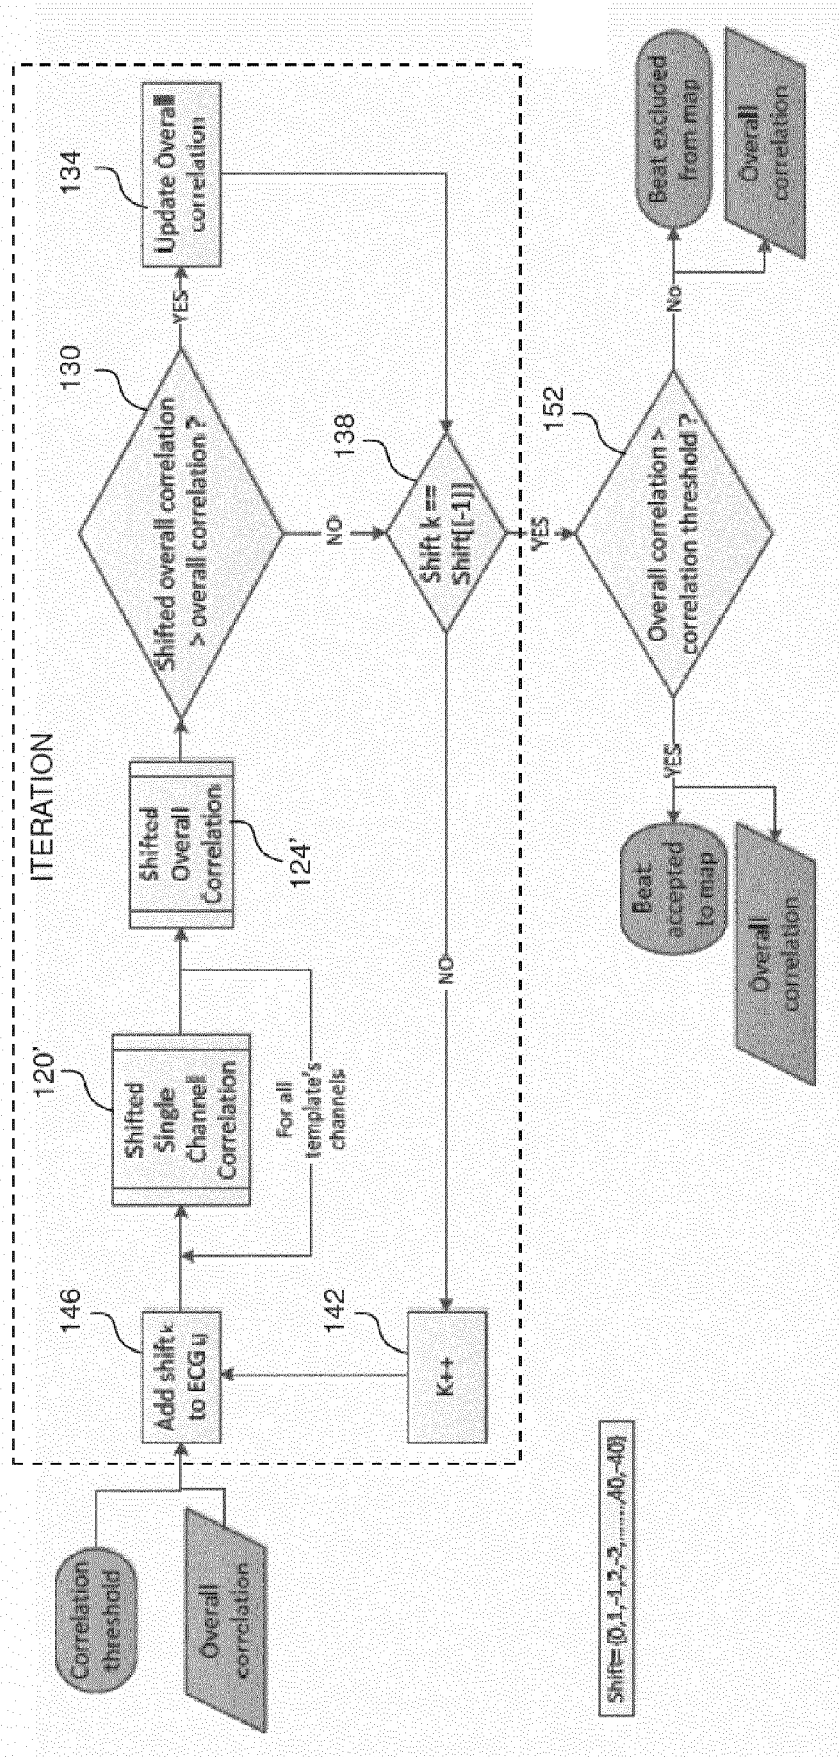


FIG. 6



EUROPEAN SEARCH REPORT

Application Number
EP 17 18 5489

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2012/184858 A1 (HARLEV DORON [US] ET AL) 19 July 2012 (2012-07-19) * paragraphs [0030], [0104], [0114], [0117], [0118], [0121], [0124], [0125], [0136] * * figures 2B, 8 * * equation (1) *	1-14	INV. A61B5/0452 A61B5/046 A61B5/0464 A61B5/0468 A61B5/0472
X	US 2015/057507 A1 (KOYRAKH LEV A [US] ET AL) 26 February 2015 (2015-02-26) * paragraphs [0058], [0074], [0078], [0080] * * figure 1 *	1-14	ADD. A61B5/042 A61B5/00
A	US 2004/243014 A1 (LEE KENT [US] ET AL) 2 December 2004 (2004-12-02) * the whole document *	1-14	
A	US 2014/276159 A1 (ZHANG XUSHENG [US]) 18 September 2014 (2014-09-18) * the whole document *	1-14	
A	US 2014/005496 A1 (SISON SHILOH [US] ET AL) 2 January 2014 (2014-01-02) * the whole document *	1-14	TECHNICAL FIELDS SEARCHED (IPC) A61B
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 4 December 2017	Examiner Meyer, Wolfgang
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 18 5489

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-12-2017

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2012184858	A1	19-07-2012	CA 2824234 A1	19-07-2012
			EP 2663227 A1	20-11-2013
			JP 6007190 B2	12-10-2016
			JP 2014503319 A	13-02-2014
			US 2012184858 A1	19-07-2012
			US 2015282729 A1	08-10-2015
			WO 2012097067 A1	19-07-2012

US 2015057507	A1	26-02-2015	CN 105473066 A	06-04-2016
			EP 2986206 A1	24-02-2016
			JP 6200590 B2	20-09-2017
			JP 2016526474 A	05-09-2016
			US 2015057507 A1	26-02-2015
			WO 2015026733 A1	26-02-2015

US 2004243014	A1	02-12-2004	US 2004243014 A1	02-12-2004
			US 2009105778 A1	23-04-2009
			US 2014081344 A1	20-03-2014

US 2014276159	A1	18-09-2014	NONE	

US 2014005496	A1	02-01-2014	NONE	

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 62372969 A [0001]

专利名称(译)	识别具有相同形态的ECG信号		
公开(公告)号	EP3281579A1	公开(公告)日	2018-02-14
申请号	EP2017185489	申请日	2017-08-09
[标]申请(专利权)人(译)	韦伯斯特生物官能(以色列)有限公司		
申请(专利权)人(译)	生物传感韦伯斯特 (以色列) 有限公司.		
当前申请(专利权)人(译)	生物传感韦伯斯特 (以色列) 有限公司.		
[标]发明人	NAKAR ELAD BEN DOR AMIR GAFNI NOAM SEKER		
发明人	NAKAR, ELAD BEN-DOR, AMIR GAFNI, NOAM SEKER		
IPC分类号	A61B5/0452 A61B5/046 A61B5/0464 A61B5/0468 A61B5/0472 A61B5/042 A61B5/00		
CPC分类号	A61B5/0452 A61B5/0468 A61B5/0422 A61B5/04525 A61B5/046 A61B5/0464 A61B5/0472 A61B5/7246 A61B5/7264 A61B5/743 A61B2505/05 A61B5/04012		
审查员(译)	MEYER , WOLFGANG		
优先权	62/372969 2016-08-10 US 15/646344 2017-07-11 US		
外部链接	Espacenet		

摘要(译)

一种方法，包括选择在人类受试者的单个心跳上获取的初始心电图（ECG）信号集，该组具有各自的形态以用作受试者心律失常的模板，并接收随后的一组ECG信号接下来人类主体的心跳。该方法还包括在初始集合和后续集合之间执行互相关，以便生成相关系数，该相关系数是初始集合和后续集合的几何之间的拟合优度的度量，并且当相关性系数超过阈值系数，接受随后的心跳是由心律失常引起的。

$$\text{Correlation}(x, y) = \frac{\sum_k (x - \bar{x})(y - \bar{y})}{\sqrt{\sum_k (x - \bar{x})^2 \sum_k (y - \bar{y})^2}} \quad (1)$$