



(11) **EP 3 046 466 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
03.04.2019 Bulletin 2019/14

(51) Int Cl.:
A61B 5/0476 ^(2006.01) **A61B 5/048** ^(2006.01)
A61B 5/16 ^(2006.01) **A61B 5/00** ^(2006.01)

(21) Application number: **13763108.1**

(86) International application number:
PCT/EP2013/069521

(22) Date of filing: **19.09.2013**

(87) International publication number:
WO 2015/039689 (26.03.2015 Gazette 2015/12)

(54) **METHOD AND SYSTEM FOR DETERMINING A PARAMETER WHICH IS INDICATIVE FOR WHETHER A PATIENT IS DELIRIOUS**

VERFAHREN UND SYSTEM ZUR BESTIMMUNG EINES PARAMETERS ZUR ANZEIGE DES DELIRIUMSSTATUS EINES PATIENTEN

PROCÉDÉ ET SYSTÈME PERMETTANT DE DÉTERMINER UN PARAMÈTRE INDIQUANT SI UN PATIENT EST DÉLIRANT

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(74) Representative: **van der Krans, Arie**
IPecunia Patents B.V.
P.O. Box 593
6160 AN Geleen (NL)

(43) Date of publication of application:
27.07.2016 Bulletin 2016/30

(56) References cited:
US-A- 5 230 346 US-A- 6 021 346
US-A- 6 097 980

(73) Proprietor: **UMC Utrecht Holding B.V.**
3584 CM Utrecht (NL)

- **ONOE ET AL: "EEG spectral analysis in children with febrile delirium", BRAIN AND DEVELOPMENT, AMSTERDAM, NL, vol. 26, no. 8, 1 December 2004 (2004-12-01), pages 513-518, XP004632395, ISSN: 0387-7604, DOI: 10.1016/J.BRAINDEV.2004.02.004**

(72) Inventors:

- **VAN DER KOOL, Arendina Wilhelmina**
3584 CM Utrecht (NL)
- **SLOOTER, Arjen Jacob Cornelis**
3584 CM Utrecht (NL)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a method and system for determining a parameter which is indicative for whether a patient is delirious or not or is at risk of becoming delirious or not.

[0002] Delirium is an acute disturbance of consciousness and cognition that usually fluctuates over time. It is a common disorder, with reported incidences of more than 60% during Intensive Care Unit (ICU) stay and over 15% on a geriatric ward or medium care unit. Delirium is associated with higher mortality, longer hospital stay, long-term cognitive impairment and increased costs. There are three different subtypes of delirium based on psychomotor behavior: hypoactive, hyperactive and mixed-type delirium.

[0003] Despite its frequency and impact, recognition of delirium by health care professionals is poor. Exceptions are hyperactive forms of delirium, but these are relatively rare. Furthermore, delayed treatment of delirium in ICU patients was found to increase mortality. In order to improve early diagnosis and treatment, the Society of Critical Care Medicine and the American Psychiatric Association recommend daily monitoring of delirium in ICU patients. Various delirium assessment tools have been developed. Of these, the Confusion Assessment Method for the ICU (CAM-ICU) had highest sensitivity in ICU patients. However, the sensitivity of the CAM-ICU in routine, daily practice appeared to be low (overall 47%), particularly to detect the hypoactive type of delirium (sensitivity 31%) and delirium in postoperative patients. Unfortunately, the CAM-ICU has more limitations. Firstly, it cannot quantify the severity of delirium and secondly, cognitive screening does not fit well in the culture of the ICU that is primarily orientated on monitoring of physiological alterations. These factors hinder early treatment and may therefore impair outcome. Moreover, research on delirium in the ICU is hampered by the lack of a sensitive tool for monitoring.

[0004] Prior art document US 5,230,346 discloses methods and systems for diagnosing brain conditions including delirium in a human using analysis of EEG signals.

[0005] It is therefore a goal of the present invention, which is defined in independent claims 1 and 9 and their corresponding dependent claims 2 - 8 and 10 - 16, amongst other goals, to provide a reliable and efficient method for the determination of a parameter which is indicative for whether a patient is delirious or not.

[0006] The invention is based on the recognition that also a reliable parameter which can assist a physician in establishing whether a patient is delirious or not can be determined using the recordings of a minimal number of electrodes, for instance 2, 3, 4 or 5 electrodes. Applying all electrodes according to (extended) 10-20 EEG system is not necessary according to the invention.

[0007] The EEG data contains recording signals of the at least two electrodes which were located on different locations on the scalp of the patient during recording. The at least two recording signals are representative of brain activity as measured at these locations. The signals represent the change over time of the measured voltages, typically in the range of 10 μ V - 100 μ V, during the predetermined time period.

[0008] Contrary to the general assumption that frontal electrode locations are less suitable for establishing an indicative parameter, due to the negative influence of eye movements, particular good results were obtained when at least one the signals was recorded on the front half of the scalp.

[0009] More specifically, according to a preferred embodiment, at least one of the signals is recorded from the frontal, central or temporal region as defined by the extended 10-20 EEG system (Modified Combinatorial Nomenclature). Even more specifically, a signal is preferably recorded at or near at least one of the locations indicated with F_{px} , F_x , AF_x , FC_x , C_x or T_x , x representing each of the available locations. Most preferred in terms of efficiency of placement and reliable results are however the frontal (F_x) locations.

[0010] In particular good results are obtained if, according to a further preferred embodiment, the EEG data also comprises recording signals recorded from the parietal or occipital region on the patient's scalp as defined by the extended 10-20 EEG system (Modified Combinatorial Nomenclature). According to this embodiment, at least one electrode is located on the front half of the scalp and at least one electrode is located on a parietal or occipital location. Specifically, a signal is preferably also recorded at or near at least one of the locations indicated with TP_x , CP_x , P_x , PO_x or O_x , x representing each of the available locations.

[0011] More preferably, the EEG data comprises recording signals recorded from a location indicated with F_8 , F_{p2} or F_{pz} and recording signals recorded from a location indicated with P_z , P_3 , O_1 or O_2 . According to a specific embodiment, as will be explained in more detail below, signals are recorded from only these two locations.

[0012] The signals obtained from these locations seem to provide a good basis for the determination of the parameter which can be efficiently used by a physician to establish whether the patient is delirious or not. In particular by calculating the relative delta power as parameter for these locations, as will be explained in greater detail below, a reliable parameter can be determined.

[0013] It should be noted that the invention is not limited to the exact locations as specified above. Some deviation from the locations is allowed, such that for instance also the positions on the scalp near, surrounding and between the mentioned locations are within the scope. A location is considered near a location specified according to the 10/20 system when such a location is between the specified location and an adjacent location as specified according to the

10/20 system. In fact, it is particularly advantageously that the exact placement of the electrodes according to the invention is less critical. Therefore, according to a further preferred embodiment, the EEG data comprises recording signals recorded from a location in the neighbourhood of the locations indicated with F_8 , F_{p2} or F_{pz} and recording signals recorded from a location in the neighbourhood of the locations indicated with P_z , P_3 , O_1 or O_2 . A less critical placement of the electrodes increases the efficiency and usability of applying the electrodes to the patient.

[0014] The predetermined time period is preferably chosen such that a signal can be obtained which is representative of the brain activity while at rest. According to a preferred embodiment, the predetermined time period is in the range of 10 seconds - 45 minutes, preferably approximately 1 minute.

[0015] The method, for instance during the step of processing, further preferably comprises selecting artifact free sections having a length of the predetermined time period from the EEG data. These signal sections are then used for obtaining the deviation signal. Artifacts, for instance caused by eye or head movement or blinking, are disturbances in the recorded EEG signal which influence the determination of the parameter. It is thus preferred that the EEG data, or at least the signals used as input for the processing step, contains signals being free from artifacts during the predetermined time period. The processing step then preferably comprises obtaining a deviation signal from the two artifact free recording signals. It may be preferable to obtain EEG data having a length of a longer predetermined time period to be able to select a length of artifact free signals having a length of the predetermined time period from this longer predetermined period.

[0016] In the processing step, the difference between the two signals is preferably calculated, for instance by subtracting the first signal from the second signal. By using a deviation of two recordings of brain waves, a reliable parameter can be determined. This deviation signal therefore represents the difference in measurements, in particular in terms of voltages, as measured between the two electrodes during the predetermined time period. Preferably the step of processing comprises obtaining at least one bipolar deviation from said two electrodes as the signal being representative of the difference between the measurements of the electrodes. It is remarked that although only a limited number, for instance two, of recordings from electrodes are used according to the invention, it may be possible that for instance an additional electrode is used as a ground electrode for obtaining the signals of the two other electrodes.

[0017] The thus obtained deviation signal which preferably corresponds to the difference in measurement signals of the two electrodes is then analyzed to determine the parameter which is indicative whether the patient is delirious or not. According to a specific embodiment, the invention relates to a non-diagnostic method for determining a parameter which is indicative whether a patient is delirious or not which can be used by a physician or other user to diagnose whether the patient is delirious or not or is at risk of becoming delirious, also taking into account other parameters and observations.

[0018] The invention is in particular directed towards determining a parameter which is indicative whether an awake, i.e. not sleeping and non-comatose, and non-sedated patient is delirious or not or is at risk of becoming delirious. The EEG data thereto preferably contains signals recorded while the patient was awake and non sedated. An even more reliable parameter can be determined when the EEG data contains signals recorded from the patient with eyes closed.

[0019] The parameter can not only be used as an indication for the physician whether the patient is delirious or not at the moment of recording, but is also usable in indicating whether a patient is at risk of becoming delirious. It is for instance possible to determine the parameter according to the invention at different moments to indicate a trend. It may for instance be possible that the parameter at a given moment is not yet indicative of a delirium, but that a trend is visible towards a value of the parameter which is indicative of a delirium.

[0020] As said, the slowing of this deviation signal appears to be a good indication whether the patient is delirious or not. With the term slowing of the signal is meant a decrease in overall or relative frequency or a decrease or increase in a specific frequency band. The manner of calculating the degree of slowing and the locations of the electrodes from which the recording signals in EEG data are obtained, are chosen such that this parameter is indeed indicative for whether the patient is delirious or not.

[0021] In general terms, it is possible to establish a parameter as the relative power of a narrow frequency band, for instance in the order of magnitude having a width of 2 - 15 Hz, with respect to a broader frequency band, for instance 0.5 - 30 Hz. An increase in relative power of a frequency band in the lower range of the broader range is then indicative for slowing of the EEG. On the other hand, also a decrease in relative power of a narrower frequency band in the higher range, i.e. having higher frequencies, is indicative of slowing of the EEG and can therefore be used as a parameter according to the invention.

[0022] More specifically, according to a preferred embodiment, the step of analyzing comprises calculating the degree of slowing as the relative power of the deviation signal in at least one of the delta band (up to 4 Hz), the theta band (4 - 8 Hz), the alpha band (8 - 13 Hz) and the beta band (13 - 30 Hz) or a combination thereof. The relative power of a particular band is defined as the ratio between the power of the signal in said frequency band divided by the total power of each of the brain waves, preferably after filtering as will be explained in more detail below.

[0023] It should be noted that the invention is not limited to the exact ranges as indicated above, such that the deviations with respect to the upper and lower limits are within the scope.

[0024] A power spectrum of the deviation signal obtained from the step of processing is hereto calculated, for instance by a Fourier Transformation as known in the art. As an example, the power spectrum of the deviation signal is calculated using a Welch's averaged modified periodogram method of spectral estimation,

- using $8/(\text{sample frequency})$ as segment length;-
- using segments with 50% overlap;
- wherein any remaining entries that cannot be included in the segments of equal lengths are discarded;
- wherein each segment is windowed with a Hamming window that is the same length as the segment.

[0025] The power in the frequency band of each of the brainwaves, preferably 0.5 - 30 Hz after filtering as will be explained below, is summed as the absolute total power and the power in the relevant frequency band, for instance 0.5 - 4 Hz for the relative delta power, is then summed as the absolute power. The relative power is then defined by dividing the absolute power by the absolute total power. This relative power can then be used, provided that the locations of electrodes are suitable, as the parameter which is indicative whether a patient is delirious or not or is at risk of becoming delirious.

[0026] Using the relative power of the deviation signal in the delta band, the alpha band or the beta band as the parameter is preferred in view of the predicting capabilities. In particular reliable parameters were however obtained if the parameter is defined as the relative power of the deviation signal in the delta band (up to 4 Hz). Tests have concluded that the relative power in the delta band as the parameter allow a physician or another user to reliably predict whether the patient is delirious or not.

[0027] Another reliable determination is achieved if the parameter is defined as a ratio between the relative power of a lower frequency band, for instance in the delta or theta band, and the relative power of a higher frequency band, for instance in the alpha or beta band. More preferably the parameter is defined as the slow-fast ratio which is defined as: $(\text{relative delta power} + \text{relative theta power}) / (\text{relative alpha power} + \text{relative beta power})$.

[0028] When, according to a different embodiment, the parameter is defined as the peak frequency, also reliable results have been obtained. The peak frequency is defined by the frequency with the maximal power in the frequency spectrum. A decrease of this peak frequency may be interpreted by a physician or other user that the patient is suffering from a delirium.

[0029] It is possible that the method simply returns the calculated parameter, for instance by displaying the resulting parameter on a screen, or by outputting a signal representative of the said parameter using a suitable output, for instance in the form of a connector.

[0030] It is however also possible that this parameter is compared to a predetermined threshold to provide the physician with extra information. If the calculated parameter meets the criterion, this can be interpreted by the physician as slowing of the relevant signal such that the patient may be delirious. Thresholds are dependent on the locations of the electrodes and the intended use in terms of specificity and sensitivity. As an example, the thresholds for the different parameters on for electrodes C4-O1 were found to be as listed in table 1:

Table 1

Par	P-value	AUC	Sens (%)	Spec (%)	Thres	Crit
Delta	2.48E-09	0.94	92	92	0.3753	>
Alpha	5.06E-09	0.93	85	88	0.1435	<
S/F	5.65E-08	0.91	92	81	2.9172	>
Peak	2.98E-06	0.86	81	1	6.3750	<
Beta	3.32E-05	0.82	84	76	0.0714	<
Theta	0.92	0.51	56	54	0.3444	<

[0031] With:

Par	Parameter:	Delta:	relative delta power
		Alpha:	relative delta power
		S/F:	slow-fast ratio
		Peak:	peak frequency
		Beta:	relative beta power

(continued)

Theta: relative theta power

AUC Area Under Curve of the receiver operating characteristic (ROC)

Sens Sensitivity

Spec Specificity

Thres Threshold

Crit Criterion: indication of delirium if test value is greater (>) or smaller (<) than threshold

[0032] According to further preferred embodiment, the step of processing comprises filtering said EEG data for filtering out data having a frequency below a predetermined lower threshold and data having a frequency above a predetermined higher threshold, wherein the lower threshold is chosen between 0,1 Hz to 1 Hz, preferably 0,5 Hz, and wherein the higher threshold is chosen between 10 to 70 Hz, preferably 30 Hz. Preferably, the step comprises using a band pass FIR filter with cut-off frequencies of 0.5 and 30 Hz.

[0033] A particular advantage of the method of the invention is that only the recordings of limited number of electrodes, or even a single pair of electrodes, can be used to determine the parameter. According to a preferred embodiment, the parameter is based exclusively on the recordings of the limited number of electrodes, most preferably only two electrodes. It is therefore no longer necessary to include the recordings of all of the electrodes as prescribed by for instance the 10/20 system, see figures 1 and 2. The EEG data therefore preferably contains recording signals of two electrodes only, which allows efficient processing due to a decrease in recordings compared to EEG recordings as known in the art.

[0034] More preferably, the EEG data is recorded only from the limited number of electrodes, for instance 2, 3, 4 or 5 and most preferably only 2. An extra, for instance third, electrode may however optionally be used a ground electrode during recording for establishing the signals being representative of the brain activity as measured at the two electrodes. Being able to determine a parameter which is indicative whether a patient is delirious or not using only this limited number of electrodes makes the method in particularly suitable for a routine clinical setting, for example the ICU. Although it is also possible to provide an indicative parameter using the deviations from each of the electrodes of the 10/20 system, such a system is too complicated to be practical in an ICU setting. Applying the minimal number of electrodes according to the invention is however not difficult and fits within the work process of clinical personnel.

[0035] As already mentioned, the parameter representative of the degree of slowing of the signal and the locations of the electrodes on the scalp of the patient must be chosen such that the resulting parameter is indeed indicative for whether the patient is delirious or not.

[0036] The determination of the positions of the two electrodes and the parameter to be calculated from the signals can be established by statistically comparing the different parameters being representative of the slowing of the signal obtained from each possible electrode pair deviation of the (extended) 10/20 system on a patient diagnosed to be delirious or not. This is preferably applied to a larger group of patients. Reference is made to the Example for determining combinations of locations and parameter as included below.

[0037] Table 2 as included below lists the results of this determination. It is noted that each of the electrode combinations as listed contains at least one electrode being positioned on the front half of the scalp according to the invention. According to a preferred embodiment, the EEG data contains recording signals obtained from locations on the scalp as listed in any of the rows of Table 2 as included below, wherein the column 'Loc 1' specifies the location of a first electrode in the extended 10/20 system, the column 'Loc 2' specifies the location of the second electrode in the extended 10/20 system, wherein the parameters marked with 'x' for the combinations of locations are indicative whether an awake, non-comatose patient with eyes closed is delirious or not, wherein:

Rel Alpha, Beta, Theta or Delta corresponds to the Relative Alpha, Beta, Theta or Delta Power as defined above, respectively;

S/F Ratio corresponds to the Slow-Fast Ratio as defined above;

Peak freq corresponds to the peak frequency as defined above.

Table 2:

Loc 1	Loc 2	Rel Alpha	Rel Beta	Rel Delta	S/F Ratio	Peak Freq
'C3'	'O1'	x		x	x	
'C3'	'O2'	x		x	x	x
'C3'	'P3'	x		x	x	x

EP 3 046 466 B1

(continued)

5

10

15

20

25

30

35

40

45

50

55

Loc 1	Loc 2	Rel Alpha	Rel Beta	Rel Delta	S/F Ratio	Peak Freq
'C3'	'P4'	x		x	x	x
'C3'	'P7'	x		x	x	
'C3'	'P8'	x	x	x	x	x
'C3'	'Pz'	x		x	x	x
'C3'	'T7'	x		x	x	
'C4'	'C3'	x	x	x	x	
'C4'	'Cz'	x	x	x	x	
'C4'	'O1'	x	x	x	x	x
'C4'	'O2'	x	x	x	x	x
'C4'	'P3'	x		x	x	x
'C4'	'P4'	x	x	x	x	
'C4'	'P7'	x	x	x	x	x
'C4'	'P8'	x	x	x	x	
'C4'	'Pz'	x	x	x	x	x
'C4'	'T7'	x	x	x	x	
'Cz'	'C3'	x	x	x	x	
'Cz'	'O1'	x	x	x	x	
'Cz'	'O2'	x	x	x	x	x
'Cz'	'P3'	x	x	x	x	
'Cz'	'P4'	x	x	x	x	x
'Cz'	'P7'	x	x	x	x	
'Cz'	'P8'	x	x	x	x	x
'Cz'	'Pz'	x	x	x	x	
'Cz'	'T7'	x	x	x	x	
'F10'	'C3'	x	x	x	x	
'F10'	'C4'	x	x	x	x	
'F10'	'Cz'	x	x	x	x	
'F10'	'F3'	x	x	x	x	
'F10'	'F4'	x	x	x	x	
'F10'	'F7'	x	x	x	x	
'F10'	'Fp1'	x			x	
'F10'	'Fp2'	x				
'F10'	'Fz'	x	x	x	x	
'F10'	'O1'	x	x	x	x	
'F10'	'O2'	x	x	x	x	
'F10'	'P3'	x	x	x	x	
'F10'	'P4'	x	x	x	x	
'F10'	'P7'	x	x	x	x	

EP 3 046 466 B1

(continued)

5

10

15

20

25

30

35

40

45

50

55

Loc 1	Loc 2	Rel Alpha	Rel Beta	Rel Delta	S/F Ratio	Peak Freq
'F10'	'P8'	x	x	x	x	
'F10'	'Pz'	x	x	x	x	
'F10'	'T7'	x	x	x	x	
'F10'	'T8'	x	x	x	x	
'F3'	'C3'	x		x	x	
'F3'	'C4'	x	x	x	x	
'F3'	'Cz'	x	x	x	x	
'F3'	'F7'	x		x	x	
'F3'	'O1'	x		x	x	
'F3'	'O2'	x		x	x	
'F3'	'P3'	x		x	x	
'F3'	'P4'	x		x	x	
'F3'	'P7'	x		x	x	
'F3'	'P8'	x		x	x	
'F3'	'Pz'	x		x	x	
'F3'	'T7'	x		x	x	
'F3'	'T8'	x	x	x	x	
'F4'	'C3'	x	x	x	x	
'F4'	'C4'	x		x	x	
'F4'	'Cz'	x	x	x	x	
'F4'	'F3'	x		x	x	
'F4'	'F7'	x	x	x	x	
'F4'	'Fz'	x		x	x	
'F4'	'O1'	x		x	x	
'F4'	'O2'	x	x	x	x	
'F4'	'P3'	x	x	x	x	
'F4'	'P4'	x		x	x	
'F4'	'P7'	x		x	x	
'F4'	'P8'	x		x	x	
'F4'	'Pz'	x		x	x	
'F4'	'T7'	x	x	x	x	
'F4'	'T8'	x	x	x	x	
'F7'	'C3'	x		x	x	
'F7'	'C4'	x	x	x	x	
'F7'	'Cz'	x	x	x	x	
'F7'	'O1'	x	x	x	x	
'F7'	'O2'	x	x	x	x	
'F7'	'P3'	x	x	x	x	

EP 3 046 466 B1

(continued)

5

10

15

20

25

30

35

40

45

50

55

Loc 1	Loc 2	Rel Alpha	Rel Beta	Rel Delta	S/F Ratio	Peak Freq
'F7'	'P4'	x	x	x	x	
'F7'	'P7'	x	x	x	x	
'F7'	'P8'	x	x	x	x	
'F7'	'Pz'	x	x	x	x	
'F7'	'T7'	x		x	x	
'F7'	'T8'	x	x	x	x	
'F8'	'C3'	x	x	x	x	
'F8'	'C4'	x	x	x	x	
'F8'	'Cz'	x	x	x	x	
'F8'	'F3'	x	x	x	x	
'F8'	'F4'	x		x	x	
'F8'	'F7'	x	x	x	x	
'F8'	'Fz'	x	x	x	x	
'F8'	'O1'	x	x	x	x	
'F8'	'O2'	x	x	x	x	
'F8'	'P3'	x	x	x	x	
'F8'	'P4'	x	x	x	x	
'F8'	'P7'	x	x	x	x	
'F8'	'P8'	x	x	x	x	
'F8'	'Pz'	x	x	x	x	x
'F8'	'T7'	x	x	x	x	
'F8'	'T8'	x		x	x	
'F9'	'C3'	x	x	x	x	
'F9'	'C4'	x	x	x	x	
'F9'	'Cz'	x	x	x	x	
'F9'	'F10'	x	x		x	
'F9'	'F3'	x	x	x	x	
'F9'	'F4'	x	x	x	x	
'F9'	'F7'		x	x	x	
'F9'	'F8'	x	x	x	x	
'F9'	'Fp1'	x			x	
'F9'	'Fp2'	x		x	x	
'F9'	'Fz'	x	x	x	x	
'F9'	'O1'	x	x	x	x	
'F9'	'O2'	x	x	x	x	
'F9'	'P3'	x	x	x	x	
'F9'	'P4'	x	x	x	x	
'F9'	'P7'	x	x	x	x	

EP 3 046 466 B1

(continued)

	Loc 1	Loc 2	Rel Alpha	Rel Beta	Rel Delta	S/F Ratio	Peak Freq
5	'F9'	'P8'	x	x	x	x	
	'F9'	'Pz'	x	x	x	x	
	'F9'	'T7'	x		x	x	
	'F9'	'T8'	x	x	x	x	
10	'Fp1'	'C3'	x		x	x	
	'Fp1'	'C4'	x	x	x	x	
	'Fp1'	'Cz'	x	x	x	x	
15	'Fp1'	'F4'	x			x	
	'Fp1'	'F7'	x				
	'Fp1'	'F8'	x	x	x	x	
	'Fp1'	'Fz'	x				
20	'Fp1'	'O1'	x		x	x	
	'Fp1'	'O2'	x	x	x	x	
	'Fp1'	'P3'	x		x	x	
25	'Fp1'	'P4'	x	x	x	x	
	'Fp1'	'P7'	x		x	x	
	'Fp1'	'P8'	x	x	x	x	
	'Fp1'	'Pz'	x	x	x	x	
30	'Fp1'	'T7'	x		x	x	
	'Fp1'	'T8'	x	x	x	x	
	'Fp2'	'C3'	x	x	x	x	
35	'Fp2'	'C4'	x	x	x	x	
	'Fp2'	'Cz'	x	x	x	x	
	'Fp2'	'F3'	x		x	x	
	'Fp2'	'F4'	x				
40	'Fp2'	'F7'	x	x	x	x	
	'Fp2'	'F8'	x			x	
	'Fp2'	'Fp1'	x		x	x	
45	'Fp2'	'Fz'	x		x	x	
	'Fp2'	'O1'	x		x	x	
	'Fp2'	'O2'	x	x	x	x	
	'Fp2'	'P3'	x	x	x	x	
50	'Fp2'	'P4'	x		x	x	
	'Fp2'	'P7'	x	x	x	x	
	'Fp2'	'P8'	x	x	x	x	
55	'Fp2'	'Pz'	x	x	x	x	
	'Fp2'	'T7'	x	x	x	x	
	'Fp2'	'T8'	x	x	x	x	

(continued)

Loc 1	Loc 2	Rel Alpha	Rel Beta	Rel Delta	S/F Ratio	Peak Freq
'Fz'	'C3'	x	x	x	x	
'Fz'	'C4'	x	x	x	x	
'Fz'	'Cz'	x	x	x	x	
'Fz'	'F3'	x		x	x	
'Fz'	'F7'	x	x	x	x	
'Fz'	'O1'	x	x	x	x	
'Fz'	'O2'	x	x	x	x	x
'Fz'	'P3'	x	x	x	x	
'Fz'	'P4'	x	x	x	x	
'Fz'	'P7'	x	x	x	x	
'Fz'	'P8'	x	x	x	x	x
'Fz'	'Pz'	x	x	x	x	
'Fz'	'T7'	x	x	x	x	
'Fz'	'T8'	x	x	x	x	
'T7'	'O1'	x		x	x	
'T7'	'O2'	x		x	x	
'T7'	'P3'	x		x	x	
'T7'	'P4'	x	x	x	x	
'T7'	'P7'	x		x	x	
'T7'	'P8'	x		x	x	x
'T7'	'Pz'	x	x	x	x	
'T8'	'C3'	x	x	x	x	
'T8'	'C4'	x	x	x	x	
'T8'	'Cz'	x	x	x	x	
'T8'	'O1'	x	x	x	x	
'T8'	'O2'	x	x	x	x	
'T8'	'P3'	x	x	x	x	
'T8'	'P4'	x		x	x	
'T8'	'P7'	x	x	x	x	
'T8'	'P8'	x		x	x	
'T8'	'Pz'	x	x	x	x	
'T8'	'T7'	x	x	x	x	

[0038] The EEG data can be recorded beforehand to be subsequently processed and analyzed according to the invention. The data can thereto for instance be stored on a suitable information carrier. The step of providing the EEG data may therefore comprise loading the dataset in a suitable memory for further processing as is as such known in the art.

[0039] It is however also possible that the data is obtained by recording the signals from the two electrodes, preferably from only two electrodes, on the patient's scalp, for instance in (semi) real time.

[0040] The invention further relates to a system for determining a parameter which is indicative for whether a patient is delirious or not or is at risk of becoming delirious according to the method according to the invention, wherein the

system comprises:

- input means for receiving electroencephalography (EEG) data comprising recording signals from at least two electrodes located on different locations on the patient's scalp during a predetermined time period, for instance at least 10 seconds, wherein at least one of the signals is recorded from the front half of the scalp;
- processing means for processing said EEG data for obtaining a deviation signal from the two recording signals from the electrodes;
- analyzing means for analyzing said deviation signal in the frequency spectrum for establishing slowing of said deviation signal and for defining the parameter as the degree of slowing of said deviation signal which in combination with the locations of the recordings on the patient's scalp is indicative whether said patient is delirious or not or is at risk of becoming delirious;
- output means for outputting said parameter.

[0041] The input means may for instance be formed by a suitable data carrier for receiving the EEG data previously obtained by recording the signals from the patient's scalp. The system according to the invention may for instance comprise a Personal Computer including a processor, memory and storage means as known in the art as such. It is however preferred if the system comprises a hand held, or at least portable, device provided with the input means, the processing, analyzing means and output means such that the device can be efficiently used in a routine clinical setting, for example the ICU.

[0042] The analyzing means and processing means may be formed integrally and may for instance be formed, or comprise, a suitable processor arranged for processing data as known in art as such.

[0043] The input means may further comprise a suitable connector, or a plurality thereof, arranged for connecting the electrodes for recording the signals from the patient's scalp, preferably only two electrodes and possibly a third ground electrode according to the invention.

[0044] As said, according to the invention, a reliable parameter can be established by using the signals as recorded from two electrodes on the patient's scalp. Therefore, according to a further preferred embodiment, the input means comprise at least two electrodes arranged to be placed on different locations on the patient's scalp for obtaining the two recording signals.

[0045] According to a preferred embodiment of a system which is especially efficient for use in routine clinical setting such as the ICU, the input means comprise only two electrodes arranged to be placed on different locations on the patient's scalp for obtaining the two recording signals. A system using only two electrodes, and possibly a third ground electrode, has a compact structure which can be efficiently used in a routine clinical setting as explained above.

[0046] According to a further preferred embodiment, the output means comprise a display for displaying a representative of the parameter. The display may for instance display the calculated parameter, such as the relative delta power as explained above. This parameter can then be taken into account by the physician or other user of the system for determining whether the patient is delirious or not.

[0047] The present invention is further illustrated by the following examples according to preferred embodiments of the method according to the invention, and are not intended to limit the scope of the invention in any way. The scope of protection of the present invention is defined in claims 1 - 15.

[0048] List of drawings:

- Figure 1 shows the locations of the different electrodes in the extended 10/20 system;
- Figure 2 shows the locations of the electrodes according to the classic 10/20 system;
- Figure 3 shows a flow chart for the determination of combinations of locations and parameters for providing a indicative parameter according to the invention, and;
- Figure 4 schematically shows a device according to the invention.

[0049] With reference to figure 4, a device 1 is provided with a housing 100 which is provided with a memory 2 as input means for receiving EEG data. The EEG data can be obtained from connector 21 which can be used to connect the device 1 to any suitable data carrier. As an alternative, the EEG data may be recorded in real time. Thereto, the device 1 is provided with connectors 22a and 22b for connecting to electrodes 12a and 12b. A third connector 23 is provided for connecting a ground electrode 13. The electrodes 12a, 12b and 13 as such are arranged to be placed on the scalp of the patient.

[0050] Recording or transferring of the EEG data to the memory 2 can be initiated using suitable control means 6 in the form of a plurality of buttons. The control means 6 are operatively coupled to the memory 2. After transfer or after recording, the memory 2 contains EEG data comprising recording signals of the two electrodes 22a and 22b.

[0051] For processing the EEG data, a processor 3 is provided. After filtering the signals with a band pass filter having a lower threshold of 0.5 Hz and a higher threshold of 30 Hz, the bipolar deviation of the electrodes is obtained. The

resulting signal is inputted to the analyzer 4, which is in this example shown as a separate part, although the analyzer 4 may be formed integrally with the processor 3. The signal as processed may also be stored, for instance in the memory 2.

[0052] The analyzer 3 calculates the relevant parameter which is indicative for a slowing of the signal as processed by the processor 3. Preferably, the relative power of the brain waves in the delta band is calculated. This relative delta power is then outputted to the output means 5 which comprise a screen 51 for outputting the parameter, for instance corrected to a predetermined scale of 0 - 10. The output means 5 are further provided with a connector 52 for connecting the device 1 to another processing unit such as a Personal Computer or a data carrier. It is further possible that the output means 5 comprise a memory, which may be shared with the input means 2, for storing the parameter.

Example for determining combinations of locations and parameter

[0053] EEGs according to the invention were recorded in 28 delirious patients and 28 age and sex-matched controls after cardiac surgery.

[0054] To study EEG characteristics we first focused on a uniform population of cardiothoracic surgery patients, who were admitted postoperatively to the ICU of the University Medical Centre Utrecht. The patients were recruited at the pre-operative outpatient clinic or at hospital admission prior to surgery. Patients were eligible for this study if they were 50 years or older and gave written informed consent. Exclusion criteria were a history of a neurological or psychiatric disease. Patients with a cerebrovascular event in medical history were not excluded, unless the event resulted in an EEG alteration. In that case the patient was excluded after the EEG recording. The Medical Ethics Committee of the University Medical Center Utrecht approved the study (protocol number 11-073).

[0055] Daily mental status screening was performed by research nurses and -physicians, with the Richmond Agitation and Sedation Scale (RASS) and the CAM-ICU during the first five post-operative days, or when surgery was complicated, the first five days that the patient was not in a comatose state. A comatose state was defined as a Glasgow Coma Score lower than 9 or a Richmond Agitation and Sedation Scale (RASS) score lower than minus 3. Delirium screening was conducted using the CAM-ICU. In addition, included patients were evaluated by a psychiatrist, geriatrician or neurologist, who made the final classification of mental status, based on the Diagnostic and Statistical Manual of mental disorders (DSM) IV criteria for delirium.

[0056] Thirty minute EEGs were recorded, in which non-delirious patients were asked to keep their eyes closed for 15 minutes of the recording. Because of the difficulty to instruct delirious patient, this group was not asked to close their eyes. To ensure that patients stayed awake, they were asked to conduct tasks like squeezing their hands at several time points during the recording. As a result of these tasks, the majority of delirious patients showed naturally an eyes closed period.

[0057] EEG recordings were conducted according to the international 10/20 system extended with an extra EOG electrode below the right eye. Recordings were performed with Micromed (Micromed, Treviso, Italy), using a sample frequency of 512 Hz and G2 as ground electrode. Analog filter settings were set between 0.1 and 70 Hz. After digital storage the data was preprocessed using a band pass FIR filter with cut-off frequencies of 0.5 and 30 Hz. The signal processing toolbox EEGLab (Version 9.0.4.5s) was used for preprocessing of the EEG data in combination with MATLAB (Matlab, version 7.9.0.529, The MathWorks Inc, Natick, Massachusetts U.S.A.).

[0058] For quantitative analysis, we selected the first 60 seconds of artifact free data with eyes closed. If specific electrode channels still contained artifacts, these channels were removed from the data. All electrode channels were used (F9, F10, Fp2, Fp1, F8, F4, Fz, F3, F7, T8, C4, Cz, C3, T7, P8, P4, Pz, P3, P7, O2, O1).

[0059] All EEG electrodes were combined with each other to create all possible bipolar EEG deviations. This resulted in 210 EEG deviations. EEG characteristics were determined including the relative power in the delta (rel_d, 0.5-4 Hz), theta (rel_t, 4-8 Hz), alpha (rel_a, 8-13 Hz) and beta (rel_b, 13-30 Hz) frequency band, the peak frequency and the slow-fast ratio (rel_d+rel_t/rel_a+rel_b). These 6 EEG characteristics were calculated per patient for every EEG deviation (see figure 1).

[0060] Patient characteristics were tested for normality using the Kolmogorov-Smirnov test. Normally distributed variables were presented using the mean and standard deviation (SD), non-normally distributed variables with the median and interquartile range (IQR). Statistical analysis of patient characteristics was conducted with Statistical Package for the Social Sciences (IBM SPSS Statistics, version 20, Armonk, New York, U.S.A.).

[0061] In explorative analysis all possible combinations of EEG deviations and characteristics were compared between delirious and non-delirious patients. It was assumed that not all EEG characteristics were normally distributed and therefore all comparisons were conducted using the Mann-Whitney U test. For registrations with eyes closed, all p-values were ranked and the smallest p-value was assumed to be the optimal EEG deviation and optimal EEG characteristic to distinguish delirious from non-delirious patients. For the 10 most optimal combinations of EEG characteristic and deviation, a receiver operating curve was created and the area under the curve was determined. The statistical analyses of the EEG data was performed with Matlab.

[0062] The 10 combinations of EEG deviation and EEG characteristic that showed the smallest p-value of all possible

EP 3 046 466 B1

combinations in discriminating delirium from non-delirium for registrations with eyes closed are listed below:

#	p	Dev	Par	D-median (IQR)	ND-median (IQR)	AUC	Sens (%)	Spec (%)
1	1.8e -12	F8-Pz	Rel. Delta	0.59 (0.47-0.71)	0.20 (0.17-0.26)	0.99	100	96
2	3.7e -12	F8-P3	Rel. Delta	0.59 (0.46-0.69)	0.19 (0.15-0.26)	0.99	96	96
3	1.1e -11	F8-O2	Rel. Delta	0.60 (0.49-0.73)	0.23 (0.18-0.30)	0.99	96	96
4	1.5e -11	Fp2 -O1	Rel. Delta	0.66 (0.60-0.75)	0.27 (0.23-0.36)	0.99	96	95
5	1.7e -11	F8-F4	Rel. Delta	0.60 (0.43-0.70)	0.20 (0.17-0.26)	0.98	96	92
6	2.2e -11	F8-O1	Rel. Delta	0.62 (0.48-0.72)	0.22 (0.17-0.26)	0.99	96	95
7	2.4e -11	F8-Cz	Rel. Delta	0.57 (0.46-0.67)	0.26 (0.20-0.33)	0.98	91	96
8	2.4e -11	F8-C3	Rel. Delta	0.57 (0.49-0.67)	0.21 (0.17-0.30)	0.98	91	92
9	2.9e -11	Fp2 -Pz	Rel. Delta	0.64 (0.53-0.72)	0.28 (0.22-0.36)	0.99	100	95
10	3.0e -11	Cz-O1	Rel. Delta	0.50 (0.37-0.57)	0.17 (0.10-0.25)	0.96	92	88
With: #: Rank, p: p-value, Dev: deviation, Par: Parameter, D-median: Delirium, median, ND-median: non-Delirium median, IQR: Inter Quartile Range, AUC: Area Under the Curve; Rel. Delta: Relative power in the delta frequency band, Sens: Sensitivity, Spec: Specificity.								

[0063] The above table shows that the deviation F8-Pz for relative delta power showed the lowest p-value. Also neighboring electrodes of both F8 (for example Fp2) and Pz (for example P3) in combination with relative delta power showed very small p-values.

Example 1

[0064] Measurement in 46 patients with eyes closed on locations F8-Pz with relative delta as indicative parameter. Comparison per patients the diagnosis according to the gold standard (DSM IV criteria) and indication (ind) according to EEG measurement based on threshold of 0.3757, With D: Delirium, ND: Non-Delirium:

No.	DSM IV	Rel. Delta	Ind
1	D	0.4058	D
2	D	0.5884	D
3	D	0.6411	D
4	D	0.5471	D
5	D	0.5503	D
6	D	0.4847	D
7	D	0.7052	D
8	D	0.7465	D
9	D	0.7416	D
10	D	0.7690	D
11	D	0.3757	D
12	D	0.6832	D
13	D	0.5834	D
14	D	0.6237	D
15	D	0.4654	D
16	D	0.5650	D

17	D	0.7209	D
18	D	0.3797	D
19	D	0.3769	D
20	D	0.7532	D
21	D	0.6995	D
22	D	0.4551	D
23	ND	0.3556	ND
24	ND	0.2819	ND
25	ND	0.3217	ND
26	ND	0.2168	ND
27	ND	0.3305	ND
28	ND	0.1573	ND
29	ND	0.1117	ND
30	ND	0.1691	ND
31	ND	0.2371	ND
32	ND	0.2234	ND
33	ND	0.3854	D
34	ND	0.0923	ND
35	ND	0.3702	ND

36	ND	0.2468	ND
37	ND	0.1887	ND
38	ND	0.1962	ND
39	ND	0.1383	ND
40	ND	0.1856	ND
41	ND	0.1806	ND

42	ND	0.1824	ND
43	ND	0.2423	ND
44	ND	0.1990	ND
45	ND	0.1606	ND
46	ND	0.2047	ND

Example 2

[0065] Measurement in 47 patients with eyes closed on locations F8-P3 with relative delta as indicative parameter. Comparison per patients the diagnosis according to the gold standard (DSM IV criteria) and indication (ind) according to EEG measurement based on threshold of 0.3582, With D: Delirium, ND: Non-Delirium:

No.	DSM IV	Rel. delta	Ind
1	D	0.3771	D
2	D	0.5977	D
3	D	0.6004	D
4	D	0.6349	D
5	D	0.5011	D
6	D	0.5164	D
7	D	0.5006	D
8	D	0.7102	D
9	D	0.7601	D
10	D	0.6958	D
11	D	0.7819	D
12	D	0.3068	ND
13	D	0.6430	D
14	D	0.5460	D

15	D	0.5923	D
16	D	0.4467	D
17	D	0.5733	D
18	D	0.6836	D
19	D	0.3583	D
20	D	0.3582	D
21	D	0.6960	D
22	D	0.7031	D
23	D	0.4167	D
24	ND	0.3474	ND
25	ND	0.2034	ND
26	ND	0.3675	D
27	ND	0.2126	ND
28	ND	0.2704	ND
29	ND	0.1265	ND
30	ND	0.1368	ND
31	ND	0.1672	ND

32	ND	0.2563	ND
33	ND	0.1792	ND
34	ND	0.3433	ND
35	ND	0.0975	ND
36	ND	0.3158	ND
37	ND	0.2345	ND
38	ND	0.1459	ND
39	ND	0.1855	ND

40	ND	0.1234	ND
41	ND	0.1534	ND
42	ND	0.1354	ND
43	ND	0.1862	ND
44	ND	0.2156	ND
45	ND	0.2629	ND
46	ND	0.1671	ND
47	ND	0.1955	ND

Example 3

[0066] Measurement in 46 patients with eyes closed on locations F8-02 with relative delta as indicative parameter. Comparison per patients the diagnosis according to the gold standard (DSM IV criteria) and indication (ind) according to EEG measurement based on threshold of 0.4399, With D: Delirium, ND: Non-Delirium:

EP 3 046 466 B1

5

10

15

20

25

No.	DSM IV	Rel. delta	Ind
1	D	0.4399	D
2	D	0.5924	D
3	D	0.7161	D
4	D	0.6960	D
5	D	0.5757	D
6	D	0.5970	D
7	D	0.4997	D
8	D	0.7555	D
9	D	0.7811	D
10	D	0.7274	D
11	D	0.8414	D
12	D	0.4897	D

13	D	0.7241	D
14	D	0.5679	D
15	D	0.6224	D
16	D	0.4528	D
17	D	0.5751	D
18	D	0.7533	D
19	D	0.4909	D
20	D	0.4638	D
21	D	0.7818	D
22	D	0.7232	D
23	D	0.3331	ND
24	ND	0.4751	D
25	ND	0.2961	ND

30

35

40

45

26	ND	0.4210	ND
27	ND	0.2338	ND
28	ND	0.3012	ND
29	ND	0.0925	ND
30	ND	0.0961	ND
31	ND	0.2014	ND
32	ND	0.2442	ND
33	ND	0.3027	ND
34	ND	0.3517	ND
35	ND	0.1052	ND
36	ND	0.3924	ND

37	ND	0.2568	ND
38	ND	0.2334	ND
39	ND	0.1838	ND
40	ND	0.1005	ND
41	ND	0.1341	ND
42	ND	0.1972	ND
43	ND	0.2676	ND
44	ND	0.1969	ND
45	ND	0.1983	ND
46	ND	0.1847	ND

50

[0067] The results can be summarized as follows:

Summary table:

[0068]

55

Dev	Par	AUC	Sens (%)	Spec (%)	NPV (%)	PPV (%)
F8-Pz	Rel. delta	0.99	100	96	100	96

(continued)

Dev	Par	AUC	Sens (%)	Spec (%)	NPV (%)	PPV (%)
F8-P3	Rel. delta	0.99	96	96	96	96
F8-O2	Rel. delta	0.99	96	96	96	96
With Dev: Deviation, Par: Parameter, AUC: Area under the curve, Sens: Sensitivity, Spec: Specificity, NPV: Negative Predictive Value, PPV: Positive Predictive Value						

[0069] The method and system according to the invention therefore has a high prediction value, such that a reliable indication can be given whether a patient is delirious or not. The user is then able to judge whether a patient is delirious or not, taking this parameter into account, next to for instance other parameters or observations.

[0070] The present invention is not limited to the embodiment shown, but extends also to other embodiments falling within the scope of the appended claims.

Claims

1. Method for determining a parameter which is indicative for whether a patient is delirious or not, or is at risk of becoming delirious or not, wherein the method comprises the steps of:

- recording signals representative of brain activity from at least two electrodes located on different locations on the patient's scalp;
- determining a difference signal from a first recording signal from an electrode and a second recording signal from another electrode, wherein the at least two electrodes are selected from a group of electrode pairs located at or near locations selected from a group of electrode pair locations comprising F8-Pz, F8-P3, F8-O2, Fp2-O1, F8-F4, F8-O1, F8-Cz, F8-C3, Fp2-Pz, Cz-O1 according to the extended 10-20 EEG system, wherein a location is considered near a location specified according to the 10/20 system when such a location is between the specified location and an adjacent location as specified according to the 10/20 system;
- determining the parameter as the ratio of a spectral power of the difference signal in a delta band relative to a total spectrum power;
- comparing the ratio with a threshold, wherein the threshold is dependent on the location of the pair of electrodes.

2. Method according to claim 1, further comprising determining a statistical distribution for the ratio from the difference signal for at least one pair of electrodes corresponding to a delirium state and determining a statistical distribution for the ratio from the difference signal for at least one pair of electrodes corresponding to a non-delirium state.

3. Method according to claim 2, wherein the threshold is in a range from an upper IQR value of the non-delirium distribution and a lower IQR value of the delirium distribution.

4. Method according to claim 3, wherein the threshold associated with electrode pair location at or near F8-Pz lies in a range of 0.26 - 0.47,

5. Method according to any of the preceding claims, wherein the threshold for the electrode pair location at or near F8-Pz equals 0.3757.

6. Method according to any one of the preceding claims, further comprising:

- determining the ratio at different moments;
- establishing a trend in the ratio.

7. Method according to any one of the preceding claims, wherein the delta band has a frequency range of 0.5 - 4 Hz.

8. Method according to any one of the preceding claims, wherein the total spectrum power of the difference signal is in a frequency range of 0.5 - 30 Hz.

9. System for determining a parameter which is indicative for whether a patient is delirious or not or is at risk of becoming

delirious, wherein the system comprises:

- input means for recording signals representative of brain activity from at least two electrodes located on different locations on the patient's scalp;
- processing means arranged for determining a difference signal from a first recording signal from an electrode and a second recording signal from another electrode, wherein the at least two electrodes are selected from a group of electrode pairs located at or near locations selected from a group of electrode pair locations comprising F8-Pz, F8-P3, F8-O2, Fp2-O1, F8-F4, F8-O1, F8-Cz, F8-C3, Fp2-Pz, Cz-O1 according to the extended 10-20 EEG system;
- analyzing means arranged for:
 - i) determining the parameter as the ratio of a spectral power of the difference signal in a delta band relative to a total spectrum power;
 - ii) comparing the ratio with a first threshold, wherein the first threshold is dependent on the location of the selected pair of electrodes.

10. System according to claim 9, wherein the processing means are further arranged for determining a statistical distribution for the ratio from the difference signal for at least one pair of electrodes corresponding to a delirium state and determining a statistical distribution for the ratio from the difference signal for at least one pair of electrodes corresponding to a non-delirium state.

11. System according claim 10, wherein the threshold is in a range from an upper IQR value of the non-delirium distribution and a lower IQR value of the delirium distribution.

12. System according to claim 11, wherein the threshold associated with electrode pair location at or near F8-Pz lies in a range of 0.26 - 0.47.

13. System according to any of the claims 9 - 12, wherein the threshold for the electrode pair location at or near F8-Pz equals 0.3757.

14. System according to any one of the claims 9 - 13, wherein the processing means is further arranged for:

- determining the ratio at different moments;
- establishing a trend in the ratio.

15. System according to any one of the claims 9 - 14, wherein the delta band has a frequency range of 0.5 - 4 Hz, and wherein the total spectrum power of the difference signal is in a frequency range of 0.5 - 30 Hz.

Patentansprüche

1. Verfahren zum Bestimmen eines Parameters, der anzeigt, ob ein Patient im Delirium ist oder nicht oder in Gefahr ist, ins Delirium zu kommen oder nicht, wobei das Verfahren die folgenden Schritte umfasst:

- Aufzeichnen von Signalen, die repräsentativ für die Gehirnaktivität sind, von wenigstens zwei Elektroden, die an unterschiedlichen Positionen auf der Kopfhaut des Patienten angeordnet sind,
- Bestimmen eines Differenzsignals aus einem ersten Aufzeichnungssignal von einer Elektrode und einem zweiten Aufzeichnungssignal von einer anderen Elektrode, wobei die wenigstens zwei Elektroden ausgewählt sind aus einer Gruppe von Elektrodenpaaren, die an oder nahe Positionen angeordnet sind, die ausgewählt sind aus einer Gruppe von Elektrodenpaar-Positionen, die F8-Pz, F8-P3, F8-O2, Fp2-O1, F8-F4, F8-O1, F8-Cz, F8-C3, Fp2-Pz, Cz-O1 entsprechend dem erweiterten 10-20-EEG-System umfasst, wobei eine Position als nahe einer Position betrachtet wird, die entsprechend dem 10-20-System spezifiziert ist, wenn sich eine solche Position zwischen der spezifizierten Position und einer benachbarten Position, wie entsprechend dem 10-20-System spezifiziert, befindet,
- Bestimmen des Parameters als das Verhältnis einer Spektralleistung des Differenzsignals in einem Deltaband relativ zu einer Gesamtspektrumsleistung,
- Vergleichen des Verhältnisses mit einem Schwellenwert, wobei der Schwellenwert von der Position des Paares von Elektroden abhängig ist.

2. Verfahren nach Anspruch 1, das ferner das Bestimmen einer statistischen Verteilung für das Verhältnis aus dem Differenzsignal für wenigstens ein Paar von Elektroden, die einem Deliriumszustand entspricht, und das Bestimmen einer statistischen Verteilung für das Verhältnis aus dem Differenzsignal für wenigstens ein Paar von Elektroden, die einem Nicht-Deliriumszustand entspricht, umfasst.
3. Verfahren nach Anspruch 2, wobei der Schwellenwert in einem Bereich von einem oberen IQR-Wert der Nicht-Deliriumsverteilung zu einem unteren IQR-Wert der Deliriumsverteilung liegt.
4. Verfahren nach Anspruch 3, wobei der Schwellenwert, der mit der Elektrodenpaar-Position bei oder nahe F8-Pz verknüpft ist, in einem Bereich von 0,26 - 0,47 liegt.
5. Verfahren nach einem der vorhergehenden Ansprüche, wobei der Schwellenwert für die Elektrodenpaar-Position bei oder nahe F8-Pz gleich 0,3757 ist.
6. Verfahren nach einem der vorhergehenden Ansprüche, das ferner Folgendes umfasst:
 - Bestimmen des Verhältnisses zu unterschiedlichen Zeitpunkten,
 - Feststellen eines Trends in dem Verhältnis.
7. Verfahren nach einem der vorhergehenden Ansprüche, wobei das Deltaband einen Frequenzbereich von 0,5 - 4 Hz hat.
8. Verfahren nach einem der vorhergehenden Ansprüche, wobei die Gesamtspektrumsleistung des Differenzsignals in einem Frequenzbereich von 0,5 - 30 Hz liegt.
9. System zum Bestimmen eines Parameters, der anzeigt, ob ein Patient im Delirium ist oder nicht oder in Gefahr ist, ins Delirium zu kommen oder nicht, wobei das System Folgendes umfasst:
 - Eingabemittel zum Aufzeichnen von Signalen, die repräsentativ für die Gehirnaktivität sind, von wenigstens zwei Elektroden, die an unterschiedlichen Positionen auf der Kopfhaut des Patienten angeordnet sind,
 - Verarbeitungsmittel, die angeordnet sind zum Bestimmen eines Differenzsignals aus einem ersten Aufzeichnungssignal von einer Elektrode und einem zweiten Aufzeichnungssignal von einer anderen Elektrode, wobei die wenigstens zwei Elektroden ausgewählt sind aus einer Gruppe von Elektrodenpaaren, die an oder nahe Positionen angeordnet sind, die ausgewählt sind aus einer Gruppe von Elektrodenpaar-Positionen, die F8-Pz, F8-P3, F8-O2, Fp2-O1, F8-F4, F8-O1, F8-Cz, F8-C3, Fp2-Pz, Cz-O1 entsprechend dem erweiterten 10-20-EEG-System, umfasst,
 - Analysemittel, die zu Folgendem angeordnet sind:
 - i) Bestimmen des Parameters als das Verhältnis einer Spektralleistung des Differenzsignals in einem Deltaband relativ zu einer Gesamtspektrumsleistung,
 - ii) Vergleichen des Verhältnisses mit einem ersten Schwellenwert, wobei der erste Schwellenwert von der Position des Paares von Elektroden abhängig ist.
10. System nach Anspruch 9, wobei die Verarbeitungsmittel ferner angeordnet sind zum Bestimmen einer statistischen Verteilung für das Verhältnis aus dem Differenzsignal für wenigstens ein Paar von Elektroden, die einem Deliriumszustand entspricht, und das Bestimmen einer statistischen Verteilung für das Verhältnis aus dem Differenzsignal für wenigstens ein Paar von Elektroden, die einem Nicht-Deliriumszustand entspricht.
11. System nach Anspruch 10, wobei der Schwellenwert in einem Bereich von einem oberen IQR-Wert der Nicht-Deliriumsverteilung zu einem unteren IQR-Wert der Deliriumsverteilung liegt.
12. System nach Anspruch 11, wobei der Schwellenwert, der mit der Elektrodenpaar-Position bei oder nahe F8-Pz verknüpft ist, in einem Bereich von 0,26 - 0,47 liegt.
13. System nach einem der Ansprüche 9 bis 12, wobei der Schwellenwert für die Elektrodenpaar-Position bei oder nahe F8-Pz gleich 0,3757 ist.
14. System nach einem der Ansprüche 9 bis 13, wobei die Verarbeitungsmittel ferner zu Folgendem angeordnet sind:

- Bestimmen des Verhältnisses zu unterschiedlichen Zeitpunkten,
- Feststellen eines Trends in dem Verhältnis.

15. System nach einem der Ansprüche 9 bis 14, wobei das Deltaband einen Frequenzbereich von 0,5 - 4 Hz hat, und wobei die Gesamtspektrumsleistung des Differenzsignals in einem Frequenzbereich von 0,5 - 30 Hz liegt.

Revendications

1. Procédé de détermination d'un paramètre qui indique si un patient est en état confusionnel ou non, ou risque d'être en état confusionnel ou non, dans lequel le procédé comprend les étapes :

- d'enregistrer des signaux représentant l'activité cérébrale à partir d'au moins deux électrodes situées en des emplacements différents sur le scalp du patient ;
- de déterminer un signal de différence à partir d'un premier signal d'enregistrement à partir d'une électrode et d'un second signal d'enregistrement à partir d'une autre électrode, dans lequel les aux moins deux électrodes sont sélectionnées parmi un groupe de paires d'électrodes situées en des emplacements ou près d'emplacements sélectionnés parmi un groupe d'emplacements de paires d'électrodes comprenant F8-Pz, F8-P3, F8-O2, Fp2-O1, F8-F4, F8-O1, F8-Cz, F8-C3, Fp2-Pz, Cz-O1, selon le système d'EEG 10-20 étendu, dans lequel un emplacement est considéré proche d'un emplacement spécifié selon le système 10/20 lorsqu'un tel emplacement est entre l'emplacement spécifié et un emplacement adjacent tel que spécifié selon le système 10/20 ;
- de déterminer le paramètre comme étant le rapport d'une puissance spectrale du signal de différence dans une bande delta par rapport à une puissance de spectre totale ;
- de comparer le rapport avec un seuil, dans lequel le seuil est dépendant de l'emplacement de la paire d'électrodes.

2. Procédé selon la revendication 1, comprenant en outre de déterminer une distribution statistique pour le rapport à partir du signal de différence pour au moins une paire d'électrodes correspondant à un état confusionnel et déterminer une distribution statistique pour le rapport à partir du signal de différence pour au moins une paire d'électrodes correspondant à un état non-confusionnel.

3. Procédé selon la revendication 2, dans lequel le seuil est situé dans une plage d'une valeur IQR supérieure de la distribution de non-état confusionnel et d'une valeur d'IQR inférieure de la distribution d'état confusionnel.

4. Procédé selon la revendication 3, dans lequel le seuil associé à l'emplacement de paires d'électrodes sur ou près de F8-Pz est situé dans une plage de 0,26 - 0,47.

5. Procédé selon l'une quelconque des revendications précédentes, dans lequel le seuil pour l'emplacement de paire d'électrodes sur ou près de F8-Pz est égal à 0,3757.

6. Procédé selon l'une quelconque des revendications précédentes, comprenant en outre :

- la détermination du rapport à différents moments ;
- l'établissement d'une tendance dans le rapport.

7. Procédé selon l'une quelconque des revendications précédentes, dans lequel la bande delta a une plage de fréquences de 0,5 - 4 Hz.

8. Procédé selon l'une quelconque des revendications précédentes, dans lequel la puissance de spectre totale du signal de différence est située dans une plage de fréquences de 0,5 - 30 Hz.

9. Système de détermination d'un paramètre qui indique si un patient est en état confusionnel ou non, ou risque d'être en état confusionnel ou non, dans lequel le système comprend :

- des moyens de saisie pour enregistrer des signaux représentant l'activité cérébrale à partir d'au moins deux électrodes situées sur des emplacements différents sur le scalp du patient ;
- des moyens de traitement agencés pour déterminer un signal de différence à partir d'un premier signal d'enregistrement à partir d'une électrode et d'un second signal d'enregistrement à partir d'une autre électrode, dans

lequel les aux moins deux électrodes sont sélectionnées à partir d'un groupe de paires d'électrodes situées en des emplacements ou près d'emplacements sélectionnés parmi un groupe d'emplacements de paires d'électrodes comprenant F8-Pz, F8-P3, F8-O2, Fp2-O1, F8-F4, F8-O1, F8-Cz, F8-C3, Fp2-Pz, Cz-O1, selon le système d'EEG 10-20 étendu,

- des moyens d'analyse agencés pour :

i) déterminer le paramètre comme étant le rapport d'une puissance spectrale du signal de différence dans une bande delta par rapport à une puissance de spectre totale ;

ii) comparer le rapport avec un premier seuil, dans lequel le premier seuil est dépendant de l'emplacement de la paire d'électrodes sélectionnée.

10. Système selon la revendication 9, dans lequel le moyen de traitement est en outre agencé pour déterminer une distribution statistique pour le rapport à partir du signal de différence pour au moins une paire d'électrodes correspondant à un état confusionnel et déterminer une distribution statistique pour le rapport à partir du signal de différence pour au moins une paire d'électrodes correspondant à un état non-confusionnel.

11. Système selon la revendication 10, dans lequel le seuil est situé dans une plage d'une valeur IQR supérieure de la distribution de non-état confusionnel et d'une valeur d'IQR inférieure de la distribution d'état confusionnel.

12. Système selon la revendication 11, dans lequel le seuil associé à l'emplacement de paires d'électrodes sur ou près de F8-Pz est situé dans une plage de 0,26 - 0,47.

13. Système selon l'une quelconque des revendications 9 - 12, dans lequel le seuil pour l'emplacement de paire d'électrodes sur ou près de F8-Pz est égal à 0,3757.


14. Système selon l'une quelconque des revendications 9 - 13, dans lequel le moyen de traitement est en outre agencé pour :

- déterminer le rapport à différents moments ;

- établir une tendance dans le rapport.

15. Système selon l'une quelconque des revendications 9 - 14, dans lequel la bande delta a une plage de fréquences de 0,5 - 4 Hz, et dans lequel la puissance de spectre totale du signal de différence est située dans une plage de fréquences de 0,5 - 30 Hz.

C

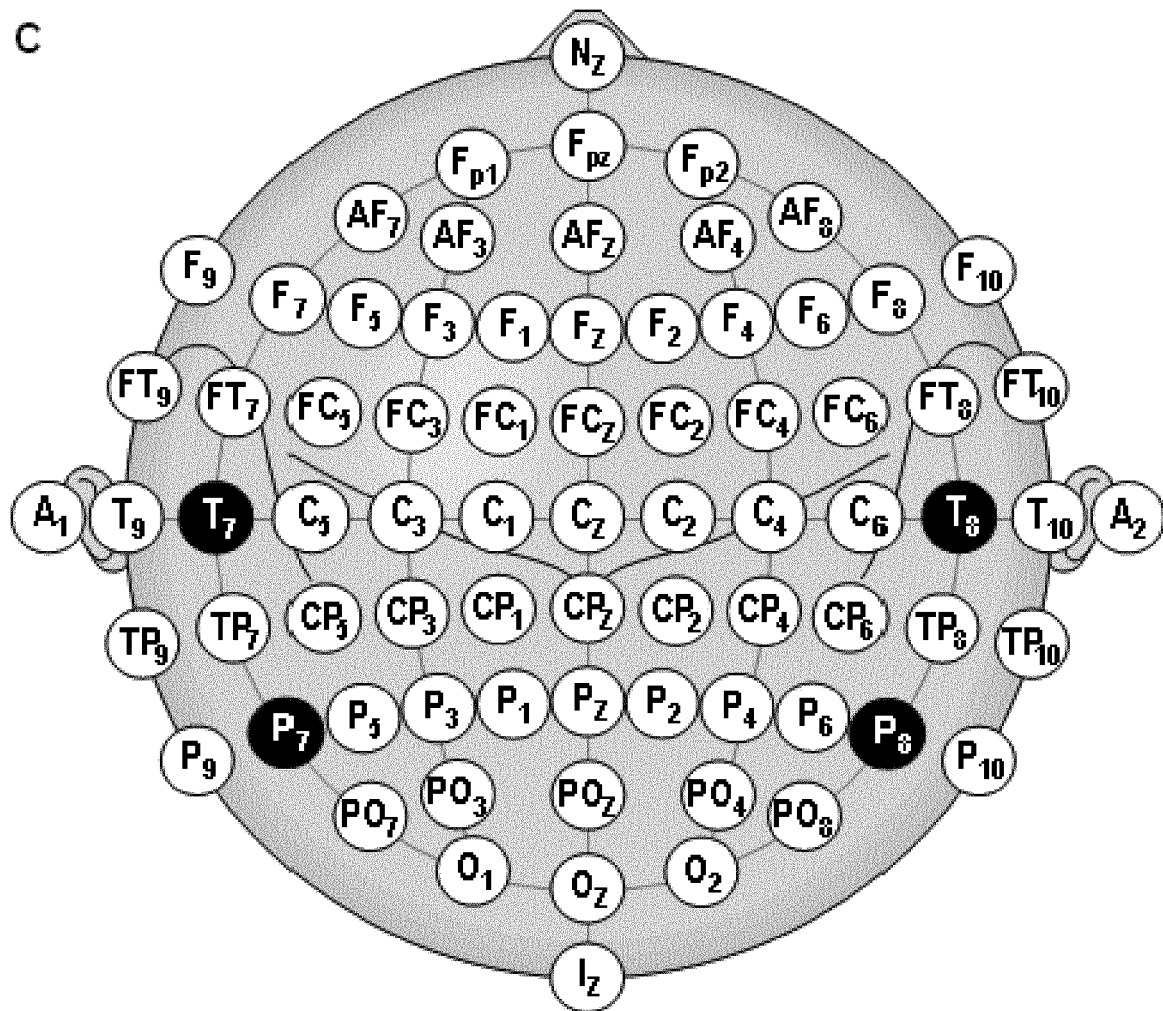FIG. 1

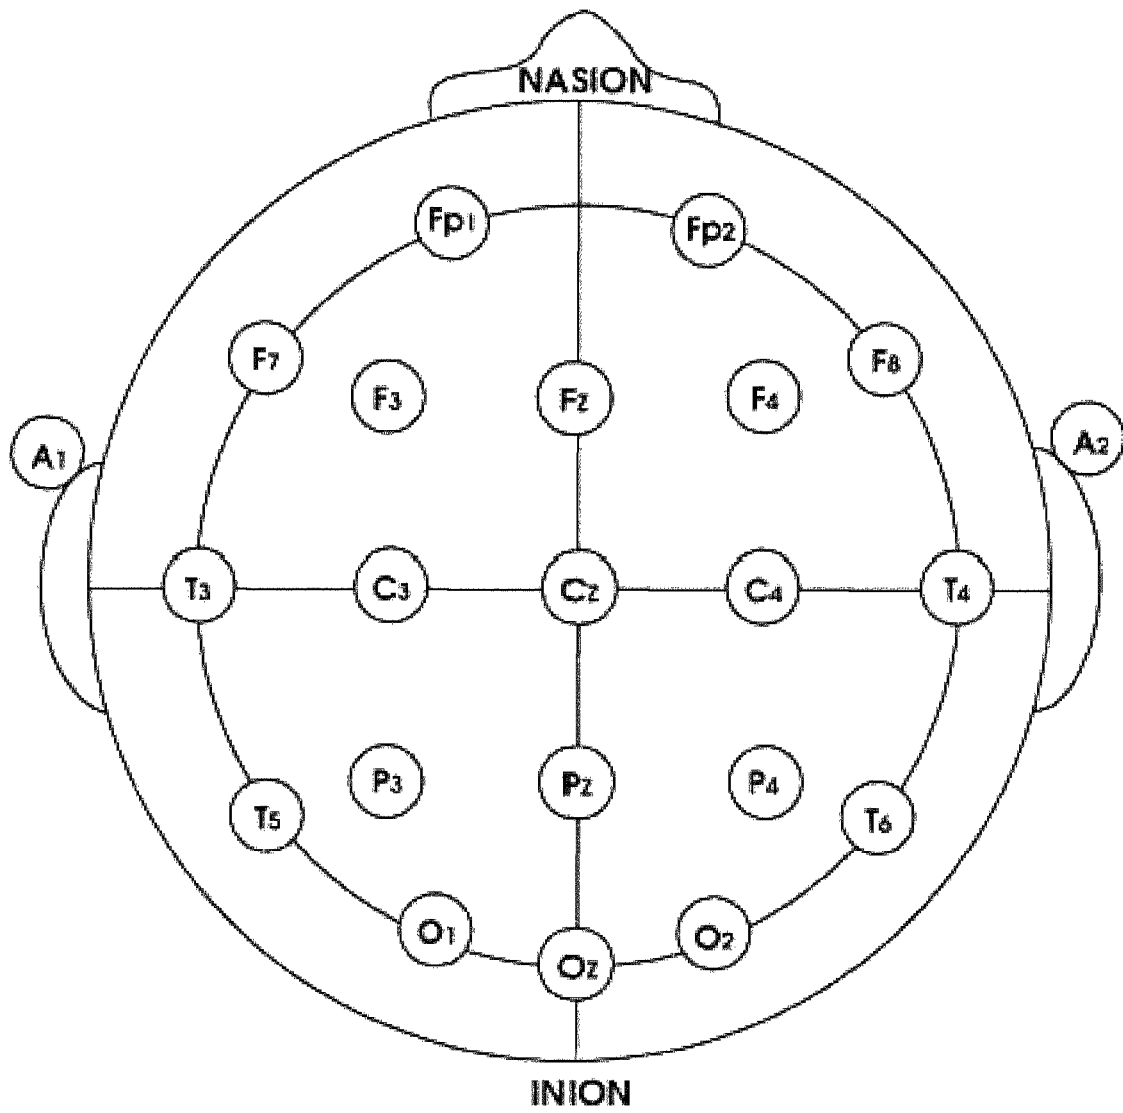


FIG. 2

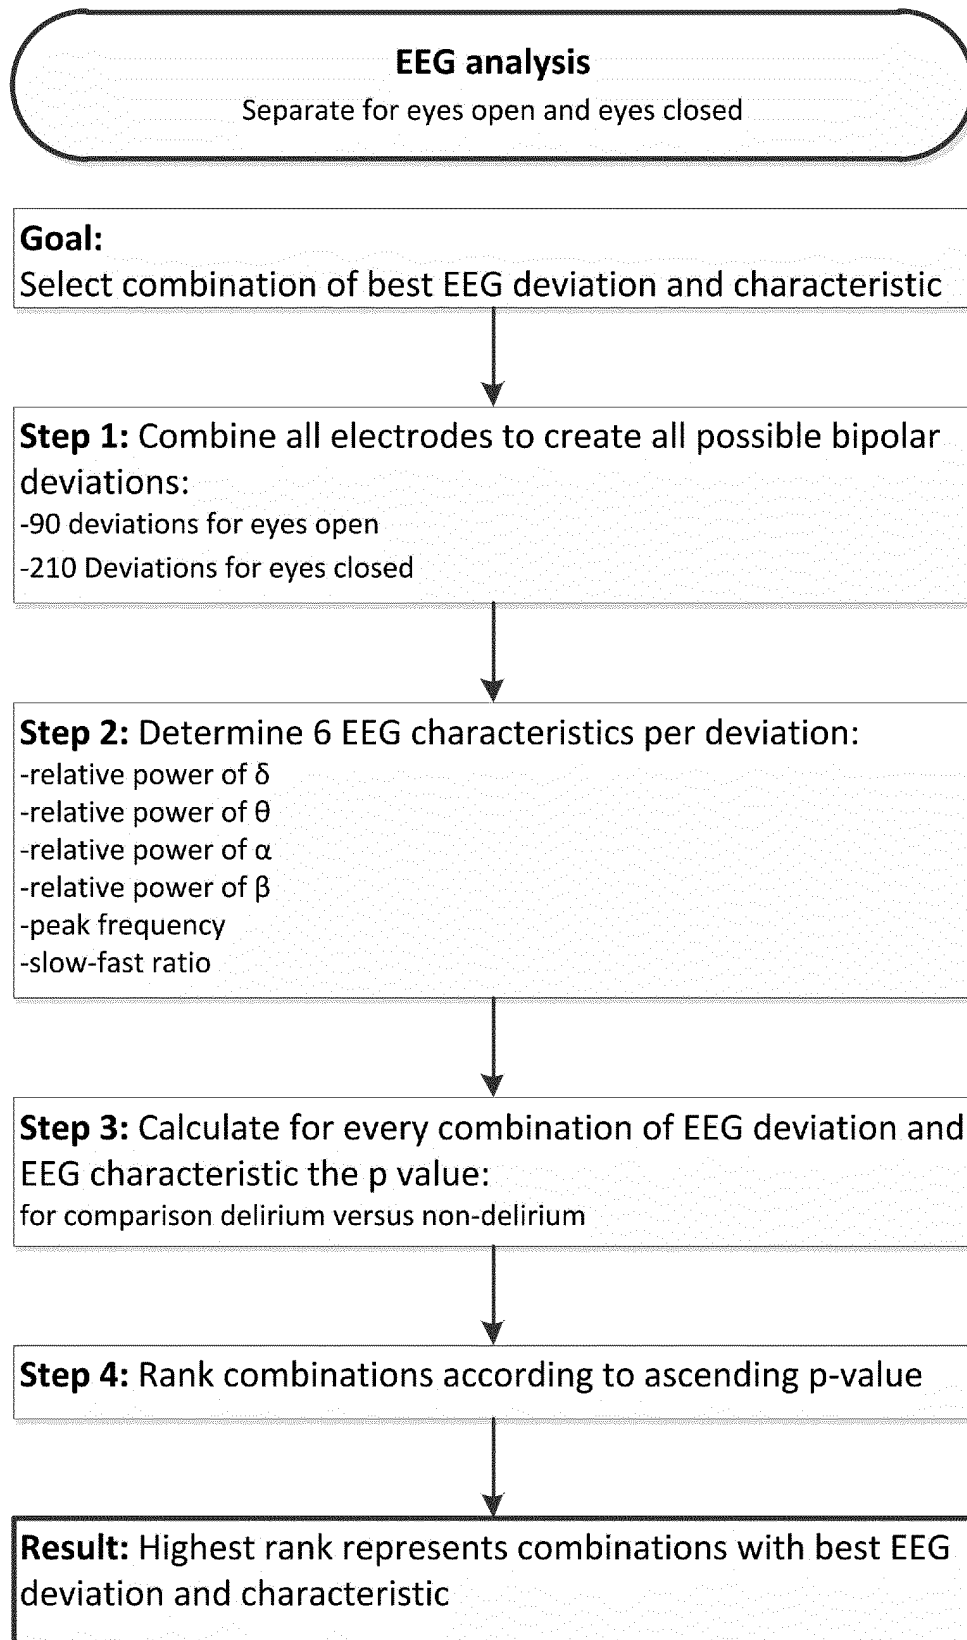


FIG. 3

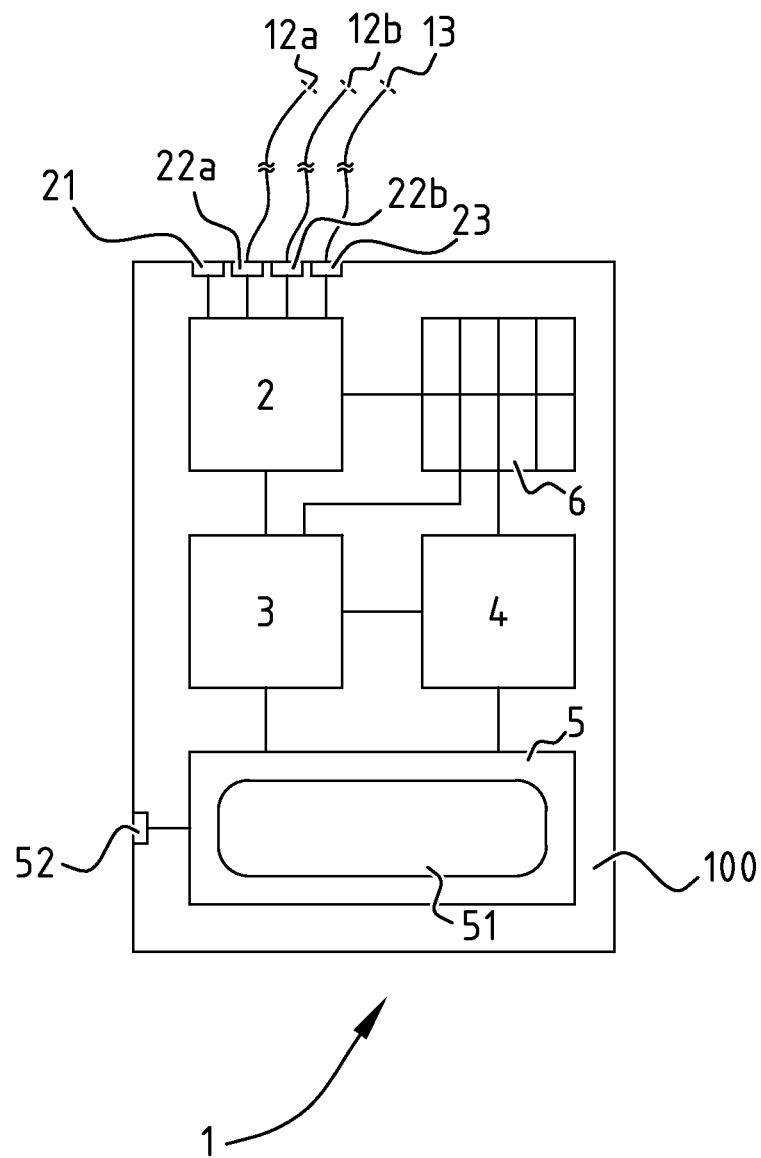


FIG. 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5230346 A [0004]

专利名称(译)	用于确定指示患者是否是谵妄的参数的方法和系统		
公开(公告)号	EP3046466B1	公开(公告)日	2019-04-03
申请号	EP2013763108	申请日	2013-09-19
[标]申请(专利权)人(译)	UMC乌得勒支控股有限公司		
申请(专利权)人(译)	UMC UTRECHT HOLDING BV公司		
当前申请(专利权)人(译)	UMC UTRECHT HOLDING BV公司		
[标]发明人	VAN DER KOOI ARENDINA WILHELMINA SLOOTER ARJEN JACOB CORNELIS		
发明人	VAN DER KOOI, ARENDINA WILHELMINA SLOOTER, ARJEN JACOB CORNELIS		
IPC分类号	A61B5/0476 A61B5/048 A61B5/16 A61B5/00		
CPC分类号	A61B5/0476 A61B5/048 A61B5/165 A61B5/7257 A61B5/04012 A61B5/0478 A61B5/6814		
其他公开文献	EP3046466A1		
外部链接	Espacenet		

摘要(译)

用于确定参数的方法，所述参数指示患者是否神志不清，或者是否有变得神志不清的风险，其中所述方法包括以下步骤： - 提供包括记录来自至少两个电极的信号的脑电图（ EEG ）数据在预定时间段内，例如至少10秒，位于患者头皮上的不同位置，其中至少一个信号从头皮上的前半部分记录； - 处理所述EEG数据，用于从来自电极的两个记录信号获得偏差信号； - 分析频谱中的所述偏差信号，用于建立所述偏差信号的减慢并将所述参数定义为所述偏差信号的减慢程度，所述偏差信号与患者头皮上的记录位置相结合指示所述患者是否是神志不清或没有，或者有可能变得神志不清。

No.	DSM IV	Rel. Delta	Ind
1	D	0.4058	D
2	D	0.5884	D
3	D	0.6411	D
4	D	0.5471	D
5	D	0.5503	D
6	D	0.4847	D
7	D	0.7052	D
8	D	0.7465	D
9	D	0.7416	D
10	D	0.7690	D
11	D	0.3757	D
12	D	0.6832	D
13	D	0.5834	D
14	D	0.6237	D
15	D	0.4654	D
16	D	0.5650	D

17	D	0.7209	D
18	D	0.3797	D
19	D	0.3769	D
20	D	0.7532	D
21	D	0.6995	D
22	D	0.4551	D
23	ND	0.3556	ND
24	ND	0.2819	ND
25	ND	0.3217	ND
26	ND	0.2168	ND
27	ND	0.3305	ND
28	ND	0.1573	ND
29	ND	0.1117	ND
30	ND	0.1691	ND
31	ND	0.2371	ND
32	ND	0.2234	ND
33	ND	0.3854	D
34	ND	0.0923	ND
35	ND	0.3702	ND