



(11)

EP 1 638 071 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
08.03.2017 Bulletin 2017/10

(51) Int Cl.:
G09G 3/32 (2016.01)

G09G 5/02 (2006.01)

(21) Application number: **05025459.8**

(22) Date of filing: **22.09.2000**

(54) EL display device

Elektrolumineszierende Anzeigevorrichtung
Dispositif d'affichage électroluminescent

(84) Designated Contracting States:
DE FI FR GB NL

(30) Priority: **24.09.1999 JP 27136699**

(43) Date of publication of application:
22.03.2006 Bulletin 2006/12

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
00120759.6 / 1 087 365

(73) Proprietor: **Semiconductor Energy Laboratory Co., Ltd.**
Atsugi-shi, Kanagawa-ken 243-0036 (JP)

(72) Inventor: **Jun, Koyama**
Atsugi-shi, Kanagawa-ken 243-0036 (JP)

(74) Representative: **Grünecker Patent- und Rechtsanwälte PartG mbB**
Leopoldstraße 4
80802 München (DE)

(56) References cited:

EP-A- 0 837 441 EP-A- 1 085 495
WO-A-94/09473 WO-A-98/33165
US-A- 5 812 105 US-A- 5 898 415

- **PATENT ABSTRACTS OF JAPAN** vol. 1997, no. 08, 29 August 1997 (1997-08-29) & JP 09 098443 A (MATSUSHITA ELECTRIC IND CO LTD), 8 April 1997 (1997-04-08)
- **PATENT ABSTRACTS OF JAPAN** vol. 1998, no. 02, 30 January 1998 (1998-01-30) & JP 09 274471 A (CITIZEN WATCH CO LTD), 21 October 1997 (1997-10-21)
- **KOWALSKY W ET AL:** "Organic light emitting diodes" INDIUM PHOSPHIDE AND RELATED MATERIALS, 1996. IPRM '96., EIGHTH INTERNATIONAL CONFERENCE ON SCHWABISCH-GMUND, GERMANY 21-25 APRIL 1996, NEW YORK, NY, USA, IEEE, US, 21 April 1996 (1996-04-21), pages 450-453, XP010157715 ISBN: 0-7803-3283-0

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**BACKGROUND OF THE INVENTION****1. Field of the Invention**

[0001] The present invention relates to a method of driving an EL display device, a driving circuit for implementing the driving method, and an EL display device comprising the driving circuit.

2. Description of the Related Art

[0002] Techniques of forming a TFT (thin film transistor) on a substrate have been widely progressing in recent years, and development of applications thereof to an active matrix type display device are advancing. In particular, a TFT using a polysilicon film has a higher electric field effect mobility than a TFT using a conventional amorphous silicon film, and high speed operation is therefore possible. As a result, it becomes possible to perform pixel control, conventionally performed by a driving circuit external to the substrate, by the driving circuit formed on the same substrate as a pixel.

[0003] This type of active matrix display device has been in the spotlight because of the many advantages which can be obtained by incorporating various circuits and elements on the same substrate, such as reduced manufacturing cost, display device miniaturization, increased yield, and higher throughput.

[0004] Presently, active matrix EL display devices with EL elements as self-light-emitting elements are actively researched. An EL display device is also referred to as an organic EL display (OELD) or an organic light emitting diode (OLED).

[0005] Unlike a liquid crystal display device or the displays, an EL display device is of a self-light-emitting type. An EL element is structured such that an EL layer is sandwiched between a pair of electrodes. The EL layer typically has a laminated structure. A laminated structure of "a hole transporting layer / a light emitting layer / an electron transporting layer" proposed by Tang, et al. of Eastman Kodak Co. is a typical laminated structure. This structure has very high light emitting efficiency, and thus, most of EL display devices that are now under research and development adopt this structure.

[0006] Other than this, the laminated structure may be a hole injecting layer / a hole transporting layer / a light emitting layer / an electron transporting layer, or, a hole injecting layer / a hole transporting layer / a light emitting layer / an electron transporting layer / an electron injecting layer laminated in this order on a pixel electrode. A fluorescent pigment or the like may be doped in an EL layer.

[0007] When predetermined voltage is applied from a pair of electrodes to the EL layer structured as described in the above, recombination of carriers in the light emitting layer is caused to emit light. It is to be noted that light emission by an EL element may be herein referred to as

driving of an EL element.

[0008] Color display methods of an EL display device are roughly divided into four: a method where three kinds of EL elements emitting R (red), G (green), and B (blue) light, respectively, are formed; a method where EL elements emitting white light are combined with a color filter of R, G, and B; a method where EL elements emitting blue or blue-green light are combined with a fluophor (fluorescent color conversion layer: CCM); and a method where EL elements corresponding to R, G, and B are superimposed on a transparent electrode used as a cathode (an opposing electrode).

[0009] Generally, the luminance of red light emission is lower than the luminance of blue and green light emission in many organic EL materials. When an organic EL material having such light emitting characteristics is used for an EL display device, the luminance of red in a displayed image is low.

Further, since the luminance of red light emission is lower than the luminance of blue and green light emission, a method is conventionally adopted where orange light the wavelength of which is a little shorter than that of red light is used as red light. However, in this case also, the luminance of red itself of an image displayed on the EL display device is low, and an image which is intended to be displayed in red is displayed in orange. As a result, only a display device, which has unbalanced luminance of red, green, and blue light emission and unsatisfactory white balance, can be provided.

[0010] WO 98/33165 relates to an active matrix electroluminescent display device and a driving method thereof, and discloses all of the features of the preamble of claim 1.

SUMMARY OF THE INVENTION

[0011] The present invention has been made in view of the above problems, and an object of the present invention is to provide a driving method and a driving circuit for realizing an EL display device with excellent white balance.

[0012] The object is achieved by an EL display device as set forth in claim 1.

[0013] A method of driving an EL display device according to the present invention is now described. In the driving method according to the present invention, in view of the lower luminance of red light emission of the EL light emitting layer, by suppressing the luminance of a green image and the luminance of a blue image, the luminance of a red image, the luminance of a green image, and the luminance of a blue image are well-balanced, which makes it possible to improve the white balance. It is to be noted that the present invention can be applied not only to EL light emitting elements using an EL light emitting layer which emits white light and a color filter but also to EL light emitting elements using an EL light emitting layer which emits red light, an EL light emitting layer which emits green light, and an EL light emitting layer

which emits blue light.

[0014] It is to be noted that here, for the sake of simplicity, a case where an original image signal inputted from the external is 6 bit digital data is described. First, reference is made to Fig. 1, which shows the luminance of red (R) light emission, the luminance of green (G) light emission, and the luminance of blue (B) light emission of EL light emitting elements with respect to gray-scale levels of the 6 bit digital data. It is to be noted that luminance of 64 ($=2^6$) gray-scale levels can be obtained from the 6 bit digital data. Further, it is to be noted that, though a case where 6 bit digital data is inputted is described herein, the driving method according to the present invention can also be applied to a case where n bit digital data is inputted (n is a natural number).

[0015] $B_{R\max}$, $B_{G\max}$, and $B_{B\max}$ are the maximum values of the luminance of red light emission, the luminance of green light emission, and the luminance of blue light emission, respectively (here, in the case of 64 gray-scale levels). It is to be noted that, for the sake of convenience, a case where $B_{G\max} = B_{B\max} = 2B_{R\max}$ is assumed.

[0016] As shown in Fig. 1, when the gray-scale level is at maximum (64), the luminance of red light emission, the luminance of green light emission, and the luminance of blue light emission take the maximum values $B_{R\max}$, $B_{G\max}$, and $B_{B\max}$, respectively. However, since the maximum value $B_{R\max}$ of the luminance of red light emission is half of the maximum value $B_{G\max}$ of the luminance of green light emission or half of the maximum value $B_{B\max}$ of the luminance of blue light emission, if the display is carried out with them being as they are, the maximum luminance varies and the white balance is unsatisfactory.

[0017] Figs. 2 and 3 are conceptual views of the method of driving an EL display device according to the present invention. In the method of driving an EL display device according to the present invention, n bit digital data having red, green, and blue image information (gray-scale information) are converted into (n+1) bit digital data, respectively. Here, a case where 6 bit digital data are converted into 7 bit digital data is described as an example. First, digital data conversion carried out in the driving method according to the present invention is described with reference to Fig. 3.

[0018] Data conversion of 6 bit digital data having red image information is shown in Fig. 3R, data conversion of 6 bit digital data having green image information is shown in Fig. 3G, and data conversion of 6 bit digital data having blue image information is shown in Fig. 3B.

[0019] First, data conversion of 6 bit digital data having red image information (gray-scale information) (Fig. 3R) is described. R0 (=1) is added below R1 that is the least significant bit among the 6 bit digital data (R6 (MSB), R5, R4, R3, R2, and R1 (LSB)) having red image information. In other words, R0 (=1) to serve as the least significant bit is added to the 6 bit digital data (R6 (MSB), R5, R4, R3, R2, and R1 (LSB)) having red image information. It is to be noted that the 6 bit digital data before the conversion (R6 (MSB), R5, R4, R3, R2, and R1 (LSB)) is

used as the upper 6 bits of the 7 bit digital data after the conversion. In this way, the 6 bit digital data having red image information is converted into the 7 bit digital data in which the value of the least significant bit (LSB) is "1".

[0020] Next, data conversion of 6 bit digital data having green image information (gray-scale information) (Fig. 3G) is described. G7 (=0) is added above G6 that is the most significant bit among the 6 bit digital data (G6 (MSB), G5, G4, G3, G2, and G1 (LSB)) having green image information. In other words, G7 (=0) to serve as the most significant bit is added to the 6 bit digital data (G6 (MSB), G5, G4, G3, G2, and G1 (LSB)) having green image information. It is to be noted that the 6 bit digital data before the conversion (G6 (MSB), G5, G4, G3, G2, and G1 (LSB)) is used as the lower 6 bits of the 7 bit digital data after the conversion. In this way, the 6 bit digital data having green image information is converted into the 7 bit digital data in which the value of the most significant bit (MSB) is "0".

[0021] Next, data conversion of 6 bit digital data having blue image information (gray-scale information) (Fig. 3B) is described. The conversion of the 6 bit digital data having blue image information is similar to the conversion of the 6 bit digital data having green image information. B7 (=0) is added above B6 that is the most significant bit among the 6 bit digital data (B6 (MSB), B5, B4, B3, B2, and B1 (LSB)) having blue image information. In other words, B7 (=0) to serve as the most significant bit is added to the 6 bit digital data (B6 (MSB), B5, B4, B3, B2, and B1 (LSB)) having blue image information. It is to be noted that the 6 bit digital data before the conversion (B6 (MSB), B5, B4, B3, B2, and B1 (LSB)) is used as the lower 6 bits of the 7 bit digital data after the conversion. In this way, the 6 bit digital data having blue image information is converted into the 7 bit digital data in which the value of the most significant bit (MSB) is "0".

[0022] As described in the above, the respective red, green, and blue 6 bit digital data are converted into 7 bit digital data.

[0023] By carrying out such digital data conversion, as shown in Fig. 2A, the digital data having red image information presents the lowest luminance (here, 0) at the lowest gray-scale level (here, gray-scale level 2), and presents the highest luminance $B_{R\max}$ at the highest gray-scale level (here, gray-scale level 128). Display of 64 gray-scales from gray-scale level 2 to gray-scale level 128 can be carried out with two gray scale levels as one step and the luminance being from the lowest luminance to the highest luminance $B_{R\max}$.

[0024] As shown in Fig. 2B, the digital data having green image information presents the lowest luminance (here, 0) at the lowest gray-scale level (here, gray-scale level 1), and presents the highest luminance $B_{G\max}$ at the highest gray-scale level (here, gray-scale level 64). Here, the highest gray-scale level is 64 because the bit of the value of the most significant bit becomes "0" through the above-described digital data conversion. In this way, display of 64 gray-scales from gray-scale level

1 to gray-scale level 64 can be carried out with the luminance being from the lowest luminance to the highest luminance B_{Rmax} .

[0025] As shown in Fig. 2B, the digital data having blue image information presents the lowest luminance (here, 0) at the lowest gray-scale level (here, gray-scale level 1), and presents the highest luminance B_{Rmax} at the highest gray-scale level (here, gray-scale level 64). Here, similarly to the case of green, the highest gray-scale level is 64 because the value of the most significant bit becomes "0" through the above-described digital data conversion. In this way, display of 64 gray-scales from gray-scale level 1 to gray-scale level 64 can be carried out with the luminance being from the lowest luminance to the highest luminance B_{Rmax} .

[0026] Therefore, all of the highest luminance of red, the highest luminance of green, and the highest luminance of blue are the highest luminance B_{Rmax} of red, and thus, display can be carried out with the luminance of red, the luminance of green, and the luminance of blue being well-balanced.

[0027] Further, a general case where n bit digital data having red image information (gray-scale information), n bit digital data having green image information (gray-scale information), and n bit digital data having blue image information (gray-scale information) are respectively converted into (n+1) bit digital data is now described with reference to Fig. 7.

[0028] Data conversion of n bit digital data having red image information is shown in Fig. 7R, data conversion of n bit digital data having green image information is shown in Fig. 7G, and data conversion of n bit digital data having blue image information is shown in Fig. 7B.

[0029] First, data conversion of n bit digital data having red image information (gray-scale information) (Fig. 7R) is described. $R0 (=1)$ is added below that is the least significant bit among the n bit digital data (Rn (MSB), $Rn-1$, ..., $R3$, $R2$, and $R1$ (LSB)) having red image information. In other words, $R0 (=1)$ to serve as the least significant bit is added to the n bit digital data (Rn (MSB), $Rn-1$, ..., $R3$, $R2$, and $R1$ (LSB)) having red image information. It is to be noted that the n bit digital data before the conversion (Rn (MSB), $Rn-1$, ..., $R3$, $R2$, and $R1$ (LSB)) is used as the upper n bits of the (n+1) bit digital data after the conversion. In this way, the n bit digital data having red image information is converted into the (n+1) bit digital data in which the value of the least significant bit (LSB) is "1".

[0030] Next, data conversion of n bit digital data having green image information (gray-scale information) (Fig. 7G) is described. $Gn+1 (=0)$ is added above the most significant bit amount the n bit digital data (Gn (MSB), $Gn-1$, ..., $G3$, $G2$, and $G1$ (LSB)) having green image information. In other words, $Gn+1 (=0)$ to serve as the most significant bit is added to the n bit digital data (Gn (MSB), $Gn-1$, ..., $G3$, $G2$, and $G1$ (LSB)) having green image information. It is to be noted that the n bit digital data before the conversion (Gn (MSB), $Gn-1$, ..., $G3$, $G2$, and $G1$ (LSB))

and $G1$ (LSB)) is used as the lower n bits of the (n+1) bit digital data after the conversion. In this way, the n bit digital data having green image information is converted into the (n+1) bit digital data in which the value of the most significant bit (MSB) is "0".

[0031] Next, data conversion of n bit digital data having blue image information (gray-scale information) (Fig. 7B) is described. The conversion of the n bit digital data having blue image information is similar to the conversion of the n bit digital data having green image information. $Bn+1 (=0)$ is added above the most significant bit among the n bit digital data (Bn (MSB), $Bn-1$, ..., $B3$, $B2$, and $B1$ (LSB)) having blue image information. In other words, $Bn+1 (=0)$ to serve as the most significant bit is added to the n bit digital data (Bn (MSB), $Bn-1$, ..., $B3$, $B2$, and $B1$ (LSB)) having blue image information. It is to be noted that the n bit digital data before the conversion (Bn (MSB), $Bn-1$, ..., $B3$, $B2$, and $B1$ (LSB)) is used as the lower n bits of the (n+1) bit digital data after the conversion. In this way, the n bit digital data having blue image information is converted into the (n+1) bit digital data in which the value of the most significant bit (MSB) is "0".

[0032] As described in the above, the respective red, green, and blue n bit digital data are converted into (n+1) bit digital data.

[0033] By carrying out such digital data conversion, as shown in Fig. 2A, the digital data having red image information presents the lowest luminance (here, 0) at the lowest gray-scale level (here, gray-scale level $2^1 = 2$), and presents the highest luminance B_{Rmax} at the highest gray-scale level (here, gray-scale level 2^{n+1}). Display of 2^n gray-scales from gray-scale level 2 to gray-scale level 2^{n+1} can be carried out with two gray-scales as one step and with the luminance being from the lowest luminance to the highest luminance B_{Rmax} .

[0034] As shown in Fig. 2B, the digital data having green image information presents the lowest luminance (here, 0) at the lowest gray-scale level (here, gray-scale level $2^0 = 1$), and presents the highest luminance B_{Gmax} at the highest gray-scale level (here, gray-scale level 2^n). Here, the highest gray-scale level is 2^n because the value of the most significant bit becomes "0" through the above-described digital data conversion. In this way, display of 2^n gray-scales from gray-scale level 1 to gray-scale level 2^n can be carried out with the luminance being from the lowest luminance to the highest luminance B_{Gmax} .

[0035] As shown in Fig. 2B, the digital data having blue image information presents the lowest luminance (here, 0) at the lowest gray-scale level (here, gray-scale level $2^0 = 1$), and presents the highest luminance B_{Bmax} at the highest gray-scale level (here, gray-scale level 2^n). Here, similar to the case of green, the highest gray-scale level is 2^n because the most significant bit of the data becomes "0" through the above-described digital data conversion. In this way, display of 2^n gray-scales from gray-scale level 1 to gray-scale level 2^n can be carried out with the luminance being from the lowest luminance

to the highest luminance $B_{R\max}$.

[0036] Therefore, all of the highest luminance of red, the highest luminance of green, and the highest luminance of blue are the highest luminance $B_{R\max}$ of red, and thus, display can be carried out with the luminance of red, the luminance of green, and the luminance of blue being well-balanced.

[0037] Now, operation from inputting the digital data to the EL display device to displaying an image display in the driving method according to the present invention is described with reference to Fig. 4. Though a case where image information is provided as 7 bit digital data is described here as an example, the present invention is not limited thereto.

[0038] First, one frame of an image is divided into seven subframes. It is to be noted that one cycle for inputting data to all the pixels in a display region of an EL display device is referred to as one frame. In a typical EL display device, the frequency is 60 Hz. In other words, 60 frames are formed in one second. If the number of frames formed in one second is less than 60, flicker of an image is visually conspicuous. It is to be noted that a plurality of divisions of one frame are referred to as subframes.

[0039] One subframe can be broken down into an address time period (T_a) and a sustain time period (T_s). An address time period is the whole time period necessary for inputting data to all the pixels in one subframe. A sustain time period (which may be called also as a lighting time period) is a time period during which the EL elements emit light.

[0040] Here, the first subframe is denoted as SF1, and the second to the seventh subframes are denoted as SF2 - SF7, respectively. The address time period (T_a) is constant with regard to all of SF1 - SF7. On the other hand, the sustain time period (T_s) of SF1 - SF7 are denoted as T_{s1} - T_{s7} , respectively. It is to be noted that the display of SF1 corresponds to the most significant bit while the display of SF7 corresponds to the least significant bit.

[0041] Here, the sustain time periods are set such that $T_{s1}:T_{s2}:T_{s3}:T_{s4}:T_{s5}:T_{s6}:T_{s7} = 1:1/2:1/4:1/8:1/16:1/32:1/64$. It is to be noted that the order of appearance of SF1 - SF7 is arbitrary. By combining these sustain time periods, desired gray-scale display among the 128 gray-scale levels can be carried out.

[0042] It is to be noted that, in the method of driving an EL display device according to the present invention, since the least significant bit of digital data having red image information is always "1", the most significant bit of digital data having green image information is always "0", and the most significant bit of digital data having blue image information is always "0", practically display of 64 gray-scales can be carried out with regard to each of red, green, and blue.

[0043] First, with an opposing electrode (an electrode which is not connected to TFTs, typically a cathode) of EL elements of pixels having no voltage applied thereto (being unselected), digital data is inputted to each of the pixels with the EL elements emitting no light. The time

period to do this is an address time period. When digital data is inputted to all the pixels and the address time period ends, voltage is applied to the opposing electrode (the opposing electrode is selected) to make the EL elements emit light simultaneously. The time period to do this is a sustain time period. The time period to carry out the light emitting (to light the pixels) is any of the time periods T_{s1} - T_{s7} .

[0044] Then, an address time period again begins. After digital data is inputted to each of the pixels, a sustain time period begins. The sustain time period is any of the time periods T_{s1} - T_{s7} .

[0045] Similar operation is repeated with regard to the remaining five subframes, and predetermined pixels are lighted in the respective subframes.

[0046] One frame ends when seven subframes appear. Here, by accumulating the sustain time periods, the gray-scale of a pixel can be controlled and desired luminance can be realized.

[0047] In case n bit digital data is inputted from the external and is converted into $(n+1)$ bit digital data as described in the above, first, one frame is divided into $(n+1)$ subframes (denoted as SF1, SF2, SF3, ... SF $(n-1)$, SF (n) , and SF $(n+1)$) so as to correspond to the $(n+1)$ bits. As the number of the gray-scales increases, the number of divisions of one frame also increases, which makes it necessary to drive a driving circuit at a higher frequency.

[0048] Each of the $(n+1)$ subframes can be broken down into an address time period (T_a) and a sustain time period (T_s). More specifically, by selecting whether voltage is applied to the opposing electrode common to all the EL elements or not, the address time period and the sustain time period are selected.

[0049] Then, processing is carried out to set the sustain time periods ($T_{s1}, T_{s2}, T_{s3}, \dots, T_{s(n-1)}, T_{s(n)},$ and $T_{s(n+1)}$ for SF1, SF2, SF3, ... SF $(n-1)$, SF (n) , and SF $(n+1)$, respectively) for the $(n+1)$ subframes so that $T_{s1}:T_{s2}:T_{s3}:\dots:T_{s(n-1)}:T_{s(n)}:T_{s(n+1)} = 2^0:2^1:2^2:\dots:2^{(n-2)}:2^{(n-1)}:2^n$.

[0050] With this state, in one arbitrary subframe, pixels are sequentially selected (strictly speaking, TFTs for switching of the respective pixels are selected) to apply predetermined gate voltage (corresponding to a data signal) to gate electrodes of TFTs for current controlling. Here, an EL element of a pixel to which digital data to make conducting its TFT for current controlling is inputted emits light after an address time period ends for a sustain time period allotted to the subframe. In other words, predetermined pixels are lighted.

[0051] This operation is repeated with regard to each of the $(n+1)$ subframes. By accumulating the sustain time periods, the gray-scales of the respective pixels can be controlled. When attention is focused on one arbitrary pixel, the gray-scale of the pixel is controlled depending on how long the pixel is lighted in the subframes (the number of sustain time periods the pixel goes through).

[0052] Hereinbelow, the structure of the present inven-

tion will be described in accordance with descriptions of claims.

[0053] An EL display device according to the present invention is characterized in that the device includes a circuit for converting n bit digital data having red image information, n bit digital data having green image information, and n bit digital data having blue image information (n is a natural number) inputted from the external into (n+1) bit digital data having red image information, (n+1) bit digital data having green image information, and (n+1) bit digital data having blue image information, respectively, and in that, by adding a bit having the value of one below the least significant bit of the n bit digital data having red image information, adding a bit having the value of zero above the most significant bit of the n bit digital data having green image information, and by adding a bit having the value of zero above the most significant bit of the n bit digital data having blue image information, the circuit produces the (n+1) bit digital data having red image information, the (n+1) bit digital data having green image information, and the (n+1) bit digital data having blue image information, respectively, to be used for displaying an image.

[0054] Further, a method of driving an EL display device according to the present invention is characterized in that the method comprises the steps of: adding a bit having the value of one below the least significant bit of n bit digital data having red image information inputted from the external; adding a bit having the value of zero above the most significant bit of n bit digital data having green image information inputted from the external; and adding a bit having the value of zero above the most significant bit of n bit digital data having blue image information inputted from the external, whereby producing (n+1) bit digital data having red image information, (n+1) bit digital data having green image information, and (n+1) bit digital data having blue image information, respectively; and inputting the (n+1) bit digital data having red image information, the (n+1) bit digital data having green image information, and the (n+1) bit digital data having blue image information to a time-division gray-scale data signal generating circuit, the time-division gray-scale data signal generating circuit dividing one frame into (n+1) subframes (SF1, SF2, SF3, ... SF (n-1), SF(n), and SF (n+1)) and selecting an address time period (T_a) and a sustain time period (Ts1, Ts2, Ts3, ... Ts(n-1), Ts(n), and Ts(n+1) for SF1, SF2, SF3, ... SF (n-1), SF(n), and SF (n+1), respectively) for each of the (n+1) subframes, the sustain time periods for the (n+1) subframes being set so that $Ts1:Ts2:Ts3: \dots :Ts(n-1):Ts(n):Ts(n+1) = 2^0:2^1:2^2: \dots :2^{(n-2)}:2^{(n-1)}:2^n$.

BRIEF DESCRIPTION OF THE DRAWINGS

[0055] In the accompanying drawings:

Fig. 1 is a graph showing the luminance of light emission with respect to gray-scale levels of an EL display

device;

Fig. 2 is a graph showing the luminance of light emission with respect to gray-scale levels of an EL display device in accordance with the present invention;

Fig. 3 illustrates a method of converting digital data in a method of driving the EL display device in accordance with the present invention;

Fig. 4 is a timing chart of the method of driving the EL display device in accordance with the present invention;

Fig. 5 is a schematic block diagram of the EL display device in accordance with the present invention;

Fig. 6 is a circuit diagram of a pixel of the EL display device in accordance with the present invention;

Fig. 7 illustrates a method of converting digital data in the method of driving the EL display device in accordance with the present invention;

Fig. 8 is a graph showing the luminance of light emission with respect to gray-scale levels of the EL display device in accordance with the present invention; and

Fig. 9 shows examples of electronic equipment using the EL display device in accordance with the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0056] An embodiment mode of the present invention will be described in the following.

[0057] Reference is made to Fig. 5, which is a schematic block diagram of an EL display device having a driving circuit, which employs a driving method in accordance with the present invention.

[0058] In the present embodiment mode, 6 bit digital data having red, green, and blue image information (gray-scale information), respectively, are inputted from the external. Note that, as described in the above, n bit digital data having red, green, and blue image information (gray-scale information), respectively, may also be inputted from the external.

[0059] First, in the EL display device according to the present invention shown in Fig. 5, a pixel portion 101, and, a driving circuit 102 on the side of data signals and a driving circuit 103 on the side of gate signals both of which are disposed on the periphery of the pixel portion 101, are formed with TFTs formed on a substrate. Note that a pair of such driving circuits 102 on the side of data signals may be provided so as to sandwich the pixel portion 101, and a pair of such driving circuits 103 on the side of gate signals may be provided so as to sandwich the pixel portion 101.

[0060] The driving circuit 102 on the side of data signals basically includes a shift register 102a, a latch (A) 102b, and a latch (B) 102c. A clock signal (CK) and a start pulse (SP) are inputted to the shift register 102a. Digital data (digital data (R), digital data (G), and digital data (B)) are inputted to the latch (A) 102b, and a latch signal is input-

ted to the latch (B) 102c.

[0061] In the present invention, data inputted to the pixel portion 101 is digital data. More specifically, digital data having information of either "0" or "1" is inputted as it is to the pixel portion 101.

[0062] A plurality of pixels 104 are arranged in matrix in the pixel portion 101. Fig. 6 is an enlarged view of a pixel 104. In Fig. 6, a TFT 105 for switching is connected to a gate wiring 106 for inputting a gate signal and to a data wiring (also referred to as a source wiring) 107 for inputting a data signal.

[0063] A gate of a TFT 108 for current controlling is connected to a drain of the TFT 105 for switching. A drain of the TFT 108 for current controlling is connected to an EL element 109 while a source of the TFT 108 for current controlling is connected to a power source supply line 110. The EL element 109 is formed of an anode (a pixel electrode) connected to the TFT 108 for current controlling and a cathode (an opposing electrode) provided so as to oppose the anode with an EL layer sandwiched therebetween. The cathode is connected to a predetermined power source 111.

[0064] A capacitor 112 is provided to maintain the gate voltage of the TFT 108 for current controlling when the TFT 105 for switching is in an unselected state (OFF state). The capacitor 112 is connected to the drain of the TFT 105 for switching and to the power source supply line 110.

[0065] Digital data inputted to the pixel portion 101 structured as described in the above is produced by a time-division gray-scale data signal generating circuit 113 and a digital data converting circuit 114. 6 bit digital data (6 bit digital data (R), 6 bit digital data (G), and 6 bit digital data (B)) inputted from the external are converted into 7 bit digital data (7 bit digital data (R), 7 bit digital data (G), and 7 bit digital data (B)), respectively, by the digital data converting circuit 114. It is to be noted that the method of converting the digital data is as described in the above.

[0066] The 7 bit digital data (7 bit digital data (R), 7 bit digital data (G), and 7 bit digital data (B)) produced by the digital data converting circuit 114 are inputted to the time-division gray-scale data signal generating circuit 113. The time-division gray-scale data signal generating circuit 113 is a circuit for converting 7 bit digital data into digital data for carrying out time-division gray-scale and for generating a timing pulse and the like necessary for carrying out time-division gray-scale display.

Here, the time-division gray-scale data signal generating circuit 113 comprises means for dividing one frame into seven subframes corresponding to the 7 bit gray-scales, means for selecting an address time period and a sustain time period for each of the seven subframes, and means for setting the sustain time periods such that $Ts1:Ts2:Ts3:Ts4:Ts5:Ts6:Ts7 = 1:1/2:1/4:1/8:1/16:1/32:1/64$.

[0067] It is to be noted that, in case (n+1) bit digital data is inputted to the time-division gray-scale data signal

generating circuit 113, the time-division gray-scale data signal generating circuit 113 comprises means for dividing one frame into (n+1) subframes corresponding to the (n+1) bit gray-scales, means for selecting an address time period and a sustain time period for each of the (n+1) subframes, and means for setting the sustain time periods so that $Ts1:Ts2:Ts3: \dots :Ts(n-1):Ts(n):Ts(n+1) = 2^0:2^1:2^2: \dots :2^{(n-2)}:2^{(n-1)}:2^n$.

[0068] The time-division gray-scale data signal generating circuit 113 may be provided outside the EL display device according to the present invention. In this case, digital data formed there is structured to be inputted to the EL display device according to the present invention. In this case, an electronic apparatus having as its display the EL display device according to the present invention includes the EL display device according to the present invention and the time-division gray-scale data signal generating circuit as different parts.

[0069] Further, the time-division gray-scale data signal generating circuit 113 may be mounted in the form of an IC chip or the like on the EL display device according to the present invention. In that case, digital data formed by the IC chip is structured to be inputted to the EL display device according to the present invention. In this case, an electronic apparatus having as its display the EL display device according to the present invention includes as its part the EL display device according to the present invention having the IC chip including the time-division gray-scale data signal generating circuit 113 mounted thereon.

[0070] Still further, ultimately, the time-division gray-scale data signal generating circuit 113 can be formed with a TFT on the substrate having the pixel portion 104, the driving circuit 102 on the side of data signals, and the driving circuit 103 on the side of gate signals formed thereon. In this case, by inputting to the EL display device digital video data including image information, all the processing can be carried out on the substrate.

40 Embodiment 1

[0071] The EL display device using the driving method according to the present invention (hereinafter referred to as "the EL display device according to the present invention") can be incorporated into various electronic equipment to be used.

[0072] Such electronic equipment include a video camera, a digital camera, a head-mounted display (a goggle-type display), a game machine, a car navigation system, a personal computer, a personal digital assistant (such as a mobile computer, a portable telephone, or an electronic book). Fig. 9 shows examples of such electronic equipment.

[0073] Fig. 9A shows a personal computer formed of a main body 7001, an image input portion 7002, an EL display device 7003 according to the present invention, and a keyboard 7004.

[0074] Fig. 9B shows a video camera formed of a main

body 7101, an EL display device 7102 according to the present invention, a voice input portion 7103, a control switch 7104, a battery 7105, and an image receiving portion 7106.

[0075] Fig. 9C shows a mobile computer formed of a main body 7201, a camera portion 7202, an image receiving portion 7203, a control switch 7204, and an EL display device 7205 according to the present invention. 5

[0076] Fig. 9D shows a goggle-type display formed of a main body 7301, an EL display device 7302 according to the present invention, and an arm portion 7303. 10

[0077] Fig. 9E shows a player using a recording medium with a program recorded thereon (hereinafter referred to as a recording medium) formed of a main body 7401, an EL display device 7402 according to the present invention, a speaker portion 7403, a recording medium 7404, and a control switch 7405. It is to be noted that the apparatus uses a DVD (digital versatile disc), a CD, or the like as the recording medium. With the apparatus, one can enjoy music, a movie, a game, or the Internet. 15

[0078] Fig. 9F shows a game machine formed of a main body 7501, an EL display device 7502 according to the present invention, another EL display device 7503 according to the present invention, a recording medium 7504, a controller 7505, a sensor portion 7506 for the main body, a sensor portion 7507, and a CPU portion 7508. The sensor portion 7506 for the main body and the sensor portion 7507 can sense infrared radiation emitted from the controller 7505 and the main body 7501, respectively. 20

[0079] As described in the above, the application of the EL display device according to the present invention is very wide, and the EL display device can be applied to electronic apparatus of all fields. 25

[0080] According to the present invention, the white balance can be improved to carry out satisfactory display even with regard to an EL display device using an EL light emitting layer with low luminance of red light emission. 30

Claims

1. An EL display device comprising:

a circuit (114) for converting n bit digital data having red image information, n bit digital data having green image information, and n bit digital data having blue image information, where n is a natural number, inputted from an external source, into (n+1) bit digital data having red image information, (n+1) bit digital data having green image information, and (n+1) bit digital data having blue image information, respectively; 45

a time-division circuit (113) for generating digital data signals from the (n+1) bit digital data having red, green and blue information; 50

a data signal side driving circuit (102) connected to the time-division circuit (113); and a pixel portion (101) comprising a plurality of pixels (104) arranged in a matrix, each pixel comprising an EL element (109), a current control TFT (108) connected to the EL element (109), and a switching TFT (105) for inputting the digital data signals from data wiring (107) and gate signals from gate wiring (106);

wherein the data signal side driving circuit (102) is adapted to input said digital data signals, produced by the time-division gray-scale data signal generating circuit (113) and the digital data converting circuit (114), to the pixel portion (101) through the data wiring (107);

characterized in that

said circuit (114) for converting n bit digital data produces said (n+1) bit digital data having red image information, said (n+1) bit digital data having green image information, and said (n+1) bit digital data having blue image information by adding a bit having the value of one below the least significant bit (LSB) of said n bit digital data having red image information, a bit having the value of zero above the most significant bit (MSB) of said n bit digital data having green image information, and a bit having the value of zero above the most significant bit (MSB) of said n bit digital data having blue image information, respectively.

2. The EL display device according to claim 1, wherein said time-division circuit (113) generates digital data signals by dividing one frame into (n+1) subframes (SF1, SF2, SF3, ... SF (n-1), SF(n), and SF (n+1)) and selecting an address time period (Ta) and a sustain time period (Ts1, Ts2, Ts3, ... Ts(n-1), Ts(n), and Ts(n+1) for SF1, SF2, SF3, ... SF (n-1), SF(n), and SF (n+1), respectively) for each of the (n+1) subframes, the sustain time periods for the (n+1) subframes being set so that Ts1:Ts2:Ts3: ... :Ts(n-1):Ts(n):Ts(n+1) = 2⁰:2⁻¹:2⁻²: ... :2⁻⁽ⁿ⁻²⁾:2⁻⁽ⁿ⁻¹⁾:2⁻ⁿ. 40

3. An electronic equipment having the EL display device according to claim 1 or 2, wherein the electronic equipment is selected from the group consisting of a video camera, a digital camera, a head-mounted display, a game machine, a car navigation system, a personal computer, a mobile computer, a portable telephone and an electronic book. 45

4. A personal digital assistant comprising:

a main body;
an EL display device according to claim 1 or 2;
and
a control switch. 55

5. The personal digital assistant according to claim 4, wherein the personal digital assistant is selected from the group consisting of a mobile computer, a portable phone and an electronic book.

Patentansprüche

1. EL-Anzeigevorrichtung, die umfasst:

eine Schaltung (114) zum Umwandeln von n-Bit-Digitaldaten mit roter Bildinformation, n-Bit-Digitaldaten mit grüner Bildinformation und n-Bit-Digitaldaten mit blauer Bildinformation, wobei n eine natürliche Zahl ist und sie von einer externen Quelle eingegeben werden, in (n+1)-Bit-Digitaldaten mit roter Bildinformation, (n+1)-Bit-Digitaldaten mit grüner Bildinformation bzw. (n+1)-Bit-Digitaldaten mit blauer Bildinformation;

eine Zeitteilerschaltung (113) zum Erzeugen von digitalen Datensignalen aus den (n+1)-Bit-Digitaldaten mit roter, grüner und blauer Information;

eine datensignalseitige Treiberschaltung (102), die mit der Zeitteilerschaltung (113) verbunden ist; und

einen Pixelabschnitt (101), der eine Vielzahl von in einer Matrix angeordneten Pixeln (104) umfasst, wobei jedes Pixel ein EL-Element (109), einen Stromsteuer-TFT (108), der mit dem EL-Element (109) verbunden ist, und einen Umschalt-TFT (105) zum Eingeben der digitalen Datensignale von einer Datenleitung (107) und der Gate-Signale von einer Gate-Leitung (106) umfasst;

wobei die datensignalseitige Treiberschaltung (102) konfiguriert ist, die digitale Datensignale, die durch die Zeitteiler-Graustufen-Datensignalerzeugungsschaltung (113) und die Digitaldatenumwandlungsschaltung (114) erzeugt werden, über die Datenleitung (107) in den Pixelabschnitt (101) einzugeben; **dadurch gekennzeichnet, dass** die Schaltung (114) zum Umwandeln von n-Bit-Digitaldaten die (n+1)-Bit-Digitaldaten mit roter Bildinformation, die (n+1)-Bit-Digitaldaten mit grüner Bildinformation und die (n+1)-Bit-Digitaldaten mit blauer Bildinformation erzeugt, indem ein Bit mit dem Wert von eins unter dem Bit mit dem niedrigsten Stellenwert (LSB) der n-Bit-Digitaldaten mit roter Bildinformation, ein Bit mit dem Wert von null über dem Bit mit dem höchsten Stellenwert (MSB) der n-Bit-Digitaldaten mit grüner Bildinformation bzw. ein Bit mit dem Wert von null über dem Bit mit dem höchsten Stellenwert (MSB) der n-Bit-Digitaldaten mit blauer Bildinformation hinzugefügt werden.

5. EL-Anzeigevorrichtung nach Anspruch 1, wobei die Zeitteilerschaltung (113) digitale Datensignale erzeugt, indem ein Bild in (n+1) Teilbilder (SF1, SF2, SF3, ... SF (n-1), SF(n) und SF (n+1)) geteilt wird und eine Adresszeitperiode (Ta) und eine Haltezeitperiode (Ts1, Ts2, Ts3, ... Ts(n-1), Ts(n) und Ts(n+1) für SF1, SF2, SF3, ... SF (n-1), SF(n) bzw. SF (n+1)) für jedes der (n+1) Teilbilder ausgewählt werden, wobei die Haltezeitperioden für die (n+1) Teilbilder derart eingestellt werden, dass $Ts1:Ts2:Ts3: \dots :Ts(n-1):Ts(n):Ts(n+1) = 2^{0}:2^{-1}:2^{-2}: \dots :2^{-(n-2)}:2^{-(n-1)}:2^{-n}$ gilt.

10. 3. Elektronisches Gerät mit der EL-Anzeigevorrichtung nach Anspruch 1 oder 2, wobei das elektronische Gerät aus der Gruppe ausgewählt wird, die aus einer Videokamera, einer Digitalkamera, einer am Kopf getragenen Anzeige, einem Spielautomat, einem Autonavigationssystem, einem Personal Computer, einem tragbaren Computer, einem Mobiltelefon und einem elektronischen Buch besteht.

15. 4. Personal Digital Assistant, der umfasst:

ein Hauptkörper;
eine EL-Anzeigevorrichtung nach Anspruch 1 oder 2; und
einen Steuerschalter.

20. 5. Personal Digital Assistant nach Anspruch 4, wobei der Personal Digital Assistant aus der Gruppe ausgewählt wird, die aus einem tragbaren Computer, einem Mobiltelefon und einem elektronischen Buch besteht.

Revendications

1. Dispositif d'affichage électroluminescent (EL) comprenant:

un circuit (114) destiné à convertir des données numériques de n bits ayant une information d'image rouge, des données numériques de n bits ayant une information d'image verte, et des données numériques de n bits ayant une information d'image bleue où n est un nombre naturel, les données sortant d'une source externe, en des données numériques de (n+1) bits ayant une information d'image rouge, en des données numériques de (n+1) bits ayant une information d'image verte, et en des données numériques de (n+1) bits ayant une information d'image bleue, respectivement;

un circuit diviseur de temps (113) destiné à générer des signaux de données numériques des données numériques de (n+1) bits ayant des informations rouge, verte et bleue;

un circuit de commande de signal de données (102) connecté au circuit diviseur de temps (113); et

une portion de pixel (101) comprenant une pluralité de pixels (104) arrangés en matrice, chaque pixel comprenant un élément EL (109), un TFT de commande de courant (108) connecté à l'élément EL (109) et un TFT de commutation (105) destiné à transmettre les signaux de données numériques d'un fil de données (107) et des signaux de grille d'un fil de grille (106);

dans lequel le circuit de commande de signal de données (102) est adapté pour transmettre lesdits signaux de données numériques, qui sont produits par le circuit diviseur de temps (113) pour générer des signaux de données en échelle de gris et par le circuit convertisseur de données numériques (114), à la portion de pixel (101) à travers le fil de données (107);

caractérisé en ce que

ledit circuit (114) destiné à convertir des données numériques de n bits produit lesdites données numériques de (n+1) bits ayant une information d'image rouge, lesdites données numériques de (n+1) bits ayant une information d'image verte, et lesdites données numériques de (n+1) bits ayant une information d'image bleue en ajoutant respectivement un bit ayant la valeur 1 sous le bit de poids faible (LSB) desdites données numériques de n bits ayant une information d'image rouge, un bit ayant la valeur 0 sur le bit de poids fort (MSB) desdites données numériques de n bits ayant une information d'image verte, et un bit ayant la valeur 0 sur le bit de poids fort (MSB) desdites données numériques de n bits ayant une information d'image bleue.

2. Dispositif d'affichage EL selon la revendication 1, dans lequel ledit circuit diviseur de temps (113) génère des signaux de données numériques en divisant une période d'image en (n+1) sous-périodes d'image (SF1, SF2, SF3, ..., SF(n-1), SF(n), et SF(n+1)) et en choisissant une période d'adressage (Ta) et une période de maintien (Ts1, Ts2, Ts3, ..., Ts(n-1), Ts(n), et Ts(n+1) correspondant respectivement à SF1, SF2, SF3, ..., SF(n-1), SF(n), et SF(n+1)) pour chacune des (n+1) sous-périodes d'image, les périodes de maintien pour les (n+1) sous-périodes d'image étant déterminées afin d'être $Ts1: Ts2: Ts3: \dots: Ts(n-1): Ts(n): Ts(n+1) = 2^0: 2^{-1}: 2^{-2}: \dots: 2^{-(n-2)}: 2^{-(n-1)}: 2^{-n}$.
3. Appareillage électronique ayant le dispositif d'affichage EL selon la revendication 1 ou 2, dans lequel l'appareillage électronique est choisi dans le groupe constitué d'une caméra vidéo, d'un appareil photo numérique, d'un visiocasque, d'une machine de jeux, d'un système de navigation automobile, d'un

ordinateur personnel, d'un ordinateur portable, d'un téléphone portable et d'un livre électronique.

4. Assistant numérique personnel comprenant:

un corps principal;
un dispositif d'affichage EL selon la revendication 1 ou 2; et
un commutateur de commande.

5. Assistant numérique personnel selon la revendication 4, dans lequel l'assistant numérique personnel est choisi dans le groupe constitué d'un ordinateur portable, d'un téléphone portable et d'un livre électronique.

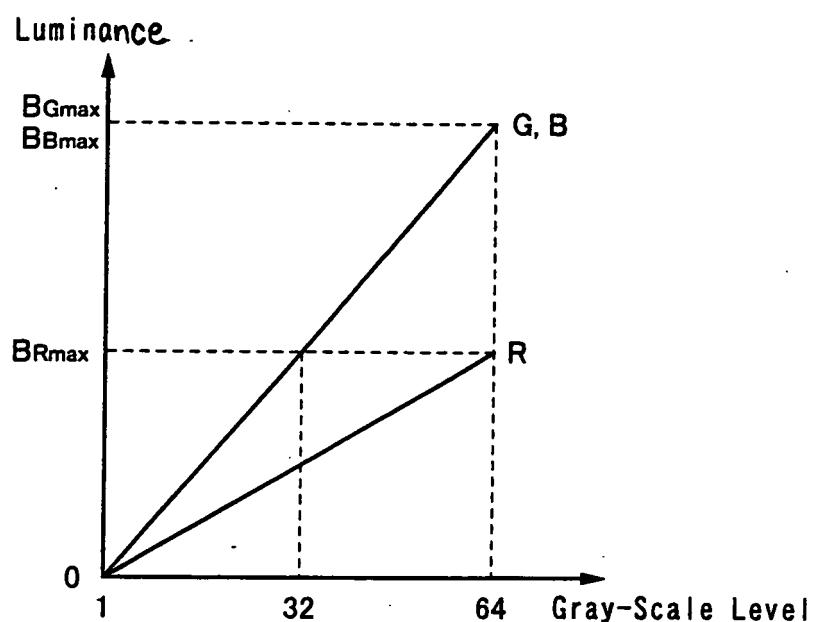


Fig. 1

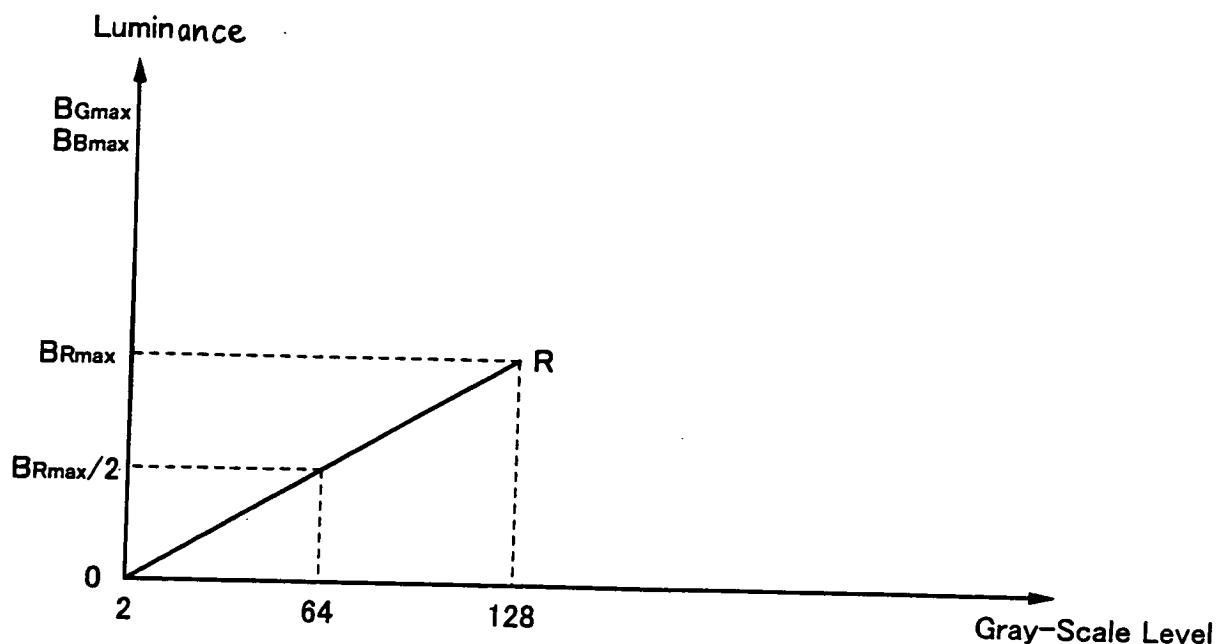


Fig. 2A

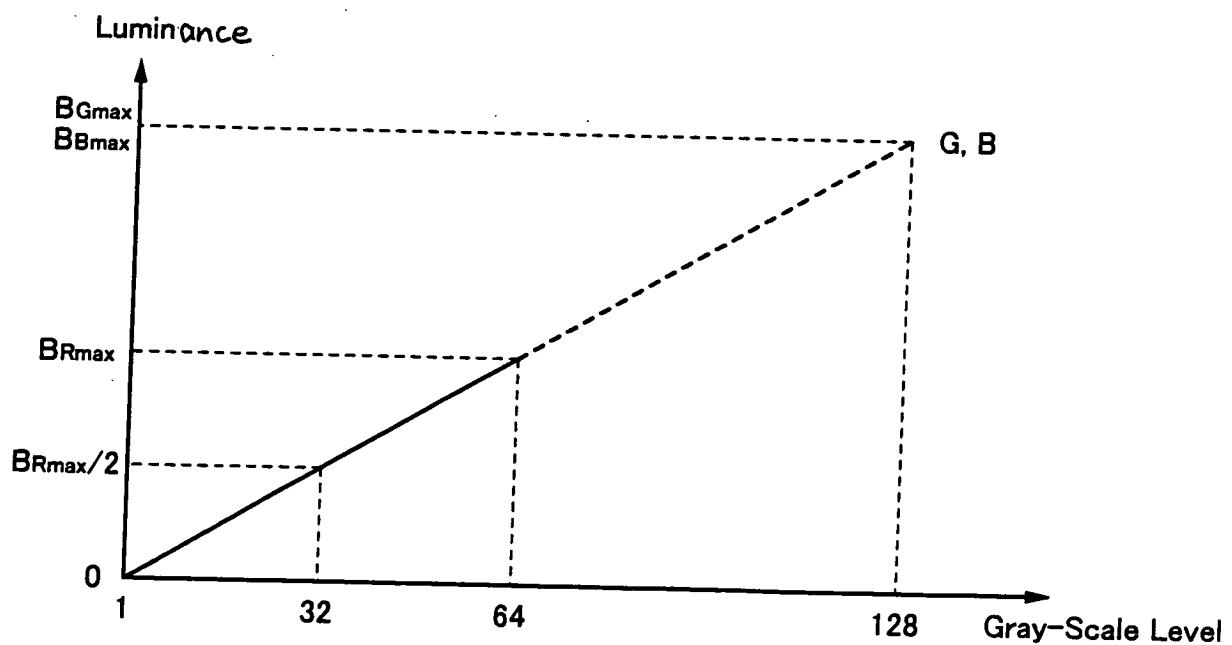


Fig. 2B

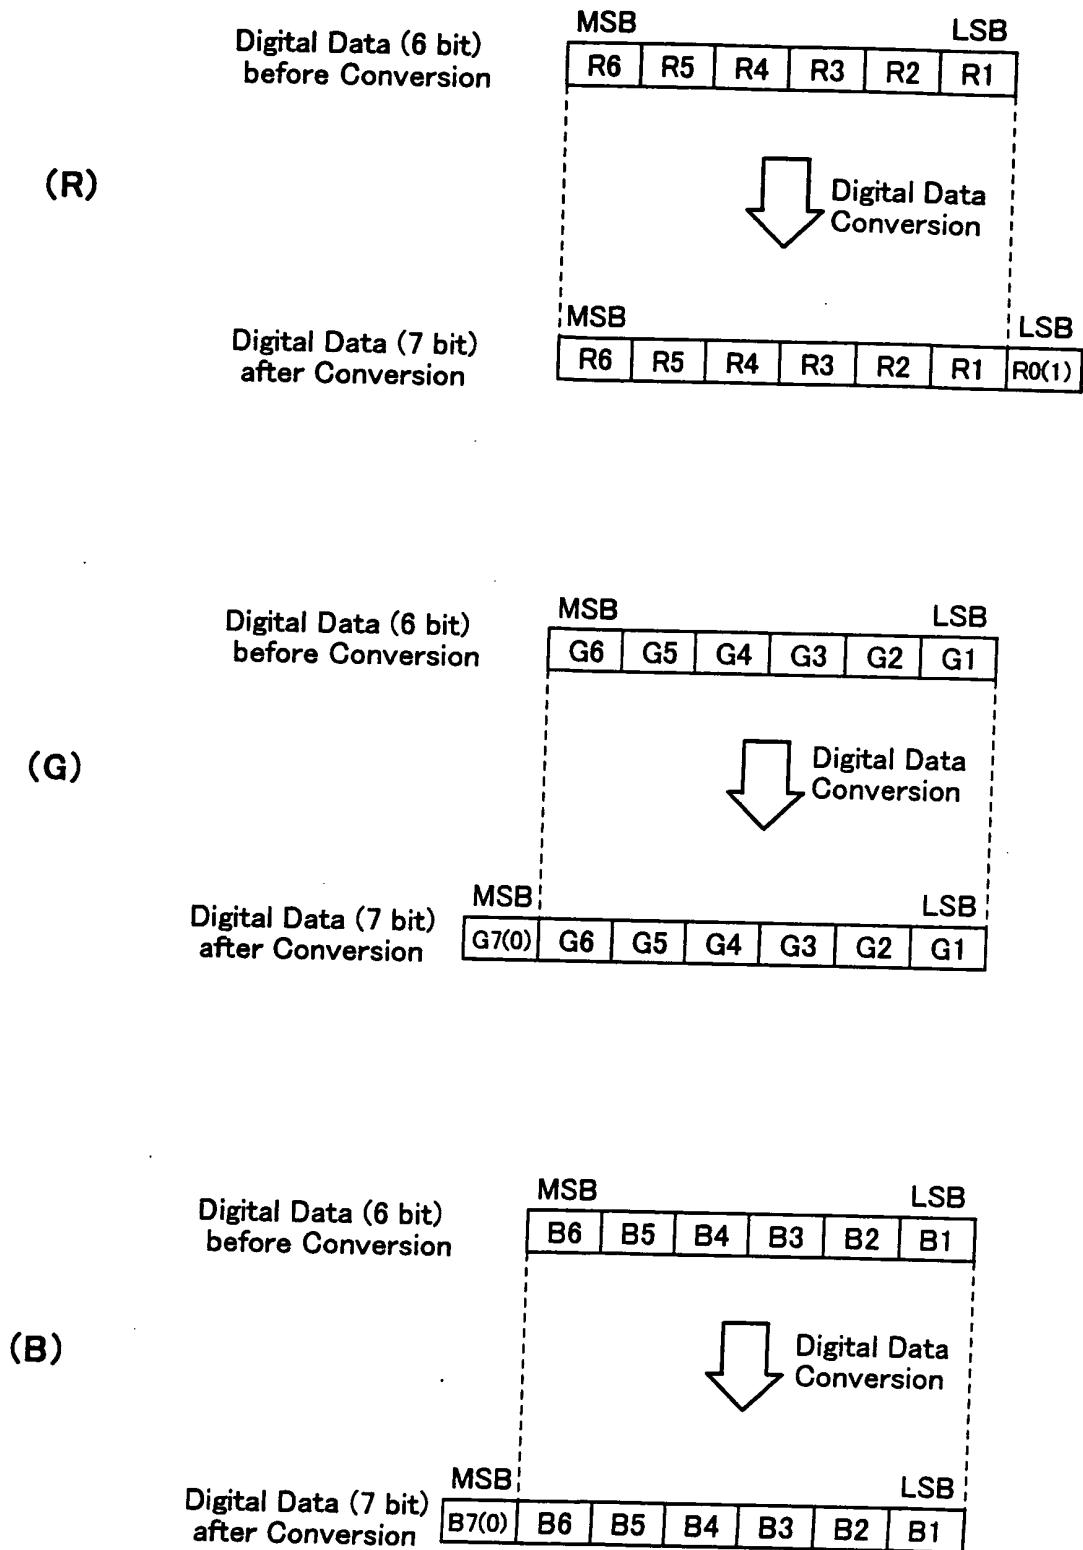


Fig. 3

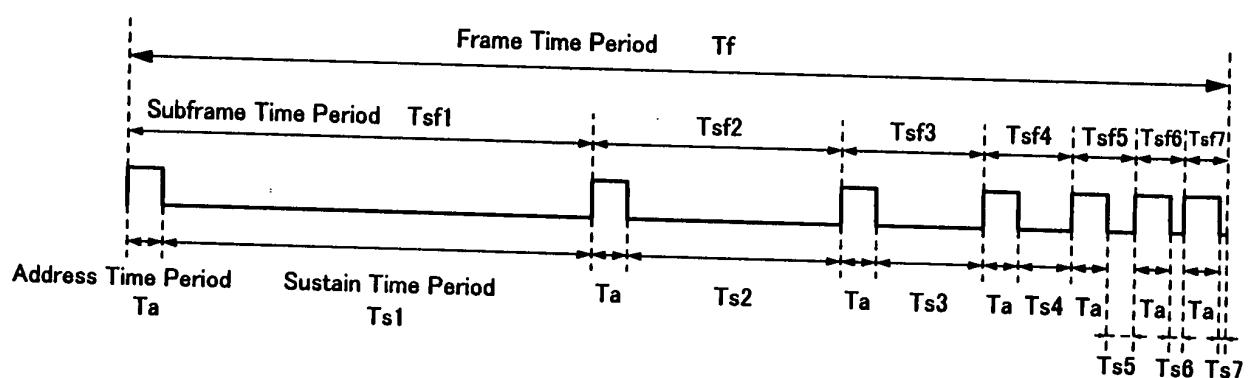


Fig. 4

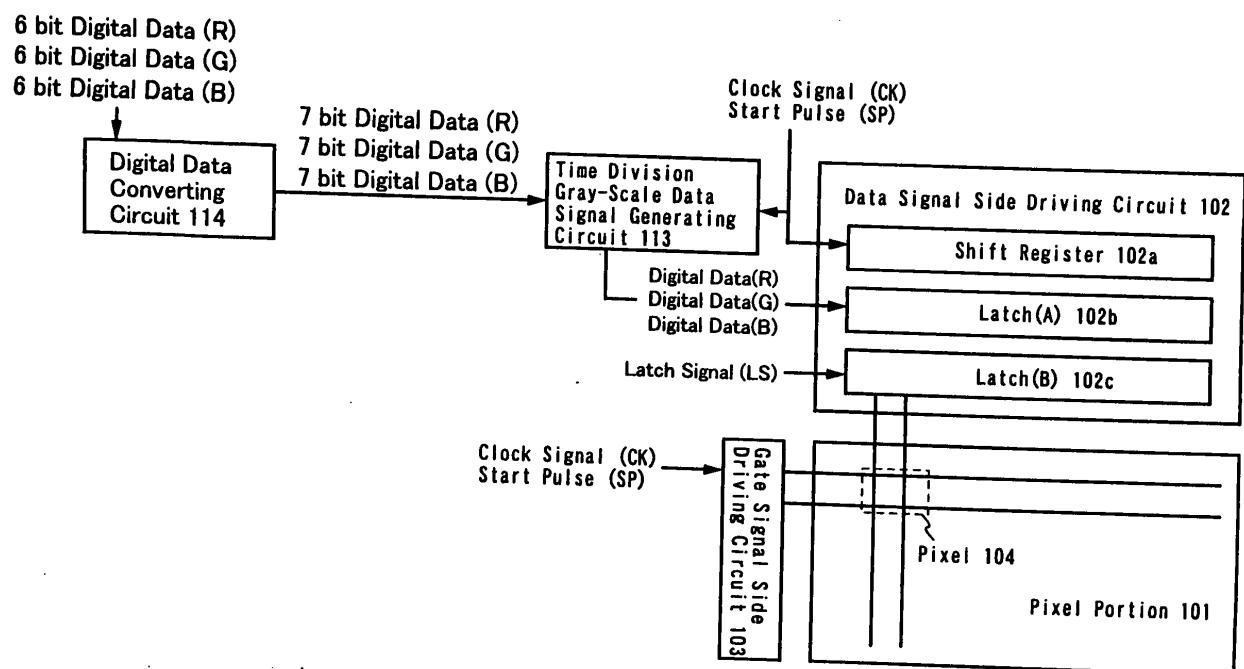


Fig. 5

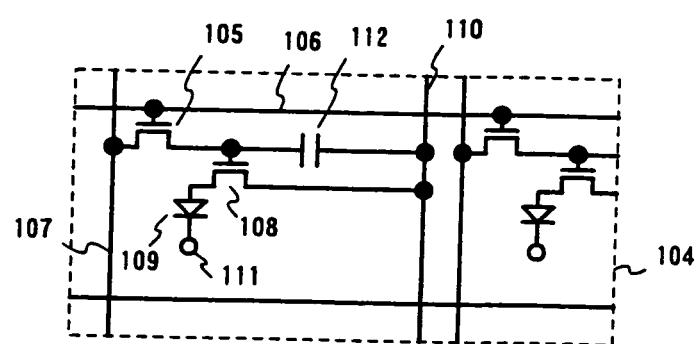


Fig. 6

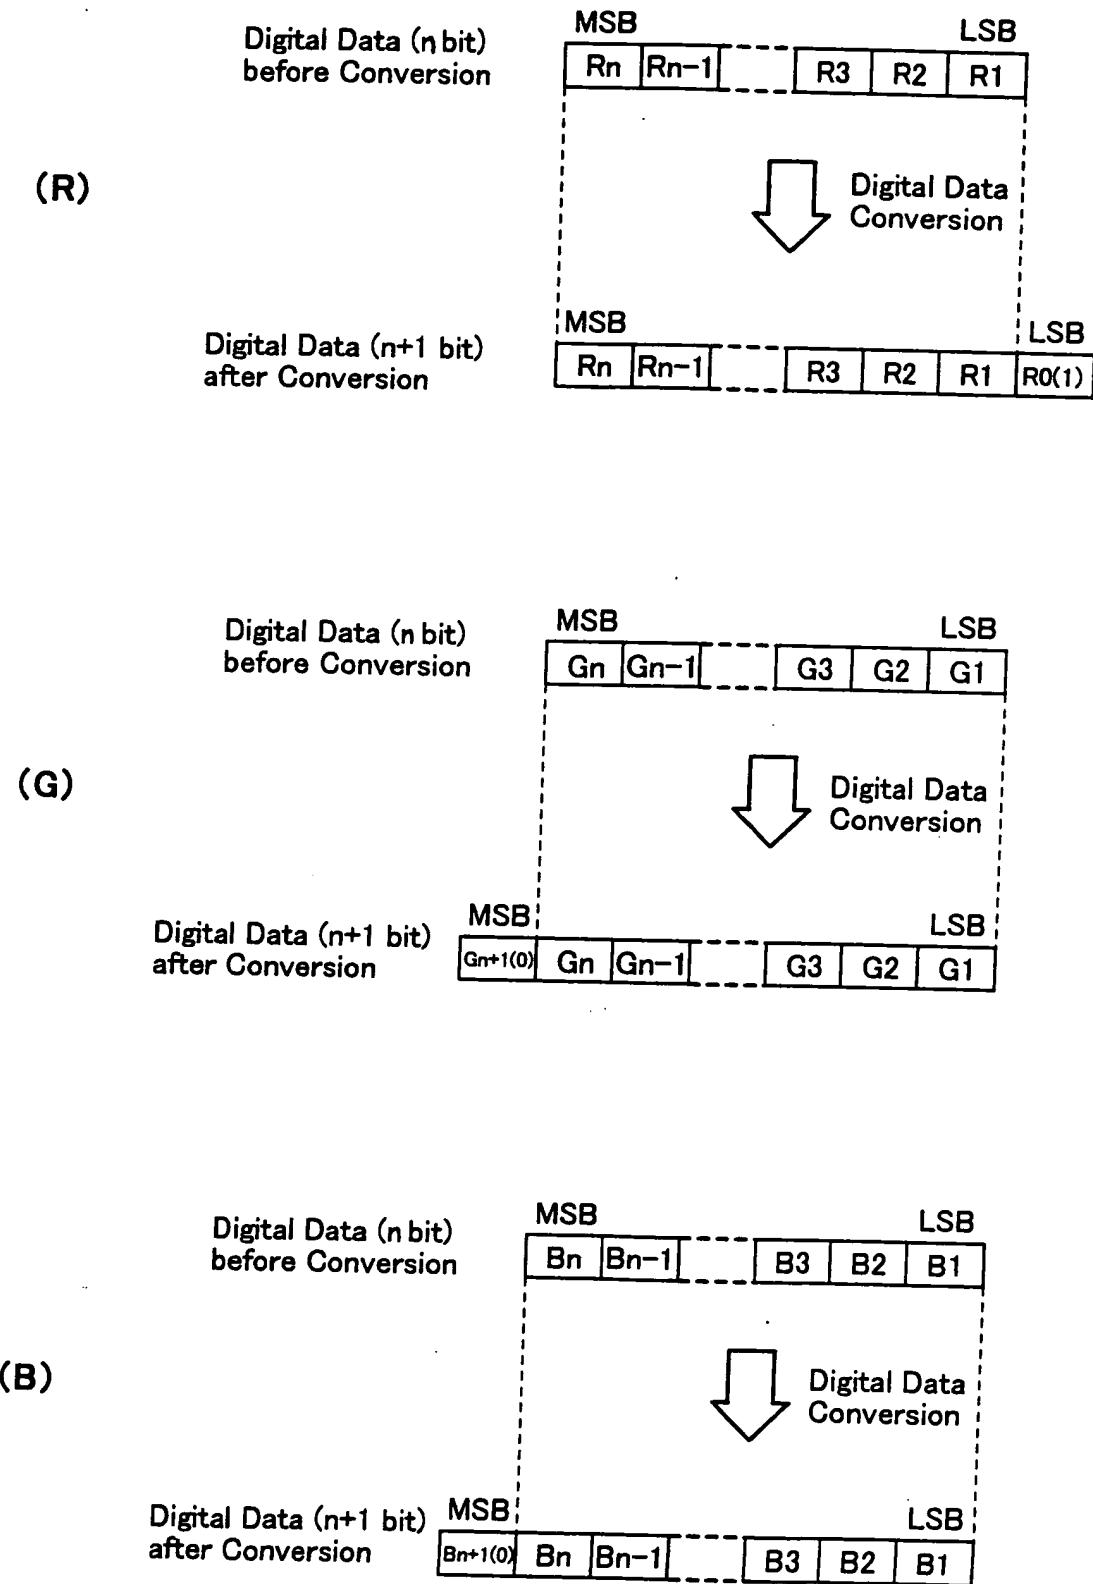


Fig. 7

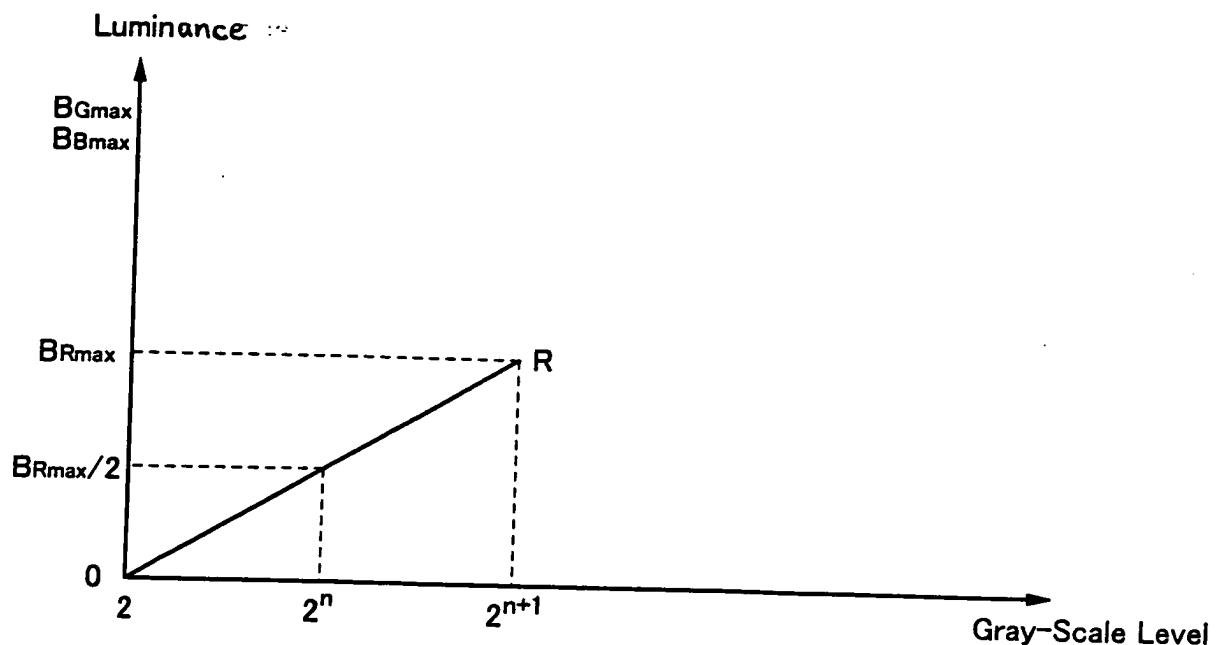


Fig. 8A

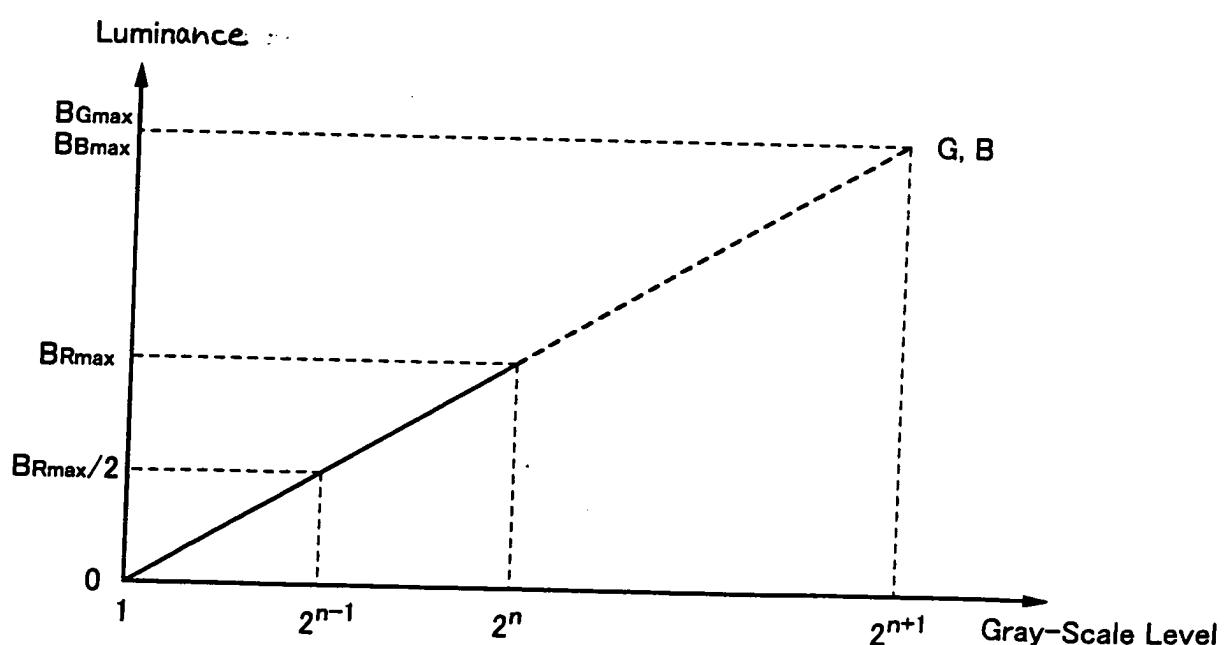


Fig. 8B

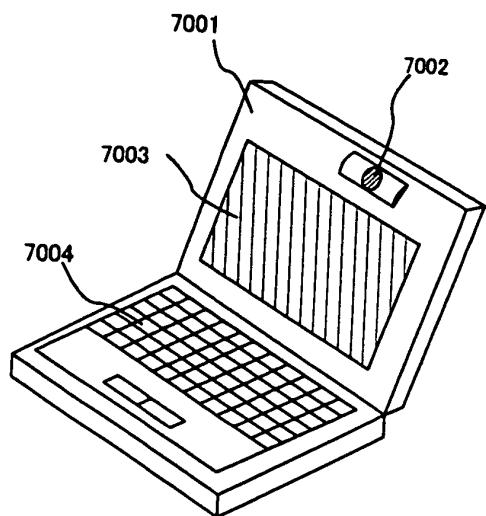


Fig. 9A

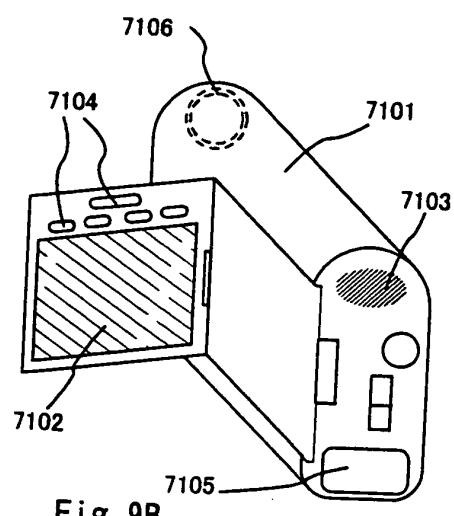


Fig. 9B

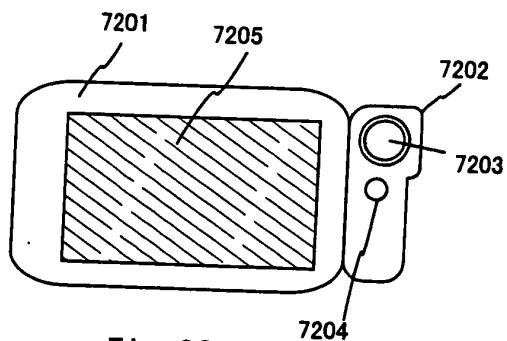


Fig. 9C

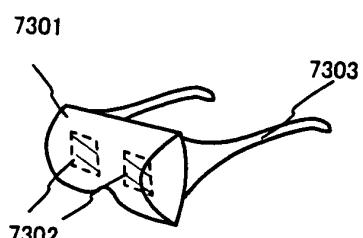


Fig. 9D

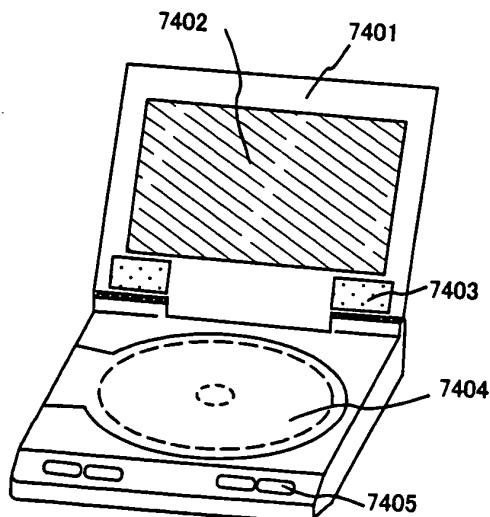


Fig. 9E

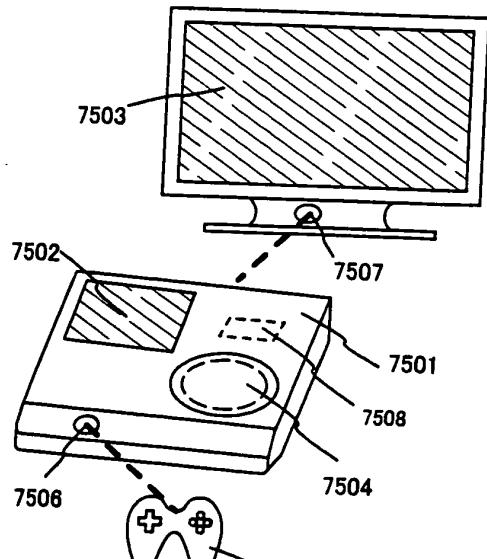


Fig. 9F

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 9833165 A [0010]

专利名称(译)	显示设备		
公开(公告)号	EP1638071B1	公开(公告)日	2017-03-08
申请号	EP2005025459	申请日	2000-09-22
[标]申请(专利权)人(译)	株式会社半导体能源研究所		
申请(专利权)人(译)	半导体能源研究所有限公司.		
当前申请(专利权)人(译)	半导体能源研究所有限公司.		
[标]发明人	JUN KOYAMA		
发明人	JUN, KOYAMA		
IPC分类号	G09G3/32 G09G5/02 G09G3/30 G09G3/20 G09G5/04		
CPC分类号	G09G5/02 G09G3/20 G09G3/2018 G09G3/2022 G09G3/2037 G09G3/32 G09G3/3258 G09G3/3275 G09G5/04 G09G2300/0809 G09G2300/0842 G09G2320/0242 G09G2320/0666 G09G2320/0673		
优先权	1999271366 1999-09-24 JP		
其他公开文献	EP1638071A3 EP1638071A2		
外部链接	Espacenet		

摘要(译)

一种EL显示装置，包括用于转换具有红色图像信息的n位数字数据的电路，具有绿色图像信息的n位数字数据，以及具有从外部输入的蓝色图像信息(n是自然数)的n位数字数据(n+1)具有红色图像信息的位数字数据，具有绿色图像信息的(n+1)位数字数据和具有蓝色图像信息的(n+1)位数字数据。时分电路从具有红，绿和蓝信息的(n+1)位数字数据产生数字数据信号，并将所述数据信号提供给连接到时分电路的数据信号侧驱动电路，以产生相应的数字信号。连接到数据信号侧驱动电路的有源矩阵电路的像素的电流信号。

