



(11) **EP 2 719 742 A2**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
16.04.2014 Bulletin 2014/16

(51) Int Cl.:
C09K 11/06 (2006.01) H01L 51/50 (2006.01)

(21) Application number: **12800151.8**

(86) International application number:
PCT/KR2012/004627

(22) Date of filing: **12.06.2012**

(87) International publication number:
WO 2012/173369 (20.12.2012 Gazette 2012/51)

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **13.06.2011 KR 20110056777**

(71) Applicant: **LG Chem, Ltd.**
Seoul 150-721 (KR)

(72) Inventors:
• **SHIN, Changhwan**
Daejeon 302-210 (KR)
• **KIM, Kongkyeom**
Daejeon 305-500 (KR)
• **KWON, Hyok Joon**
Daejeon 305-340 (KR)

- **LEE, Dong Hoon**
Daejeon 301-793 (KR)
- **LEE, Jinyoung**
Daejeon 305-390 (KR)
- **JANG, Boonjae**
Daejeon 306-062 (KR)
- **JANG, Jungi**
Daejeon 305-340 (KR)
- **LEE, Hyungjin**
Daejeon 305-509 (KR)


(74) Representative: **HOFFMANN EITLE**
Patent- und Rechtsanwälte
Arabellastrasse 4
81925 München (DE)

(54) **NOVEL COMPOUNDS AND ORGANIC ELECTRONIC DEVICE USING SAME**

(57) The present invention provides a new compound and an organic electronic diode using the same. The compound according to the present invention may be used as hole injection, hole transport, electron injection and transport, and light emitting materials in an or-

ganic light emitting diode and an organic electronic diode, and the organic electronic diode according to the present invention exhibits excellent efficiency, driving voltage, and life-span properties.

[Figure 1]

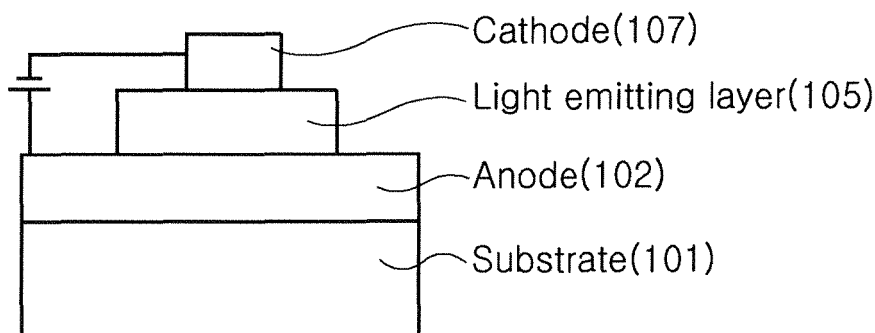

EP 2 719 742 A2

Description

[Technical Field]

[0001] This application claims priority from Korean Patent Application No. 10-2011-0056777 filed on June 13, 2011, in the KIPO, the disclosure of which is incorporated herein by reference in its entirety.

[0002] The present invention relates to a new compound and an organic electronic diode using the same.

[Background Art]

[0003] In the present specification, an organic electronic diode is an electronic diode using an organic semiconductor material, and requires exchange of holes and/or electrons between an electrode and the organic semiconductor material. The organic electronic diode may be largely divided into the following two categories according to an operation principle. First, there is an electronic diode in which an exciton is formed in an organic layer by a photon that flows from an external light source to the diode, the exciton is separated into electrons and holes, and the electrons and the holes are transferred to the different electrodes and used as a current source (voltage source). Second, there is an electronic diode in which holes and/or electrons are injected into an organic semiconductor material layer forming an interface to the electrode by applying a voltage or a current to two or more electrodes to operate the diode by the injected electrons and holes.

[0004] Examples of the organic electronic diode comprise an organic light emitting diode, an organic solar cell, an organic photoconductor (OPC) drum, an organic transistor and the like, and all of the organic electronic diodes require electron/hole injection materials, electron/hole extraction materials, electron/hole transport materials or a light emitting material in order to drive the diode. Hereinafter, an organic light emitting diode will be mainly described in detail, but in the organic electronic diodes, all of the electron/hole injection materials, the electron/hole extraction materials, the electron/hole transport materials or the light emitting material are operated on the basis of the similar principle.

[0005] In general, an organic light emitting phenomenon means a phenomenon that converts electric energy into light energy by using an organic material. The organic light emitting diode using the organic light emitting phenomenon has a structure generally comprising an anode, a cathode, and an organic layer between the anode and the cathode. Herein, most organic layers have a multilayered structure constituted by different materials in order to increase efficiency and stability of the organic light emitting diode, and for example, may comprise a hole injection layer, a hole transport layer, a light emitting layer, an electron transport layer, an electron injection layer and the like. In the structure of the organic light emitting diode, if a voltage is applied between two electrodes, holes are injected from an anode and electrons are injected from a cathode to the organic layer, and when the injected holes and the electrons meet each other, an exciton is formed, and light is emitted when the exciton falls to a bottom state. It is known that this organic light emitting diode has properties such as magnetic light emission, high brightness, high efficiency, low driving voltage, a wide viewing angle, high contrast and high response speed.

[0006] In the organic light emitting diode, the material used in the organic layer may be classified into a light emitting material and a charge transport material, for example, a hole injection material, a hole transport material, an electron transport material, an electron injection material and the like according to a function thereof. The light emitting material is classified into blue, green, and red light emitting materials and yellow and orange light emitting materials required to realize better natural colors according to the light emitting color. Further, a host/dopant system may be used as the light emitting material in order to increase color purity and increase light emitting efficiency through transferring of energy. The principle is that if a small amount of dopant that has a smaller energy band gap than a host mainly forming the light emitting layer and excellent light emitting efficiency is mixed with the light emitting layer, the exciton generated in the host is transported to the dopant to emit light at high efficiency. In this case, since the wavelength of the host moves to the wavelength bandwidth of the dopant, a desired wavelength of light may be obtained according to the kind of used dopant.

[0007] In order to sufficiently show excellent properties of the aforementioned organic light emitting diode, a material constituting the organic layer in the diode, for example, the hole injection material, the hole transport material, the light emitting material, the electron transport material, the electron injection material and the like should be supported by stable and efficient materials in advance, but development of a stable and efficient organic layer material for organic light emitting diodes has not yet been sufficiently made, such that there is a demand for developing a new material.

[Disclosure]

[Technical Problem]

[0008] The present inventors found out a compound having a new structure. Further, the present inventors found out the fact that in the case where an organic layer of an organic electronic diode is formed by using the new compound,


effects of an increase in efficiency of the diode, a reduction in driving voltage, and an increase in stability can be exhibited.

[0009] Accordingly, the present invention has been made in an effort to provide a new compound and an organic electronic diode using the same.

[Technical Solution]

[0010] An exemplary embodiment of the present invention provides a compound represented by the following Formula 1:


[Formula 1]

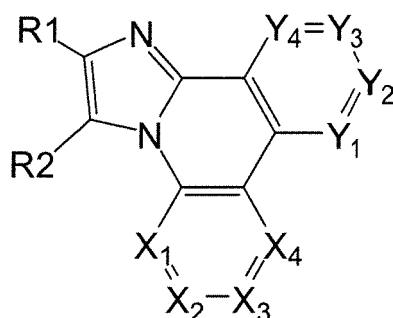

In Formula 1,

X₁ is N or CR₃, X₂ is N or CR₄, X₃ is N or CR₅, X₄ is N or CR₆, Y₁ is N or CR₇, Y₂ is N or CR₈, Y₃ is N or CR₉, Y₄ is N or CR₁₀, X₁ to X₄ and Y₁ to Y₄ are not all N, R₃ to R₁₀ are each independently -(L)p-(Y)q or a group represented by Formula 1A, at least one of R₃ to R₁₀ is the group represented by Formula 1A, p is an integer of 0 to 10, q is an integer of 1 to 10, and two or more adjacent groups of R₃ to R₁₀ may form a monocycle or polycycle,

[Formula 1A]



L is oxygen; sulfur; substituted or unsubstituted nitrogen; substituted or unsubstituted phosphorus; a substituted or unsubstituted arylene group; a substituted or unsubstituted alkenylene group; a substituted or unsubstituted fluorenylene group; a substituted or unsubstituted carbazolyene group; or a substituted or unsubstituted heteroarylene group comprising one or more of N, O and S atoms,

Y is hydrogen; heavy hydrogen; a halogen group; a nitrile group; a nitro group; a hydroxy group; a substituted or unsubstituted cycloalkyl group; a substituted or unsubstituted alkoxy group; a substituted or unsubstituted aryloxy group; a substituted or unsubstituted alkylthioxy group; a substituted or unsubstituted arylthioxy group; a substituted or unsubstituted alkylsulfoxy group; a substituted or unsubstituted arylsulfoxy group; a substituted or unsubstituted alkenyl group; a substituted or unsubstituted silyl group; a substituted or unsubstituted boron group; a substituted or unsubstituted alkylamine group; a substituted or unsubstituted aralkylamine group; a substituted or unsubstituted arylamine group; a substituted or unsubstituted heteroarylamine group; a substituted or unsubstituted aryl group; a substituted or unsubstituted fluorenyl group; a substituted or unsubstituted carbazole group; or a substituted or unsubstituted heterocyclic group comprising one or more of N, O and S atoms,

R₁ and R₂ may be connected to each other to form or not to form a substituted or unsubstituted aliphatic, aromatic or heteroaromatic monocycle or polycycle, and in the case where R₁ and R₂ does not form the cycle, R₁ and R₂ are the same as or different from each other and each independently hydrogen, a substituted or unsubstituted C₃-C₄₀ cycloalkyl group; a substituted or unsubstituted C₆-C₆₀ aryl group; a substituted or unsubstituted C₂-C₄₀ alkenyl group; or a substituted or unsubstituted C₂-C₆₀ heterocyclic group,

the aromatic or heteroaromatic monocycle and polycycle formed by connecting R1, R2, and R1 and R2 to each other may be each independently substituted by -(L)p-(Y)q, in the case where two or more L and two or more Y are present, L and Y are each independently the same as or different from each other,

A are each independently O, S or Se,

Ar₁ and Ar₂ are each independently a substituted or unsubstituted aryl group; or a substituted or unsubstituted heterocyclic group comprising one or more of N, O and S atoms,

Ar₃ are each independently a substituted or unsubstituted arylene group; or a substituted or unsubstituted heteroarylene group comprising one or more of N, O and S atoms.

[0011] Another exemplary embodiment of the present invention provides an organic electronic diode which comprises a first electrode, a second electrode, and one or more organic layers interposed between the first electrode and the second electrode, wherein one or more layers of the organic layers comprise a compound represented by Formula 1.

[Advantageous Effects]

[0012] The new compound according to the present invention may be used as a material of an organic layer of an organic light emitting diode and an organic electronic diode by introducing various aryl groups, heteroaryl groups, arylamine groups and the like. The organic light emitting diode and the organic electronic diode using a compound represented by Formula 1 according to the present invention as the material of the organic layer exhibit excellent efficiency, driving voltage, and life-span properties.

[Brief Description of the Drawings]

[0013]

FIG. 1 illustrates an example of an organic light emitting diode having a structure where an anode 102, a light emitting layer 105 and a cathode 107 are sequentially laminated on a substrate 101.

FIG. 2 illustrates an example of an organic light emitting diode having a structure where an anode 102, hole injection/hole transport and light emitting layers 105, an electron transport layer 106 and a cathode 107 are sequentially laminated on a substrate 101.

FIG. 3 illustrates an example of an organic light emitting diode having a structure where a substrate 101, an anode 102, a hole injection layer 103, hole transport and light emitting layers 105, an electron transport layer 106 and a cathode 107 are sequentially laminated.

FIG. 4 illustrates an example of an organic light emitting diode having a structure where a substrate 101, an anode 102, a hole injection layer 103, a hole transport layer 104, electron transport and light emitting layers 105, and a cathode 107 are sequentially laminated.


[Best Mode]

[0014] Hereinafter, the present invention will be described in more detail.

[0015] A new compound according to the present invention is represented by Formula 1.

[0016] In Formula 1, in the case where R1 and R2 are connected to each other to form one cycle, the compound may be represented by the following Formula 2.

[Formula 2]

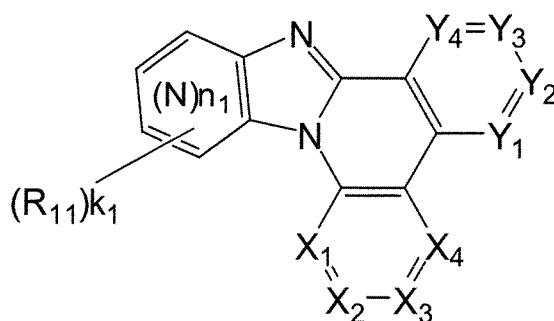

[0017] In Formula 2,

X_1 to X_4 , and Y_1 to Y_4 are as defined in Formula 1,

N of $(N)n_1$ means a nitrogen atom and also that the nitrogen atom may replace a carbon atom in a benzene cycle,


n_1 of $(N)n_1$ is an integer of 0 to 6,

R_{11} is the same as definition of R_3 to R_{10} of Formula 1, and


k_1 is an integer of 0 to 4.

[0018] In Formula 1, in the case where R_1 and R_2 are connected to each other to form a polycycle of two or more cycles, the compound may be represented by the following Formula 3 or 4.

[Formula 3]

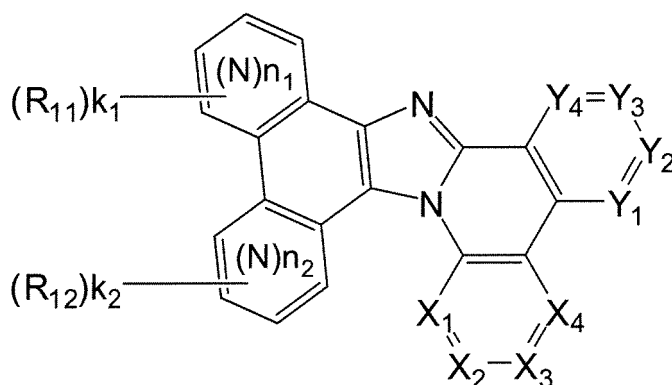

[Formula 4]

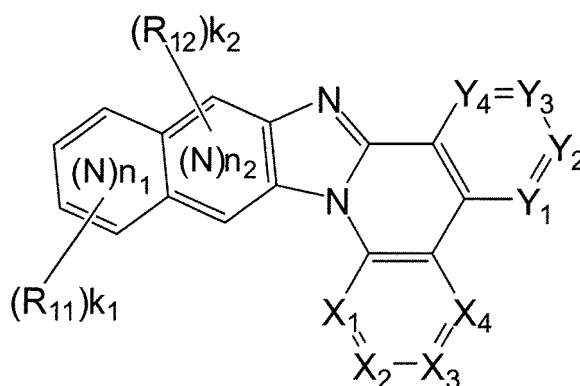

[0019] In Formula 3 and 4,

X_1 to X_4 , and Y_1 to Y_4 are as defined in Formula 1,

N of $(N)n_1$ and $(N)n_2$ means a nitrogen atom and also that the nitrogen atom may replace a carbon atom in a benzene cycle,

n_1 of $(N)n_1$ is an integer of 0 to 2,


n_2 of $(N)n_2$ is an integer of 0 to 2,

R_{11} and R_{12} are each independently the same as definition of R_3 to R_{10} of Formula 1, and

k_1 is an integer of 0 to 4, and k_2 is an integer of 0 to 4.

[0020] In Formula 1, in the case where R_1 and R_2 do not form a cycle, R_1 and R_2 may be a phenyl group substituted or unsubstituted by R_{11} and R_{12} or a hexagonal heteroaromatic cycle group that is substituted or unsubstituted by R_{11} and R_{12} and comprises a nitrogen (N) atom. For example, Formula 1 may be represented by the following Formula 5.

[Formula 5]

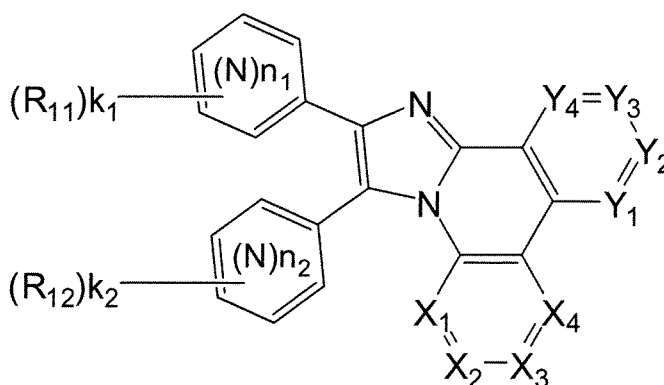

[0021] In Formula 5,

X_1 to X_4 , and Y_1 to Y_4 are as defined in Formula 1,

N of $(N)n_1$ and $(N)n_2$ means a nitrogen atom and also that the nitrogen atom may replace a carbon atom in a benzene cycle,

n_1 of $(N)n_1$ is an integer of 0 to 2,

n_2 of $(N)n_2$ is an integer of 0 to 2,

R_{11} and R_{12} are each independently the same as definition of R_3 to R_{10} of Formula 1, and

k_1 is an integer of 0 to 4, and k_2 is an integer of 0 to 4.

[0022] In the compound according to the present invention, substituent groups of Formula 1 will be described in more detail below.

[0023] The alkyl group may be a straight or branched chain, and the number of carbon atoms is not particularly limited but is preferably 1 to 12. Specific examples thereof comprise a methyl group, an ethyl group, a propyl group, an isopropyl group, a butyl group, a t-butyl group, a pentyl group, a hexyl group, a heptyl group and the like, but are not limited thereto.

[0024] The alkenyl group may be a straight or branched chain, and the number of carbon atoms is not particularly limited but is preferably 2 to 12. Specific examples thereof comprise an alkenyl group connected to an aryl group such as a stylybenyl group and a styrenyl group, but are not limited thereto.

[0025] The alkynyl group may be a straight or branched chain, and the number of carbon atoms is not particularly limited but is preferably 2 to 12. Specific examples thereof comprise an ethynyl group, a propynyl group and the like, but are not limited thereto.

[0026] It is preferable that the cycloalkyl group has the 3 to 12 carbon atoms and do not provide steric hindrance. Specific examples thereof comprise a cyclopentyl group, a cyclohexyl group and the like, but are not limited thereto.

[0027] It is preferable that the cycloalkenyl group has 3 to 12 carbon atoms, and more specific examples thereof may comprise a cycle compound having ethenylene in a pentagonal or hexagonal cycle thereof, but are not limited thereto.

[0028] It is preferable that the alkoxy group has 1 to 12 carbon atoms, and more specific examples thereof may comprise methoxy, ethoxy, isopropoxy and the like, but are not limited thereto.


[0029] It is preferable that the aryloxy group have 6 to 20 carbon atoms, and more specific examples thereof may comprise phenoxy, cyclohexyloxy, naphthyloxy, diphenyloxy and the like, but are not limited thereto.

[0030] It is preferable that the alkylamine group have 1 to 30 carbon atoms, and more specific examples thereof may comprise a methylamine group, a dimethylamine group, an ethylamine group, a diethylamine group and the like, but are not limited thereto.

[0031] It is preferable that the arylamine group have 5 to 30 carbon atoms, and more specific examples thereof comprise a phenylamine group, a naphthylamine group, a biphenylamine group, an anthracenylamine group, a 3-methyl-phenylamine group, a 4-methyl-naphthylamine group, a 2-methyl-biphenylamine group, a 9-methyl-anthracenylamine group, a diphenylamine group, a phenylnaphthyl amine group, a ditolylamine group, a phenyltolylamine group, a triphenylamine group and the like, but are not limited thereto.

[0032] The aryl group may be a monocycle or polycycle, and the number of carbon atoms is not particularly limited but is preferably 6 to 40. Examples of the monocyclic aryl group may comprise a phenyl group, a biphenyl group, a terphenyl group, stilben and the like, and examples of the polycyclic aryl group may comprise a naphthyl group, an anthracenyl group, a phenanthrene group, a pyrenyl group, a perylenyl group, a cryxenyl group and the like, but are not limited thereto.

[0033] The heteroaryl group is a heteroatom, a cyclic group comprising O, N, S or P, and the number of carbon atoms is not particularly limited, but is preferably 3 to 30. Examples of the heterocyclic group comprise a carbazole group, a thiophene group, a furan group, a pyrrole group, an imidazole group, a thiazole group, an oxazole group, an oxadiazole group, a triazole group, a pyridyl group, a pyridazine group, a quinolynyl group, an isoquinolynyl group, an acrydyl group and the like, and the compounds of the following Structural Formulas are preferable but are not limited thereto.

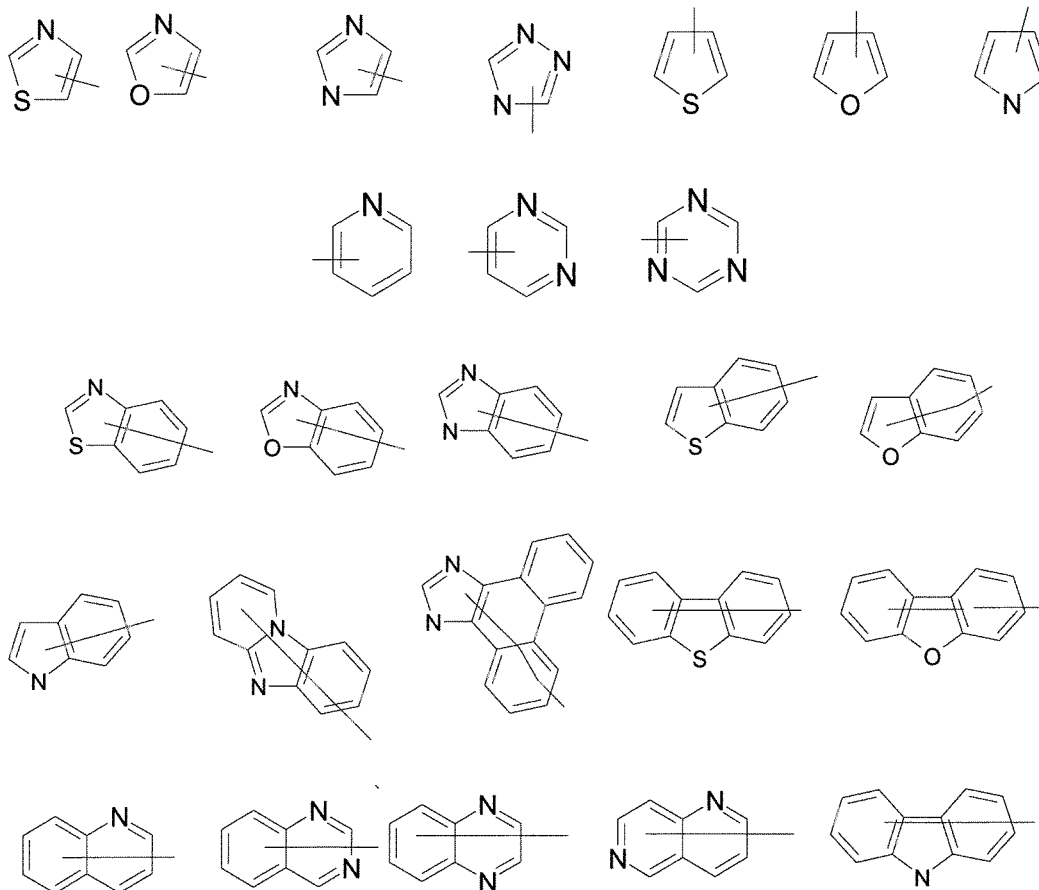

[0034] Examples of the halogen group may comprise fluorine, chlorine, bromine, iodine and the like, but are not limited thereto.

[0035] Specific examples of the arylene group may comprise a phenylene group, a biphenylene group, a naphthalenyl group, a binaphthalene group, an anthracenylene group, a fluorenylene group, a crycenylene group, a phenanthrenylene group and the like, but are not limited thereto.


[0036] Examples of the heterocycloalkyl group may comprise a cyclic group comprising a heteroatom such as N, S or O.

[0037] Further, in the present specification, the term "substituted or unsubstituted" means that substitution is performed by one or more substituent groups selected from the group consisting of heavy hydrogen, a halogen group, an alkyl group, an alkenyl group, an alkoxy group, a silyl group, an arylalkenyl group, an aryl group, a heteroaryl group, a carbazole group, an arylamine group, and a fluorenyl group substituted or unsubstituted by an aryl group, and a nitrile group, or there is no substituent group.

[0038] R₁, R₂, X₁ to X₄, Y₁ to Y₄, Ar₁ to Ar₃, and A of Formula 1 may be further substituted by an additional substituent group, and examples thereof may comprise a halogen group, an alkyl group, an alkenyl group, an alkoxy group, a silyl group, an arylalkenyl group, an aryl group, a heteroaryl group, a carbazole group, an arylamine group, a fluorenyl group substituted or unsubstituted by an aryl group, a nitrile group and the like, but are not limited thereto.

[0039] In the present invention, Formula 1 may be represented by the following Formula 6, but is not limited thereto.

[Formula 6]

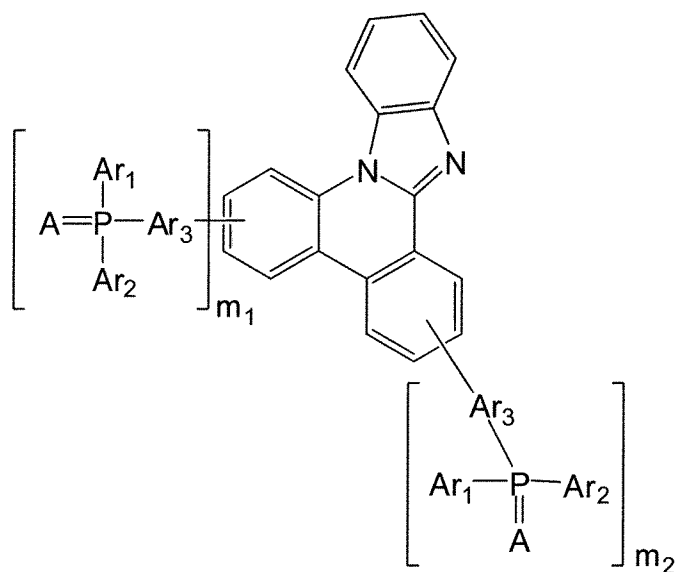


[0040] In Formula 6,


Ar₁ to Ar₃, and A are as defined in Formula 1, and

m₁ is an interger of 0 to 4, m₂ is an interger of 0 to 4, and m₁ and m₂ are not simultaneously 0.

[0041] Ar₃ of Formula 1 may be a substituted or unsubstituted arylene group selected from the group consisting of a phenylene group, a biphenylene group, a naphthalenyl group, a binaphthalene group, an anthracenylene group, a fluorenylene group, a crycenylene group, and a phenanthrenylene group.


[0042] Furthermore, Ar₃ of Formula 1 may be an arylene group selected from the group consisting of following formulae:

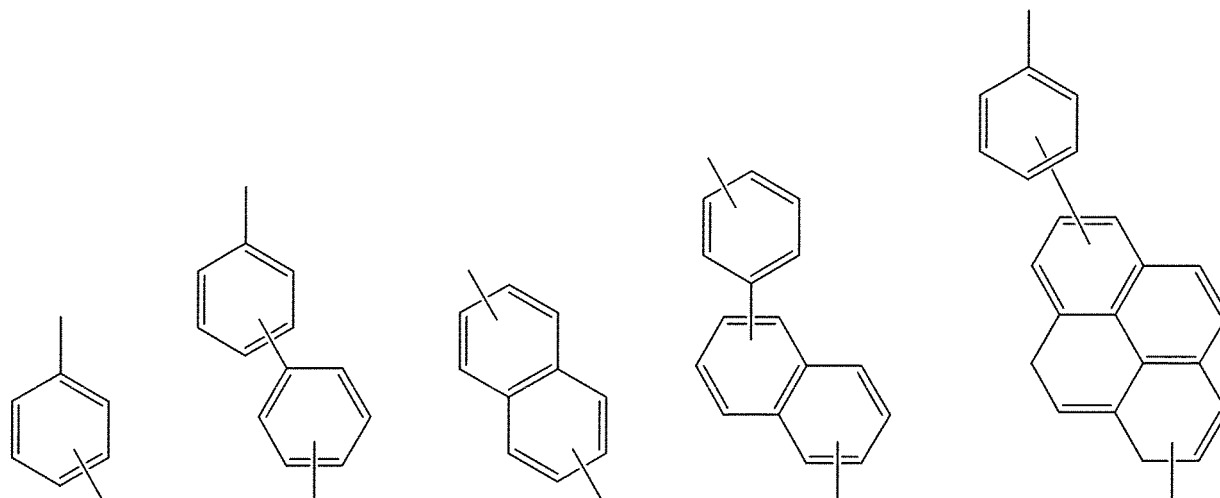

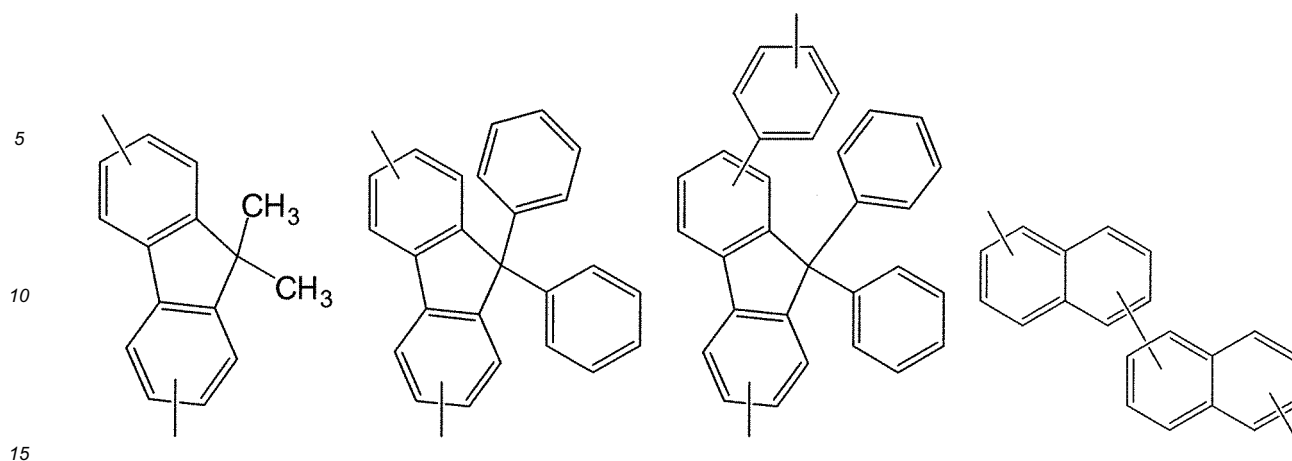


[0043] Preferable specific examples of the compound represented by Formula 1 comprise the following compounds, but are not limited thereto.


20 [Formula 1-1] [Formula 1-2] [Formula 1-3] [Formula 1-4]

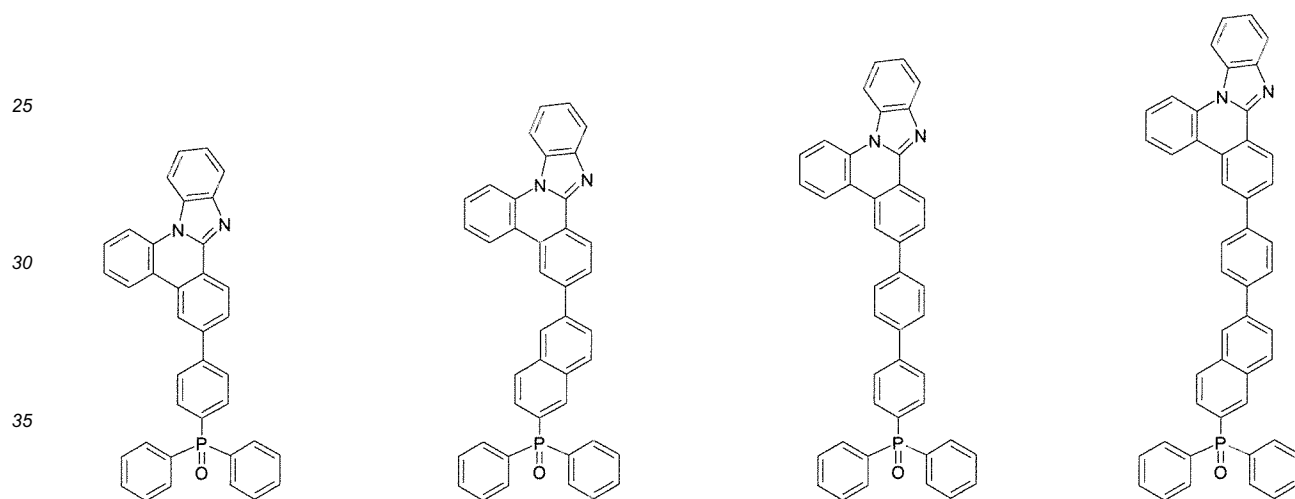


40 [Formula 1-5] [Formula 1-6] [Formula 1-7]

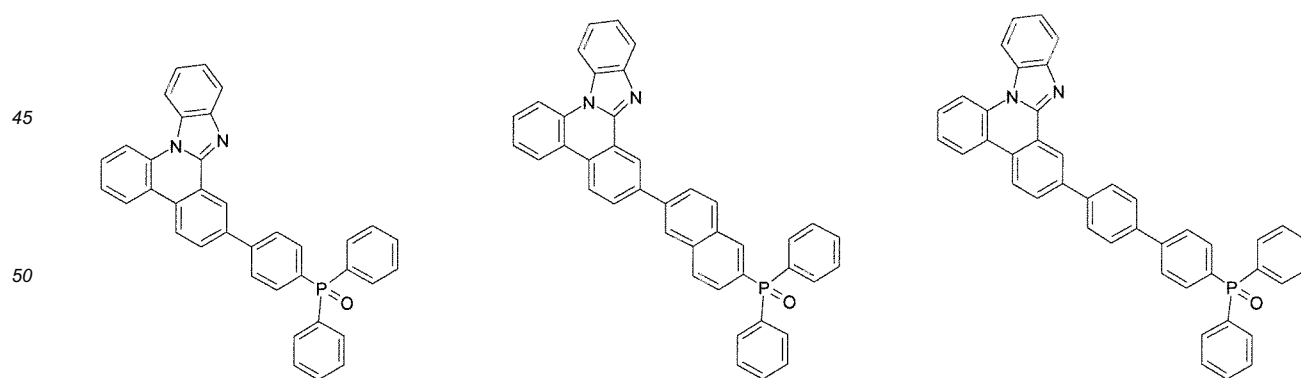


[Formula 1-8]

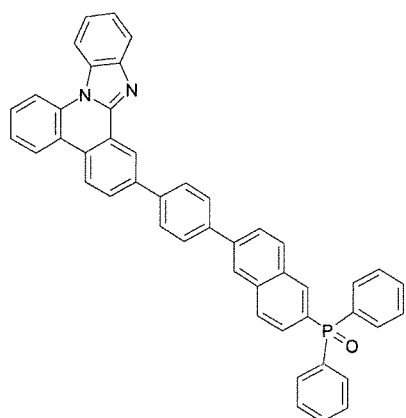

[Formula 1-9]




[Formula 1-10]




[Formula 1-11]

[Formula 1-12]


[Formula 1-13]

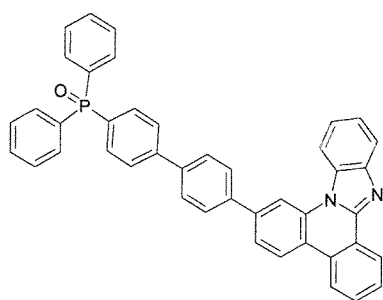


[Formula 1-14]

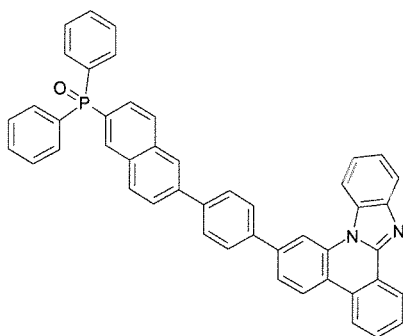


[Formula 1-15]




[Formula 1-16]

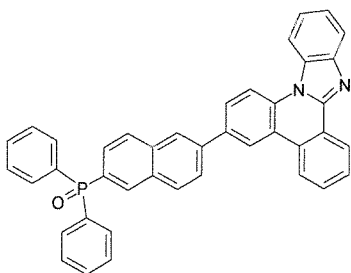


[Formula 1-17]

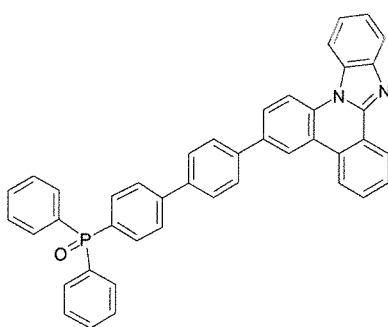


[Formula 1-18]

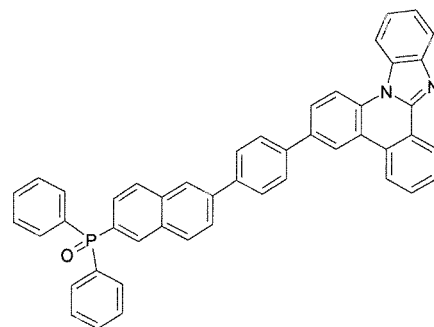


[Formula 1-19]




[Formula 1-20]

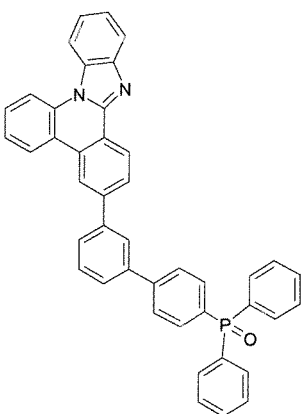


[Formula 1-21]

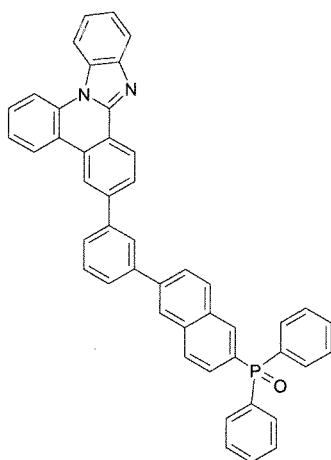


[Formula 1-22]

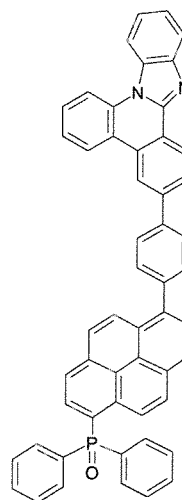


[Formula 1-23]

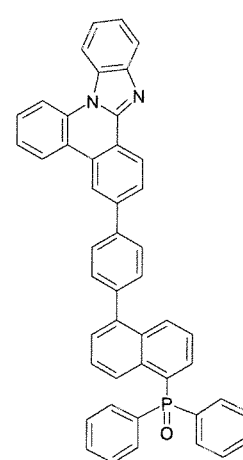


[Formula 1-24]

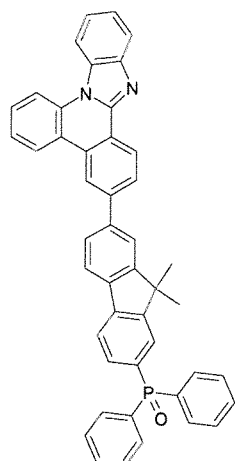


[Formula 1-25]

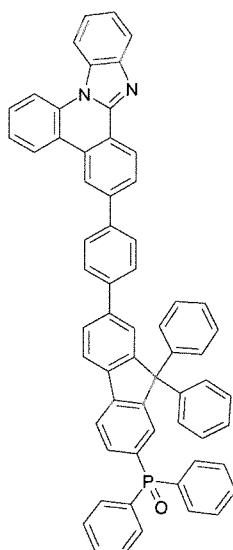


[Formula 1-26]

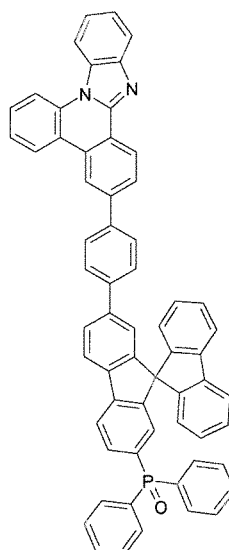


[Formula 1-27]

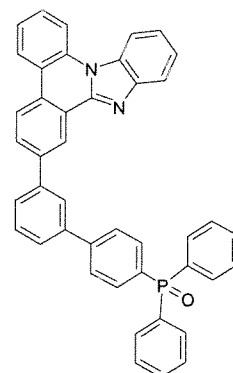


[Formula 1-28]

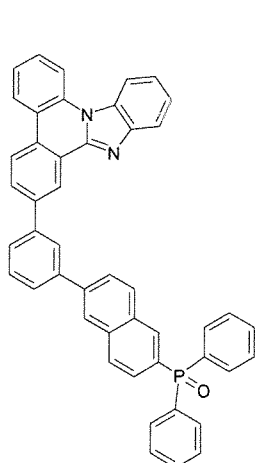


[Formula 1-29]

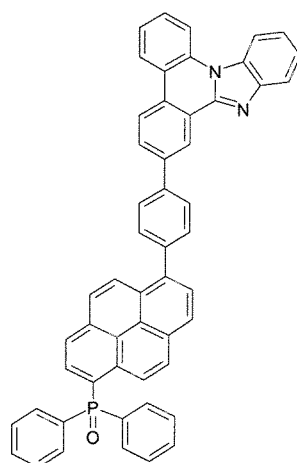





[Formula 1-30]

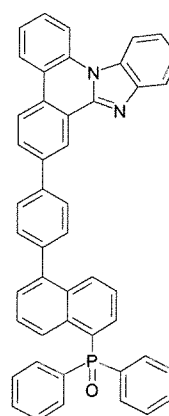


[Formula 1-31]

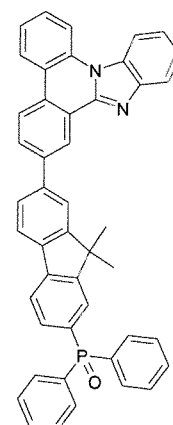


[Formula 1-32]

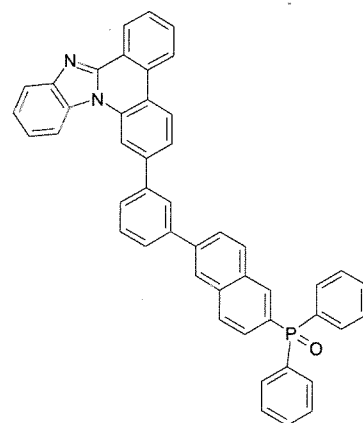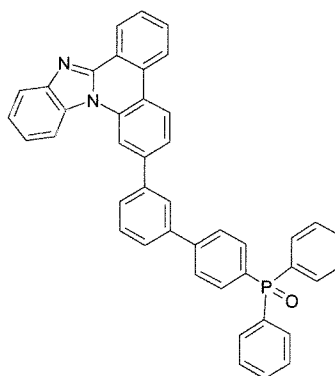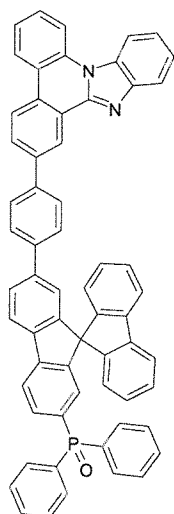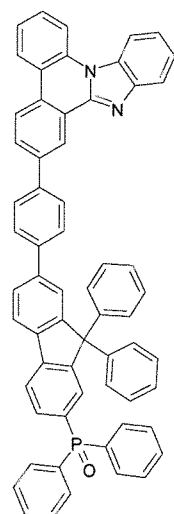


[Formula 1-33]

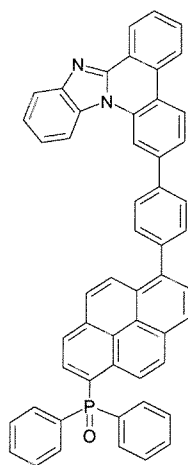


[Formula 1-34]

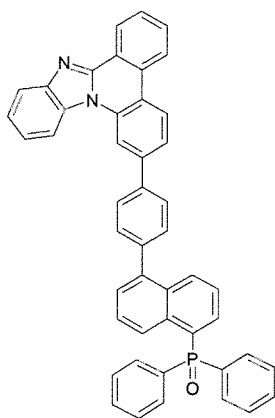


[Formula 1-35]

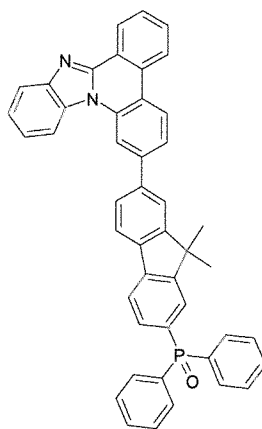


[Formula 1-36]

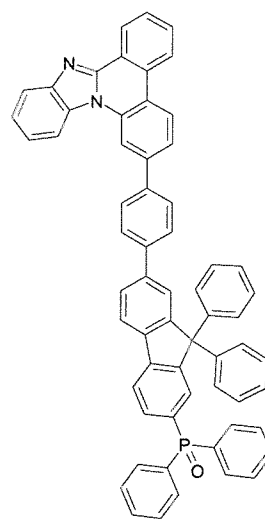


[Formula 1-37]

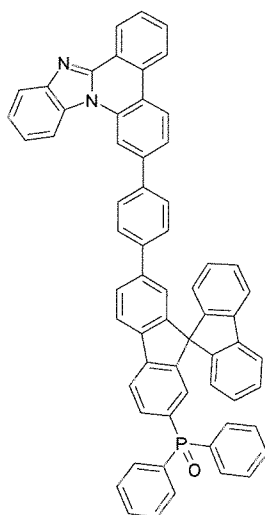


[Formula 1-38]

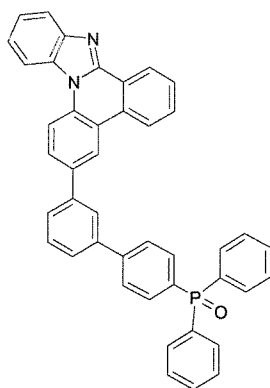

[Formula 1-39]

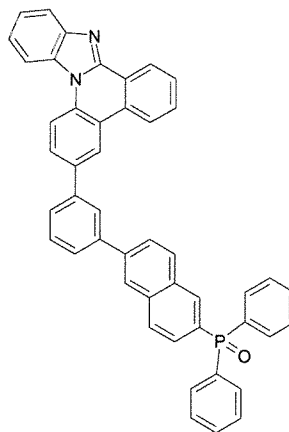

[Formula 1-40]

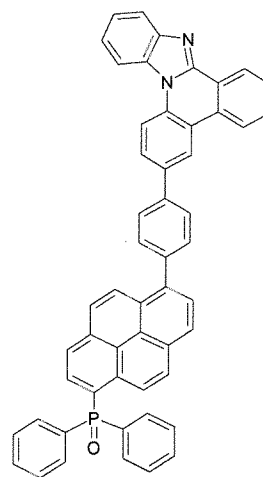

[Formula 1-41]



[Formula 1-42]




[Formula 1-43]




[Formula 1-44]




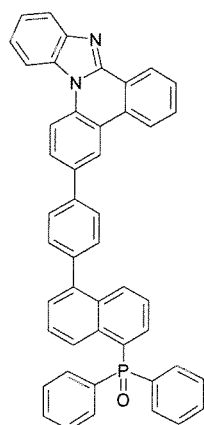


[Formula 1-41]

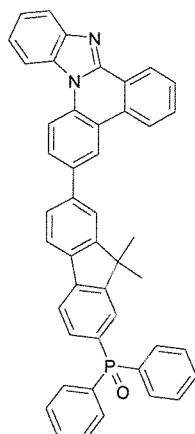


[Formula 1-42]

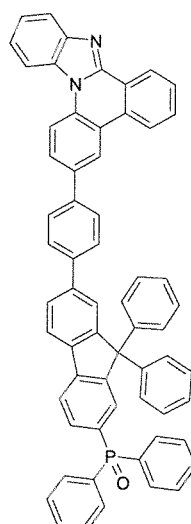


[Formula 1-43]

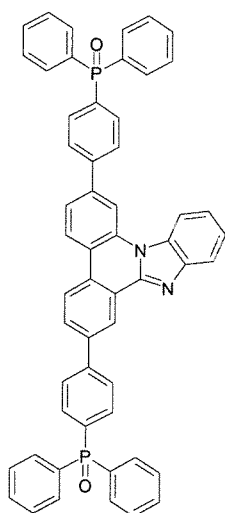


[Formula 1-44]

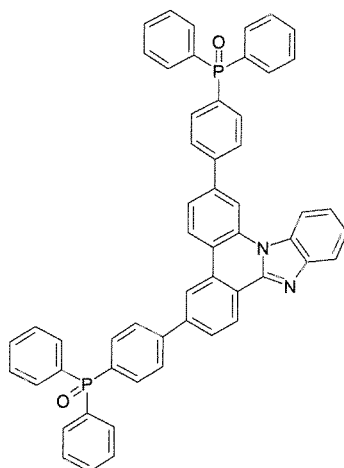

[Formula 1-45]

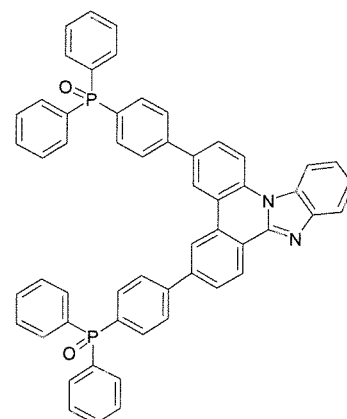

[Formula 1-46]

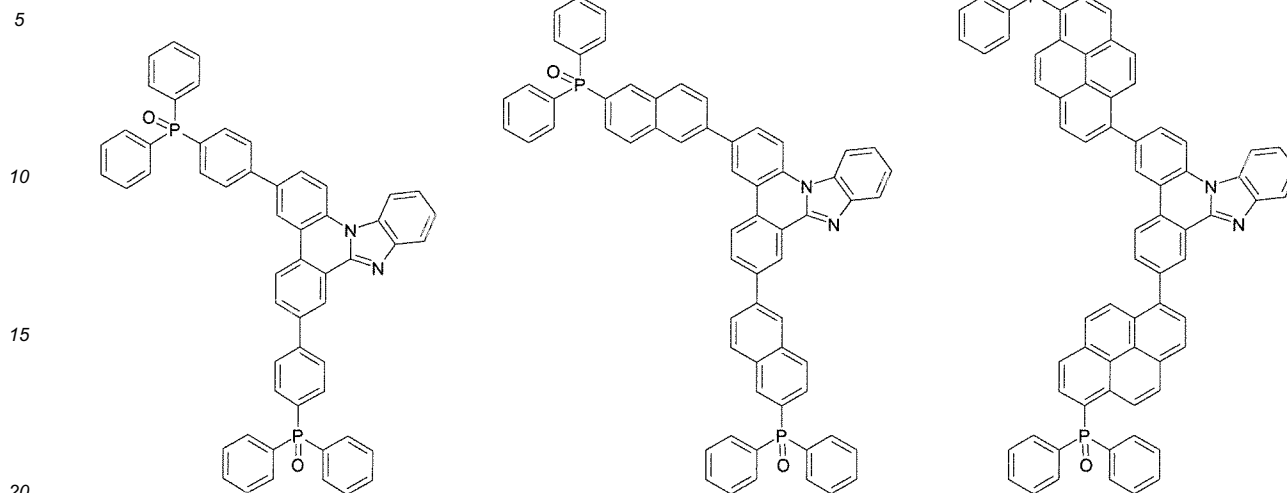

[0044] Hereinafter, a method of preparing the compound represented by Formula 1 will be described.

[0045] The compound represented by Formula 1 may be prepared by using a general method known in the art, such as a condensation reaction and a Suzuki coupling reaction.

[0046] The compounds represented by Formula 1 may have properties suitable to be used in the organic layer used in the organic light emitting diode by introducing various substituents into a core structure represented by the aforementioned Formulas. The compound represented by Formula 1 may exhibit properties even though the compound is used in any layer of the organic light emitting diode, but particularly may have the following properties.

[0047] The compounds into which the substituted or unsubstituted arylamine group is introduced are suitable for materials of a light emitting layer and a hole injection and hole transport layer, and the compounds into which the heterocyclic group comprising N is introduced are suitable for materials of an electron injection, an electron transport layer and a hole blocking layer.

[0048] The conjugation length of the compound has a close relationship with an energy band gap. Specifically, the energy band gap is reduced as the conjugation length of the compound increases. As described above, since the core of the compounds represented by Formula 1 comprises a limited conjugation, the core has properties from a small energy band gap to a large energy band gap.

[0049] In addition, compounds having intrinsic characteristics of the introduced substituent groups may be synthesized by introducing various substituent groups into the core structure as described above. For example, the material of the hole injection layer and the material of the hole transport layer used when the organic light emitting diode is manufactured may be a compound having the energy level that can transporting holes according to HOMO and can prevent electrons from moving from the light emitting layer according to LUMO. In particular, the core structure of the present compound may exhibit a stable property to the electrons, thus contributing to improving a life-span of the diode. The derivatives constituted by introducing substituents so as to be used in the materials of the light emitting layer and the electron transport layer may be prepared so that various arylamine-based dopants, aryl-based dopants, and dopants comprising metal have an appropriate energy band gap.

[0050] In addition, the energy band gap can be finely controlled, a property at an interface between organic materials can be improved, and the purpose of the material can become various by introducing various substituent groups into the core structure.

[0051] Meanwhile, since the compounds represented by Formula 1 have a high glass transition temperature (T_g), thermal stability is excellent. Such increase in thermal stability is an important factor providing driving stability to the diode.

[0052] In addition, an organic electronic diode according to the present invention is an organic electronic diode comprising a first electrode, a second electrode, and one or more organic layers interposed between the first electrode and the second electrode, and one or more layers of the organic layers comprise the compound represented by Formula 1.

[0053] The organic electronic diode according to the present invention may be manufactured by a preparation method and a material of a general organic electronic diode, except that one or more organic layers are formed by using the aforementioned compounds.

[0054] The compound of Formula 1 may be formed as the organic layer by a vacuum deposition method and a solution coating method when the organic electronic diode is manufactured. Herein, examples of the solution coating method

comprise spin coating, dip coating, inkjet printing, screen printing, a spray method, roll coating and the like, but are not limited thereto.

[0055] The organic layer of the organic electronic diode of the present invention may be constituted by a single layer structure, but by a multilayered structure in which two or more organic layers are laminated. For example, the organic electronic diode of the present invention may have a structure comprising a hole injection layer, a hole transport layer, a light emitting layer, an electron transport layer, an electron injection layer and the like as an organic layer. However, the structure of the organic electronic diode is not limited thereto, but may comprise a smaller number of organic layers.

[0056] Accordingly, in the organic electronic diode of the present invention, the organic layer may comprise one or more layers of the hole injection layer, the hole transport layer, and a layer performing simultaneously hole injection and hole transporting, and one or more layers of the aforementioned layers may comprise the compound represented by Formula 1.

[0057] In addition, the organic layer may comprise the light emitting layer, and the light emitting layer may comprise the compound represented by Formula 1.

[0058] Further, the organic layer may comprise one or more layers of an electron transport layer, an electron injection layer, and a layer performing simultaneously electron transporting and electron injection, and one or more layers of the layers may comprise the compound represented by Formula 1.

[0059] In the organic layer having the multilayered structure, the compound of Formula 1 may be comprised in a light emitting layer, a layer performing simultaneously hole injection/hole transport and light emitting, a layer performing simultaneously hole transport and light emitting, a layer performing simultaneously electron transport and light emitting or the like.

[0060] For example, the structure of the organic light emitting diode of the present invention may have a structure shown in FIGS. 1 to 4, but is not limited thereto.

[0061] FIG. 1 illustrates an example of an organic light emitting diode having a structure where an anode 102, a light emitting layer 105 and a cathode 107 are sequentially laminated on a substrate 101. In the aforementioned structure, the compound of Formula 1 may be comprised in the light emitting layer 105.

[0062] FIG. 2 illustrates an example of an organic light emitting diode having a structure where an anode 102, hole injection/hole transport and light emitting layers 105, an electron transport layer 106 and a cathode 107 are sequentially laminated on a substrate 101. In the aforementioned structure, the compound of Formula 1 may be comprised in the hole injection/hole transport and light emitting layers 105.

[0063] FIG. 3 illustrates an example of an organic light emitting diode having a structure where a substrate 101, an anode 102, a hole injection layer 103, hole transport and light emitting layers 105, an electron transport layer 106 and a cathode 107 are sequentially laminated. In the aforementioned structure, the compound of Formula 1 may be comprised in the hole injection/hole transport and light emitting layers 105.

[0064] FIG. 4 illustrates an example of an organic light emitting diode having a structure where a substrate 101, an anode 102, a hole injection layer 103, a hole transport layer 104, electron transport and light emitting layers 105, and a cathode 107 are sequentially laminated. In the aforementioned structure, the compound of Formula 1 may be comprised in the electron transport and light emitting layers 105.

[0065] In the organic electronic diode of the present invention, it is more preferable that the compound represented by Formula 1 be comprised in the electron transport layer, the layer performing simultaneously electron transporting and electron injection or the light emitting layer.

[0066] For example, the organic light emitting diode according to the present invention may be manufactured by forming an anode by depositing metal or metal oxides having conductivity or an alloy thereof on a substrate by using a PVD (physical vapor deposition) method such as sputtering or e-beam evaporation, forming the organic layer comprising the hole injection layer, the hole transport layer, the light emitting layer and the electron transport layer thereon, and depositing the material that is capable of being used as a cathode thereon. In addition to this method, the organic light emitting diode may be manufactured by sequentially depositing a cathode material, an organic layer, and an anode material on a substrate.

[0067] The organic layer may have a multilayered structure comprising a hole injection layer, a hole transport layer, a light emitting layer, an electron transport layer and the like, but is not limited thereto and may have a single layer structure. Further, the organic layer may be manufactured in the smaller number of layers by using various polymer materials and not by a deposition method but a solvent process, for example, a method such as spin coating, dip coating, doctor blading, screen printing, inkjet printing and a heat transferring method.

[0068] It is preferable that the anode material be, in general, the material having the large work function so as to smoothly perform hole injection into the organic layer. Specific examples of the anode material that is capable of being used in the present invention comprise metal such as vanadium, chrome, copper, zinc, and gold, or an alloy thereof; metal oxides such as zinc oxides, indium oxides, indium tin oxides (ITO) and indium zinc oxides (IZO); a combination of metal and oxides such as ZnO:Al or SnO₂:Sb; and conductive polymers such as poly(3-methyl compound), poly[3,4-(ethylene-1,2-dioxy) compound](PEDT), polypyrrole and polyaniline, but are not limited thereto.

[0069] It is preferable that the cathode material be, in general, the material having the small work function so as to easily perform electron injection into the organic layer. Specific examples of the cathode material comprise metal such as magnesium, calcium, sodium, potassium, titanium, indium, yttrium, lithium, gadolinium, aluminum, silver, tin, and lead or an alloy thereof; a multilayered structure material such as LiF/Al or LiO₂/Al and the like, but are not limited thereto.

[0070] The hole injection material is a material that is capable of receiving holes well from the anode at a low voltage, and it is preferable that the HOMO (highest occupied molecular orbital) of the hole injection material be between the work function of the anode material and the HOMO of the organic layer therearound. Specific examples of the hole injection material comprise metal porphyrine, oligo thiophene, arylamine-based organic material, hexanitrihexaazatriphenylene-based organic material, quinacridone-based organic material, perylene-based organic material, anthraquinone and polyaniline, polycompound-based conductive polymers and the like, but are not limited thereto.

[0071] The hole transport material is a material that is capable of receiving the holes from the anode or the hole injection layer and transferring the holes to the light emitting layer, and is preferably the material having the large mobility to the holes. Specific examples thereof comprise arylamine-based organic material, a conductive polymer, a block copolymer in which a conjugate portion and a non-conjugate portion are present together and the like, but are not limited thereto.

[0072] The light emitting material is a material that receives the holes and the electrons from the hole transport layer and the electron transport layer and combines the holes and the electrons to emit light in a visible ray region, and is preferably the material having excellent photon efficiency to fluorescence or phosphorescence. Specific examples thereof comprise a 8-hydroxy-quinoline aluminum complex (Alq₃); a carbazole-based compound; a dimerized styryl compound; BAlq; 10-hydroxybenzoquinoline-metal compound; a benzoxazole, benzthiazole and benzimidazole-based compound; a poly(p-phenylenevinylene) (PPV)-based polymer; a spiro compound; polyfluorene, lubrene and the like, but are not limited thereto.

[0073] The electron transport material is a material that is capable of receiving the electrons well from the cathode and transferring the electrons to the light emitting layer, and is preferably the material having the large mobility to the electrons. Specific examples thereof comprise a 8-hydroxyquinoline Al complex; a complex comprising Alq₃; an organic radical compound; a hydroxyflavone metal complex and the like, but are not limited thereto.

[0074] The organic light emitting diode according to the present invention may be a top emission type, a bottom emission type, or a both-sided emission type according to the used material.

[0075] The compound according to the present invention may be applied to an organic electronic diode such as an organic solar cell, an organic photoconductor and an organic transistor by the principle that is similar to the principle applied to the organic light emitting diode.

[0076] Accordingly, the organic electronic diode may be selected from the group consisting of an organic light emitting diode, an organic phosphorescent diode, an organic solar cell, an organic photoconductor (OPC) and an organic transistor.


[Mode for Invention]

[0077] A better understanding of the present invention may be obtained in light of the following Examples which are set forth to illustrate, but are not to be construed to limit the present invention.


<Example>

<Preparation Example 1> Synthesis of the compound of the following Formula 1-1

[0078]

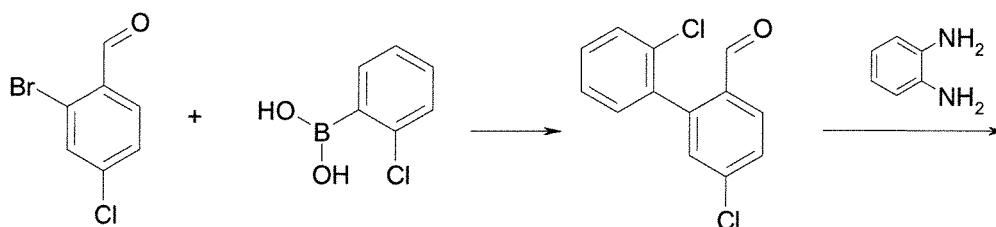


[Structural Formula 1-1A]

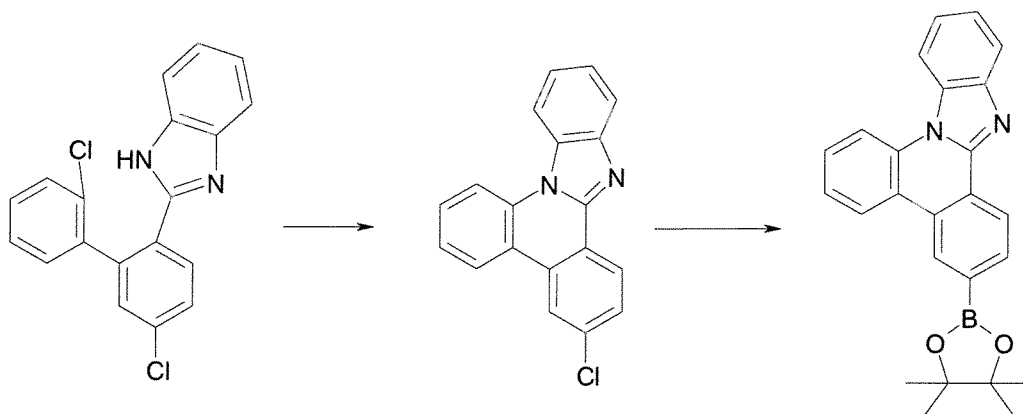

[Structural Formula 1-1B]


[Structural Formula 1-1C]

[Structural Formula 1-1D]

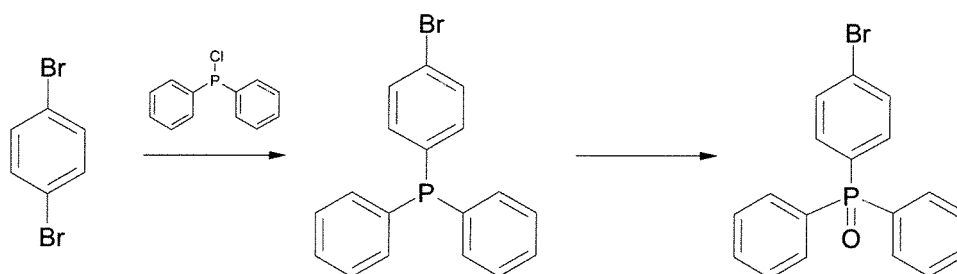

[Structural Formula 1-1E]

[Structural Formula 1-1F]

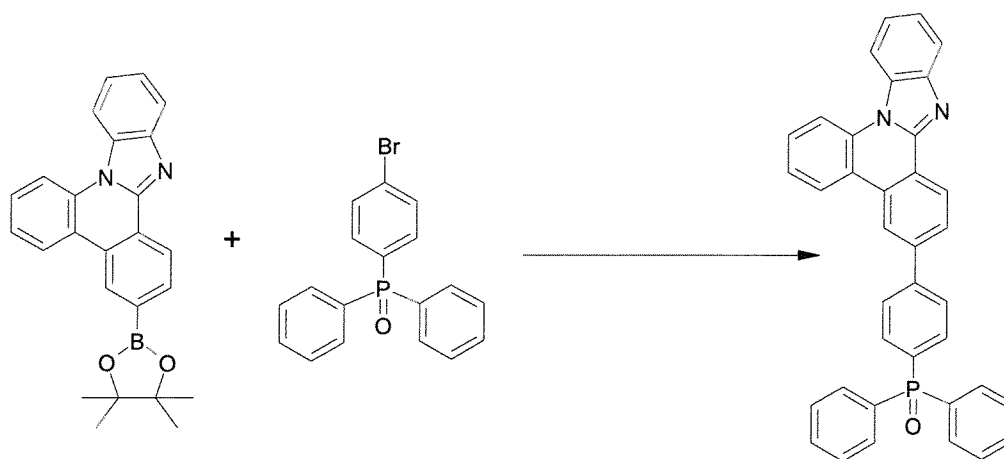

[Formula 1-1]

Preparation of Structural Formula 1-1A

[0079] 2-bromo-4-chlorobenzaldehyde (11 g, 50 mmol) and 2-chlorophenylboronic acid (7.8 g, 50 mmol) were dissolved in tetrahydrofuran (100 ml), and then heated, and 100 ml of 2M potassium carbonate aqueous solution and $\text{Pd}(\text{PPh}_3)_4$ (0.5 g, 0.5 mmol) were added thereto, and agitated for 12 hours. After the temperature was decreased to normal temperature, the water layer was removed and the solvent of the organic layer was removed to obtain Structural Formula 1-1A (12 g, yield 96%) of brown oil.

MS: $[M+H]^+ = 251$

Preparation of Structural Formula 1-1B

5 **[0080]** Structural Formula 1-1A (12 g, 48 mmol) and 1,2-diaminobenzene (6.2 g, 57 mmol) were dissolved in ethanol (200 ml), and the solution where $Na_2S_2O_5$ (10.9 g, 57 mmol) was dissolved in water (20 ml) was added thereto, and heated and agitated for 6 hours. After cooling was performed to normal temperature, water (300 ml) was added, and the generated solid was filtered to obtain Structural Formula 1-1B (14 g, yield 84%).
MS: $[M+H]^+ = 339$

Preparation of Structural Formula 1-1C

10 **[0081]** Structural Formula 1-1B (14 g, 41 mmol) and Na^tBuO (4 g, 41 mmol) were dissolved in dimethylacetamide (200 ml) and then heated. After agitation was performed for 3 hours, cooling was performed to normal temperature, ethanol was added, and the generated solid was filtered to obtain Structural Formula 1-1C (12 g, yield 95%).
MS: $[M+H]^+ = 305$

Preparation of Structural Formula 1-1D

20 **[0082]** After Structural Formula 1-1C (12 g, 40 mmol), bis(pinacolato)diboron (12 g, 47 mmol) and acetate potassium (12 g, 118 mmol) were dissolved in dioxane (150 mL), the temperature was increased to 50°C, and $Pd(DBA)_2$ (0.23 g, 0.4 mmol) and $P(Cy)_3$ (0.22 g, 0.8 mmol) were added thereto, heated and agitated for 12 hours. After the reaction solution was cooled to room temperature, distilled water (100 mL) was added thereto, and extraction was performed with methylene chloride (100 mL \times 3). The organic layer was concentrated and recrystallized by ethanol to obtain Structural
25 Formula 1-1D (14 g, yield 90%).
MS: $[M+H]^+ = 397$

Preparation of Structural Formula 1-1E

30 **[0083]** Dibromobenzene (20 g, 85 mmol) was dissolved in tetrahydrofuran (100 ml), and then cooled to -78°C. After $n-BuLi$ (2.5 M, 37 ml, 93 mmol) was slowly applied in drops, agitation was performed for 30 min. Chlorodiphenylphosphine (17 g, 76 mmol) was slowly applied in drops, and then agitated for 3 hours, the temperature was increased to normal temperature, water (100 ml) was added thereto, and extraction was performed by tetrahydrofuran. The organic layer was concentrated and recrystallized by hexane to obtain Structural Formula 1-1E (20 g, yield 70%).
35 MS: $[M+H]^+ = 342$

Preparation of Structural Formula 1-1F



40 **[0084]** After Structural Formula 1-1E (20 g, 58 mmol) was dissolved in trichloromethane (200 ml), hydrogen peroxide (20 ml) was added thereto, and agitated for 12 hours. After water was removed by adding $MgSO_4$ and performing agitation, concentration was performed by filtration and recrystallization was performed by hexane to obtain Structural Formula 1-1F (18 g, yield 85%).
MS: $[M+H]^+ = 358$

Preparation of Formula 1-1

45 **[0085]** After Structural Formula 1-1D (8.9 g, 22.4 mmol) and Structural Formula 1-1F (8 g, 22.4 mmol) were completely dissolved in tetrahydrofuran (200 ml) by heating, 100 ml of 2M potassium carbonate aqueous solution and $Pd(PPh_3)_4$ (0.26 g, 0.22 mmol) were added and agitated for 12 hours. After the temperature was decreased to normal temperature,
50 the water layer was removed and the generated solid was filtered. The filtered solid was recrystallized with tetrahydrofuran and acetone to obtain Formula 1-1 (8 g, yield 65%).
MS: $[M+H]^+ = 545$

<Preparation Example 2> Synthesis of the compound of the following Formula 1-2

55 **[0086]**

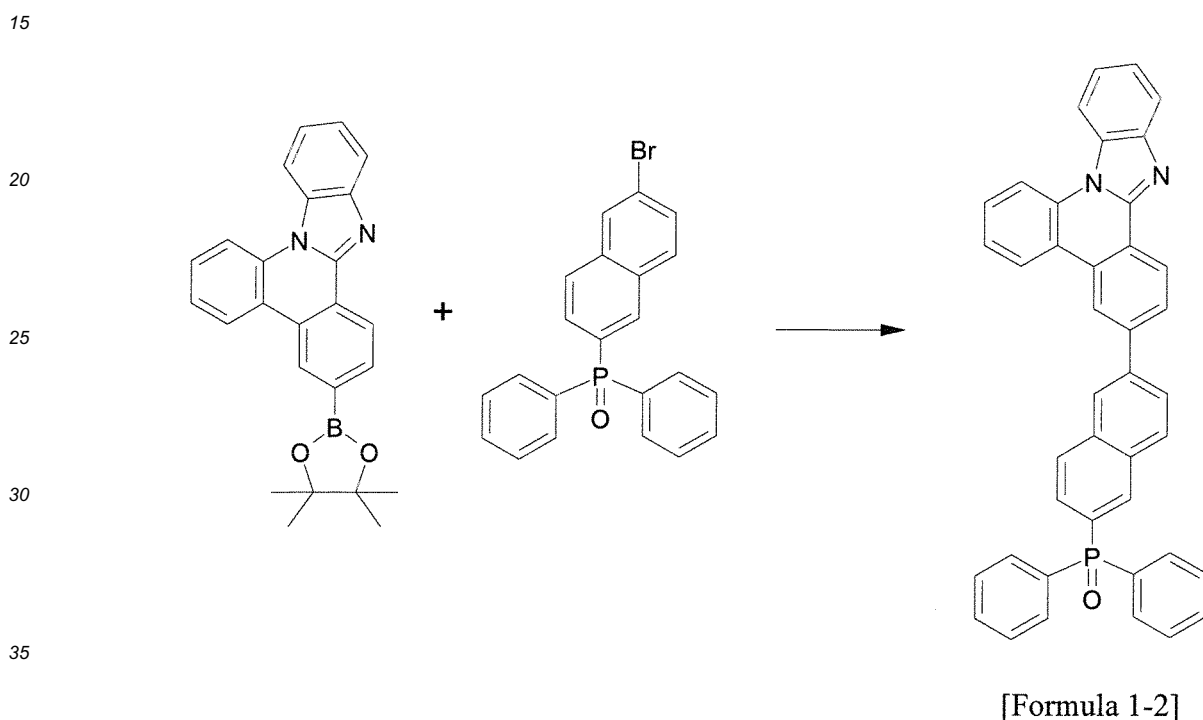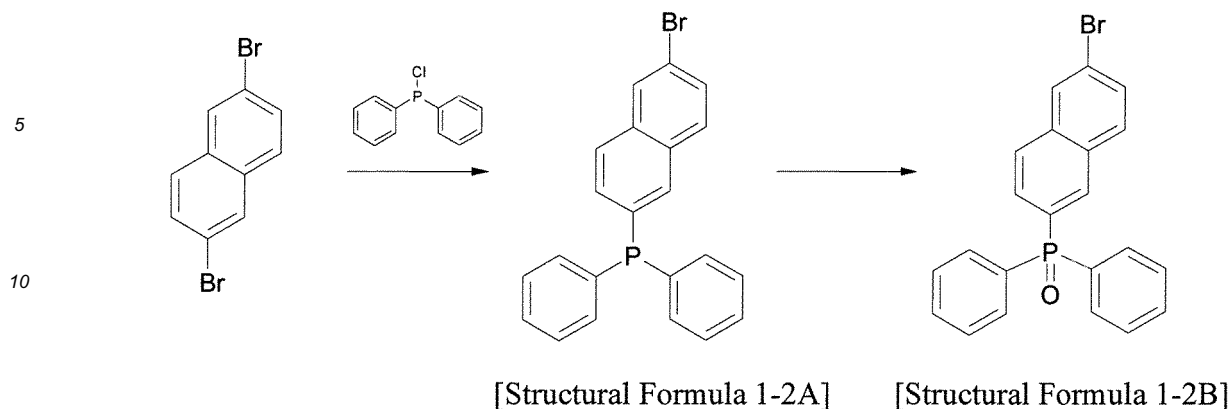

Preparation of Structural Formula 1-2A

[0087] Structural Formula 1-2A was obtained by the same method as the preparation method of Structural Formula 1-1E, except that 2,6-dibromonaphthalene was used instead of 1,4-dibromobenzene.

MS: $[M+H]^+ = 392$

Preparation of Structural Formula 1-2B

[0088] Structural Formula 1-2B was obtained by the same method as the preparation method of Structural Formula 1-1F, except that Structural Formula 1-2A was used instead of Structural Formula 1-1E.

MS: $[M+H]^+ = 408$

Preparation of Formula 1-2

[0089] Formula 1-2 was obtained by the same method as the preparation method of Formula 1-1, except that Structural Formula 1-2B was used instead of Structural Formula 1-1F.

MS: $[M+H]^+ = 595$

for 12 hours. After the temperature was decreased to normal temperature, the organic layer was extracted, and the generated solid was filtered by blowing up the solvent. The filtered solid was recrystallized with chloroform and hexane to obtain Structural Formula 1-3B (9.5 g, yield 75%).

MS: $[M+H]^+ = 653$


Preparation of Formula 1-3

[0093] Formula 1-3 was obtained by the same method as the preparation method of Formula 1-1, except that Structural Formula 1-3B was used instead of Structural Formula 1-1F.

MS: $[M+H]^+ = 621$


<Preparation Example 4> Synthesis of the compound of the following Formula 1-4

[0094]

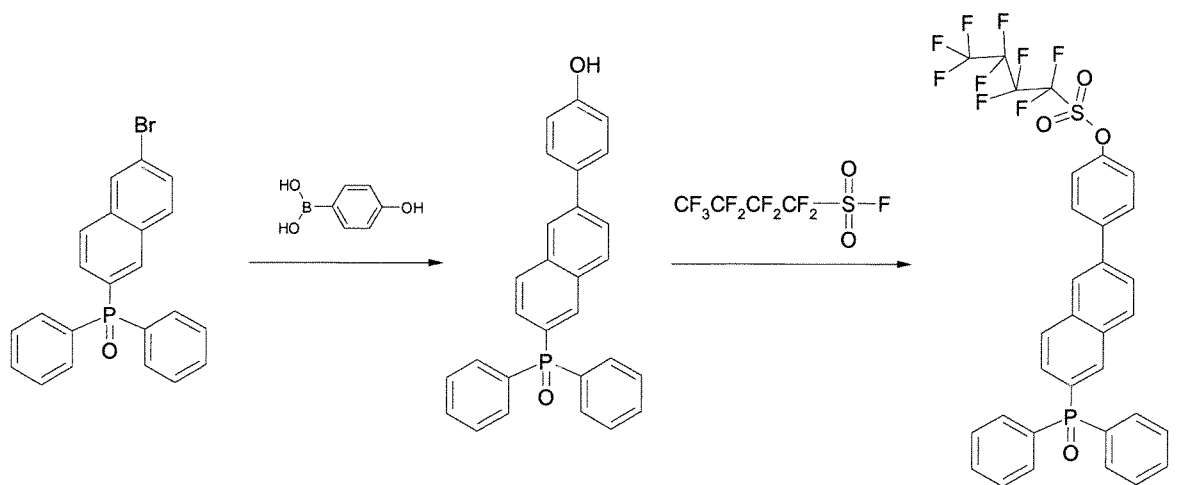

[Structural Formula 1-4A]

[Structural Formula 1-4B]

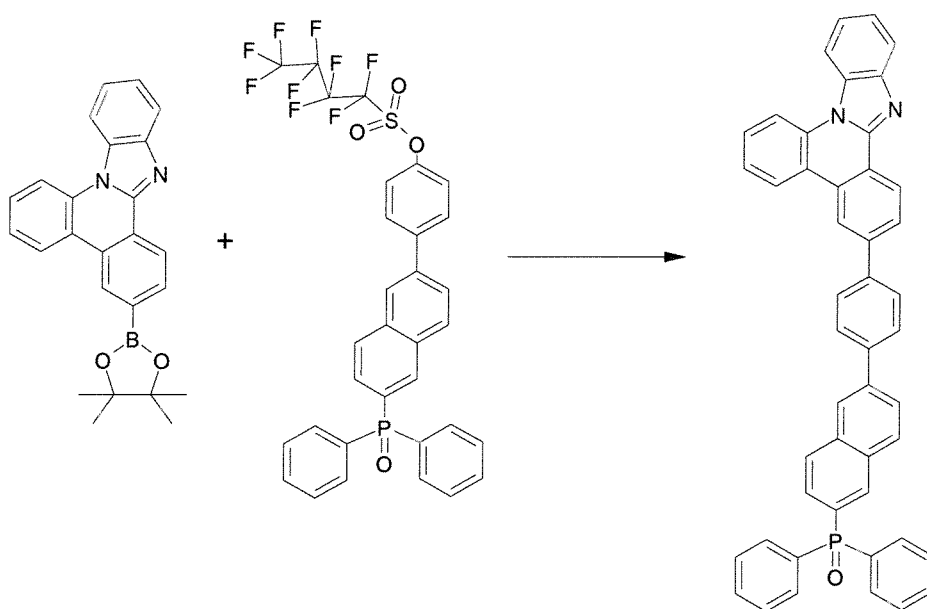

[Formula 1-4]

Preparation of Structural Formula 1-4A

[0095] Structural Formula 1-4A was obtained by the same method as the preparation method of Structural Formula 1-3A, except that Structural Formula 1-2B was used instead of Structural Formula 1-1F.

MS: $[M+H]^+ = 421$

Preparation of Structural Formula 1-4B

[0096] Structural Formula 1-4B was obtained by the same method as the preparation method of Structural Formula 1-3B, except that Structural Formula 1-4A was used instead of Structural Formula 1-3A.

MS: $[M+H]^+ = 703$


Preparation of Formula 1-4

[0097] Formula 1-4 was obtained by the same method as the preparation method of Formula 1-1, except that Structural Formula 1-4B was used instead of Structural Formula 1-1F.


MS: $[M+H]^+ = 671$

<Preparation Example 5> Synthesis of the compound of the following Formula 1-5

[0098]

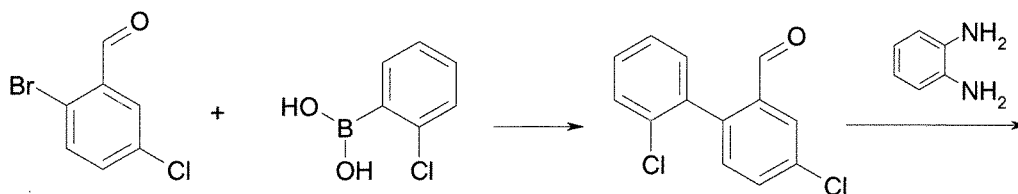


[Structural Formula 1-5A]

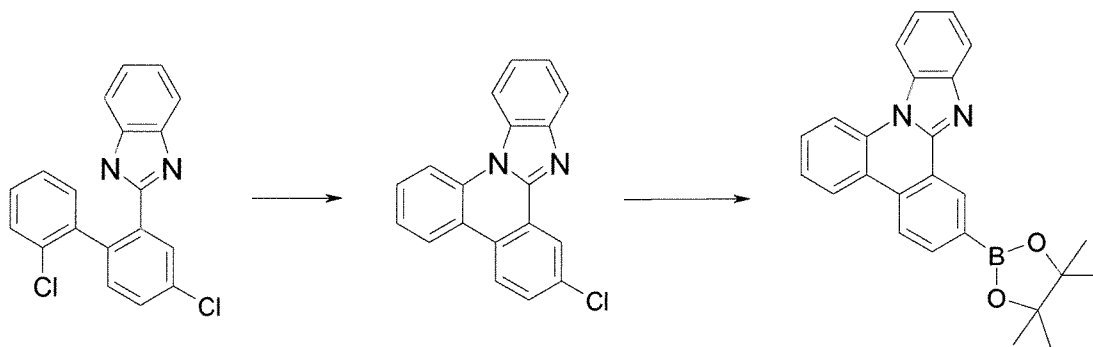

[Structural Formula 1-5B]

[Structural Formula 1-5C]

[Structural Formula 1-5D]

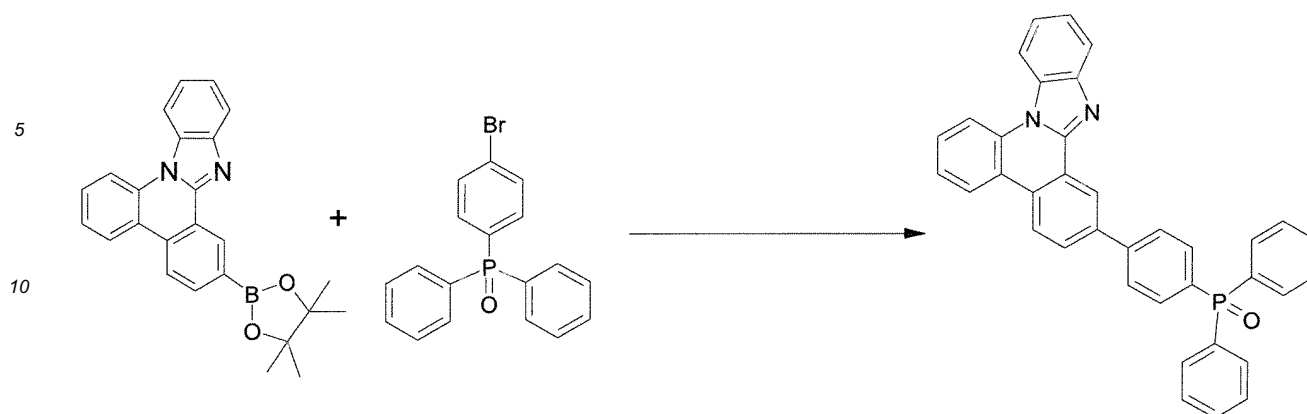

[Formula 1-5]

20 Preparation of Structural Formula 1-5A

[0099] Structural Formula 1-5A was obtained by the same method as the preparation method of Structural Formula 1-1A, except that 2-bromo-5-chlorobenzaldehyde was used instead of 2-bromo-4-chlorobenzaldehyde.

MS: $[M+H]^+ = 251$

25 Preparation of Structural Formula 1-5B

[0100] Structural Formula 1-5B was obtained by the same method as the preparation method of Structural Formula 1-1B, except that Structural Formula 1-5A was used instead of Structural Formula 1-1A.

MS: $[M+H]^+ = 339$

30 Preparation of Structural Formula 1-5C

[0101] Structural Formula 1-5C was obtained by the same method as the preparation method of Structural Formula 1-1C, except that Structural Formula 1-5B was used instead of Structural Formula 1-1B.

35 MS: $[M+H]^+ = 303$

Preparation of Structural Formula 1-5D

[0102] Structural Formula 1-5D was obtained by the same method as the preparation method of Structural Formula 1-1D, except that Structural Formula 1-5C was used instead of Structural Formula 1-1C.

40 MS: $[M+H]^+ = 395$


Preparation of Formula 1-5

45 **[0103]** Formula 1-5 was obtained by the same method as the preparation method of Formula 1-1, except that Structural Formula 1-5D was used instead of Structural Formula 1-1D.

MS: $[M+H]^+ = 545$

<Preparation Example 6> Synthesis of the compound of the following Formula 1-6

50 **[0104]**

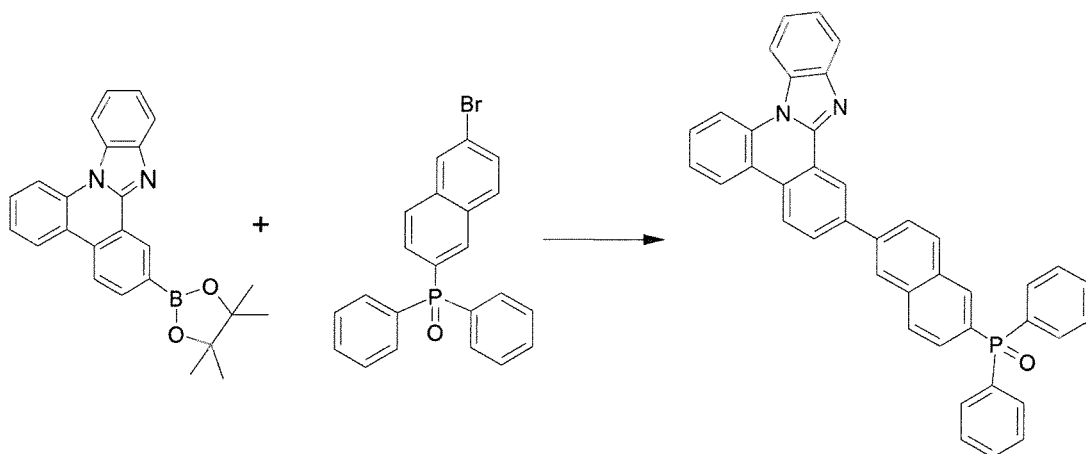

[Formula 1-6]


Preparation of Formula 1-6

[0105] Formula 1-6 was obtained by the same method as the preparation method of Formula 1-2, except that Structural Formula 1-5D was used instead of Structural Formula 1-1D.

MS: $[M+H]^+ = 595$

<Preparation Example 7> Synthesis of the compound of the following Formula 1-7

[0106]

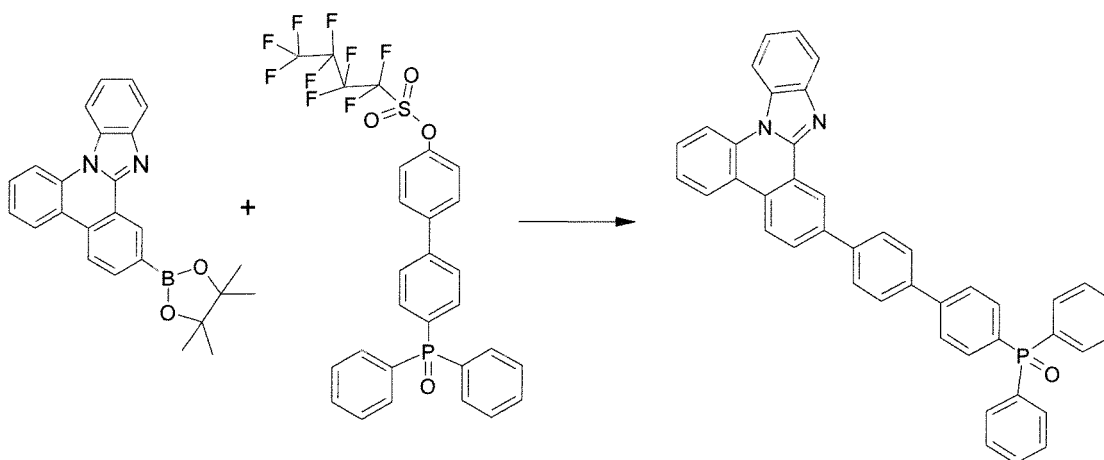

[Formula 1-7]


Preparation of Formula 1-7

[0107] Formula 1-7 was obtained by the same method as the preparation method of Formula 1-3, except that Structural Formula 1-5D was used instead of Structural Formula 1-1D.

MS: $[M+H]^+ = 621$

<Preparation Example 8> Synthesis of the compound of the following Formula 1-8

[0108]

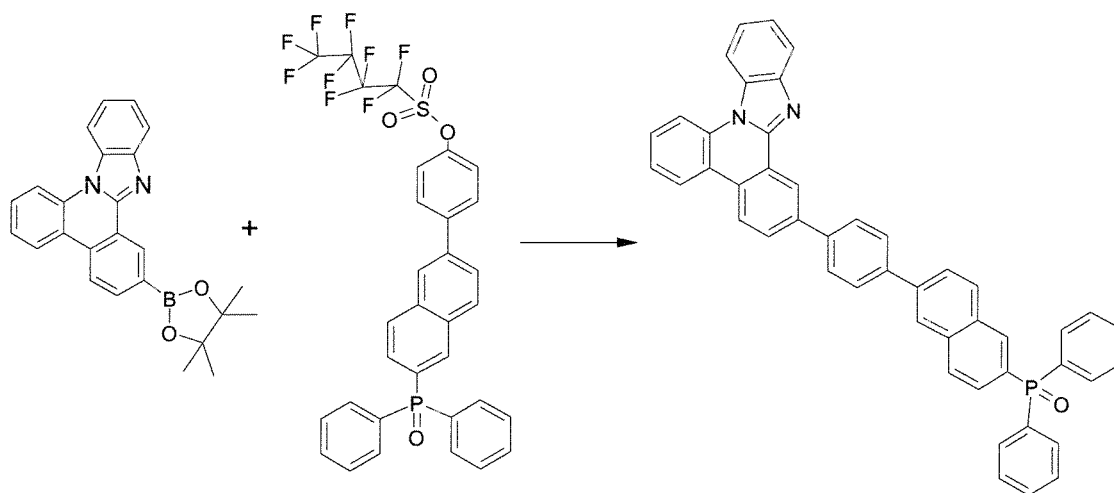

[Formula 1-8]


Preparation of Formula 1-8

[0109] Formula 1-8 was obtained by the same method as the preparation method of Formula 1-4, except that Structural Formula 1-5D was used instead of Structural Formula 1-1D.


MS: $[M+H]^+ = 671$

<Preparation Example 9> Synthesis of the compound of the following Formula 1-9

[0110]

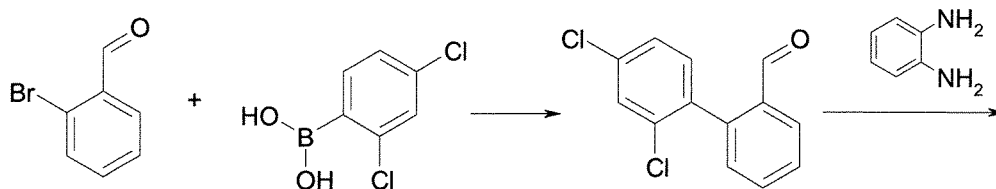


[Structural Formula 1-9A]

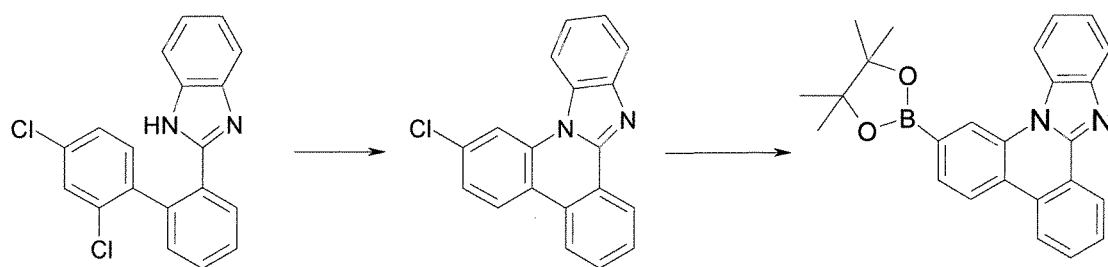

[Structural Formula 1-9B]

[Structural Formula 1-9C]

[Structural Formula 1-9D]

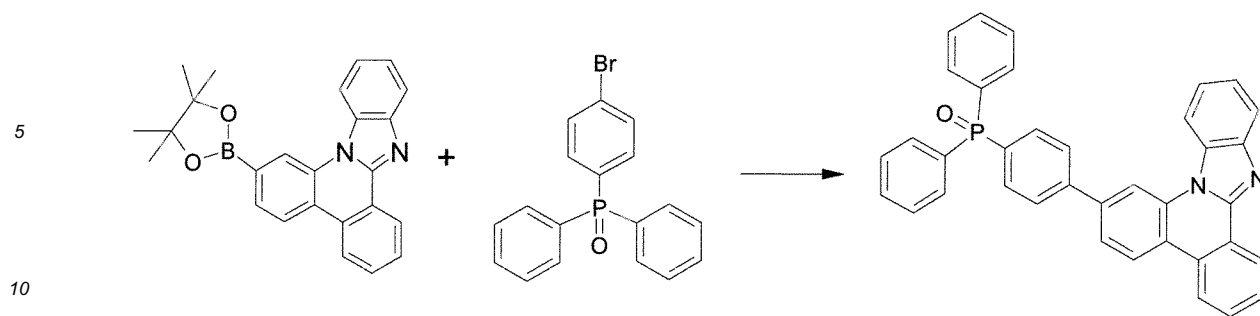

[Formula 1-9]

15 Preparation of Structural Formula 1-9A

[0111] Structural Formula 1-9A was obtained by the same method as the preparation method of Structural Formula 1-1A, except that 2,4-dichlorophenylboronic acid was used instead of 2-bromo-4-chlorobenzaldehyde and 2-bromobenzaldehyde 2-chlorophenylboronic acid.

20 MS: $[M+H]^+ = 251$

Preparation of Structural Formula 1-9B

[0112] Structural Formula 1-9B was obtained by the same method as the preparation method of Structural Formula 1-1B, except that Structural Formula 1-9A was used instead of Structural Formula 1-1A.

25 MS: $[M+H]^+ = 339$

Preparation of Structural Formula 1-9C

[0113] Structural Formula 1-9C was obtained by the same method as the preparation method of Structural Formula 1-1C, except that Structural Formula 1-9B was used instead of Structural Formula 1-1B.

30 MS: $[M+H]^+ = 303$

Preparation of Structural Formula 1-9D

[0114] Structural Formula 1-9D was obtained by the same method as the preparation method of Structural Formula 1-1D, except that Structural Formula 1-9C was used instead of Structural Formula 1-1C.

35 MS: $[M+H]^+ = 395$

40 Preparation of Formula 1-9

[0115] Formula 1-9 was obtained by the same method as the preparation method of Formula 1-1, except that Structural Formula 1-9D was used instead of Structural Formula 1-1D.

45 MS: $[M+H]^+ = 545$

<Preparation Example 10> Synthesis of the compound of the following Formula 1-10

[0116]

50

55



15

[0117] Formula 1-10 was obtained by the same method as the preparation method of Formula 1-2, except that Structural Formula 1-9D was used instead of Structural Formula 1-1D.

MS: $[M+H]^+ = 595$

<Preparation Example 11> Synthesis of the compound of the following Formula 1-11

[0118]



40


45

[0119] Formula 1-11 was obtained by the same method as the preparation method of Formula 1-3, except that Structural Formula 1-9D was used instead of Structural Formula 1-1D.

MS: $[M+H]^+=621$

<Preparation Example 12> Synthesis of the compound of the following Formula 1-12

[0120]

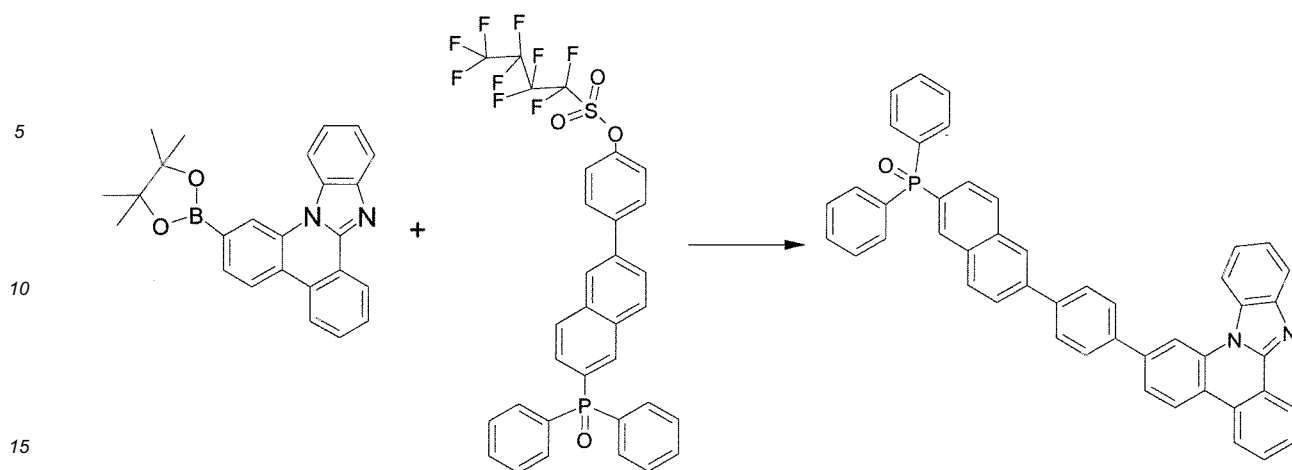

[Formula 1-12]

20 Preparation of Formula 1-12

[0121] Formula 1-12 was obtained by the same method as the preparation method of Formula 1-4, except that Structural Formula 1-9D was used instead of Structural Formula 1-1D.

MS: [M+H]⁺ = 671


25

<Preparation Example 13> Synthesis of the compound of the following Formula 1-13

[0122]

30

35

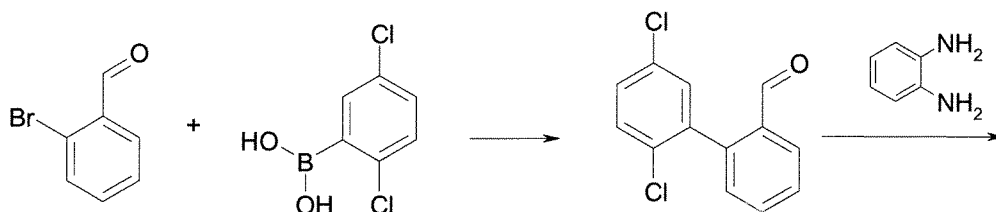


[Structural Formula 1-13A]

40

45


50

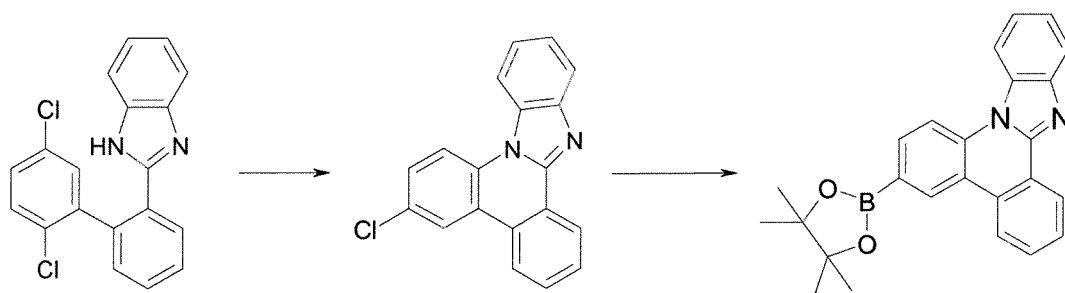

[Structural Formula 1-13B] [Structural Formula 1-13C]

[Structural Formula 1-13D]

55

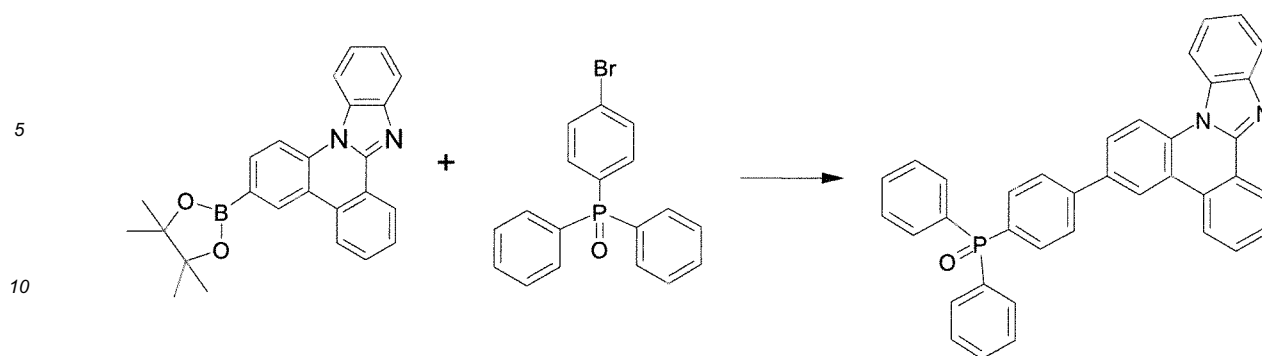

[Formula 1-13]

Preparation of Structural Formula 1-13A

20 **[0123]** Structural Formula 1-13A was obtained by the same method as the preparation method of Structural Formula 1-1A, except that 2,5-dichlorophenylboronic acid was used instead of 2-bromo-4-chlorobenzaldehyde and 2-bromobenzaldehyde 2-chlorophenylboronic acid.

MS: $[M+H]^+ = 251$

Preparation of Structural Formula 1-13B

25 **[0124]** Structural Formula 1-13B was obtained by the same method as the preparation method of Structural Formula 1-1B, except that Structural Formula 1-13A was used instead of Structural Formula 1-1A.

MS: $[M+H]^+ = 339$

Preparation of Structural Formula 1-13C

30 **[0125]** Structural Formula 1-13C was obtained by the same method as the preparation method of Structural Formula 1-1C, except that Structural Formula 1-13B was used instead of Structural Formula 1-1B.

MS: $[M+H]^+ = 303$

Preparation of Structural Formula 1-13D

35 **[0126]** Structural Formula 1-13D was obtained by the same method as the preparation method of Structural Formula 1-1D, except that Structural Formula 1-13C was used instead of Structural Formula 1-1C.

MS: $[M+H]^+ = 395$

Preparation of Formula 1-13

40 **[0127]** Formula 1-13 was obtained by the same method as the preparation method of Formula 1-1, except that Structural Formula 1-13D was used instead of Structural Formula 1-1D.

MS: $[M+H]^+ = 545$

<Preparation Example 14> Synthesis of the compound of the following Formula 1-14

50 **[0128]**



15

20

MS: $[M+H]^+ = 595$

25

30




40

45

50

<Preparation Example 16> Synthesis of the compound of the following Formula 1-16

55

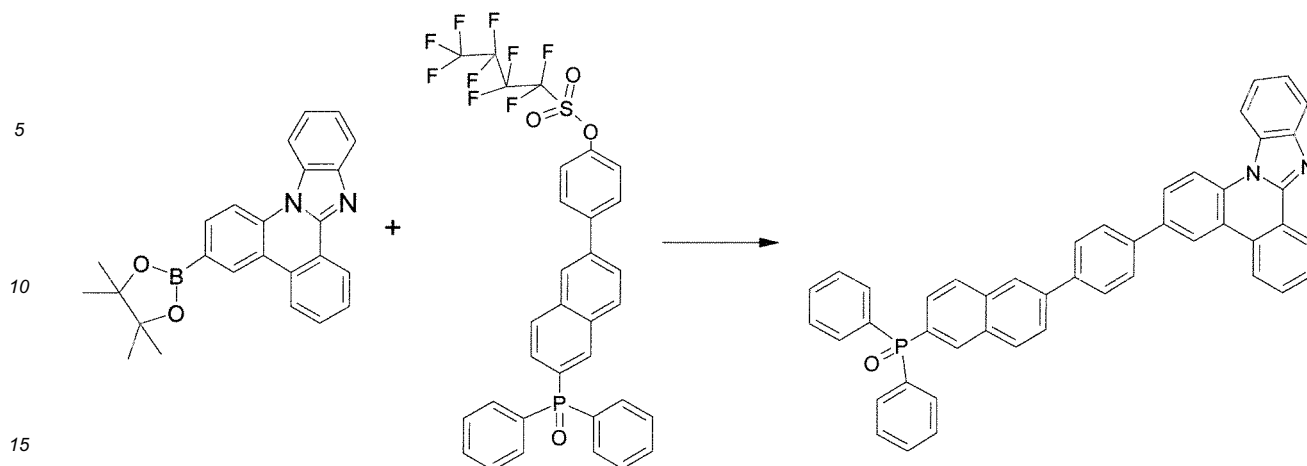

[Formula 1-16]

20 Preparation of Formula 1-16

[0133] Formula 1-16 was obtained by the same method as the preparation method of Formula 1-4, except that Structural Formula 1-13D was used instead of Structural Formula 1-1D.

MS: $[M+H]^+ = 671$

25

<Example 1 >

[0134] A glass substrate (coming 7059 glass) on which a thin film of ITO (indium tin oxide) was applied to a thickness of 1000 Å was immersed in distilled water having a dispersing agent dissolved therein to be washed with ultrasonic waves. In this case, a product manufactured by Fisher Co. was used as the detergent, and the distilled water was one which had been twice filtered by a filter of the product manufactured by Millipore Co. ITO was washed for 30 minutes, and then washing with ultrasonic waves was repeated twice for 10 minutes by distilled water. After the completion of washing with distilled water, washing with ultrasonic waves was carried out by sequentially using solvents such as isopropyl alcohol, acetone and methanol, and the resultant product was dried.


[0135] Hexanitrile hexaazatriphenylene was applied to a thickness of 500 Å by thermal vacuum deposition on the ITO transparent electrode thus prepared to form a hole injecting layer. After NPB (400 Å) which was the material transporting the holes was deposited under the vacuum state thereon, the host H1 and the dopant D1 compound were deposited under the vacuum state to a thickness of 300 Å as a light emitting layer. Thereafter, the Formula 1-1 compound synthesized in Preparation Example 1 and LiQ were applied together by thermal vacuum deposition (200 Å) as electron injection and transport layers. Lithium quinolate (LiQ) in a thickness of 12 Å and aluminum in a thickness of 2,000 Å were subsequently deposited on the electron transport layer to form a cathode, thereby manufacturing the organic light emitting diode.

[0136] E1 was used as the Comparative Example of the electron transport layer.


[0137] In the aforementioned process, the deposition speed of the organic material was maintained at 1 Å/sec, the deposition speed of lithium quinolate was maintained at 0.2 Å/sec, and the deposition speed of aluminum was maintained at 3 to 7 Å/sec.

50 [hexanitrile hexaazatriphenylene]


55




[NPB]




[H1]

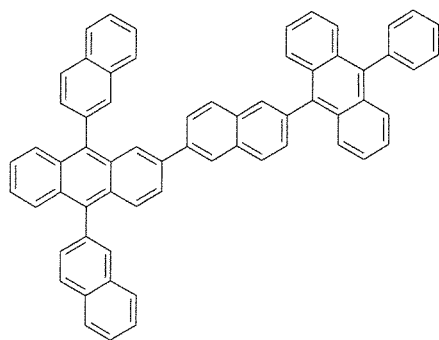


[H2]





[D1]

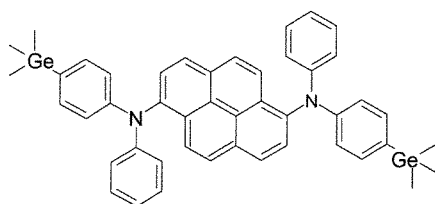

[D2]

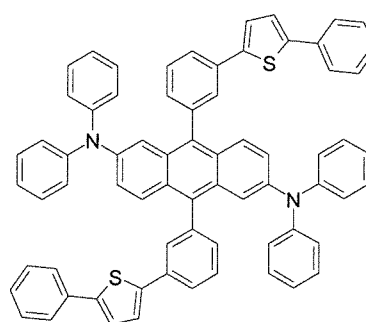

[E1]

[Alq₃]

<Example 2>

[0138] The same experiment was performed, except that Formula 1-5 was used instead of Formula 1-1 as the electron transport layer in Example 1.

<Example 3>

[0139] The same experiment was performed, except that Formula 1-7 was used instead of Formula 1-1 as the electron transport layer in Example 1.

<Example 4>

[0140] The same experiment was performed, except that Formula 1-8 was used instead of Formula 1-1 as the electron transport layer in Example 1.

<Comparative Example 1>

[0141] The same experiment was performed, except that E1 was used instead of Formula 1-1 as the electron transport layer in Example 1.

[0142] Like the aforementioned Examples, the experiment results of the organic light emitting diode manufactured by using the compounds as the electron transport layer material are described in Table 1.

[Table 1]


Experimental Example (5 mA/cm ²)	ETL material	Voltage (V)	Efficiency (cd/A)	Color coordinate (x, y)	Life-span(Td5) (hour)
Comparative Example 1	E1	4.21	19.05	(0.314, 0.650)	94
Example 1	Formula 1-1	5.17	16.00	(0.315, 0.650)	498
Example 2	Formula 1-5	5.22	18.29	(0.314, 0.655)	150
Example 3	Formula 1-7	5.00	18.29	(0.311, 0.654)	366
Example 4	Formula 1-8	4.96	17.52	(0.315, 0.655)	366

[0143] As described above, the new compound according to the present invention may be used as the material of the organic layer of the organic light emitting diode and the organic electronic diode by introducing various substituent groups and the like. The organic light emitting diode and the organic electronic diode using the compound represented by Formula 1 according to the present invention as the material of the organic layer exhibit excellent efficiency, driving voltage, and life-span properties.

Claims

1. A compound represented by the following Formula 1:


[Formula 1]

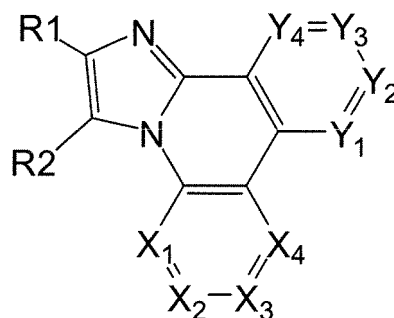

wherein

X_1 is N or CR3, X_2 is N or CR4, X_3 is N or CR5, X_4 is N or CR6, Y_1 is N or CR7, Y_2 is N or CR8, Y_3 is N or CR9, Y_4 is N or CR10, X_1 to X_4 and Y_1 to Y_4 are not all N, R3 to R10 are each independently $-(L)p-(Y)q$ or a group represented by Formula 1A, at least one of R3 to R10 is the group represented by Formula 1A, p is an integer of 0 to 10, q is an integer of 1 to 10, and two or more adjacent groups of R3 to R10 may form a monocycle or polycycle,

[Formula 1A]



L is oxygen; sulfur; substituted or unsubstituted nitrogen; substituted or unsubstituted phosphorus; a substituted or unsubstituted arylene group; a substituted or unsubstituted alkenylene group; a substituted or unsubstituted fluorenylene group; a substituted or unsubstituted carbazoylene group; or a substituted or unsubstituted heteroarylene group comprising one or more of N, O and S atoms,

Y is hydrogen; heavy hydrogen; a halogen group; a nitrile group; a nitro group; a hydroxy group; a substituted or unsubstituted cycloalkyl group; a substituted or unsubstituted alkoxy group; a substituted or unsubstituted aryloxy group; a substituted or unsubstituted alkylthioxy group; a substituted or unsubstituted arylthioxy group; a substituted or unsubstituted alkylsulfoxy group; a substituted or unsubstituted arylsulfoxy group; a substituted or unsubstituted boron group; a substituted or unsubstituted alkylamine group; a substituted or unsubstituted aralkylamine group; a substituted or unsubstituted arylamine group; a substituted or unsubstituted heteroarylamine group; a substituted or unsubstituted aryl group; a substituted or unsubstituted fluorenyl group; a substituted or unsubstituted carbazole group; or a substituted or unsubstituted heterocyclic group comprising one or more of N, O and S atoms,

R1 and R2 may be connected to each other to form or not to form a substituted or unsubstituted aliphatic, aromatic or heteroaromatic monocycle or polycycle, and in the case where R1 and R2 does not form the cycle, R1 and R2 are the same as or different from each other and each independently hydrogen, a substituted or unsubstituted C₃–C₄₀ cycloalkyl group; a substituted or unsubstituted C₆–C₆₀ aryl group; a substituted or unsubstituted C₂–C₄₀ alkenyl group; or a substituted or unsubstituted C₂–C₆₀ heterocyclic group,

the aromatic or heteroaromatic monocycle and polycycle formed by connecting R1, R2, and R1 and R2 to each other may be each independently substituted by -(L)p-(Y)q,

in the case where two or more L and two or more Y are present, L and Y are each independently the same as or different from each other,


A are each independently O, S or Se,

Ar₁ and Ar₂ are each independently a substituted or unsubstituted aryl group; or a substituted or unsubstituted heterocyclic group comprising one or more of N, O and S atoms,

Ar₃ is each independently a substituted or unsubstituted arylene group; or a substituted or unsubstituted heteroarylene group comprising one or more of N, O and S atoms.

2. The compound of claim 1, where Formula 1 is represented by the following Formula 2:

[Formula 2]

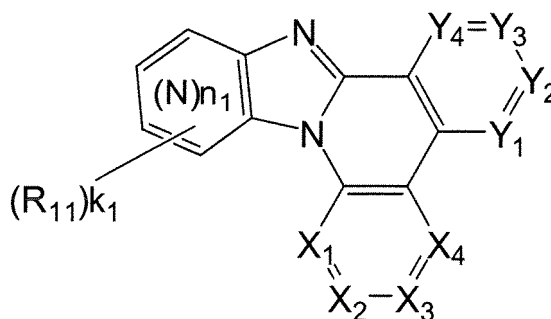

wherein


X₁ to X₄, and Y₁ to Y₄ are as defined in Formula 1,

N of (N)_{n1} means a nitrogen atom and also that the nitrogen atom may replace a carbon atom in a benzene cycle, n₁ of (N)_{n1} is an integer of 0 to 6,


R_{11} is the same as definition of R_3 to R_{10} of Formula 1, and
 k_1 is an integer of 0 to 4.

3. The compound of claim 1, where Formula 1 is represented by the following Formula 3 or 4:

[Formula 3]

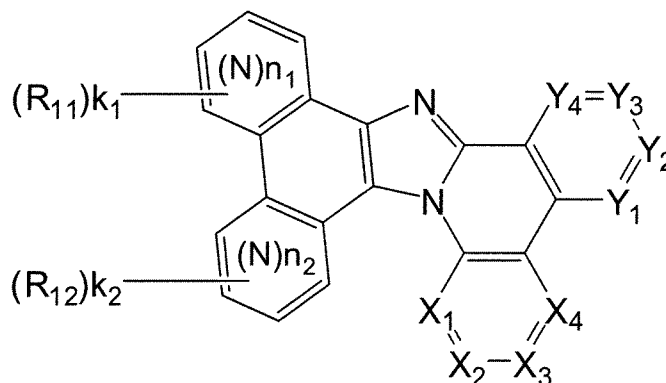

[Formula 4]

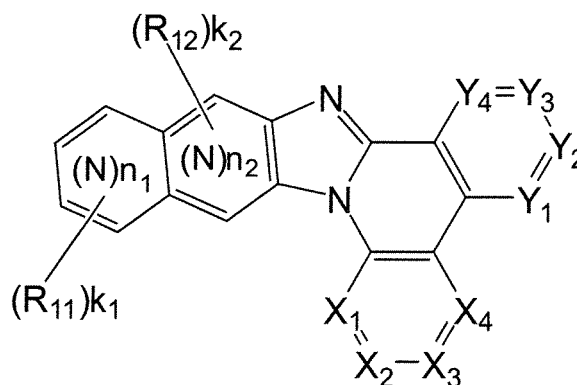

wherein

X_1 to X_4 , and Y_1 to Y_4 are as defined in Formula 1,

N of (N) n_1 and (N) n_2 means a nitrogen atom and also that the nitrogen atom may replace a carbon atom in a benzene cycle,

n_1 of (N) n_1 is an integer of 0 to 2,

n_2 of (N) n_2 is an integer of 0 to 2,

R_{11} and R_{12} are each independently the same as definition of R_3 to R_{10} of Formula 1, and

k_1 is an integer of 0 to 4, and k_2 is an integer of 0 to 4.

4. The compound of claim 1, where Formula 1 is represented by the following Formula 5:

Chemical structure of a substituted phthalazine derivative. The phthalazine core is substituted with two phenyl rings at positions 4 and 5. The top phenyl ring is substituted with $(R_{11})_{k_1}$ and $(N)_{n_1}$. The bottom phenyl ring is substituted with $(R_{12})_{k_2}$ and $(N)_{n_2}$. The phthalazine ring has substituents Y_1, Y_2, Y_3, Y_4 at positions 6, 7, 8, and 9 respectively, and X_1, X_2, X_3, X_4 at positions 1, 2, 3, and 4 respectively.

k_1 is an integer of 0 to 4, and k_2 is an integer of 0 to 4.

-
- Chemical structure of compound (1) is shown, which is a phosphazene derivative. It features a quinoxaline core. The quinoxaline has a phosphazene group $-P(=A)(Ar_1)Ar_2$ at position 2 and an Ar_3 group at position 8. The phosphazene group is part of a repeating unit with subscript m_1 . The Ar_3 group is part of another repeating unit with subscript m_2 .

m_1 is an interger of 0 to 4, m_2 is an interger of 0 to 4, and m_1 and m_2 are not simultaneously 0.

6. The compound of claim 1, wherein Ar₃ is a substituted or unsubstituted arylene group selected from the group consisting of a phenylene group, a biphenylene group, a naphthalenyl group, a binaphthalene group, an anthracenylene group, a fluorenylene group, a crycenylene group, and a phenanthrenylene group.
7. The compound of claim 1, wherein Ar₃ is an arylene group selected from the group consisting of following formulae:

5

10

15

20

25

30

35

8. The compound of claim 1, where the compound represented by Formula 1 is represented by any one of the following Formulas:

[Formula 1-1]

[Formula 1-2]

[Formula 1-3]





[Formula 1-4]

40


45

50


55

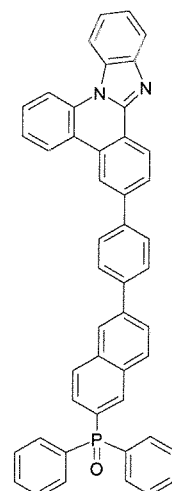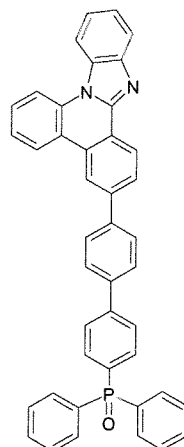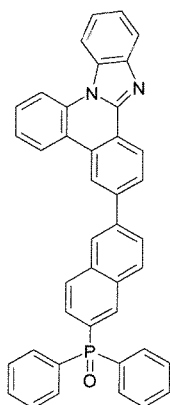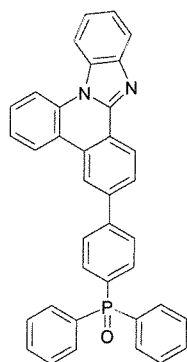


[Formula 1-5]




[Formula 1-6]

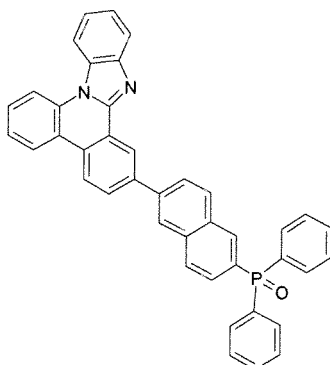


[Formula 1-7]

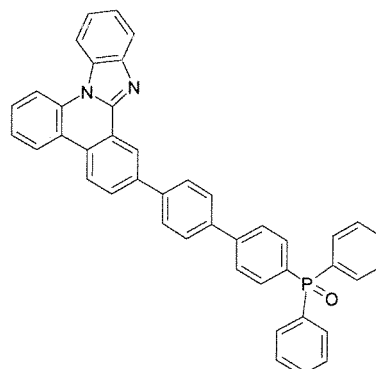


[Formula 1-8]

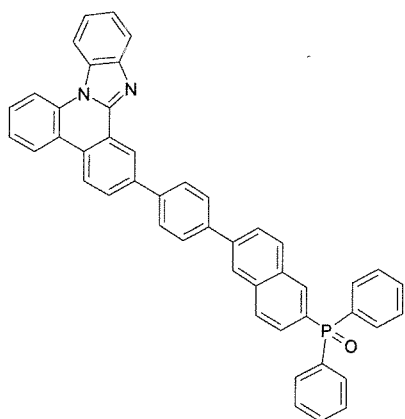


[Formula 1-9]




[Formula 1-10]




[Formula 1-11]

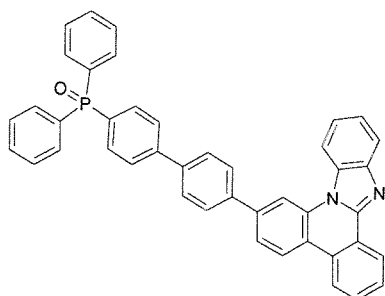


[Formula 1-12]

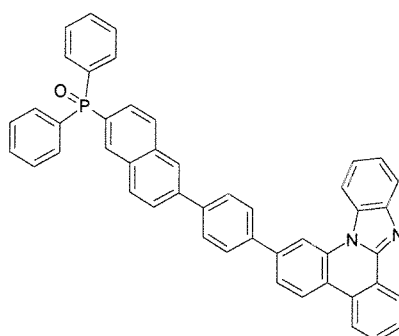


[Formula 1-13]




[Formula 1-14]

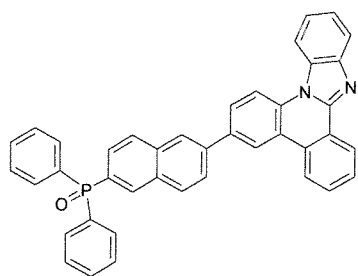


[Formula 1-15]

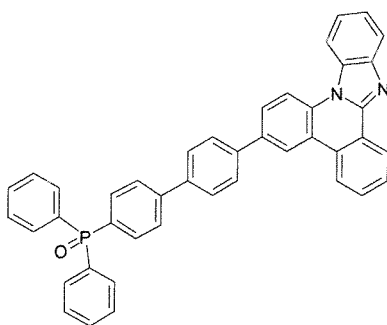


[Formula 1-16]

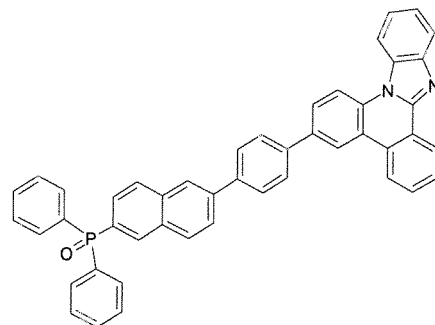


[Formula 1-17]

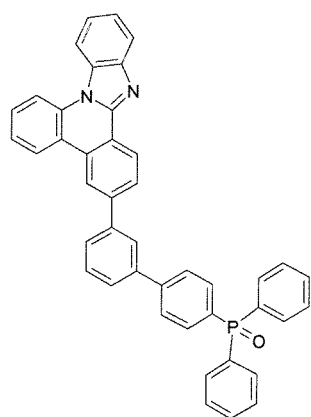


[Formula 1-18]

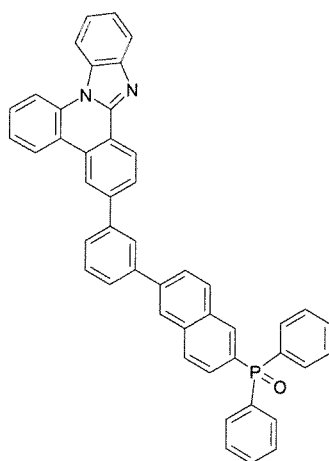


[Formula 1-19]

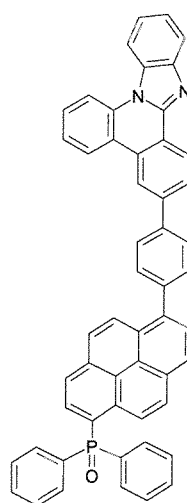


[Formula 1-20]

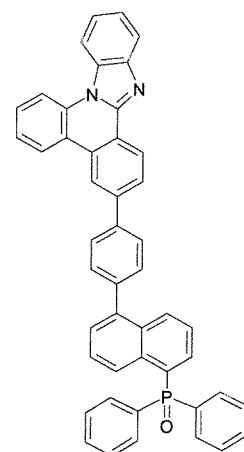


[Formula 1-21]

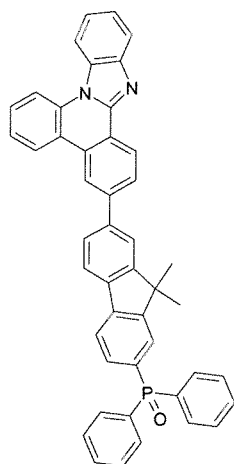


[Formula 1-22]

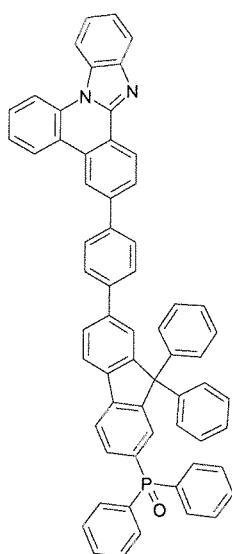


[Formula 1-23]

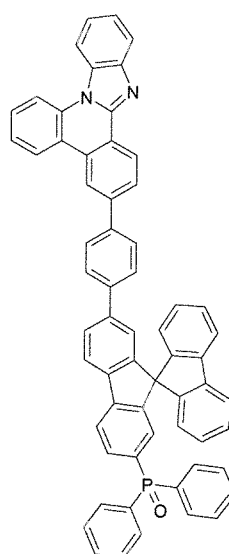


[Formula 1-24]

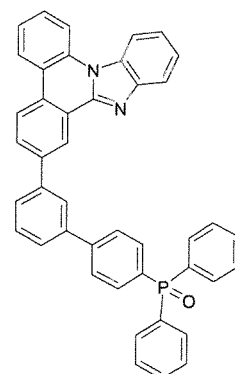


[Formula 1-25]

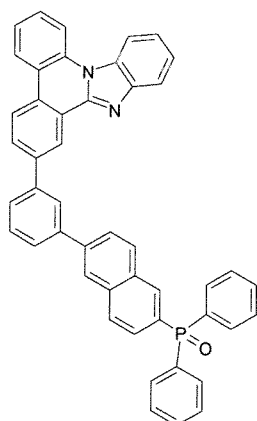


[Formula 1-26]

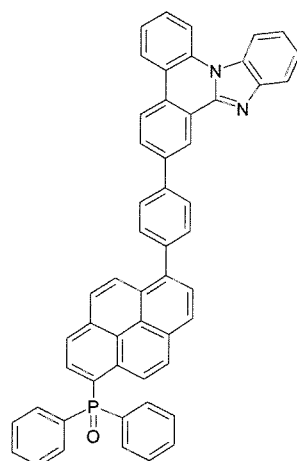


[Formula 1-27]

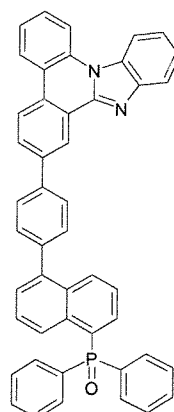


[Formula 1-28]

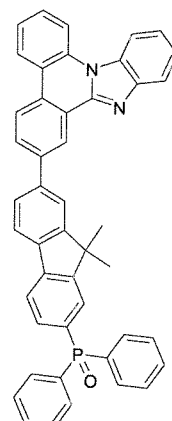


[Formula 1-29]

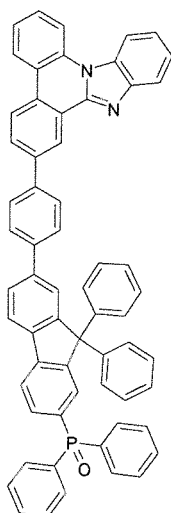


[Formula 1-30]

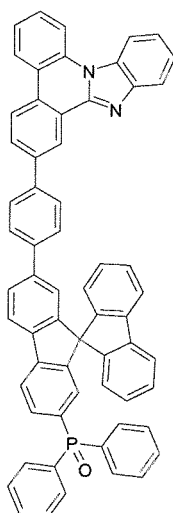


[Formula 1-31]

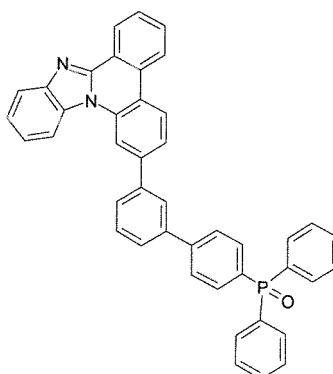


[Formula 1-32]

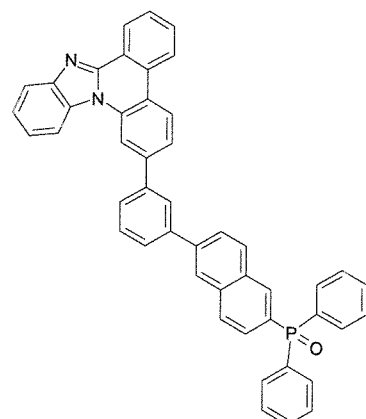


[Formula 1-33]

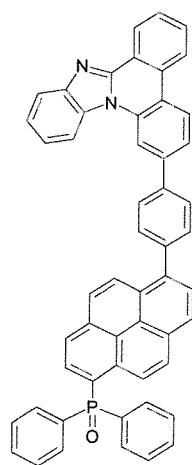


[Formula 1-34]

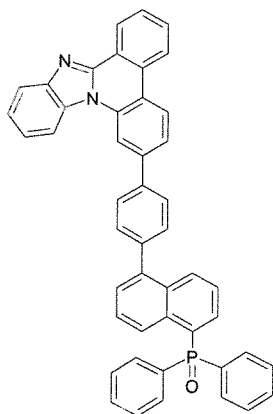


[Formula 1-35]

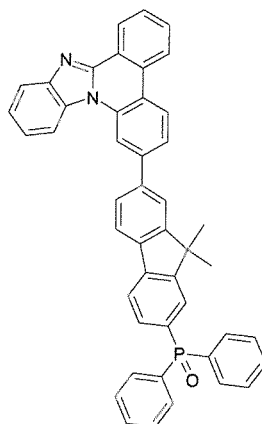


[Formula 1-36]

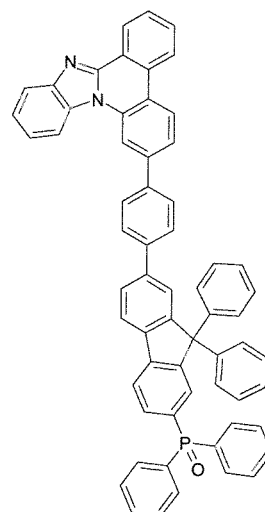


[Formula 1-37]

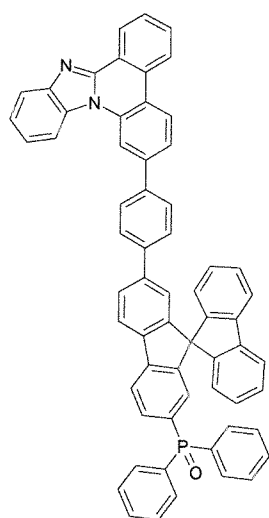


[Formula 1-38]

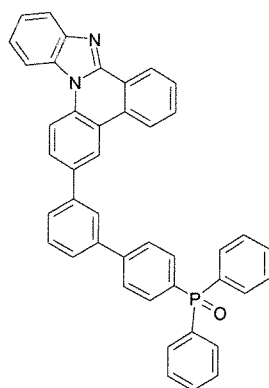


[Formula 1-39]

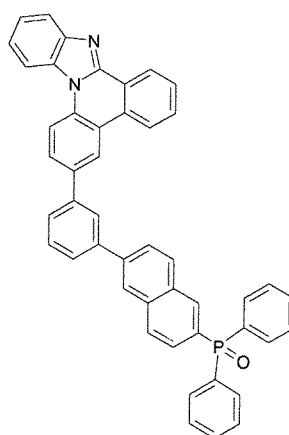


[Formula 1-40]

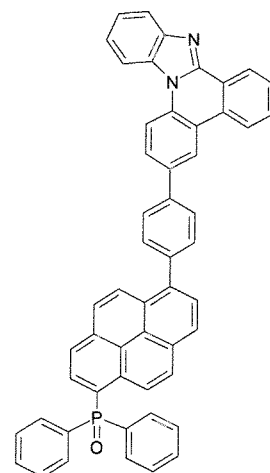


[Formula 1-41]




[Formula 1-42]




[Formula 1-43]






[Formula 1-44]



5

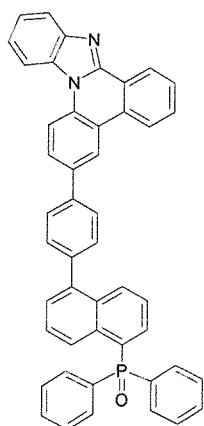

10

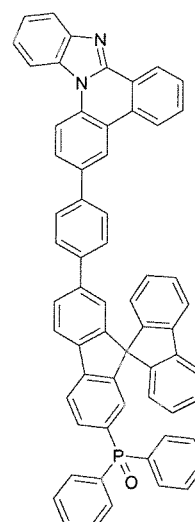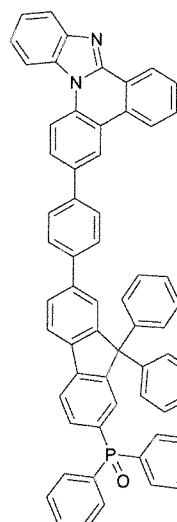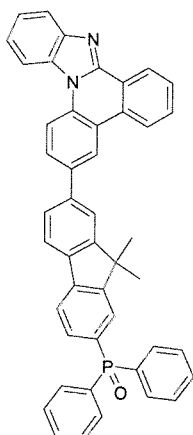

15


20

[Formula 1-41]


[Formula 1-42]

[Formula 1-43]


25

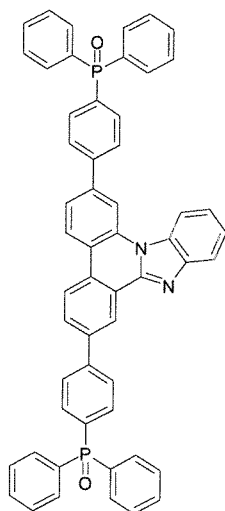

30

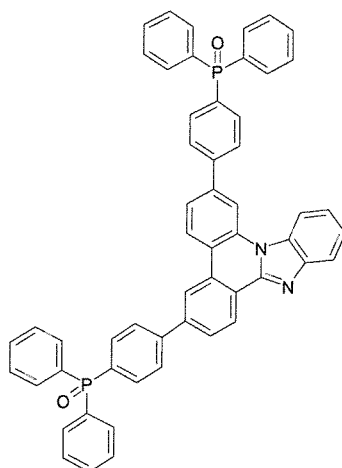

35

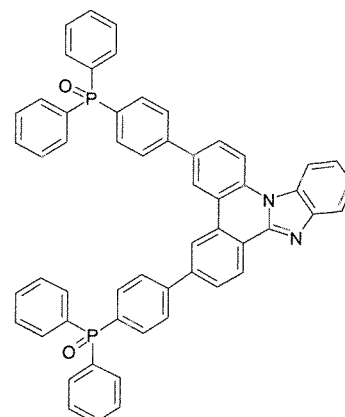

40

[Formula 1-44]


[Formula 1-45]

[Formula 1-46]

45


50

55

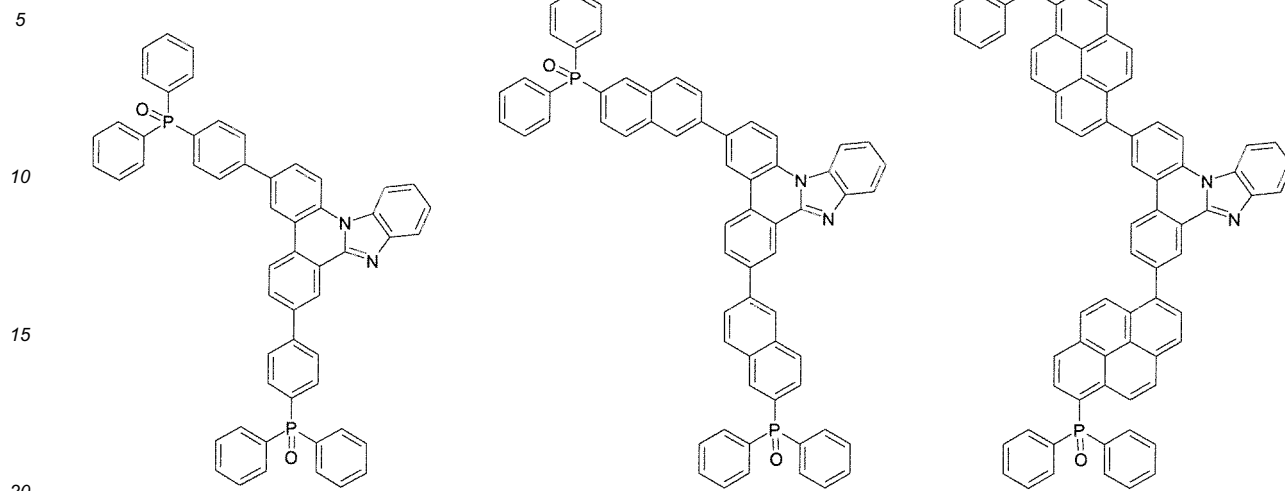


9. An organic electronic diode which comprises a first electrode, a second electrode, and one or more organic layers interposed between the first electrode and the second electrode, wherein one or more layers of the organic layers comprise a compound represented by Formula 1 of any one of claims 1 to 8.
10. The organic electronic diode of claim 9, wherein the organic layer comprises one or more layers of a hole injection layer, a hole transport layer, and a layer performing simultaneously hole injection and hole transporting, and one or more layers of the layers comprise the compound represented by Formula 1.
11. The organic electronic diode of claim 9, wherein the organic layer comprises a light emitting layer, and the light emitting layer comprises the compound represented by Formula 1.
12. The organic electronic diode of claim 9, wherein the organic layer comprises one or more layers of an electron transport layer, an electron injection layer, and a layer performing simultaneously electron transporting and electron injection, and one or more layers of the layers comprise the compound represented by Formula 1.
13. The organic electronic diode of claim 9, wherein the organic electronic diode is selected from the group consisting of an organic light emitting diode, an organic phosphorescent diode, an organic solar cell, an organic photoconductor (OPC) and an organic transistor.


[Figure 1]

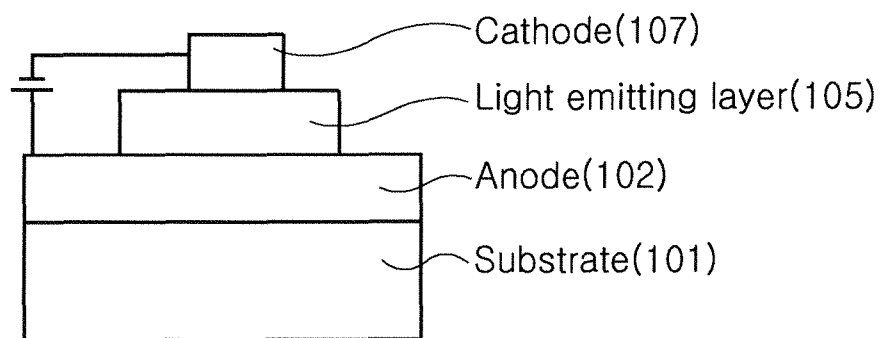


[Figure 2]

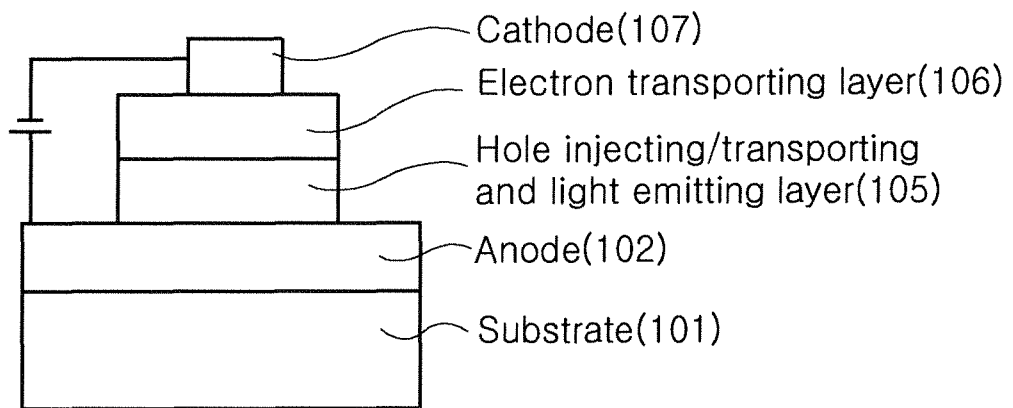

[Figure 3]

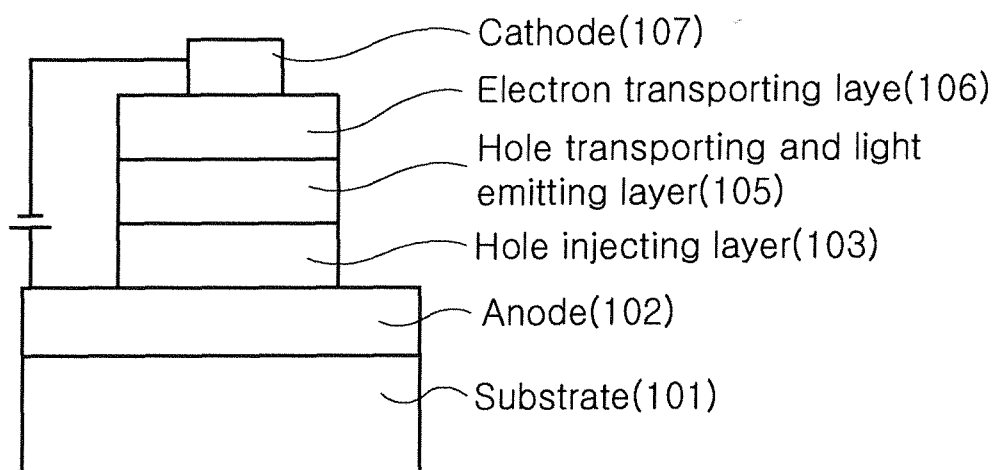

[Figure 4]

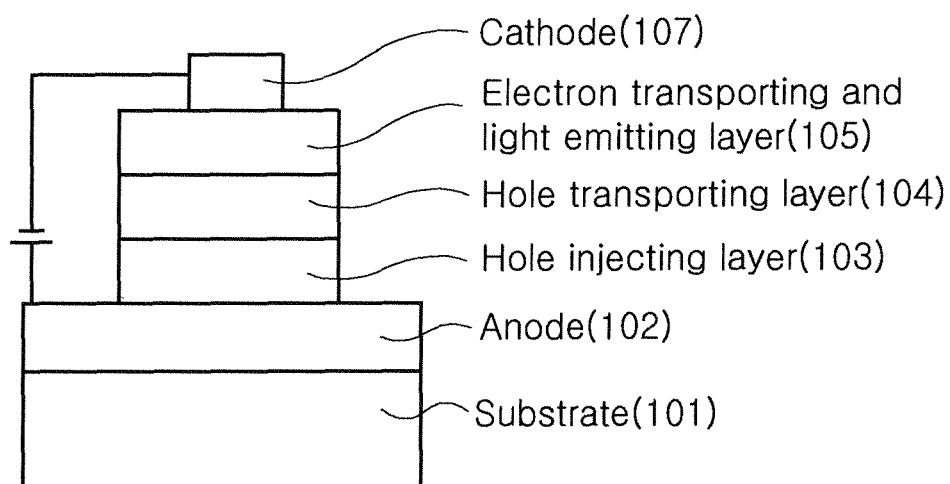

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 1020110056777 [0001]

专利名称(译)	新型化合物和使用它的有机电子器件		
公开(公告)号	EP2719742A4	公开(公告)日	2015-02-18
申请号	EP2012800151	申请日	2012-06-12
[标]申请(专利权)人(译)	乐金化学股份有限公司		
申请(专利权)人(译)	LG化学有限公司.		
当前申请(专利权)人(译)	LG化学有限公司.		
[标]发明人	SHIN CHANGHWAN KIM KONGKYEOM KWON HYOK JOON LEE DONG HOON LEE JINYOUNG JANG BOONJAE JANG JUNGI LEE HYUNGJIN		
发明人	SHIN, CHANGHWAN KIM, KONGKYEOM KWON, HYOK JOON LEE, DONG HOON LEE, JINYOUNG JANG, BOONJAE JANG, JUNGI LEE, HYUNGJIN		
IPC分类号	C09K11/06 H01L51/50 C07D487/04 C09B57/00 H01L51/00 H05B33/10		
CPC分类号	C07D487/04 C07F9/6561 C09B57/00 C09K11/06 C09K2211/1007 C09K2211/1011 C09K2211/1014 C09K2211/1044 H01L51/0052 H01L51/0058 H01L51/006 H01L51/0068 H01L51/0072 H01L51/0077 H01L51/0081 H01L51/5072 H05B33/10 Y02E10/549 Y10S428/917 H01L51/0062 H01L51/5056 H01L51/5088 H01L51/5092		
优先权	1020110056777 2011-06-13 KR		
其他公开文献	EP2719742A2 EP2719742B1		
外部链接	Espacenet		

摘要(译)

本发明提供新化合物和使用其的有机电子器件。根据本发明的化合物可以在包括有机发光器件的有机电子器件中用作空穴注入，空穴传输，电子注入和传输，以及发光材料等，并且根据本发明的有机电子器件在效率，驱动电压和使用寿命方面表现出优异的性能。

