



(11) **EP 3 518 223 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
31.07.2019 Bulletin 2019/31

(21) Application number: **18856261.5**

(22) Date of filing: **29.08.2018**

(51) Int Cl.:
G09G 3/3208 (2016.01) **G09F 9/30** (2006.01)
G09F 9/302 (2006.01) **G09G 3/20** (2006.01)
H01L 27/32 (2006.01) **H01L 51/50** (2006.01)
H04N 9/30 (2006.01) **H04N 9/64** (2006.01)

(86) International application number:
PCT/JP2018/031871

(87) International publication number:
WO 2019/054178 (21.03.2019 Gazette 2019/12)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(71) Applicant: **Sony Corporation**
Tokyo 108-0075 (JP)

(72) Inventor: **INOUE, Yasuo**
Tokyo 141-8610 (JP)

(74) Representative: **2SPL Patentanwälte PartG mbB**
Postfach 15 17 23
80050 München (DE)

(30) Priority: **12.09.2017 JP 2017175002**


(54) **DISPLAY DEVICE AND SIGNAL PROCESSING DEVICE**

(57) The present technology relates to a display device and a signal processing device that have made it possible to actively utilize maximumly a color gamut that a display panel can express.

Provided is a display device, including: a display section in which display pixels that each include a first subpixel, a second subpixel, and a third subpixel that emit three-basic-color light and a fourth subpixel that emits non-basic-color light are arranged two-dimensionally; a first signal processing section that expands a video signal being input and corresponding to the basic-color light and

adapts the video signal to a color gamut that the display section can express; and a second signal processing section that converts an expanded video signal being the video signal having been expanded into a first signal, a second signal, and a third signal that correspond to the basic-color light and a fourth signal that corresponds to the non-basic-color light, and outputs the signals to the display section. The present technology can be applied to, for example, a self-light-emission type display device, such as an organic EL display device.

FIG. 10

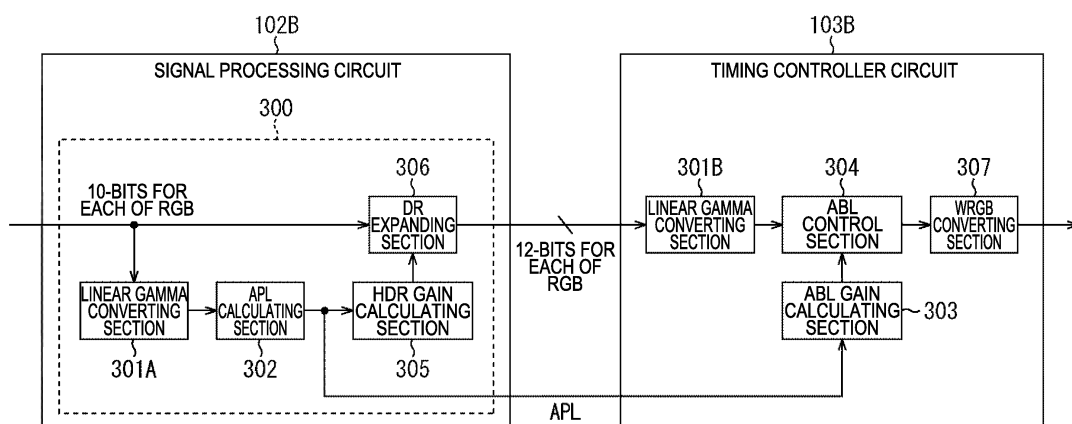

EP 3 518 223 A1

Description

Technical Field

5 **[0001]** The present technology relates to a display device and a signal processing device, and, in particular, relates to a display device and a signal processing device that have made it possible to actively utilize maximumly a color gamut that a display panel can express.

Background Art

10 **[0002]** In recent years, as a light emitting element in which an element itself emits light upon application of a voltage, advanced has been the development of self-light-emission type display devices such as an organic EL display device etc. that use an organic light emitting diode (OLED: Organic Light Emitting Diode) to which phenomenon called organic electroluminescence (organic EL) has been applied.

15 **[0003]** As the technology with regard to an organic EL display device, for example, the technology disclosed in Patent Literature 1 has been known. In Patent Literature 1, the technology for complementing the lowering of light emission luminance in association with deterioration of the light emission efficiency of a light emitting element, has been disclosed.

Citation List

20

Patent Literature

[0004]

25 Patent Literature 1: JP 2012-58634A

Disclosure of Invention

Technical Problem

30

[0005] Incidentally, in the self-light-emission type display devices, there is one in which each pixel includes four sub-pixels, i.e., subpixels of red (R), green (G), blue (B), and white (W).

35 **[0006]** In addition to subpixels of red (R), green (G), and blue (B) that emit basic-color light, by adding a subpixel of white (W), it becomes possible to expand a color expression range of each pixel. However, a technical system for actively utilizing maximumly a color gamut capable of being expressed by such a display panel has not been established.

[0007] The present technology has been achieved in view of such a situation, and makes it possible to actively utilize maximumly a color gamut that a display panel can express.

Solution to Problem

40

[0008] A display device of one aspect of the present technology is a display device, including: a display section in which display pixels that each include a first subpixel, a second subpixel, and a third subpixel that emit three-basic-color light and a fourth subpixel that emits non-basic-color light are arranged two-dimensionally; a first signal processing section that expands a video signal being input and corresponding to the basic-color light and adapts the video signal to a color gamut that the display section can express; and a second signal processing section that converts an expanded video signal being the video signal having been expanded into a first signal, a second signal, and a third signal that correspond to the basic-color light and a fourth signal that corresponds to the non-basic-color light, and outputs the signals to the display section.

45 **[0009]** In the display device of one aspect of the present technology, a video signal being input and corresponding to the basic-color light is expanded, and is adapted to a color gamut that a display section, in which display pixels that each include a first subpixel, a second subpixel, and a third subpixel that emit three-basic-color light and a fourth subpixel that emits non-basic-color light are arranged two-dimensionally, can express. An expanded video signal being the video signal having been expanded is converted into a first signal, a second signal, and a third signal that correspond to the basic-color light and a fourth signal that corresponds to the non-basic-color light, and the signals are output to the display section.

55 **[0010]** A signal processing device of one aspect of the present technology is a signal processing device, including: a signal processing section that expands a video signal that is input, and outputs an expanded video signal adapted to a color gamut that a display section can express. In the display section, display pixels that each include a first subpixel,

a second subpixel, and a third subpixel that emit three-basic-color light and a fourth subpixel that emits non-basic-color light are arranged two-dimensionally, and the video signal is a signal corresponding to the basic-color light.

[0011] In the signal processing device of one aspect of the present technology, a video signal that is input is expanded, and an expanded video signal adapted to a color gamut that a display section can express is output. At this time, in the display section, display pixels that each include a first subpixel, a second subpixel, and a third subpixel that emit three-basic-color light and a fourth subpixel that emits non-basic-color light are arranged two-dimensionally, and the video signal is a signal corresponding to the basic-color light.

[0012] The display device and signal processing device of one aspect of the present technology may be an independent device, or may be an internal block constituting one device.

Advantageous Effects of Invention

[0013] According to one aspect of the present technology, a color gamut capable being expressed by a display panel can be actively utilized maximumly.

[0014] In this connection, the effects described in here are not necessarily limited, and may be any of the effects described in the present disclosure.

Brief Description of Drawings

[0015]

FIG. 1 is a diagram showing an example of an interface of a substrate in a liquid crystal display device.

FIG. 2 is an illustration showing an example of a color expression range of an RGB pixel.

FIG. 3 is a block diagram showing an example of a constitution of one embodiment of a display device to which the present technology has been applied.

FIG. 4 is a diagram showing an example of an interface of a substrate in an organic EL display device.

FIG. 5 is an illustration showing an example of a color expression range of a WRGB pixel.

FIG. 6 is a block diagram showing an example of a constitution of a signal processing circuit and a timing controller circuit in the current state.

FIG. 7 is a schematic diagram showing an example of conversion from an RGB signal to a WRGB signal in a timing controller circuit in the current state.

FIG. 8 is a diagram showing a relationship between an average luminance level (APL) and a luminance of a display panel.

FIG. 9 is a schematic diagram expressing conceptually a push-up region in the case of adopting a constitution of an LSI in the current state.

FIG. 10 is a block diagram showing an example of a constitution of a signal processing circuit and a timing controller circuit to which the present technology has been applied.

FIG. 11 is a schematic diagram showing an example of conversion from an RGB signal to a WRGB signal in a timing controller circuit to which the present technology has been applied.

FIG. 12 is a schematic diagram expressing conceptually a push-up region in the case of adopting an LSI to which the present technology has been applied.

Mode(s) for Carrying Out the Invention

[0016] Hereinafter, with reference to drawings, an embodiment of the present technology will be described. It should be noted that description will be given in the following order.

[0017]

1. Embodiment of present technology

2. Modified example

<1. Embodiment of present technology>

[0018] As a thin type flat display device (for example, thin type television receiver), for example, self-light-emission type display devices, such as a liquid crystal display device using liquid crystal and an organic EL display device using organic electroluminescence (organic EL), are put into practical use.

[0019] In the liquid crystal display device, there is provided back light and the arrangement of liquid crystal molecules are adapted to be changed by the application of voltage such that light from the back light is made to pass through or

to be blocked off, whereby a video image is displayed.

(Constitution of liquid crystal display device)

5 **[0020]** FIG. 1 shows an example of an interface (I/F) between a signal processing circuit 902 and a timing controller circuit 903 each being an LSI (Large Scale Integration) disposed in a liquid crystal display device. In this connection, in FIG. 1, the signal processing circuit 902 is disposed in a TV main substrate 921, and the timing controller circuit 903 is disposed in a TCON (Timing Controller) substrate 922.

10 **[0021]** In FIG. 1, a display panel 904 is constituted as a liquid crystal display panel. In this liquid crystal display panel, a plurality of pixels (display pixels) is arranged in a two-dimensional form (matrix form), and each pixel includes three subpixels of red (R), green (G), and blue (B). That is, in the display panel 904 being a liquid crystal display panel, each pixel arranged in the two-dimensional form is made an RGB pixel.

15 **[0022]** Here, since each pixel arranged in the display panel 904 is constituted as an RGB pixel, the signal processing circuit 902 can transmit a signal in which 10 bits are allocated to each of R/G/B, as an RGB signal that turns on each pixel arranged in the display panel 904, to the timing controller circuit 903 via a predetermined interface (I/F) .

[0023] In this way, in the liquid crystal display device, as the interface (I/F) between the signal processing circuit 902 on the TV main substrate 921 side and the timing controller circuit 903 on the TCON substrate 922 side, an interface (I/F) that transmits a signal including 10-bits for each of R/G/B becomes standard.

20 **[0024]** In this connection, as an interface (I/F) of a thin type flat display device (for example, thin type television receiver), V-by-One (registered trademark) has been widely known. Moreover, a video signal output from the signal processing circuit 902 can be made, for example, a video signal corresponding to a 4K video image or a 2K video image.

(Color expression of RGB pixel)

25 **[0025]** FIG. 2 shows an example of a color expression range of an RGB pixel to be arranged in the display panel 904 in FIG. 1.

30 **[0026]** In FIG. 2, the color expression range of an RGB pixel is expressed with an HSV color space. The HSV model is a color space including three components of hue (Hue), saturation (Saturation), and lightness (Value). Here, the hue means the kind of color, the saturation means the vividness of color, and the lightness means the lightness of a color, respectively.

[0027] In FIG. 2, the HSV color space is expressed by a column 41. In this column 41 of the HSV color space, an azimuth direction represents hue H (Hue), a radial direction represents saturation S (Saturation), and an axial direction represents lightness V (Value). In this connection, in FIG. 2, the illustration is made by cutting out a part of the cross section of the hue H in the HSV color space.

35 **[0028]** In this way, the column 41 of the HSV color space corresponds to a range of color capable of being expressed by three subpixels of red (R), green (G), and blue (B).

40 **[0029]** In the above, the liquid crystal display device has been mentioned. In recent years, the development of self-light-emission type display devices such as an organic EL display device, have been advanced. Unlike the liquid crystal display devices that need back light, the self-light-emission type display devices of this kind do not need back light, because an element itself emits light. Accordingly, as compared with the liquid crystal display devices, they are deemed as being advantageous in a matter capable of being constituted to be thinner and also in aspects of image quality, viewing angle, and the like. Hereinafter, as the self-light-emission type display devices, particularly, an organic EL display device will be described.

45 (Constitution example of display device)

[0030] FIG. 3 is a block diagram showing an example of a constitution of one embodiment of a display device to which the present technology has been applied.

50 **[0031]** A display device 10 shown in FIG. 3 is constituted, for example, as a self-light-emission type display device, such as a thin type television receiver and a business-use display device.

[0032] For example, the display device 10 is constituted as an organic EL display device including an organic EL display panel that uses an organic light emitting diode (OLED) applied with the phenomenon of organic electroluminescence (organic EL) as a light emitting element in which an element itself emits light upon application of a voltage.

55 **[0033]** In FIG. 3, the display device 10 includes a video generator 101, a signal processing circuit 102, a timing controller circuit 103, and a display panel 104.

[0034] For example, on the basis of signals input from an external device, such as signals acquired by a process in a tuner, a demodulator, and the like, the video generator 101 generates video signals, and supplies them to the signal processing circuit 102. This video signal is an RGB signal including the luminance information of red (R), green (G), and

blue (B).

[0035] The signal processing circuit 102 is constituted as, for example, a signal processing LSI for TV, and so on. The signal processing circuit 102 applies predetermined signal processing for realizing, for example, high definition, a wide color gamut, high luminance, high contrast, and the like for a video signal supplied from the video generator 101, and supplies the video signal acquired as a result to the timing controller circuit 103.

[0036] The timing controller circuit 103 is constituted as a TCON (Timing Controller) LSI for a panel, or the like, and performs timing control of a display action in the display panel 104. Moreover, the timing controller circuit 103 processes the video signals supplied from the signal processing circuit 102, and outputs them to the display panel 104.

[0037] The display panel 104 is constituted as, for example, a self-light-emission display section, such as an organic EL display panel. This self-light-emission display section includes a pixel, as a display pixel, including a light emitting element that performs self-light-emission in accordance with an amount of an electric current. The display panel 104 displays a video image corresponding to video signals in accordance with the control from the timing controller circuit 103.

[0038] The display device 10 is constituted as mentioned in the above.

(Constitution of organic EL display device)

[0039] FIG. 4 shows an example of an interface (I/F) between a signal processing circuit 102 and a timing controller circuit 103, which are an LSI disposed in the display device 10 as an organic EL display device. In this connection, in FIG. 4, the signal processing circuit 102 is disposed in the TV main substrate 21, and the timing controller circuit 103 is disposed in the TCON substrate 22.

[0040] In FIG. 4, the display panel 104 is constituted as an organic EL display panel. In this organic EL display panel, a plurality of pixels (display pixels) is arranged in a two-dimension form (matrix form), and each pixel includes four subpixels of red (R), green (G), blue (B), and white (W). That is, in the display panel 104 being an organic EL display panel, each pixel arranged in the two-dimension form is made a WRGB pixel.

[0041] In this connection, the reason why a subpixel of white (W) is provided as a subpixel of each pixel in addition to subpixels of red (R), green (G), and blue (B), is derived from unique circumstances due to the manufacturability of the organic EL display panel. In the present situation, each pixel of a mass-produced large-sized organic EL display panel includes a WRGB pixel.

[0042] Here, each pixel arranged in the display panel 104 is constituted as a WRGB pixel. However, as an RGB signal for turning on each pixel arranged in the display panel 104, for example, the signal processing circuit 102 can transmit a signal in which 12 bits are allocated to each of R/G/B, to the timing controller circuit 103 via a predetermined interface (I/F).

[0043] At this time, although each pixel arranged in the display panel 104 becomes a WRGB pixel, a video signal output from the signal processing circuit 102 has become an RGB signal. For this reason, in the timing controller circuit 103, by generating a WRGB signal on the basis of an RGB signal from the signal processing circuit 102, it is possible to turn on each pixel being a WRGB pixel arranged in the display panel 104.

[0044] In this connection, also in the display device 10 as an organic EL display device, V-by-One (registered trademark) can be employed as an interface (I/F) between the signal processing circuit 102 on the TV main substrate 21 side and the timing controller circuit 103 on the TCON substrate 22 side. Moreover, a video signal output from the signal processing circuit 102 can be made, for example, a video signal corresponding to a 4K video image or a 2K video image.

(Color expression of WRGB pixel)

[0045] FIG. 5 shows an example of a color expression range of a WRGB pixel to be arranged in the display panel 104 in FIG. 4.

[0046] In FIG. 5, similarly to the color expression range of the RGB pixel shown in FIG. 2, the color expression range of a WRGB pixel is expressed with the HSV color space.

[0047] In FIG. 5, a column 41 in the HSV color space corresponds to a range of color capable of being expressed by three subpixels of red (R), green (G), and blue (B). Moreover, in FIG. 5, a cone 42 formed on the column 41 in the HSV color space corresponds to a range of color capable of being expressed by a subpixel of white (W).

[0048] Namely, in a range of color capable of being expressed by subpixels that emit three-basic-color light (red light, green light, and blue light) of red (R), green (G), and blue (B) and a subpixel that emits one non-basic-color light of white (W) in each pixel arranged in the display panel 104, in addition to a region 51 of a column-shaped portion in the diagram, a region 52 of a cone-shaped portion formed on the column is also included.

[0049] In this way, by making a subpixel of white (W) emit light, it becomes possible to make the lightness V expressed in the axial direction in the column 41 of the HSV color space, higher. Accordingly, as compared with the with an RGB pixel, the WRGB pixel can expand a color gamut capable of being expressed.

[0050] Next, description is given for a detailed constitution of the signal processing circuit 102 and the timing controller circuit 103, which are an LSI disposed in the display device 10 shown in FIG. 3. Here, a constitution of the LSI in the

current state is described with reference to FIG. 6 through FIG. 9, and, thereafter, with reference to FIG. 10 through FIG. 12, a constitution of the LSI to which the present technology has been applied will be described.

(Constitution of LSI in current state)

5

[0051] First, a constitution of the LSI in the current state is described. FIG. 6 is a block diagram showing an example of a constitution of the signal processing circuit 102A and the timing controller circuit 103A that constitute the LSI in the current state.

10

[0052] In FIG. 6, the signal processing circuit 102A performs predetermined signal processing to a video signal that is input there, and supplies a signal including 10-bits for each of RGB acquired as a result to the timing controller circuit 103A as a video signal. The timing controller circuit 103A performs control for displaying the video signal supplied from the signal processing circuit 102A on the display panel 104.

15

[0053] The timing controller circuit 103A includes a linear gamma converting section 201, an APL calculating section 202, an ABL gain calculating section 203, an ABL control section 204, an HDR gain calculating section 205, a DR expanding section 206, and a WRGB converting section 207.

20

[0054] The linear gamma converting section 201 performs signal processing for converting a video signal (a signal including 10-bit for each of RGB) in which an output has a gamma characteristic relative to an input, so as to have a linear characteristic from the gamma characteristic. The linear gamma converting section 201 supplies the video signal after the conversion to the APL calculating section 202 and the ABL control section 204.

25

[0055] In this connection, in the linear gamma converting section 201, by performing the signal processing such that an output has a linear characteristic relative to an input, a video signal is handled in a linear space. Accordingly, various kinds of processing for a video image to be displayed on the display panel 104 constituted as an organic EL display panel, become easy.

30

[0056] On the basis of the video signal supplied from the linear gamma converting section 201, the APL calculating section 202 calculates an average luminance level (APL: Average Picture Level), and supplies it to the ABL gain calculating section 203 and the HDR gain calculating section 205.

35

[0057] Here, the average luminance level (APL) is one that represents an average luminance level of a frame image acquired from a video signal. For example, the average luminance level (APL) is acquired from an average value etc. of the luminance of red (R), green (G), and blue (B) in a frame image.

40

[0058] On the basis of an average luminance level (APL) supplied from the APL calculating section 202, the ABL gain calculating section 203 calculates a gain (hereinafter, also referred to as an ABL gain) for controlling (ABL: Automatic Brightness Limiter) the luminance level of a video signal, and supplies it to the ABL control section 204.

45

[0059] On the basis of the ABL gain supplied from the ABL gain calculating section 203, the ABL control section 204 controls (limits) the luminance level of a video signal supplied from the linear gamma converting section 201, and supplies it to the DR expanding section 206.

50

[0060] Here, an ABL gain becomes information for controlling (limiting) the luminance level of a video signal. Namely, in the display panel 104 constituted as an organic EL display panel, for example, since an electric power load for an electric power source depends on the lightness of a video image (picture pattern) to be displayed on the organic EL display panel, the control (ABL) of a luminance level on the basis of an ABL gain is made to be performed for the whole panel. That is, in here, an optimal luminance level will be detected, and the limit processing of luminance relative to a video signal will become to be performed.

55

[0061] On the basis of an average luminance level (APL) supplied from the APL calculating section 202, the HDR gain calculating section 205 calculates a gain (hereinafter, also referred to an HDR gain) for expanding the dynamic range of a video signal and acquiring an expanded video signal, and supplies it to the DR expanding section 206.

[0062] On the basis of the HDR gain supplied from the HDR gain calculating section 205, the DR expanding section 206 expands the dynamic range (DR: Dynamic Range) of a video signal (video signal having been subjected to the ABL control) supplied from the ABL control section 204, and supplies the expanded video signal acquired as a result to the WRGB converting section 207.

[0063] The WRGB converting section 207 converts the expanded video signal (RGB signal) supplied from the DR expanding section 206 into a WRGB signal, and outputs it.

[0064] The converting process in here is one that converts an RGB signal including three basic colors of red (R), green (G), and blue (B) into a WRGB signal that includes three basic colors of red (R), green (G), and blue (B) and one non-basic color of white (W).

[0065] FIG. 7 shows schematically an example of the conversion from an RGB signal to a WRGB signal. In this connection, in FIG. 7, the left side in the diagram shows an RGB signal before the conversion, and the right side in the diagram shows a WRGB signal after the conversion.

[0066] In the WRGB converting section 207, first, the minimum one among the luminance information of three colors of the input RGB signal is made the luminance information of white (W). In this example, since the luminance information

of blue (B) becomes the minimum, it is made the luminance information of white (W).

[0067] Then, in the WRGB converting section 207, by subtracting the luminance information of white (W) from the luminance information of red (R) before the conversion, the luminance information of red (R) after the conversion is acquired. Similarly, by subtracting the luminance information of white (W) from the luminance information of green (G) before the conversion, the luminance information of green (G) after the conversion is acquired, and by subtracting the luminance information of white (W) from the luminance information of blue (B) before the conversion, the luminance information (in this example, zero) of blue (B) after the conversion is acquired.

[0068] The WRGB converting section 207 outputs the luminance information of red (R), green (G), blue (B), and white (W) acquired by doing in this way, as a WRGB signal.

[0069] The LSI in the current state is constituted as mentioned in the above.

[0070] Here, FIG. 8 shows a relationship (characteristic information) between an average luminance level (APL) and the luminance of the display panel 104. In FIG. 8, a transverse axis represents an average luminance level (APL), and is made a range of 0 to 100 (%). Moreover, a longitudinal axis represents the luminance (Luminance) of the display panel 104, and its unit is set to cd/m^2 .

[0071] In FIG. 8, as shown with a curve 61, a relationship between an average luminance level (APL) and the luminance has become an inversely proportional relation, in which, as the value of an average luminance level (APL) is smaller, the value of the luminance becomes larger, while as the value of an average luminance level (APL) is larger, the value of the luminance becomes smaller.

[0072] By utilizing such a relationship, in the ABL control section 204, on the basis of the value of the ABL gain from the ABL gain calculating section 203, as the value of an average luminance level (APL) is larger, the control can be performed in such a way that the luminance level of a video signal is made to lower. For example, in the case where an average luminance level (APL) being 100% has been calculated, the luminance being 500cd/m^2 will be dropped up to 150cd/m^2 . In this connection, usually, an average luminance level (APL) is made about 25%.

[0073] Namely, as a video image (picture pattern) displayed on the display panel 104 constituted as an organic EL display panel becomes brighter (brilliant more), a load is applied more to a panel or a power source. Accordingly, in here, as an average luminance level (APL) becomes higher, the level of the luminance of a video signal is made to be lowered gradually.

[0074] For example, in the case where the luminance corresponding to a range of color capable of being expressed by subpixels of red (R), green (G), and blue (B) in the display panel 104 becomes 500cd/m^2 as shown with a first line 71 shown in the horizontal direction in the diagram, when 100% has been calculated as an average luminance level (APL), an ABL gain is acquired as follows.

[0075] Namely, at this time, since an average luminance level (APL) becomes 100%, it is necessary to limit the luminance level up to the luminance being 150cd/m^2 . Accordingly, the ABL gain calculating section 203 supplies a gain being 0.3 ($150/500$) as the ABL gain to the ABL control section 204. With this, on the basis of the ABL gain being 0.3, the ABL control section 204 controls (limits) the luminance level of a video signal.

[0076] Here, in FIG. 9, a color gamut capable of being expressed by the display panel 104 is expressed in the HSV color space. As mentioned in the above, in this HSV color space, the azimuth direction represents the hue H, the radial direction represents the saturation S, and the axial direction represents the lightness V. A first line 71 in FIG. 9 corresponds to the first line 71 indicated in the above-mentioned FIG. 8, and a range of color capable of being expressed by subpixels of red (R), green (G), and blue (B) in each pixel arranged in the display panel 104 corresponds to a portion of a column 41 (a range in which the lightness V is V_1 or less) in the diagram.

[0077] On the other hand, as mentioned in the above, in a range of color capable of being expressed by subpixels of red (R), green (G), and blue (B) and a subpixel of white (W) in each pixel arranged in the display panel 104, in addition to the portion of the column 41 in the diagram, a portion of a cone 42 formed on the column is also included.

[0078] In this way, by making a subpixel of white (W) emit light, it is possible to raise the lightness V to V_2 higher than V_1 . That is, in addition to subpixels of red (R), green (G), and blue (B), by providing a subpixel of white (W), it is possible to expand a color gamut capable of being expressed by the display panel 104.

[0079] The HDR gain calculating section 205 generates an HDR gain for making it possible to utilize the color gamut expanded by a subpixel of white (W), and supplies it to the DR expanding section 206.

[0080] Here, as shown in FIG. 8, the utilization of the color gamut (hereinafter, also referred to a push-up region) expanded by a pixel of white (W) is limited to, for example, a case where the value of an average luminance level (APL) becomes within a range of 0 to 25% (within a range of a region 62 in the diagram). The reason for that is to ensure that the push-up region is utilized only in the case where the value of an average luminance level (APL) is low and electric power has some extra power (in the case where a video image is dark to some extent), because, as a video image (picture pattern) is brighter, a load is applied more to a panel and a power source.

[0081] For example, in FIG. 8, in the case where the value of an average luminance level (APL) becomes less than 25%, the HDR gain calculating section 205 makes the HDR gain larger gradually such that a luminance level becomes higher gradually, until the value of the average luminance level (APL) becomes 10%. For example, in the case where

the value of an average luminance level (APL) becomes 25%, the HDR gain is made 1.0 (500/500). However, in the case where the value of an average luminance level (APL) becomes 10%, the HDR gain is made 1.6 (800/500).

[0082] Moreover, for example, in the case where the value of an average luminance level (APL) becomes 10% or less, the HDR gain calculating section 205 calculates the HDR gain being 1.6 (800/500) as a fixed value.

[0083] In this way, in the case where the value of an average luminance level (APL) becomes less than a predetermined threshold (in this example, 25%), an HDR gain is calculated such that the push-up region becomes utilizable, and the dynamic range of a video signal is expanded, whereby it is possible to utilize the color gamut expanded by a subpixel of white (W).

[0084] Here, as shown in FIG. 9, in a constitution of an LSI in the current state, a signal including 10-bits for each of RGB to be input from the signal processing circuit 102A to the timing controller circuit 103A corresponds to a range of color capable of being expressed by subpixels of red (R), green (G), and blue (B) in each pixel arranged in the display panel 104 in a portion (a range in which the lightness V is V1 or less) of the column 41 corresponding to the first line 71.

[0085] Moreover, in the timing controller circuit 103A, in the case where the value of an average luminance level (APL) becomes less than 25%, for example, by a matter that the dynamic range of a video signal (signal including 10-bits for each of RGB) is expanded on the basis of an HDR gain being 1.6, it is possible to expand a color gamut capable of being expressed so as to include a range of color capable of being expressed by a subpixel of white (W) in a portion (a range in which the lightness V is from V1 to V2) of a cone 42 corresponding to a second line 72.

[0086] In this way, in a constitution of an LSI in the current state, by the timing controller circuit 103A disposed to follow the signal processing circuit 102A, a function for utilizing the push-up region that becomes utilizable by providing a subpixel of white (W), is realized.

[0087] In this connection, in a constitution of an LSI in the current state, in the case where the value of an average luminance level (APL) becomes less than a predetermined threshold (in this example, 25%), a function for utilizing the push-up region that becomes utilizable by providing a subpixel of white (W), is realized. On the other hand, in the case where the value of an average luminance level (APL) exceeds a predetermined threshold (in this example, 25%), a limit function (ABL) of luminance for a video signal is realized.

(Constitution of LSI in present technology)

[0088] Next, a constitution of an LSI to which the present technology has been applied is described. FIG. 10 is a block diagram showing an example of a constitution of a signal processing circuit 102B and a timing controller circuit 103B that constitute an LSI to which the present technology has been applied.

[0089] In FIG. 10, the signal processing circuit 102B performs predetermined signal processing for a video signal supplied from the video generator 101. The signal processing circuit 102B includes a signal processing section 300. This signal processing section 300 includes a linear gamma converting section 301A, an APL calculating section 302, an HDR gain calculating section 305, and a DR expanding section 306.

[0090] A video signal (signal including 10-bits for each of RGB) is input into the signal processing section 300, and supplied to the linear gamma converting section 301A and the DR expanding section 306.

[0091] The linear gamma converting section 301A performs signal processing for converting a video signal in which an output has a gamma characteristic relative to an input, so as to have a linear characteristic from the gamma characteristic. The linear gamma converting section 301A supplies the video signal after the conversion to the APL calculating section 302.

[0092] On the basis of the video signal supplied from the linear gamma converting section 301A, the APL calculating section 302 calculates an average luminance level (APL), and supplies it to the HDR gain calculating section 305 and the timing controller circuit 103B (the ABL gain calculating section 303 of it).

[0093] On the basis of the average luminance level (APL) supplied from the APL calculating section 302, the HDR gain calculating section 305 calculates an HDR gain for expanding a dynamic range of a video signal and acquiring an expanded video signal, and supplies it to the DR expanding section 306. Here, the video signal is made a signal including 10-bits for each of RGB, and the expanded video signal is made a signal including 12-bits for each of RGB.

[0094] On the basis of the HDR gain supplied from the HDR gain calculating section 305, the DR expanding section 306 expands the dynamic range (DR) of the video signal (signal including 10-bits for each of RGB) that has been input there, and supplies the expanded video signal (signal including 12-bits for each of RGB) acquired as a result to the timing controller circuit 103B (the linear gamma converting section 301B of it).

[0095] Moreover, in FIG. 10, the timing controller circuit 103B includes a linear gamma converting section 301B, an ABL gain calculating section 303, an ABL control section 304, and a WRGB converting section 307. The expanded video signal (signal including 12-bits for each of RGB) and an average luminance level (APL) that are supplied from the signal processing circuit 102B, are input into the timing controller circuit 103B, and are supplied to the linear gamma converting section 301B and the ABL gain calculating section 303.

[0096] The linear gamma converting section 301B performs signal processing for converting the expanded video signal

in which an output has a gamma characteristic relative to an input, so as to have a linear characteristic from the gamma characteristic. The linear gamma converting section 301A supplies the expanded video signal after the conversion to the ABL control section 304.

[0097] On the basis of an average luminance level (APL) supplied from the signal processing circuit 102B (the APL calculating section 302 of it), the ABL gain calculating section 303 calculates a gain (ABL gain) for controlling (ABL) the luminance level of the expanded video signal, and supplies it to the ABL control section 304.

[0098] On the basis of the ABL gain supplied from the ABL gain calculating section 303, the ABL control section 304 controls (limits) the luminance level of the expanded video signal supplied from the linear gamma converting section 301B, and supplies it to the WRGB converting section 307.

[0099] The WRGB converting section 307 converts the expanded video signal (RGB signal having been subjected to the ABL control) supplied from the ABL control section 304 into a WRGB signal, and outputs it.

[0100] The conversion process in here is one that converts an RGB signal including three basic colors of red (R), green (G), and blue (B) into a WRGB signal including three basis colors of red (R), green (G), and blue (B) and one non-basic color of white (W).

[0101] FIG. 11 shows schematically an example of conversion from an RGB signal to a WRGB signal. In this connection, in FIG. 11, the left side in the diagram represents an RGB signal before the conversion, and the right side in the diagram represents a WRGB signal after the conversion.

[0102] In the WRGB converting section 307, first, the minimum one among the luminance information of three colors of the input RGB signal is made the luminance information of white (W). In this example, since the luminance information of blue (B) becomes the minimum, it is made the luminance information of white (W).

[0103] Then, in the WRGB converting section 307, by subtracting the luminance information of white (W) from the luminance information of red (R) before the conversion, the luminance information of red (R) after the conversion is acquired. Similarly, by subtracting the luminance information of white (W) from the luminance information of green (G) before the conversion, the luminance information of green (G) after the conversion is acquired, and by subtracting the luminance information of white (W) from the luminance information of blue (B) before the conversion, the luminance information of blue (B) after the conversion is acquired.

[0104] The WRGB converting section 307 outputs the luminance information of red (R), green (G), blue (B), and white (W) acquired by doing in this way, as a WRGB signal.

[0105] In this connection, in the case of comparing the example of the conversion in FIG. 11 with the example of the conversion in FIG. 7 mentioned in the above, the luminance information of each of red (R), green (G), and blue (B) has increased, and the luminance information of white (W) has also increased. However, there is no change in a matter that, by subtracting the luminance information of white (W) from the luminance information of each of red (R), green (G), and blue (B) before the conversion, the luminance information of each of red (R), green (G), and blue (B) after the conversion is acquired. Moreover, in FIG. 7 and FIG. 11, a line 81 represents an upper limit value.

[0106] The LSI to which the present technology has been applied is constituted as mentioned in the above.

[0107] Here, also in the signal processing circuit 102B and the timing controller circuit 103B each having been shown in FIG. 10, in the case of utilizing a relationship (characteristic information) between the average luminance level (APL) and the luminance of the display panel 104 in FIG. 8 mentioned in the above, for example, the following control will be performed.

[0108] Namely, the HDR gain calculating section 305 generates an HDR gain for making it possible to utilize a color gamut expanded by a subpixel of white (W), and supplies it to the DR expanding section 306.

[0109] Here, as shown in FIG. 8, the utilizing of the push-up region being the color gamut expanded by the pixel of white (W) is limited to, for example, a case where the value of an average luminance level (APL) becomes within a range of 0 to 25%. The reason for that is to ensure that the push-up region is utilized only in the case where the value of an average luminance level (APL) is low and electric power has some extra power, because, as a video image (picture pattern) is brighter, a load is applied more to a panel and a power source.

[0110] For example, in FIG. 8, in the case where the value of an average luminance level (APL) becomes less than 25%, the HDR gain calculating section 305 makes the HDR gain larger gradually such that the luminance level becomes higher gradually, until the value of the average luminance level (APL) becomes 10%. For example, in the case where the value of an average luminance level (APL) becomes 25%, the HDR gain is made 1.0 (500/500). However, in the case where the value of an average luminance level (APL) becomes 10%, the HDR gain is made 1.6 (800/500).

[0111] Moreover, for example, in the case where the value of an average luminance level (APL) becomes 10% or less, the HDR gain calculating section 305 calculates the HDR gain being 1.6 (800/500) as a fixed value.

[0112] In this connection, in here, the case where the HDR gain is calculated on the basis of the value of an average luminance level (APL), has been exemplified. However, at the time of calculating the HDR gain, in addition to the measurement of an average luminance level (APL), for example, a video image analyzing process, such as histogram measurement, may be performed, and then, its analysis result may be made to be reflected on the value of the HDR gain. Namely, in here, by analyzing what kind of image (for example, an image of a star in the night sky) a frame image

acquired from a video signal is, it is possible to calculate an HDR gain corresponding to the analysis result.

[0113] In this way, in the case where the value of an average luminance level (APL) becomes less than a predetermined threshold (in this example, 25%), an HDR gain is calculated such that a push-up region becomes utilizable, and the dynamic range of a video signal is expanded, whereby it becomes possible to utilize the color gamut expanded by a subpixel of white (W).

[0114] Here, in FIG. 12, a color gamut capable of being expressed by the display panel 104 is expressed with an HSV color space. As mentioned in the above, in this HSV color space, an azimuth direction represents hue H (Hue), a radial direction represents saturation S (Saturation), and an axial direction represents lightness V (Value). A first line 71 in FIG. 12 corresponds to the first line 71 in FIG. 8 mentioned in the above. A range of color capable of being expressed by subpixels of red (R), green (G), and blue (B) in each pixel arranged in the display panel 104 corresponds to a portion (a range in which brightness V is V1 or less) of a column 41 in the diagram.

[0115] On the other hand, as mentioned in the above, in a range of color capable of being expressed by subpixels of red (R), green (G), and blue (B) and a subpixel of white (W) in each pixel arranged in the display panel 104, in addition to a portion of the column 41 in the diagram, a portion of a cone 42 formed on the column is also included.

[0116] In this way, by making a subpixel of white (W) emit light, it is possible to raise the lightness V to V2 higher than V1. That is, in addition to subpixels of red (R), green (G), and blue (B), by providing a subpixel of white (W), it is possible to expand a color gamut capable of being expressed.

[0117] Here, as shown in FIG. 12, in a constitution of an LSI to which the present technology has been applied, a signal including 10-bits for each of RGB to be input into the DR expanding section 306 of the signal processing circuit 102B corresponds to a range of color capable of being expressed by subpixels of red (R), green (G), and blue (B) in the display panel 104 in a portion (a range in which the lightness V is V1 or less) of the column 41 corresponding to the first line 71.

[0118] Moreover, in the DR expanding section 306, in the case where the value of an average luminance level (APL) becomes less than 25%, for example, by expanding the dynamic range of a video signal (signal including 10-bits for each of RGB) on the basis of an HDR gain being 1.6 and generating an expanded video signal (signal including 12-bits for each of RGB), it is possible to expand a color gamut capable of being expressed so as to include a range of color capable of being expressed by a subpixel of white (W) in a portion (a range in which the lightness V is from V1 to V2) of the cone 42 corresponding to a second line 72.

[0119] In this way, in the constitution of the LSI to which the present technology has been applied, by the signal processing circuit 102B (the HDR gain calculating section 305, the DR expanding section 306, and so on, of it), a function for utilizing the push-up region that becomes utilizable by providing a subpixel of white (W), is realized. In here, a signal including 12-bits for each of RGB is input from the signal processing circuit 102B into the timing controller circuit 103B.

[0120] In this connection, in the timing controller circuit 103B having been shown in FIG. 10, by utilizing the relationship between the average luminance level (APL) and the luminance of the display panel 104 in FIG. 8 mentioned in the above, in the ABL control section 304, on the basis of the value of the ABL gain from the ABL gain calculating section 303, it is possible to perform control in such a way that as the value of an average luminance level (APL) is larger, the luminance level of an expanded video signal is made lower. For example, in the case where an average luminance level (APL) being 100% has been calculated, the luminance being 500 cd/m² is dropped up to 150 cd/m².

[0121] That is, as a video image (picture pattern) displayed on the display panel 104 constituted as an organic EL display panel becomes brighter (brilliant more), a load is applied more to a panel and a power source. Accordingly, in here, as an average luminance level (APL) is becoming higher, the level of the luminance of an expanded video signal is made to be lowered gradually.

[0122] For example, in the case where the luminance corresponding to a range of color capable of being expressed by subpixels of red (R), green (G), and blue (B) in the display panel 104 becomes 500 cd/m², when 100% has been calculated as an average luminance level (APL), the ABL gain is acquired as follows.

[0123] Namely, at this time, since an average luminance level (APL) becomes 100%, it is necessary to limit the luminance level up to the luminance being 150cd/m². Accordingly, the ABL gain calculating section 303 supplies a gain being 0.3 (150/500) as the ABL gain to the ABL control section 304. With this, on the basis of the ABL gain being 0.3, the ABL control section 304 controls (limits) the luminance level of an expanded video signal.

[0124] In this connection, in the constitution of the LSI to which the present technology has been applied, in the case where the value of an average luminance level (APL) becomes less than a predetermined threshold (in this example, 25%), a function for utilizing the push-up region that becomes utilizable by providing a subpixel of white (W), is realized. On the other hand, in the case where the value of an average luminance level (APL) exceeds a predetermined threshold (in this example, 25%), a limit function (ABL) of luminance for a video signal is realized.

[0125] As described in the above, according to the present technology, by expanding a signal including 10-bits for each of RGB to a signal including 12-bits for each of RGB by the signal processing circuit 102B disposed at the former stage of the timing controller circuit 103B, it is possible to actively utilize maximally a color gamut capable of being expressed by the display panel 104 (for example, organic EL display panel) in which WRGB pixels each including four

subpixels of red (R), green (G), blue (B), and white (W) are arranged two-dimensionally as a plurality of pixels (display pixels).

[0126] Namely, in addition to subpixels of red (R), green (G), and blue (B), by providing a subpixel of (W), it becomes possible to expand a color gamut capable of being expressed by the display panel 104. However, in the present technology, by expanding the bits of RGB (for example, 10 bits of each of RGB are expanded to 12 bits of each of RGB) beforehand on the signal processing circuit 102B side, a signal corresponding to a range of color capable of being expressed by a subpixel of white (W) is made to be input into the timing controller circuit 103B.

[0127] In more concrete terms, in the HSV color space in FIG. 12 mentioned in the above, by making a subpixel of white (W) emit light, it is possible to raise the lightness V to V2 higher than V1. However, with regard to this push-up region, for example, it becomes to be expressed by two bits corresponding to increased bits at the time of having expanded 10 bits of each of RGB to 12 bits of each of RGB.

[0128] Here, for example, in the case where a panel maker supplies the display panels 104, such as an organic EL display panel, for a TV (television) manufacturer that manufactures the display device 10 (thin type television receiver), such as an organic EL display device, it is supposed a case in which, a design, manufacture, etc. of the signal processing circuit 102B such as a signal processing LSI etc. used for TV are performed by the TV manufacturer, on the other hand, a design, manufacture, etc. of the timing controller circuit 103B, such as TCON • LSI used for a panel, are performed by the panel maker.

[0129] In such a case, on the TV manufacturer side that performs a design, manufacture, etc. of the signal processing circuit 102B, there is a request to want to realize image quality intended by the concerned TV manufacturer. In the present technology, it is possible to respond to such a request, because, by expanding the bits of RGB on the signal processing circuit 102B side, it is made possible to actively utilize maximally a color gamut capable of being expressed by the display panel 104 (for example, organic EL display panel) in which WRGB pixels are arranged two-dimensionally.

[0130] Moreover, in the present technology, as a result of comparison between the value of an average luminance level (APL) and a threshold, in the case where a frame image becomes dark to some extent (for example, the value of an average luminance level (APL) becomes within a range of 0 to 25%), that is, only in the case where the electric power has some extra power, a color gamut expanded by a subpixel of white (W) is made to be utilized (is made to be pushed up). Accordingly, it is possible to suppress power consumption. In this connection, since a subpixel of white (W) has high light emission efficiency as compared with the subpixels of other colors, even if a subpixel of white (W) emits light, electric power is not consumed than the subpixels of other colors.

<2. Modified example>

[0131] In the description mentioned in the above, the description has been given on the assumption that the signal processing circuit 102 and the timing controller circuit 103 are elements constituting the display device 10. However, the signal processing circuit 102 and the timing controller circuit 103 may be regarded as a signal processing device, a timing controller device, and the like, as an independent device.

[0132] Moreover, in the description mentioned in the above, as the display device 10, the description has been given for, as one example, a self-light-emission type display device, such as an organic EL display device etc. including a large-sized organic EL display panel that has circumstances peculiar to manufacturability. However, the present technology can be applied not only to the organic EL display device, but also to various display devices. Furthermore, in the description mentioned in the above, as the display device 10, the description has been given for, as one example, a thin type television receiver, a business-use display device, and the like. However, it can be applied to various electronic devices, for example, such as an information device and a portable device.

[0133] In the description mentioned in the above, as the expansion of bits on the signal processing circuit 102B side, an example where 10 bits of each of RGB are expanded to 12 bits of each of RGB, has been shown. However, the bits after the expansion are not limited to 12 bits of each of RGB. For example, such as 11 bits of each of RGB and 13 bits of each of RGB, it is permissible if they are bits that can express a range of color capable of being expressed by a subpixel of white (W).

[0134] Moreover, in the description mentioned in the above, the description has been given on the assumption that each pixel arranged two-dimensionally in the display panel 104 includes four subpixels of red (R), green (G), blue (B), and white (W). However, the colors of the subpixels are not limited to these. For example, in place of a subpixel of white (W), a subpixel of other color with high visibility equivalent to white (W) may be used.

[0135] In this connection, in the present specification, "2K video image" is a video image corresponding to the screen resolution of approximately 1920 x 1080 pixels, and "4K video image" is a video image corresponding to the screen resolution of approximately 3840 x 2160 pixels. Moreover, in the description mentioned in the above, as a video image of contents, a 2K video image and a 4K video image have been described. Further high quality contents such as an 8K video image etc. may be permissible. Incidentally, "8K video image" is a video image corresponding to the screen resolution of approximately 7680 x 4320 pixels.

[0136] It should be noted that the embodiment of the present technology should not be limited to the above-mentioned embodiment. In a range of not departing from the summary of the present technology, various modifications are possible.

[0137] Additionally, the present technology may also be configured as below.

5 (1) A display device, including:

a display section in which display pixels that each include a first subpixel, a second subpixel, and a third subpixel that emit three-basic-color light and a fourth subpixel that emits non-basic-color light are arranged two-dimensionally;

10 a first signal processing section that expands a video signal being input and corresponding to the basic-color light and adapts the video signal to a color gamut that the display section can express; and

a second signal processing section that converts an expanded video signal being the video signal having been expanded into a first signal, a second signal, and a third signal that correspond to the basic-color light and a fourth signal that corresponds to the non-basic-color light, and outputs the signals to the display section.

15 (2) The display device according to (1), in which the first signal processing section includes

a first gain calculating section that calculates a first gain for expanding a dynamic range of the video signal and acquiring the expanded video signal, and

20 a DR expanding section that expands a dynamic range of the video signal on the basis of the calculated first gain.

(3) The display device according to (2),

in which the first signal processing section further includes

25 an average luminance level calculating section that calculates an average luminance level of a frame image acquired from the video signal, and

the first gain calculating section calculates the first gain on the basis of the calculated average luminance level.

(4) The display device according to (3), in which the second signal processing section includes

a color signal converting section that converts the expanded video signal into the first signal, the second signal, the third signal, and the fourth signal.

30 (5) The display device according to (4),

in which the second signal processing section further includes

a second gain calculating section that calculates a second gain for controlling a luminance level of the expanded video signal on the basis of the calculated average luminance level, and

35 a luminance control section that controls a luminance level of the expanded video signal on the basis of the calculated second gain, and

the color signal converting section converts the expanded video signal whose luminance level has been controlled into the first signal, the second signal, the third signal, and the fourth signal.

40 (6) The display device according to (5), in which the first gain and the second gain each is a value acquired in accordance with characteristic information in which the average luminance level and a luminance level of the display section are associated.

(7) The display device according to (6), in which in a case where the average luminance level becomes less than a predetermined threshold, the first gain calculating section calculates a first gain for expanding a dynamic range of the video signal on the basis of the characteristic information.

(8) The display device according to (6) or (7), in which in a case where the average luminance level exceeds a predetermined threshold, the second gain calculating section calculates a second gain for lowering a luminance level of the expanded video signal on the basis of the characteristic information.

(9) The display device according to any one of (1) to (8),
50 in which the basic-color light includes red light, green light, and blue light, and the non-basic-color light is white light.

(10) The display device according to any one of (1) to (9),
in which the display pixel is a pixel including a light emitting element that self-emits light in accordance with an amount of an electric current, and

55 the display section is a self-light-emission display section.

(11) A signal processing device, including:

a signal processing section that expands a video signal that is input, and outputs an expanded video signal

adapted to a color gamut that a display section can express,
 in which in the display section, display pixels that each include a first subpixel, a second subpixel, and a third
 subpixel that emit three-basic-color light and a fourth subpixel that emits non-basic-color light are arranged two-
 dimensionally, and
 the video signal is a signal corresponding to the basic-color light.

(12) The signal processing device according to (11), in which the signal processing section includes

a gain calculating section that calculates a gain for expanding a dynamic range of the video signal and acquiring
 the expanded video signal, and
 a DR expanding section that expands a dynamic range of the video signal on the basis of the calculated gain.

(13) The signal processing device according to (12),
 in which the signal processing section further includes

an average luminance level calculating section that calculates an average luminance level of a frame image acquired
 from the video signal, and
 the gain calculating section calculates the gain on the basis of the calculated average luminance level.

(14) The signal processing device according to (13), in which the gain is a value acquired in accordance with
 characteristic information in which the average luminance level and a luminance level of the display section are
 associated.

(15) The signal processing device according to (14), in which in a case where the average luminance level becomes
 less than a predetermined threshold, the gain calculating section calculates a gain for expanding a dynamic range
 of the video signal on the basis of the characteristic information.

(16) The signal processing device according to any one of (11) to (15),
 in which the basic-color light includes red light, green light, and blue light, and
 the non-basic-color light is white light.

(17) The signal processing device according to any one of (11) to (16),
 in which the display pixel is a pixel including a light emitting element that self-emits light in accordance with an
 amount of an electric current, and
 the display section is a self-light-emission display section.

(18) The signal processing device according to any one of (11) to (17),
 in which the signal processing section outputs the expanded video signal to a subsequent signal processing device,
 and
 the subsequent signal processing device converts the expanded video signal into a first signal, a second signal,
 and a third signal that correspond to the basic-color light and a fourth signal that corresponds to the non-basic-color
 light, and outputs the signals to the display section.

Reference Signs List

[0138]

- 10 display device
- 101 video generator
- 102 and 102B signal processing circuit
- 103 and 103B timing controller circuit
- 104 display panel
- 300 signal processing section
- 301A and 301B linear gamma converting section
- 302 APL calculating section
- 303 ABL gain calculating section
- 304 ABL control section
- 305 HDR gain calculating section
- 306 DR expanding section
- 307 WRGB converting section

Claims

1. A display device, comprising:

5 a display section in which display pixels that each include a first subpixel, a second subpixel, and a third subpixel that emit three-basic-color light and a fourth subpixel that emits non-basic-color light are arranged two-dimensionally;

a first signal processing section that expands a video signal being input and corresponding to the basic-color light and adapts the video signal to a color gamut that the display section can express; and

10 a second signal processing section that converts an expanded video signal being the video signal having been expanded into a first signal, a second signal, and a third signal that correspond to the basic-color light and a fourth signal that corresponds to the non-basic-color light, and outputs the signals to the display section.

2. The display device according to claim 1, wherein the first signal processing section includes

15 a first gain calculating section that calculates a first gain for expanding a dynamic range of the video signal and acquiring the expanded video signal, and

a DR expanding section that expands a dynamic range of the video signal on a basis of the calculated first gain.

3. The display device according to claim 2,

wherein the first signal processing section further includes

an average luminance level calculating section that calculates an average luminance level of a frame image acquired from the video signal, and

the first gain calculating section calculates the first gain on a basis of the calculated average luminance level.

4. The display device according to claim 3, wherein the second signal processing section includes

a color signal converting section that converts the expanded video signal into the first signal, the second signal, the third signal, and the fourth signal.

5. The display device according to claim 4,

wherein the second signal processing section further includes

a second gain calculating section that calculates a second gain for controlling a luminance level of the expanded video signal on a basis of the calculated average luminance level, and

35 a luminance control section that controls a luminance level of the expanded video signal on a basis of the calculated second gain, and

the color signal converting section converts the expanded video signal whose luminance level has been controlled into the first signal, the second signal, the third signal, and the fourth signal.

6. The display device according to claim 5, wherein the first gain and the second gain each is a value acquired in accordance with characteristic information in which the average luminance level and a luminance level of the display section are associated.

7. The display device according to claim 6, wherein in a case where the average luminance level becomes less than a predetermined threshold, the first gain calculating section calculates a first gain for expanding a dynamic range of the video signal on a basis of the characteristic information.

8. The display device according to claim 6, wherein in a case where the average luminance level exceeds a predetermined threshold, the second gain calculating section calculates a second gain for lowering a luminance level of the expanded video signal on a basis of the characteristic information.

9. The display device according to claim 1,

wherein the basic-color light includes red light, green light, and blue light, and

the non-basic-color light is white light.

10. The display device according to claim 1,

wherein the display pixel is a pixel including a light emitting element that self-emits light in accordance with an

amount of an electric current, and
the display section is a self-light-emission display section.

5 11. A signal processing device, comprising:

10 a signal processing section that expands a video signal that is input, and outputs an expanded video signal adapted to a color gamut that a display section can express,
wherein in the display section, display pixels that each include a first subpixel, a second subpixel, and a third subpixel that emit three-basic-color light and a fourth subpixel that emits non-basic-color light are arranged two-dimensionally, and
the video signal is a signal corresponding to the basic-color light.

12. The signal processing device according to claim 11, wherein the signal processing section includes

15 a gain calculating section that calculates a gain for expanding a dynamic range of the video signal and acquiring the expanded video signal, and
a DR expanding section that expands a dynamic range of the video signal on a basis of the calculated gain.

20 13. The signal processing device according to claim 12,
wherein the signal processing section further includes
an average luminance level calculating section that calculates an average luminance level of a frame image acquired from the video signal, and
the gain calculating section calculates the gain on a basis of the calculated average luminance level.

25 14. The signal processing device according to claim 13, wherein the gain is a value acquired in accordance with characteristic information in which the average luminance level and a luminance level of the display section are associated.

30 15. The signal processing device according to claim 14, wherein in a case where the average luminance level becomes less than a predetermined threshold, the gain calculating section calculates a gain for expanding a dynamic range of the video signal on a basis of the characteristic information.

35 16. The signal processing device according to claim 11,
wherein the basic-color light includes red light, green light, and blue light, and
the non-basic-color light is white light.

40 17. The signal processing device according to claim 11,
wherein the display pixel is a pixel including a light emitting element that self-emits light in accordance with an amount of an electric current, and
the display section is a self-light-emission display section.

45 18. The signal processing device according to claim 11,
wherein the signal processing section outputs the expanded video signal to a subsequent signal processing device,
and
the subsequent signal processing device converts the expanded video signal into a first signal, a second signal,
and a third signal that correspond to the basic-color light and a fourth signal that corresponds to the non-basic-color light, and outputs the signals to the display section.

50

55

FIG. 1

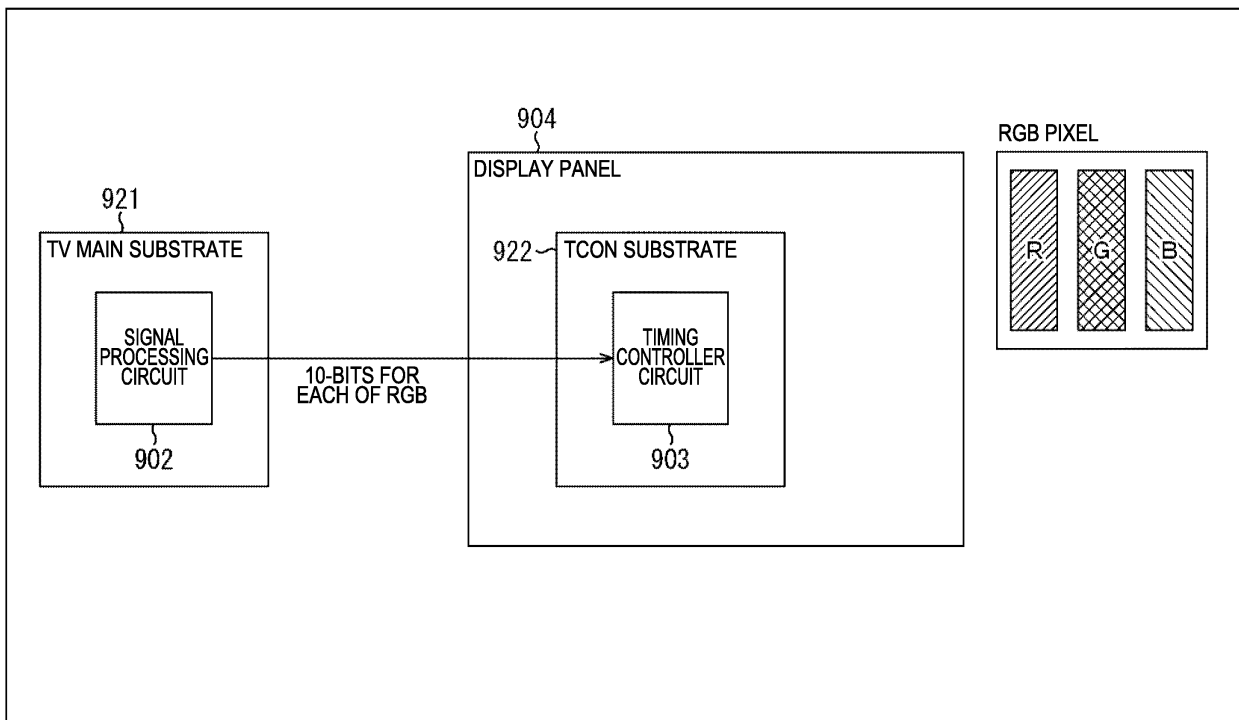


FIG. 2

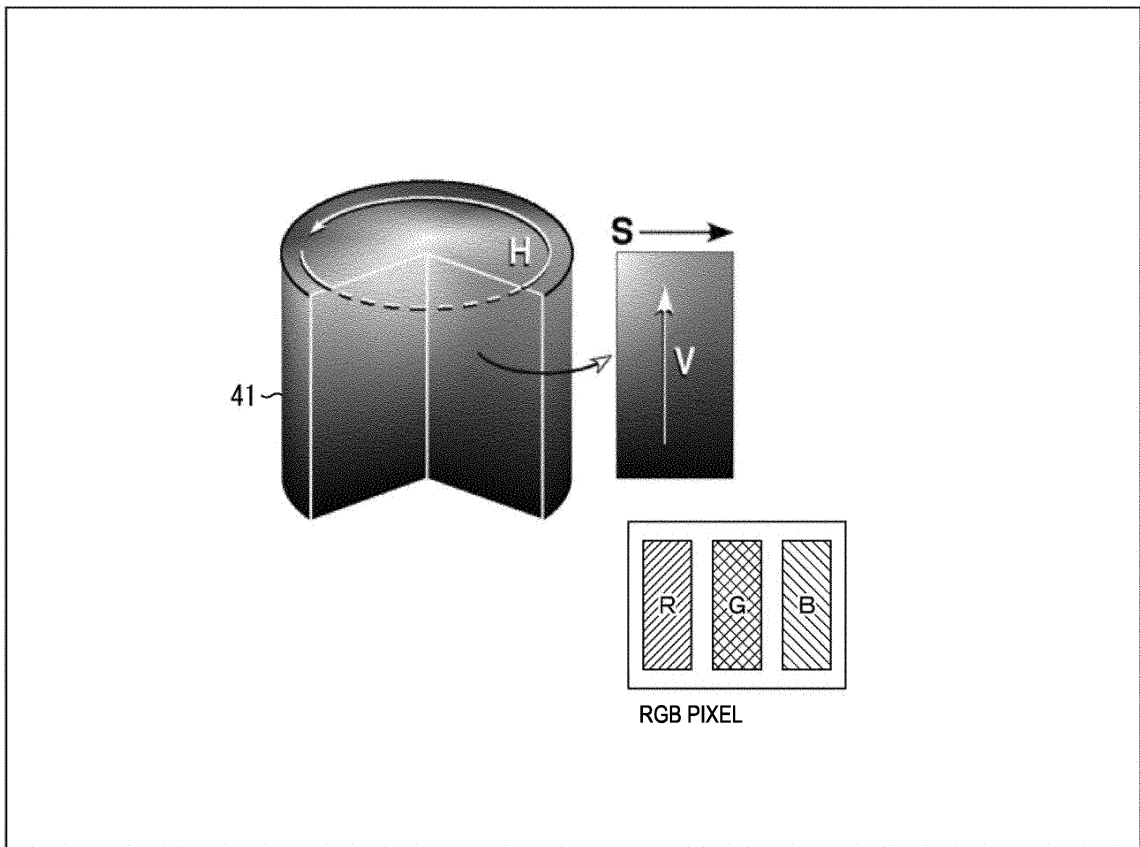


FIG. 3

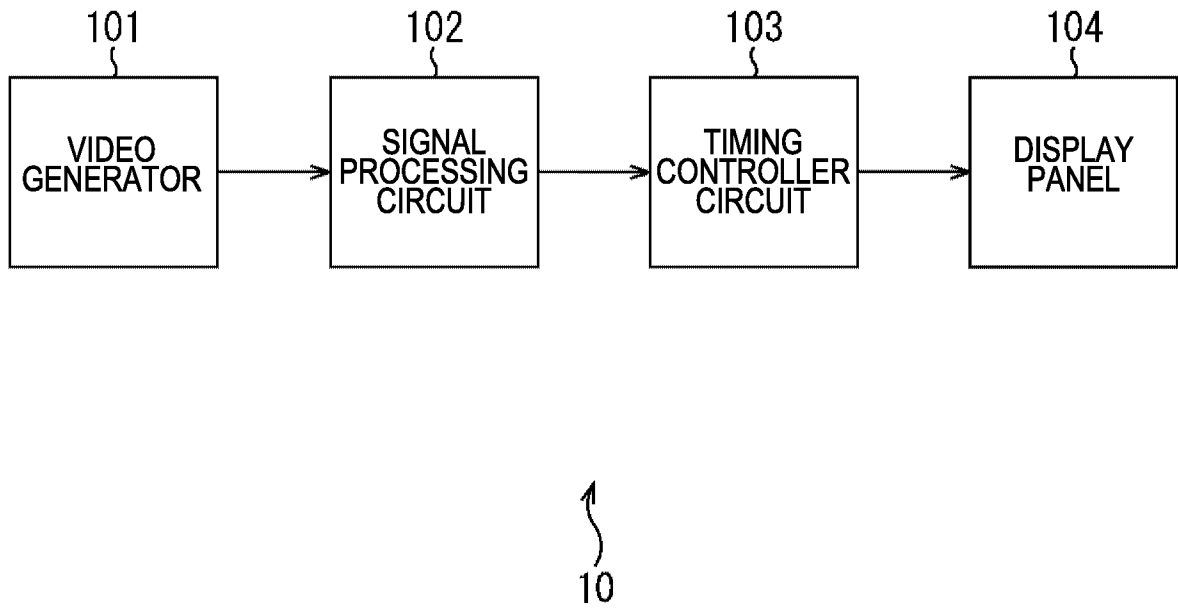


FIG. 4

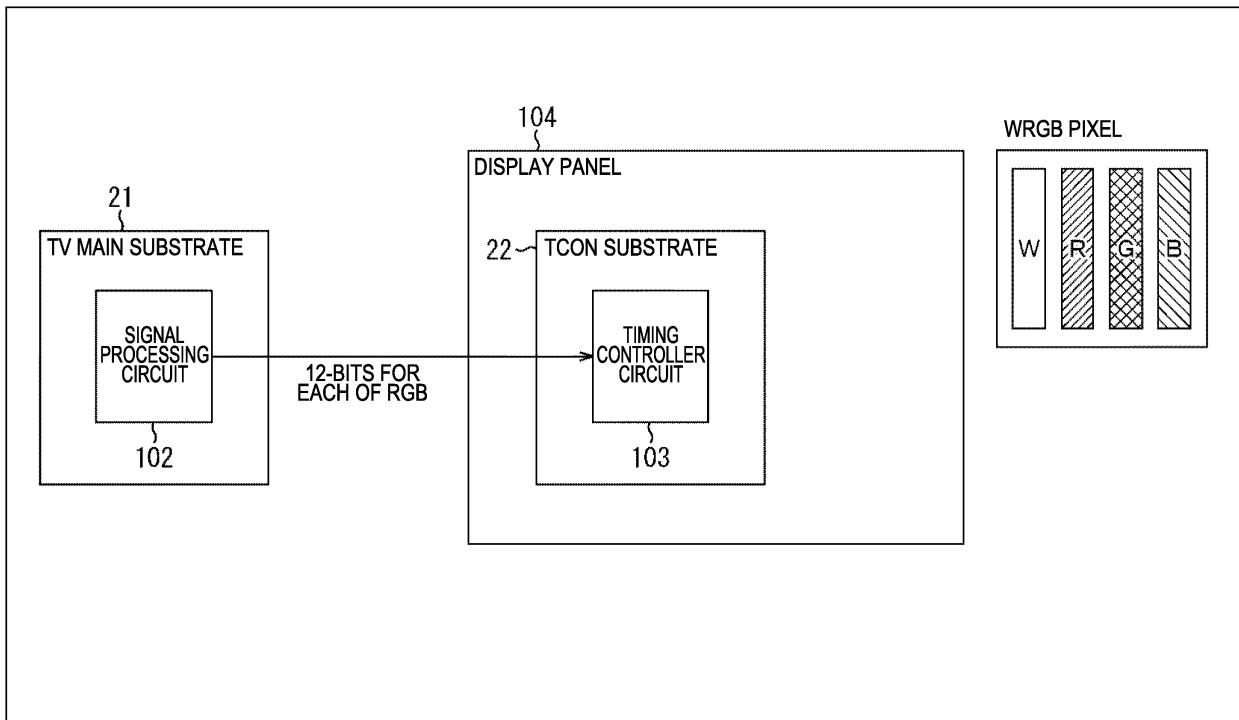


FIG. 5

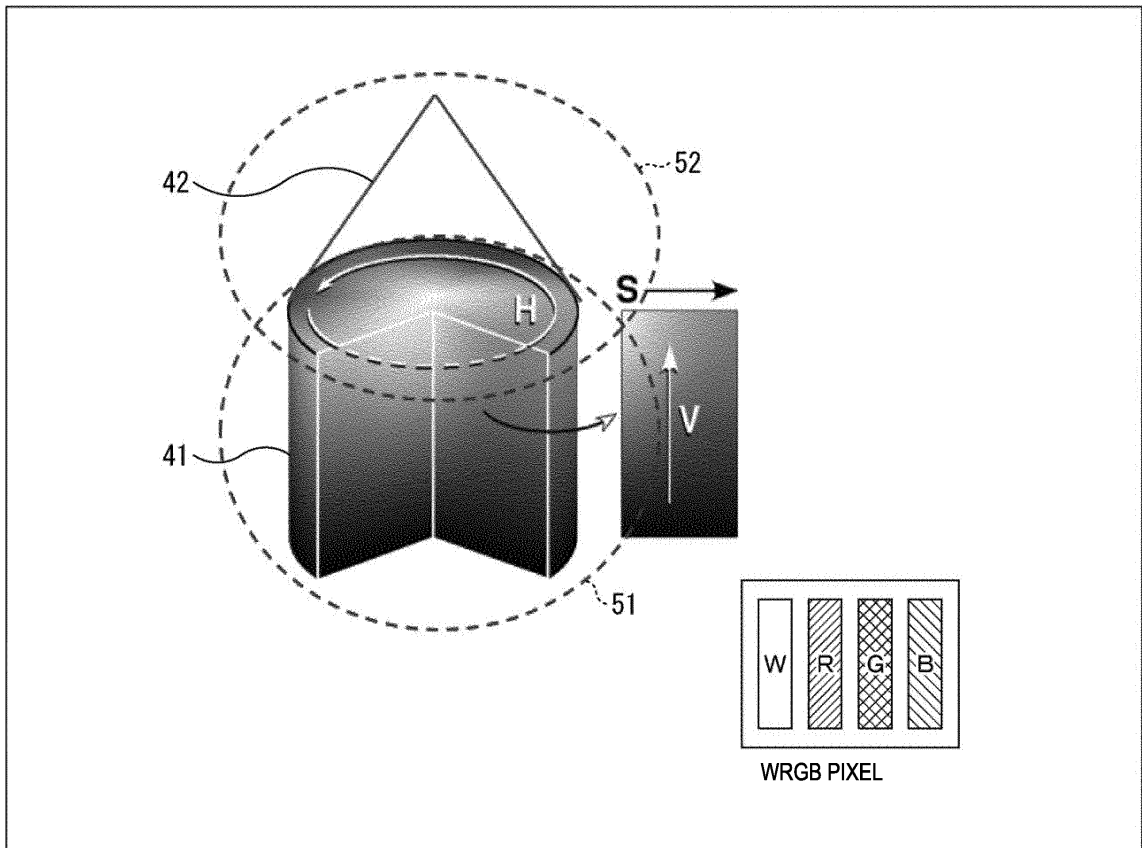


FIG. 6

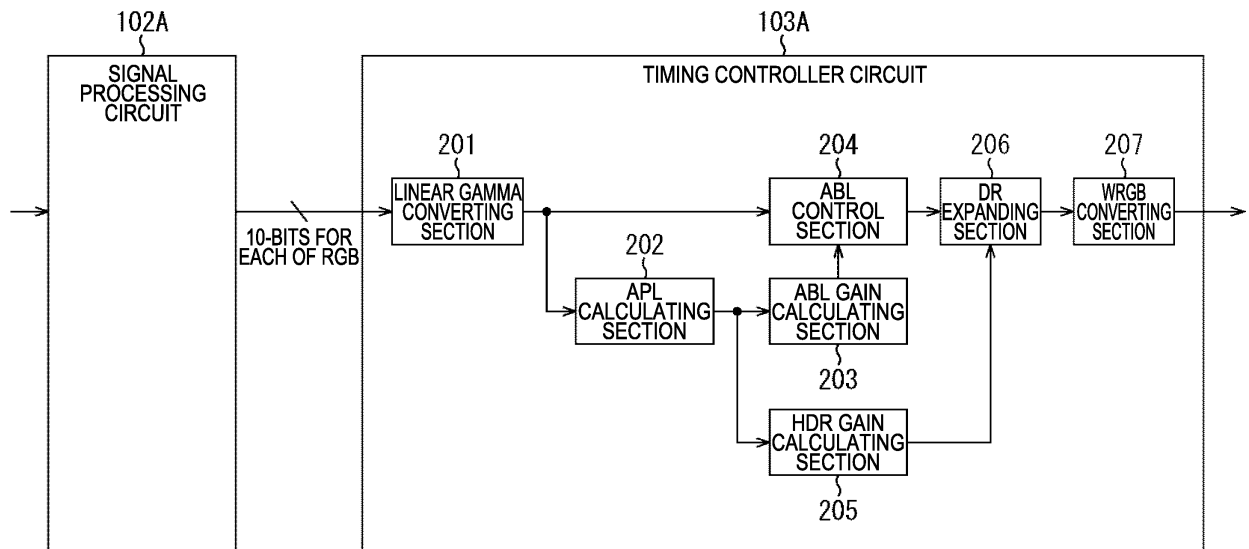


FIG. 7

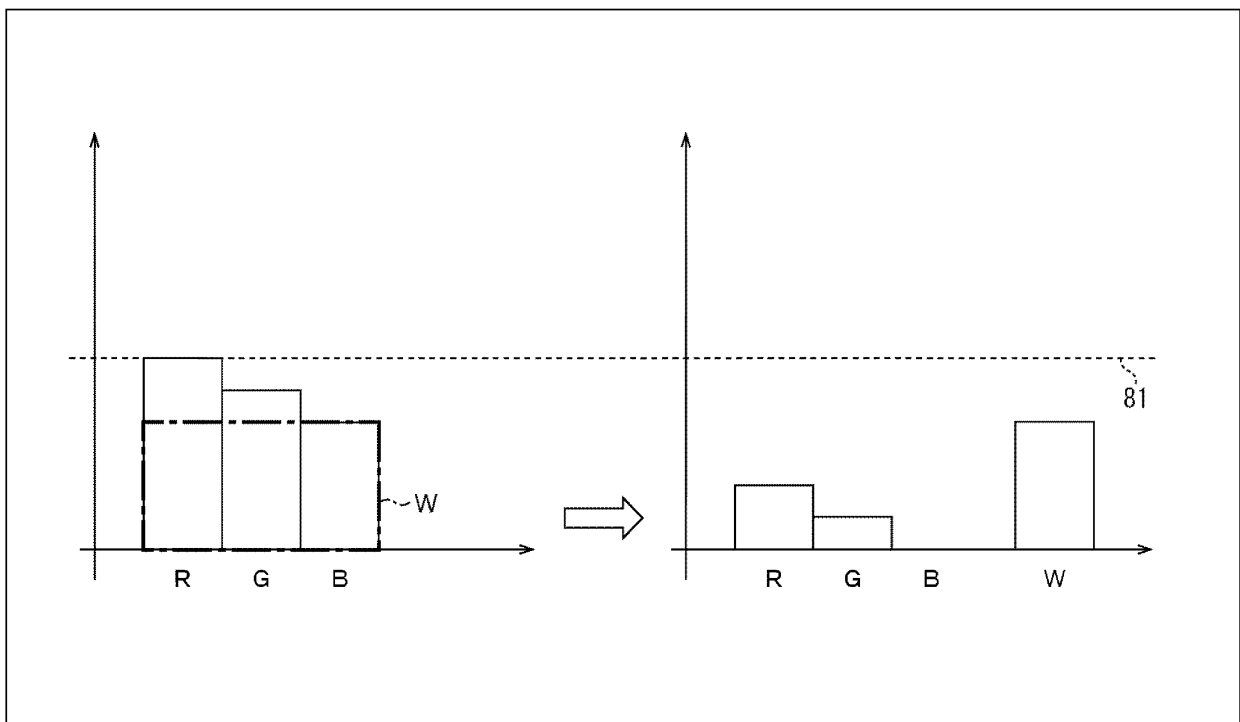


FIG. 8

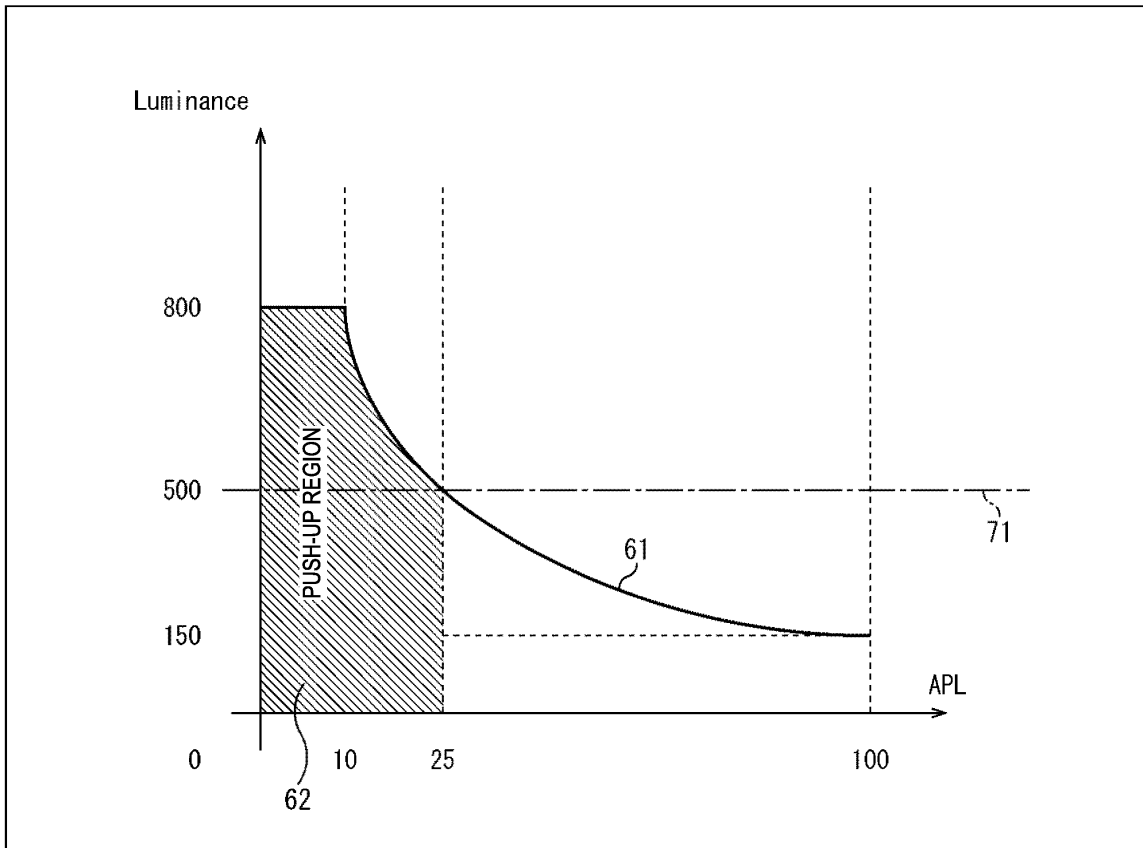


FIG. 9

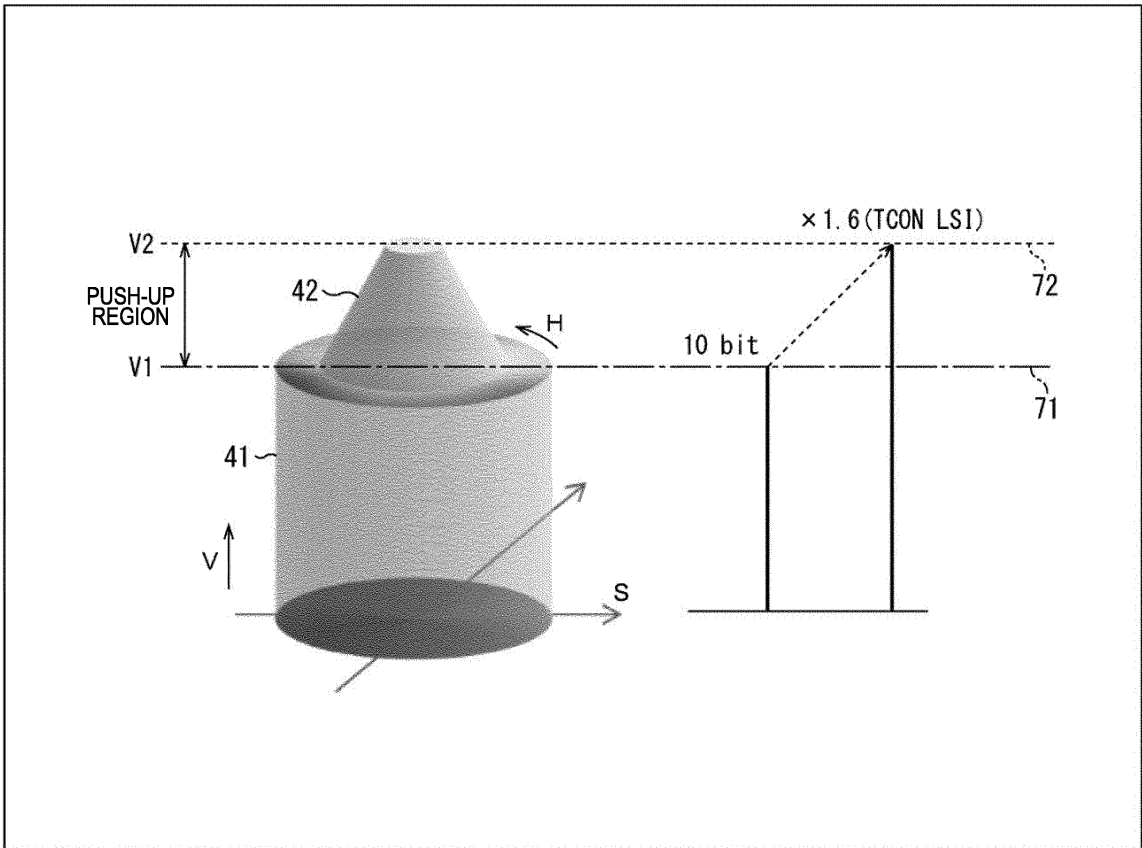


FIG. 10

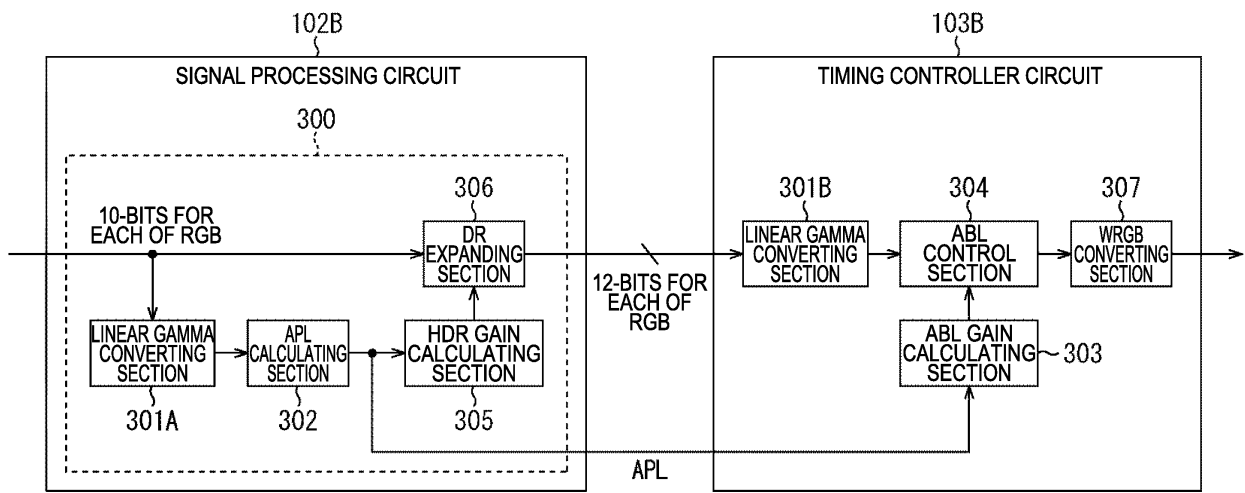


FIG. 11


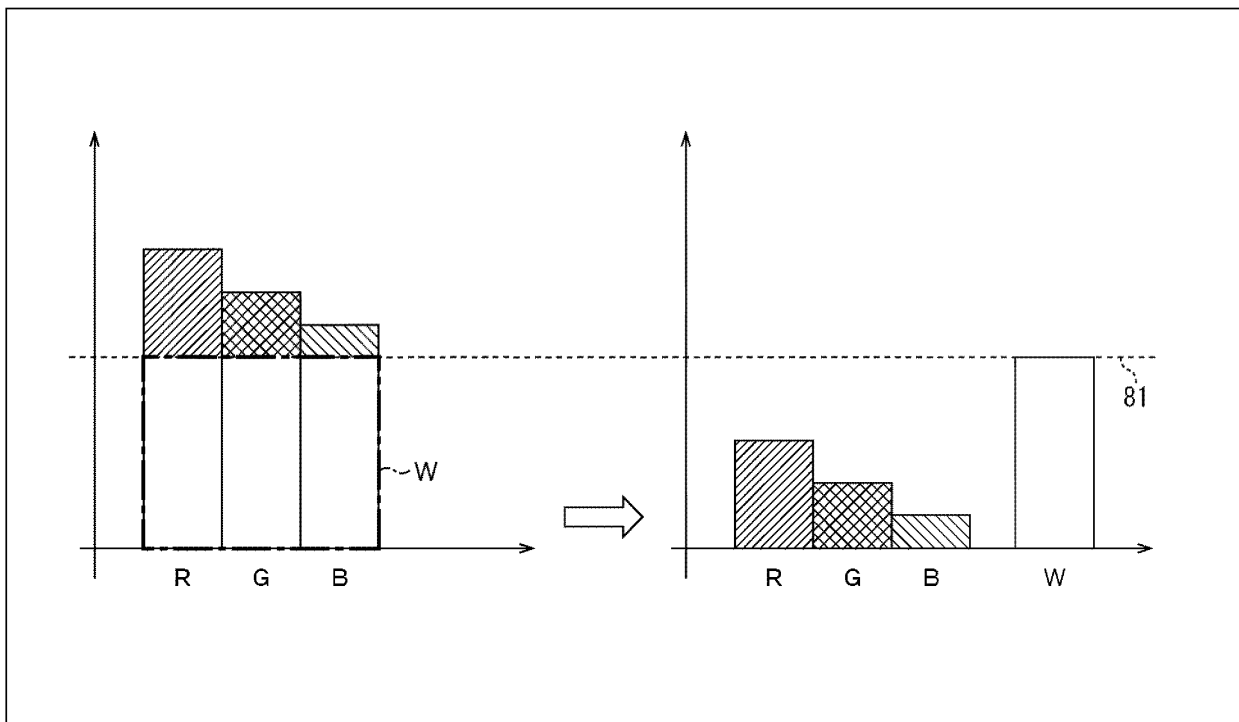


FIG. 12

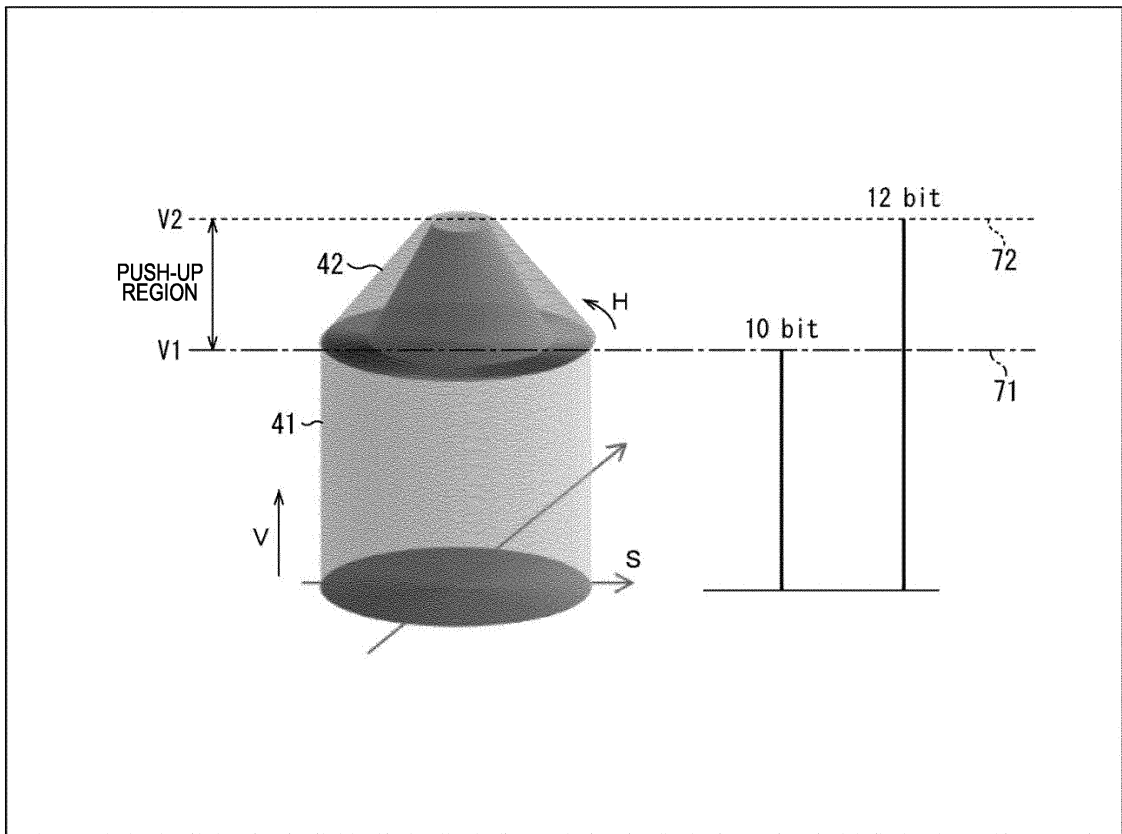

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2018/031871

A. CLASSIFICATION OF SUBJECT MATTER

Int.Cl. G09G3/3208 (2016.01) i, G09F9/30 (2006.01) i, G09F9/302 (2006.01) i,
G09G3/20 (2006.01) i, H01L27/32 (2006.01) i, H01L51/50 (2006.01) i,
H04N9/30 (2006.01) i, H04N9/64 (2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int.Cl. G09G3/3208, G09F9/30, G09F9/302, G09G3/20, H01L27/32,
H01L51/50, H04N9/30, H04N9/64

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Published examined utility model applications of Japan	1922-1996
Published unexamined utility model applications of Japan	1971-2018
Registered utility model specifications of Japan	1996-2018
Published registered utility model applications of Japan	1994-2018

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	JP 2014-122997 A (SONY CORP.) 03 July 2014, paragraphs [0019]-[0062], fig. 1-5, 9 & US 2014/0176620 A1, paragraphs [0043]-[0086], fig. 1- 5, 9 & CN 103886851 A	1-4, 9-18 5-8
A	JP 2009-300517 A (TOSHIBA CORP.) 24 December 2009, paragraphs [0030]-[0031], fig. 5 & US 2009/0304279 A1, paragraphs [0047]-[0048], fig. 5	5-8



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
19 November 2018 (19.11.2018)Date of mailing of the international search report
27 November 2018 (27.11.2018)Name and mailing address of the ISA/
Japan Patent Office
3-4-3, Kasumigaseki, Chiyoda-ku,
Tokyo 100-8915, Japan

Authorized officer

Telephone No.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/JP2018/031871

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 2006-3475 A (EASTMAN KODAK COMPANY) 05 January 2006, paragraphs [0055]-[0057], fig. 11-12 & US 2008/0297448 A1, paragraphs [0073]-[0075], fig. 11-12 & WO 2006/001988 A1	5-8
A	JP 2011-154323 A (SONY CORP.) 11 August 2001, entire text, all drawings & US 2011/0181635 A1, entire text, all drawings & CN 102142223 A	1-18
A	WO 2007/116589 A1 (SHARP CORP.) 18 October 2007, entire text, all drawings (Family: none)	1-18

5
10
15
20
25
30
35
40
45
50
55

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2012058634 A [0004]

专利名称(译)	显示装置和信号处理装置		
公开(公告)号	EP3518223A1	公开(公告)日	2019-07-31
申请号	EP2018856261	申请日	2018-08-29
[标]申请(专利权)人(译)	索尼公司		
申请(专利权)人(译)	索尼公司		
当前申请(专利权)人(译)	索尼公司		
[标]发明人	INOUE YASUO		
发明人	INOUE, YASUO		
IPC分类号	G09G3/3208 G09F9/30 G09F9/302 G09G3/20 H01L27/32 H01L51/50 H04N9/30 H04N9/64		
CPC分类号	G09G3/2003 G09G2300/0452 G09G2320/0271 G09G2320/0276 G09G2320/0673 G09G2330/021 G09G2340/06 G09G2360/16 G09F9/30 G09F9/302 G09G3/20 G09G3/3208 H01L27/32 H01L51/50 H04N9/30 H04N9/64 G09G5/02 H01L27/3211		
优先权	2017175002 2017-09-12 JP		
其他公开文献	EP3518223A4		
外部链接	Espacenet		

摘要(译)

本技术涉及一种显示装置和信号处理装置，其使得可以最大程度地主动利用显示面板可以表达的色域。提供一种显示装置，包括：显示部分，其中每个显示像素包括发射三基色光的第一子像素，第二子像素和第三子像素以及发射非基色光的第四子像素二维排列；第一信号处理部分，用于扩展输入的视频信号并对应于基色光，并使视频信号适应显示部分可以表达的色域；第二信号处理部分将作为已扩展的视频信号的扩展视频信号转换为对应于基色光的第一信号，第二信号和第三信号以及对应于非基色光的第四信号基色光，并将信号输出到显示部分。本技术可以应用于例如自发光型显示装置，例如有机EL显示装置。

