

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
2 October 2003 (02.10.2003)

PCT

(10) International Publication Number
WO 03/080559 A1

(51) International Patent Classification⁷: C07C 211/61,
H01L 51/30

[JP/JP]; c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP). **KASAHARA, Maki** [JP/JP]; c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP).

(21) International Application Number: PCT/JP03/03615

(22) International Filing Date: 25 March 2003 (25.03.2003)

(74) Agents: **OKABE, Masao** et al.; No. 602, Fuji Bldg., 2-3 Marunouchi 3-chome, Chiyoda-ku, Tokyo 100-0005 (JP).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
NO. 2002-088918 27 March 2002 (27.03.2002) JP
NO. 2003-006796 15 January 2003 (15.01.2003) JP

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **CANON KABUSHIKI KAISHA** [JP/JP]; 3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP).

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and
(75) Inventors/Applicants (*for US only*): **SAITOH, Akihito** [JP/JP]; c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP). **HIRAOKA, Mizuho** [JP/JP]; c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP). **SUZUKI, Koichi** [JP/JP]; c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP). **SENOO, Akihiro** [JP/JP]; c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP). **TANABE, Hiroshi** [JP/JP]; c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP). **YAMADA, Naoki** [JP/JP]; c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP). **NEGISHI, Chika**


Published:
— *with international search report*
— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 03/080559 A1

(54) Title: OLIGOFLUORENYLENE COMPOUNDS

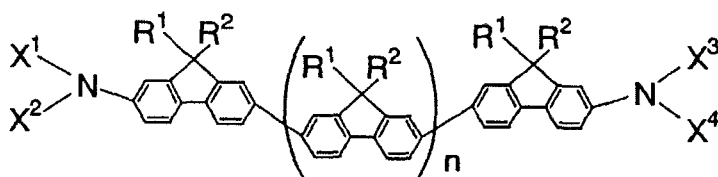

(I)

(57) Abstract: The present invention provides an oligofluorenylene compound represented by the general formula below, which enables production of an organic light-emitting device that exhibits an extremely pure luminescent hue and has a light emission of high efficiency, high

brightness, and long lifetime.

DESCRIPTION

OLIGOFLUORENYLENE COMPOUNDS

5 TECHNICAL FIELD

The present invention relates to an oligofluorenylene compound. Also, the invention relates to an organic light-emitting device comprising the compound, and more specifically, a device that emit light by applying an electric field to a thin film composed of an organic compound.

BACKGROUND ART

Organic light-emitting devices are devices that utilize light emitted when excitons of fluorescent organic compounds return to the ground state, the excitons being generated by sandwiching between an anode and a cathode a thin film that contains a fluorescent compound and injecting electrons and holes (positive holes) from the respective electrodes.

A study by Eastman Kodak Company in 1987 (Non-patent reference 1) has reported that a light emission of about 1000 cd/m^2 was observed under an applied voltage of about 10 V. In the study, the device had a separated-function type bilayer structure and used ITO as the anode, magnesium-silver alloy as the cathode, an aluminum quinolinol complex

as an electron-carrying material and light-emitting material, and a triphenylamine derivative as a hole-carrying material. Related patent documents include the patent references 1 to 3.

5 Moreover, various light emissions from ultraviolet to infrared can be accomplished by using various different fluorescent organic compounds. Recently, active studies have been conducted on various compounds. Such studies are disclosed, for
10 example, in the Patent references 4 to 11.

 In addition to the organic light-emitting devices using small molecular materials as described above, organic light-emitting devices using conjugated polymers have been reported by a group of
15 Cambridge University (non-patent reference 2). This report has disclosed that a film of polyphenylenevinylene (PPV) was formed by a coating method and it was confirmed that a single layer of the film emitted light. Related patent documents on
20 organic light-emitting devices using conjugated polymers include the patent references 12 to 16.

 As described above, a remarkable progress has been made in the field of organic light-emitting devices. The characteristic feature of such progress
25 is that it enables production of light-emitting devices that exhibit high brightness even with a low application voltage, diversity in terms of emission

wavelengths, and rapid response, with a thin and lightweight construction, which suggests a wide range of possible applications of the devices.

There are, however, still many problems with regard to durability, such as change with time due to prolonged use and deterioration due to moisture and the atmospheric gas containing oxygen. Moreover, for applications to a full-color display etc., light emissions exhibiting higher brightness or higher conversion efficiency, as well as blue, green, and red light emissions with higher color purities, are necessary with the current state of the art. For example, the patent reference 17 discloses diamine compounds as high emission efficiency materials, but blue-light emission showing high color purity (chromaticity coordinates: $(x, y) = (0.14-0.15, 0.09-0.12)$) has not been obtained yet.

(Patent reference 1)

U.S. Patent No. 4,539,507

(Patent reference 2)

U.S. Patent No. 4,720,432

(Patent reference 3)

U.S. Patent No. 4,885,211

(Patent Reference 4)

U.S. Patent No. 5,151,629

(Patent Reference 5)

U.S. Patent No. 5,409,783


- (Patent Reference 6)
U.S. Patent No. 5,382,477
- (Patent Reference 7)
Japanese Patent Application Laid-Open No. 2-247278
- 5 (Patent Reference 8)
Japanese Patent Application Laid-Open No. 3-255190
(Patent Reference 9)
Japanese Patent Application Laid-Open No. 5-202356
(Patent Reference 10)
- 10 Japanese Patent Application Laid-Open No. 9-202878
(Patent Reference 11)
Japanese Patent Application Laid-Open No. 9-227576
(Patent Reference 12)
U.S. Patent No. 5,247,190
- 15 (Patent Reference 13)
U.S. Patent No. 5,514,878
(Patent Reference 14)
U.S. Patent No. 5,672,678
(Patent Reference 15)
- 20 Japanese Patent Application Laid-Open No. 4-145192
(Patent Reference 16)
Japanese Patent Application Laid-Open No. 5-247460
(Patent Reference 17)
Japanese Patent Application Laid-Open No. 2001-52868
- 25 (Non-patent Reference 1)
Appl. Phys. Lett. 51, 913 (1987)
(Non-patent Reference 2)

Nature, 347, 539 (1990)

DISCLOSURE OF THE INVENTION

The present invention has been made to solve
 5 the above problems of the prior art. An object
 thereof is to provide an oligofluorenylene compound
 that enables production of an organic light-emitting
 device that exhibits an extremely pure luminescent
 hue and has a light emission of high efficiency, high
 10 brightness, and long lifetime. Another object of the
 invention is to provide an oligofluorenylene compound
 with which there can be obtained an organic light-
 emitting device that can be not only easily
 manufactured but also produced at a relatively low
 15 cost.

According to the present invention, there is
 provided an oligofluorenylene compound represented by
 the following general formula (1).

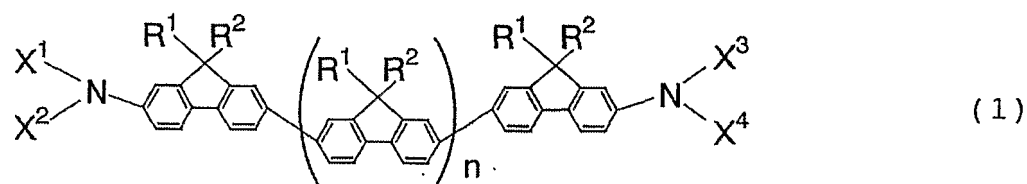

20 (wherein X¹ to X⁴ are each a group selected from the
 group consisting of a substituted or unsubstituted
 alkyl group, aralkyl group, aryl group, and
 heterocyclic group, a substituted or unsubstituted

alkenyl group, alkynyl group, amino group, alkoxy
group, and sulfide group which have a connecting
group comprising a substituted or unsubstituted
arylene group or divalent heterocyclic group, and a
5 substituted silyl group and carbonyl group which have
a connecting group comprising a substituted or
unsubstituted arylene group or divalent heterocyclic
group, which may be the same or different, and X^1 and
 X^2 , and X^3 and X^4 may be linked to each other to form
10 a ring,

wherein R^1 and R^2 are each a group selected from
the group consisting of a hydrogen atom and a
substituted or unsubstituted alkyl group, aralkyl
group, and aryl group, R^1 and R^2 may be the same or
15 different, and respective R^1 's and R^2 's on different
fluorenylene rings may be the same or different, and
wherein n is an integer of 1 to 20.)

BRIEF DESCRIPTION OF THE DRAWINGS

20 Fig. 1 is a sectional view showing an example
of the organic light-emitting devices of the present
invention.

Fig. 2 is a sectional view showing another
example of the organic light-emitting devices of the
25 present invention.

Fig. 3 is a sectional view showing still
another example of the organic light-emitting devices

of the present invention.

Fig. 4 is a sectional view showing yet another example of the organic light-emitting devices of the present invention.

5 Fig. 5 is a sectional view showing yet still another example of the organic light-emitting devices of the present invention.

BEST MODES FOR CARRYING OUT THE INVENTION

10 The present invention will be explained in detail below.

First, an oligofluorenylene compound of the present invention will be explained.

15 The oligofluorenylene compound of the present invention is represented by the above general formula (1).

In the oligofluorenylene compound of the present invention, n in the above general formula (1) is preferably an integer from 1 to 4. That is, the
20 compound is preferably one of a trifluorenylene compound, a tetrafluorenylene compound, a pentafluorenylene compound, and a hexafluorenylene compound.

25 Additionally, either of the substituents on each nitrogen atom is preferably a phenyl group having a substituent in at least the para or ortho position, which is represented by the following

general formula (2).



(R⁵ to R⁹ each are a group selected from the group
5 consisting of a hydrogen atom, halogen atom, cyano
group, nitro group, substituted or unsubstituted
alkyl group, aralkyl group, aryl group, heterocyclic
group, alkenyl group, alkynyl group, amino group,
alkoxy group, and sulfide group, and substituted
10 silyl group and carbonyl group, which may be the same
or different.)

Moreover, either of the substituents on each
nitrogen atom is preferably an aromatic polycyclic
condensed-ring group or a heterocyclic group.

15 Furthermore, it is preferred that one of the
substituents on each nitrogen atom is a phenyl group
that has at least one substituent in the para- or
ortho-position and is represented by the above
general formula (2), and the other substituent is an
20 aromatic polycyclic condensed-ring group or a
heterocyclic group.

Specific examples of the substituents in the
above general formulae (1) and (2) are cited below.

The substituted or unsubstituted alkyl group

may be either linear or cyclic. Examples thereof include a methyl group, ethyl group, n-propyl group, n-butyl group, n-hexyl group, n-decyl group, iso-propyl group, iso-butyl group, tert-butyl group, 5 tert-octyl group, trifluoromethyl group, cyclohexyl group, cyclohexylmethyl group, etc., although of course they are not limited to the above.

Examples of substituted or unsubstituted aralkyl groups include a benzyl group, phenethyl 10 group, etc., although of course they are not limited to those.

Examples of substituted or unsubstituted aryl groups include a phenyl group, 4-methylphenyl group, 4-methoxyphenyl group, 4-ethylphenyl group, 4- 15 fluorophenyl group, 3,5-dimethylphenyl group, ditolylaminophenyl group, biphenyl group, terphenyl group, naphthyl group, anthracenyl group, phenanthrenyl group, pyrenyl group, tetracenyl group, pentacenyl group, fluorenyl group, triphenylenyl 20 group, perylenyl group, etc., although of course they are not limited to those.

Examples of substituted or unsubstituted heterocyclic groups include a pyrrolyl group, pyridyl group, bipyridyl group, methylpyridyl group, 25 terpyrrolyl group, thienyl group, terthienyl group, propylthienyl group, furil group, quinolyl group, carbazolyl group, oxazolyl group, oxadiazolyl group,

thiazolyl group, thiadiazolyl group, etc., although of course they are not limited to those.

Examples of substituted or unsubstituted arylene groups include a phenylene group, biphenylene group, 2,3,5,6-tetrafluorophenylene group, 2,5-dimethylphenylene group, naphthylene group, anthracenylene group, phenanthrenylene group, tetracenylene group, pentacenylene group, perylenylene group, etc., although of course they are not limited to those.

Examples of substituted or unsubstituted divalent heterocyclic groups include a furanylene group, pyrrolylene group, pyridinylene group, terpyridinylene group, thiophenylene group, terthiophenylene group, oxazolylene group, thiazolylene group, carbazolylene group, etc., although of course they are not limited to those.

Examples of substituted or unsubstituted alkenyl groups include a vinyl group, allyl group (2-propenyl group), 1-propenyl group, iso-propenyl group, 2-butenyl group, etc., although of course they are not limited to those.

Examples of substituted or unsubstituted alkynyl groups include an acetylenyl group, phenylacetylenyl group, 1-propynyl group, etc., although of course they are not limited to those.

Examples of substituted or unsubstituted amino

groups include an amino group, methylamino group, ethylamino group, dimethylamino group, diethylamino group, methylethylamino group, benzylamino group, methylbenzylamino group, dibenzylamino group, anilino group, diphenylamino group, phenyltolylamino group, ditolylamino group, dianisolylamino group, etc., although of course they are not limited to those.

Examples of substituted or unsubstituted alkoxy groups include a methoxy group, ethoxy group, propoxy group, 2-ethyl-octyloxy group, phenoxy group, 4-butylphenoxy group, benzyloxy group, etc., although of course they are not limited to those.


Examples of substituted or unsubstituted sulfide groups include a methylsulfide group, ethylsulfide group, phenylsulfide group, 4-methylphenylsulfide group, etc., although of course they are not limited to those.

Examples of substituted carbonyl groups include an acetyl group, propionyl group, isobutyryl group, methacryloyl group, benzoyl group, naphthoyl group, anthroyl group, toluoyl group, etc., although of course they are not limited to those.














Examples of substituents that the above substituted groups may have include: alkyl groups and aralkyl groups such as a methyl group, ethyl group, n-propyl group, iso-propyl group, tert-butyl group, octyl group, benzyl group, and phenethyl group;













alkoxy groups such as a methoxy group, ethoxy group, propoxy group, 2-ethyl-octyloxy group, phenoxy group, 4-butylphenoxy group, and benzyloxy group; aryl groups such as a phenyl group, 4-methylphenyl group, 4-ethylphenyl group, 3-chlorophenyl group, 3,5-dimethylphenyl group, triphenylamino group, biphenyl group, terphenyl group, naphthyl group, anthryl group, phenanthryl group, and pyrenyl group; heterocyclic groups such as a pyridyl group, bipyridyl group, methylpyridyl group, thienyl group, terthienyl group, propylthienyl group, furil group, quinolyl group, carbazolyl group, and N-ethylcarbazolyl group; halogen groups; cyano group; and nitro group, although of course they are not limited to those.

















15 Next, typical examples of the fluorenylene compounds represented by the general formula (1) are shown below. However, the compounds of the present invention are not limited to these compounds.












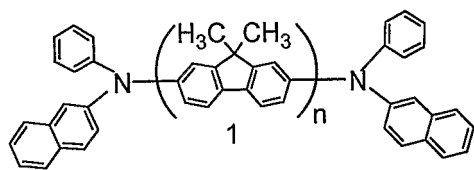














a: n=3, b: n=4, c: n=5, d: n=6


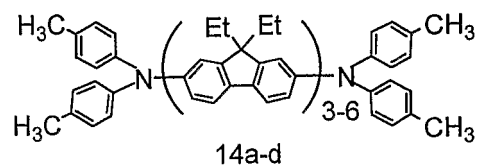
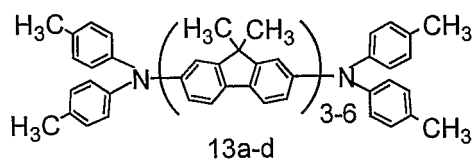
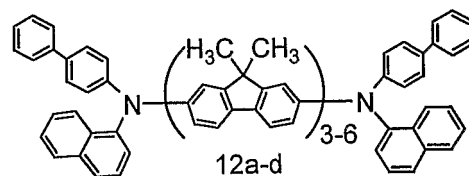
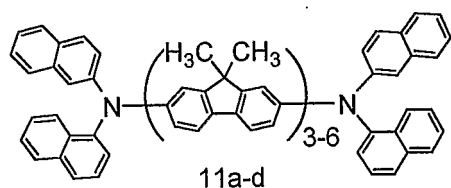
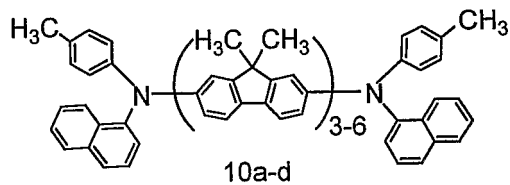
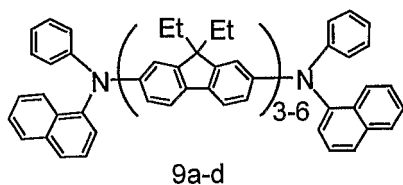
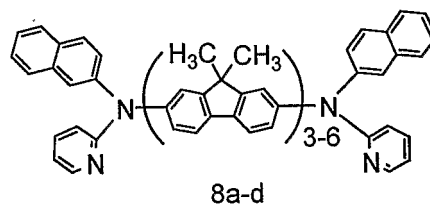
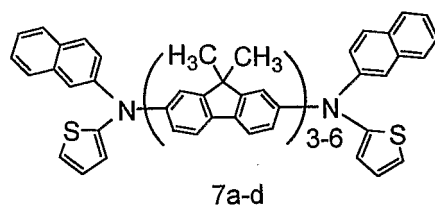
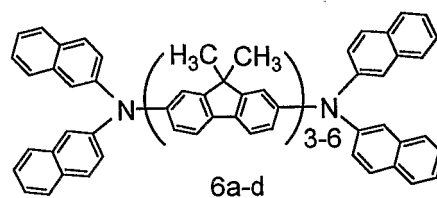
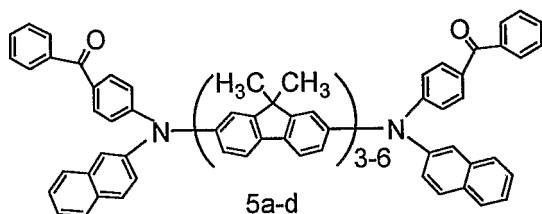
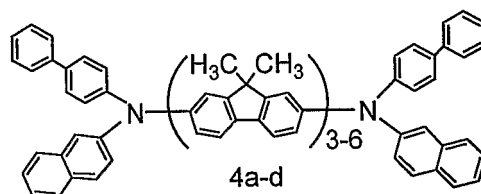
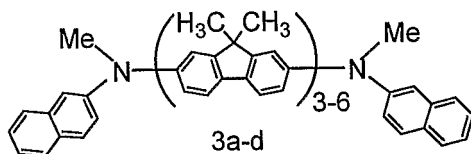
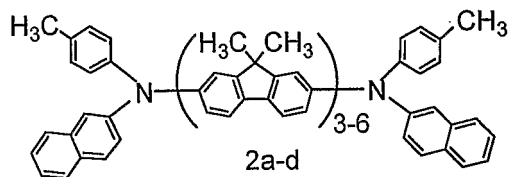


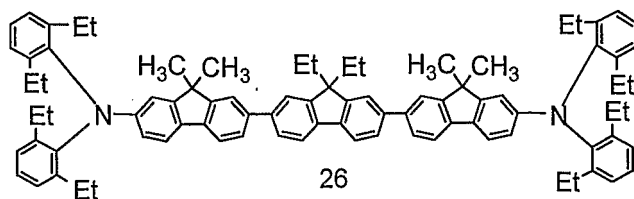
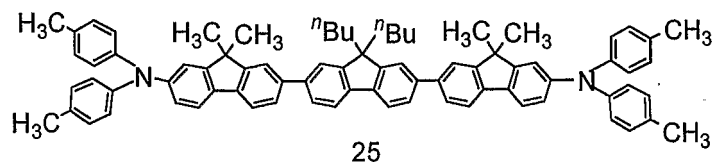
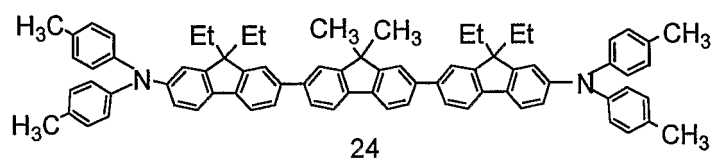
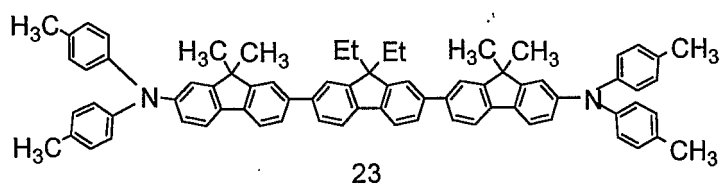
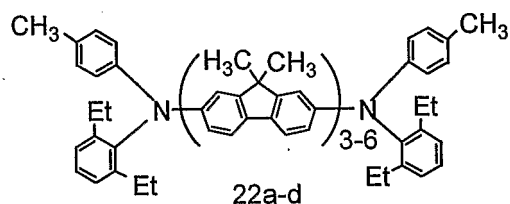
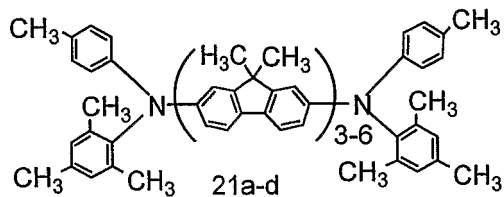
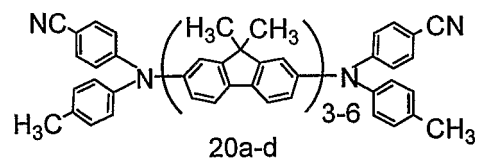
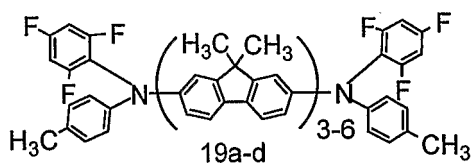
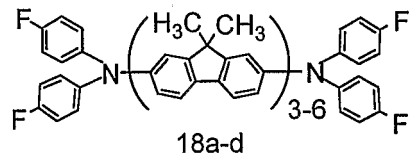
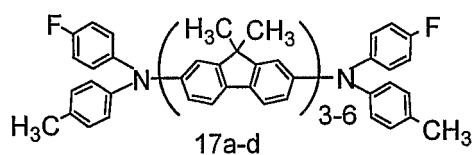
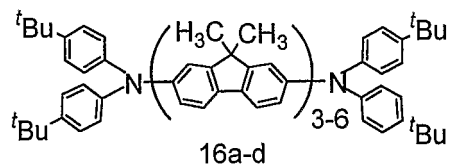
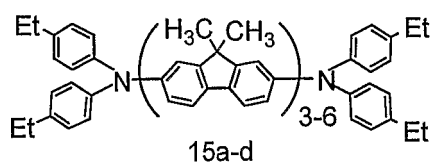


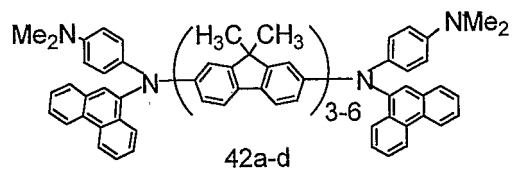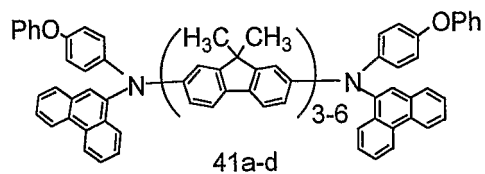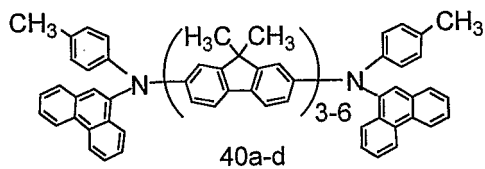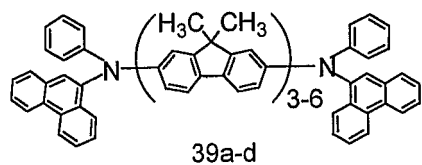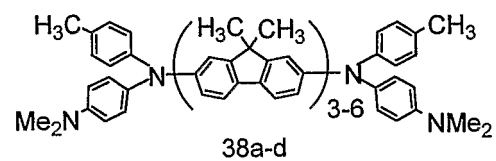
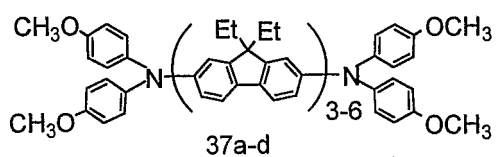
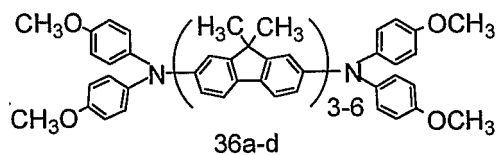
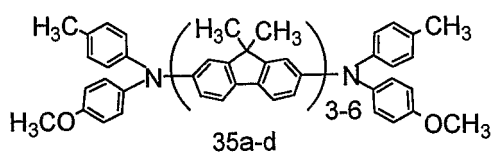
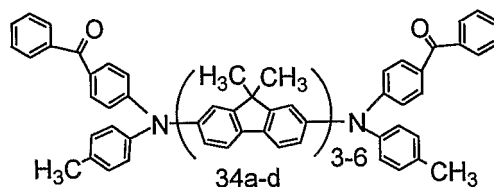
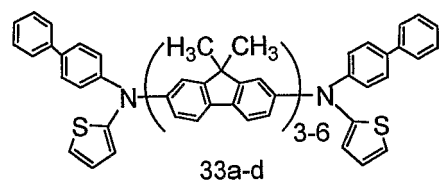
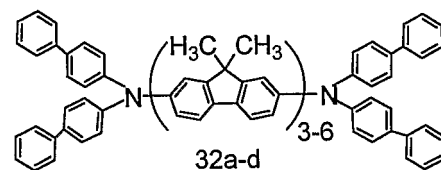
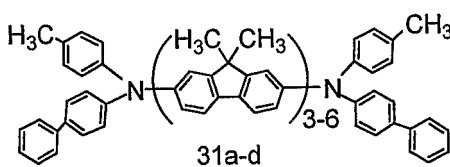

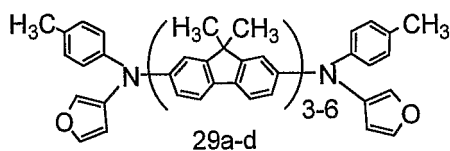
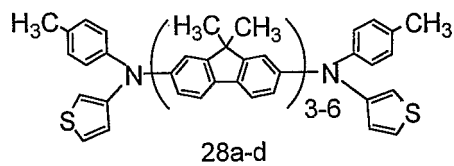
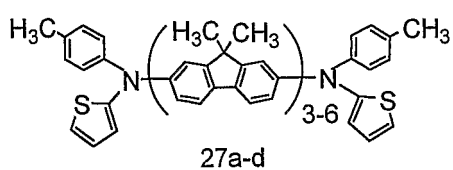


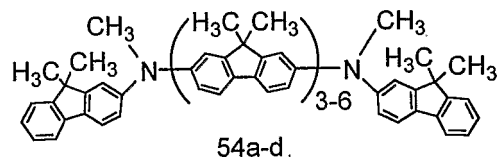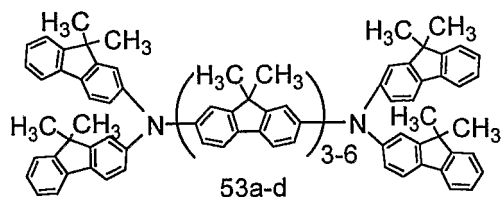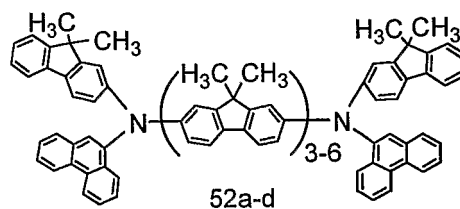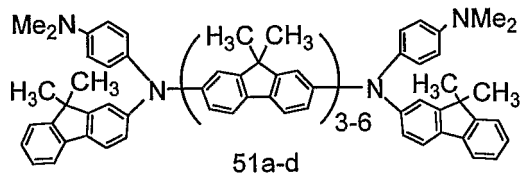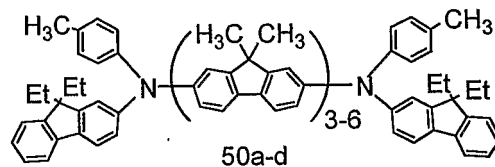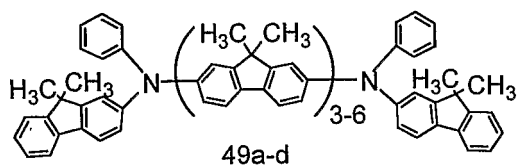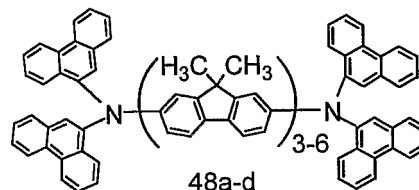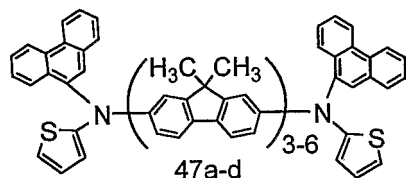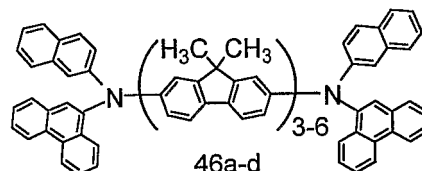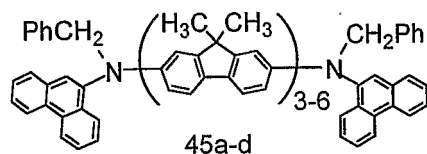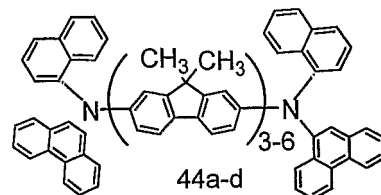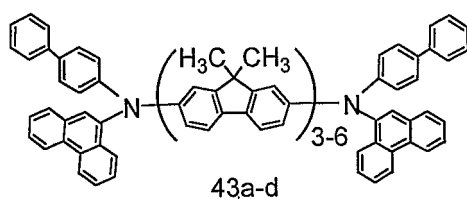


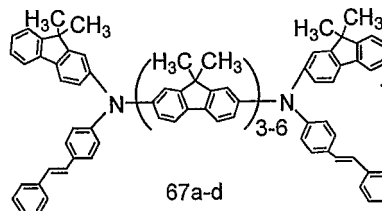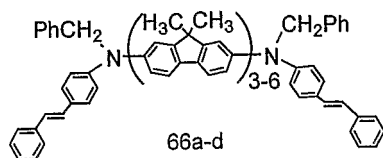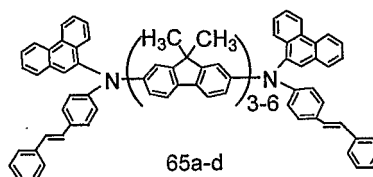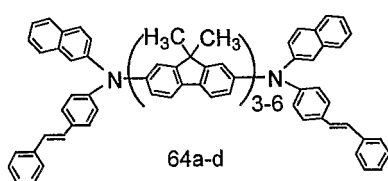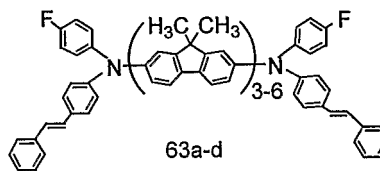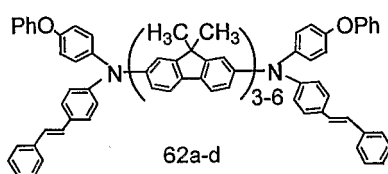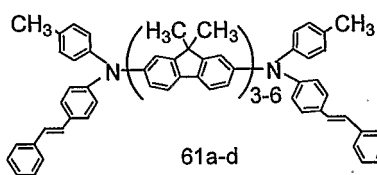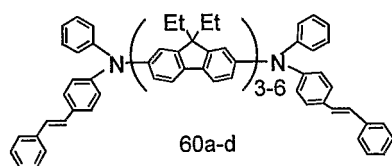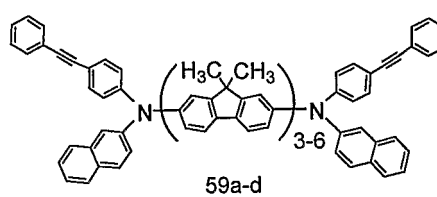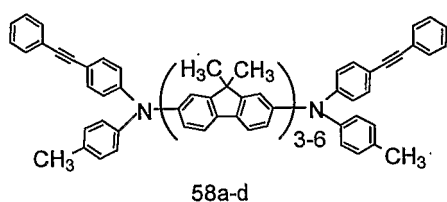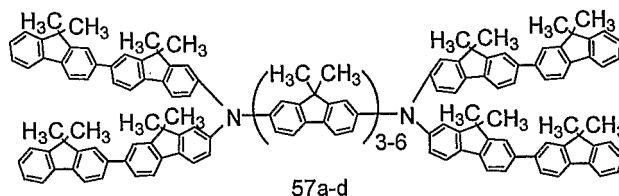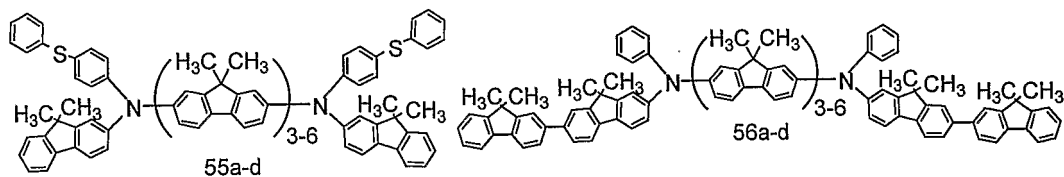

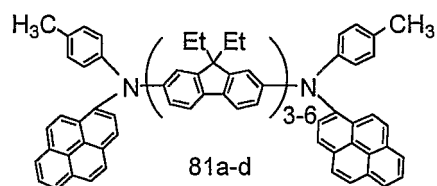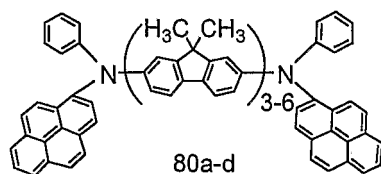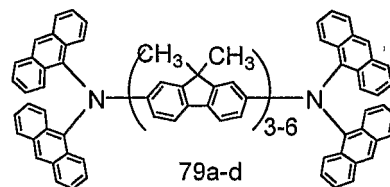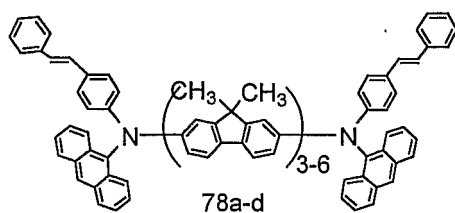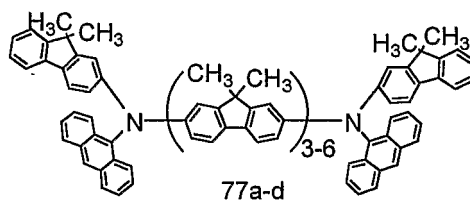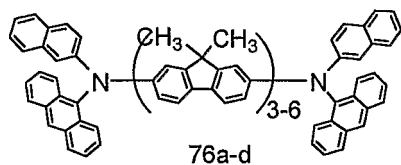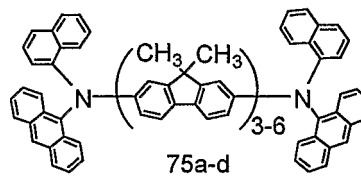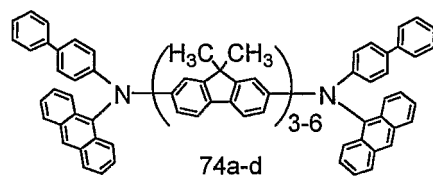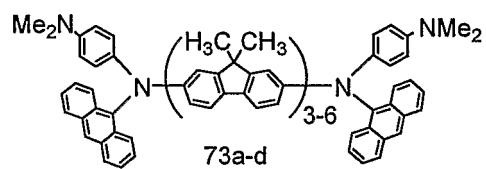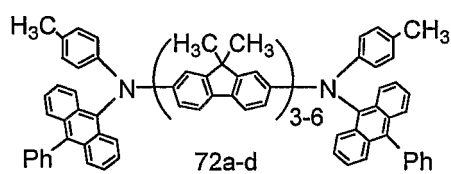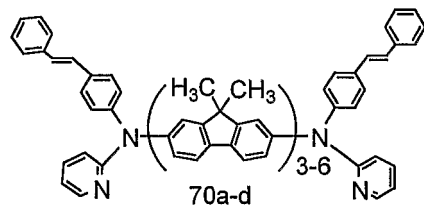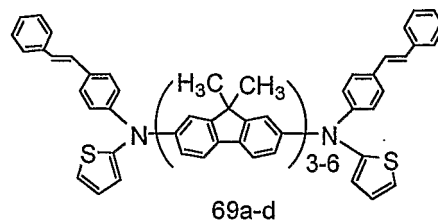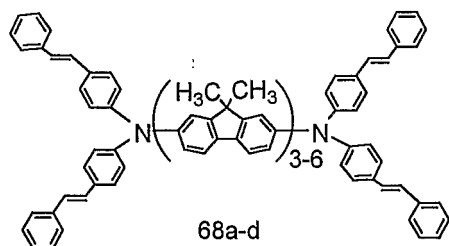

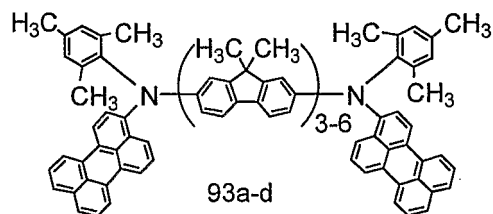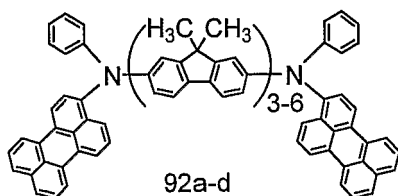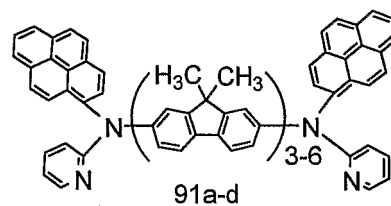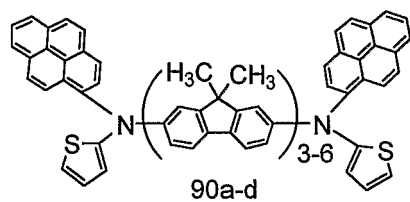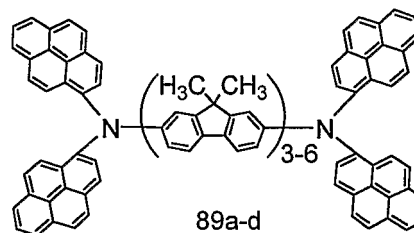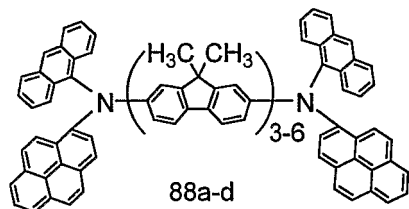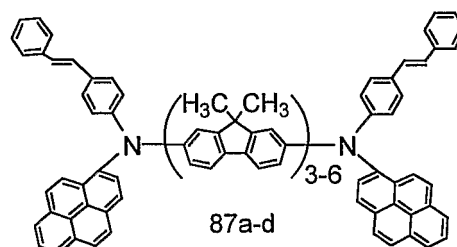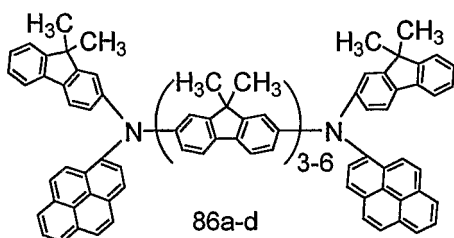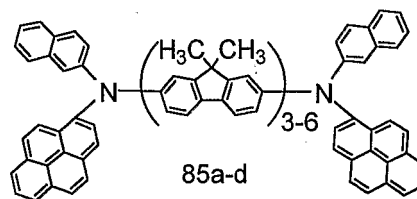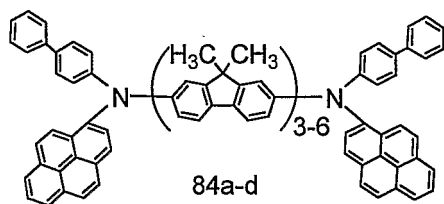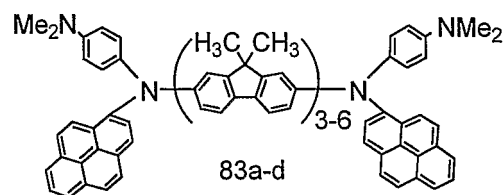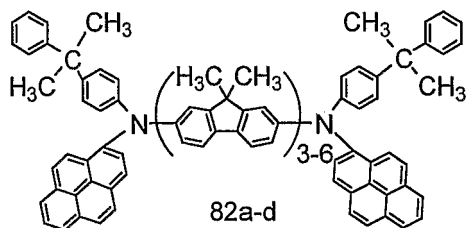

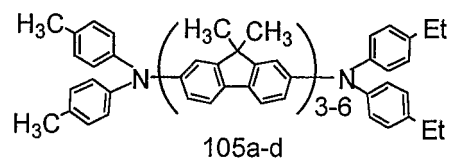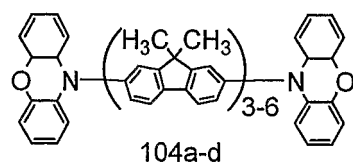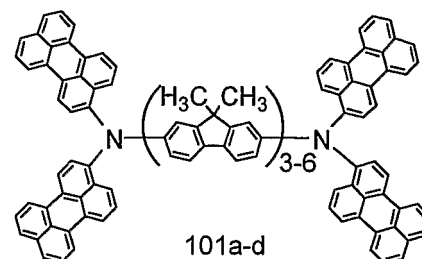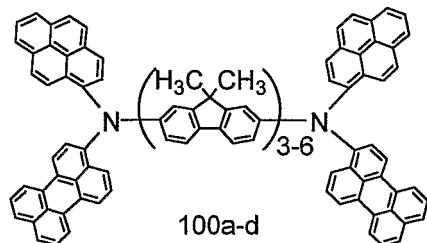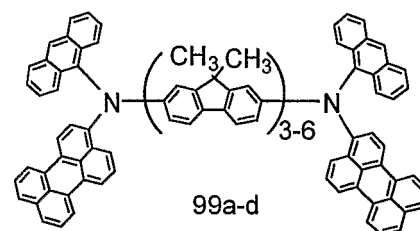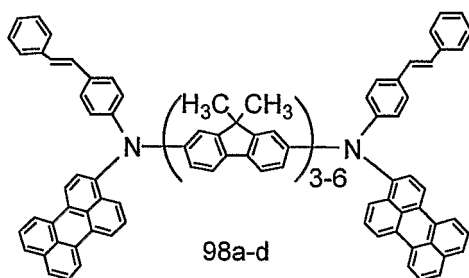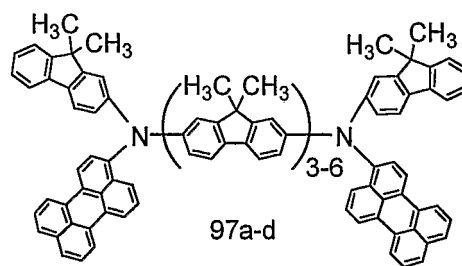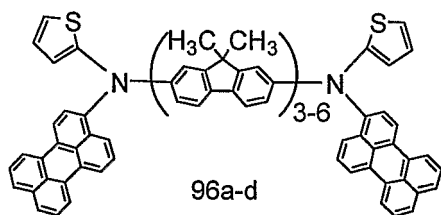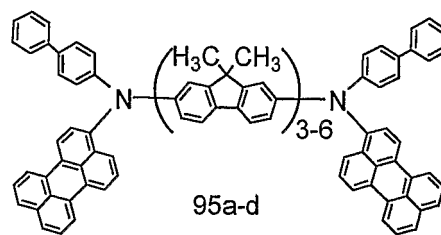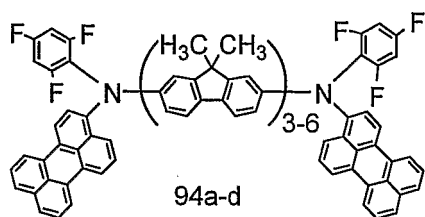

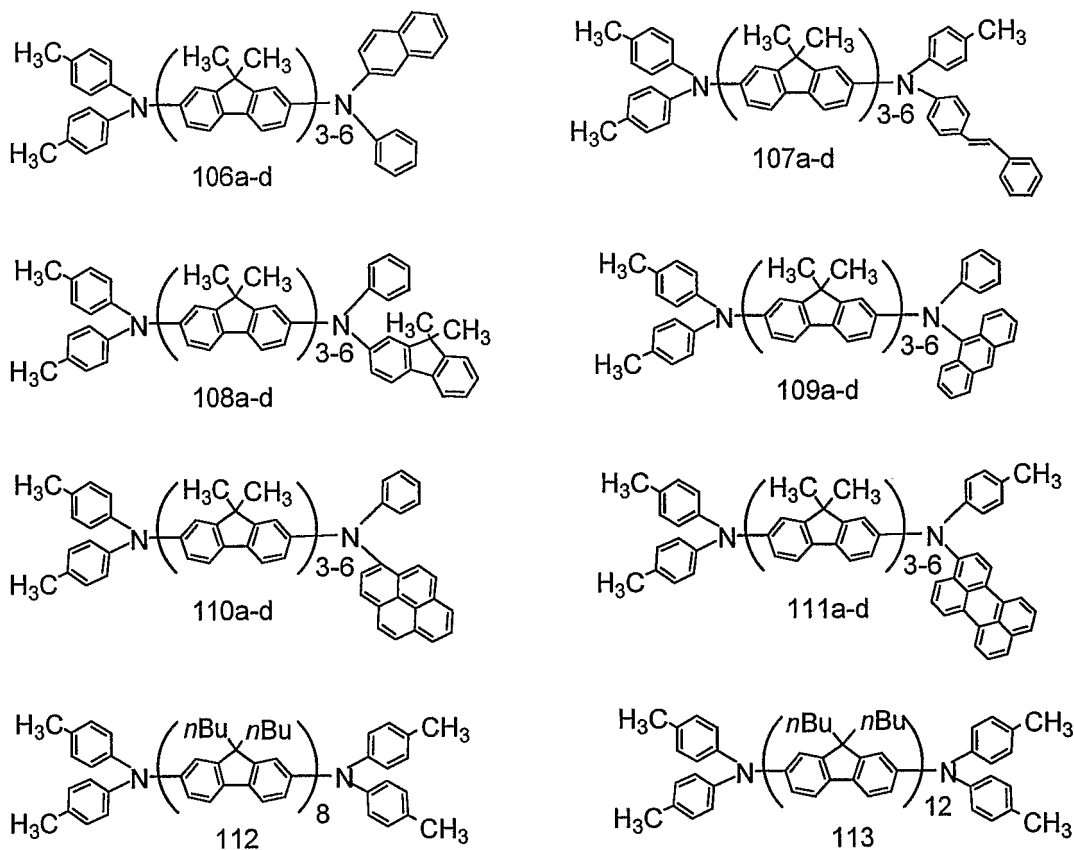

The compound of the present invention represented by the general formula (1) is suitable for use in a layer containing an organic compound in organic light-emitting devices, especially as a light-emitting layer, an electron-carrying layer, and a hole-carrying layer. Moreover, a layer that is formed by a vacuum vapor deposition method, solution coating method, etc., seldom suffers from crystallization and excels in stability with time.

The compound represented by the general formula (1) enables light emission that exhibits an emission spectrum with a narrower half peak width, that is,












even further superior color purity, by introducing fluorenylene molecules that have rigid-rod structures to the main chain of the molecules. Moreover, the introduction of the structure suppresses Stokes shift, so that the absorption wavelength can be shifted to a longer wavelength while suppressing a shift of the emission wavelength, by adjusting the length of the fluorenylene chain. Thus, when the compound is used as a dopant material, this allows use of a host material that has a light emission spectrum on the relatively long wavelength side. Furthermore, emission colors can be adjusted by adjusting the substituents on nitrogen atoms, X^1 to X^4 .







An estimation of oscillator strength by AM1/CNDOS calculations suggested that the oscillator strength could be increased by increasing the length of a fluorenylene chain from 2 to 3 or greater as in the present invention (calculations are performed on fluorenylene compounds composed of $-N(Tol)_2$ group and 9,9'-dimethylfluorenylene chain: oscillator strength 2.126527 for $n=2$; oscillator strength 2.974588 for $n=3$; oscillator strength 4.118244 for $n=5$). Calculations were carried out by means of Gaussian 98 software. The ground states of the molecules were determined by using semiempirical AM1 technique, and the energy level at the excited state was calculated



while maintaining the molecular structure, by calculating configuration interactions using CNDOS method. Since an increase in oscillator strength leads to an increase in absorption intensity (Abs), energy transfer smoothly takes place between the compound and the host material that has an emission spectrum at a longer wavelength.

The compound represented by the general formula (1) can be used as both a dopant material and a host material in a light-emitting layer and therefore can provide a device that exhibits a high color purity, high emission efficiency, and long lifetime. In particular, when the compound is used as a dopant material and is combined with a suitable host material that easily causes energy transfer to take place between it and the dopant compound, a device that maintains a high color purity and has higher emission efficiency as well can be obtained.

When using the compound represented by the general formula (1) as a dopant material in a light-emitting layer, the concentration ratio of the dopant material to the host material is preferably 0.01% to 50%, more preferably 1% to 10%. Moreover, examples of preferred host materials include the following compounds, although of course they are not limited to these.

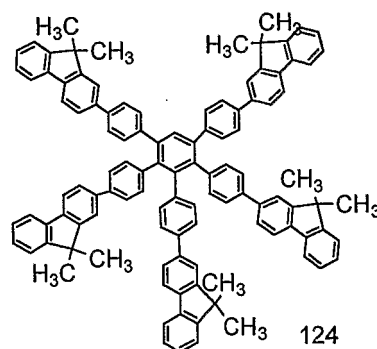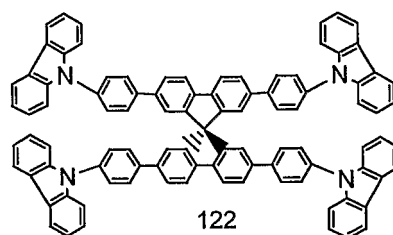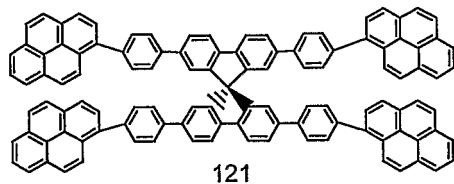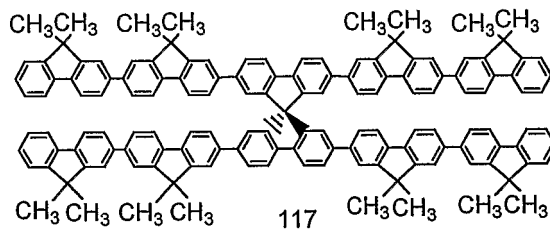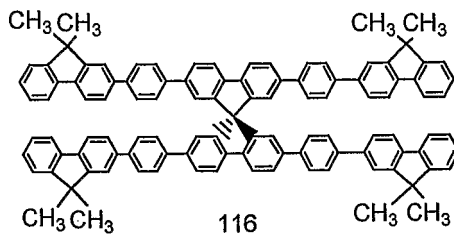

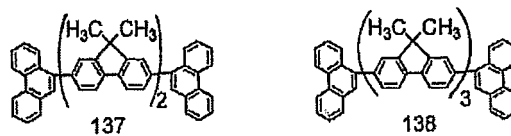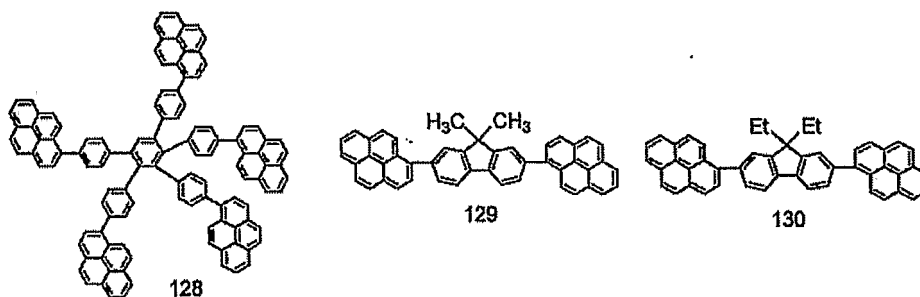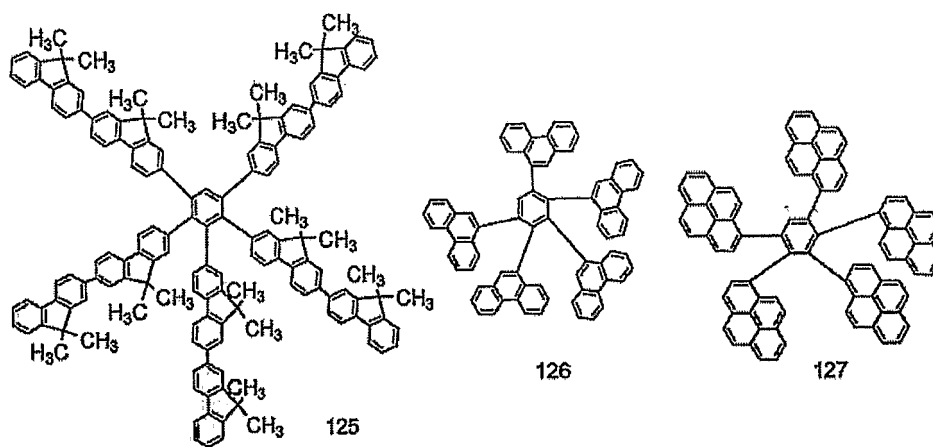

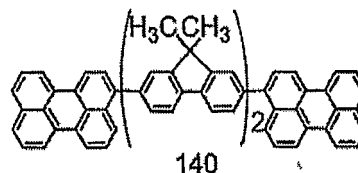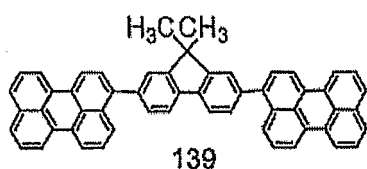

Next, the organic light-emitting device of the present invention will be explained in detail.

5 The organic light-emitting device of the present invention comprises a pair of electrodes comprising an anode and a cathode, and one or more layers that are sandwiched between the pair of electrodes and contain organic compounds, in which at least one of the layers containing the organic

10 least one of the layers containing the organic compounds, preferably a light-emitting layer, contains at least one of the fluorenylene compounds represented by the general formula (1).

Preferred examples of the organic light-emitting device of the present invention are shown in

15 Figs. 1 to 5.

Fig. 1 is a sectional view showing an example of the organic light-emitting device of the present invention. Fig. 1 shows a structure comprising a

20 substrate 1 on which an anode 2, a light-emitting layer 3, and a cathode 4 are provided in this order. This type of light-emitting device is suitable for use in the case where the light-emitting device has

that respectively have these characteristics are mixed for use in the device.

Fig. 2 is a sectional view showing another example of the organic light-emitting device of the present invention. Fig. 2 shows a structure comprising a substrate 1 on which an anode 2, a hole-carrying layer 5, an electron-carrying layer 6, and a cathode 4 are provided in this order. This type of light-emitting device is useful when materials that have hole-carrying ability or electron-carrying ability, or both of these abilities are used in the respective layers and light-emitting materials are combined with hole-carrying materials or electron-carrying materials that have no light-emitting property. In this case, a light-emitting layer 3 is formed of either the hole-carrying layer 5 or the electron-carrying layer 6.

Fig. 3 is a sectional view showing another example of the organic light-emitting device of the present invention. Fig. 3 shows a structure comprising a substrate 1 on which an anode 2, a hole-carrying layer 5, a light-emitting layer 3, an electron-carrying layer 6, and a cathode 4 are provided in this order. In this case, carrier transfer function and light emission function are separated. This type of the light-emitting device is combined appropriately with compounds respectively

having hole-carrying ability, electron-carrying ability, and light-emitting ability. Therefore, in addition to an extremely increased freedom in terms of selection of materials, the diversity of luminescent hues can be achieved because various compounds that have different emission wavelengths can be used. Moreover, it is possible to improve emission efficiency because the respective carriers or excitons are enclosed effectively in the light-emitting layer 3 provided in the center of the structure.

Fig. 4 is a sectional view showing another example of the organic light-emitting device of the present invention. In contrast with Fig. 3, Fig. 4 shows a structure in which a hole-injecting layer 7 is inserted between an anode 2 and a hole-carrying layer 5. This structure is effective for improving the adhesion between the anode 2 and the hole-carrying layer 5 or the hole injecting property, thus effectively achieving a reduction in required voltage.

Fig. 5 is a sectional view showing another example of the organic light-emitting device of the present invention. In contrast with Fig. 3, Fig. 5 shows a structure comprising a layer (hole-blocking layer 8) that prevents holes or excitons from passing toward a cathode 4 is inserted between a light-emitting layer 3 and an electron-carrying layer 6.

This structure effectively enables an improvement in emission efficiency by the use of a compound having a very high ionization potential as the hole-blocking layer 8.





5 However, Figs. 1 to 5 merely show very basic device structures, to which structures of the organic light-emitting device using the compound of the present invention are not limited. For example, various layer structures can be prepared, such as
10 providing an insulating layer in the interface between an electrode and an organic layer, providing a adhesion layer or an interfering layer, preparing a hole-carrying layer composed of two layers having different ionization potentials, etc.

15 The compound represented by the general formula (1) can be used in any of the forms depicted in Figs. 1 to 5.





 The present invention is particularly directed to a case where the compound represented by the
20 general formula (1) is used as a constituent of a light-emitting layer and further, if needed, host materials such as the above exemplified compounds 114 to 140 are used. However, hole-carrying compounds, light-emitting compounds, or electron-carrying
25 compounds that have already been known can be used together therewith if needed.

 Examples of these compounds are cited below.


Hole-carrying compounds

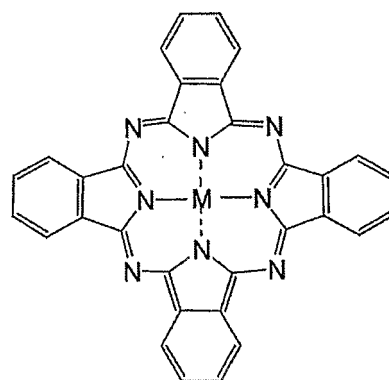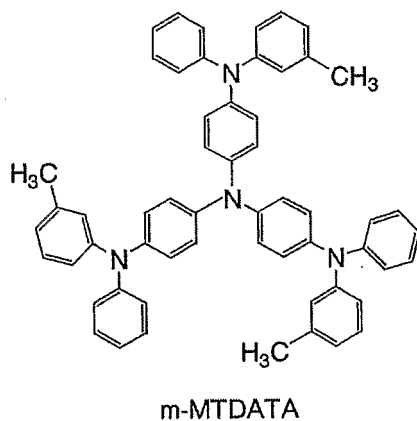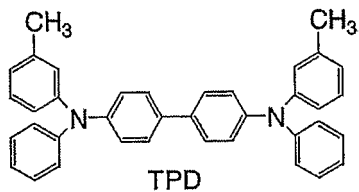


M : Cu, Mg, AlCl, TiO, SiCl₂, Zn, Sn, MnCl, GaCl, etc

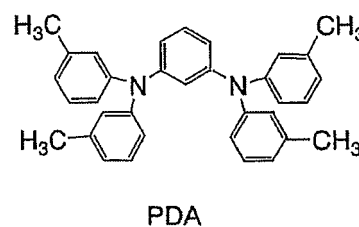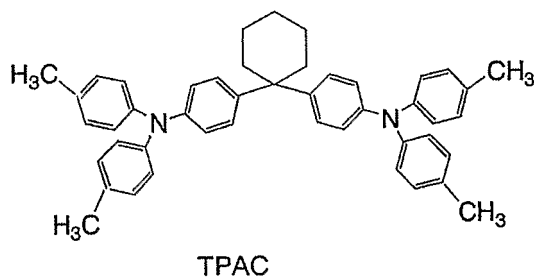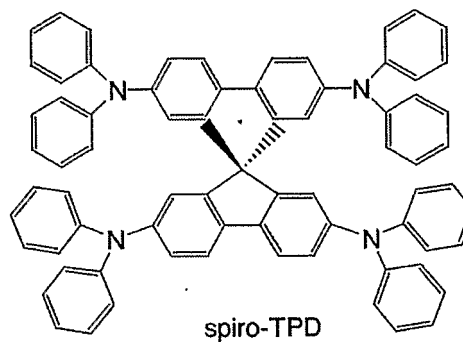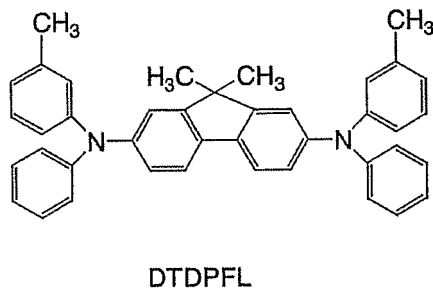


Electron-carrying compounds




M : Al , Ga

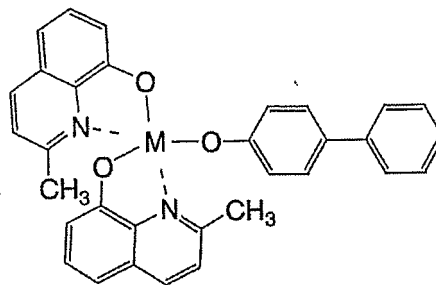


M : Al , Ga




M : Zn , Mg , Be

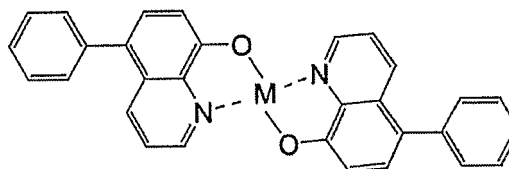



M : Zn , Mg , Be




M : Zn , Mg , Be



M : Zn , Mg , Be










M : Zn , Mg , Be

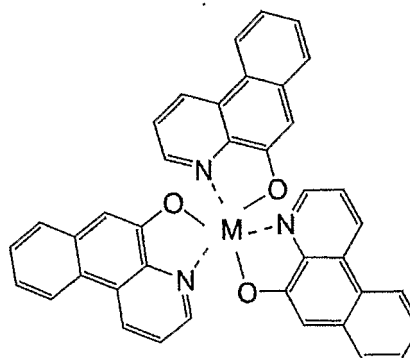


M : Al , Ga








Light-emitting materials

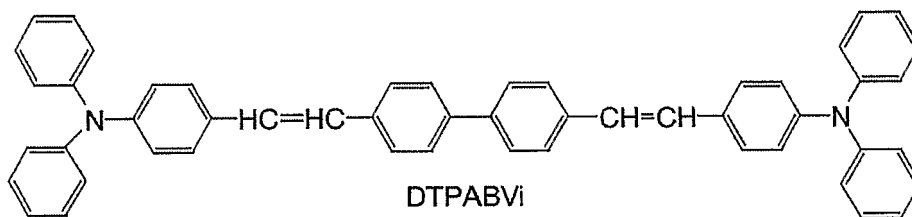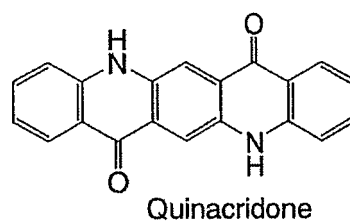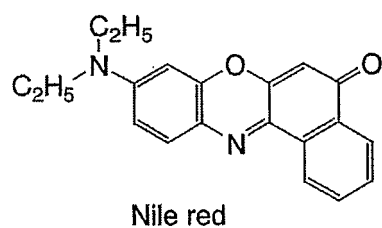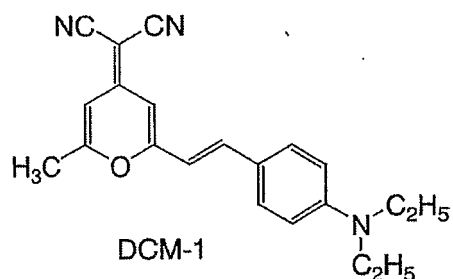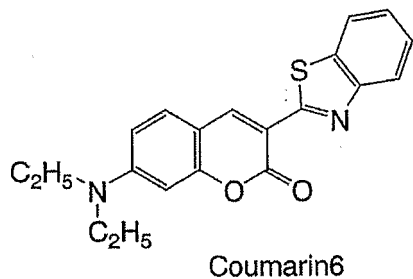



Light-emitting layer matrix materials and electron-carrying materials

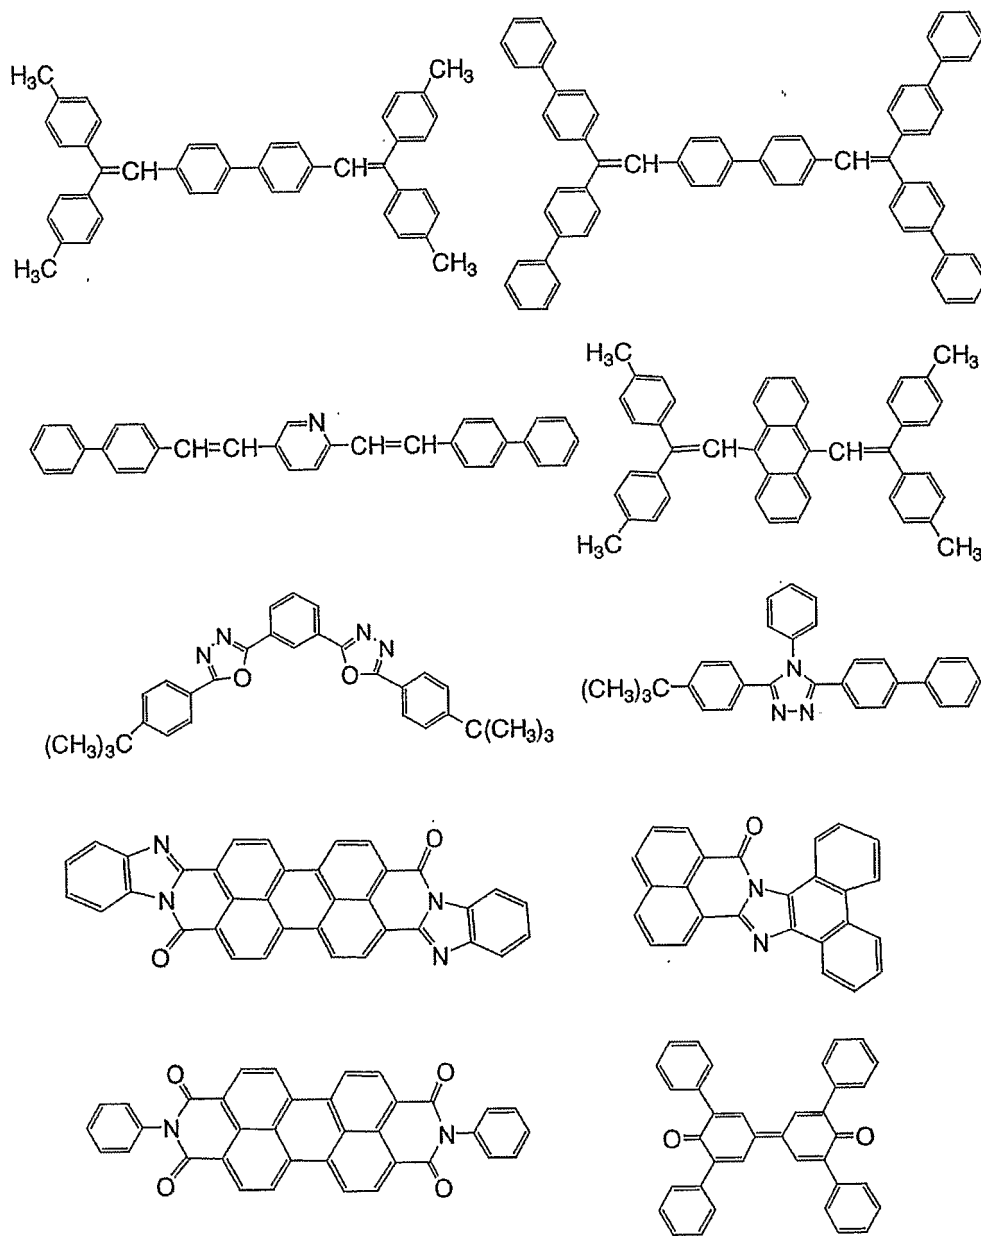

Polymeric hole-carrying materials

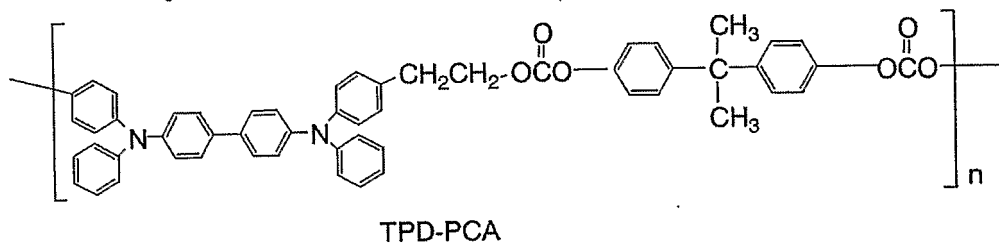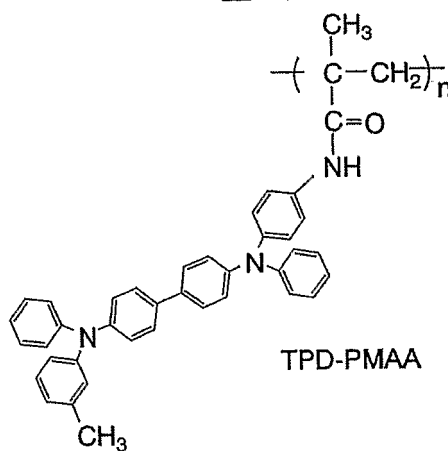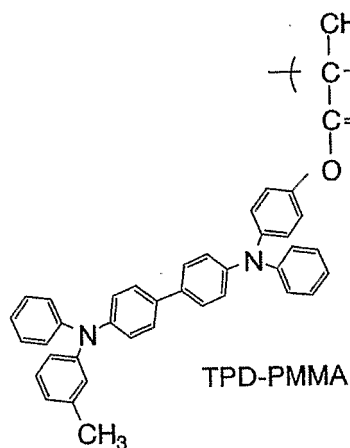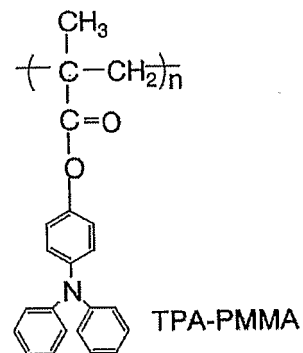


R: C₆H₁₃, C₈H₁₇, C₁₂H₂₅
Poly thiophene



Polysilane

Polymeric light-emitting materials and charge-carrying materials

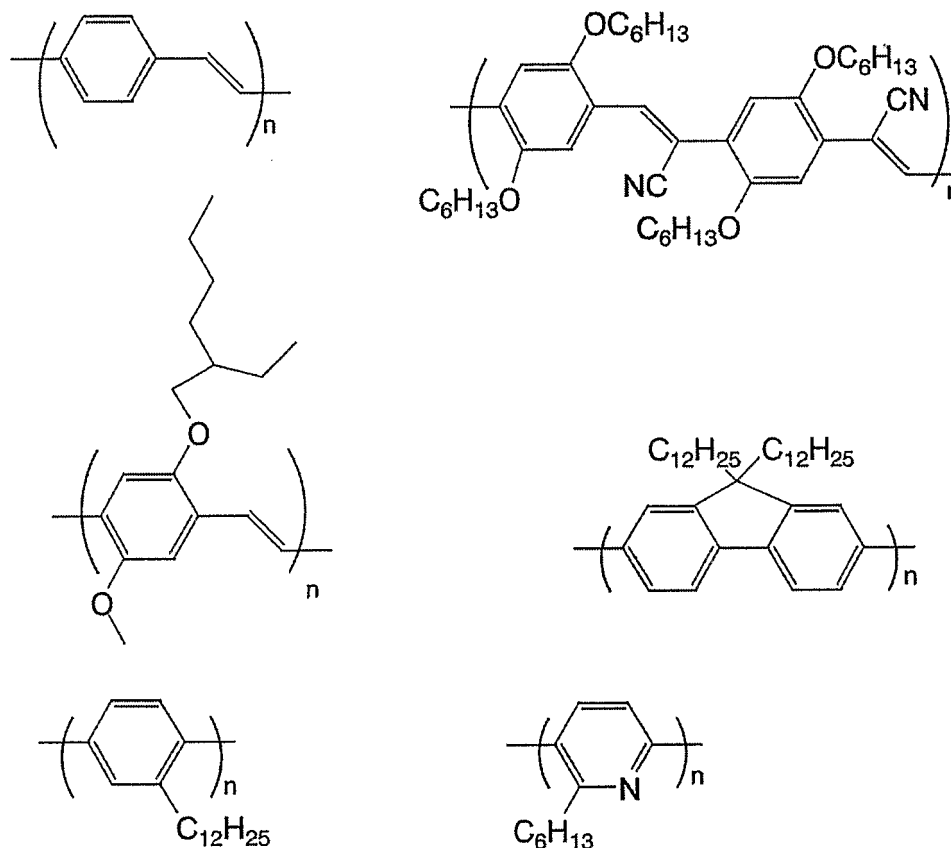

5 In the organic light-emitting device of the present invention, a layer containing the compound represented by the general formula (1) and a layer containing another organic compound can be formed into a thin film generally by a vacuum vapor
 10 deposition method or by a coating method after dissolving the compound in a suitable solvent. In particular, when film formation is performed by a

coating method, the compounds can be combined with a suitable binding resin to form a film.

The above binding resin can be selected from various binding resins, such as polyvinylcarbazole resin, polycarbonate resin, polyester resin, 5 polyarylate resin, polystyrene resin, acrylic resin, methacrylic resin, butyral resin, poly(vinyl acetal) resin, diallyl phthalate resin, phenol resin, epoxy resin, silicone resin, polysulfone resin, urea resin, 10 etc., although they are not limited to the above. Moreover, those resins may be used singly, or one or more resins may be mixed with each another as a copolymer.

The anode material is preferably selected from materials having the greatest work function possible. 15 For example, metal simple substances such as gold, platinum, nickel, palladium, cobalt, selenium, and vanadium, or alloys of these, metal oxides such as tin oxide, zinc oxide, indium-tin oxide (ITO), and 20 indium-zinc oxide can be used. Furthermore, conductive polymers such as polyaniline, polypyrrole, polythiophene, and polyphenylene sulfide can also be used. These electrode materials may be used singly or in combination with each another.

25 On the other hand, the cathode materials are preferably selected from materials having a small work function. For example, metal simple substances

such as lithium, sodium, potassium, cesium, calcium, magnesium, aluminum, indium, silver, lead, tin, and chromium, or alloys of these can be used. Metal oxides such as indium-tin oxide (ITO) can also be
5 used. Additionally, the cathode may be structured as a single layer or multiple layers.

The substrates for use in the present invention are not particularly limited. For example, opaque substrates such as metal substrates and ceramic
10 substrates, or transparent substrates such as a glass, quartz, and plastic sheet are used. Moreover, emitted light can be controlled by applying a color filter film, a fluorescent color conversion filter film, a dielectric reflection film, etc. to the
15 substrate.

Besides, a protection layer or a seal layer may be provided in a prepared device for the purpose of preventing the device from coming into contact with oxygen or moisture. Examples of the materials for
20 use in the protection layer include: inorganic material films such as a diamond thin film, metal oxides, and metal nitrides; polymer films such as a fluororesin, poly(p-xylene), polyethylene, silicone resin, and polystyrene resin; and further light-
25 setting resins, etc. Furthermore, the prepared device can be packaged with a suitable seal resin by covering the device with a glass, a gas-impermeable

film, metal, etc.


EXAMPLES

The present invention will be specifically explained with reference to the following examples, but the present invention is not limited to these examples.

(EXAMPLE 1)

(Method for producing the exemplified compound No. 40a)

10

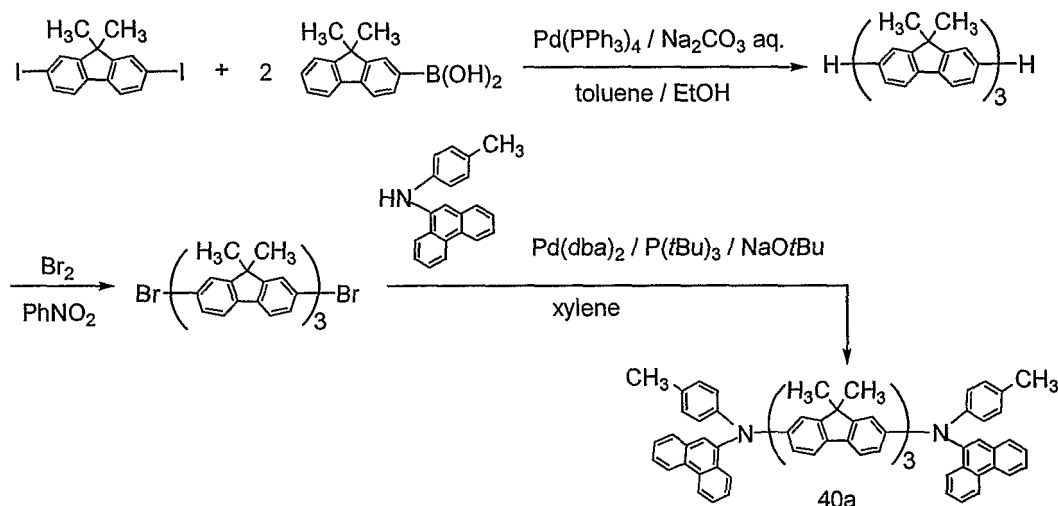

Under nitrogen flow, 5 g (11.2 mmol) of 2,7-diiido-9,9-dimethylfluorene, 9 g (24.7 mmol) of 9,9-dimethylfluorene-2-boronic acid were dissolved in a mixed solvent of 200 ml of degassed toluene and 100 ml of ethanol and were stirred. To this solution, 245 ml of an aqueous sodium carbonate solution prepared by dissolving 51 g of sodium carbonate

- 39 -

anhydride in 250 ml of water was added dropwise. After stirring for 30 minutes, 1.42 g (1.23 mmol) of tetrakis(triphenylphosphine) palladium was added. The mixture was then heated and stirred for about 3
5 hours on an oil bath heated to 80°C. After cooling the reaction solution down to room temperature, 100 ml of water and 100 ml of ethyl acetate were added thereto, and then the water phase and the organic phase were separated. The water phase was then
10 extracted with toluene and ethyl acetate. The extract was added to the organic phase obtained previously and was dried with sodium sulfate. After distilling away the solvents, the residue was purified by column chromatography on silica gel
15 (toluene:hexane=1:2) and thus 4.9 g of tris(9,9-dimethylfluorenylene) was obtained.

Under nitrogen atmosphere, 4.5 g (7.79 mmol) of tris(9,9-dimethylfluorenylene) was heated and dissolved in 150 ml of nitrobenzene. Then, 2.5 g
20 (15.6 mmol) of bromine was added dropwise thereto slowly on an oil bath heated to 60°C and were further stirred for about 2 hours. After cooling the reaction solution with an ice bath and then stirring for a while, to room temperature, precipitates were
25 filtrated. The precipitates were recrystallized from toluene, and after filtration and drying thereof, 3.4 g of dibromide of tris(9,9-dimethylfluorenylene) was


obtained.

Under nitrogen atmosphere, 156 mg (0.272 mmol) of palladium bis(benzylidene acetone) and 330 mg (1.63 mmol) of tri-tert-butylphosphine were dissolved in 20 ml of xylene and were stirred for 15 minutes at room temperature. To this solution, 1 g (1.36 mmol) of dibromide of tris(9,9-dimethylfluorenylene) dissolved in 50 ml of xylene was added dropwise and stirred for 30 minutes on an oil bath heated to 50°C. Then, 1.15 g (4.08 mmol) of N-(4-methylphenyl)-N-(9-phenanthryl)amine was dissolved in 20 ml of xylene and added dropwise to the solution. Subsequently, 588 mg (6.12 mmol) of sodium tert-butoxide was added thereto. The mixture was then heated and stirred for about 5 hours on an oil bath heated to 130°C. After cooling the reaction solution down to room temperature, 50 ml of water was added and then the water phase and the organic phase were separated. The water phase was then extracted with toluene and ethyl acetate. The extract was added to the organic phase obtained previously and was dried with magnesium sulfate. After distilling away the solvents, the residue was purified by column chromatography on silica gel (toluene:hexane=1:2) and thus 1.2 g of the exemplified compound No. 40a was obtained.

(EXAMPLE 2)

(Method for producing the exemplified compound No.

71b)

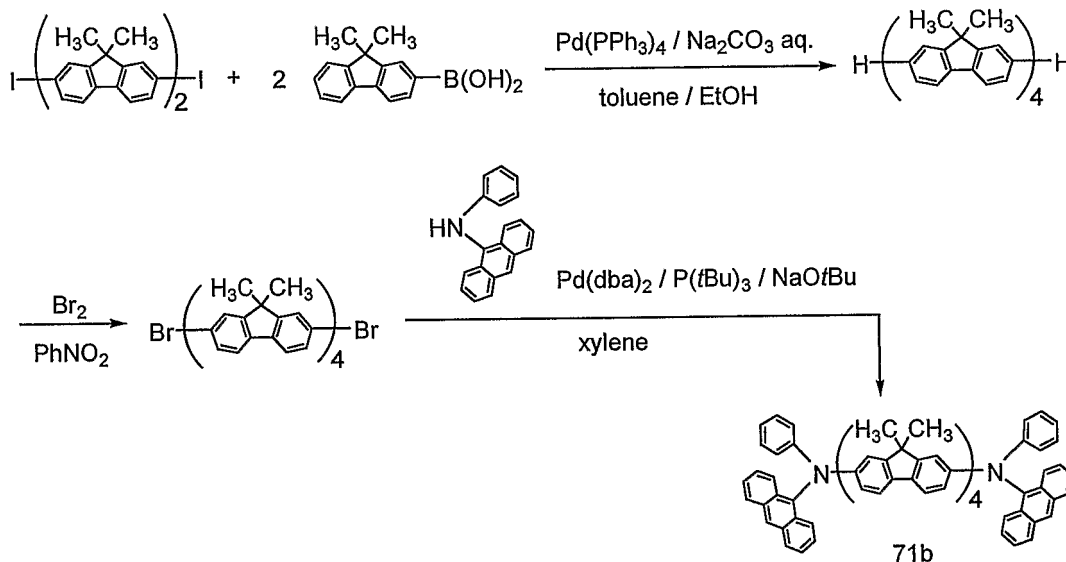

5 Under nitrogen flow, 5 g (7.84 mmol) of bis(2-iodo-9,9-dimethylfluorene), 6.26 g (17.2 mmol) of 9,9-dimethylfluorene-2-boronic acid were dissolved in a mixed solvent of 200 ml of degassed toluene and 100 ml of ethanol, and were stirred. To this solution,

10 170 ml of an aqueous sodium carbonate solution prepared by dissolving 36 g of sodium carbonate anhydride in 180 ml of water was added dropwise. After stirring this for 30 minutes, 994 mg (0.86 mmol) of tetrakis(triphenylphosphine) palladium was

15 added. The mixture was then heated and stirred for about 3 hours on an oil bath heated to 80°C. After cooling the reaction solution down to room temperature, 100 ml of water and 100 ml of ethyl acetate were added, and then the water phase and the

organic phase were separated. The water phase was then extracted with toluene and ethyl acetate. The extract was added to the organic phase obtained previously and was dried with sodium sulfate. After
5 distilling away the solvents, the residue was purified by column chromatography on silica gel (toluene:hexane=1:2) and thus 3.92 g of tetrakis(9,9-dimethylfluorenylene) was obtained.

Under nitrogen atmosphere, 3 g (3.90 mmol) of
10 tetrakis(9,9-dimethylfluorenylene) was heated and dissolved in 150 ml of nitrobenzene. Then, 1.4 g (7.80 mmol) of bromine was added dropwise thereto slowly on an oil bath heated to 60°C and were further stirred for about 2 hours. After cooling the
15 reaction solution with an ice bath and then stirring for a while, precipitates were filtrated. The precipitates were recrystallized from xylene, and after filtration and drying thereof, 2 g of dibromide of tetrakis(9,9-dimethylfluorenylene) was obtained.

20 Under nitrogen atmosphere, 124 mg (0.216 mmol) of palladium bis(benzylidene acetone) and 130 mg (0.648 mmol) of tri-tert-butylphosphine were dissolved in 20 ml of xylene and were stirred for 15 minutes at room temperature. To this solution, 1 g
25 (1.08 mmol) of dibromide of tetrakis(9,9-dimethylfluorenylene) dissolved in 50 ml of xylene was added dropwise and stirred for 30 minutes on an

oil bath heated to 50°C. Then, 694 mg (2.59 mmol) of N-(1-anthracenyl)-N-(phenyl)amine was dissolved in 20 ml of xylene and added dropwise to the solution. Subsequently, 374 mg (3.89 mmol) of sodium tert-
5 butoxide was added. The mixture was then heated and stirred for about 7 hours on an oil bath heated to 130°C. After cooling the reaction solution down to room temperature, 50 ml of water was added and then the water phase and the organic phase were separated.
10 The water phase was then extracted with toluene and ethyl acetate. The extract was added to the organic phase obtained previously and was dried with magnesium sulfate. After distilling away the solvents, the residue was purified by column
15 chromatography on silica gel (toluene:hexane=1:2) and thus 900 mg of the exemplified compound No. 71b was obtained.


(EXAMPLE 3)

20 An organic light-emitting device having a structure shown in Fig. 3 was produced by the following method.

A transparent and conductive supporting substrate was used which was produced by forming a film of indium-tin oxide (ITO) as an anode 2 on a
25 glass substrate as a substrate 1, the film having a film thickness of 120 nm by means of sputtering method. This substrate was cleaned ultrasonically

with acetone and isopropyl alcohol (IPA) in this order. After a boiling cleaning with IPA, the substrate was then dried. The substrate was further cleaned with UV/ozone and then was used as a transparent and conductive supporting substrate.

Using the compound represented by the following structural formula as a hole-carrying material, a chloroform solution was prepared so that the concentration thereof was 0.5% by weight.

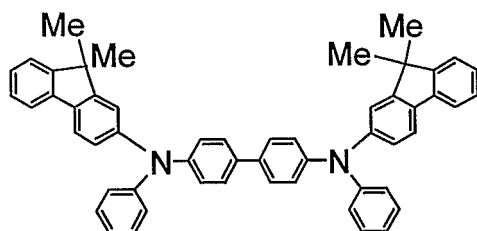

10

This solution was added dropwise onto the above-mentioned anode 2, so that spin coating was carried out to form a film, firstly with the revolutions kept at 500 rpm for 10 seconds, secondly with the revolutions kept at 1000 rpm for 1 minute. After forming the film, the film was dried for 10 minutes in a vacuum oven at 80°C, so that the solvents in the thin film were fully removed. The thickness of the hole-carrying layer thus formed was 50 nm.

15

20

Then, the above exemplified compound No. 2a was deposited as a light-emitting layer 3 on a hole-

carrying layer 5, so that a light-emitting layer 3
having a thickness of 20 nm was provided. The degree
of vacuum at the vapor deposition was 1.0×10^{-4} Pa,
and the film forming rate was 0.2 to 0.3 nm per
5 second.

Furthermore, a film of aluminum quinolinol
(Alq3) as an electron-carrying layer 6 was formed by
vacuum vapor deposition method so as to have a
thickness of 40 nm. The degree of vacuum at the
10 vapor deposition was 1.0×10^{-4} Pa, and the film
forming rate was 0.2 to 0.3 nm per second.

Next, using a deposition material comprising an
aluminum-lithium alloy (having a lithium
concentration of 1 atom%), a metal film layer having
15 a thickness of 10 nm was formed on the above organic
layer by means of vacuum vapor deposition method.
Subsequently, an aluminum film was further provided
so as to have a thickness of 150 nm by vacuum vapor
deposition method. Thus, an organic light-emitting
20 device having an aluminum-lithium alloy film as an
electron-injecting electrode (cathode 4) was prepared.
The degree of vacuum at the vapor deposition was 1.0
 $\times 10^{-4}$ Pa, and the film forming rate was 1.0 to 1.2 nm
per second.

25 The organic electroluminescent device thus
obtained was covered with a protection glass in a dry
air atmosphere and sealed with an acrylic resin

adhesive, so that it is not deteriorated due to moisture adsorption.

Using an ITO electrode (anode 2) as a positive electrode and an Al-Li electrode (cathode 4) as a negative electrode, a voltage of 6 V was applied to the device thus obtained, so that a light emission having an emission brightness of 1600 cd/m², a maximum brightness of 9100 cd/m², and an emission efficiency of 1.25 lm/W was observed.

10 (EXAMPLES 4 to 9)

Devices were prepared and examined in a similar manner as in Example 3 except for using the compounds shown in Table 1 instead of the exemplified compound No. 2a. The results are shown in Table 1.

15 Table 1

Example	Exemplified Compound No.	Applied Voltage (V)	Brightness (cd/m ²)	Maximum brightness (cd/m ²)	Efficiency (lm/w)
4	13c	6	1830	10500	1.35
5	40a	6	1640	9870	1.28
6	50a	6	1960	11200	1.40
7	71b	5	1260	13150	1.46
8	80a	5	1430	14250	1.49
9	108a	6	2090	11310	1.41

(Example 10)

The organic light-emitting device that has a structure shown in Fig. 3 was prepared by the following method.

20 A hole-carrying layer 5 was formed on a transparent and conductive supporting substrate in a

similar manner as in Example 3.

Subsequently, the above exemplified compound No. 6b was deposited as a light-emitting layer on the hole-carrying layer 5, so that a light-emitting layer 3 having a thickness of 20 nm was provided. The degree of vacuum at the vapor deposition was 1.0×10^{-4} Pa, and the film forming rate was 0.2 to 0.3 nm per second.

Furthermore, an electron-carrying layer 6 was formed by forming a film of bathophenanthroline (Bphen) having a thickness of 40 nm by vacuum vapor deposition method. The degree of vacuum at the vapor deposition was 1.0×10^{-4} Pa, and the film forming rate was 0.2 to 0.3 nm per second.

Next, after forming a cathode 4 in a similar manner as in Example 1, the device was sealed.

Using an ITO electrode (anode 2) as a positive electrode and an Al-Li electrode (cathode 4) as a negative electrode, a voltage of 6 V was applied to the device thus obtained, so that a light emission having an emission brightness of 2250 cd/m², a maximum brightness of 11750 cd/m², and an emission efficiency of 1.39 lm/W was observed.

(EXAMPLES 11 to 14)

Devices were prepared and examined in a similar manner as in Example 10 except for using the compounds shown in Table 2 instead of the exemplified

compound No. 6b. The results are shown in Table 2.

Table 2

Example	Exemplified Compound No.	Applied Voltage (V)	Brightness (cd/m ²)	Maximum brightness (cd/m ²)	Efficiency (lm/w)
11	23	6	2140	11230	1.38
12	47a	6	1970	10140	1.30
13	61a	6	2230	12500	1.43
14	74a	5	2180	14200	1.58

(EXAMPLE 15)

5 A device was prepared in a similar manner as in Example 3 except for providing a light-emitting layer having a thickness of 20 nm by co-depositing the above exemplified compound No. 23 and the above exemplified compound No. 120 (4:100 by weight) as a
10 light-emitting layer 3.

 Using an ITO electrode 2 as a positive electrode and an Al-Li electrode 4 as a negative electrode, a voltage of 4 V was applied to the device thus obtained, so that a light emission having an
15 emission brightness of 1100 cd/m², a maximum brightness of 27700 cd/m², and an emission efficiency of 2.25 lm/W was observed.

(EXAMPLES 16 to 18)

 Devices were prepared and examined in a similar
20 manner as in Example 15 except for using the compounds shown in Table 3 instead of the exemplified compound No. 23. The results are shown in Table 3.

Table 3

Example	Exemplified Compound No.	Applied Voltage (V)	Brightness (cd/m ²)	Maximum brightness (cd/m ²)	Efficiency (lm/w)
16	40a	4	1240	27200	2.36
17	71b	4	2150	30300	3.20
18	92a	4	2670	32400	3.45

(EXAMPLES 19 to 21)

Devices were prepared and examined in a similar manner as in Example 15 except for using the compounds shown in Table 4 instead of the exemplified compound No. 120. The results are shown in Table 4.

Table 4

Example	Exemplified Compound No.	Applied Voltage (V)	Brightness (cd/m ²)	Maximum brightness (cd/m ²)	Efficiency (lm/w)
19	129	4	3720	34300	3.65
20	130	4	3800	33100	3.62
21	132	4	3350	31600	3.24

10 (EXAMPLE 22)

A device was prepared in a similar manner as in Example 10 except for providing a light-emitting layer having a thickness of 20 nm by co-depositing the above exemplified compound No. 23 and the above exemplified compound No. 120 (4:100 by weight) as a light-emitting layer 3.

Using an ITO electrode 2 as a positive electrode and an Al-Li electrode 4 as a negative electrode, a voltage of 4 V was applied to the device thus obtained, so that a light emission having an emission brightness of 1890 cd/m², a maximum

brightness of 29200 cd/m², and an emission efficiency of 2.501 lm/W was observed.

(EXAMPLES 23 to 25)

5 Devices were prepared and examined in a similar manner as in Example 15 except for using the compounds shown in Table 5 instead of the exemplified compound No. 23. The results are shown in Table 5.

Table 5

Example	Exemplified Compound No.	Applied Voltage (V)	Brightness (cd/m ²)	Maximum brightness (cd/m ²)	Efficiency (lm/w)
23	43a	4	1950	28900	2.66
24	49a	4	2350	34200	3.53
25	61a	4	3100	32300	3.45

10 (EXAMPLES 26 to 28)

Devices were prepared and examined in a similar manner as in Example 15 except for using the compounds shown in Table 6 instead of the exemplified compound No. 120. The results are shown in Table 6.

15 Table 6

Example	Exemplified Compound No.	Applied Voltage (V)	Brightness (cd/m ²)	Maximum brightness (cd/m ²)	Efficiency (lm/w)
26	129	3	500	38300	5.64
27	130	3	530	39100	5.68
28	132	3	470	34700	4.20

(EXAMPLE 29)

A voltage was applied to the device produced in Example 26 for 100 hours with the current density kept at 7.0 mA/cm² in a nitrogen atmosphere. As a result, the initial brightness was 400 cd/m² and the

20

brightness after 100 hours was 380 cd/m² and thus deterioration in brightness was small.

(EXAMPLES 30 to 34)


The emission spectra of the devices produced in Examples 4, 5, 11, 19, and 22 were observed by using MCPD-7000 and the CIE chromaticity coordinates were measured. The results are shown in Table 7.

Table 7

Example	Example of devices	CIE chromaticity coordinates (x, y)
30	4	0.15, 0.13
31	5	0.15, 0.12
32	11	0.15, 0.12
33	19	0.15, 0.11
34	22	0.15, 0.11

(COMPARATIVE EXAMPLE 1)

A device was produced in a similar manner as in Example 10 except for using the following comparative compound in a light-emitting layer 3.

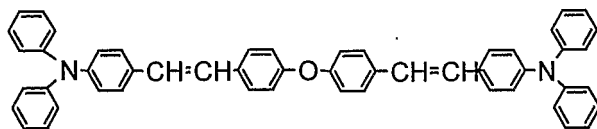

15

Using an ITO electrode 2 as a positive electrode and an Al-Li electrode 4 as a negative electrode, a voltage of 6 V was applied to the device thus obtained, so that a light emission having an

20

emission brightness of 940 cd/m^2 , a maximum brightness of 5050 cd/m^2 , and an emission efficiency of 0.63 lm/W was observed.

In addition, the emission spectrum of this
5 device was observed with MCPD-7000 and CIE chromaticity coordinates were measured. The result was $(x, y) = (0.16, 0.29)$.
(COMPARATIVE EXAMPLE 2)

A device was prepared in a similar manner as in
10 Example 10 except for providing a light-emitting layer 3 having a thickness of 20 nm by co-depositing the above comparative compound and the above exemplified compound No. 129 (4:100 by weight) as a light-emitting layer 3.

15 Using an ITO electrode 2 as a positive electrode and an Al-Li electrode 4 as a negative electrode, a voltage of 6 V was applied to the device thus obtained, so that a light emission having an emission brightness of 1060 cd/m^2 , a maximum
20 brightness of 9270 cd/m^2 , and an emission efficiency of 0.82 lm/W was observed.

In addition, the emission spectrum of this device was observed with MCPD-7000 and CIE chromaticity coordinates were measured. The result
25 was $(x, y) = (0.16, 0.27)$.


INDUSTRIAL APPLICABILITY

As explained above, organic light-emitting devices using the compounds represented by the general formula (1) exhibit extremely pure luminescent hue, and have light emission
5 characterized by high efficiency, high brightness, and long lifetime. In particular, an organic layer containing the compound represented by the general formula (1) is excellent as a light-emitting layer.

Moreover, the devices can be produced by the
10 use of vacuum vapor deposition method, casting method or the like. Large-area devices, therefore, can be produced at a relatively low cost.

CLAIMS

1. An oligofluorenylene compound represented by the following general formula (1):

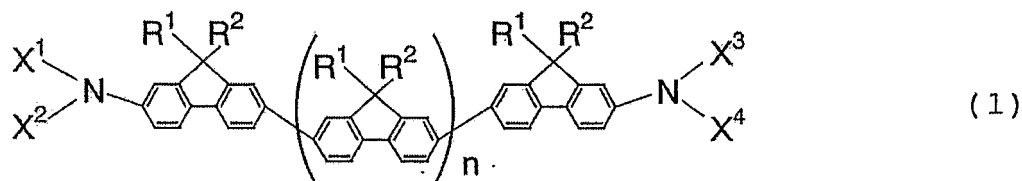


5 (wherein X¹ to X⁴ are each a group selected from the group consisting of a substituted or unsubstituted alkyl group, aralkyl group, aryl group, and heterocyclic group, a substituted or unsubstituted alkenyl group, alkynyl group, amino group, alkoxy group, and sulfide group which have a connecting group comprising a substituted or unsubstituted arylene group or divalent heterocyclic group, and a substituted silyl group and carbonyl group which have a connecting group comprising a substituted or unsubstituted arylene group or divalent heterocyclic group, which may be the same or different, and X¹ and X², and X³ and X⁴ may be linked to each other to form a ring,

15
20 wherein R¹ and R² are each a group selected from the group consisting of a hydrogen atom and a substituted or unsubstituted alkyl group, aralkyl group, and aryl group, R¹ and R² may be the same or different, and respective R¹'s and R²'s on different

fluorenylene rings may be the same or different, and
wherein n is an integer of 1 to 20).

2. The oligofluorenylene compound according to
5 claim 1, wherein the compound is a tri-, tetra-,
penta-, or hexafluorenylene compound in which n is an
integer of 1 to 4.

3. The oligofluorenylene compound according to
10 claim 1, wherein at least one substituent on each
nitrogen atom is a phenyl group having a substituent
in at least the para- or ortho-position, which is
represented by the following general formula (3)



(wherein in the general formula (3), R⁵ to R⁹ are each
a group selected from the group consisting of a
halogen atom, cyano group, nitro group, substituted
20 or unsubstituted alkyl group, aralkyl group, aryl
group, heterocyclic group, alkenyl group, acetylene
group, amino group, alkoxy group, and sulfide group,
and a substituted silyl group and a carbonyl group,
which may be the same or different).

4. The oligofluorenylene compound according to claim 1, wherein at least one substituent on each nitrogen atom is an aromatic polycyclic condensed-ring group or a heterocyclic group.

5

5. The oligofluorenylene compound according to claim 1, wherein one substituent on each nitrogen atom is a phenyl group having a substituent in at least the para- or ortho-position, which is represented by the general formula (3), and the other substituent is an aromatic polycyclic condensed-ring group or a heterocyclic group.

10

6. An organic light-emitting device comprising an anode and a cathode, and one or more layers of organic compound which are sandwiched between a pair of the electrodes, in which at least one of the layers of organic compound contains at least one kind of the oligofluorenylene compound according to claim 1.

15

20

7. An organic light-emitting device comprising an anode and a cathode, and one or more layers of organic compound which are sandwiched between a pair of the electrodes, in which a light-emitting layer contains at least one kind of the oligofluorenylene compound according to claim 1.

25

FIG. 1

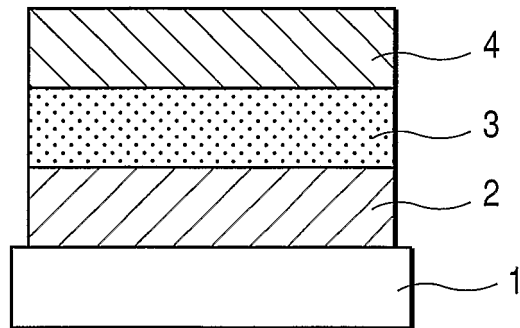


FIG. 2

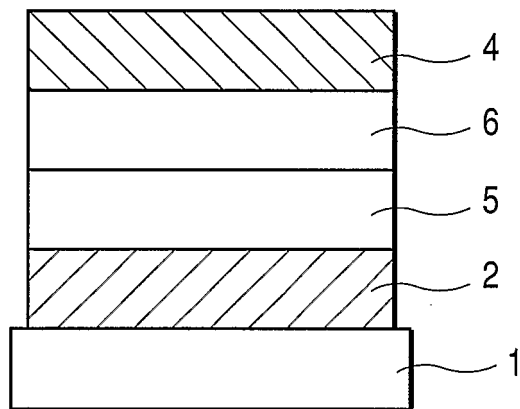


FIG. 3

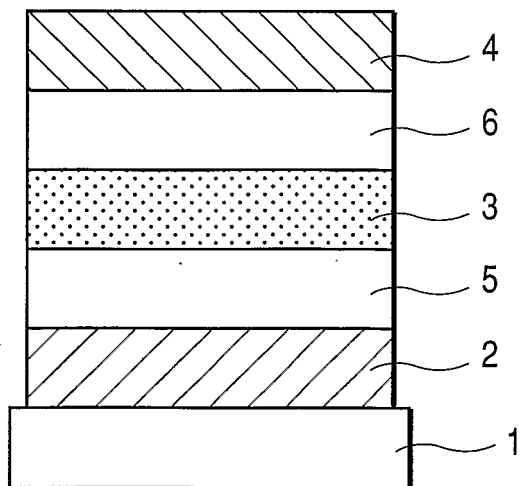


FIG. 4


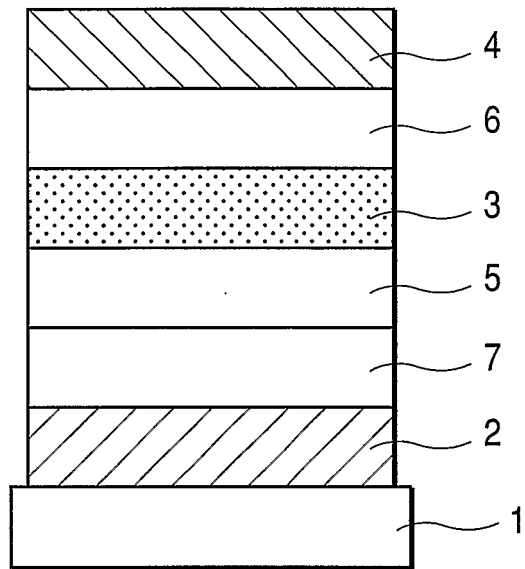


FIG. 5

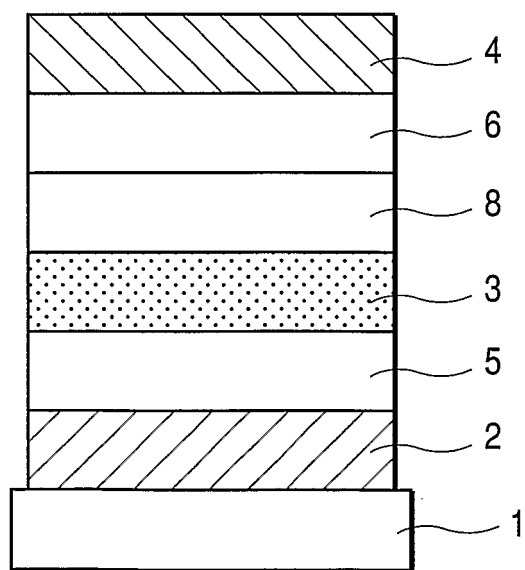

INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP 03/03615

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 C07C211/61 H01L51/30

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 C07C H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
 EPO-Internal, PAJ, WPI Data, BEILSTEIN Data, CHEM ABS Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 19, 5 June 2001 (2001-06-05) -& JP 2001 039933 A (MITSUI CHEMICALS INC), 13 February 2001 (2001-02-13) abstract compounds F-37 to F-48	1-7
X	US 6 100 405 A (KANNAN RAMAMURTHI ET AL) 8 August 2000 (2000-08-08) examples XXIII, XXIV	1-7
A	EP 0 525 739 A (EASTMAN KODAK CO) 3 February 1993 (1993-02-03) page 22, line 2 - line 45 page 23, compound ATA-30	1-7
	-/--	

Further documents are listed in the continuation of box C. Patent family members are listed in annex.

° Special categories of cited documents :

<p>*A* document defining the general state of the art which is not considered to be of particular relevance</p> <p>*E* earlier document but published on or after the international filing date</p> <p>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>*O* document referring to an oral disclosure, use, exhibition or other means</p> <p>*P* document published prior to the international filing date but later than the priority date claimed</p>	<p>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>* & * document member of the same patent family</p>
--	--

Date of the actual completion of the international search	Date of mailing of the international search report
21 July 2003	31/07/2003

Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer O'Sullivan, P
--	---

INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP 03/03615

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 879 868 A (CANON KK) 25 November 1998 (1998-11-25) compounds 14-24, 47-58 ---	1-7
A	WO 00 33617 A (UNIV PRINCETON ;UNIV SOUTHERN CALIFORNIA (US)) 8 June 2000 (2000-06-08) claims -----	1-7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP 03/03615

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 2001039933	A	13-02-2001	NONE	
US 6100405	A	08-08-2000	NONE	
EP 0525739	A	03-02-1993	US 5151629 A AT 114395 T CA 2072837 A1 DE 69200703 D1 DE 69200703 T2 DK 525739 T3 EP 0525739 A1 ES 2064140 T3 GR 3014974 T3 JP 3213063 B2 JP 5198377 A	29-09-1992 15-12-1994 02-02-1993 05-01-1995 06-07-1995 02-01-1995 03-02-1993 16-01-1995 31-05-1995 25-09-2001 06-08-1993
EP 0879868	A	25-11-1998	DE 69804529 D1 DE 69804529 T2 EP 0879868 A2 JP 11035532 A US 6517957 B1	08-05-2002 02-10-2002 25-11-1998 09-02-1999 11-02-2003
WO 0033617	A	08-06-2000	US 6387544 B1 AU 2475200 A WO 0033617 A1	14-05-2002 19-06-2000 08-06-2000

专利名称(译)	低聚茆化合物		
公开(公告)号	EP1487779A1	公开(公告)日	2004-12-22
申请号	EP2003712917	申请日	2003-03-25
[标]申请(专利权)人(译)	佳能株式会社		
申请(专利权)人(译)	佳能株式会社		
当前申请(专利权)人(译)	佳能株式会社		
[标]发明人	SAITOH AKIHITO HIRAOKA MIZUHO C O CANON KK SUZUKI KOICHI SENOO AKIHIRO TANABE HIROSHI YAMADA NAOKI NEGISHI CHIKA OKAJIMA MAKI		
发明人	SAITOH, AKIHITO HIRAOKA, MIZUHO,C/O CANON KK SUZUKI, KOICHI SENOO, AKIHIRO TANABE, HIROSHI YAMADA, NAOKI NEGISHI, CHIKA OKAJIMA, MAKI		
IPC分类号	H01L51/50 C07C211/61 C07D213/74 C07D307/66 C07D333/36 C09K11/06 H01L51/00 H01L51/30		
CPC分类号	H01L51/0039 C07C211/61 C07C2603/18 C07C2603/24 C07C2603/26 C07D213/74 C07D307/66 C07D333/36 H01L51/0035 H01L51/0038 H01L51/005 H01L51/0053 H01L51/0058 H01L51/006 H01L51 /0062 H01L51/007 H01L51/0077 H01L51/0078 H01L51/0081 H01L51/0085 H01L51/50 Y10S428/917		
优先权	2003006796 2003-01-15 JP 2002088918 2002-03-27 JP		
外部链接	Espacenet		

摘要(译)

本发明提供由下列通式表示的低聚茆系化合物，其能够制备具有极纯发光色调并具有高效率，高亮度和长寿命的发光的有机发光器件。