

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
24 January 2008 (24.01.2008)

PCT

(10) International Publication Number  
**WO 2008/011575 A1**

- (51) International Patent Classification:  
A61B 18/12 (2006.01) A61B 17/00 (2006.01)
- (21) International Application Number:  
PCT/US2007/073995
- (22) International Filing Date: 20 July 2007 (20.07.2007)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/832,242 20 July 2006 (20.07.2006) US  
60/923,365 13 April 2007 (13.04.2007) US
- (71) Applicant (for all designated States except US):  
**MEDTRONIC, INC.** [US/US]; 701 Medtronic Park-  
way Northeast, Minneapolis, MN 55432-5604 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **HONG, Jinback**  
[KR/US]; 17133 66th Place North, Maple Grove, MN  
55311 (US). **FRANCISCHELLI, David, E.** [US/US];  
744 Benton Street, Anoka, MN 55303 (US). **STEWART,**

**Mark, T.** [US/US]; 6250 Baldwin Lake Road, Lino Lakes,  
MN 55014 (US).


(74) Agents: **DAY, Robert** et al.; Fredrikson & Byron, P.a., 200  
South Sixth Street, Suite 4000, Minneapolis, MN 55402-  
1425 (US).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH,  
CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG,  
ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL,  
IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK,  
LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW,  
MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL,  
PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY,  
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,  
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: TRANSMURAL ABLATION SYSTEMS AND METHODS

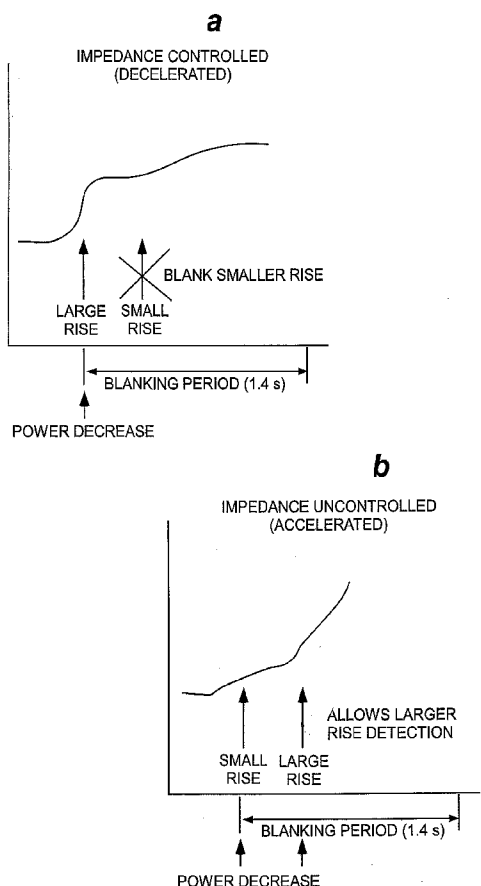

(57) Abstract: A method of applying ablation energy to achieve transmurality including applying ablation energy at a starting power to a tissue site and monitoring the impedance of the tissue site. The power applied to the tissue site can be increased in response to detection of a power plateau or application of a first power for a minimum time according to some embodiments. A power applied to the tissue site can be reduced in response to an increase in impedance according to some embodiments. Transmurality can be indicated in response to a transmurality plateau following a rise in impedance according to some embodiments.

WO 2008/011575 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## TRANSMURAL ABLATION SYSTEMS AND METHODS

### CROSS-REFERENCE TO RELATED APPLICATIONS

[001] This application claims priority to U.S. Provisional Patent Application Ser. No. 60/832,242 filed July 20, 2006, and U.S. Provisional Patent Application Ser. No. 60/923,365 filed April 13, 2007, the contents of both of which are hereby incorporated by reference in their respective entireties.

### FIELD

[002] Embodiments of the invention related generally to systems and methods for ablating tissue, and more particularly, to systems and methods for performing transmural ablations.

### BACKGROUND

[003] The Maze procedure is a surgical treatment for patients with chronic atrial fibrillation that is resistant to other treatments. The Maze procedure uses incisions in the right and left atria to divide the atria into electrically isolated portions, which in turn results in an orderly passage of the depolarization wave front from the sino-atrial node to the atrial-ventricular node, while preventing reentrant wave front propagation. Although successful in treating atrial fibrillation, the Maze procedure can be quite complex and is currently performed by a limited number of highly skilled cardiac surgeons in conjunction with other open-heart procedures. As a result of the complexities of the Maze procedure, there has been an increased level of interest in procedures employing electrosurgical devices or other types of ablation devices, (e.g., thermal ablation, micro-wave ablation, radio frequency or RF ablation, and cryo-ablation) to ablate tissue along pathways approximating the incisions of the Maze procedure.

[004] Three basic approaches have been used to create elongated lesions with electrosurgical devices. The first approach is to create a series of short lesions using a contact electrode, moving it along the surface of the organ wall to be ablated to create a linear lesion. This can be accomplished either by making a series of lesions, moving the electrode between lesions, or by dragging the electrode along the surface of the

organ to be ablated and continuously applying ablation energy. The second approach to creation of elongated lesions is to use an elongated electrode and to place the elongated electrode along the desired line of lesion along the tissue. The third approach to creation of elongated lesions is to provide a series of electrodes and arrange the series of electrodes along the desired line of lesion. The electrodes may be activated individually or in sequence. In the case of multi-electrode devices, individual feedback regulation of ablated energy applied via the electrodes may also be employed.

**[005]** In conjunction with the use of electrosurgical ablation devices, various control mechanisms have been developed to control the delivery of ablation energy to achieve the desired result of ablation (i.e., killing of cells at the ablation site, while leaving the basic structure of the organ to be ablated intact). Such control systems include measurement of temperature and impedance at or adjacent to the ablation site, as disclosed in U.S. Patent No. 5,540,681, issued to Struhl, et al.

**[006]** Additionally, there has been substantial work done toward assuring that the ablation procedure is complete, i.e., that the ablation extends through the thickness of the tissue to be ablated, before terminating application of ablation energy. This desired result is sometimes referred to as a “transmural” ablation. For example, detection of a desired drop in electrical impedance of the tissue being ablated at the electrode site as an indicator of transmural is disclosed in U.S. Patent No. 5,562,721 issued to Marchlinski et al. Alternatively, detection of an impedance rise or an impedance rise following an impedance fall is disclosed in U.S. Patent No. 5,558,671 issued to Yates and U.S. Patent No. 5,540,684 issued to Hassler, respectively.

**[007]** Previous transmural algorithms were fundamentally based on the concept of identifying a flat impedance curve or plateau in response to an increase in power of ablation energy output to determine transmural. However, there are many situations in which the flattened impedance curve does not remain plateaued long enough for the algorithm to determine that the flattened impedance curve indicates transmural. The ablation is allowed to continue, which can sometimes cause the impedance curve to rise as a result of increased temperature (this usually occurs in fatty, inhomogeneous, or thicker tissues). Therefore, ablation is not terminated until the detection of an impedance rise followed by a minimum time delay or by reaching the high impedance limit. This is an inefficient method for performing a transmural ablation and can result in over-ablation.

SUMMARY

[008] In one embodiment, the invention provides a method of applying ablation energy to achieve transmuralty at a tissue site including applying ablation energy at a first power to the tissue site, monitoring impedance of the tissue site, and reducing the ablation energy applied to the tissue site to a second power in response to a rise in impedance.

[009] Other aspects of the invention will become apparent by consideration of the detailed description and accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[010] Fig. 1 is a flowchart depicting an algorithm for determining transmuralty according to one embodiment of the invention.

[011] Fig. 2 is a flowchart depicting a power modulation algorithm according to one embodiment of the invention.

[012] Fig. 3 is a chart illustrating an impedance versus power curve.

[013] Fig. 4 includes two charts and two schematic diagrams illustrating an impedance profile and power output for positive closed loop feedback (a) and positive/negative closed loop feedback (b) systems.

[014] Fig. 5 is a chart illustrating a comparison of time to first power plateau for various starting powers.

[015] Fig. 6 is a chart illustrating a comparison of time to first power plateau for various starting powers broken down by full bite measurements (tissue along full length of electrode) and partial bite measurements (tissue along partial length of electrode).

[016] Fig. 7 is a chart illustrating a comparison of time to first power plateau for various maximum time values at a 20W starting power.

[017] Fig. 8 includes two charts illustrating a situation where transmuralty plateau is detected without a power increase.

[018] Fig. 9 is a chart illustrating a comparison of average  $dZ/dt$  value changes after a power decrease, with each rise (small, medium, and large rise) detected at  $t = 0$  seconds, and a dotted line indicating the boundary between no rise and small rise.

[019] Fig. 10 is a chart illustrating a comparison of the direction of positive acceleration in different  $dZ/dt$  values, with dotted lines indicating boundaries between rise types.

[020] Fig. 11 is a chart illustrating a frequency plot of  $dZ/dt$  values at 1.4 seconds after a power decrement.

[021] Fig. 12 is a chart illustrating a  $dZ/dt$  calculation.

[022] Fig. 13 is a chart illustrating an impedance profile in which a larger rise followed by a smaller rise is blanked (a), while a smaller rise followed by a larger rise is not blanked (b).

[023] Fig. 14 is a chart comparing lesion transmuralities after ablating over fat for a previous algorithm versus an algorithm according to one embodiment of the invention.

[024] Fig. 15 includes two graphs illustrating the impedance profiles for a one rise step down algorithm according to one embodiment of the invention when rise is detected and either (a) power is decreased by 5W or (b) power is decreased to zero.

[025] Fig. 16 is a chart illustrating a comparison of Area Under the Curve (AUC) and energy until transmuralities plateau detection between different groups of starting power/ $t_{\max}$ .

#### DETAILED DESCRIPTION

[026] Before any embodiments of the invention are explained in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of components set forth in the following description or illustrated in the following drawings. The invention is capable of other embodiments and of being practiced or of being carried out in various ways. Also, it is to be understood that the phraseology and terminology used herein is for the purpose of description and should not be regarded as limiting. The use of “including,” “comprising,” or “having” and variations thereof herein is meant to encompass the

items listed thereafter and equivalents thereof as well as additional items. Unless specified or limited otherwise, the terms “mounted,” “connected,” “supported,” and “coupled” and variations thereof are used broadly and encompass both direct and indirect mountings, connections, supports, and couplings. Further, “connected” and “coupled” are not restricted to physical or mechanical connections or couplings.

[027] Figs. 1 and 2 illustrate a method 100 of assessing transmural ablation of tissue being ablated and terminating delivery of ablation energy to an electrode in response to a plateau in impedance of the tissue in conjunction with a detected rise in impedance. The method 100 can be implemented during operation of an electrosurgical device to control the amount of ablation energy delivered by the device to the tissue and also to automatically terminate the delivery of ablation energy under certain conditions. The method 100 can be carried out by a controller having an electrical circuit or a software program, such as, for example, a microprocessor. The controller can be integrated into an electrosurgical device or electrically connected to the electrosurgical device. Data such as impedance measurements and temperature measurements that are used in the method 100 can be provided by sensors carried on the electrosurgical device. Likewise, the controller can be operably coupled to the output of the electrosurgical device to control the delivery of ablation energy to the electrode.

[028] In general, the method 100 can monitor the tissue impedance profile or the impedance of the tissue being ablated as a function of time. During the early part of the ablation, the method 100 can gradually raise the power level of the ablation energy being delivered, while trying to detect a flattening of the tissue impedance profile. When a relatively flat impedance profile (or “power plateau”) is discovered, the ablation power can be raised to a next level, as shown in Fig. 3. If there are no further changes in the tissue impedance profile (e.g., the impedance profile remains relatively flat after raising power in response to a power plateau), a transmural plateau (TP) may be declared to exist. Transmural ablation, or the determination that the ablation procedure is complete (e.g., that the ablation extends through the thickness of the tissue to be ablated), may be indicated by any of several situations occurring, according to some embodiments of the invention. For example, if the total time of the ablation exceeds a minimum time delay ( $T_{\min}$ ) following a TP declaration, transmural ablation can be indicated. As another example, if the tissue impedance profile reaches an impedance limit ( $Z_{\text{limit}}$ ) during ablation, transmural ablation can be indicated.

As yet another example, if a rise in a certain parameter is detected (such as a rise in impedance or temperature), even if a TP has not been declared, and the rise occurs after a minimum total energy ( $E_{min}$ ) has been delivered, transmurality can be indicated. Thus, embodiments of the invention provide a method of delivering an amount of energy to efficiently achieve a transmural ablation (e.g., reducing the time and/or energy expended to achieve a transmural ablation), while also minimizing the potential for over-ablation or tissue damage.

**[029]** In order to prevent rapid impedance rises which can cause a high impedance shut off (HISO), for example, the method 100 can include a negative closed loop feedback system that can be kept active throughout the ablation. The negative closed loop feedback system can actively lower power output of the electrosurgical device if a rise in impedance is detected, according to some embodiments of the invention. The response of the closed loop feedback system may be based on how the rise in impedance is categorized, for example, according to one of three defined rise types. Thus, power can be actively modulated bi-directionally (e.g., positively or negatively) based on the slope of the impedance profile, for example, according to various embodiments of the invention.

**[030]** Fig. 4(a) illustrates an impedance profile and power level plot versus time of an algorithm for determining transmurality, in which power may only be increased (and not decreased) during the delivery of ablation energy. Fig. 4(b) illustrates a power level plot and resulting impedance profile of a method in accordance with some embodiments of the invention (such as method 100), in which power can be either increased or decreased as determined by the method.

**[031]** As shown in Fig. 1, the ablation is initialized (at 102). A controller initiates delivery of ablation energy from an electrosurgical device to the tissue to be ablated and enters into a primary algorithm 103. The ablation energy may be delivered at a starting power,  $P_0$ . The starting power can contribute to an early impedance rise, which can occur within about ten seconds following the beginning of ablation. The starting power can also influence the rate of impedance decay until the impedance curve flattens, thus affecting overall ablation time. In some embodiments, the starting power,  $P_0$ , can be set to about 15W, 20W, 25W, 30W, or 35W, as illustrated in Figs. 5 and 6, or may be set to other values as deemed appropriate.

[032] With continued reference to Fig. 1, the controller can determine (at 104) if a start-up blanking period has expired. The start-up blanking period, which can generally cover an initial ablation period, can be provided so that a sufficient number of measurements can be gathered before attempting to determine transmuralty of an ablation lesion in tissue. The start-up blanking period can prevent erroneous data from previous ablations from being used in the analysis of the impedance profile and subsequent comparison to the criteria of plateaus (e.g., power plateaus and transmuralty plateaus) and rise (e.g., impedance rise and temperature rise). The start-up blanking period can be set to start at  $t=0$  during ablation (e.g., at the commencement of delivery of ablation energy to the tissue), and can have different lengths (e.g., it may be programmable and/or adjustable). In one possible embodiment, the start-up blanking period may be calculated using a formula that seeks to ensure sufficient data have been acquired prior to assessing transmuralty. For example, the start-up blanking period may be defined as  $1400 + 200*(y-1)$ , wherein the start-up blanking period is a time period measured in milliseconds, and “y” is the number of  $dZ/dt$  calculations desired for making transmuralty assessments. If the start-up blanking period has not yet expired, the controller can continue to deliver ablation energy at the starting power, for example. Once the start-up blanking period has expired, the controller can enter (at 106) a processing state in which a plurality of factors are processed or monitored in parallel with one another, while continuing to deliver ablation energy.

[033] Various embodiments of the invention may allow the power level of the ablation energy to be varied (e.g., increased or decreased). In some embodiments, a maximum time may be specified for delivery of ablation energy at each of a number of different power levels. Thus, with reference to Fig. 1, a first factor can determine (at 108) whether a maximum time,  $t_{max}$ , at the current power level has been exceeded. The value for  $t_{max}$  can be the same for each power level, or it can differ depending upon the power level. Tables 1(a)-(c) below illustrate examples of  $t_{max}$  values for each of several exemplary power levels according to embodiments of the invention. It should be noted that the particular values in Tables 1(a)-(c) are purely illustrative in nature; one of ordinary skill would be able to modify these values to achieve similar results without departing from the scope of the invention as claimed. Fig. 7 illustrates the impact of  $t_{max}$  on the amount of time it can take to reach a first “power plateau.” If  $t_{max}$  has not been exceeded, no action is taken relative to the first factor. The controller can continue to deliver ablation energy and can remain (at 106) in the parallel processing state. If  $t_{max}$  has been exceeded, the controller

can exit (at 110) the primary algorithm 103 and can enter a power modulation algorithm 111, as shown in Fig. 2. This can ensure that the ablation energy is applied at a given power level for no longer than the maximum time ( $t_{max}$ ) associated with that power level before the controller goes to the power modulation algorithm 111.

Level	Power (W)	Power plateau blanking period	Max time ( $t_{max}$ ),
P <sub>-1</sub>	15	1.80	2.00
P <sub>0</sub>	20	1.80	6.00
P <sub>1</sub>	25	1.80	6.00
P <sub>2</sub>	30	1.80	6.00
P <sub>3</sub>	35	1.80	6.00
P <sub>4</sub>	40	1.80	35.00

Table 1(a) - Power Levels and Times

Level	Power (W)	Power plateau blanking period	Max time ( $t_{max}$ ),
P <sub>-1</sub>	20	2.00	4.0
P <sub>0</sub>	25	2.00	8.0
P <sub>1</sub>	30	2.00	8.0
P <sub>2</sub>	35	2.00	8.0
P <sub>3</sub>	40	2.00	8.0
P <sub>4</sub>	45	2.00	40.00

Table 1(b) - Power Levels and Times

Level	Power (W)	Power plateau blanking period	Max time ( $t_{max}$ ),
P <sub>-1</sub>	25	3.1	1.0
P <sub>0</sub>	30	3.1	5.00
P <sub>1</sub>	35	3.1	5.00
P <sub>2</sub>	40	3.1	5.00
P <sub>3</sub>	45	3.1	5.00
P <sub>4</sub>	50	3.1	30.00

Table 1(c) - Power Levels and Times

[034] As used above, a “power plateau,” or flattened impedance profile, may occur during delivery of ablation energy to tissue. For example, the monitored impedance of the tissue being ablated is typically observed to decrease during delivery of ablation energy to tissue. At some point, the rate of decrease of the monitored impedance begins to level off (or flatten) during energy delivery. Such a power plateau may be indicated by a reduction in the absolute value of the slope of the monitored impedance during delivery of ablation energy, or by some comparable means of identifying a flattening of the impedance profile.

[035] A second factor can determine (at 112) whether a power plateau, or a flattened impedance profile, has been detected. If no power plateau has been detected, no action is taken relative to the second factor. The controller can continue to deliver ablation energy and can remain (at 106) in the parallel processing state. If a power plateau has been detected, the controller can determine (at 114) whether there has been a previous power decrease. If there has been a previous power decrease, the controller can go (at 110) to the power modulation algorithm 111. If there has not been a previous power decrease, the controller can determine (at 116) whether a power plateau blanking period or minimum time per power ( $t_{\min}$ ) has expired. The power plateau blanking period prevents excessive power increases from occurring within a short period of time. It also allows time so that tissue responds to a power change before another power change is applied. Unlike previous algorithms which did not provide a decrease power, an algorithm according to the method 100 allows power to decrease. This power decrement may lead to a possibility of TP detection without power ever having increased (as shown in Fig. 8). In order to prevent this problem, the power plateau blanking period,  $t_{\min}$ , may not apply after a power decrement, according to some embodiments. This can also reduce the possibility of detecting a TP at a power level less than the starting power (i.e.,  $P_1$ ). During the power plateau blanking period, the power is not increased, in some embodiments. Data collected during the power plateau blanking period can be used for decision making following expiration of the power plateau blanking period. In some embodiments, the power plateau blanking period, or  $t_{\min}$ , can be about 1.8 seconds for each power level, according to the example shown above in Table 1.

[036] If the power plateau blanking period (i.e., the minimum time at the current power level) has expired, the controller can go (at 110) to the power modulation algorithm 111 (Fig. 2). If the power plateau blanking period has not expired, no action is taken relative to the second factor. Again, this means that the controller can continue to deliver ablation energy and can return (at 106) to the parallel processing state.

[037] A third factor can determine (at 118) whether a rise has been detected. This can be an impedance rise or a temperature rise, for example. If no rise has been detected, no action is taken relative to the third factor. The controller can continue to deliver ablation energy and can remain (at 106) in the parallel processing state. If a rise has been detected, the controller can determine (at 120) whether a rise blanking period has expired. The rise blanking period can prevent excessive power increases due to the detection of multiple rises within a short period of time. The rise blanking period can also provide a minimum time so that impedance stabilizes after a power level change or modulation (as shown in Fig. 9). In some embodiments, the rise blanking period can be about 1.4 seconds. Data collected during the rise blanking period can be used for decision making following expiration of the rise blanking period.

[038] If the rise blanking period has not yet expired, no action is taken relative to the third factor. The controller can continue to deliver ablation energy and can return (at 106) to the parallel processing state. If the rise blanking period has expired, the controller can determine (at 122) whether the total energy delivered by the electrosurgical device is greater than a minimum energy ( $E_{\min}$ ). Energy (Joules) is calculated as power (Watts) x time (seconds). For example, total energy can be calculated every 0.2 seconds as follows:

$$TotalEnergy(t = N \text{ sec}) = \sum_{n=1}^{5N} \frac{Power(n)}{5}$$

[039] If the total energy delivered by the electrosurgical device is not greater than  $E_{\min}$ , the controller can go (at 110) to the power modulation algorithm. If the total energy is greater than  $E_{\min}$ , transmural can be indicated (at 124) and the ablation (e.g., the delivery of ablation energy to a given tissue site) can be ended (at 126).  $E_{\min}$  can be selected to ensure that transmural lesions occur in every operating condition according to the algorithm of method 100.  $E_{\min}$  can be from about 300J to about 500J, in some embodiments.

[040] A fourth factor can determine (at 128) whether the tissue impedance profile is greater than a maximum impedance ( $Z_{limit}$ ). If the tissue impedance profile is less than or equal to  $Z_{limit}$ , no action is taken relative to the fourth factor. The controller can continue to deliver ablation energy and can remain (at 106) in the parallel processing state. If the tissue impedance profile is greater than  $Z_{limit}$ , transmuralty can be indicated (at 124) and ablation can be ended (at 126).

[041] A fifth factor can determine (at 130) whether the tissue impedance profile is greater than a high impedance shut off (HISO) limit. If the tissue impedance profile is not greater than the HISO limit, no action is taken relative to the fifth factor. This means that the controller can continue to deliver ablation energy and can remain (at 106) in the parallel processing state. If the tissue impedance profile is greater than the HISO limit, ablation can be ended (at 126) and an error report can be generated (at 132). The HISO limit can correspond to a safety limit of the tissue impedance profile. The fifth factor can limit the delivery of ablation energy regardless of the length of time ablation energy has been delivered, the power level of the ablation energy being delivered, or the indication of transmuralty, etc.

[042] As described above, a variety of conditions can cause the controller to exit the primary algorithm 103 and enter (at 110 in Fig. 1) the power modulation algorithm 111. Fig. 2 illustrates the power modulation algorithm 111. The power modulation algorithm 111 can be used to determine if and how to modulate the power level of the ablation energy, such as by increasing, decreasing, or maintaining the current power level.

[043] As shown in Fig. 2, the controller can determine (at 150) if time is at zero, which corresponds to setting the starting power level. If time is not at zero, the starting power is set (at 152) and the controller can exit the power modulation algorithm 111 and return (at 154) to the primary algorithm 103. If the time is not zero, the controller can attempt to determine whether an impedance rise has been detected. A rise can be defined as a positive slope in the impedance profile, for example. In some embodiments, the impedance rise can be categorized according to the type of rise. For example, the magnitude of the slope may determine which type of impedance rise is occurring, including small, medium, and large impedance rises, as illustrated in Fig. 10. To determine the rise type, for example, a certain fraction of measured values (e.g.,  $x$  out of  $y$ ) must have a slope magnitude,  $dZ/dt$ , that exceeds a predetermined value,  $c$ . Tables 2(a) and 2(b) below provide exemplary values for

x, y, and c for categorizing a rise in impedance as being a small, medium or large rise type. For example, using the criteria provided in Table 2(a), an impedance rise would be categorized as a “large” rise if 2 out of 4 measured values of impedance slope, dZ/dt, have a magnitude greater than 5.5.

$$\text{For } n = 1 \text{ to } y; \left[ \frac{dZ}{dt} \right]_n > c$$

Variable	Power plateau	Transmurality plateau	Rise small	Rise medium	Rise large
x	4	9	3	2	2
y	5	10	5	4	4
c	1.3	1.3	1.3	3	5.5

Table 2(a) - Plateau Variables

Variable	Power plateau	Transmurality plateau	Rise small	Rise medium	Rise large
x	6	13	4	3	3
y	7	14	7	6	6
c	1.5	1.5	1.5	3.1	6.8

Table 2(b) - Plateau Variables

**[044]** In some embodiments, it may be desirable to further define a small rise as being, for example, 3 out of 5 measured values of impedance slope, dZ/dt, having a magnitude between 1.3 and 3 (e.g., the slope criteria for a medium rise). Similarly, it may be desirable in some embodiments to define a medium rise as being, for example, 2 out of 4 measured values of impedance slope, dZ/dt, having a magnitude between 3 and 5.5 (e.g., the slope criteria for a large rise).

**[045]** If a small rise is detected (at 156), the controller can determine (at 158) if the current power is greater than a preset maximum corresponding to the small rise. In some embodiments, the preset small rise maximum power can be 25W, for example. If the current power level is greater than or equal to the preset small rise maximum, power can be decreased (at 160) by a specified amount, for example, by 5W. At that point, the controller may exit (at 154) the power modulation algorithm 111 and return to the primary algorithm 103. If the current power is less than the preset small rise maximum, the controller can exit (at 154) the power modulation

algorithm 111 and can return to the primary algorithm 103 without modulating the power.

[046] If a small rise is not detected (at 156), but a medium rise is detected (at 162), the controller can determine (at 164) if the current power is greater than a preset maximum corresponding to the medium rise. In one embodiment, the preset medium rise maximum power level is 30W. If the current power is greater than or equal to the preset medium rise maximum, power can be decreased (at 166) by a certain amount, for example 10W, and the controller can return (at 154) to the primary algorithm 103. If the current power is less than the preset medium rise maximum, the controller can return to the small rise determination (at 158) and can continue from there.

[047] If a medium rise is not detected (at 162), but a large rise is detected (at 168), the controller can determine (at 170) if the current power level is greater than a preset minimum corresponding to the large rise. In one embodiment, the preset large rise minimum can be 15W. If the current power is less than the preset large rise minimum, the controller can return (at 154) to the primary algorithm 103 without modulating the power. If the current power is greater than or equal to the preset large rise minimum, the controller can determine (at 172) if the current power is greater than or equal to a preset large rise maximum. If the current power is greater than or equal to the preset large rise maximum (e.g., 35W), power can be decreased (at 174) by a certain amount, for example 15W, and the controller can return (at 154) to the primary algorithm 103. If the current power is less than the preset large rise maximum, the controller can increase power (at 176) by a certain amount, for example 5W, and can return (at 154) to the primary algorithm 103. In one embodiment, the preset large rise maximum can be 35W.

[048] Fig. 11 illustrates a frequency plot of impedance slope ( $dZ/dt$ ) values at 1.4 seconds after a power decrement. In Fig. 11, the  $dZ/dt$  values were categorized according to rise type (no rise, small, medium, and large rise), and the frequency of occurrence of each rise type is shown for each of the following power decrement amounts: 5W, 10W, 15W, and 20W. Table 3 below shows the decrement and minimum power level for each of the three rise types.

	Rise types		
	Small	Medium	Large
Decrease amount	5 watts	10 watts	15 watts
Minimum power level	$P_o$	$P_o$	$P_{-1}$

Table 3 - Power decrement values and minimum power

**[049]** If none of a small, medium, or large rise is detected, the controller can determine (at 178) whether the power modulation algorithm 111 was entered due to a power plateau. If so, the controller can determine (at 180) if the current power is at a maximum power or the transmurality ceiling. In some embodiments, the maximum power can be a predetermined value, for example 40W. If the current power level is either at the maximum power or at the transmurality ceiling, the controller can exit the power modulation algorithm 111 and can return (at 154) to the primary algorithm 103 without modulating the power. If the current power is not equal to either the maximum power or the transmurality ceiling, power can be increased (at 182) by a certain amount, for example 5W, in some embodiments. The controller can then return (at 154) to the primary algorithm 103.

**[050]** If none of a small, medium, or large rise has been detected and the power modulation algorithm 111 was not entered due to a power plateau, the controller can determine (at 184) if the power modulation algorithm 111 was entered because the maximum time ( $t_{max}$ ) at a power level had been exceeded. If so, the controller can determine (at 180) if the current power is at a maximum power or the transmurality ceiling, substantially as described above. If not, the controller can return (at 154) to the primary algorithm 103.

**[051]** Returning to Fig. 1, upon return (at 154) from the power modulation algorithm 111 to the primary algorithm 103, the controller returns (at 106) to the parallel processing state. In addition, concurrently with the controller entering the power modulation algorithm 111, the controller may also continue (at 186) with the primary algorithm 103.

**[052]** The controller can determine (at 186) whether a transmurality plateau has been detected. If no transmurality plateau has been detected, the controller can return (at

106) to the parallel processing state. If a transmural plateau has been detected, the controller may next determine (at 188) whether a minimum time per ablation ( $T_{min}$ ) has expired. If  $T_{min}$  has not expired, no further action is taken, the controller can continue to deliver ablation energy and can return (at 106) to the parallel processing state. If  $T_{min}$  has expired, transmural can be indicated (at 124) and ablation can be ended (at 126). The minimum time per ablation,  $T_{min}$ , can be about 10 - 30 seconds in some embodiments, as shown below in the exemplary groups of settings (Settings A-C) of Table 4, which also provides examples of other variable settings.

Variable	Description	Setting A	Setting B	Setting C
$t_1$	Start time to check for $Z_{max}$	0.2 sec.	0.3 sec.	0.1 sec.
$t_2$	Stop time to check for $Z_{max}$	2.0 sec.	1.5 sec.	2.2 sec.
$T_{max}$	Maximum time per ablation	40 sec.	45 sec.	50 sec.
$T_{min}$	Minimum time per ablation	19 sec.	22 sec.	24 sec.
$P_{max}$	Maximum Power (watts)	40 watts	45 watts	50 watts
Scale	Offset scale multiplier for $Z_{limit}$	2.8	3.0	2.5
	Transmural Shutoff:	Manual Shutoff	Manual Shutoff	Manual Shutoff

Table 4 - Transmural Mode Settings

[053] In some embodiments, detection of a transmural plateau can require that  $dZ/dt$  be greater than or equal to 1.3 for 9 out of 10 points in a detection window, as indicated in Table 2 (above). Requiring a significant number of the points in the detection window to satisfy the transmural plateau criteria may ensure that there is only one power increment arising from the power modulation algorithm 111 in a transmural plateau detection window.

[054] To reduce the possibility of severe over-ablation, a maximum total ablation time ( $T_{max}$ ) for creating an ablation lesion or for performing an ablation procedure can be imposed. In one embodiment, the maximum total ablation time is about 40 seconds, as indicated in the example shown in Table 4. When  $T_{max}$  is reached, power delivery can be terminated regardless of the transmural determination. In one embodiment, the controller may indicate an error condition to the user when power delivery

is terminated due to maximum total ablation time,  $T_{\max}$ , being reached. This indication can be an audible indicator, a visual indicator, or a combination of both.

[055] In some embodiments, the tissue impedance ( $Z$ ) can be measured or calculated about every 0.2 seconds, for example. However, in some circumstances, there can be a significant amount of noise in the signal. To reduce the effects of this noise, the data can be filtered. One example of a filtering method to reduce the effects of noise can be accomplished using a 5-point moving average of the measured impedance values:

$$Z = \left[ \frac{Z_{t-2} + Z_{t-1} + Z_t + Z_{t+1} + Z_{t+2}}{5} \right]$$

[056] The 5-point moving average may result in the filtered impedance lagging the measured impedance values by about 400 msec in embodiments in which impedance is measured or calculated every 200 msec, for example.

[057] The tissue impedance profile, or the rate of change in impedance per unit time ( $dZ/dt$ ), can be calculated from the measured impedance values (e.g., without filtering), or from filtered impedance data (e.g., using the 5-point moving average), with a 3-point central difference algorithm, as shown in Fig. 12, and as described by the following equation:

$$\frac{dZ}{dt} = \frac{1}{2\Delta t} (Z_{t+1} - Z_{t-1})$$

[058] The rate of change in impedance per unit time,  $dZ/dt$ , can therefore lag the filtered impedance by about 200 msec in some embodiments. To identify regions of the tissue impedance profile as a “rise” or a “plateau,” a rolling window of  $dZ/dt$  points can be examined.

[059] The method of assessing transmural delivery of ablation energy to an electrode as described in relation to Figs. 1 and 2 is based on the concept of finding a flat impedance profile or plateau. When the algorithm finds a flat impedance curve, it may raise power to a next level. If there are no further changes in the impedance profile, a transmural plateau can be declared.

[060] A plateau can be defined as a flattening of the impedance curve. To determine a plateau, the absolute value of a certain number (e.g., x out of y) of the  $dZ/dt$  points must be less than or equal to some defined slope value, c, wherein y is the number of points in the detection window:

*For n = 1 to y;*

$$\left| \frac{dZ}{dt} \right|_n \leq c$$

[061] There are two types of plateaus - power plateaus and a transmural plateaus – that may be defined, for example, by using different values for x and y, and having different responses (e.g., x out of y impedance slope values meeting certain criteria). Table 2 above shows examples of different criteria for identifying power and transmural plateaus. When a power plateau is reached, the controller can increment the power level of the ablation energy to a next (e.g., higher) level. In some embodiments, a power plateau blanking period may also be established and used, whereby the criteria for identifying a power plateau is not evaluated until the completion of the power plateau blanking period. Such a power plateau blanking period may be employed, for example, following a change in power level of the ablation energy. When a transmural plateau is reached, a transmural flag can be set, and, in some embodiments, power cannot be increased beyond the power level at which the transmural plateau was detected (e.g., the power level at which a transmural plateau is identified may define a “ceiling” on the power level, or a “transmural ceiling,” according to some embodiments). Power can be allowed to be decreased and increased according to the power modulation criteria after a transmural plateau is identified, but the ceiling cannot be exceeded, in some embodiments, as indicated at 180 in Fig. 2. When a transmural plateau is detected at the same time that a power plateau is detected, the transmural plateau rule may supersede the power plateau rule and power may remain at the same level, according to some embodiments of the invention.

[062] The rise blanking period may be applied in certain situations. For example, in some embodiments, the rise blanking period is applied only in situations where a given rise (e.g., impedance rise or temperature rise) is of the same level (e.g., small, medium, or large) or below the level of a preceding rise. For example,

the rise blanking period may apply between successive rises of equal type, or may apply when a medium rise occurs following a large rise, or when a small rise follows either a medium or a large rise.

**[063]** To further illustrate by way of example, if a medium rise is detected while ablating at 35W, a 10W reduction in power may be implemented according to the power modulation algorithm illustrated in Fig. 2. For the duration of the rise blanking period, or the next 1.4 seconds, while ablating at the reduced level of 25W, the algorithm can be blanked from acting again on small or medium rises. This can allow time for the tissue impedance to stabilize and can reduce the rate of rise without overreacting and lowering power levels excessively. However, if a large impedance rise should be detected during the rise blanking period, the algorithm can immediately reduce power by 15W or to a minimum power of 15W, for example, regardless of the blanking period (e.g., the blanking period is ignored). Fig. 13 illustrates the application of the rise blanking period. In Fig. 13(a), a larger rise followed by a smaller rise is blanked, while in Fig. 13(b), a smaller rise followed by a larger rise is not blanked. If impedance is still rising after the rise blanking period expires, another power reduction can be implemented according to the algorithm of method 100.

**[064]** Table 5 below provides a number of groups of exemplary settings and criteria (Settings A-C) that may be employed by a transmural control algorithm according to some embodiments of the invention.

	Setting A	Setting B	Setting C
Starting Power, P <sub>0</sub>	20W	25W	30W
Available Powers	15, 20, 25, 30, 35 and 40W	20, 25, 30, 35, 40 and 45W	25, 30, 35, 40, 45 and 50W
Power plateau criteria	4/5 pts  dZ/dt  = 1.3	6/7 pts  dZ/dt  = 1.5	6/7 pts  dZ/dt  = 1.5
t <sub>max</sub> (maximum time per power)	6 sec 2 sec for P <sub>.1</sub> = 15W	8 sec 4 sec for P <sub>.1</sub> = 20W	5 sec 1 sec for P <sub>.1</sub> = 25W
t <sub>min</sub> (power plateau blanking period)	1.8 sec	2.0 sec	3.1 sec
T <sub>min</sub> (minimum time per ablation)	19 sec	22 sec	24 sec
Transmurality plateau	9/10 pts  dZ/dt  = 1.3	13/14 pts  dZ/dt  = 1.5	13/14 pts  dZ/dt  = 1.5
Rise criteria	three rise types: 3/5 pts dZ/dt > 1.3 (small), 2/4 pts dZ/dt > 3 (med), or 2/4 pts dZ/dt > 5.5 (large))	three rise types: 4/7 pts dZ/dt > 1.5 (small), 3/6 pts dZ/dt > 3.1 (med), or 3/6 pts dZ/dt > 6.8 (large))	three rise types: 4/7 pts dZ/dt > 1.5 (small), 3/6 pts dZ/dt > 3.1 (med), or 3/6 pts dZ/dt > 6.8 (large))
Step down after rise detection	Small: by 5W (no less than 20W) Medium: by 10W (no less than 20W) Large: by 15W (no less than 15W)	Small: by 5W (no less than 20W) Medium: by 10W (no less than 20W) Large: by 15W (no less than 15W)	Small: by 5W (no less than 20W) Medium: by 10W (no less than 20W) Large: by 15W (no less than 15W)
After Rise detection	1.4 sec blanking between rises of the same size; 1.4 sec blanking at med rise after large rise; 1.4 sec blanking at small rise after either med or large rise	1.4 sec blanking between rises of the same size; 1.4 sec blanking at med rise after large rise; 1.4 sec blanking at small rise after either med or large rise	1.4 sec blanking between rises of the same size; 1.4 sec blanking at med rise after large rise; 1.4 sec blanking at small rise after either med or large rise

	Setting A	Setting B	Setting C
Transmurality indication	Transmurality plateau and after $T_{min}$ ; $Z_{limit}$ reached; or Any type of rise after $E_{min} = 430J$	Transmurality plateau and after $T_{min}$ ; $Z_{limit}$ reached; or Any type of rise after $E_{min} = 380J$	Transmurality plateau and after $T_{min}$ ; $Z_{limit}$ reached; or Any type of rise after $E_{min} = 490J$
Others	Ceiling: If TP declared, power level may be Modulated, but may not exceed the power level at the time of TP declaration	N/A	Ceiling: If TP declared, power level may be Modulated, but may not exceed the power level at the time of TP declaration

Table 5 – Exemplary criteria and settings for the algorithm of Figs. 1 and 2

[065] In the method 100 of Figs. 1 and 2, the occurrence of rapid impedance rises that might lead to a  $Z_{limit}$  or to HISO condition have been reduced so that an ablation that fails to result in a TP will continue, running past  $T_{min}$  and potentially all the way to  $T_{max}$ . However, the determination of the total amount of energy is used to provide an indication of transmural in situations when a TP is not detected, thereby reducing instances in which ablation energy continues to be delivered until  $T_{max}$ . Energy provides a linear criteria in relation to the formation of ablation lesions. The value for  $E_{min}$  can be based on the maximum energy value which produces non-transmural lesions, along with an additional margin.

[066] As shown below in Table 6, energy values from 340J to 500J with 20J intervals at a fixed 20W starting power can result in varying transmural outcomes. In one example, reliable transmural lesions occurred with any value above 400J using 20W fixed power. The value 400J is not necessarily, however, a minimum energy, since power can be reduced to  $P_{-1}$ , or the starting power decreased by one power step (i.e., 15W). Therefore, a margin can be added so that 420J can be a minimum energy value.

Energy (J)	Time (sec)	Partial – Submerged (n=72)		Full – Submerged (n=72)	
		Trans (%)	Width (mm)	Trans (%)	Width (mm)
340	17	31.2	2.3 ± 0.9	50.0	2.3 ± 1.2
360	18	56.3	2.2 ± 0.7	46.4	2.4 ± 1.2
380	19	100	2.3 ± 0.8	75.0	2.5 ± 1.1
400	20	100	2.4 ± 1.0	100	2.5 ± 1.0
420	21	100	2.4 ± 0.7	100	2.4 ± 1.2
440	22	100	2.5 ± 1.1	100	2.5 ± 1.1
460	23	100	2.9 ± 0.9	100	2.9 ± 0.9
480	24	100	2.9 ± 0.8	100	3.0 ± 10.7
500	25	100	2.9 ± 1.1	100	3.3 ± 0.8

Table 6 - Ablation results using fixed 20W with various time

[067] Table 7 below illustrates transmural outcomes for a fixed power value of 10W to 40W with 5W intervals, using different timing to result in 420J. As shown in Table 7, the powers above 20W result in 100% transmural.

Power (W)	Time (sec)	Partial – Submerged (n=56)		Full – Submerged (n=56)	
		Trans (%)	Width (mm)	Trans (%)	Width (mm)
10	42	56.3	2.2 ± 1.0	46.4	2.1 ± 1.1
15	28	100	2.5 ± 0.8	75	2.4 ± 0.9
20	21	100	2.6 ± 0.7	100	2.5 ± 1.1
25	17	100	2.5 ± 0.7	100	2.6 ± 1.1
30	14	100	2.8 ± 0.9	100	2.8 ± 1.0
35	12	100	2.4 ± 1.2	100	2.9 ± 0.9
40	10.5	100	2.8 ± 0.8	100	3.3 ± 1.0

Table 7 - Ablation results of 420J using various power and time

[068] In some embodiments, the  $E_{min}$  (minimum energy per ablation) value of 450J can be set by adding 30J of margin to the presumed minimum energy value (420J). This minimum energy can be used to set a baseline for the transmural lesion. Therefore, the algorithm can indicate transmurality if there is any sign of impedance profile change (any type of rise detection) after total energy exceeds  $E_{min}$ .

[069] The method 100 of Figs. 1 and 2 performs particularly well on fat tissue. Since fat tissue includes little water, it has very high electrical resistivity. Therefore, the fat tissue can prevent RF current flow and can lead to a rapid impedance rise. This can cause termination of ablations due to  $Z_{limit}$  or HISO without achieving transmurality. Fig. 14 illustrates test results using the algorithm of Figs. 1 and 2, showing a high percentage of transmural ablation lesions, even in fat tissue.

[070] The method 100 of Figs 1 and 2 can also reduce over-ablation. Compared to the previous algorithms, which maintained the power level at the time of a TP declaration, the method of Figs. 1 and 2 may actively lower power when there is an impedance rise, for example. If there is excessive sizzling or a temperature rise, especially in thin tissue, the power level can be maintained between 15W and 20W, thus lowering the tissue temperature. Table 8 below shows that the rate at which sizzling occurs using the method 100 of Figs. 1 and 2 to be lower than what would be expected using prior art techniques.

	Time (sec)	Energy (Joules)	HISO (%)	$Z_{limit}$ (%)	Lesion width (mm)	Sizzle (%)	Transmurality (%)	End at $T_{min}$ (%)
Bovine (n=120)	19.0 ± 0.4	483 ± 53	0	1.7	2.6 ± 0.5	3.3	99.0	95.8
Swine (n=204)	19.2 ± 1.4	447 ± 47	0	7.4	2.6 ± 0.5	4.4	99.0	85.3

Table 8 - *In vitro* testing results using method 100 of Figs. 1 and 2

[071] The power modulation algorithm 111 shown in Fig. 2 provides for the identification of three different rise types. However, this number can be increased or

decreased. For example, the power modulation algorithm 111 can provide for the identification of one rise type. When a rise is detected, power can be lowered either by a pre-set amount, such as, for example, 5W, or to the starting power, as shown in Fig. 15, and ablation can continue. The power modulation algorithm 111 can provide for the identification of two rise types, small and large. When a small rise is detected, power can be decreased by a pre-set amount, such as, for example, 5W. When a large rise is detected, power can be decreased by a pre-set amount, such as, for example, 15W, or to the starting power. Depending upon the number of rise types identified, various factors, including the maximum time ( $T_{\max}$ ) and the minimum time ( $T_{\min}$ ), can be adjusted accordingly.

[072] In Fig. 16, ablation performance until TP detection was compared using a starting power of 20W,  $t_{\max}$  of 6 seconds, and PP criteria (4 out of 5  $dZ/dt$  values  $> 1.3$ ). The area under the impedance curve (AUC) and energy values were compared. AUC can imply impedance decaying characteristics (slope and time), while energy can imply extent of power step up. The 20W/6 second group shows smaller AUC but greater energy values compared to the 20W/8 second group. This can indicate relatively faster impedance decaying while applying more power steps compared to 20W/8 second group, which matches the 25W/8 second group.

[073] It will be appreciated by those skilled in the art that while the invention has been described above in connection with particular embodiments and examples, the invention is not necessarily so limited, and that numerous other embodiments, examples, uses, modifications and departures from the embodiments, examples and uses are intended to be encompassed by the claims attached hereto. The entire disclosure of each patent and publication cited herein is incorporated by reference in its entirety, as if each such patent or publication were individually incorporated by reference herein.

CLAIMS

What is claimed is:

1. A method of applying ablation energy to achieve transmural energy at a tissue site, the method comprising:
  - applying ablation energy at a first power to the tissue site;
  - monitoring impedance of the tissue site; and
  - reducing the ablation energy applied to the tissue site to a second power in response to a rise in impedance.
2. The method of claim 1 further comprising applying ablation energy at a first power for a start-up blanking period.
3. The method of claim 2 wherein the start-up blanking period is a programmable setting.
4. The method of claim 1, further comprising increasing the ablation energy applied to the tissue site to a third power in response to a power plateau.
5. The method of claim 4, further comprising increasing the ablation energy applied to the tissue site to a third power only if a minimum time at the second power has been met.
6. The method of claim 1, further comprising reducing the ablation energy applied to the tissue site to a second power in response to a rise in impedance only if a rise blanking period has been met.
7. The method of claim 1, further comprising monitoring total ablation energy and terminating delivery of ablation energy if the total ablation energy exceeds a preset minimum following a rise in impedance.
8. The method of claim 1, further comprising determining a rate of increase in impedance and assigning the rate of increase in impedance to one of at least three levels.
9. The method of claim 8, wherein the second power is selected based on the assigned level.
10. The method of claim 1, further comprising indicating transmural energy in response to a transmural energy plateau following a rise in impedance.
11. The method of claim 10, further comprising terminating delivery of ablation energy to the tissue site in response to a transmural energy plateau following a rise in impedance.
12. The method of claim 10, wherein transmural energy is indicated only after ablation energy has been delivered to the tissue site for a minimum period,  $t_{\min}$ , following a transmural energy plateau.

13. The method of claim 1, further comprising indicating transmuralità in response to the monitored impedance of the tissue site exceeding an impedance limit,  $Z_{limit}$ .
14. The method of claim 1, further comprising indicating transmuralità in response to detecting a rise in the monitored impedance of the tissue site occurring after a minimum total energy,  $E_{min}$ , has been delivered.
15. The method of claim 1, further comprising indicating transmuralità in response to detecting a rise in a temperature of the tissue site occurring after a minimum total energy,  $E_{min}$ , has been delivered.
16. A method of applying ablation energy to achieve transmuralità at a tissue site, the method comprising:
  - applying ablation energy at a first power to the tissue site;
  - monitoring impedance of the tissue site;
  - increasing the ablation energy applied to the tissue site to a second power in response to a rise in impedance; and
  - increasing the ablation energy applied to the tissue site to a third power in response to a power plateau only if ablation energy has been applied to the tissue site at the second power for a minimum time.
17. A method of applying ablation energy to achieve transmuralità at a tissue site, the method comprising:
  - applying ablation energy at a starting power level to the tissue site;
  - monitoring an impedance of the tissue site;
  - increasing the ablation energy applied to the tissue site to a second power level in response to at least one of detection of a power plateau and application of the ablation energy at the starting power level for a minimum time;
  - reducing the ablation energy applied to the tissue site to a third power level in response to an increase in the impedance of the tissue site; and
  - indicating transmuralità in response to a transmuralità plateau following a rise in impedance.
18. The method of claim 17, wherein the ablation energy applied to the tissue site is increased to the second power level only after ablation energy has been applied at the starting power level for the minimum time.
19. The method of claim 18, wherein the minimum time applies only if the starting power level has been previously decreased.

20. The method of claim 17, further comprising reducing the ablation energy applied to the tissue site to the third power level in response to the increase in impedance only if a rise blanking period has been met.
21. The method of claim 17, further comprising monitoring total ablation energy delivered, and indicating transmuralty if the total ablation energy delivered exceeds a preset minimum following the rise in impedance.
22. The method of claim 17, wherein the reduction in power in response to the increase in impedance is a function of a rate of increase in impedance.
23. The method of claim 17, further comprising determining a rate of increase in impedance and assigning the rate of increase in impedance to one of at least three levels.
24. The method of claim 23, wherein the reduction in power is selected based on the assigned level.
25. A system for assessing transmuralty of an ablation procedure being performed at a tissue site, the system comprising:
  - a sensor that determines impedance of the tissue site;
  - a controller adapted to communicate with the sensor to monitor the impedance of the tissue site;
  - the controller being adapted to increase ablation energy applied to the tissue site to a second power level in response to at least one of detection by the sensor of a power plateau and application of ablation energy at a first power level for a minimum time;
  - the controller being adapted to reduce ablation energy applied to the tissue site to a third power level in response to an increase in impedance of the tissue site;
  - the controller being further adapted to indicate transmuralty in response to a transmuralty plateau following a rise in impedance of the tissue site.
26. The system of claim 25, wherein the controller is a microprocessor.
27. The system of claim 25, wherein the system is implemented in an electrosurgical device.
28. The system of claim 25, wherein the controller indicates transmuralty in response to a total ablation energy provided exceeding a preset minimum following a rise in impedance.

Fig. 1



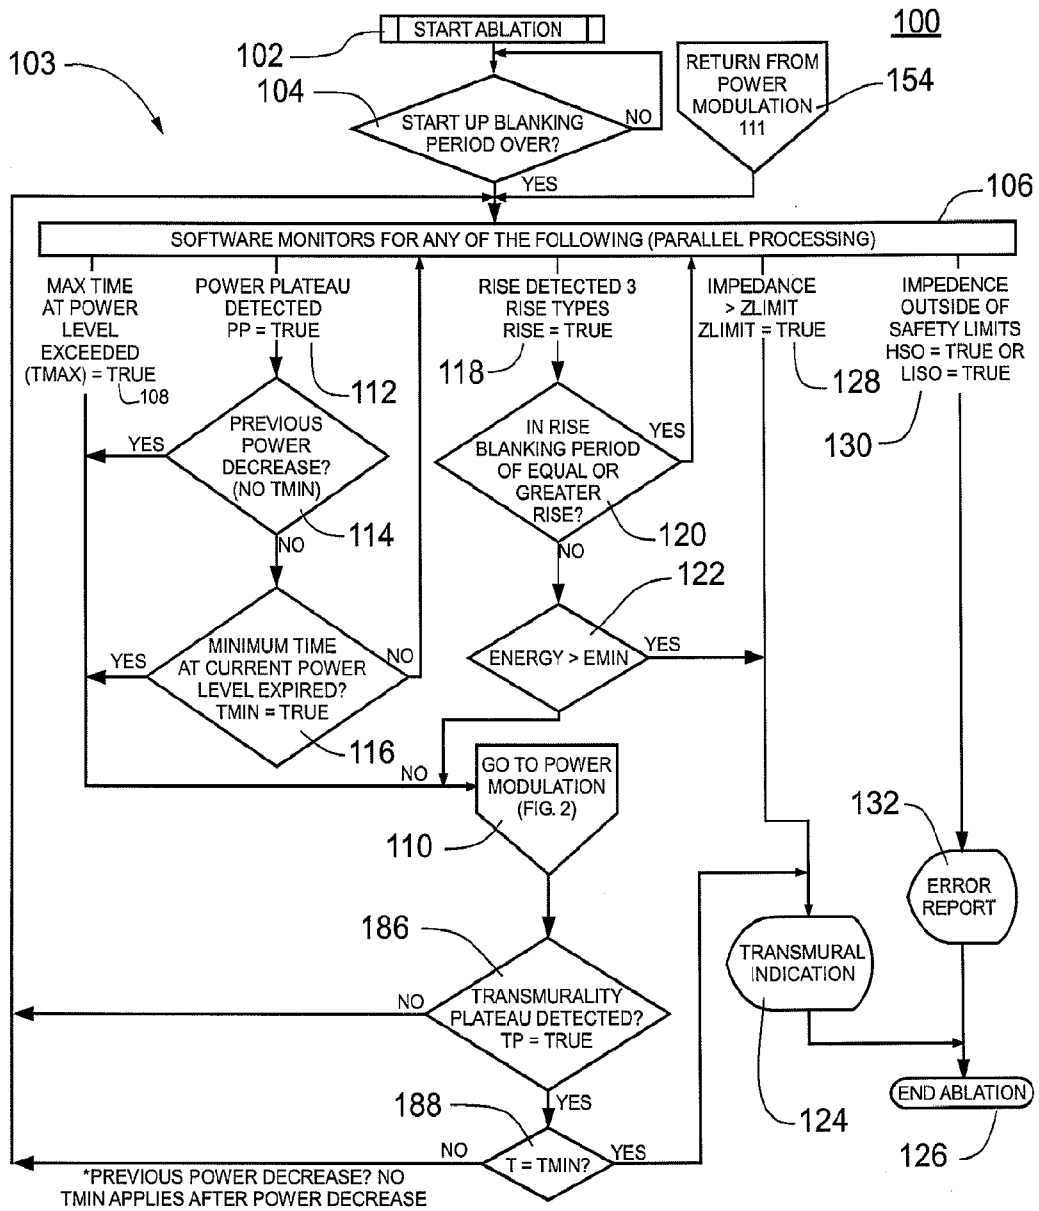




Fig. 2

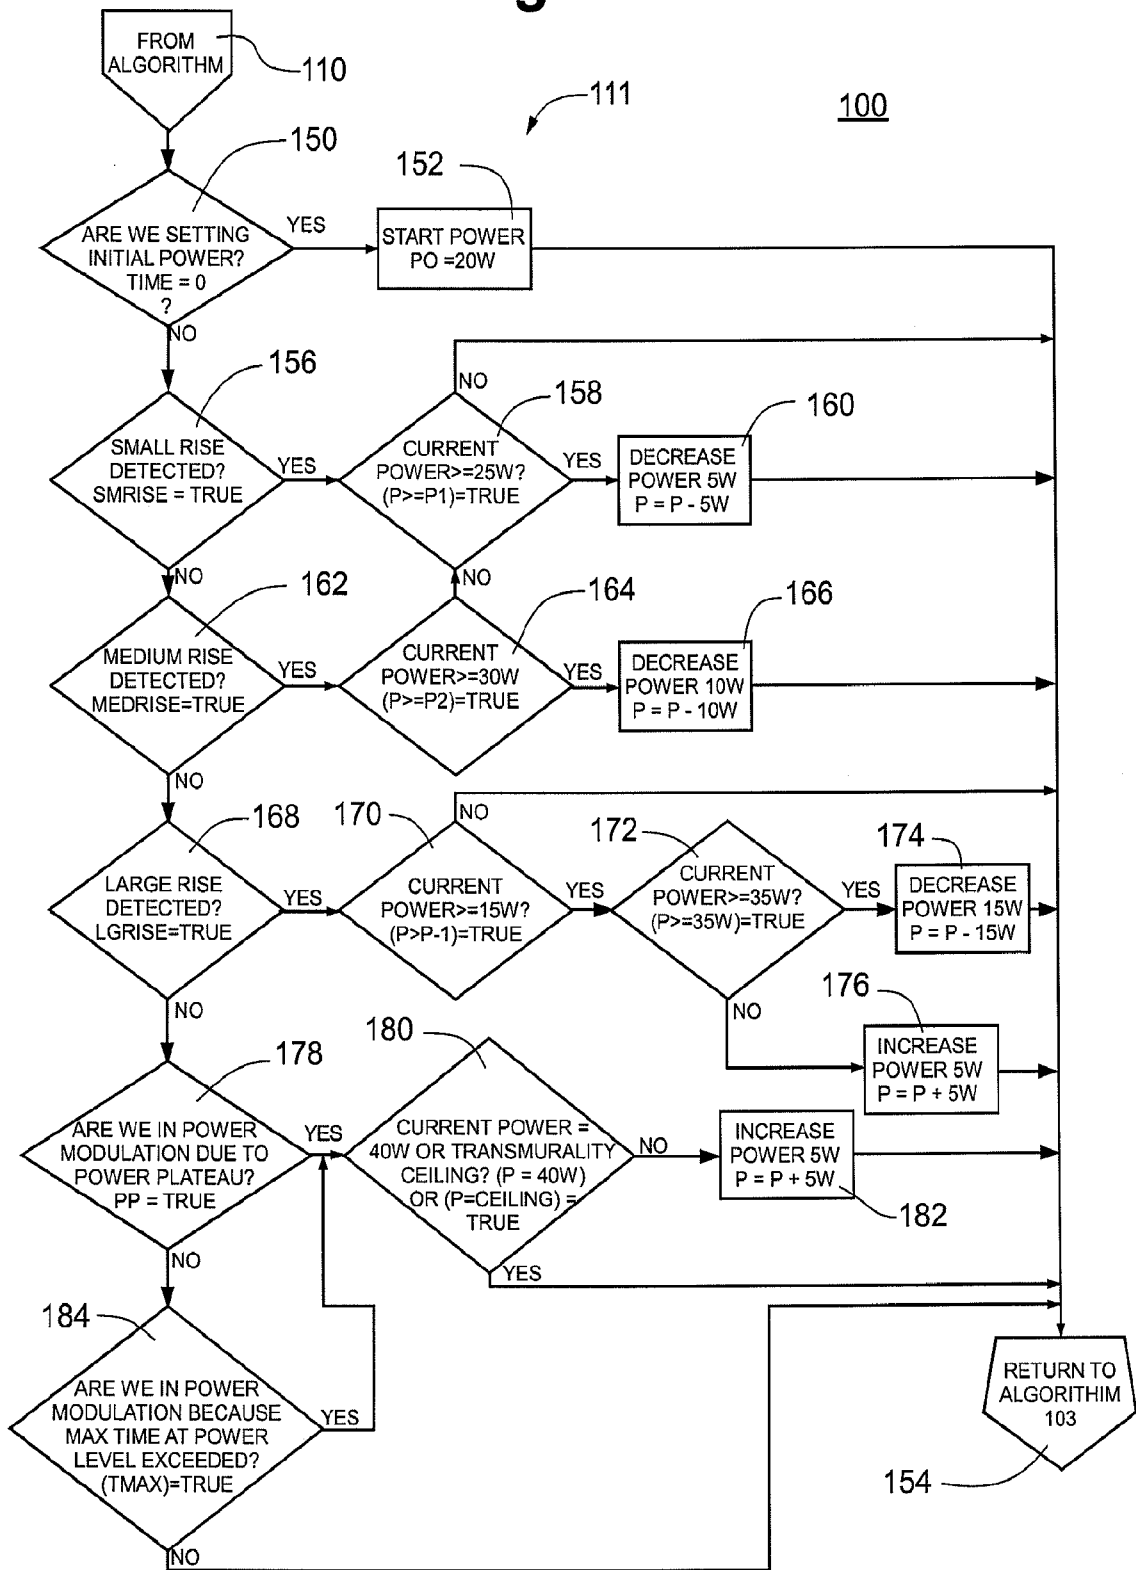


**Fig. 3**

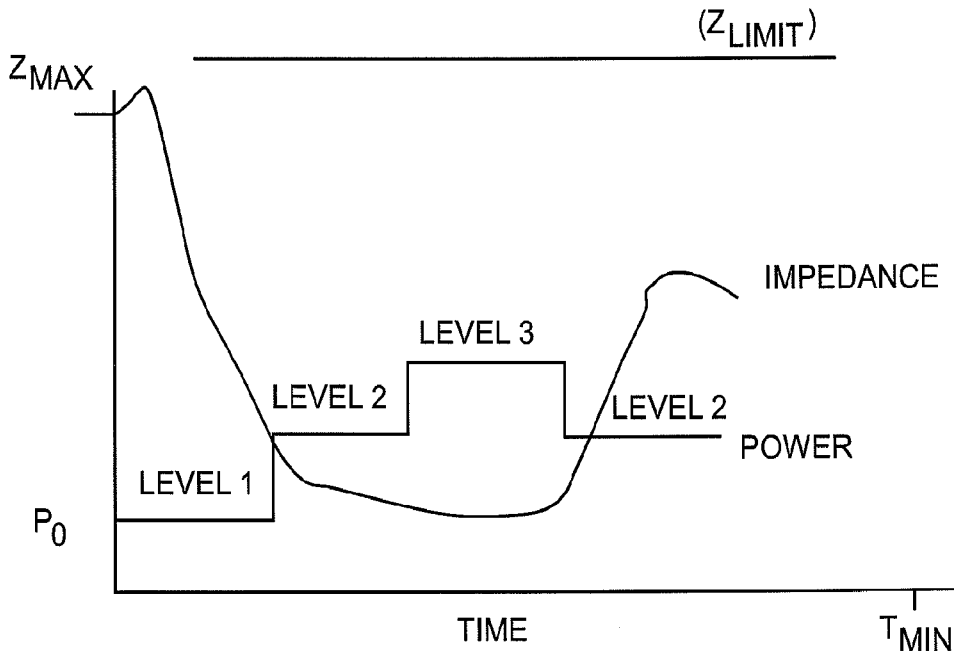

**Fig. 4a**

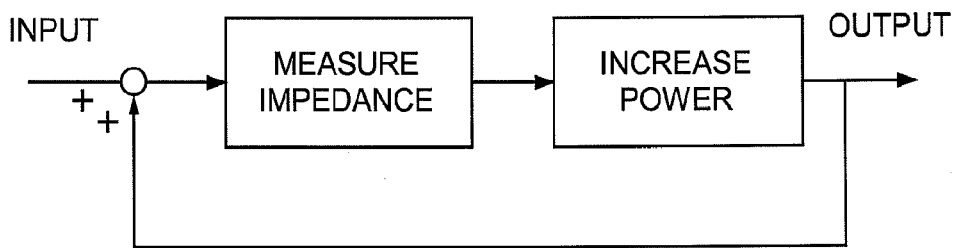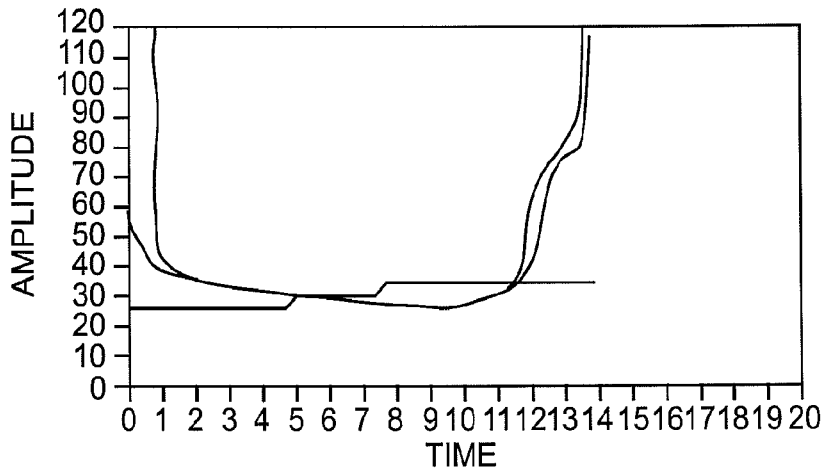


**Fig. 4b**

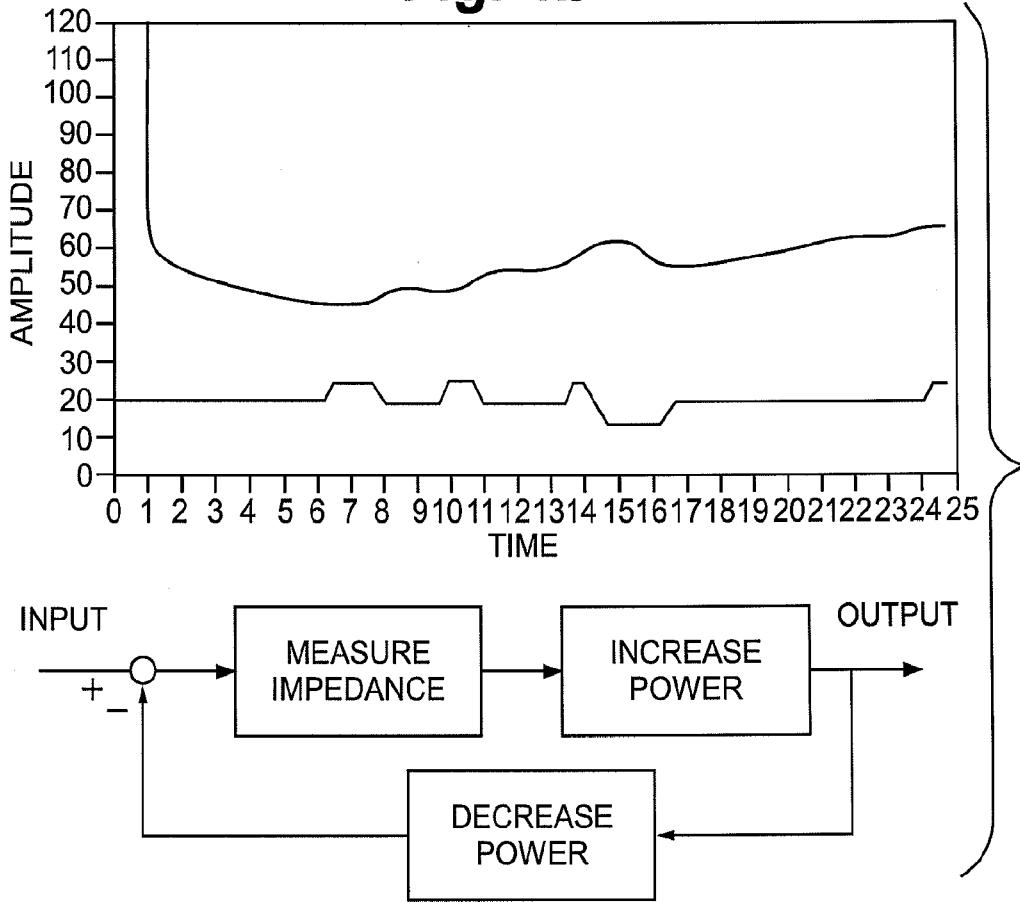


**Fig. 5**


TIME TO FIRST POWER PLATEAU  
(OVERALL n=208)

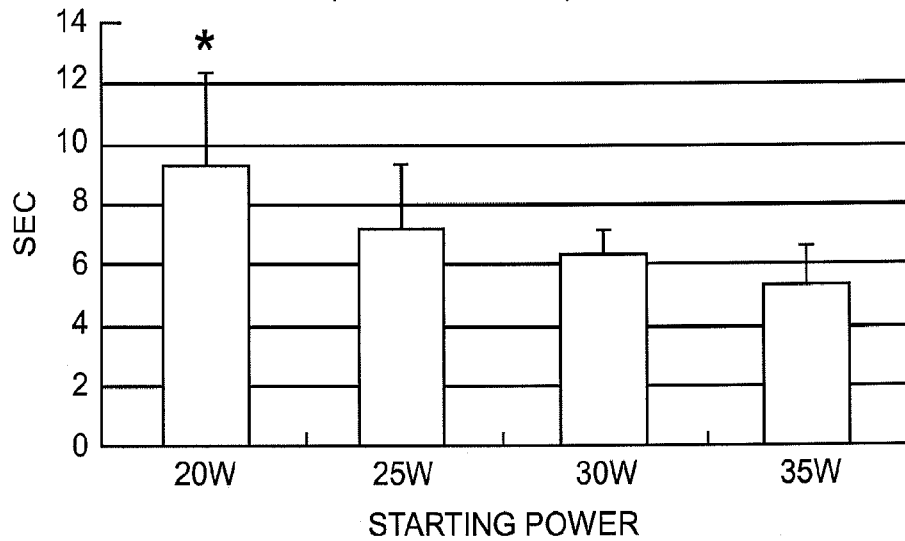


**Fig. 6**

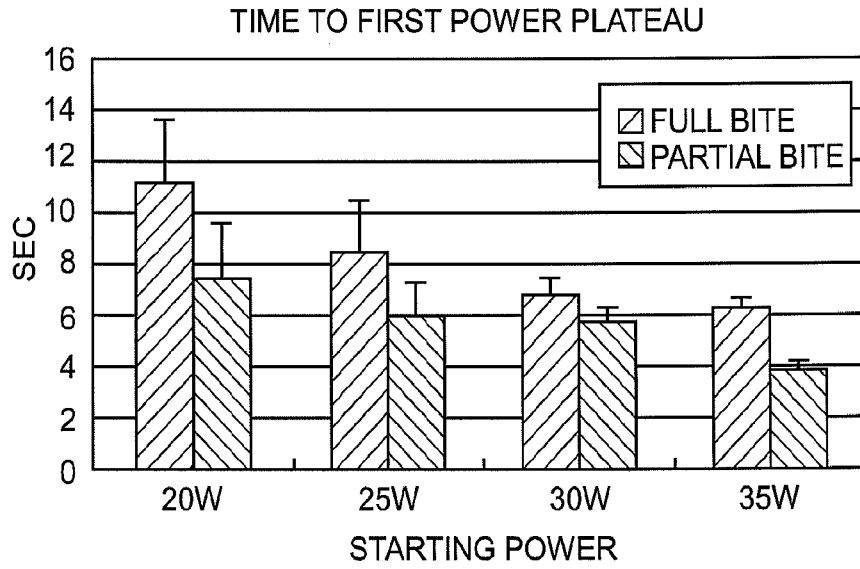


**Fig. 7**

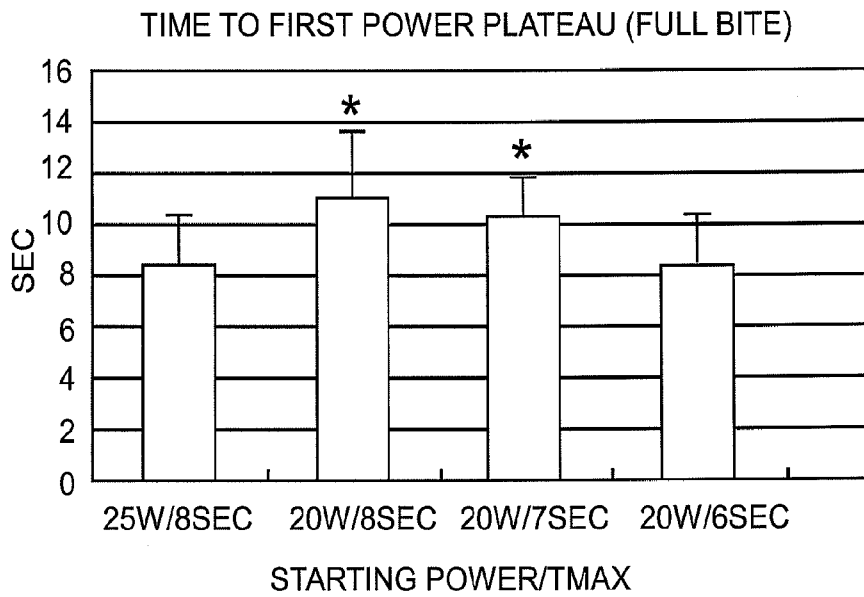


**Fig. 8**

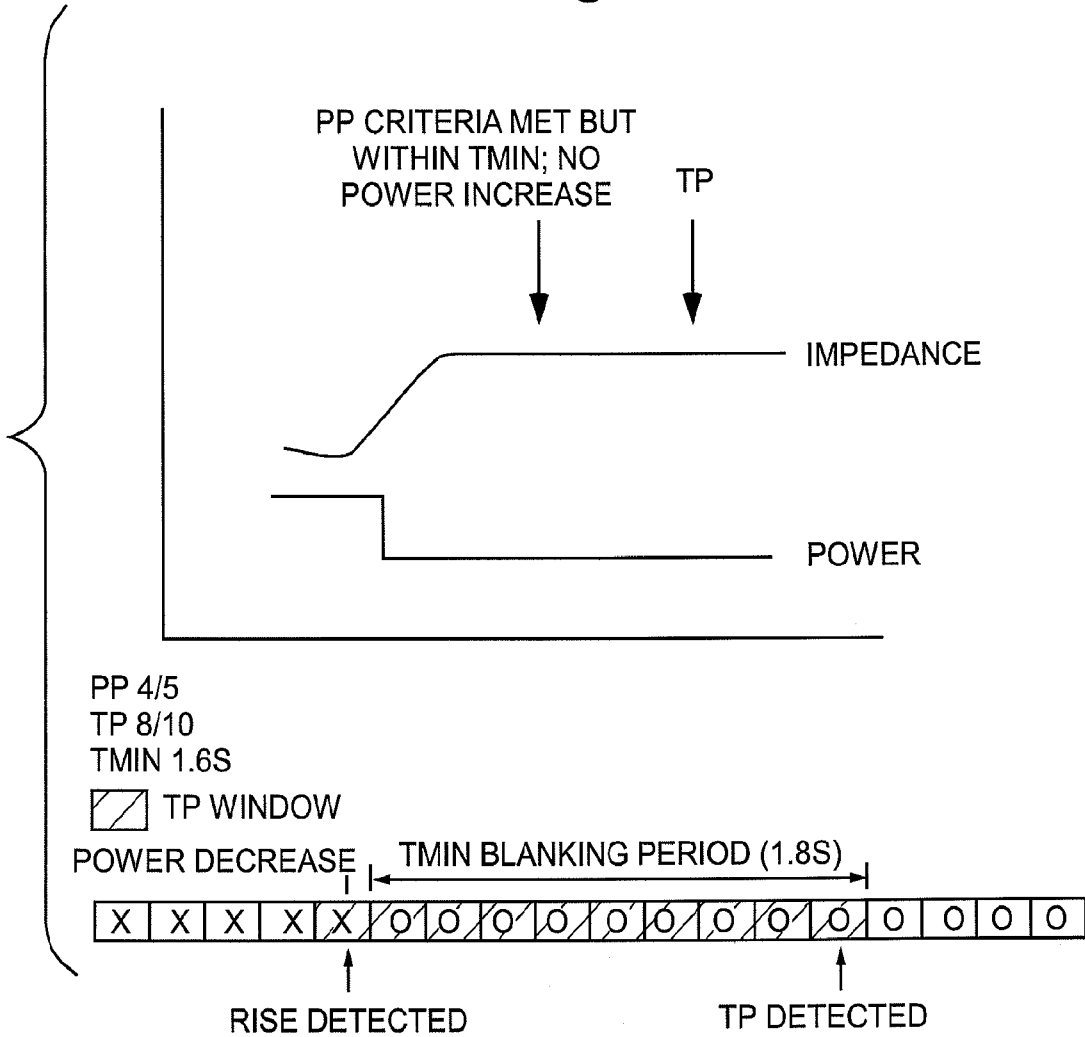


**Fig. 9**

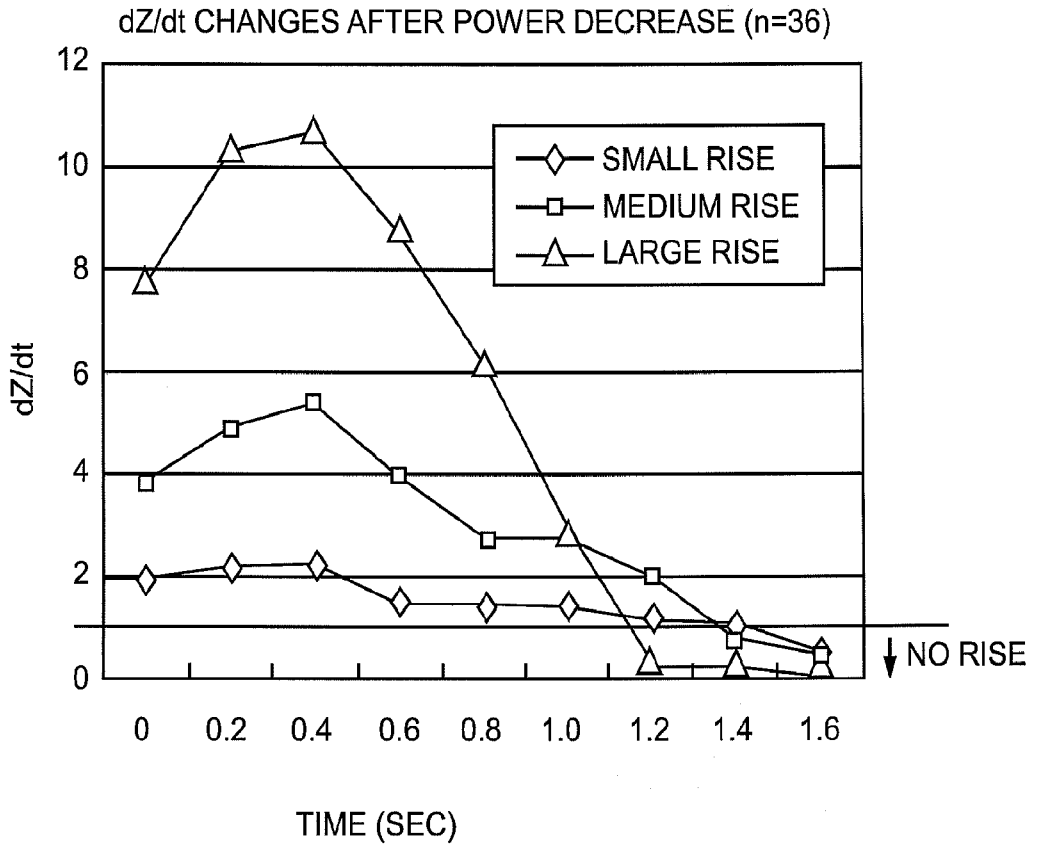


**Fig. 10**

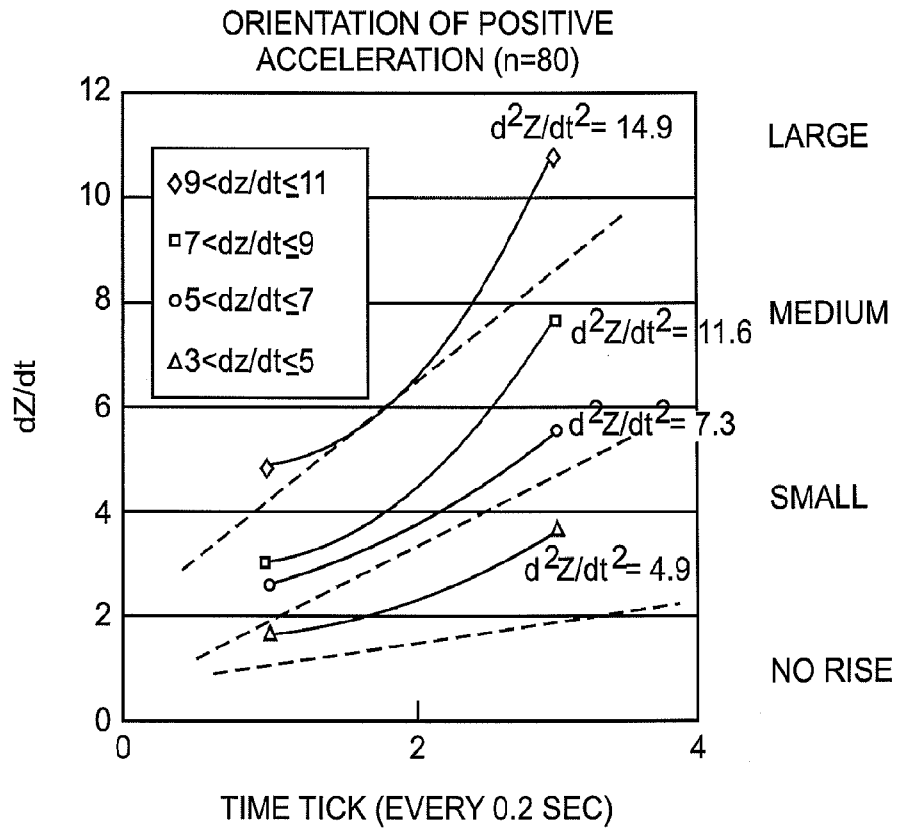

**Fig. 11**

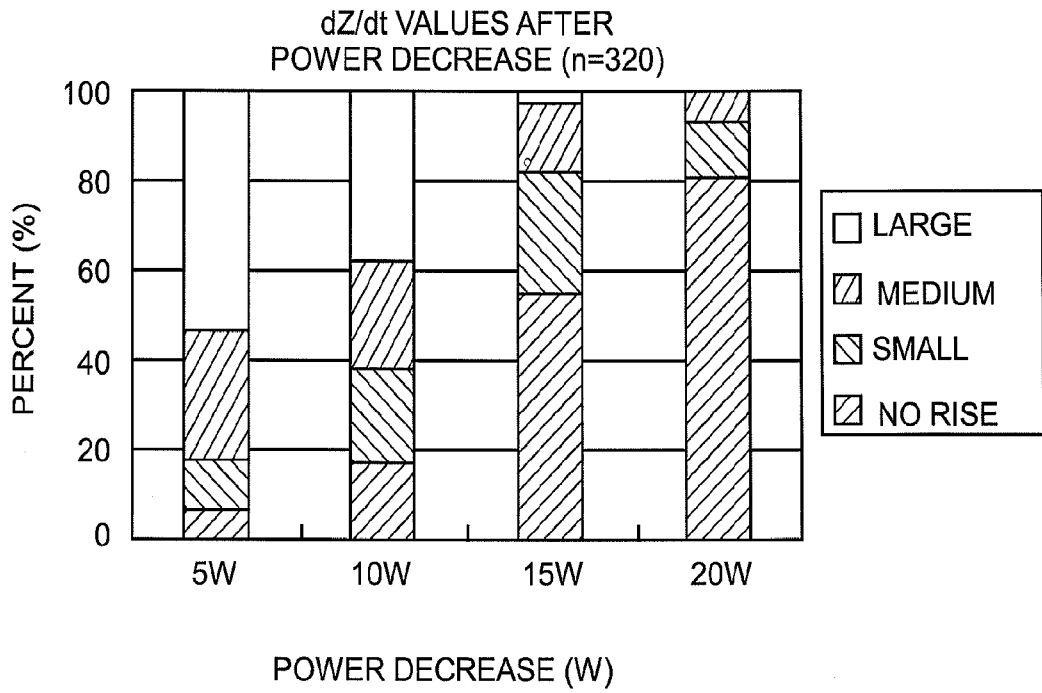


**Fig. 12**

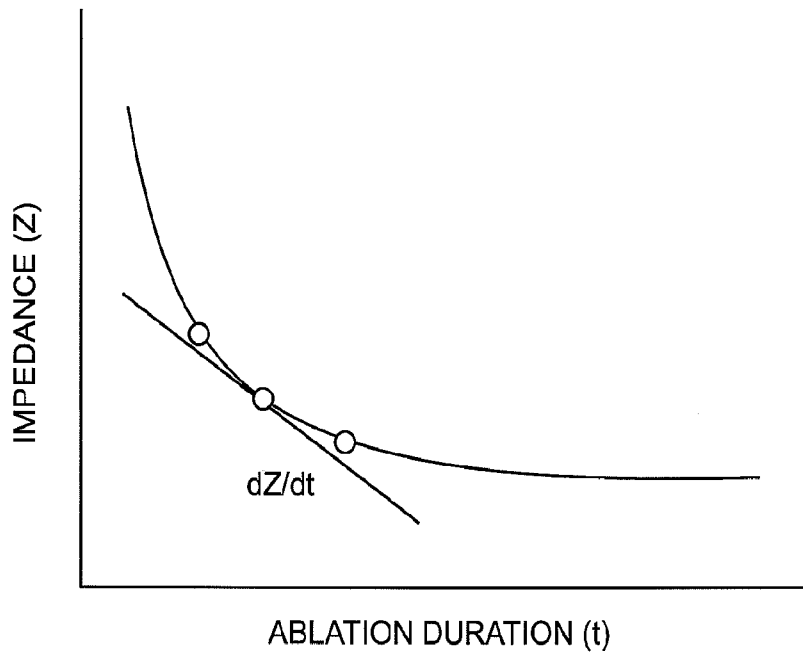


11/13


**Fig. 13a**

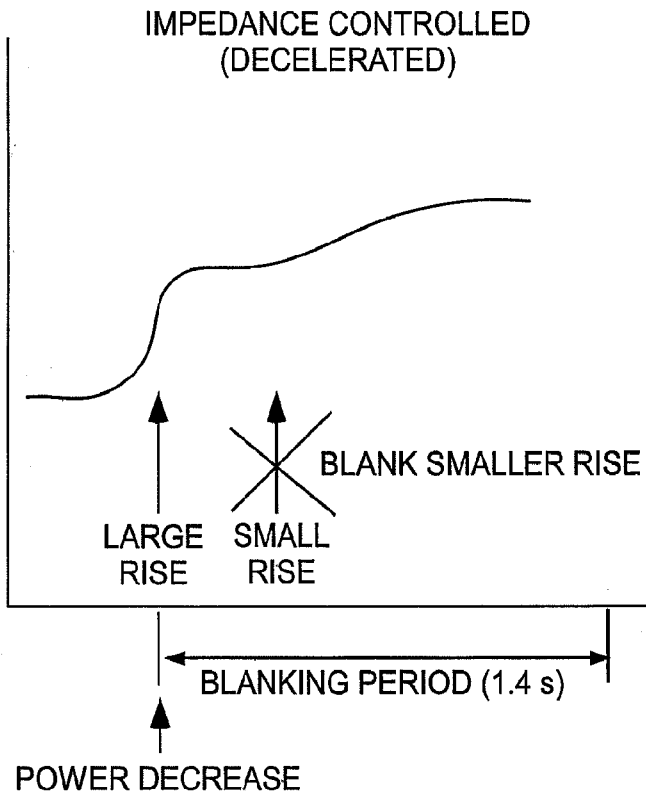


**Fig. 13b**

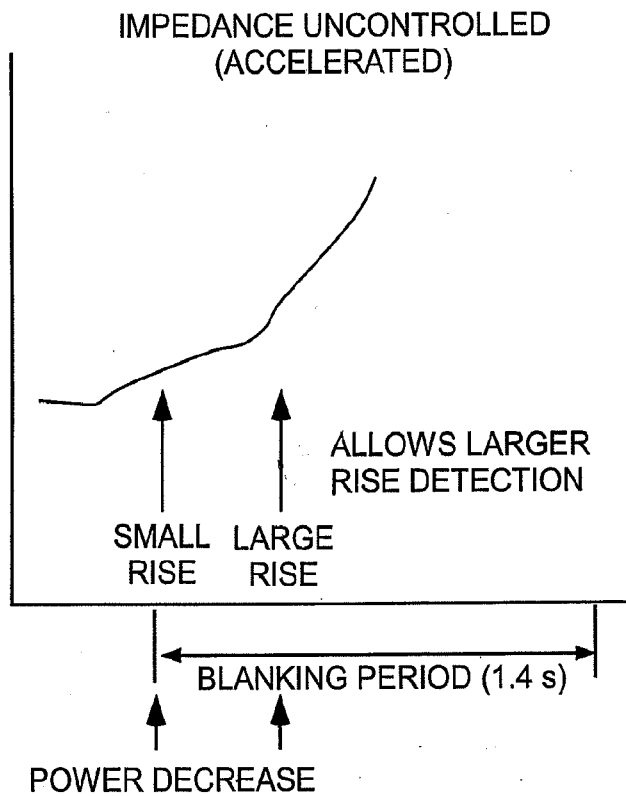


**Fig. 14**

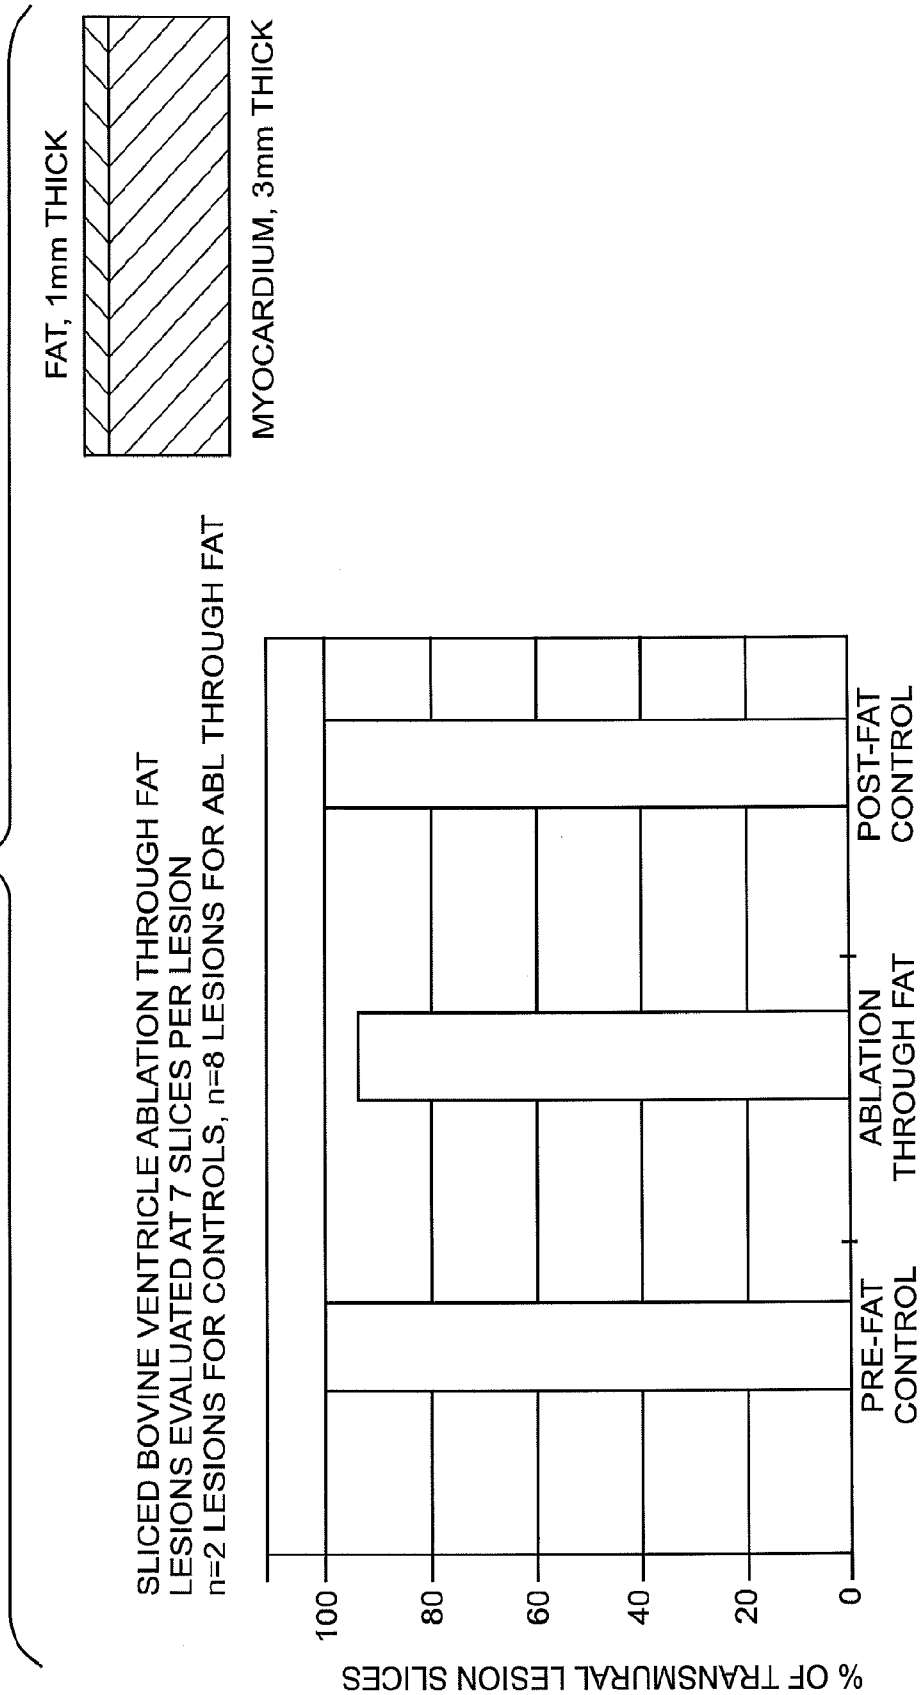


**Fig. 15a**

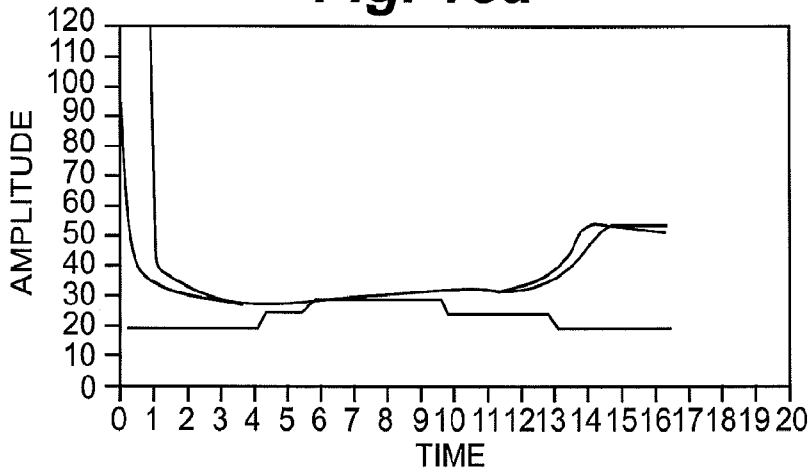

**Fig. 15b**

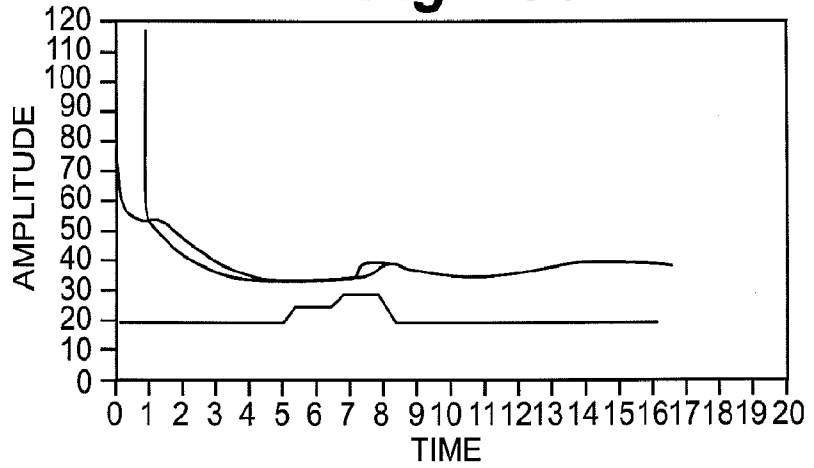

**Fig. 16**

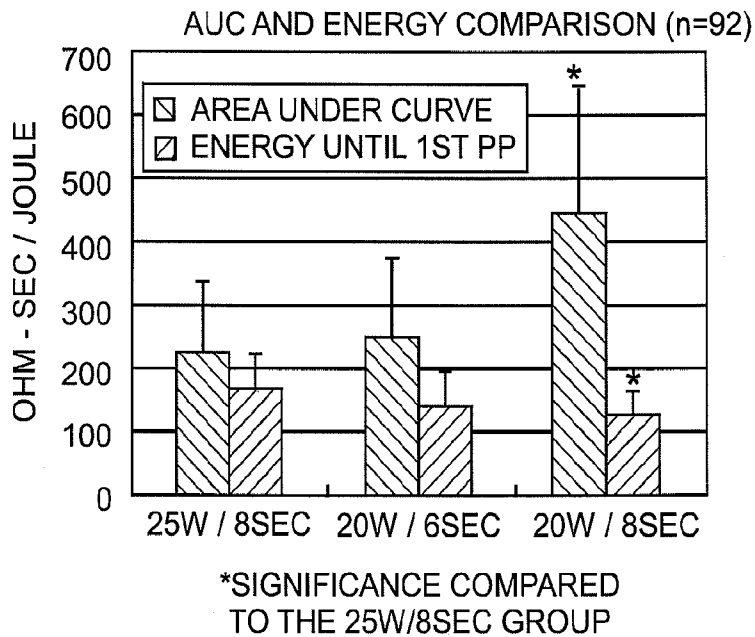

**INTERNATIONAL SEARCH REPORT**

International application No  
PCT/US2007/073995

**A. CLASSIFICATION OF SUBJECT MATTER**

INV. A61B18/12  
ADD. A61B17/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 245 065 B1 (PANESCU DORIN [US] ET AL) 12 June 2001 (2001-06-12) figures 1,2,12A,12B,13 -----	25-28
A	US 2005/090815 A1 (FRANCISCHELLI DAVID E [US] ET AL) 28 April 2005 (2005-04-28) figures 1,3,6,7,10 -----	25-28
A	EP 0 368 532 B1 (SMITHS INDUSTRIES PLC [GB]) 29 December 1993 (1993-12-29) figures 1,2 -----	25-28
A	EP 0 136 855 B1 (VALLEYLAB INC [US]) 15 November 1989 (1989-11-15) figures 1,2 -----	25-28

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

28 November 2007

Date of mailing of the international search report

04/12/2007

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Scheffler, Arnaud

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US2007/073995

## Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1.  Claims Nos.: 1-24  
because they relate to subject matter not required to be searched by this Authority, namely:  
The subject-matter of claims 1-24 has not been searched, because it relates to a method of applying ablation energy to tissue (Rule 39.1(iv) PCT - Method for treatment of the human or animal body by therapy).
2.  Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3.  Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1.  As all required additional search fees were timely paid by the applicant, this international search report covers allsearchable claims.
2.  As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3.  As only some of the required additional search fees were timely paid by the applicant, this international search reportcovers only those claims for which fees were paid, specifically claims Nos.:
4.  No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2007/073995
---

Patent document cited in search report	Publication date	Publication date	Patent family member(s)	Publication date
US 6245065	B1	12-06-2001	NONE	
US 2005090815	A1	28-04-2005	NONE	
EP 0368532	B1	29-12-1993	AU 620459 B2	20-02-1992
			AU 4385789 A	17-05-1990
			CA 2001637 A1	10-05-1990
			DE 68911867 D1	10-02-1994
			DE 68911867 T2	14-04-1994
			EP 0368532 A2	16-05-1990
			ES 2047684 T3	01-03-1994
			GB 2225656 A	06-06-1990
			JP 2181208 A	16-07-1990
			JP 2771642 B2	02-07-1998
			US 4961047 A	02-10-1990
EP 0136855	B1	15-11-1989	AU 555500 B2	25-09-1986
			AU 3295784 A	21-03-1985
			DE 3480462 D1	21-12-1989
			EP 0136855 A2	10-04-1985

专利名称(译)	透壁消融系统和方法		
公开(公告)号	<a href="#">EP2076195A1</a>	公开(公告)日	2009-07-08
申请号	EP2007813170	申请日	2007-07-20
[标]申请(专利权)人(译)	美敦力公司		
申请(专利权)人(译)	美敦力公司, INC.		
当前申请(专利权)人(译)	美敦力公司, INC.		
[标]发明人	HONG JINBACK FRANCISCHELLI DAVID E STEWART MARK T		
发明人	HONG, JINBACK FRANCISCHELLI, DAVID, E. STEWART, MARK, T.		
IPC分类号	A61B18/12 A61B17/00 A61B5/00 A61B5/053 A61B18/00		
CPC分类号	A61B18/1206 A61B5/053 A61B5/7203 A61B2018/00666 A61B2018/00678 A61B2018/00702 A61B2018/00708 A61B2018/00875		
代理机构(译)	ZIMMERMANN & PARTNER		
优先权	60/832242 2006-07-20 US 60/923365 2007-04-13 US		
其他公开文献	EP2076195B1		
外部链接	<a href="#">Espacenet</a>		

#### 摘要(译)

一种施加消融能量以实现透壁性的方法，包括以起始功率将消融能量施加到组织部位并监测组织部位的阻抗。根据一些实施例，响应于检测到功率平台或在最短时间内施加第一功率，可以增加施加到组织部位的功率。根据一些实施例，响应于阻抗的增加，可以减小施加到组织部位的功率。根据一些实施例，可以响应于阻抗上升之后的透壁平台来指示透壁性。