



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 248 228 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

09.10.2002 Bulletin 2002/41

(51) Int Cl.7: G06K 11/12, G06K 11/14,

G06K 11/16

(21) Application number: 02076195.3

(22) Date of filing: 27.03.2002

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 04.04.2001 US 826194

23.07.2001 US 911274

(71) Applicant: EASTMAN KODAK COMPANY

Rochester, New York 14650 (US)

(72) Inventors:

- Siwinski, Michael J.,
c/o Eastman Kodak Company
Rochester, New York 14650-2201 (US)

- Kilmer, Kathleen, c/o Eastman Kodak Company
Rochester, New York 14650-2201 (US)
- Feldman, Rodney, c/o Eastman Kodak Company
Rochester, New York 14650-2201 (US)
- Cropper, Andre D., c/o Eastman Kodak Company
Rochester, New York 14650-2201 (US)

(74) Representative:

Nunney, Ronald Frederick Adolphe et al
Kodak Limited,
Patent Department (W92)-3A,
Headstone Drive
Harrow, Middlesex HA1 4TY (GB)

(54) Touch screen display and method of manufacture

(57) A touch screen display, includes an electroluminescent display; a touch screen; and a transparent sheet that functions as an element of both the electroluminescent display and the touch screen.

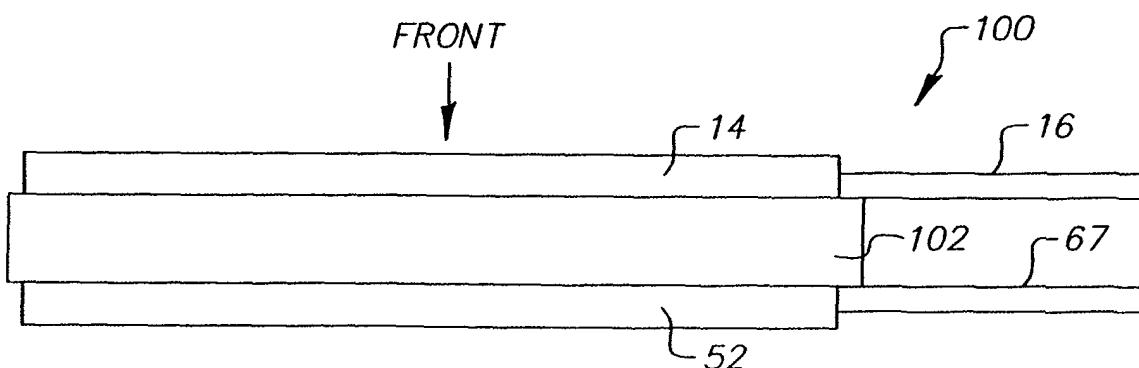


FIG. 8

Description

[0001] This invention relates generally to a flat panel display and, more particularly, to a flat panel display with a touch screen.

[0002] Modern electronic devices provide an increasing amount of functionality with a decreasing size. By continually integrating more and more capabilities within electronic devices, costs are reduced and reliability increased. Touch screens are frequently used in combination with conventional soft displays such as cathode ray tubes (CRTs), liquid crystal displays (LCDs), plasma displays and electroluminescent displays. The touch screens are manufactured as separate devices and mechanically mated to the viewing surfaces of the displays.

[0003] Fig. 1 shows a prior art touch screen 10. The touch screen 10 includes a transparent substrate 12. This substrate 12 is typically rigid, and is usually glass, although sometimes a flexible material, such as plastic, is used. Various additional layers of materials forming touch sensitive elements 14 of the touch screen 10 are formed on top of the substrate 12. The touch sensitive elements 14 include transducers and circuitry that are necessary to detect a touch by an object, in a manner that can be used to compute the location of such a touch. A cable 16 is attached to the circuitry so that various signals may be brought onto or off of the touch screen 10. The cable 16 is connected to an external controller 18. The external controller 18 coordinates the application of various signals to the touch screen 10, and performs calculations based on responses of the touch sensitive elements to touches, in order to extract the (X, Y) coordinates of the touch.

[0004] There are three commonly used touch screen technologies that utilize this basic structure: resistive, capacitive, and surface acoustic wave (SAW). For more information on these technologies, see "Weighing in on touch technology," by Scott Smith, published in Control Solutions Magazine, May 2000.

[0005] There are three types of resistive touch screens, 4-wire, 5-wire, and 8-wire. The three types share similar structures. Fig. 2a shows a top view of a resistive touch screen 10. Fig. 2b shows a side view of the resistive touch screen 10. The touch sensitive elements 14 of the resistive touch screen 10 includes a lower circuit layer 20; a flexible spacer layer 22 containing a matrix of spacer dots 24; a flexible upper circuit layer 26; and a flexible top protective layer 28. All of these layers are transparent. The lower circuit layer 20 often comprises conductive materials deposited on the substrate 12, forming a circuit pattern.

[0006] The main difference between 4-wire, 5-wire, and 8-wire touch screens is the circuit pattern in the lower circuit layer 20 and the upper circuit layer 26, and the means for making resistance measurements. An external controller 18 is connected to the touch screen circuitry via cable 16. Conductors in cable 16 are connected to the circuitry within the lower circuit layer 20 and

the upper circuit layer 26. The external controller 18 coordinates the application of voltages to the touch screen circuit elements. When a resistive touch screen is pressed, the pressing object, whether a finger, a stylus, or some other object, deforms the top protective layer 28, the upper circuit layer 26, and the spacer layer 22, forming a conductive path at the point of the touch between the lower circuit layer 20 and the upper circuit layer 26. A voltage is formed in proportion to the relative resistances in the circuit at the point of touch, and is measured by the external controller 18 connected to the other end of the cable 16. The controller 18 then computes the (X, Y) coordinates of the point of touch. For more information on the operation of resistive touch screens, see "Touch Screen Controller Tips," Application Bulletin AB-158, Burr-Brown, Inc. (Tucson, Arizona), April 2000, pages 1-9.

[0007] Fig. 3a shows a top view of a capacitive sensing touch screen 10. Fig. 3b shows a side view of the capacitive sensing touch screen 10. The touch sensitive elements 14 include a transparent metal oxide layer 30 formed on substrate 12. Metal contacts 32, 34, 36, and 38 are located on the metal oxide layer 30 at the corners of the touch screen 10. These metal contacts are connected by circuitry 31 to conductors in cable 16. An external controller 18 causes voltages to be applied to the metal contacts 32, 34, 36, and 38, creating a uniform electric field across the surface of the substrate 12, propagated through the transparent metal oxide layer 30. When a finger or other conductive object touches the touch screen, it capacitively couples with the screen causing a minute amount of current to flow to the point of contact, where the current flow from each corner contact is proportional to the distance from the corner to the point of contact. The controller 18 measures the current flow proportions and computes the (X, Y) coordinates of the point of touch. US Patent 5,650,597, issued July 22, 1997 to Redmayne describes a variation on capacitive touch screen technology utilizing a technique called differential sensing.

[0008] Fig. 4a shows a top view of a prior art surface acoustic wave (SAW) touch screen 10. Fig 4b shows a side view of a SAW touch screen 10. The touch sensitive elements 14 include an arrangement of acoustic transducers 46 and sound wave reflectors 48 formed on the face of substrate 12. The sound wave reflectors 48 are capable of reflecting high frequency sound waves that are transmitted along the substrate surface, and are placed in patterns conducive to proper wave reflection. Four acoustic transducers 46 are formed on the substrate 12 and are used to launch and sense sound waves on the substrate surface. A cable 16 is bonded to the substrate 12, and contains conductors that connect the acoustic transducers 46 to an external controller 18. This external controller 18 applies signals to the acoustic transducers 46, causing high frequency sound waves to be emitted across the substrate 12. When an object touches the touch screen, the sound wave field

is disturbed. The transducers **46** detect this disturbance, and external controller **18** uses this information to calculate the (X, Y) coordinate of the touch.

[0009] Fig. 5 shows a typical prior art electroluminescent display such as an organic light emitting diode OLED flat panel display **49** of the type shown in US Patent 5,688,551, issued November 18, 1997 to Littman et al. The OLED display includes substrate **50** that provides a mechanical support for the display device. The substrate **50** is typically glass, but other materials, such as plastic, may be used. Light-emitting elements **52** include conductors **54**, a hole injection layer **56**, an organic light emitter **58**, an electron transport layer **60** and a metal cathode layer **62**. When a voltage is applied by a voltage source **64** across the light emitting elements **52**, via cable **67**, light **66** is emitted through the substrate **50**, or through a transparent cathode layer **62**.

[0010] The OLED structure described in relation to Fig. 5 is commonly known as a bottom-emitting structure, where light is emitted through the substrate **50**, conductors **54**, and hole injection layer **56**. An alternative OLED structure, known as a top-emitting structure, similar to that described by International Patent WO 00/17911, issued on March 30, 2000 to Pichler, is shown in Fig. 6. Here, light emitting elements **52**, including conductors **54**, a hole injection layer **56**, an organic light emitter **58**, an electron transport layer **60** and a metal cathode layer **62**, are formed on substrate **50**. A transparent cover sheet **51** is then placed above metal cathode layer **62**, and is sealed to the substrate **50**. In the top-emitting OLED structure, light is emitted by the organic light emitter **58** through the electron transport layer **60**, the metal cathode layer **62**, and the transparent cover sheet **51**. Less light is absorbed or scattered in top-emitting OLEDs, making the device more efficient. Additionally, top-emitting OLEDs often allow for larger pixel fill factors, since the light emitted is not blocked by conductors **54**.

[0011] Conventionally, when a touch screen is used with a flat panel display, the touch screen is simply placed over the flat panel display, above the surface from which light is emitted, and the two are held together by a mechanical mounting means such as a frame. Fig. 7 shows such a prior art arrangement with a bottom-emitting touch screen mounted on an OLED flat panel display. After the touch screen and the OLED display are assembled, the two substrates **12** and **50** are placed together in a frame **68**. Sometimes, a narrow air gap is added between the substrates **12** and **50** by inserting a spacer **72** to prevent Newton rings. The thickness and materials in the substrates can degrade the quality of the image. When light passes from the underlying flat panel display through the touch screen, a change in refractive index occurs. Some light is refracted, some light is transmitted, and some light is reflected. This reduces the brightness and sharpness of the display.

[0012] Although Fig. 7 illustrates a conventional mounting means for a touch screen to a bottom-emitting

OLED, the same basic method may be used for mounting a touch screen to a top-emitting OLED. Here, the touch screen's substrate **12** is placed together with the transparent cover sheet **51** (not shown) in frame **68**. A narrow air gap may be placed between the substrate **12** and the transparent cover sheet **51** by inserting spacer **72**. Light emitted by the light emitting elements **52** then passes through the transparent cover sheet **51**, through the substrate **12**, and through the touch sensitive materials **14**.

[0013] US Patent 5,982,004 issued November 9, 1999, to Sin et al. describes a thin film transistor that may be useful for flat panel display devices and mentions that touch sensors may be integrated into a display panel. However, Sin et al. do not propose a method for doing so.

[0014] US Patent 6,028,581 issued February 22, 2000, to Umeya describes a liquid crystal display with an integrated touch screen on the same face of a substrate to reduce parallax error due to the combined thickness of the liquid crystal display and the touch screen. This arrangement has the shortcoming that the existing pixel array layout must be significantly modified, incurring additional cost and reducing pixel fill factor.

[0015] US Patent 5,995,172 issued November 30, 1999, to Ikeda et al. discloses a tablet integrated LCD display apparatus wherein a touch sensitive layer is formed on the same side of a substrate as the LCD.

[0016] US Patent 5,852,487 issued December 22, 1998, to Fujimori et al. discloses a liquid crystal display having a resistive touch screen. The display includes three substrates.

[0017] US Patent 6,177,918 issued January 23, 2001, to Colgan et al. describes a display device having a capacitive touch screen and LCD integrated on the same side of a substrate.

[0018] There remains a need for an improved touch screen-flat panel display system that minimizes device weight, removes redundant materials, decreases cost, eliminates special mechanical mounting design, increases reliability, prevents Newton rings, and minimizes the degradation in image quality.

[0019] The need is met according to the present invention by providing a touch screen display that includes an electroluminescent display; a touch screen, and a transparent sheet that functions as an element of both the electroluminescent display and the touch screen

[0020] The display according to the present invention is advantageous in that it provides a display having a minimum number of substrates, thereby providing a thin, light, easily manufacturable display.

Fig. 1 is a schematic diagram showing the basic structure of a prior art touch screen;

Fig. 2a and 2b are schematic diagrams showing the structure of a prior art resistive touch screen;

Fig. 3a and 3b are schematic diagrams showing the structure of a prior art capacitive touch screen;

Fig. 4a and 4b are schematic diagrams showing the structure of a prior art surface acoustic wave touch screen;

Fig. 5 is a schematic diagram showing the structure of a prior art bottom-emitting organic electroluminescent display;

Fig. 6 is a schematic diagram showing the structure of a prior art top-emitting organic electroluminescent display;

Fig. 7 is a schematic diagram showing the combination of a touch screen with a flat panel electroluminescent display as would be accomplished in the prior art;

Fig. 8 is a schematic diagram showing the basic structure of a bottom-emitting electroluminescent display with a touch screen according to the present invention;

Fig. 9 is a schematic diagram showing an embodiment of the present invention including a resistive touch screen utilizing a bottom-emitting structure;

Fig. 10 is a schematic diagram showing an embodiment of the present invention with a capacitive touch screen utilizing a bottom-emitting structure;

Fig. 11 is a schematic diagram showing an embodiment of the present invention with a surface acoustic wave touch screen utilizing a bottom-emitting structure;

Fig. 12 is a schematic diagram showing the basic structure of a top-emitting electroluminescent display with a touch screen according to the present invention;

Fig. 13 is a schematic diagram showing an embodiment of the present invention including a resistive touch screen utilizing a top-emitting structure;

Fig. 14 is a schematic diagram showing an embodiment of the present invention with a capacitive touch screen utilizing a top-emitting structure; and

Fig. 15 is a schematic diagram showing an embodiment of the present invention with a surface acoustic wave touch screen utilizing a top-emitting structure.

[0021] Referring to Fig. 8, a touch screen display generally designated 100 according to the present invention includes a transparent sheet 102 having light emitting elements 52 of an electroluminescent display formed on one face of the substrate for emitting light through the substrate, in a bottom-emitting structure, and touch sensitive elements 14 of a touch screen formed on the other face of the transparent sheet 102. The transparent sheet 102 is made of a transparent material, such as glass or plastic, and is thick enough to provide mechanical support for both the light emitting elements 52 and the touch sensitive elements 14. This improved display eliminates the need for a second substrate, and allows both the light emitting elements 52 of the image display and the touch sensitive elements 14 to be formed on the same substrate without interfering with each other. This reduc-

es system cost, manufacturing cost, and system integration complexity. Various prior art touch screen technologies may be employed in the touch screen display 100 as described below.

[0022] Referring to Fig. 9, a touch screen display 100 including a resistive touch screen according to one embodiment of the present invention utilizing a bottom-emitting structure is shown. A lower circuit layer 20 and metal interconnections 54 are formed, for example by photolithographically patterning respective conductive layers on opposite faces of transparent sheet 102. The conductive layers comprise for example a semitransparent metal, typically ITO. On the image display side of the transparent sheet 102, a hole injection layer (HIL) 56 is applied to the device over the metal interconnections 54. Then organic light emitters 58 are deposited on top of the HIL layer 56. During the deposition stage, the organic material is patterned for individual colors by either shadow masking or other vacuum deposition techniques. Next, an electron transport layer (ETL) 60 is deposited, followed by a metal cathode layer 62. On the touch screen side of the transparent sheet 102, a flexible spacer layer 22 containing a matrix of spacer dots 24 is placed on top of the lower circuit layer 20. A flexible upper circuit layer 26 is then attached to the device over the spacer layer 22. The stack is protected by a flexible top protective layer 28 that is laminated on top of the upper circuit layer 26. A cable 16 is attached to the touch screen elements 14, completing the touch screen portion of the display 100. Finally, a cable 67 is attached to the light emitting elements 52, resulting in a fully manufactured touch screen display 100.

[0023] Fig. 10 shows a touch screen display 100 with a capacitive touch screen according to the present invention using a bottom-emitting structure. A transparent sheet 102 is coated on one face (the touch screen face) with a transparent metal oxide layer 30. On the other face of the transparent sheet 102, the light emitting elements 52 of an image display are formed. First, metal interconnections 54 are formed on the transparent sheet 102. Next, a hole injection layer (HIL) 56 is applied to the device over the metal interconnections 54. Then organic light emitters 58 are coated and patterned on top of the HIL layer 56. Next, an electron transport layer (ETL) 60 is deposited, followed by a metal cathode layer 62. Metal contacts 32, 34, 36, and 38 are then placed at the corners of the metal oxide layer 30, completing the touch screen elements 14. Finally, a cable 67 is attached to the light emitting elements 52, and a cable 16 is attached to touch screen elements 14, where the conductors of the cable 16 are connected to the metal contacts 32, 34, 36, and 38, resulting in a fully manufactured touch screen display 100.

[0024] Fig. 11 shows a bottom-emitting touch screen display 100 manufactured with a surface acoustic wave touch screen. A series of acoustic surface wave reflectors 48 are etched into one face of transparent sheet 102. Next, an image display 52 is formed on the opposite

face of the transparent sheet 102, started by forming metal interconnections 54. Then, a hole injection layer (HIL) 56 is applied to the device over the metal interconnections 54. Organic emitters 58 are then coated and patterned on top of the HIL layer 56. Next, an electron transport layer (ETL) 60 is deposited, followed by a metal cathode layer 62, completing the light emitting elements 52. The touch screen elements 14 are then completed by forming four acoustic transducers 46 on the transparent sheet 102. Finally, a cable 67 is attached to the light emitting elements 52 of the image display, and a cable 16 is attached to the touch sensitive elements 14 of the touch screen, resulting in a fully manufactured touch screen display 100.

[0025] Fig. 12 shows the basic structure of the present invention utilizing a top-emitting structure for the electroluminescent display. A touch screen display 100 includes a substrate 104 having light emitting elements 52 of an electroluminescent display formed on one face, and a transparent sheet 102 having touch sensitive elements of a touch screen formed on one face. In this structure, light from the light emitting elements 52 passes through the transparent sheet 102. The transparent sheet 102 is sealed to the substrate 104 along the sides of the two materials, where one face of the transparent sheet 102 is contained within the touch screen display 100, forming a top-emitting structure. Touch sensitive elements 14 of a touch screen formed on the other face of the transparent sheet 102. The transparent sheet 102 is made of a transparent material, such as glass or plastic, and is thick enough to provide mechanical support for the touch sensitive elements 14. A conventional touch screen consists of touch sensitive elements 14 and a transparent material used as a substrate. In the present embodiment, the touch sensitive materials 14 may be formed on the transparent sheet 102 of the touch screen display 100, eliminating the need for an additional material layer for the combined structure. This reduces system cost, manufacturing cost, and system integration complexity. Various prior art touch screen technologies may be employed in the display 100 as described below.

[0026] Referring to Fig. 13, a touch screen display 100 including a resistive touch screen according to one embodiment of the present invention utilizing a top-emitting structure is shown. Metal interconnections 54 are formed, for example by photolithographically patterning respective conductive layers on one face of substrate 104. A hole injection layer (HIL) 56 is applied to the device over the metal interconnections 54. Then organic light emitters 58 are deposited on top of the HIL layer 56. During the deposition stage, the organic material is patterned for individual colors by either shadow masking or other vacuum deposition techniques. Next, an electron transport layer (ETL) 60 is deposited, followed by a semi-transparent or transparent metal cathode layer 62. Transparent sheet 102 is then sealed to the substrate 104. A lower circuit layer 20 is formed on the face

of the transparent sheet 102. Next, a flexible spacer layer 22 containing a matrix of spacer dots 24 is placed on top of the lower circuit layer 20. A flexible upper circuit layer 26 is then attached to the device over the spacer layer 22. The stack is protected by a flexible top protective layer 28 that is laminated on top of the upper circuit layer 26.

5 A cable 16 is attached to the touch screen elements 14, completing the touch screen portion of the touch screen display 100. Finally, a cable 67 is attached to the light emitting elements 52, resulting in a fully manufactured touch screen display 100. This method for producing an integrated touch screen-electroluminescent display device utilizes one sequential manufacturing process, reducing overall time and materials flow

10 problems, and allows for encapsulation of the light emitting elements as quickly as possible, improving yields.

[0027] Alternatively, the touch screen display of Fig. 13 may be manufactured in a second manner, where the touch sensitive elements are placed on the transparent sheet 102 prior to encapsulation. In such a process,

15 metal interconnections 54 are formed, for example by photolithographically patterning respective conductive layers on one face of substrate 104. A hole injection layer (HIL) 56 is applied to the device over the metal interconnections 54. Then organic light emitters 58 are deposited on top of the HIL layer 56. During the deposition stage, the organic material is patterned for individual colors by either shadow masking or other vacuum deposition techniques.

20 Next, an electron transport layer (ETL) 60 is deposited, followed by a semi-transparent or transparent metal cathode layer 62. In another location, typically prior to or simultaneous with the above manufacturing steps, the touch sensitive elements 14 are formed on one face of transparent sheet 102. First, a lower circuit layer 20 is formed on the face of the transparent sheet 102. Next, a flexible spacer layer 22 containing a matrix of spacer dots 24 is placed on top of the lower circuit layer 20. A flexible upper circuit layer 26 is then attached to the device over the spacer layer 22.

25 The stack is protected by a flexible top protective layer 28 that is laminated on top of the upper circuit layer 26.

[0028] At this point, the substrate 104, the transparent sheet 102, and the materials attached to them, are brought to a common location. The transparent sheet 102 is sealed to the substrate 104, where the light emitting elements 52 are placed between the substrate 104 and the transparent sheet 102, while the face with the touch sensitive elements 14 is placed away from the substrate 104. The touch screen display 100 is now encapsulated. Next, a cable 16 is attached to the touch screen elements 14, completing the touch screen portion of the touch screen display 100. Finally, a cable 67 is attached to the light emitting elements 52, resulting in a fully manufactured touch screen display 100. This method for producing an integrated touch screen-electroluminescent display device decouples the manufacturing of the touch sensitive elements 14 from the light emitting elements 52. Each structure may then be tested

30

35

40

45

50

55

separately, and a defective structure may then be discarded, prior to encapsulation. This improves overall yield, since one defective structure does not require both structures to be discarded.

[0029] Fig. 14 shows a touch screen display **100** with a capacitive touch screen according to the present invention using a top-emitting structure. According to one method of manufacturing, light emitting elements **52** of an image display are formed on one face of substrate **104**. First, metal interconnections **54** are formed on the substrate **104**. Next, a hole injection layer (HIL) **56** is applied to the device over the metal interconnections **54**. Then organic light emitters **58** are coated and patterned on top of the HIL layer **56**. Next, an electron transport layer (ETL) **60** is deposited, followed by a semi-transparent or transparent metal cathode layer **62**. Transparent sheet **102** is then sealed to substrate **104**, encapsulating the display. Next, a transparent metal oxide layer **30** is coated on the top transparent material. Metal contacts **34**, and **38** are then placed at the corners of the metal oxide layer **30**, completing the touch screen elements **14**. Finally, a cable **67** is attached to the light emitting elements **52**, and a cable **16** is attached to touch screen elements **14**, where the conductors of the cable **16** are connected to the metal contacts **34**, and **38**, resulting in a fully manufactured touch screen display **100**.

[0030] Alternatively, the touch screen display of Fig. 14 may be manufactured in a second manner, where the touch sensitive elements are placed on the transparent sheet **102** prior to encapsulation. In such a process, metal interconnections **54** are formed on one face of the substrate **104**. Next, a hole injection layer (HIL) **56** is applied to the device over the metal interconnections **54**. Then organic light emitters **58** are coated and patterned on top of the HIL layer **56**. Next, an electron transport layer (ETL) **60** is deposited, followed by a semi-transparent or transparent metal cathode layer **62**. In another location, typically prior to or simultaneous with the above manufacturing steps, the touch sensitive elements **14** are formed on one face of transparent sheet **102**. First, a transparent metal oxide layer **30** is coated on the top transparent material. Metal contacts **34**, and **38** are then placed at the corners of the metal oxide layer **30**, completing the touch screen elements **14**.

[0031] At this point, the substrate **104**, the transparent sheet **102**, and the materials attached to them, are brought to a common location. The transparent sheet **102** is sealed to the substrate **104**, where the light emitting elements **52** are placed between the substrate **104** and the transparent sheet **102**, while the face with the touch sensitive elements **14** is placed away from the substrate **104**. The touch screen display **100** is now encapsulated. Transparent sheet **102** is then sealed to substrate **104**, encapsulating the touch screen display. Finally, a cable **67** is attached to the light emitting elements **52**, and a cable **16** is attached to touch screen elements **14**, where the conductors of the cable **16** are

connected to the metal contacts **34**, and **38**, resulting in a fully manufactured touch screen display **100**.

[0032] Fig. 15 shows a top-emitting display **100** manufactured with a surface acoustic wave touch screen. According to one method of manufacturing, an image display **52** is formed on the opposite face of the substrate **104**, started by forming metal interconnections **54**. Then, a hole injection layer (HIL) **56** is applied to the device over the metal interconnections **54**. Organic emitters **58** are then coated and patterned on top of the HIL layer **56**. Next, an electron transport layer (ETL) **60** is deposited, followed by a semi-transparent or transparent metal cathode layer **62**, completing the light emitting elements **52**. After the deposition of the semi-transparent or transparent metal cathode layer **62**, transparent sheet **102** is then sealed to substrate **104**, encapsulating the touch screen display. Next, a series of acoustic surface wave reflectors **48** are etched into exposed face of transparent sheet **102**. The touch screen elements **14** are then completed by forming four acoustic transducers **46** on the transparent sheet **102**. Finally, a cable **67** is attached to the light emitting elements **52** of the image display, and a cable **16** is attached to the touch sensitive elements **14** of the touch screen, resulting in a fully manufactured touch screen display **100**.

[0033] Alternatively, the organic electroluminescent display of Fig. 15 may be manufactured in a second manner, where the touch sensitive elements are placed on the transparent sheet **102** prior to encapsulation. In such a process, an image display **52** is formed on the opposite face of the substrate **104**, started by forming metal interconnections **54**. Then, a hole injection layer (HIL) **56** is applied to the device over the metal interconnections **54**. Organic emitters **58** are then coated and patterned on top of the HIL layer **56**. Next, an electron transport layer (ETL) **60** is deposited, followed by a semi-transparent or transparent metal cathode layer **62**, completing the light emitting elements **52**. Elsewhere, and typically prior to the above manufacturing steps, a series of acoustic surface wave reflectors **48** are etched into one face of transparent sheet **102**. The touch screen elements **14** are then completed by forming four acoustic transducers **46** on the transparent sheet **102**. After the deposition of the semi-transparent or transparent metal cathode layer **62**, the transparent sheet **102** is then sealed to substrate **104**, encapsulating the touch screen display. Note that the face of the transparent sheet containing the touch sensitive elements is placed away from the substrate **104**. Finally, a cable **67** is attached to the light emitting elements **52** of the display, and a cable **16** is attached to the touch sensitive elements **14** of the touch screen, resulting in a fully manufactured touch screen display **100**.

[0034] The invention has been described in detail with particular reference to certain preferred embodiments thereof, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention. For example, US Patent 5,703,436 is-

sued on December 30, 1997, to Forrest et al. describes an OLED that can simultaneously emit light via both top-emitting and bottom-emitting mechanisms. Such a display can utilize the current invention by forming touch sensitive elements of a touch screen on either face, or both faces, of the OLED device, using the methods described herein. Such an integrated touch screen-OLED device falls under the scope of this invention. Additionally, US Patent 5,834,893 issued on November 10, 1998, to Bulovic et al. describes an inverted OLED structure, in which a metal cathode is formed on the substrate and an anode is formed above the organic light emitting materials. Such an OLED structure can utilize the current invention by forming touch sensitive elements of a touch screen on either face of the OLED device, using the methods described herein. Such an integrated touch screen-OLED device falls under the scope of this invention.

Claims

1. A touch screen display, comprising:

- a) an electroluminescent display;
- b) a touch screen, and
- c) a transparent sheet that functions as an element of both the electroluminescent display and the touch screen.

2. The display of claim 1, wherein the electroluminescent display is a bottom emitting organic light emitting diode display (OLED) and the transparent sheet functions as a substrate for both the OLED display and the touch screen.

3. The display of claim 1, wherein the electroluminescent display is a top emitting organic light emitting diode display (OLED) and the transparent sheet functions as a cover sheet for the OLED display and a substrate for the touch screen.

4. The display of claim 1, wherein the touch screen is a resistive touch screen.

5. The display of claim 1, wherein the touch screen is a capacitive touch screen.

6. The display of claim 1, wherein the touch screen is a surface acoustic wave touch screen.

7. The display of claim 1, wherein the transparent sheet is glass.

8. The display of claim 1, wherein the transparent sheet is plastic.

9. A method of manufacturing a touch screen display,

comprising the steps of:

- a) providing a transparent sheet having two faces;
- b) disposing an electroluminescent display on one face of the transparent sheet; and
- c) disposing a touch screen on the other face of the transparent sheet.

10. The method of claim 9, wherein the electroluminescent display is a bottom emitting organic light emitting diode display (OLED) and the transparent sheet functions as a substrate for both the OLED display and the touch screen.

11. The display of claim 9, wherein the electroluminescent display is a top emitting organic light emitting diode display (OLED) and the transparent sheet functions as a cover sheet for the OLED display and a substrate for the touch screen.

12. The display of claim 9, wherein the touch screen is a resistive touch screen.

13. The display of claim 9, wherein the touch screen is a capacitive touch screen.

14. The display of claim 9, wherein the touch screen is a surface acoustic wave touch screen.

15. The display of claim 9, wherein the transparent sheet is glass.

16. The display of claim 9, wherein the transparent sheet is plastic.

40

45

50

55

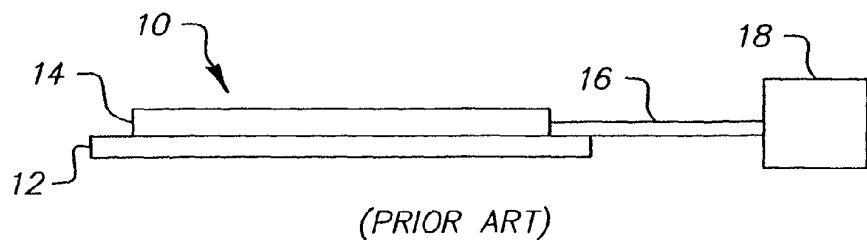


FIG. 1

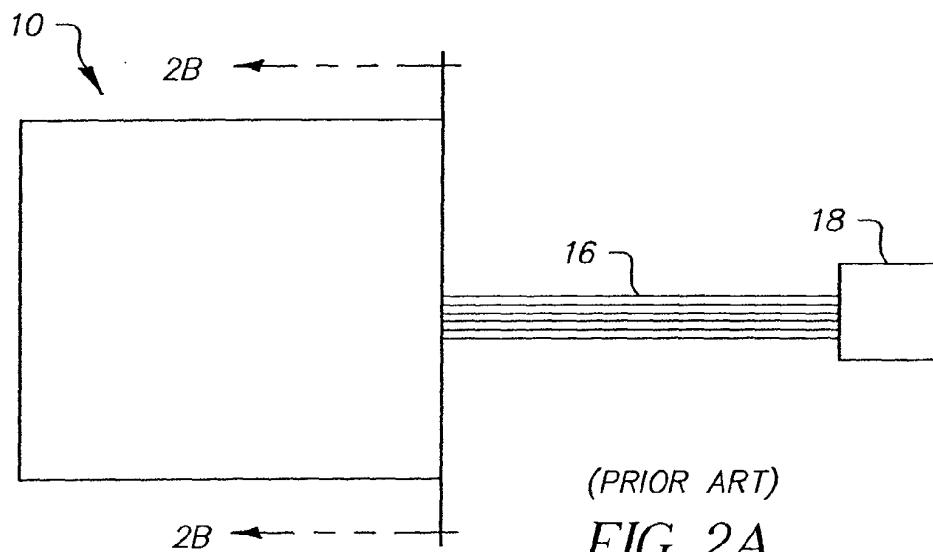


FIG. 2A



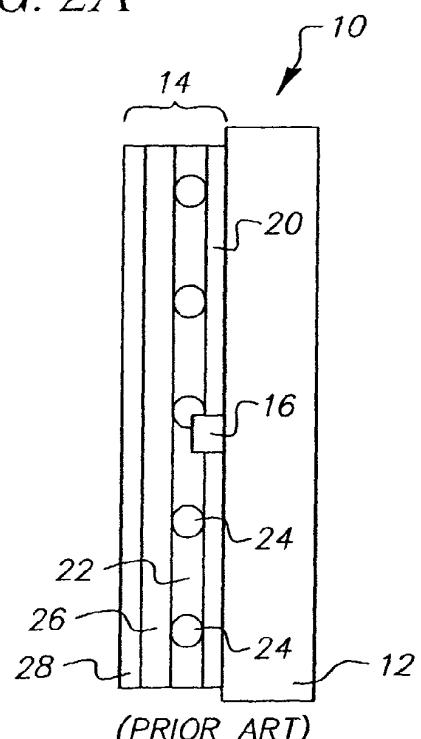


FIG. 2B

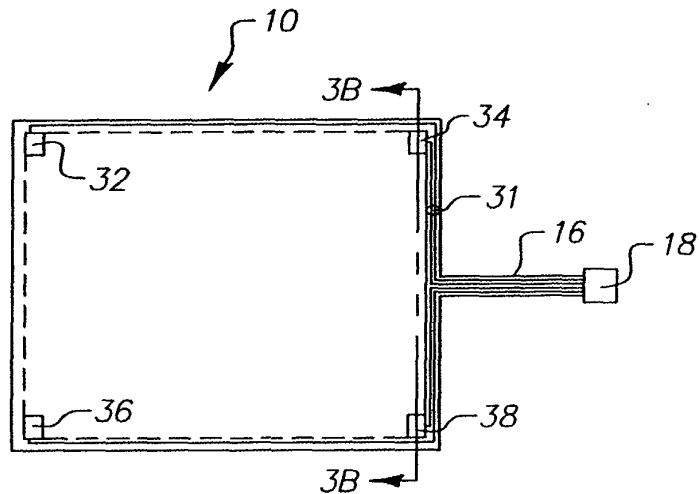


(PRIOR ART)

FIG. 3A

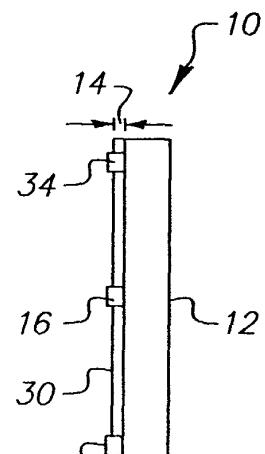


(PRIOR ART)

FIG. 3B

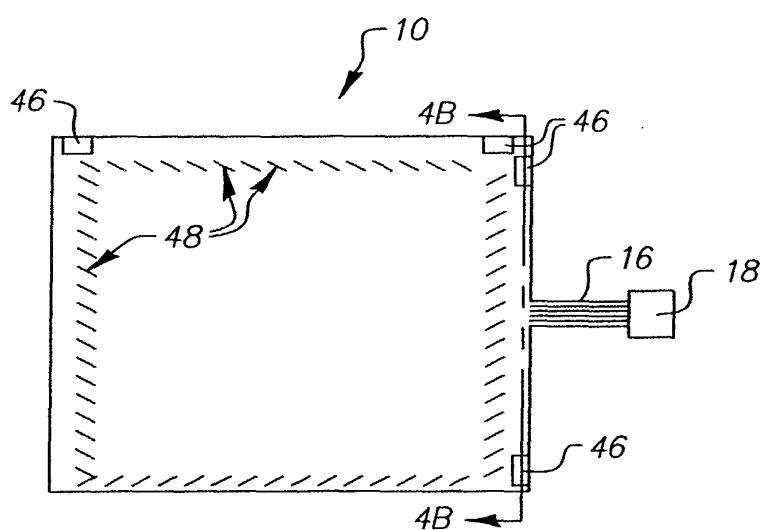


(PRIOR ART)

FIG. 4A

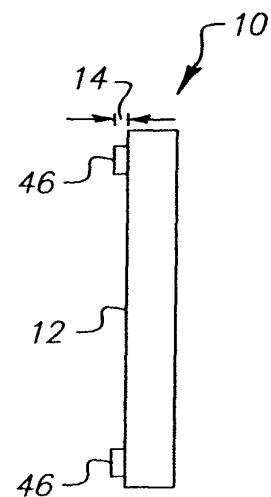


(PRIOR ART)

FIG. 4B

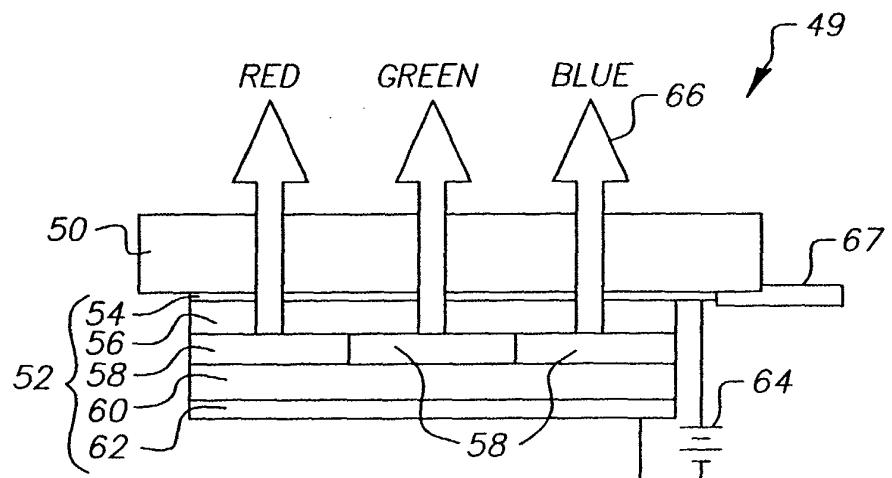


(PRIOR ART)

FIG. 5

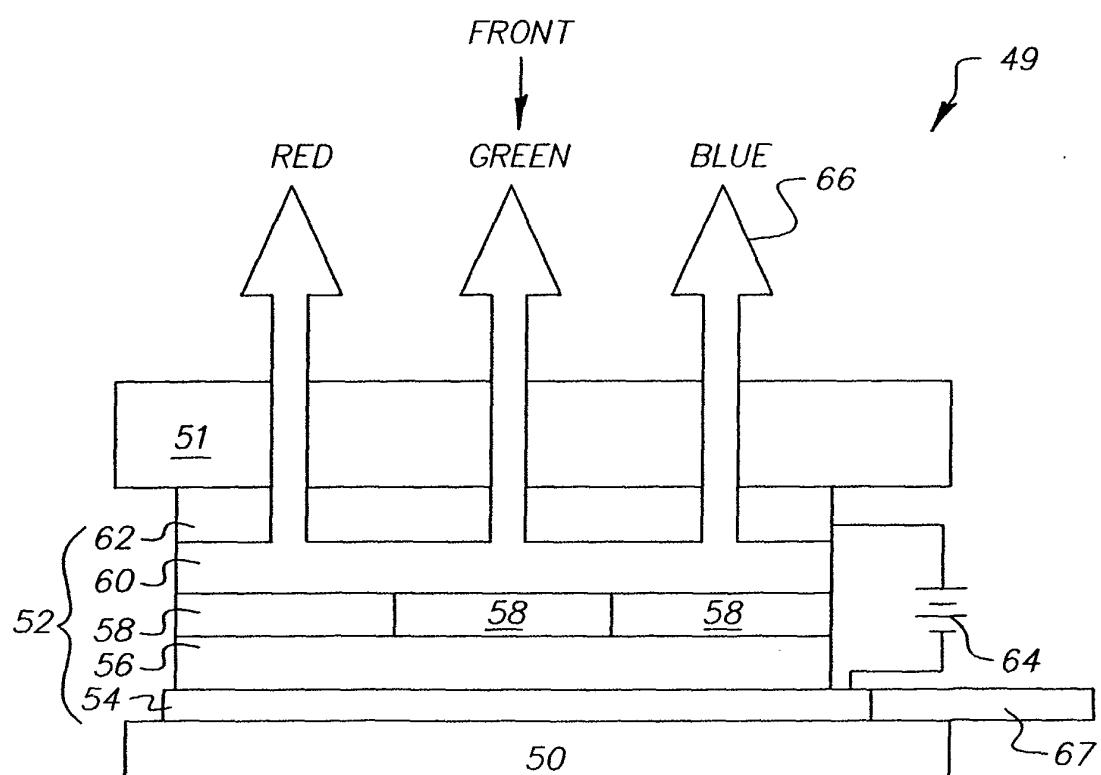

(PRIOR ART)

FIG. 6

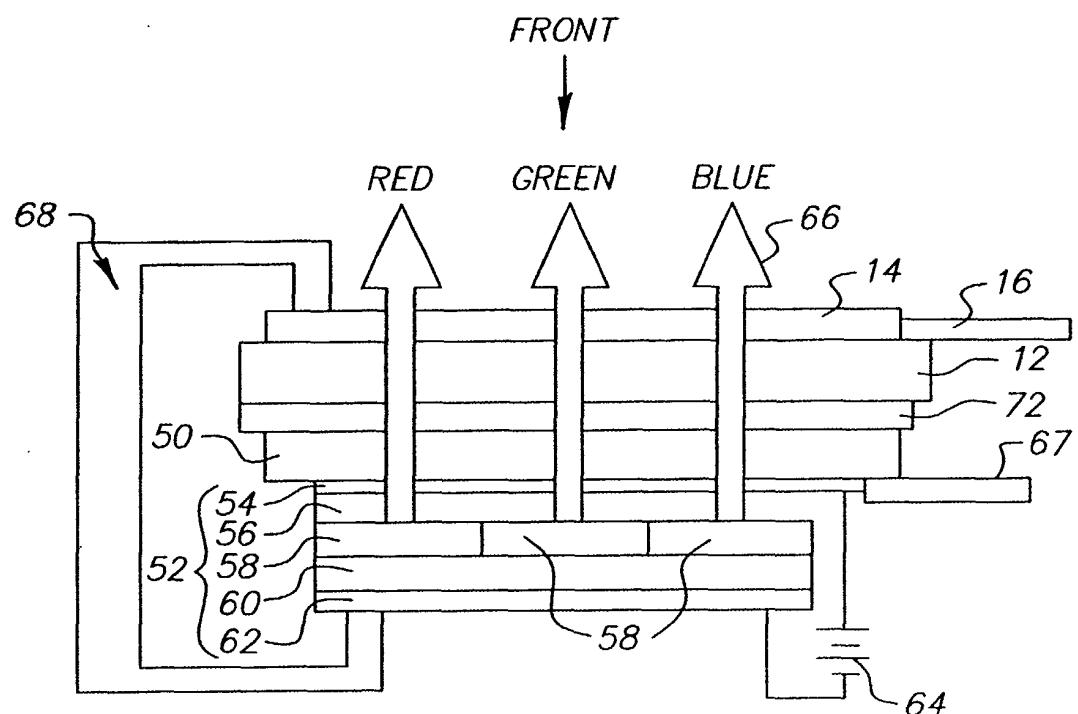

(PRIOR ART)

FIG. 7

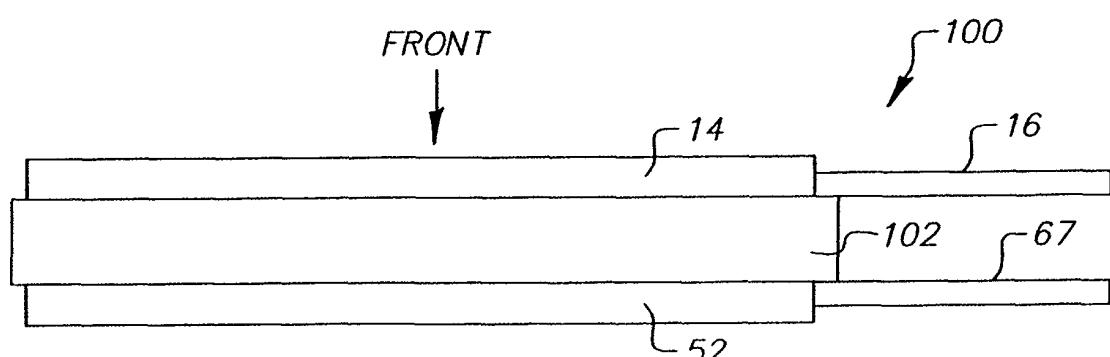


FIG. 8

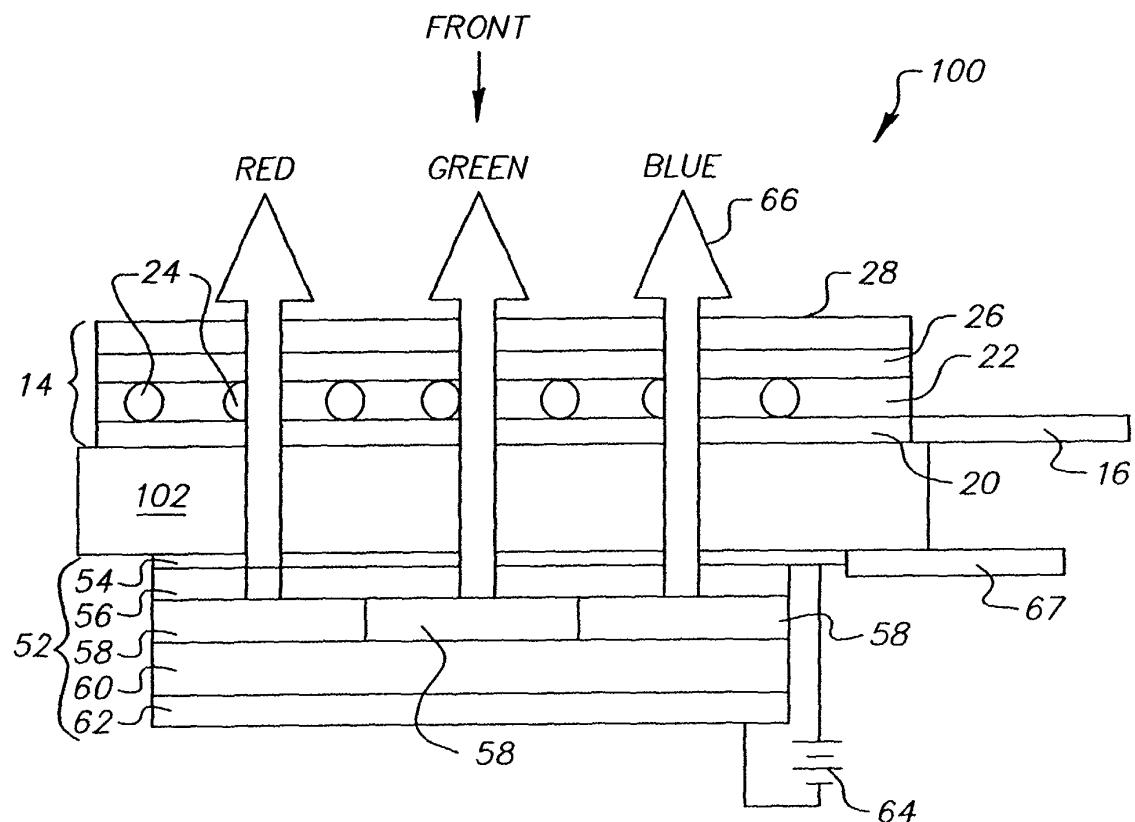


FIG. 9

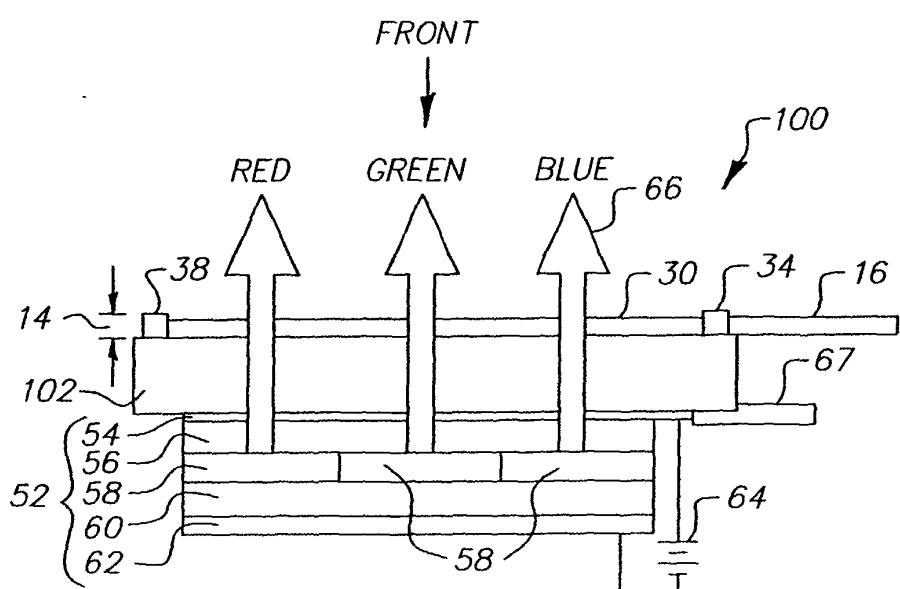


FIG. 10

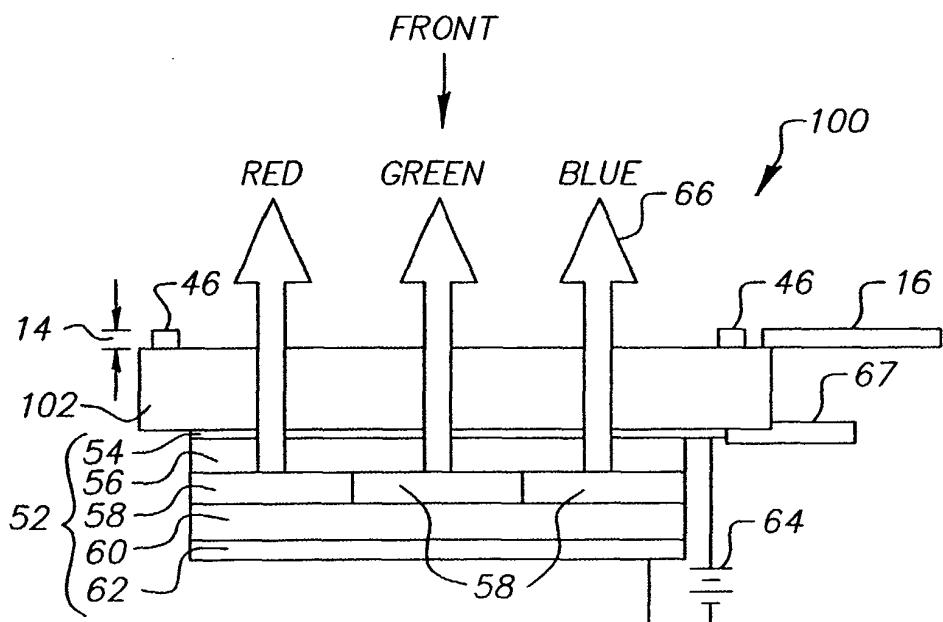


FIG. 11

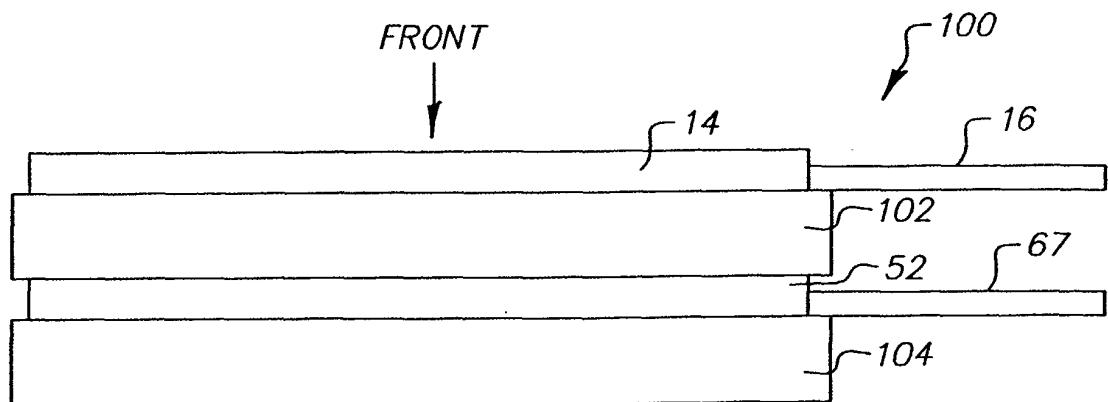
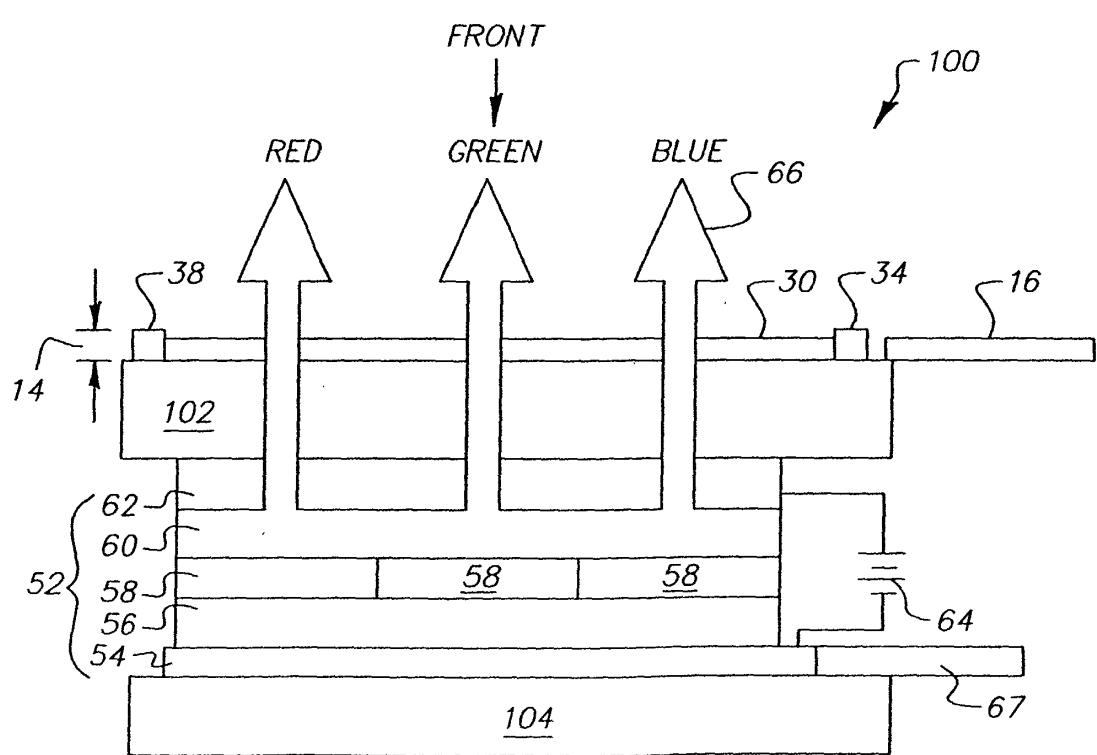
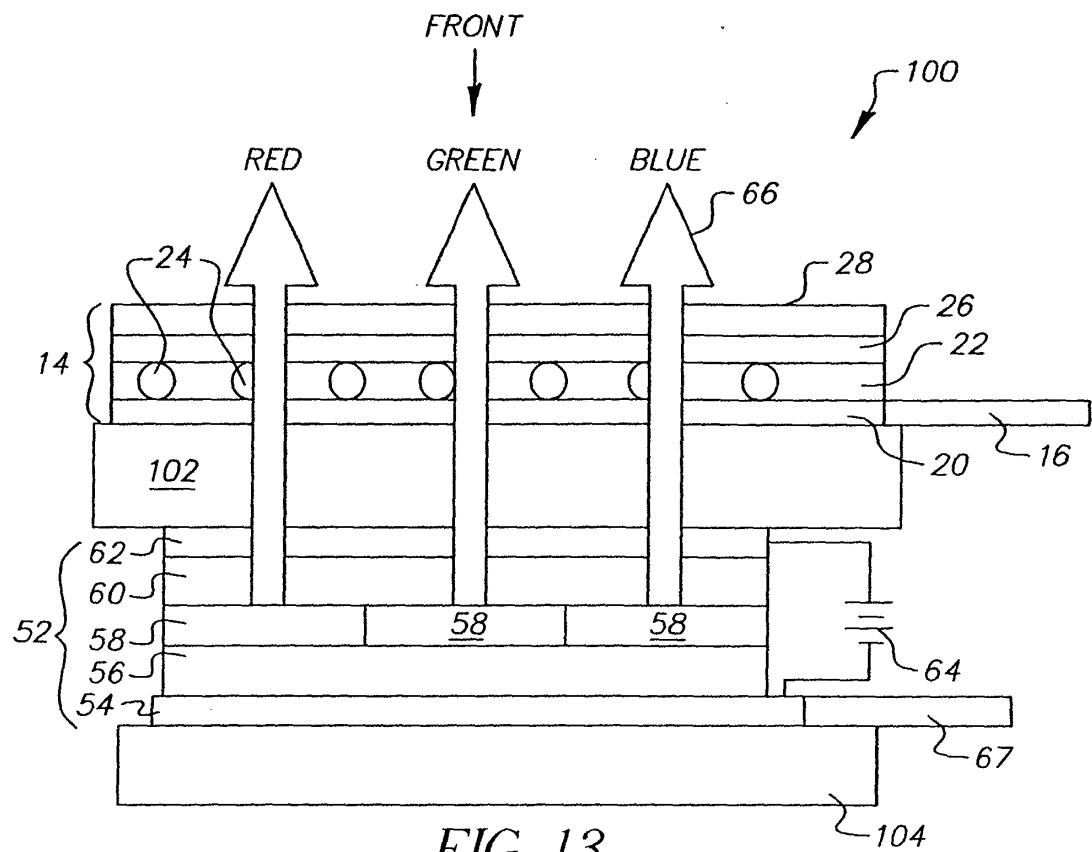


FIG. 12



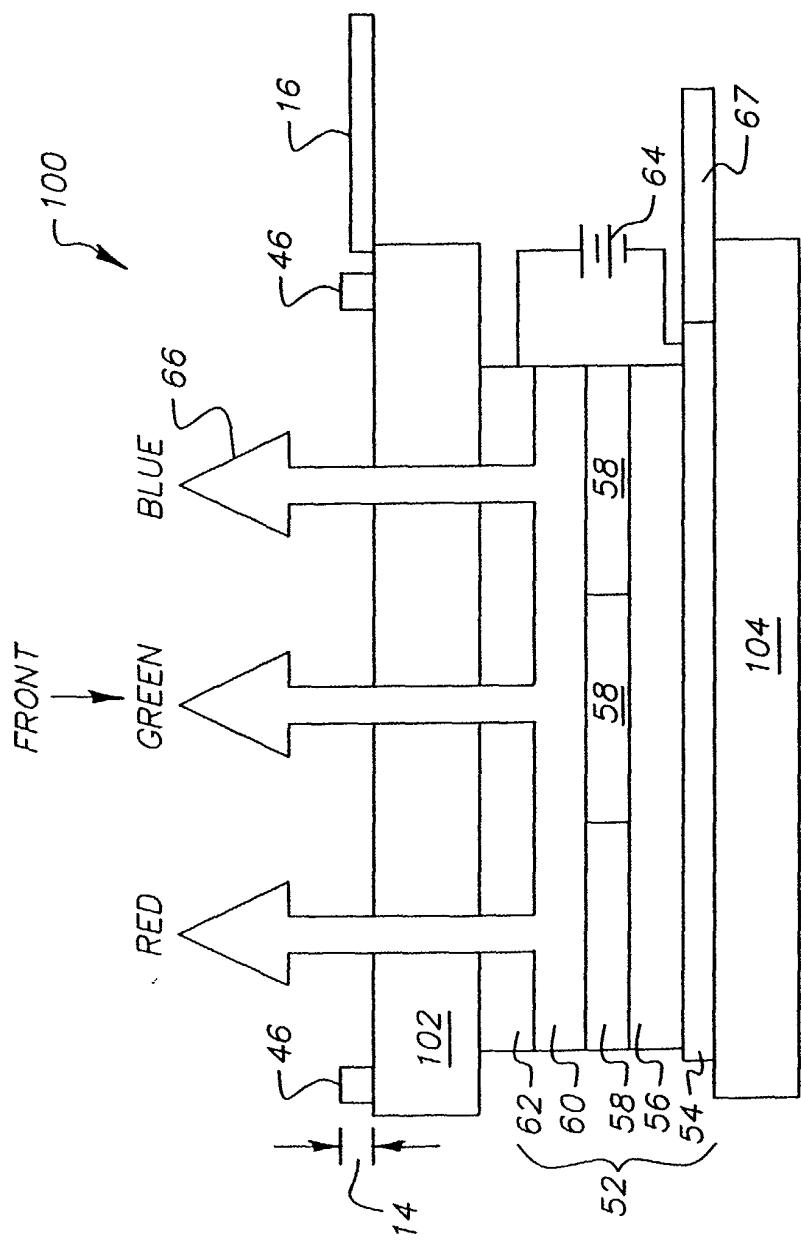


FIG. 15



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 07 6195

DOCUMENTS CONSIDERED TO BE RELEVANT			CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 20, 10 July 2001 (2001-07-10) & JP 2001 076886 A (FUTABA CORP), 23 March 2001 (2001-03-23) * abstract * ---	1,3,8,11	G06K11/12 G06K11/14 G06K11/16
A	US 4 700 025 A (HATAYAMA ET AL.) 13 October 1987 (1987-10-13) * claim 1; figure 1 *	1,4,7-9, 12	
A	WO 01 05205 A (INSTITUTE OF MATERIALS RESEARCH & ENGINEERING ET AL.) 18 January 2001 (2001-01-18) * page 4, line 15 - page 6, line 19; figures 1-3 *	1,3,8,9, 11,16	
A	US 6 104 447 A (FARIS) 15 August 2000 (2000-08-15) * abstract; figures 13B-14A *	1,9	
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 19, 5 June 2001 (2001-06-05) & JP 2001 051608 A (MINOLTA CO LTD), 23 February 2001 (2001-02-23) * abstract *	1	TECHNICAL FIELDS SEARCHED (Int.Cl.7) G06K H05B H01L G02F
The present search report has been drawn up for all claims			
Place of search	Date of completion of the search	Examiner	
BERLIN	3 July 2002	Taylor, P	
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 02 07 6195

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-07-2002

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
JP 2001076886	A	23-03-2001	NONE		
US 4700025	A	13-10-1987	DE	3717325 A1	26-11-1987
WO 0105205	A	18-01-2001	WO	0105205 A1	18-01-2001
			AU	4951099 A	30-01-2001
			EP	1112674 A1	04-07-2001
US 6104447	A	15-08-2000	US	5828427 A	27-10-1998
			US	5537144 A	16-07-1996
			AU	2396895 A	16-11-1995
			EP	0760965 A1	12-03-1997
			JP	9512383 T	09-12-1997
			US	6002518 A	14-12-1999
			WO	9529427 A1	02-11-1995
			US	5801793 A	01-09-1998
			US	5680233 A	21-10-1997
			US	5821989 A	13-10-1998
			US	6188460 B1	13-02-2001
			US	6028649 A	22-02-2000
			US	5502481 A	26-03-1996
			US	6011581 A	04-01-2000
			US	5886816 A	23-03-1999
			US	6034717 A	07-03-2000
			US	6359664 B1	19-03-2002
JP 2001051608	A	23-02-2001	NONE		

专利名称(译)	触摸屏显示器和制造方法		
公开(公告)号	EP1248228A1	公开(公告)日	2002-10-09
申请号	EP2002076195	申请日	2002-03-27
[标]申请(专利权)人(译)	伊斯曼柯达公司		
申请(专利权)人(译)	伊士曼柯达公司		
当前申请(专利权)人(译)	伊士曼柯达公司		
[标]发明人	SIWINSKI MICHAEL J C O EASTMAN KODAK COMPANY KILMER KATHLEEN C O EASTMAN KODAK COMPANY CROPPER ANDRE D C O EASTMAN KODAK COMPANY		
发明人	SIWINSKI, MICHAEL J., C/O EASTMAN KODAK COMPANY KILMER, KATHLEEN, C/O EASTMAN KODAK COMPANY FELDMAN, RODNEY, C/O EASTMAN KODAK COMPANY CROPPER, ANDRE D., C/O EASTMAN KODAK COMPANY		
IPC分类号	H05B33/02 G06F3/033 G06F3/041 G06F3/045 G09F9/00 G09F9/30 H01L27/32 H01L51/50 G06K11/12 G06K11/14 G06K11/16		
CPC分类号	G06F3/041 G06F3/0436 G06F3/045 H01L27/323 H01L2251/5315		
优先权	09/911274 2001-07-23 US 09/826194 2001-04-04 US		
外部链接	Espacenet		

摘要(译)

触摸屏显示器，包括电致发光显示器;触摸屏;和透明薄片，其用作电致发光显示器和触摸屏的元件。

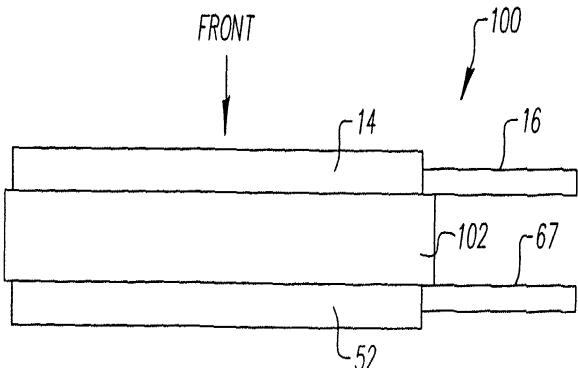


FIG. 8