



US 20140288453A1

(19) **United States**

(12) **Patent Application Publication**

Liu et al.

(10) **Pub. No.: US 2014/0288453 A1**

(43) **Pub. Date: Sep. 25, 2014**

(54) **HEART RATE DETECTION APPARATUS**

Publication Classification

(75) Inventors: **Shuhai Liu**, Beijing (CN); **Feng Xu**, Beijing (CN); **Yanqing Zhang**, Beijing (CN)

(51) **Int. Cl.**
A61B 5/0245 (2006.01)
A61B 5/024 (2006.01)
A61B 5/00 (2006.01)
(52) **U.S. Cl.**
CPC *A61B 5/0245* (2013.01); *A61B 5/6817* (2013.01); *A61B 5/02438* (2013.01)
USPC **600/527**

(73) Assignee: **Beijing Choice Electronic Technology Co., Ltd.**, Beijing (CN)

(21) Appl. No.: **14/354,729**

(22) PCT Filed: **Feb. 6, 2012**

(86) PCT No.: **PCT/CN2012/070887**


§ 371 (c)(1),
(2), (4) Date: **Apr. 28, 2014**

(57) **ABSTRACT**

A heart rate detection apparatus includes a signal acquisition device for acquiring an intra-aural vibration wave signal and converting the intra-aural vibration wave signal into an intra-aural vibration electrical signal; and an arithmetic processing device for processing the intra-aural vibration electrical signal by computing to generate heart rate information. In the prior art, the heart rate detection apparatus cannot accurately and reliably detect the heart rate information due to the weak optical signal detected by a sensor. The heart rate detection apparatus acquires the intra-aural vibration wave signal to obtain the heart rate information, thus enabling the apparatus to accurately and reliably detect heart rate information

(30) **Foreign Application Priority Data**

Oct. 31, 2011 (CN) 201110338093.5

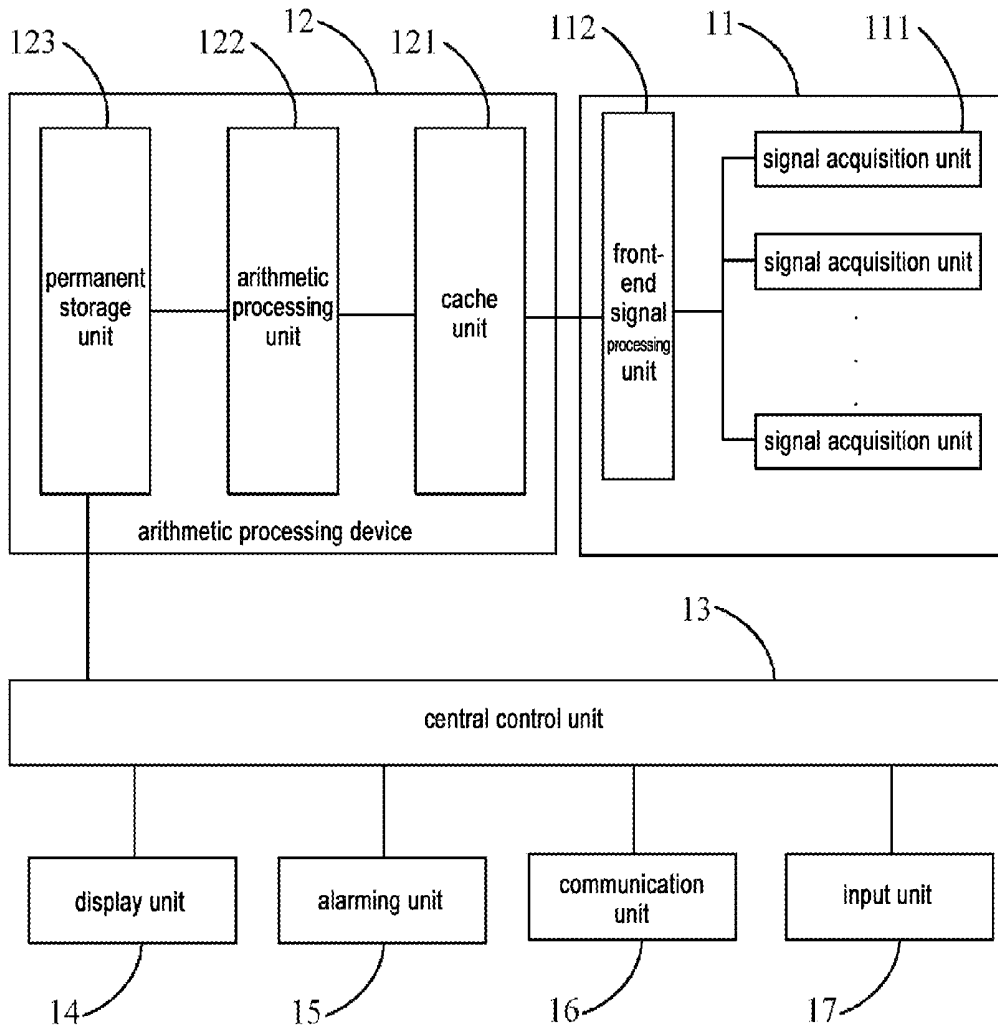

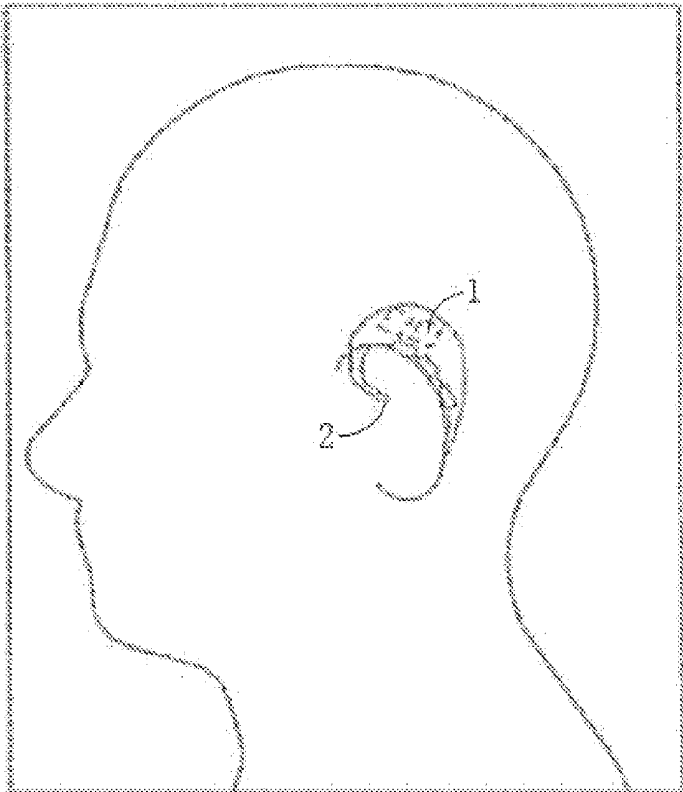


FIG. 1

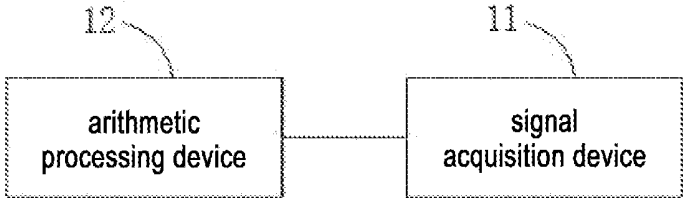


FIG. 2

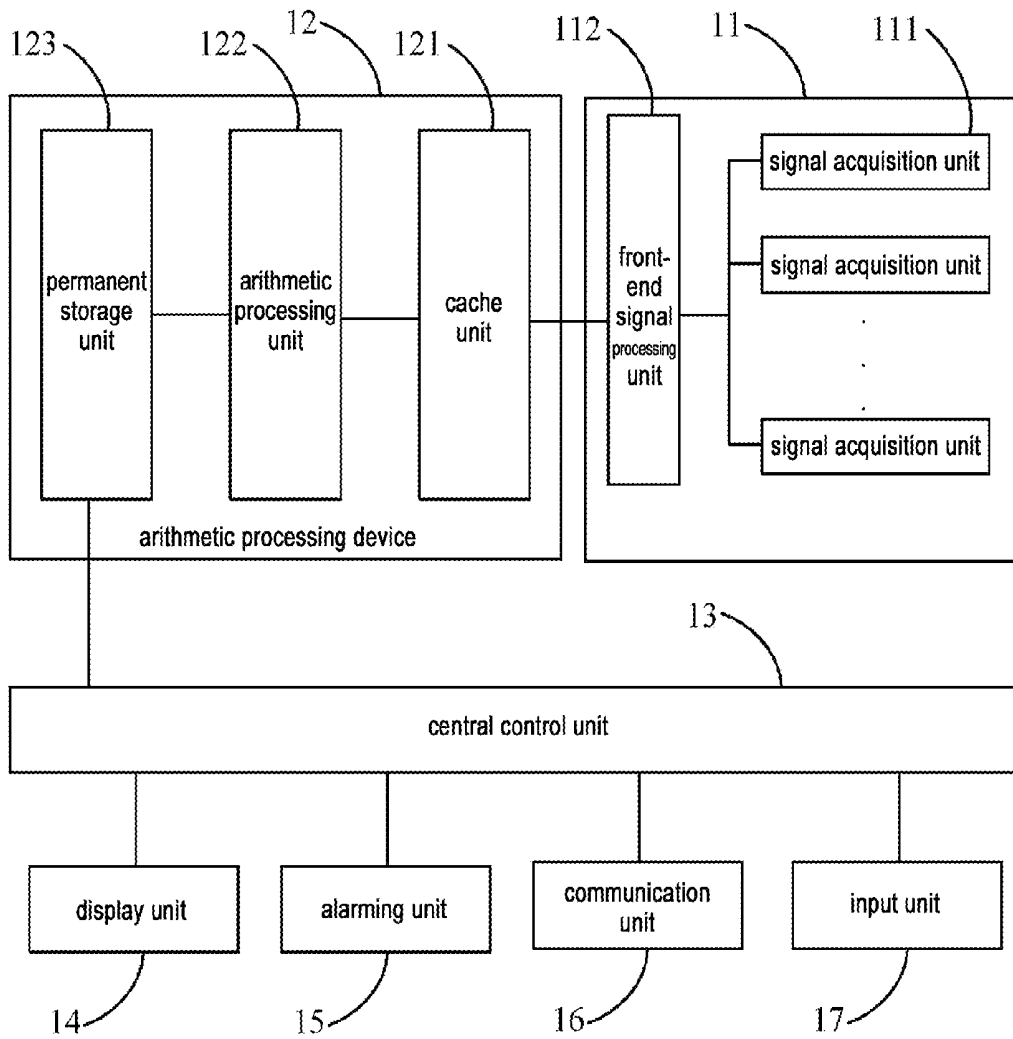


FIG. 3

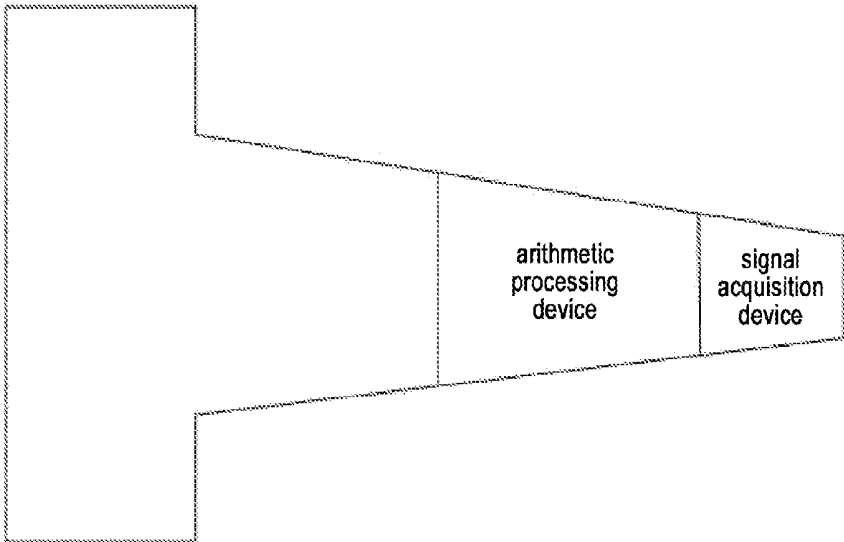


FIG. 4

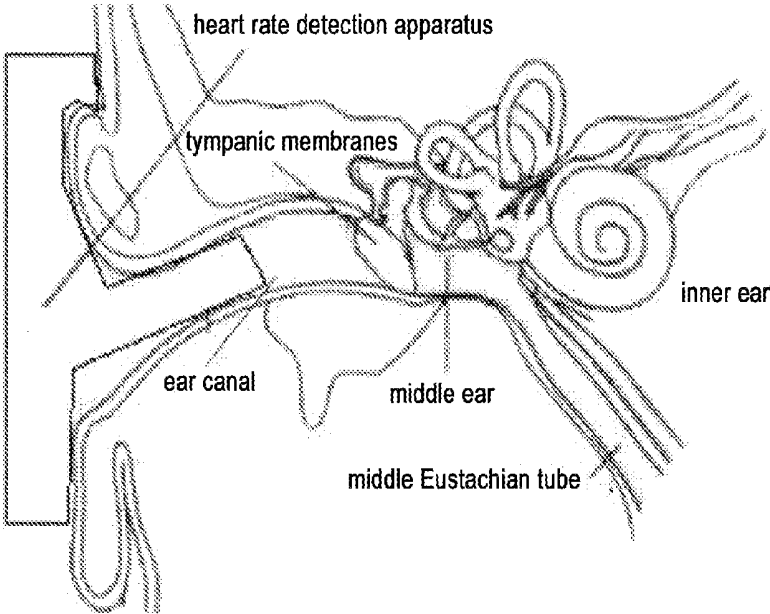


FIG. 5

HEART RATE DETECTION APPARATUS

FIELD OF THE INVENTION

[0001] The present invention relates to a medical apparatus, and particularly to a heart rate detection apparatus.

BACKGROUND OF THE INVENTION

[0002] Generally, heart rate is defined to be the times of heartbeats in one minutes of a person, which is an important medical index reflecting the health condition of the person, and also one important basis for patient care, for directing one to form a good daily routine, and for directing the athletes to train scientifically. The most common apparatus for heart rate detection is stethoscope including many kinds, such as, single head stethoscope, double head stethoscope, triple change stethoscope, stand-type stethoscope, universal stethoscope, and recently appeared electronic stethoscope and the like. In spite of the low price and convenience in use, it's difficult for ordinary persons without professional training to obtain the accurate value of the heart rate using the stethoscope. For example, improper wearing of the stethoscope leads to loose contact between the earplug and the ear canal, such that sounds might leak out, causing a bad auscultation effect; moreover, noise outside might enter to confuse the auscultation effect, such that the value of the heart rate cannot be detected accurately. For another example, if the stethoscope is put in the pocket all the time or not maintained periodically, cotton fiber of the cloth, fiber or dust might block the tube of the stethoscope, which would affect the accuracy of auscultation. Moreover, the accuracy of the stethoscope is so limited that slightly heartbeats or pulse in the irregular heartbeats might be omitted, which also reduces the accuracy.

[0003] Recently, with development of photoelectric technology, Photoplethysmography (PPG) is widely used in heart rate detection. FIG. 1 is a schematic view of the use of heart rate detection apparatus in the prior art. As shown in FIG. 1, the heart rate detection apparatus 1 is worn on the ear 2, and includes a data processing device, a light source disposed behind the ear, and a sensor located in the auricle and opposite to the light source. After the light signal from the light source transmits through the cartilage of the auricle and is received by the sensor, the data processing device processes the light signal detected by the sensor so as to obtain the heart rate information by computing. The above-mentioned heart rate detection apparatus measures the heart rate by using the light transmission PPG, and the user can wear this heart rate detection apparatus for long time. However, as shapes of auricles of people differ from one another, and the relative position between the heart rate detection apparatus and the auricle cannot keep stable when people move, there occur the conditions that the light signal emitted from the light source cannot transmit through the blood vessel in the auricle or other pulsing region, resulting in weak light signals detected by the sensor, such that the heart rate detection apparatus cannot obtain the heart rate information accurately and reliably.

SUMMARY OF THE INVENTION

[0004] The present invention provides a heart rate detection apparatus for detecting the heart rate information accurately and reliably.

[0005] To this end, the present invention provides a heart rate detection apparatus, comprising:

[0006] a signal acquisition device for acquiring intra-aural vibration wave signal, and converting the intra-aural vibration wave signal into intra-aural vibration electrical signal;

[0007] an arithmetic processing device for processing the intra-aural vibration electrical signal by computing to generate the heart rate information.

[0008] Furthermore, the signal acquisition device comprises: a signal acquisition unit and a front-end signal processing unit,

[0009] the signal acquisition unit is used for acquiring the intra-aural vibration wave signal, converting the intra-aural vibration wave signal into the intra-aural vibration electrical signal and outputting the intra-aural vibration electrical signal to the front-end signal processing unit;

[0010] the front-end signal processing unit is used for filtering and amplifying the intra-aural vibration electrical signal, and outputting the filtered and amplified intra-aural vibration electrical signal to the arithmetic processing device.

[0011] Furthermore, the signal acquisition unit is further used for acquiring vibration wave signal outside the ear, converting the vibration wave signal outside the ear into vibration electrical signal outside the ear, and outputting the vibration electrical signal outside the ear to the front-end signal processing unit;

[0012] the front-end signal processing unit is further used for performing compensating and feed-back process to the intra-aural vibration electrical signal according to the vibration electrical signal outside the ear, and outputting the intra-aural vibration electrical signal subjected to the compensating and feed-back process to the arithmetic processing device.

[0013] Furthermore, the arithmetic processing device comprises a cache unit, an arithmetic processing unit and a permanent storage unit,

[0014] the cache unit is used for buffering the intra-aural vibration wave signal;

[0015] the arithmetic processing unit is used for obtaining the intra-aural vibration wave signal from the cache unit, processing the intra-aural vibration wave signal by computing to generate the heart rate information, and outputting the heart rate information to the permanent storage unit;

[0016] the permanent storage unit is used for storing the heart rate information.

[0017] Furthermore, the heart rate detection apparatus further comprises a central control unit and a display unit,

[0018] the central control unit is used for obtaining the heart rate information from the arithmetic processing unit, and outputting the heart rate information to the display unit;

[0019] the display unit is used for displaying the heart rate information.

[0020] Furthermore, the heart rate detection apparatus further comprises an alarming unit connected to the central control unit;

[0021] the central control unit is further used for generating alarm signal according to the heart rate information, and sending the alarm signal to the alarming unit;

[0022] the alarming unit is used for alarming according to the alarm signal.

[0023] Furthermore, the heart rate detection apparatus further comprises a communication unit connected to the central control unit and a communication device,

[0024] the central control unit is further used for outputting the heart rate information to the communication unit;

[0025] the communication unit is used for outputting the heart rate information to the communication device.

[0026] Furthermore, the heart rate detection apparatus further comprises an input unit connected to the central control unit,

[0027] the input unit is used for sending operation instruction to the central control unit;

[0028] the central control unit is further used for carrying out the operations instructed by the operation instruction according to the operation instruction.

[0029] Furthermore, the central control unit is further used for obtaining standard heart rate information through the communication unit, and adjusting the heart rate information according to the standard heart rate information.

[0030] Furthermore, the heart rate information comprises value of heart rate, status value of the heart rate, and/or status value of heartbeat.

[0031] Furthermore, the signal acquisition unit includes one or more acoustical-electrical transducers, and the probe direction of each acoustical-electrical transducer is adjustable in a predetermined angle range.

[0032] Furthermore, the arithmetic processing unit is specifically used for computing the value of heart rate according to the number of pulses in the intra-aural vibration electrical signal, and the status value of the heart rate and/or the status value of heartbeat according to the intensity of the intra-aural vibration electrical signal.

[0033] Furthermore, the status value of the heart rate or the status value of heartbeat is at a level among several predetermined levels.

[0034] Furthermore, the alarm signal comprises sound signal, optical signal, vibration signal or arbitrary combination thereof.

[0035] Furthermore, On and Off, volume up and down and/or strength of vibration of the alarming unit are controlled by the central control unit.

[0036] Furthermore, the heart rate detection apparatus adjusts and learns the heart rate information on the basis of comparison with the standard heart rate information.

[0037] Furthermore, the input unit controls On and Off of operation mode of the heart rate detection apparatus, the display unit, the alarming unit, and the communication unit.

[0038] Furthermore, a user can control the heart rate detection apparatus by detection control software in the communication device.

[0039] Furthermore, the heart rate detection apparatus is an earmuff-type heart rate detection apparatus, a supra aural-type heart rate detection apparatus, an earplug-type heart rate detection apparatus, or an in-the-canal-type heart rate detection apparatus.

[0040] The above technical solutions have the following advantages: the present invention provides a heart rate detection apparatus comprising a signal acquisition device and an arithmetic processing device. The signal acquisition device is used for acquiring intra-aural vibration wave signal and converting the intra-aural vibration wave signal into intra-aural

vibration electrical signal. The arithmetic processing device is used for processing the electrical signal of vibration in the ear by computing to generate the heart rate information. Unlike the prior art solutions wherein the heart rate information is obtained by acquiring the related signal at the auricle, the heart rate detection apparatus provided by the present invention obtains the heart rate information by acquiring the intra-aural vibration wave signal. As a result, using the heart rate detection apparatus according to the present invention to detect heart rate can avoid the problem that the heart rate cannot be detected accurately and reliably as the light signal detected by the sensor is too weak in the prior art. In other words, the heart rate detection apparatus according to the present invention can detect the heart rate accurately and reliably.

BRIEF DESCRIPTION OF THE DRAWINGS

[0041] FIG. 1 is a schematic view of the use of the heart rate detection apparatus in prior art;

[0042] FIG. 2 is a configuration diagram of the heart rate detection apparatus according to the first embodiment of the present invention;

[0043] FIG. 3 is a configuration diagram of the heart rate detection apparatus according to the second embodiment of the present invention;

[0044] FIG. 4 is a schematic diagram of the use of the heart rate detection apparatus according to the present invention; and

[0045] FIG. 5 is a configuration diagram of the heart rate detection apparatus shown in FIG. 4.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0046] The heart rate detection apparatus according to the present invention will be described in detail with reference to the accompanied drawings for better understanding of those skilled in the art.

[0047] FIG. 2 is a configuration diagram of the heart rate detection apparatus according to the first embodiment of the present invention. As shown in FIG. 2, the heart rate detection apparatus includes a signal acquisition device 11 and an arithmetic processing device 12.

[0048] The signal acquisition device 11 is used for acquiring intra-aural vibration wave signal, and converting the vibration wave signal into intra-aural vibration electrical signal.

[0049] Inside of the ear is part with maximum blood vessels in all of the human organs, and blood vessels inside the ear lead to the brain where blood vessels are more intensive. There is tympanic membrane located in the tympanic cavity with lots of blood vessels and arterial blood inside the ear. Blood flows one-way under the effect of auricular systole and dilatation, during which the vibration wave signal caused by blood flowing through the inside of the ear is stronger, and the vibration wave signal caused by blood inside the ear is conducted into the ear canal by the tympanic membrane, such that vibration wave signal conducted by the tympanic membrane can reflect the status of heart rate truly and reliably. Furthermore, vibration wave signal caused by blood inside the ear can be also conducted into the ear canal by bones and/or tissues which are the cartilage inside the ear and bones and/or tissues which are not the cartilage inside the ear. In each embodiments of the present invention, intra-aural vibra-

tion wave signal mainly includes vibration wave signal caused by blood flowing inside the ear and conducted into the ear canal by the tympanic membrane, and vibration wave signal conducted into the ear canal by bones and/or tissues which are the cartilage inside the ear and bones and/or by tissues which are not the cartilage inside the ear. The signal acquisition device **11** acquires the above-mentioned intra-aural vibration wave signal to detect the heart rate information. Besides, the signal acquisition device **11** converts the intra-aural vibration electrical signal into digitized intra-aural vibration electrical signal, such that the arithmetic processing device **12** can process the intra-aural vibration electrical signal. Alternatively, the arithmetic processing device **12** can convert the intra-aural vibration electrical signal into digitized intra-aural vibration electrical signal and then carry out subsequent processing to the intra-aural vibration electrical signal.

[0050] The arithmetic processing device **12** is used for computing and processing the intra-aural vibration electrical signal to generate the heart rate information. In the present embodiment, the heart rate information may comprise value of heart rate, status value of the heart rate, and/or status value of heartbeat. Correspondingly, the processing procedures of the arithmetic processing device **12** computing and processing the intra-aural vibration electrical signal specifically comprises: the arithmetic processing device **12** computes the value of heart rate according to the pulses in the intra-aural vibration electrical signal, the status value of the heart rate, and/or status value of heartbeat according to the intensity of the intra-aural vibration electrical signal.

[0051] The heart rate detection apparatus provided by the present embodiment comprises a signal acquisition device and an arithmetic processing device.

[0052] The signal acquisition device is used for acquiring intra-aural vibration wave signal and converting the intra-aural vibration wave signal into intra-aural vibration electrical signal. The arithmetic processing device is used for computing and processing the electrical signal of vibration in the ear to generate the heart rate information. The heart rate detection apparatus of the present embodiment obtains the heart rate information by acquiring the intra-aural vibration wave signal, thus the heart rate can be detected accurately and reliably, and the problem that the heart rate information cannot be detected accurately and reliably as the light signal detected by the sensor is too weak in the prior art can be avoided.

[0053] FIG. 3 is a configuration diagram of the heart rate detection apparatus according to the second embodiment of the present invention. As shown in FIG. 3, the heart rate detection of the present embodiment is further configured on the basis of the first embodiment. The second embodiment is disclosed here as an improvement to the first embodiment, and the improvement made to the first embodiment is an optional configuration provided or installed in the heart rate detection apparatus of the first embodiment. The second embodiment can be also configured in the heart rate detection apparatus of the prior art to form new embodiment.

[0054] In the second embodiment, the signal acquisition device comprises a signal acquisition unit **111** and a front-end signal processing unit **112**.

[0055] In the present embodiment and the first embodiment, the signal acquisition unit **111** is used for acquiring the intra-aural vibration wave signal, converting the intra-aural vibration wave signal into intra-aural vibration electrical sig-

nal and outputting the intra-aural vibration electrical signal to the front-end signal processing unit **112**. There could be one or more signal acquisition units **111**, and in the present embodiment, description will be made by referring to more than one signal acquisition units. The signal acquisition unit **111** of the present embodiment may be an acoustical-electrical transducer which is a sensor that can convert sound vibration wave into electrical signal. The probe direction of each acoustical-electrical transducer is adjustable in a predetermined angle range, thus in practical use, the probe direction of the acoustical-electrical transducer can be adjusted to align with the tympanic membrane, such that the vibration wave conducted by the tympanic membrane can be acquired thoroughly, precisely, efficiently and effectively when the heart rate detection apparatus is worn on the ear. Specifically, the signal acquisition unit **111** converts the intra-aural vibration electrical signal into digitized intra-aural vibration electrical signal. The front-end signal processing unit **112** is used for filtering and amplifying the intra-aural vibration electrical signal, and outputting the filtered and amplified intra-aural vibration electrical signal to the arithmetic processing device **12**. Furthermore, the signal acquisition unit **111** is further used for acquiring vibration wave signal outside the ear, converting the vibration wave signal outside the ear into vibration electrical signal outside the ear, and output the vibration electrical signal outside the ear to the front-end signal processing unit **112**, wherein, the vibration wave signal outside the ear comprises vibration wave signal produced by vessel in the auricle, signal of any object not to be detected outside the ear and all the signals that may interference the detection of the present invention; in this case, the front-end signal processing unit **112** is further used for performing compensating and feed-back process to the intra-aural vibration electrical signal according to the vibration electrical signal outside the ear, and outputting the intra-aural vibration electrical signal after the compensating and feedback process to the arithmetic processing device **12**. More than one signal acquisition units **111** can be disposed on the surface of a hemisphere or an approximate hemisphere, and may be disposed on the spherical surface out of the hemisphere as desired, such that some of a signal acquisition units **111** are used for acquiring signals conducted by the tympanic membrane, and other signal acquisition units **111** face towards the external ear canal to acquire vibration wave signals outside the ear. At the same time, the front-end signal processing unit **112** can perform compensating and feed-back processing to the intra-aural vibration electrical signal according to the vibration electrical signal outside the ear to improve the detection precision. Wherein, the spherical surface on which the signal acquisition units **111** are disposed may be perfect spherical surface, or irregular spherical surface tilting directly towards the direction of the tympanic membrane. Furthermore, the spherical surface on which the signal acquisition units **111** are disposed may be other forms of spherical surface, such as any spherical surface designed according to ergonomic, made of different materials, with different shape and size, thus the user can freely chose the spherical surface he/she feels comfortable, i.e. selecting different signal acquisition unit **111**. Besides, signal acquisition units **111** with different accuracy can be provided in the signal acquisition device **11** to meet requirements of different users or occasions.

[0056] Furthermore, in the present embodiment and the first embodiment, the arithmetic processing device **12** specifically comprises: a cache unit **121**, an arithmetic process-

ing unit **122** and a permanent storage unit **123**. The cache unit **121** is used for buffering the intra-aural vibration wave signal; the arithmetic processing unit **122** is used for obtaining the intra-aural vibration signal from the cache unit **121**, processing the intra-aural vibration wave signal to generate the heart rate information, and outputting the heart rate information to the permanent storage unit **123**; the permanent storage unit **123** is used for storing the heart rate information. The heart rate information comprises value of heart rate, status value of the heart rate, and/or status value of heartbeat. Correspondingly, the specific procedure that the arithmetic processing unit **122** processes the intra-aural vibration electrical signal comprises: the arithmetic processing unit **122** computes the value of heart rate according to the pulses in the intra-aural vibration electrical signal, the status value of the heart rate, and/or status value of heartbeat according to the intensity of the intra-aural vibration electrical signal. Wherein, the value of heart rate, status value of the heart rate, and/or status value of heartbeat may be classified into several predetermined levels. For example, the status value of heartbeat may be classified into three levels including healthy, sub-healthy and abnormal to provide basis and reference for diagnosing, monitoring and treating symptom such as arrhythmia; status value of the heart rate may correspond to five heart healthy levels ranging from A to E, wherein, level A stands for tachycardia, level E stands for bradycardia, and other levels have like meanings between level A and level E. Furthermore, the status value of the heartbeat may be re-classified and re-defined according to other standards, and the status value of the heart may be re-classified and re-defined into different levels according to other cardiac health indicators or pulsation indicators, not limited to the kinds and definitions proposed herein. Alternatively, the converting of intra-aural vibration electrical signal into digitized intra-aural vibration electrical signal may be carried out by the cache unit **121** in the arithmetic processing device **12**.

[0057] Furthermore, in the present embodiment and the first embodiment, the heart rate detection apparatus may further comprise: a central control unit **13** and a display unit **14**. The central control unit **13** is used for obtaining the heart rate information from the arithmetic processing unit **12**, and outputting the heart rate information to the display unit **14**. Specifically, the central control unit **13** may obtain the heart rate information from the permanent storage unit **123** of the arithmetic processing device **12**. The display unit **14** is used for displaying the heart rate information. The display unit **14** may be Liquid Crystal Display, Light Emitting Diode (LED) display or Organic Light-Emitting Diode (OLED) display. Functional circuit controlling on or off of the backlight may be provided in the display unit **14**; the central control unit **13** may sent backlight-on instruction to the functional circuit in the display unit **14** to turn on the backlight according to the backlight-on instruction, or the central control unit **13** may sent backlight-off instruction to the functional circuit in the display unit **14** to turn off the backlight according to the backlight-on instruction.

[0058] Furthermore, in the present embodiment or the first embodiment, the heart rate detection apparatus may further comprise an alarming unit **15** connected with the central controlling unit **13**. The central control unit **13** is further used for generating alarm signal according to the heart rate information, and sending the alarm signal to the alarming unit **15**. For example, a safe range of the heart rate information can be predetermined, and then if the central control unit **13** deter-

mines that the heart rate information is out of the safe range, the alarm signal will be generated. Wherein, the alarm signal may comprise sound signal, light signal, vibration signal or arbitrary combination thereof. The alarming unit **15** is used for alarming according to the alarm signal. Furthermore, the central control unit **13** may send alarm-on instruction to control turning-on of the alarming unit **15**, alarm-off instruction to control turning-off of the alarming unit **15**, alarm-volume instruction to control the volume up or down, or vibration-strength instruction to control the vibration strength. Wherein, the alarm-volume instruction may control muting of the alarming unit **15**. In conclusion, on and off, volume up and down and/or strength of vibration of the alarming unit **15** are controlled by the central control unit **13**.

[0059] Furthermore, in the present embodiment or the first embodiment, the heart rate detection apparatus may further comprise a communication unit **16** connected with the central control unit **13** and a communication device. The central control unit **13** is further used for outputting the heart rate information to the communication unit **16**; the communication unit **16** is used for outputting the heart rate information to the communication device. In the present embodiment, the communication unit **16** may be a wired communication unit, a wireless communication unit or the combination thereof; the communication device may include mobile communication device such as mobile phone, MP3, MP4 or PDA. The central control unit **13** transmits the heart rate information to the communication device through the communication unit **16**, then the communication device displays the heart rate information, uploads the heart rate information to the Internet, sends the heart rate information to the doctor's e-mail box, performs data analysis of the heart rate information and other operation.

[0060] Furthermore, in the present embodiment or the first embodiment, the heart rate detection apparatus has the functions of self-learning and self-correcting implemented by the central control unit **13**, the software carrying out these functions is written in for example the permanent storage unit **123**. The heart rate detection apparatus can correct and learn the heart rate information on the basis of comparison with the standard heart rate information. Specifically, by the self-learning and self-correcting functions, the user can obtain the standard heart rate information at the hospital and the like when his/her heart rate is stable, and then the user may use the heart rate detection apparatus of the present invention to detect the heart rate information and store it into the permanent storage unit **123**. At the same time, via the communication unit **16**, a precise heart rate testing instrument is connected with the central control unit **13** which may be further used for obtaining the standard heart rate information, according to which the heart rate information is corrected (for example, the heart rate information may be corrected by filtering values too high or too low).

[0061] Furthermore, in the present embodiment or the first embodiment, the heart rate detection apparatus further comprises an input unit **17** connected with the central control unit **13**. The input unit **17** is used for sending operation instruction to the central control unit **13**; the central control unit **13** is further used for carrying out the operation instructed by the operation instruction according to the operation instruction. The operation instruction sent by the input unit **17** may include switching instruction that controls on and off of the heart rate detection apparatus, backlight-on instruction or backlight-off instruction that controls the backlight of the

display unit, alarm-on instruction or alarm-off instruction that controls the alarming function of the alarming unit, alarm-volume instruction that controls the volume up or down of the alarming unit **15**, or vibration-strength instruction that controls the vibration strength of the alarming unit **15**, or operation mode switching instruction that controls the operation mode of the communication unit **16**, wherein, the operation mode switching instruction can control the communication unit **16** to switch between wireless communication mode and wire communication mode. The input unit **17** may be provided with a control panel, and by operating the control panel the user may send the above-mentioned operation instructions to the central control unit **13**, wherein, the control panel may include touch screen or panel with several buttons or knobs. Otherwise, the input unit **17** may further be provided with a speech control circuit, by which the user may send the above-mentioned operation instructions to the central control unit **13** in a manner of speech control.

[0062] In particular, in each embodiment of the present invention, when the communication device communicatively (wirelessly or by wires) connected to the communication unit **16** has detection control software, the heart rate detection apparatus of the present embodiment may not include the input unit **17**. At the same time, the user may control the heart rate detection apparatus by the detection control software in the communication device. Specifically, the user can send the operation instructions to the central control unit **13** via the detection control software in the communication device. The above-mentioned detection control software can be readily implemented by those skilled in the art or programmer without creative work, for example, application software for various applications running in the recently fashionable IPHONE.

[0063] In each embodiment of the present invention, the heart rate detection apparatus is worn on the ear in use, such that the heart rate detection apparatus may be an earmuff-type heart rate detection apparatus, a supra aural-type heart rate detection apparatus, an earplug-type heart rate detection apparatus, or an in-the-canal-type heart rate detection apparatus. Wherein, the appearance of the earmuff-type heart rate detection apparatus may be the same as that of the earmuff-type earphone, and the appearance of the supra aural-type heart rate detection apparatus may be the same as that of the supra aural-type earphone, the appearance of the earplug-type heart rate detection apparatus may be the same as that of the earplug-type earphone, and the appearance of the in-the-canal-type heart rate detection apparatus may be the same as that of the in-the-canal-type earphone. The following description refers to the in-the-canal-type heart rate detection apparatus. FIG. 4 is a schematic structural diagram of heart rate detection apparatus provided by the present invention in use, and FIG. 5 is a configuration diagram of the heart rate detection apparatus shown in FIG. 4. As shown in FIG. 4 and FIG. 5, the heart rate detection apparatus is an in-the-canal-type heart rate detection apparatus. The signal acquisition device is disposed at the most front-end end of the heart rate detection apparatus, the arithmetic processing device is disposed at the central portion of the heart rate detection apparatus, and other components of the heart rate detection apparatus are disposed at other positions. When the heart rate detection apparatus is worn on the ear, the signal processing device is in the canal, and aligning with the tympanic membrane, such that the detection of the heart rate information can be carried out.

[0064] The heart rate detection apparatus provided by the present embodiment comprises a signal acquisition device and an arithmetic processing device. The signal acquisition device is used for acquiring intra-aural vibration wave signal and converting the intra-aural vibration wave signal into intra-aural vibration electrical signal. The arithmetic processing device is used for computing and processing the electrical signal of vibration in the ear to generate the heart rate information. The heart rate detection apparatus provided by the present embodiment obtains the heart rate information by acquiring the intra-aural vibration wave signal, thus avoiding the problem in the prior art that the heart rate cannot be detected accurately and reliably as the light signal detected by the sensor is too weak. Thus the heart rate detection apparatus provided by the present invention can detect the heart rate accurately and reliably.

[0065] The heart rate detection apparatus of the present embodiment obtains the heart rate information by acquiring the intra-aural vibration wave, thus avoiding the influence of "stethoscope effect" and "bone conduction phenomenon" on the detection process of the heart rate information and the accuracy of the detected heart rate information. The heart rate detection apparatus may be an earmuff-type heart rate detection apparatus, a supra aural-type heart rate detection apparatus, an earplug-type heart rate detection apparatus, or an in-the-canal-type heart rate detection apparatus, such that the user may wear the heart rate detection apparatus in the canal or at the edge of the ear continuously without feeling uncomfortable. The heart rate detection apparatus has low cost and simple structure, and is easy to repair with low maintenance cost when it malfunctions. The heart rate detection apparatus is easy to operate without requirements of professional medical knowledge during the operating process.

[0066] Although the present invention has been disclosed with reference to the above preferred embodiments, the present invention is not limited thereto.

[0067] Various modifications and improvements to the present invention can be made by ordinary skilled persons in the art without departing from the concept and substance of the present invention, and these modifications and improvements fall within the protection scope of the present invention.

1. A heart rate detection apparatus, comprising:
 - a signal acquisition device for acquiring an intra-aural vibration wave signal, and converting the intra-aural vibration wave signal into an intra-aural vibration electrical signal; and
 - an arithmetic processing device for processing the intra-aural vibration electrical signal by computing to generate heart rate information.
2. The heart rate detection apparatus of claim 1, wherein the signal acquisition device comprises: a signal acquisition unit and a front-end signal processing unit;
 - the signal acquisition unit is used for acquiring the intra-aural vibration wave signal, converting the intra-aural vibration wave signal into the intra-aural vibration electrical signal and outputting the intra-aural vibration electrical signal to the front-end signal processing unit; and
 - the front-end signal processing unit is used for filtering and amplifying the intra-aural vibration electrical signal, and outputting the filtered and amplified intra-aural vibration electrical signal to the arithmetic processing device.

3. The heart rate detection apparatus of claim 2, wherein the signal acquisition unit is further used for acquiring a vibration wave signal outside the ear, converting the vibration wave signal outside the ear into a vibration electrical signal outside the ear, and outputting the vibration electrical signal outside the ear to the front-end signal processing unit; and

the front-end signal processing unit is further used for performing compensating and feed-back process to the intra-aural vibration electrical signal according to the vibration electrical signal outside the ear, and outputting the intra-aural vibration electrical signal subjected to the compensating and feed-back process to the arithmetic processing device.

4. The heart rate detection apparatus of claim 1, wherein the arithmetic processing device comprises a cache unit, an arithmetic processing unit and a permanent storage unit;

the cache unit is used for buffering the intra-aural vibration wave signal;

the arithmetic processing unit is used for obtaining the intra-aural vibration wave signal from the cache unit, processing the intra-aural vibration wave signal by computing to generate the heart rate information, and outputting the heart rate information to the permanent storage unit; and

the permanent storage unit is used for storing the heart rate information.

5. The heart rate detection apparatus of claim 1, further comprising a central control unit and a display unit, wherein the central control unit is used for obtaining the heart rate information from the arithmetic processing unit, and outputting the heart rate information to the display unit; and

the display unit is used for displaying the heart rate information.

6. The heart rate detection apparatus of claim 5, further comprising an alarming unit connected to the central control unit; wherein,

the central control unit is further used for generating an alarm signal according to the heart rate information, and sending the alarm signal to the alarming unit; and

the alarming unit is used for alarming according to the alarm signal.

7. The heart rate detection apparatus of claim 1, further comprising a communication unit connected to the central control unit and a communication device, wherein,

the central control unit is further used for outputting the heart rate information to the communication unit; and the communication unit is used for outputting the heart rate information to the communication device.

8. The heart rate detection apparatus of claim 1, further comprising an input unit connected to the central control unit, wherein,

the input unit is used for sending an operation instruction to the central control unit; and

the central control unit is further used for carrying out an operation instructed by the operation instruction according to the operation instruction.

9. The heart rate detection apparatus of claim 7, wherein the central control unit is further used for obtaining standard heart rate information through the communication unit, and adjusting the heart rate information according to the standard heart rate information.

10. The heart rate detection apparatus of claim 1, wherein, the heart rate information comprises value of heart rate, status value of the heart rate, and/or status value of heartbeat.

11. The heart rate detection apparatus of claim 1, wherein the signal acquisition unit includes one or more acoustical-electrical transducers, and a probe direction of each acoustical-electrical transducer is adjustable in a predetermined angle range.

12. The heart rate detection apparatus of claim 1, wherein the arithmetic processing unit is used for computing the value of heart rate according to the number of pulses in the intra-aural vibration electrical signal, and computing the status value of the heart rate and/or the status value of heartbeat according to the intensity of the intra-aural vibration electrical signal.

13. The heart rate detection apparatus of claim 12, wherein the status value of the heart rate or the status value of heartbeat is at a level among several predetermined levels.

14. The heart rate detection apparatus of claim 1, wherein the alarm signal comprises a sound signal, an optical signal, a vibration signal or combinations thereof.

15. The heart rate detection apparatus of claim 14, wherein On and Off, volume up and volume down, and/or strength of vibration of the alarming unit are controlled by the central control unit.

16. The heart rate detection apparatus of claim 1, wherein the heart rate detection apparatus adjusts and learns the heart rate information on the basis of a comparison with the standard heart rate information.

17. The heart rate detection apparatus of claim 1, wherein the input unit controls On and Off of operation mode of the heart rate detection apparatus, the display unit, the alarming unit, and the communication unit.

18. The heart rate detection apparatus of claim 1, wherein a user can control the heart rate detection apparatus by detection control software in the communication device.

19. The heart rate detection apparatus of claim 1, wherein the heart rate detection apparatus is an earmuff-type heart rate detection apparatus, a supra aural-type heart rate detection apparatus, an earplug-type heart rate detection apparatus, or an in-the-canal-type heart rate detection apparatus.

* * * * *

专利名称(译)	心率检测装置		
公开(公告)号	US20140288453A1	公开(公告)日	2014-09-25
申请号	US14/354729	申请日	2012-02-06
[标]申请(专利权)人(译)	LIU SHUHAI 徐峰 张延青		
申请(专利权)人(译)	刘, 舒海 徐, 冯 张, 延庆		
当前申请(专利权)人(译)	北京思电子技术有限公司.		
[标]发明人	LIU SHUHAI XU FENG ZHANG YANQING		
发明人	LIU, SHUHAI XU, FENG ZHANG, YANQING		
IPC分类号	A61B5/0245 A61B5/024 A61B5/00		
CPC分类号	A61B5/0245 A61B5/02438 A61B5/6817 A61B5/021 A61B5/02125 A61B5/0285 A61B5/0456 A61B5/7221 A61B5/7275 A61B7/04 A61B2562/0204		
优先权	201110338093.5 2011-10-31 CN		
其他公开文献	US9833156		
外部链接	Espacenet USPTO		

摘要(译)

一种心率检测装置，包括：信号获取装置，用于获取耳内振动波信号，并将耳内振动波信号转换为耳内振动电信号；和算术处理装置，用于通过计算处理耳内振动电信号以产生心率信息。在现有技术中，由于传感器检测到的弱光信号，心率检测装置不能准确可靠地检测心率信息。心率检测装置获取耳内振动波信号以获得心率信息，从而使装置能够准确可靠地检测心率信息。

