

(19)



(11)

**EP 2 430 630 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**26.04.2017 Bulletin 2017/17**

(51) Int Cl.:  
**G09G 3/3208** <sup>(2016.01)</sup>      **G09G 3/30** <sup>(2006.01)</sup>  
**H01L 51/52** <sup>(2006.01)</sup>      **H01L 27/32** <sup>(2006.01)</sup>  
**G09G 3/20** <sup>(2006.01)</sup>

(21) Application number: **10722869.4**

(86) International application number:  
**PCT/US2010/034019**

(22) Date of filing: **07.05.2010**

(87) International publication number:  
**WO 2010/132295 (18.11.2010 Gazette 2010/46)**

(54) **ELECTRO-LUMINESCENT DISPLAY WITH ADDITIONAL PRIMARIES AND ADJUSTABLE WHITE POINT**

ELEKTROLUMINESZENZANZEIGE MIT ZUSÄTZLICHEN PRIMÄRFARBEN UND REGELBAREM WEISSPUNKT

AFFICHAGE ÉLECTROLUMINESCENT AVEC COULEURS PRIMAIRES ADDITIONELLES ET POINT BLANC REGULABLE

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR**

- **BOROSON, Michael, L.**  
**Rochester**  
**NY 14620 (US)**

(30) Priority: **12.05.2009 US 464123**

(74) Representative: **Gunzelmann, Rainer et al**  
**Wuesthoff & Wuesthoff**  
**Patentanwälte PartG mbB**  
**Schweigerstraße 2**  
**81541 München (DE)**

(43) Date of publication of application:  
**21.03.2012 Bulletin 2012/12**

(73) Proprietor: **Global OLED Technology LLC**  
**Herndon, VA 20171 (US)**

(56) References cited:  
**WO-A1-2009/001579**      **JP-A- 2007 141 737**  
**JP-A- 2008 071 664**      **US-A1- 2006 044 226**  
**US-A1- 2008 018 798**

(72) Inventors:  
• **MILLER, Michael, E.**  
**Rochester**  
**NY 14620 (US)**

**EP 2 430 630 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**Description****CROSS REFERENCE TO RELATED APPLICATIONS**

5 [0001] Reference is made to commonly-assigned U.S. Patent Application Serial No. 12/174,085 filed July 16, 2008 entitled "CONVERTING THREE-COMPONENT TO FOUR-COMPONENT IMAGE" to Ronald S. Cok et al., the disclosure of which is incorporated herein.

**FIELD OF THE INVENTION**

10 [0002] The present invention provides an electro-luminescent display apparatus having an adjustable white point. Specifically, an electro-luminescent display apparatus is provided having at least two in-gamut electro-luminescent emitters for emitting two colors of light to provide an adjustable white point, with reduced power consumption.

**BACKGROUND OF THE INVENTION**

15 [0003] Flat-panel display devices are widely used in conjunction with computing devices, in portable devices, and for entertainment devices; including televisions. Such displays typically employ a plurality of pixels distributed over a substrate to display images. Each pixel incorporates several, differently-colored emitters, typically red, green, and blue, to represent each image element represented within an input image signal. A variety of flat-panel display technologies are known, for example, plasma displays, field emissive displays (FEDs), liquid crystal displays (LCDs), and electro-luminescent (EL) displays, such as organic light-emitting diode (OLED) displays. To present images on these displays, the display typically receives an image input signal containing three-color-components for each image element which the display utilizes to drive each differently-colored emitter for each pixel.

20 [0004] In emissive displays, including plasma, field-emissive and electro-luminescent displays, the amount of visible radiant energy produced by the display is proportional to the amount of power that the display consumes. This same relationship does not exist in transmissive displays, such as certain LCDs, in which the energy provided to the light source is not modulated as these displays typically create enough light to provide the brightest possible image and then modulate the light rather than the input energy so that only the necessary portion of the light is transmitted to the user.

25 [0005] Displays are used in many professional and consumer electronic devices. In many professional and consumer electronic devices, the user is given the opportunity to adjust the color temperature of the display device. Typically, the color temperature of the display is adjusted to various white points representing different points on or near the Planckian Locus, including colors having color coordinates near the color of standard emitters such as D50, D65, D70 and D95. Further, some display devices provide the ability to change the color temperature of the display at a higher level. For example, the color temperature of the display can be adjusted to D65 when the display is placed in modes, such as those referred to by names such as "Cinema" and the display and to a color temperature such as D93 when placed in modes, such as those referred to by names such as "Standard".

30 [0006] It is known to adjust the color temperature of a display device. For example, in the LCD art, it is known to use multiple illumination sources to enable the adjustment of color temperature in a display. For example, Cornelissen in US Patent No. 6,840,646, entitled "Illumination system and display device" discusses a liquid crystal display device with an adjustable backlight, comprising a low-pressure discharge lamp and additional blue LEDs. By changing the ratio of the power to these two light sources, the color of the LCD backlight can be modified to change the color temperature of the display as it passes through the liquid crystal and red, green, and blue color filters. Similarly, Evanicky in US Patent No. 6,535,190, entitled "Multiple light source color balancing system within a liquid crystal flat panel display" discusses an LCD having fluorescent lamps that serve as the backlight for the LCD, some lamps producing a different color of light than others. By adjusting the ratio of light produced by each of the lamps, the color temperature of the backlight and therefore the color temperature of the light that is passed through the LCD and its red, green, and blue color filters is modified. Although, this method adds cost to the overall LCD system, these displays make relatively efficient use of the light that is produced, as the light source is directly modified to create the color of light that is needed. Unfortunately, it is not possible to employ adjustable backlights in emissive displays and so this method cannot be applied directly in emissive displays, such as EL displays.

35 [0007] It is also known to adjust the color temperature of a display by adjusting the ratios of the red, green, and blue light-emitting elements to change the color temperature of the display. For example, Inohara et al. in US Patent No. 4,449,148, entitled "Image Display Apparatus" discusses a method for adjusting the color temperate of a CRT by adjusting the ratio of the electron power to the phosphors in the CRT, either by adjusting power or adjusting the on time to each of the red, green, and blue color channels of the CRT. Similar methods are used to adjust the luminance ratio of red, green, and blue emitters in emissive displays, this problem becomes somewhat more complex when additional emitters are added to the display.

**[0008]** However, not all displays have only red, green, and blue emitters. For example, Miller et al in US Patent No. 7,230,594, entitled "Color OLED display with improved power efficiency" discusses an OLED display having red, green, blue and an additional in-gamut emitter, wherein the efficiency of the in-gamut white emitter is significantly higher than the efficiency of the red, green, and blue emitters. As discussed in this patent, the presence of the in-gamut emitter significantly improves the power consumption of the display.

**[0009]** In the more than three-color emitter art, it is known to adjust the color temperature of a display having an in-gamut emitter. For example, Murdoch et al. in US Patent No. 6,897,876, entitled "Method for transforming three color input signals to four or more output signals for a color display" describes a method for driving an electro-luminescent display having red, green, blue, and white emitters to color temperatures other than the color of the white emitter. Also, in the LCD art, Higgins in US Patent No. 7,301,543 entitled "Systems and methods for selecting a white point for image displays" describes a method for adjusting the color temperature of an LCD having red, green, blue, and white emitters using a set of weighting coefficients. These methods allow the color temperature of the display to be adjusted, however, they have the disadvantage that they also have a significant effect on the power consumption of the display. For example, the method discussed by Higgins changes the ratio of light that is blocked by the LCD and in the emissive display case, the ratio of light produced by highly efficient white emitters to the ratio of light produced by lower efficiency red, green, and blue emitters of emissive displays with color filters is altered. As a result, the power consumption of the display can vary dramatically for displays having four or more emitters as the color temperature of the display is changed.

**[0010]** Techniques relating to the provision of additional pixels or emitters supplementary to a set of gamut defining emitters, especially for an improved energy efficiency or color control, have been described in the US 2008/018798 A1, the WO 2009/001579 A1, the US 2006/044226 A1, and the JP 2008/071664 A. Techniques relating to a back light unit having an adjustable color have been described in the JP 2007 141737 A.

**[0011]** There is a need for an emissive display structure that permits the color temperature to be adjusted in emissive, specifically electro-luminescent displays having four or more color emitter systems, wherein the power efficiency of the resulting display does not vary significantly as a function of color temperature. It is further desirable to maintain high power efficiency, and therefore low display power consumption, regardless of display color temperature.

#### SUMMARY OF THE INVENTION

**[0012]** In accordance with the present invention, there is provided an EL display adapted to receive a three-color input image signal according to claim 1.

**[0013]** In accordance with another aspect of the present invention, there is provided an EL display, adapted to receive a three-color input image signal according to claim 9.

**[0014]** An advantage of the present invention is that it can produce images with a range of color temperatures in which high power efficiency is provided regardless of display color temperature. This provides the viewer of the display the flexibility of selecting a display color temperature without increasing the power consumption of the display, thereby maintaining high power efficiency. Some arrangements of the present invention have the added advantage that they provide multiple in-gamut light-emitting elements to extend the useful lifetime of the display device.

#### BRIEF DESCRIPTION OF THE DRAWINGS

##### **[0015]**

FIG. 1 is a schematic of the top view of a display system according to one arrangement of the present invention;

FIG. 2 is a representation of a user menu useful in providing a means for providing a display color temperature;

FIG. 3 is a schematic of a cross section of a portion of a display panel useful in practicing an arrangement of the present invention;

FIG. 4 is a plot of emitter spectral emission and color filter transmission spectra for emitters and color filters useful in practicing an arrangement of the present invention;

FIG. 5 is a 1931 CIE chromaticity diagram providing the location of color coordinates for EL emitters according to an arrangement of the present invention;

FIG. 6 is a plot of emitter spectral emission and color filter transmission spectra for emitters and color filters useful in practicing an arrangement of the present invention;

FIG. 7 is a 1931 CIE chromaticity diagram providing the location of color coordinates for EL emitters according to an arrangement of the present invention;

FIG. 8 is a schematic of a cross section of a portion of a display panel useful in practicing an arrangement of the present invention;

FIG. 9 is a schematic diagram of a controller according to an arrangement of the present invention;

FIG. 10 is a schematic diagram of a controller according to an alternate arrangement of the present invention;

FIG. 11 is a schematic of the top view of a display system according to one arrangement of the present invention;

FIG. 12 is a schematic of a cross section of a portion of a display panel useful in practicing an arrangement of the present invention;

FIG. 13 is a plot of emitter spectral emission and color filter transmission spectra for emitters and color filters useful in practicing an arrangement of the present invention;

FIG. 14 is a 1931 CIE chromaticity diagram providing the location of color coordinates for EL emitters according to an arrangement of the present invention; and

FIG. 15 is a graph of average power as a function of the distance of the chromaticity coordinates of a white emitter from the white point of the display.

## DETAILED DESCRIPTION OF THE INVENTION

**[0016]** One arrangement of the present invention provides an EL display **2** adapted to receive a three-color input image signal **18**, which includes a display panel **4**, including three gamut-defining EL emitters **6, 8, 10** for emitting red, green, and blue colored light, respectively, and a first and a second additional EL emitter **12, 14** for emitting two additional colors of light having chromaticity coordinates specifying two pseudo-blackbody points, the chromaticity coordinates of the two additional colors of light lying inside a gamut defined by the three gamut-defining emitters **6, 8, 10** and near the Planckian Locus, wherein the two pseudo-blackbody points have respective correlated color temperatures that differ by at least 2000 K. Each EL emitter **6, 8, 10, 12, 14** outputs light at a corresponding luminance value in response to a corresponding drive signal. The EL display **2** further includes a way of providing a display white point; and a controller **20** responsive to the provided display white point, which the controller **20** can receive as a white point signal **16**, and the input image signal **18**. The controller **20** provides first separate drive signals for the three gamut-defining EL emitters **22** and second separate drive signals **24** for the two additional EL emitters **12, 14**, wherein the respective luminance values corresponding to the second separate drive signals **24** are each a function of the input image signal and the distances between the display white point and the two pseudo-blackbody points of the two additional colors.

**[0017]** Within the current invention, the two or more additional EL emitters **12, 14** are within the gamut, have a high power efficiency and are capable of producing two pseudo-blackbody points which are separated by a distance large enough to allow the pseudo-blackbody points to bracket a range of desired white points. FIG. 15 shows the average power consumption of an EL display having EL emitters for emitting red, green, blue and white light as a function of the distance of the chromaticity coordinates of the single white emitter from the desired display white point. This value is plotted for two different white EL emitters, one having a white point near D65 (e.g., color temperature of 6500 K) and one having a white point with a color temperature of 10,000 Kelvin. As this figure shows, if the display white point is D65 and the emitter has chromaticity coordinates that are near D65, the power consumption of the display will be low and often near a minimum as indicated by point **500** and increase anytime the color of the white emitter or the color of the display white point changes, such that the power is increased by more than 10 percent anytime the distance between the chromaticity coordinates in the 1931 CIE chromaticity diagram is more than 0.05, which is near the point **504**. The same relationship exists if the display white point is 10,000 Kelvin and the display white point is also 10,000 Kelvin as indicated by the point **502**. That is, this point **502** indicates a low power that is near the minimum power for a display white point of 10,000 Kelvin. Once again, the point **506**, which has a distance near 0.05 from the display white point. The distance between these two correlated color temperatures is greater than 0.05, and therefore any display having a single white emitter, which provides images rendered with these two white points will have an increased power consumption when it is required to produce some images at one display white point and other images at a second display white point. It has been determined that when using the arrangement of EL emitters according to the present invention, the EL display **2** can render the input image signal to the EL emitters **6, 8, 10, 12, 14** of the EL display **2**, such that the

closest pseudo-blackbody point is used for rendering neutral colors at the desired display white point with a high efficiency.

**[0018]** Because most image sets contain a preponderance of neutral colors, the ability to shift the energy among the EL emitters **12,14** that form the separate pseudo-blackbody points as the desired display white point is changed, permits the power consumption of the EL display **2** to remain relatively unchanged as a function of display white point. It has also been determined that for most typical image sets, a typical EL display **2** having only a single in-gamut EL emitter, which is near the display white point, will require this single EL emitter to have a very large aperture ratio, typically near or larger than twice the emitting area of the EL emitters **6, 8, 10** for emitting red, green, and blue light. By employing the present invention, the lifetime of the EL display **2** is improved by applying equalized EL emitters **6,8,10,12,14** but increasing the lifetime by providing multiple EL emitters **12, 14** inside the gamut defined by the EL emitters **6, 8, 10** for emitting red, green and blue light.

**[0019]** In the context of the present invention, the term "pseudo-blackbody points" refer to two or more colors of light specified by chromaticity coordinates that are "near" the Planckian Locus. In a display system of the present invention having exactly two additional emitters, these pseudo-blackbody points will correspond to the colors of light that are emitted by these two additional EL emitters **12,14**, requiring that the colors of light that are emitted by these two additional EL emitters **12, 14** are "near" the Planckian Locus. In a display system of the present invention having more than two additional EL emitters **12, 14**, these pseudo-blackbody points will correspond to colors of light that are created either by an individual additional EL emitter or a combination of light from at least two of the additional EL emitters. When the "pseudo-blackbody point" is created by combining light from two or more of the additional EL emitters, the EL emitters should span the Planckian Locus in such a manner that the appropriate color of light is created to create an appropriate pseudo-blackbody point that is "near" the Planckian Locus.

**[0020]** The term "Planckian Locus" refers to the path or locus that the color of a black body would take in a particular color space as the blackbody temperature changes. In the context of the present invention, a pseudo-blackbody point is "near" pseudo-blackbody the Planckian Locus when it is within a Euclidean distance of plus or minus 0.05 of the nearest point on the Planckian Locus, as depicted on the standard CIE 1931 chromaticity diagram. More specifically, in the context of the present invention, chromaticity coordinates that are "near" the Planckian Locus will have a Euclidean distance within the 1931 chromaticity diagram of plus or minus 0.05 from the nearest point on the Planckian Locus as specified by blackbody radiators having color temperatures between 5000 degrees and 10,000 Kelvin.

**[0021]** The term "correlated color temperature" is a property of a color and refers to the temperature of the Planckian radiator having the perceived color most closely resembling that of the given color at the same luminance value and under the same viewing conditions. The correlated color temperature of any color is calculated as the temperature of the blackbody radiator having the smallest Euclidean distance from the color within the 1976 CIE uniform chromaticity space. The term "radiant efficiency" within the context of the present invention is the efficiency with which electrical energy is converted to electromagnetic radiation within the visible spectrum, that is electromagnetic radiation having wavelengths between 380 and 750 nm. For EL emitters of the present invention, this value is specified as the ratio of Watts of electromagnetic energy having wavelengths between 380 and 750 nm that is emitted from the display to the Watts of power or Amps of current provided to stimulate the EL emitters. This quantity is separate from "luminous efficacy", which is the ratio of luminous flux emitted by the EL emitter to the amount of electricity used to stimulate the EL emitter. Luminous efficacy is typically provided in terms of lumens per watt or candelas per amp, since "luminous efficacy" includes an adjustment, which reflects the varying sensitivity of the human eye to the different wavelengths of electromagnetic energy.

**[0022]** In the present invention, there is provided a structure for providing a display white point, which includes any apparatus for providing a white point signal **16** for specifying a display white point to the controller **20**. In one arrangement, this structure includes a user menu that is provided on the EL display **2**, and a user input device for selecting between or among display white point options. FIG. 2 shows one such menu **40**. In this menu, the user is given multiple options **42, 44, 46** for selecting display white points. These options will commonly indicate a single selected option **42** and allow the user to use an input device, such as a mouse or a button to select one of the remaining options **44, 46**. The user can also be given access to a separate control **48** for indicating that they have indicated their desired preference. These options are provided through a graphical user interface as shown in FIG. 2 in some arrangements. Alternately, the display can have a single button, which when pressed, changes the color temperature of the white point of the display. Although the menu **40** shown in FIG. 2 permits the user to explicitly select a color temperature, this explicit control is not necessary and in an alternative arrangement the user is provided with alternate options that allow the implicit control of white point selection, for example, by providing options such as cinema mode (inferring 6500K) and saturated color mode (inferring 9300K). Besides direct user manipulation of display white point, the structure for providing a display white point in other arrangements is a signal associated with the input image signal **18**. For example, in some arrangements a video signal is encoded assuming a particular display white point. This display white point is encoded in metadata associated with this video signal. The video signal is provided to the display, thereby providing the display white point (encoded in the metadata) as well as the input image signal **18**. Further, the controller **20** can infer the display white point based upon the source of the input image signal **18**. For example an input image signal **18** provided through a standard video port

(e.g., a S-video port) might be assumed to have a display white point, such as 6500K but an input image signal **18** provided through a port more closely associated with a computing platform (e.g., a VGA port) might be assumed to have a different display white point, such as 9300K.

**[0023]** In one arrangement of the present invention, the EL display can include an EL display panel, which is formed from an EL emitter for emitting white light together with an array of color filters. Different color filters are employed to form the EL emitters for emitting red, green, blue and the two additional colors of light. A cross-section of one such display panel is shown in FIG. 3. As shown in this arrangement, the EL display panel **50** will include a substrate **52** on which a drive layer **54** is formed. This drive layer **54** will include electronics, such as active-matrix circuitry, to provide current to each light-emitter. Narrowband color filters **56, 58, 60** are then formed to filter any broadband light emission to form narrowband red, green, and blue light, respectively. In some arrangements, an additional broadband color filter **62** is formed for providing an additional color of light. A second broadband color filter (not shown) can optionally be formed for filtering any broadband light emission to form a second additional color of light, but such a color filter is not necessary. A smoothing layer **64** can additionally be provided for reducing variations in thickness in the region of the color filters. A first electrode **66** is typically formed inside the area defined by each of the color filters and an insulator **68** is typically formed between segments of the electrode to reduce shorting. An EL emissive layer **70** can then be formed over the first electrodes for emitting broadband light. This EL emissive layer **70** will typically include a multi-layer stack that will typically include at least a hole transport layer, a light-emitting layer, and an electron transport layer. The light-emitting layer **70** will typically include multiple species of light-emitting structures or molecules, each species emitting a narrowband of light with a variable wavelength for forming the broadband light emission. Finally, a second electrode **72** will be formed on the opposite side of the EL emissive layer as the first electrode **66**. During operation, the first and second electrodes **66, 72** will provide an electrical potential, motivating the flow of current through the EL emissive layer **70** and the EL emissive layer **70** will emit broadband light in response to the current that passes through this layer. In such a structure, the second electrode **72** will typically be formed from a reflective metal, such as aluminum. The first electrode **66** will typically be formed from a transparent oxide, such as Indium Tin Oxide and the light emitted by the EL emissive layer **70** will typically be emitted in the direction **74** indicated by the arrow. However, this is not required as the color filters can be formed on the opposite side of the second electrode **72** and the second electrode **72** can be transparent or semi-transparent and the first electrode **66** can be reflective. The individual EL emitters within the EL display **50**, depicted as **6, 8, 10, 12,** and **14** of FIG. 1, are defined by a pattern of the first and second electrodes **66, 72** such that an individual EL emitter is formed by overlapping regions of the first and second electrodes **66, 72**, which will be patterned to define a two-dimensional array of EL emitters. As shown, this device includes color filters **56, 58, 60** for each of the three gamut defining emitters and a color filter **62** for one of the two additional emitters.

**[0024]** The broadband light provided by the EL emissive layer **70** can provide a spectrum, such as **80** in FIG. 4. One of the additional EL emitters **12, 14** in FIG. 1 can emit this light without a color filter, provided the spectrum of light is such that it has chromaticity coordinates that are inside the gamut of the gamut-defining EL emitters **6, 8, 10** and near the Planckian Locus. Light having the spectrum **80** shown in FIG. 4 will have chromaticity coordinates 0.326, 0.346, which have an Euclidean distance of 0.005 from the Planckian Locus at a correlated color temperature of 5800 Kelvin. The second additional EL emitter **12, 14** will include some form of color filter. This color filter, for example **62** in FIG. 3, is a dye or pigment based color filter having a spectrum **82** in FIG. 4. However, this filter can be formed through the design of optical interference within the layers of the device or other known structures. Employing a color filter having the spectrum **82**, in combination with the EL spectrum **80** shown in FIG. 4 will result in an EL emitter having the spectrum **84**. Light having the spectrum **84** will have chromaticity coordinates 0.275, 0.290, which have a Euclidean distance of 0.0016 from the Planckian Locus at a correlated color temperature of 10,500 Kelvin.

**[0025]** When the EL emissive layer **70** provides light having the spectrum **80** and is employed without a color filter and with a color filter having the spectrum **82** to create the two additional emitters as well as employed with three typical narrowband filters, the resulting EL display will provide EL emitters for producing colors having the 1931 CIE chromaticity coordinates provided in FIG. 5. As shown in this figure, by selecting appropriate narrowband color filters for passing long, medium and short wavelength light, the corresponding gamut-defining EL emitters produce light having chromaticity coordinates **90, 92,** and **94** for the red, green, and blue EL emitters. These coordinates define a color gamut **96**, which specifies the colors that can be formed through combinations of these three colors of light. FIG. 5 also shows a portion of the Planckian locus **98** for color temperatures between 5000 and 25000 Kelvin. The chromaticity coordinates **100** and **102** provided by light having the spectrum **80** and **84**, respectively are also shown and provide pseudo-blackbody points according to the present invention. These pseudo-blackbody points besides lying inside the gamut provided by the gamut-defining primaries are near the Planckian Locus, also have correlated color temperatures that differ by more than 2000 Kelvin with one of the pseudo-blackbody points of one of the additional emitters having a correlated color temperature of 6500 Kelvin or less and the second pseudo-blackbody point of the second of the additional emitters having a correlated color temperature of 8000 Kelvin or greater. Within this configuration, because narrow bandpass filters filter the gamut-defining primaries, these narrow bandpass filters reduce their final radiant efficiency significantly. For a broadband emitter having an efficiency of 0.0122 W/A, the red, green, and blue EL emitters have radiant efficiencies of 0.00225, 0.00163,

and 0.00220 W/A. However, because the additional EL emitters are not filtered or are filtered using a broadband filter, they have significantly higher radiant efficiencies, having radiant efficiencies of 0.00642 and 0.0122 W/A. Therefore, each EL emitter has a respective radiant efficiency and the radiant efficiencies of the two additional emitters are each higher than all of the respective radiant efficiencies of the gamut-defining EL emitters.

5 [0026] In the previous example, the EL emissive layer 70 within the EL display 50 was assumed to have spectral emission 80 with a low correlated color temperature and a color filter 62 was used to alter the emitted light such to achieve a higher color temperature. However, this is not required and a system of the present invention is formed using an emitter that natively has a high correlated color temperature with a color filter to obtain a lower correlated color temperature. FIG. 6 provides an emitter spectrum 110 for an EL emitter having a high correlated color temperature, specifically 8000 Kelvin, and the spectrum of a filter 112 for reducing the short wavelength energy from the emitter spectrum 110. By applying this filter, to filter the emitter spectrum 110 of the EL emitter, the filtered emitter spectrum 114 is obtained for an EL emitter in combination with the color filter having the color filter spectrum 112 with a correlated color temperature of 4900 Kelvin. By providing an EL emission layer 70 in FIG. 3 having the emitter spectrum 110 together with a color filter 62 in FIG. 3 having the color filter spectrum 112 together with typical color filters 56, 58, 60 to form red, green, and blue light, the chromaticity coordinates shown in FIG. 7 is obtained. As shown, typical color filters together with the emitter spectrum 110 will result in red, green, and blue emission having the chromaticity coordinates 120, 122, 124, which form the color gamut 126. By applying a color filter having filter spectrum 112 within one of the additional EL emitters, the chromaticity coordinates 130 are obtained and the unfiltered EL emission having the spectrum 110 will provide the chromaticity coordinates 132, each of which are near the Planckian Locus 128. With this combination, 20 the Euclidean distance of the unfiltered emitter has a distance of 0.020 from the Planckian Locus and the filtered emitter has a distance of 0.0012 from the Planckian Locus. The resulting EL emitters have relative radiant efficiencies of 0.0099, 0.0104, and 0.0156 W/A for the gamut defining EL emitters and 0.073 and 0.0366 W/A for the additional EL emitters.

[0027] Although, at least one of the additional EL emitters are formed to include a color filter in the previous arrangement, this is not a necessary requirement. In another arrangement of the present invention shown in FIG. 8, an EL display panel 140 is formed from an EL emitter for emitting white light together with an array of color filters. As shown, different color filters are employed to form the EL emitters for emitting red, green, and blue light. In other arrangements, the color of the additional EL emitters are, however, formed using other methods, such as by tuning the length of optical cavities within the EL display panel 140. As shown, the EL display panel 140 will typically include a substrate 142 on which a drive layer 144 is formed. This drive layer 144 will include electronics, such as active-matrix circuitry, to provide current to each elemental emitter. A first electrode 146 is formed with an insulator 148 between segments of the electrode to reduce shorting.

[0028] A variable-thickness, non-emitting layer 166 is formed over the first electrode 146. This variable-thickness, non-emitting layer will be relatively transparent and will have a different thickness in the first additional EL emitter, for example the one indicated by region 168, than in the second additional EL emitter, for example the one indicated by region 170. The purpose of this variable-thickness, non-emitting layer 166 is to introduce a different optical cavity length within the optical structure of the EL display device.

[0029] An EL emissive layer 150 can then be formed over the first electrodes and the variable-thickness, non-emitting layer 166 for emitting broadband light. This EL emissive layer 150 will typically include a multi-layer stack that will typically include at least a hole transport layer, a light-emitting layer, and an electron transport layer. The light-emitting layer within the EL emissive layer 150 will typically include multiple species of light-emitting structures or molecules, each species emitting a narrowband of light with a variable wavelength for forming the broadband light emission. A second electrode 152 will be formed on the opposite side of the EL emissive layer as the first electrode 146. During operation, the first and second electrodes 146, 152 will provide an electrical potential, motivating the flow of current through the EL emissive layer 150 and the EL emissive layer 150 will emit broadband light in response to the current that passes through this layer. In such a structure, the second electrode 152 will typically be formed from a transparent or semi-transparent material, including materials such as Indium Tin Oxide or thin silver. The first electrode 146 will typically be formed from a reflective metal, such as Aluminum. The device can then be designed to include a low optical index layer, 176, for example an air gap above the second electrode 152 within the regions of light emission. This low optical index layer 176 is formed, for example, by applying a second substrate 162 above the second electrode 152. This second substrate 162 is made to include narrow band color filters 154, 156, and 158 for filtering the broadband light emitted from the light-emitting layer 150 together with a smoothing layer 160 in this arrangement. In this arrangement, the narrowband color filters 154, 156, 158 filter broadband light emission to provide red, green, and blue light.

[0030] This arrangement permits light produced in the EL emissive layer 150 to be emitted in the direction of the arrow 164. Narrowband color filters 154, 156, 158 are then formed to filter any broadband light emission to form narrowband red, green, and blue light, respectively. A second broadband color filter (not shown) can optionally be formed for filtering any broadband light emission to form one or both of the additional EL emitters, but such a color filter is not necessary.

[0031] Further detail can now be provided with regards to the variable-thickness, non-emitting layer 166. By selecting the thickness of this variable-thickness, non-emitting layer, the optical cavity length for each EL emitter is designed to

preferentially emit certain wavelengths of light as compared to others. Within a device of the present invention, the optical cavity length will be selected by changing the thickness of this variable thickness, non-emitting layer **166** such that a first of the additional EL emitters, such as the one indicated by region **170**, preferentially emits short wavelength light. The second of the additional EL emitters preferentially emits medium or long wavelength light. In a device, such as this, the optical cavity length is the distance from the top of the first electrode **146** (i.e., the interface between the first electrode **146** and the EL light-emitting layer **150**) and the top of the second electrode **152** (i.e., the interface between the second electrode layer **152** and low optical index layer **176**). As such, this non-emitting layer **166** has a different thickness in the first additional EL emitter region **168** than the second additional EL emitter region **170**. In one arrangement, this non-emitting layer **166** is a transparent inorganic conductor. For example, a metal oxide, such as Indium Tin Oxide is patterned on top of the first electrode **146** using known methods to form this variable-thickness non-emitting layer **166**. In another example, wherein the EL emitting layer contains organic compounds, this variable-thickness non-emitting layer **166** is an organic semiconductor, such as NPB, which is patterned through a shadowmask or through laser transfer techniques. In yet other arrangements, particularly arrangements, wherein the EL emitting layer contains inorganic materials, such as quantum dots, this variable thickness non-emitting layer **166** is an inorganic semiconductor.

**[0032]** By varying the thickness of this variable-thickness non-emitting layer **166** between the first and second additional EL emitter regions **168,170**, it is possible to provide two additional colors of light having chromaticity coordinates specifying pseudo-blackbody points according to the present invention. It is further advantageous, however, to also vary the thickness of this layer **166** among the EL emitters for emitting red, green, and blue light. Specifically, the efficiency of the red, green, and blue EL emitters is improved when the thickness of the non-emitting layer **166** within the gamut-defining EL emitter for forming blue light, indicated by region **174** is closer to the thickness of the non-emitting layer **166** within the additional EL emitter with the higher color temperature, indicated by region **170**, than to the thickness of the non-emitting layer within the additional EL emitter with the lower color temperature. The formation of an EL emitter having a higher color temperature is achieved by designing the cavity length to preferentially emit short wavelength light, particularly light having a wavelength of 420 nm or lower. To reduce the number of steps necessary to complete a display of the present invention, when the first additional EL emitter in region **168** has a higher correlated color temperature higher than the EL emitter in the second additional EL emitter region **170**, the thickness of the variable thickness, non-emitting layer within the gamut-defining EL emitter for emitting blue colored light will be equal to the thickness of the non-emitting layer within the first additional EL emitter region **168**. It is further useful for the thickness of the non-emitting layer within the gamut-defining EL emitter for forming red or green light, indicated by region **172a, 172b** to be closer to the thickness of the non-emitting layer within the additional EL emitter, indicated by region **168**, with the lower color temperature than to the thickness of the non-emitting layer within the additional EL emitter with the higher color temperature. The formation of an EL emitter with a lower color temperature is obtained by designing the cavity length to preferentially emit medium or long wavelength light, particularly light having a wavelength between 500 and 600 nm. Once again, to reduce the number of steps required to make this variable thickness layer, when the EL emitter in the first additional EL emitter region **168** has a higher correlated color temperature than the EL emitter in the second additional EL emitter region **170** the thickness of the non-emitting layer within the gamut-defining EL emitter for emitting red or green colored light will be equal to the thickness of the non-emitting layer within the second additional EL emitter region **170**. In a particularly preferred arrangement, the thickness of the non-emitting layer within both the regions **172a, 172b** of the gamut-defining EL emitters for emitting red and green colored light will be equal to the thickness of the non-emitting layer within the second additional EL emitter **170**.

**[0033]** The device shown in FIG. 8 employs a top-emitting structure for emitting light in the direction opposite the substrate. However, this is not necessary and the variable thickness non-emitting layer **166** is employed in bottom emitting structures to achieve some arrangements of an EL display of the present invention. Although, it is sometimes simpler to include a very low optical index layer **176** in an appropriate location within a top-emitting EL device as shown in FIG. 8, it is not necessary for the low optical index layer **176** to have an optical index as low as air since only a relatively small color change is required between the first and second additional EL emitter regions **168,170** of the present invention. Therefore, the inclusion of solid-state materials within layers of the device is useful in forming the low optical index layer **176** as long as the optical index of these materials is lower than the optical index of the light-emitting layer **150**. In a bottom-emitting OLED device, materials typically formed within the drive layer **144** can provide the low optical index layer **176**.

**[0034]** To fully appreciate the present invention, it is necessary to return again to a discussion of the controller **20** in FIG. 1. As discussed earlier, this controller **20** is responsive to the provided display white point, which is provided in signal **16** and the input image signal **18** for providing first separate drive signals **22** for the three gamut-defining EL emitters **6,8,10** and second separate drive signals **24** for the two additional EL emitters **12,14**, wherein the respective luminance values corresponding to the second separate drive signals are each a function of the input image signal and the distances between the display white point and the pseudo-blackbody points of the two additional EL emitters **12,14**. Specifically, when the input image signal corresponds to the provided display white point, the controller will provide second separate drive signals such that the additional EL emitter having a pseudo-blackbody point closest to the chro-



maticity coordinates of the provided display white point has a higher luminance value than the additional emitter having the pseudo-blackbody point furthest from the chromaticity coordinates of the provided display white point. The controller 20 can employ numerous methods to achieve this result.

5 **[0035]** A controller useful within the EL display of the present invention is shown in FIG. 9. As shown, the controller 180 includes a receive input image signal unit 184 for receiving the input image signal 182. This unit can perform any basic decoding steps, such as decompressing the input image signal 182 and converting the input image signal 182 to a three-color channel linear intensity using methods that are well known in the art. A receive white point unit 188 is also provided to receive a signal 186 indicating the color of the desired display white point. Based upon the desired display white point, the selected adaptation matrix unit 190, selects a color transform, typically a three by three matrix for rotating the input image signal to the desired display white point. The apply adaptation matrix unit 192 then applies this transform to the decoded input image signal to normalize the input image signal to the desired display white point. Based upon the display white point that is received by the receive white point unit 188, the determine first normalization matrix unit 194 then selects an appropriate normalization matrix. During this selection process, the unit 194 determines which of the two additional EL emitters has a pseudo-blackbody point furthest from the chromaticity coordinates of the display white point and selects or computes a matrix to rotate the output of the apply adaptation matrix unit 192 from the display white point to the chromaticity coordinates of the additional EL emitter having a pseudo-blackbody point furthest from the display white point. The determined matrix is then applied to the input data stream after application of the adaptation matrix by the apply first normalization matrix unit 196. A minimum value of the three color channel is then determined for each pixel in the image signal after application of the first normalization matrix by the determine min unit 198. A subtract min unit 200 is then used to subtract the minimum value from the each channel of the three channel signal for each pixel after application of the first normalization matrix. This minimum value is then added to the intensity for an additional color channel corresponding to the EL emitter having a pseudo-blackbody point furthest from the chromaticity coordinates of the desired display white point by the add min unit 202. The determine second normalization matrix unit 204 then determines a matrix to rotate the color coordinates of the three nonzero color components to the color of the second pseudo-blackbody point. The apply second normalization matrix unit 206 then applies this matrix to rotate the color coordinates of the three nonzero color components after the Add Min Unit 202 to the pseudo-blackbody point of the EL emitter having chromaticity coordinates closest to the chromaticity coordinates of the desired display white point. A second determine min unit 208 again determines the minimum of the resulting three nonzero channels for each pixel. This minimum is then subtracted from the signal that is acquired after applying the second normalization matrix unit by the subtract min unit 210. An add min unit 212 is then applied to add this minimum value to the fifth color channel corresponding to the EL emitter having chromaticity coordinates nearest the chromaticity coordinates of the display white point 132. The two zero values that are provided by the subtract min units 200, 212 together with the nonzero value for the resulting value for the remaining three color channel in the input image signal is then used to form a first drive signal 216 by the form first and second drive signal unit 214. The values for the two additional channels are then used to form the second drive signal 218 by the form first and second drive signal unit 214. Besides formatting this data appropriately, this unit 214 will also apply any transforms necessary to convert the linear intensity values provided by the add min unit 212 to code values, voltages, or currents that are used to drive the EL emitters within the EL display. When this method is applied appropriately and the input image signal is a typical RGB signal having equal R, G, and B values (i.e., the input color is white and therefore corresponds to the provided display white point), and when the pseudo-blackbody point for one of the emitters is equal to or very near the desired display white point the first and second drive signals will drive practically all of the display luminance through the EL emitter having a pseudo-blackbody point that is near or equal to the display white point. Therefore, the additional emitter having a pseudo-blackbody point closest to the chromaticity coordinates of the provided display white point produces higher luminance values than the additional emitter having the pseudo-blackbody point furthest from the chromaticity coordinates of the provided display white point.

45 **[0036]** In some arrangements of the present invention, the controller can perform additional image processing steps. For example, the display white point can have a corresponding luminance value that is either specified or inferred and the controller can adjust the luminance value of the display white point in response to the input image signal. In one example, the input image signal 182 can contain three color channels for an array of pixels that compose a series of image or video frames. The controller 180, can additionally include optional units 220, 222, 224, and 226 as shown in FIG. 10. The determined max unit 220 can determine the maximum non-zero intensity values in each frame for each channel after the add min unit 212 performs its calculations. The determine ratio unit 222 can then calculate ratios between the maximum possible intensity values and the maximum non-zero intensity values for each channel in each frame. The determine min ratio unit 224 can then determine the minimum of these ratios. Finally, the scale values unit 226 can scale the intensity values resulting from the add min unit 212 by the minimum ratio as determine by the determine min ratio unit 224. This scale value will always be greater than or equal to 1. Therefore, the controller 180 in FIG. 10 will adjust the luminance value of the display white point for each frame in response to a saturation of the input image signal since images containing bright saturated colors will tend to have lower minimum ratio values. Similar methods for adjusting the luminance value of the display white point in response to the input image signal have been discussed in US Patent

Application No. 12/174,085, filed July 16, 2008 entitled "Converting Three-Component To Four-Component Image" to Ronald S. Cok et al hereby included by reference.

**[0037]** One of the primary advantages of the present invention is that the display consumes similar amounts of power as the white point of the display is modified. Employing a display panel having emission similar to that shown in FIG. 6, a display is constructed having only a single additional EL emitter as is known in the prior art for emitting light inside the gamut or with the two additional EL emitters of the present invention. Power for each of these displays is shown in Table 1 as a function of display white point. In this example, the single white emitter in the RGBW system has a correlated color temperature of 8000 Kelvin. Therefore, when an RGBW display is constructed using this single white emitter, the minimum power of the display occurs for color temperatures near 8000 Kelvin and increases for other color temperatures. As shown, the power consumption is 3.9 W when the white point of the display is 10,000 Kelvin and increases to 4.35 W when the color temperature of the display is set to 6500 degrees K, increasing by over 10 percent. However, when the second additional emitter is provided in the inventive example, the power increases from only 3.65 W at 10,000K to 3.73W at 6500K, only a 2% change in power. Further the power consumption is lower in general when the second emitter is added, providing 14 percent lower power at the 6500 degree Kelvin condition.

	6500 K	7500 K	10,000 K
RGBW	4.35 W	4.05 W	3.90 W
Inventive Example	3.73 W	3.61 W	3.65 W

**[0038]** In another arrangement, the EL display **302** in FIG. 11 of the present invention is adapted to receive a three-color input image signal **320**. This EL display **302** includes three gamut-defining EL emitters **306, 308, 310** formed on a substrate **304** for emitting red, green, and blue colored light, respectively. The chromaticity coordinates of the three gamut-defining EL emitters define a gamut and each EL emitter outputs light at a corresponding luminance value in response to a corresponding drive signal. Also included are three additional (cyan, magenta, and yellow) EL emitters **316, 314, 312** for respectively emitting cyan, magenta, and yellow light. In this EL display **302** each additional EL emitter **312, 314, 316** is within the gamut of the gamut-defining primaries **306, 308, 310** and has respective chromaticity coordinates. Within this EL display, a line drawn between the chromaticity coordinates of the cyan EL emitter **316** and the magenta EL emitter **314** will intersect the Planckian Locus to define a first pseudo-blackbody point. A line drawn between the chromaticity coordinates of the yellow EL emitter **312** and the chromaticity coordinates of the magenta EL emitter **314** will intersect the Planckian Locus to define a second pseudo-blackbody point. The distance between the first and second pseudo-blackbody points along the Planckian Locus will be greater than 2000K. Each of the additional EL emitter outputs light at a corresponding luminance value in response to a corresponding drive signal. The EL display **302** will further include a structure for providing a display white point in response to a white point signal **322**; and a controller **318** responsive to the provided display white point and the input image signal **320** for providing first separate drive signals **324** for the three gamut-defining EL emitters **306, 308, 310** and second separate drive signals **326** for the three additional EL emitters **312, 314, 316**. Within the present invention the respective luminance values corresponding to the second separate drive signals **316** are each a function of the input image signal **320** and the distances between the chromaticity coordinates of the display white point and the first and second pseudo-blackbody points. In some arrangements, when the input image signal **320** corresponds to the provided display white point, the sum of the luminance values of the additional emitters defining a pseudo-blackbody point closest to the chromaticity coordinates of the provided display white point is higher than the sum of the luminance values of the additional emitters defining a pseudo-blackbody point furthest from the provided display white point.

**[0039]** FIG. 12 shows a cross-section of the display panel within the display of FIG. 11. This display panel **340** includes a substrate **342**. A drive layer **344** is formed on this substrate. Color filters **346, 348, 350, 352, 354** are formed over the substrate and a smoothing layer **356** is applied. As shown in FIG. 12, six EL emitters are formed on the display panel **340** by applying five color filters having different spectra corresponding to the red, green, blue and two of the cyan, magenta and yellow EL emitters. Three of these color filters, **346, 348, and 350** are narrowband color filters for forming the gamut-defining primaries of a display of the present invention. Two of these color filters **348** and **350** are broadband color filters for filtering broadband light in an efficient manner. Although a sixth filter providing a broadband filter can be applied to form a third in-gamut EL emitter, this filter is not necessary. Therefore, the display will include corresponding color filters for each of the three gamut-defining EL emitters and exactly two of the three additional EL emitters. Above the smoothing layer **344**, the first electrodes **358** are formed with insulators **360**. An EL light-emitting layer **362** is formed over the first electrodes **358** and a second electrode **364** is formed over the EL light-emitting layer **344**. In this device, the light emitted within each EL emitter passes in a direction **366**, as indicated by the arrow. In desirable arrangements, the EL emitter without a filter will typically emit light that has a yellow or cyan bias. When the EL emitter without a filter emits light that has a yellow bias, the broadband filters **348, 350** will be cyan and magenta filters. When the EL emitter

without a filter emits light that has a cyan bias, the broadband filters **348, 350** will be yellow and magenta filters.

**[0040]** FIG. 13 shows the emission spectrum **380** of a broadband emitter as a function of wavelength. This particular emitter has a yellow bias, having chromaticity coordinates of 0.326, 0.346, having a correlated color temperature of about 5800 Kelvin. Also shown in FIG. 13 are color filter spectra **382, 384** for cyan and magenta color filters, respectively, which are useful in practicing one arrangement of the present invention. It should be acknowledged, however, that if the emitter had a cyan bias, it would be necessary to include magenta and yellow color filters.

**[0041]** FIG. 14 provides a 1931 CIE chromaticity diagram including points that are achieved by applying the broadband emitter having the emission spectrum **380**, together with narrowband red, green, and blue color filters and the broadband filters having spectra **382** and **384** from FIG. 13. As shown in FIG. 14 a display panel, such as **340** in FIG. 12, is formed employing these filters which include EL emitters for emitting red, green, and blue light having the chromaticity coordinates **390, 392, and 394**. The chromaticity coordinates **390, 392, and 394** for the EL emitters form a gamut **396**. Inside this gamut are the chromaticity coordinates **398, 400, 402** corresponding to cyan, magenta, and yellow EL emitters, respectively. A line **404** is drawn between the chromaticity coordinates **398** of the cyan EL emitter and the chromaticity coordinates **400** of the magenta EL emitter, which intersects the Planckian Locus **408** to define a first pseudo-blackbody point **406**. This first pseudo-blackbody point **406** lies on the Planckian Locus and has a color temperature of about 19,500 Kelvin. A line **410** drawn between the chromaticity coordinates of the yellow EL emitter **402** and the magenta EL emitter **400** intersects the Planckian Locus **408** to define a second pseudo-blackbody point **412**, having a color temperature of about 5800 Kelvin. The distance between the first and second pseudo-blackbody points along the Planckian Locus is greater than 2000 Kelvin, in fact, in this example, this difference is nearly 14,000 Kelvin.

**[0042]** As in the earlier arrangements, the EL display of the present invention that employs the display panel **340** would further include a structure for providing a display white point; and a controller responsive to the provided display white point and the input image signal. This controller would provides first separate drive signals for the three gamut-defining EL emitters and second separate drive signals for the three additional EL emitters, wherein the respective luminance values corresponding to the second separate drive signals are each a function of the input image signal and the distances between the chromaticity coordinates of the display white point and the first and second pseudo-blackbody points. The controller **180** shown in FIG. 10 can also be employed within this arrangement. However, the form first and second drive signal unit **214** would transform the intensities for the first and second pseudo-blackbody points to cyan, magenta, and yellow intensity values by multiplying each of these intensity values by two separate weighting values for the cyan, magenta, and yellow intensity values and summing these for each channel. These weighting values simply represent the ratio of each of the EL emitters required to create each of the pseudo-blackbody points. This controller can also employ other algorithms for converting red, green, and blue input intensity values to separate signals for driving red, green, and blue gamut defining EL emitters as well as cyan, magenta, and yellow EL emitters as are known in the art.

**[0043]** To demonstrate the benefit of this display device, power consumption was determined for an EL display having a red, green, blue, and the same yellowish white EL emitter as provided within this previous example. Power consumption was also determined for an EL display as described within this example. These power determinations were performed using the same typical image set, however it was determined at two different color temperatures, including 6500 Kelvin and 10,000 Kelvin. The resulting values are shown in Table 2. As shown in this Table 2, a display having only the red, green, blue and yellowish white EL emitter has draws about 4.8 W for a color temperature of 6500K. However, when this same display was used to provide images with a color temperature of 10,000K, the power consumption of the display increased significantly to more than 5.5 W. However, when using the display of the present invention having red, green, and blue gamut-defining EL emitters together with cyan, magenta, and the yellowish-white emitter as described in the example, the power was nearly equivalent regardless of color temperature increasing only from 4.3 to 4.4 W for this display configuration. It is also noteworthy that inclusion of the additional cyan and magenta emitters decreased power ay at least 10% regardless of color temperature, their addition is primarily useful when the color temperature of the display is adjusted as it reduces the sensitivity of the power consumption of the display to changes in display white point, effectively reducing the power consumption by 20% in this example when the display is driven to a white point of 10,000 Kelvin.

TABLE 2

	6500 K	10,000K
RGBY	4.8 W	5.5 W
RGBCMY	4.3 W	4.4 W

**[0044]** Although the example arrangement shown in FIG. 11 provides a broadband emitter together with three narrowband and two broadband filters, other arrangements of EL displays are formed which fulfill the requirements of the present invention. This includes displays including various optical cavity configurations and patterning of materials having

different color emission.

**[0045]** In a preferred arrangement, the EL display of the present invention includes Organic Light Emitting Diodes (OLEDs), which are composed of small molecule or polymeric OLEDs as disclosed in but not limited to U.S. Pat. No. 4,769,292, by Tang et al., and U.S. Pat. No. 5,061,569, by VanSlyke et al. Many combinations and variations of organic light emitting materials can be used to fabricate such a panel.

**[0046]** The invention has been described in detail with particular reference to certain preferred embodiments thereof, but it will be understood that variations and modifications can be effected.

**PARTS LIST**

**[0047]**

- 2 EL display
- 4 display panel
- 5 6 red gamut-defining EL emitter
- 8 green gamut-defining EL emitter
- 10 blue gamut-defining EL emitter
- 12 first additional EL emitter
- 14 second additional EL emitter
- 16 white point signal
- 18 three-color input image signal
- 20 controller
- 22 drive signal for the gamut-defining EL emitters
- 24 drive signals for the additional EL emitters
- 25 40 menu
- 42 display white point option
- 44 display white point option
- 46 display white point option
- 48 separate control
- 30 50 EL display panel
- 52 substrate
- 54 drive layer
- 56 narrowband color filter for forming red light
- 58 narrowband color filter for forming green light
- 35 60 narrowband color filter for forming blue light
- 62 additional broadband color filter
- 64 smoothing layer
- 66 first electrode
- 68 insulator
- 40 70 EL emissive layer
- 72 second electrode
- 74 direction of light emission
- 80 EL spectrum
- 82 color filter spectrum
- 45 84 filtered EL spectrum
- 90 red EL emitter chromaticity coordinates
- 92 green EL emitter chromaticity coordinates
- 94 blue EL emitter chromaticity coordinates
- 96 color gamut
- 50 98 Planckian Locus
- 100 additional EL emitter chromaticity coordinates
- 102 additional EL emitter chromaticity coordinates
- 110 emitter spectrum
- 112 filter spectrum
- 55 114 filtered emitter spectrum
- 120 red chromaticity coordinates
- 122 green chromaticity coordinates
- 124 blue chromaticity coordinates

	126	color gamut
	128	Planckian Locus
	130	additional emitter chromaticity coordinates
	132	additional emitter chromaticity coordinates
5	140	EL display panel
	142	substrate
	144	drive layer
	146	first electrode
	148	insulator
10	150	EL emissive layer
	152	second electrode
	154	narrowband color filter
	156	narrowband color filter
	158	narrowband color filter
15	160	smoothing layer
	162	second substrate
	164	direction of light emission
	166	variable thickness, non-emitting layer
	168	region of first additional EL emitter
20	170	region of second additional EL emitter
	172a	region of EL emitter for emitting red or green light
	172b	region of EL emitter for emitting red or green light
	174	region of EL emitter for emitting blue light
	176	low optical index layer
25	180	controller
	182	input image signal
	184	receive input image signal unit
	186	display white point signal
	188	receive white point unit
30	190	select adaptation matrix unit
	192	apply adaptation matrix unit
	194	determine first normalization matrix unit
	196	apply first normalization matrix unit
	198	determine min unit
35	200	subtract min unit
	202	add min unit
	204	determine second normalization matrix unit
	206	apply second normalization matrix unit
	208	second determine min unit
40	210	subtract min unit
	212	add min unit
	214	form first and second drive signal unit
	216	first drive signal
	218	second drive signal
45	220	determine max unit
	222	determine ratio unit
	224	determine min ratio unit
	226	scale values unit
	302	EL display
50	304	substrate
	306	red gamut-defining EL emitter
	308	green gamut-defining EL emitter
	310	blue gamut-defining EL emitter
	312	additional EL emitter
55	314	additional EL emitter
	316	additional EL emitter
	318	controller
	320	input image signal

322	white point signal
324	first separate drive signals
326	second separate drive signals
340	display panel
5 342	substrate
344	drive layer
346	narrowband color filter
348	narrowband color filter
350	narrowband color filter
10 352	broadband color filter
354	broadband color filter
356	smoothing layer
358	first electrode
360	insulators
15 362	EL light-emitting layer
364	second electrode
366	light-emission direction
380	emission spectrum
382	color filter spectrum
20 384	color filter spectrum
390	red chromaticity coordinates
392	green chromaticity coordinates
394	blue chromaticity coordinates
396	gamut
25 398	cyan chromaticity coordinates
400	magenta chromaticity coordinates
402	yellow chromaticity coordinates
404	line
406	first pseudo-blackbody point
30 408	Planckian Locus
410	line
412	second pseudo-blackbody point
500	point near minimum power for D65
502	point near minimum power for 10,000 Kelvin
35 504	point near a distance of 0.05 from the display white point of D65
506	point near a distance of 0.05 from the display white point of 10,000 Kelvin

**Claims**

- 40 1. An EL display (2) adapted to receive a three-color input image signal, comprising:
- 45 a) three gamut-defining EL emitters (6, 8, 10) for emitting red, green, and blue colored light and a first (12) and a second (14) additional EL emitter for emitting two different additional colors of light having chromaticity coordinates specifying respective pseudo-blackbody points, the chromaticity coordinates of the two additional colors of light lying inside a gamut defined by the three gamut-defining EL emitters (6, 8, 10) and within an Euclidean distance of plus or minus 0,05 of the nearest point on the Plankian Locus, wherein the two pseudo-blackbody points have respective correlated color temperatures that differ by at least 2000K, and wherein each EL emitter outputs light at a corresponding luminance value in response to a corresponding drive signal;
- 50 b) means for providing a desired display white point provided as input; and
- c) a controller (20) responsive to the provided display white point and the three-color input image signal for providing first separate drive signals for the three gamut-defining EL emitters (6, 8, 10) and second separate drive signals for the two additional EL emitters (12, 14), wherein the respective luminance values corresponding to the second separate drive signals are each a function of the input image signal and the distances between
- 55 the desired display white point provided as input and the pseudo-blackbody points of the two additional colors, the controller comprising:
- a receive input image signal unit (184) for receiving the input image signal;

a receive white point unit (188) for receiving a signal indicating the provided display white point provided as input;

a selected adaptation matrix unit (190) for selecting, based on the desired display white point, a color transform for rotating the input image signal to the desired display white point;

5 an apply adaptation matrix unit (192) for applying the transform to the decoded input image signal to normalize the input image signal to the desired display white point;

a determine first normalization matrix unit (194) for selecting, based on the desired display white point, an appropriate normalization matrix, wherein the determine first normalization matrix unit (194) determines which of the two additional EL emitters has a pseudo-blackbody point furthest from the chromaticity coordinates of the display white point and selects or computes a matrix to rotate the output of the apply adaptation matrix unit (192) from the display white point to the chromaticity coordinates of the additional EL emitter having a pseudo-blackbody point furthest from the display white point;

10 an apply first normalization matrix unit (196) for applying the determined matrix to the input data stream after application of the adaptation matrix;

a first determine min unit (198) for determining a minimum value of the three color channel for each pixel in the image signal after application of the first normalization matrix;

a first subtract min unit (200) for subtracting the minimum value from the each channel of the three channel signal for each pixel after application of the first normalization matrix;

a first add min unit (202) for adding the minimum value to an intensity for an additional color channel corresponding to the EL emitter having a pseudo-blackbody point furthest from the chromaticity coordinates of the desired display white point;

20 a determine second normalization matrix unit (204) for determining a matrix to rotate the color coordinates of the three nonzero color components to the color of the second pseudo-blackbody point;

an apply second normalization matrix unit (206) for applying the matrix to rotate the color coordinates of the three nonzero color components to the pseudo-blackbody point of the EL emitter having chromaticity coordinates closest to the chromaticity coordinates of the desired display white point;

25 a second determine min unit (208) for determining the minimum of the resulting three nonzero channels for each pixel;

a second subtract min unit (210) for subtracting the minimum from the signal that is acquired after applying the second normalization matrix unit;

30 a second add min unit (212) for adding the minimum value to the fifth color channel corresponding to the EL emitter having chromaticity coordinates nearest the chromaticity coordinates of the display white point;

a form first and second drive signal unit (214) for forming a first drive signal using the two zero values that are provided by the subtract min units (200, 212) together with the nonzero value for the resulting value for the remaining three color channel in the input image signal and for forming the second drive signal using the values for the two additional channels.

35

2. The EL display (2) of claim 1, wherein when the input image signal corresponds to the provided display white point, the additional EL emitter having a pseudo-blackbody point closest to the chromaticity coordinates of the provided display white point has a higher luminance value than the additional EL emitter having the pseudo-blackbody point furthest from the chromaticity coordinates of the provided display white point.

40

3. The EL display (2) of claim 1, wherein one of the pseudo-blackbody points of the two additional EL emitters (12, 14) has a correlated color temperature of 6500K or less and the second has a correlated color temperature of 8000K or greater, wherein the correlated color temperature is calculated as the temperature of a blackbody radiator having the smallest Euclidean distance from the color within the 1976 CIE uniform chromaticity space.

45

4. The EL display (2) of claim 1, wherein each EL emitter has a respective radiant efficiency and the radiant efficiencies of the two additional EL emitters (12, 14) are both higher than all of the respective radiant efficiencies of the gamut-defining EL emitters (6, 8, 10) and/or the EL display (2) further includes corresponding color filters (56, 58, 60, 62) for each of the three gamut-defining EL emitters (6, 8, 10) and one of the two additional EL emitters (12, 14).

50

5. The EL display (2) of claim 1, further including a non-emitting layer (166) having a variable thickness, wherein the non-emitting layer has a different thickness in the first additional EL emitter than the second additional EL emitter.

55

6. The EL display (2) of claim 5, wherein the non-emitting layer (166) is a transparent inorganic conductor or an organic semiconductor.

7. The EL display (2) of claim 5, wherein the non-emitting layer (166) has a different thickness in a first selected gamut-defining EL emitter than in a second selected gamut-defining EL emitter.

5 8. The EL display (2) of claim 7, wherein the first additional EL emitter (12) has a higher correlated color temperature than the second additional EL emitter (14), wherein the thickness of the non-emitting layer (166) within the gamut-defining EL emitter (10) for emitting blue colored light is equal to the thickness of the non-emitting layer (166) within the selected first additional EL emitter (12) or the thickness of the non-emitting layer (166) within the gamut-defining EL emitter (6, 8) for emitting red or green colored light is equal to the thickness of the non-emitting layer (166) within the second additional EL emitter (14), and wherein the correlated color temperature is calculated as the temperature of a blackbody radiator having the smallest Euclidean distance from the color within the 1976 CIE uniform chromaticity space.

9. An EL display (302), adapted to receive a three-color input image signal comprising:

15 a) three gamut-defining EL emitters (306, 308, 310) for emitting red, green, and blue colored light, wherein the three gamut-defining EL emitters (306, 308, 310) define a gamut and wherein each gamut-defining EL emitter (306, 308, 310) outputs light at a corresponding luminance value in response to a corresponding drive signal; b) cyan, magenta and yellow additional EL emitters (312, 314, 316) for respectively emitting cyan, magenta and yellow light, wherein each additional EL emitter (312, 314, 316) is within the gamut and has respective chromaticity coordinates, the line between the chromaticity coordinates of the cyan EL emitter (316) and the magenta EL emitter (314) intersects the Planckian Locus to define a first pseudo-blackbody point, the line between the chromaticity coordinates of the yellow EL emitter (312) and the magenta EL emitter (314) intersects the Planckian Locus to define a second pseudo-blackbody point, the distance between the first and second pseudo-blackbody points along the Planckian Locus is greater than 2000K, and wherein each additional EL emitter (312, 314, 316) outputs light at a corresponding luminance value in response to a corresponding drive signal;

c) means for providing a desired display white point provided as input; and

20 d) a controller (318) responsive to the provided display white point and the input image signal for providing first separate drive signals for the three gamut-defining EL emitters (306, 308, 310) and second separate drive signals for the three additional EL emitters (312, 314, 316), wherein the respective luminance values corresponding to the second separate drive signals are each a function of the input image signal and the distances between the chromaticity coordinates of the desired display white point provided as input and the first and second pseudo-blackbody points, the controller comprising:

35 a receive input image signal unit (184) for receiving the input image signal;  
a receive white point unit (188) for receiving a signal indicating the provided display white point provided as input;

a selected adaptation matrix unit (190) for selecting, based on the desired display white point, a color transform for rotating the input image signal to the desired display white point;

40 an apply adaptation matrix unit (192) for applying the transform to the decoded input image signal to normalize the input image signal to the desired display white point;

a determine first normalization matrix unit (194) for selecting, based on the desired display white point, an appropriate normalization matrix, wherein the determine first normalization matrix unit (194) determines which of the two pseudo-blackbody points is furthest from the chromaticity coordinates of the desired display white point provided as input and selects or computes a matrix to rotate the output of the apply adaptation matrix unit (192) from the display white point to the chromaticity coordinates of the pseudo-blackbody point furthest from the display white point;

an apply first normalization matrix unit (196) for applying the determined matrix to the input data stream after application of the adaptation matrix;

50 a first determine min unit (198) for determining a minimum value of three color channels for each pixel in the image signal after application of the first normalization matrix;

a first subtract min unit (200) for subtracting the minimum value from the each channel of the three channel signal for each pixel after application of the first normalization matrix;

a first add min unit (202) for adding the minimum value to an intensity for a first additional color channel corresponding to the pseudo-blackbody point furthest from the chromaticity coordinates of the desired display white point;

55 a determine second normalization matrix unit (204) for determining a matrix to rotate the color coordinates of the three nonzero color components to the color of the second pseudo-blackbody point;



an apply second normalization matrix unit (206) for applying the matrix to rotate the color coordinates of the three nonzero color components to the pseudo-blackbody point having chromaticity coordinates closest to the chromaticity coordinates of the desired display white point;  
 a second determine min unit (208) for determining the minimum of the resulting three nonzero channels for each pixel;  
 a second subtract min unit (210) for subtracting the minimum from the signal that is acquired after applying the second normalization matrix unit;  
 a second add min unit (212) for adding the minimum value to an intensity for a second additional color channel corresponding to the pseudo-blackbody point having chromaticity coordinates nearest the chromaticity coordinates of the desired display white point provided as input, and  
 a form first and second drive signal unit (214) for forming a first drive signal using the two zero values that are provided by the subtract min units (200, 212) together with the nonzero value for the resulting value for the remaining three color channel in the input image signal and for forming the second drive signal by transforming the intensities for the first and second additional color channels corresponding to the first and second pseudo-blackbody points to cyan, magenta, and yellow intensity values by multiplying each of these intensity values by two separate weighting values for the cyan, magenta, and yellow intensity values and summing these for each channel, wherein the weighting values represent a ratio of each of the additional EL emitters required to create each of the pseudo-blackbody points.

**10.** The EL display (302) of claim 9, wherein when the input image signal corresponds to the provided display white point, the sum of the luminance values of the additional EL emitters (312, 314, 316) defining a pseudo-blackbody point closest to the chromaticity coordinates of the provided display white point is higher than the sum of the luminance values of the additional EL emitters (312, 314, 316) defining a pseudo-blackbody point furthest from the provided display white point.

**11.** The EL display (302) of claim 9, wherein the second pseudo-blackbody point has a correlated color temperature of 6500K or less and the first pseudo-blackbody point has a correlated color temperature of 8000K or greater, wherein the correlated color temperature is calculated as the temperature of a blackbody radiator having the smallest Euclidean distance from the color within the 1976 CIE uniform chromaticity space.

**12.** The EL display (302) of claim 9, wherein each EL emitter has a respective radiant efficiency and the radiant efficiencies of the three additional EL emitters (312, 314, 316) are all higher than all of the respective radiant efficiencies of the gamut-defining EL emitters (306, 308, 310).

**13.** The EL display (302) of claim 9, further including corresponding color filters for each of the three gamut-defining EL emitters (306, 308, 310) and exactly two of the three additional EL emitters (312, 314, 316).

**14.** The EL display (2; 302) of claim 1 or 9, wherein the display white point has a corresponding luminance value and the controller (20; 318) adjusts the luminance value of the display white point in response to the input image signal.

**15.** The EL display (2; 302) of claim 5 or 14, wherein the controller (20; 318) adjusts the luminance value of the display white point in response to a saturation of the input image signal.

## Patentansprüche

**1.** EL-Anzeige (2), dazu ausgebildet, ein Dreifarbeneingabebildsignal zu empfangen, umfassend:

- a) drei Gamut definierende EL-Emitter (6, 8, 10) zum Emittieren von rot-, grün- und blau-farbigem Licht und einen ersten (12) und einen zweiten (14) zusätzlichen EL-Emitter zum Emittieren von zwei verschiedenen zusätzlichen Lichtfarben, die Chromatizitätskoordinaten aufweisen, die entsprechende Pseudo-Schwarzkörperpunkte spezifizieren, wobei die Chromatizitätskoordinaten der zwei zusätzlichen Lichtfarben innerhalb eines Gamuts, der durch die drei Gamut definierenden EL-Emitter (6, 8, 10) definiert ist, und innerhalb eines euklidischen Abstands von plus oder minus 0,05 von dem nächsten Punkt auf dem Planckschen Locus liegen, wobei die zwei Pseudo-Schwarzkörperpunkte entsprechende korrelierte Farbtemperaturen aufweisen, die um mindestens 2000K voneinander verschieden sind, und wobei jeder EL-Emitter Licht mit einem entsprechenden Luminanzwert ausgibt in Antwort auf ein entsprechendes Antriebssignal;
- b) Mittel zum Bereitstellen eines gewünschten Anzeigeweißpunkts, der als Eingabe bereitgestellt ist; und

c) ein Steuergerät (20) zum Bereitstellen, in Antwort auf den bereitgestellten Anzeigeweißpunkt und das Dreifarbeneingabebildsignal, von ersten separaten Antriebssignalen für die drei Gamut definierenden EL-Emitter (6, 8, 10) und von zweiten separaten Antriebssignalen für die zwei zusätzlichen EL-Emitter (12, 14), wobei die jeweiligen Luminanzwerte entsprechend den zweiten separaten Antriebssignalen jeweils eine Funktion des Eingabebildsignals und der Abstände zwischen dem gewünschten Anzeigeweißpunkt, der als Eingabe bereitgestellt ist, und den Pseudo-Schwarzkörperpunkten der zwei zusätzlichen Farben ist, wobei das Steuergerät umfasst:

eine Eingabebildsignal-Empfangseinheit (184) zum Empfangen des Eingabebildsignals;  
 eine Weißpunkt-Empfangseinheit (188) zum Empfangen eines Signals, das auf den bereitgestellten Anzeigeweißpunkt, der als Eingabe bereitgestellt ist, hinweist;  
 eine Ausgewählte-Adaptationsmatrix-Einheit (190) zum Auswählen, auf der Grundlage des gewünschten Anzeigeweißpunkts, einer Farbtransformation des Eingabebildsignals zu dem gewünschten Anzeigeweißpunkt;  
 eine Adaptationsmatrix-Anwendungseinheit (192) zum Anwenden der Transformation auf das decodierte Eingabebildsignal, um das Eingabebildsignal zu dem gewünschten Anzeigeweißpunkt zu normalisieren;  
 eine Erste-Normalisierungsmatrix-Bestimmungseinheit (194) zum Auswählen, auf der Grundlage des gewünschten Anzeigeweißpunkts, einer geeigneten Normalisierungsmatrix, wobei die Erste-Normalisierungsmatrix-Bestimmungseinheit (194) bestimmt, welcher der zwei zusätzlichen EL-Emitter einen Pseudo-Schwarzkörperpunkt aufweist, der von den Chromatizitätskoordinaten des Anzeigeweißpunkts am weitesten ist, und eine Matrix auswählt oder berechnet, um die Ausgabe der Adaptationsmatrix-Anwendungseinheit (192) von dem Anzeigeweißpunkt zu den Chromatizitätskoordinaten des zusätzlichen EL-Emitters zu rotieren, der einen Pseudo-Schwarzkörperpunkt am weitesten von dem Anzeigeweißpunkt aufweist;  
 eine Erste-Normalisierungsmatrix-Anwendungseinheit (196) zum Anwenden der bestimmten Matrix auf den Eingabedatenstrom nach Anwendung der Adaptationsmatrix;  
 eine erste Min-Bestimmungseinheit (198) zum Bestimmen eines Minimalwerts des Dreifarbenkanals für jeden Pixel in dem Bildsignal nach Anwendung der ersten Normalisierungsmatrix;  
 eine erste Min-Subtraktionseinheit (200) zum Subtrahieren des Minimalwerts von jedem Kanal des Dreikanalsignals für jeden Pixel nach Anwendung der ersten Normalisierungsmatrix;  
 eine erste Min-Additionseinheit (202) zum Addieren des Minimalwerts zu einer Intensität für einen zusätzlichen Farbkanal entsprechend dem EL-Emitter, der einen Pseudo-Schwarzkörperpunkt am weitesten von den Chromatizitätskoordinaten des gewünschten Anzeigeweißpunkt aufweist;  
 eine Zweite-Normalisationsmatrix-Bestimmungseinheit (204) zum Bestimmen einer Matrix, um die Farbkoordinaten der drei Nicht-null-Farbkomponenten zu der Farbe des zweiten Pseudo-Schwarzkörperpunkts zu rotieren;  
 eine Zweite-Normalisierungsmatrix-Anwendungseinheit (206) zum Anwenden der Matrix, um die Farbkoordinaten der drei Nicht-null-Farbkomponenten zu dem Pseudo-Schwarzkörperpunkt des EL-Emitters zu rotieren, der Chromatizitätskoordinaten am nächsten zu den Chromatizitätskoordinaten des gewünschten Anzeigeweißpunkts aufweist;  
 eine zweite Min-Bestimmungseinheit (208) zum Bestimmen des Minimums der resultierenden drei Nicht-null-Kanäle für jeden Pixel;  
 eine zweite Min-Subtraktionseinheit (210) zum Subtrahieren des Minimums von dem Signal, das erhalten wird nach Anwenden der zweiten Normalisierungsmatrixeinheit;  
 eine zweite Min-Additionseinheit (212) zum Addieren des Minimalwerts zu dem fünften Farbkanal entsprechend dem EL-Emitter, der Chromatizitätskoordinaten am nächsten zu den Chromatizitätskoordinaten des Anzeigeweißpunkts aufweist;  
 eine Erstes-und-Zweites-Antriebssignal-Formungseinheit (214) zum Formen eines ersten Antriebssignals unter Verwendung der zwei Nullwerte, die durch die Min-Subtraktionseinheiten (200, 212) bereitgestellt sind, zusammen mit dem Nicht-null-Wert für den resultierenden Wert für die übrigen drei Farbkanäle in dem Eingabebildsignal und zum Formen des zweiten Antriebssignals unter Verwendung der Werte für die zwei zusätzlichen Kanäle.

2. EL-Anzeige (2) nach Anspruch 1, bei der, wenn das Eingabebildsignal dem bereitgestellten Anzeigeweißpunkt entspricht, der zusätzliche EL-Emitter, der einen Pseudo-Schwarzkörperpunkt am nächsten zu den Chromatizitätskoordinaten des bereitgestellten Anzeigeweißpunkts aufweist, einen höheren Luminanzwert aufweist als der zusätzliche EL-Emitter, der den Pseudo-Schwarzkörperpunkt am weitesten von den Chromatizitätskoordinaten des bereitgestellten Anzeigeweißpunkts aufweist.

3. EL-Anzeige (2) nach Anspruch 1, bei der einer der Pseudo-Schwarzkörperpunkte der zwei zusätzlichen EL-Emitter (12, 14) eine korrelierte Farbtemperatur von 6500K oder weniger aufweist und der zweite eine korrelierte Farbtemperatur von 8000K oder größer aufweist, wobei die korrelierte Farbtemperatur als die Temperatur eines Schwarzkörperstrahlers berechnet ist, der den kleinsten euklidischen Abstand von der Farbe innerhalb des 1976-CIE einheitlichen Chromatizitätsraums aufweist.
4. EL-Anzeige (2) nach Anspruch 1, bei der jeder EL-Emitter eine jeweilige Strahlungseffizienz aufweist und die Strahlungseffizienzen der zwei zusätzlichen EL-Emitter (12, 14) beide höher sind als alle jeweiligen Strahlungseffizienzen der Gamut definierenden EL-Emitter (6, 8, 10), und/oder die EL-Anzeige (2) ferner entsprechende Farbfilter (56, 58, 60, 62) für jeden der drei Gamut definierenden EL-Emitter (6, 8, 10) und einen der zwei zusätzlichen EL-Emitter (12, 14) enthält.
5. EL-Anzeige (2) nach Anspruch 1, ferner enthaltend eine nicht emittierende Schicht (166), die eine veränderliche Dicke aufweist, wobei die nicht emittierende Schicht in dem ersten zusätzlichen EL-Emitter eine andere Dicke als in dem zweiten zusätzlichen EL-Emitter aufweist.
6. EL-Anzeige (2) nach Anspruch 5, bei der die nicht emittierende Schicht (166) ein transparenter anorganischer Leiter oder ein organischer Halbleiter ist.
7. EL-Anzeige (2) nach Anspruch 5, bei der die nicht emittierende Schicht (166) in einem ersten ausgewählten Gamut definierenden EL-Emitter eine andere Dicke als in einem zweiten ausgewählten Gamut definierenden EL-Emitter aufweist.
8. EL-Anzeige (2) nach Anspruch 7, bei der der erste zusätzliche EL-Emitter (12) eine höhere korrelierte Farbtemperatur als der zweite zusätzliche EL-Emitter (14) aufweist, wobei die Dicke der nicht emittierenden Schicht (166) innerhalb des Gamut definierenden EL-Emitters (10) zum Emittieren des blaufarbigem Lichts gleich ist wie die Dicke der nicht emittierenden Schicht (166) innerhalb des ausgewählten ersten zusätzlichen EL-Emitters (12), oder die Dicke der nicht emittierenden Schicht (166) innerhalb des Gamut definierenden EL-Emitters (6, 8) zum Emittieren des rot- oder grün-farbigem Lichts gleich ist wie die Dicke der nicht emittierenden Schicht (166) innerhalb des zweiten zusätzlichen EL-Emitters (14), und wobei die korrelierte Farbtemperatur als die Temperatur eines Schwarzkörperstrahlers berechnet ist, der den kleinsten euklidischen Abstand von der Farbe innerhalb des 1976-CIE einheitlichen Chromatizitätsraums aufweist.
9. EL-Anzeige (302), dazu ausgebildet, ein Dreifarbeneingabebildsignal zu empfangen, umfassend:
- drei Gamut definierende EL-Emitter (306, 308, 310) zum Emittieren von rot-, grün- und blau-farbigem Licht, wobei die drei Gamut definierenden EL-Emitter (306, 308, 310) einen Gamut definieren und wobei jeder Gamut definierende EL-Emitter (306, 308, 310) Licht mit einem entsprechenden Luminanzwert ausgibt in Antwort auf ein entsprechendes Antriebssignal;
  - cyan, magenta und gelbe zusätzliche EL-Emitter (312, 314, 316) zum jeweiligen Emittieren von cyan, magenta und gelbem Licht, wobei jeder zusätzliche EL-Emitter (312, 314, 316) innerhalb des Gamuts liegt und jeweils Chromatizitätskoordinaten aufweist, die Linie zwischen den Chromatizitätskoordinaten des cyan EL-Emitters (316) und des magenta EL-Emitters (314) den Planckschen Locus schneidet, um einen ersten Pseudo-Schwarzkörperpunkt zu definieren, die Linie zwischen den Chromatizitätskoordinaten des gelben EL-Emitters (312) und des magenta EL-Emitters (314) den Planckschen Locus schneidet, um einen zweiten Pseudo-Schwarzkörperpunkt zu definieren, der Abstand zwischen dem ersten und dem zweiten Pseudo-Schwarzkörperpunkt entlang dem Planckschen Locus größer ist als 2000K, und wobei jeder zusätzliche EL-Emitter (312, 314, 316) Licht mit einem entsprechenden Luminanzwert ausgibt in Antwort auf ein entsprechendes Antriebssignal;
  - Mittel zum Bereitstellen eines gewünschten Anzeigeweißpunkt, der als Eingabe bereitgestellt ist; und
  - ein Steuergerät (318) zum Bereitstellen, in Antwort auf den bereitgestellten Anzeigeweißpunkt und das Eingabebildsignal, von ersten separaten Antriebssignalen für die drei Gamut definierenden EL-Emitter (306, 308, 310) und von zweiten separaten Antriebssignalen für die drei zusätzlichen EL-Emitter (312, 314, 316), wobei die jeweiligen Luminanzwerte entsprechend den zweiten separaten Antriebssignalen jeweils eine Funktion des Eingabebildsignals und der Abstände zwischen den Chromatizitätskoordinaten des gewünschten Anzeigeweißpunkts, der als Eingabe bereitgestellt ist, und dem ersten und dem zweiten Pseudo-Schwarzkörperpunkt sind, wobei das Steuergerät umfasst:

eine Eingabebildsignal-Empfangseinheit (184) zum Empfangen des Eingabebildsignals;

eine Weißpunkt-Empfangseinheit (88) zum Empfangen eines Signals, das auf den bereitgestellten Anzeigeweißpunkt, der als Eingabe bereitgestellt ist, hinweist;  
 eine Ausgewählte-Adaptationsmatrix-Einheit (190) zum Auswählen, auf der Grundlage des gewünschten Anzeigeweißpunkts, einer Farbtransformation zum Rotieren des Eingabebildsignals zu dem gewünschten Anzeigeweißpunkt;  
 eine Adaptationsmatrix-Anwendungseinheit (192) zum Anwenden der Transformation auf das decodierte Eingabebildsignal, um das Eingabebildsignal zu dem gewünschten Anzeigeweißpunkt zu normalisieren;  
 eine Erste-Normalisierungsmatrix-Bestimmungseinheit (194) zum Auswählen, auf der Grundlage des gewünschten Anzeigeweißpunkts, einer geeigneten Normalisierungsmatrix, wobei die Erste-Normalisierungsmatrix-Bestimmungseinheit (194) bestimmt, welcher der zwei Pseudo-Schwarzkörperpunkte am weitesten von Chromatizitätskoordinaten des gewünschten Anzeigeweißpunkts, der als Eingabe bereitgestellt ist, liegt, und eine Matrix auswählt oder berechnet, um die Ausgabe der Adaptationsmatrix-Anwendungseinheit (192) von dem Anzeigeweißpunkt zu den Chromatizitätskoordinaten des Pseudo-Schwarzkörperpunkts zu rotieren, der am weitesten von dem Anzeigeweißpunkt liegt;  
 eine Erste-Normalisierungsmatrix-Anwendungseinheit (196) zum Anwenden der bestimmten Matrix auf den Eingabedatenstrom nach Anwendung der Adaptationsmatrix;  
 eine erste Min-Bestimmungseinheit (198) zum Bestimmen eines Minimalwerts der drei Farbkanäle für jeden Pixel in dem Bildsignal nach Anwendung der ersten Normalisierungsmatrix;  
 eine erste Min-Subtraktionseinheit (200) zum Subtrahieren des Minimalwerts von jedem Kanal des Dreikanalsignals für jeden Pixel nach Anwendung der ersten Normalisierungsmatrix;  
 eine erste Min-Additionseinheit (202) zum Addieren des Minimalwerts zu einer Intensität für einen ersten zusätzlichen Farbkanal entsprechend dem Pseudo-Schwarzkörperpunkt, der am weitesten von den Chromatizitätskoordinaten des gewünschten Anzeigeweißpunkts liegt;  
 eine Zweite-Normalisierungsmatrix-Bestimmungseinheit (204) zum Bestimmen einer Matrix, um die Farbkoordinaten der drei Nicht-null-Farbkomponenten zu der Farbe des zweiten Pseudo-Schwarzkörperpunkts zu rotieren;  
 eine Zweite-Normalisierungsmatrix-Anwendungseinheit (206) zum Anwenden der Matrix, um die Farbkoordinaten der drei Nicht-null-Farbkomponenten zu dem Pseudo-Schwarzkörperpunkt zu rotieren, der Chromatizitätskoordinaten am nächsten zu den Chromatizitätskoordinaten des gewünschten Anzeigeweißpunkts aufweist;  
 eine zweite Min-Bestimmungseinheit (208) zum Bestimmen des Minimums der resultierenden drei Nicht-null-Kanäle für jeden Pixel;  
 eine zweite Min-Subtraktionseinheit (210) zum Subtrahieren des Minimums von dem Signal, das erhalten ist nach Anwendung der zweiten Normalisierungsmatrix-Einheit;  
 eine zweite Min-Additionseinheit (212) zum Addieren des Minimalwerts zu einer Intensität für einen zweiten zusätzlichen Farbkanal entsprechend dem Pseudo-Schwarzkörperpunkt, der Chromatizitätskoordinaten am nächsten den Chromatizitätskoordinaten des gewünschten Anzeigeweißpunkts, der als Eingabe bereitgestellt ist, aufweist, und  
 eine Erstes-und-Zweites-Antriebssignal-Formungseinheit (214) zum Formen eines ersten Antriebsignals unter Verwendung der zwei Nullwerte, die bereitgestellt sind durch die Min-Subtraktionseinheiten (200, 212), zusammen mit dem Nicht-nullWert für den resultierenden Wert für den übrigen Dreifarbkkanal in dem Eingabebildsignal und zum Formen des zweiten Antriebsignals durch Transformieren der Intensitäten für den ersten und den zweiten zusätzlichen Farbkanal entsprechend dem ersten und dem zweiten Pseudo-Schwarzkörperpunkt zu cyan, magenta und gelben Intensitätswerten durch Multiplizieren jedes dieser Intensitätswerte mit zwei separaten Gewichtungswerten für die cyan, magenta und gelben Intensitätswerte und Summieren dieser für jeden Kanal, wobei die Gewichtungswerte ein Verhältnis jedes der zusätzlichen EL-Emitters darstellt, das erforderlich ist, um jeden der Pseudo-Schwarzkörperpunkte zu erzeugen.

10. EL-Anzeige (302) nach Anspruch 9, bei der, wenn das Eingabebildsignal dem bereitgestellten Anzeigeweißpunkt entspricht, die Summe der Luminanzwerte der zusätzlichen EL-Emitter (312, 314, 316), die einen Pseudo-Schwarzkörperpunkt am nächsten zu den Chromatizitätskoordinaten des bereitgestellten Anzeigeweißpunkts definieren, höher ist als die Summe der Luminanzwerte der zusätzlichen EL-Emitter (312, 314, 316), die einen Pseudo-Schwarzkörperpunkt am weitesten von dem bereitgestellten Anzeigeweißpunkt definieren.

11. EL-Anzeige (302) nach Anspruch 9, bei der der zweite Pseudo-Schwarzkörperpunkt eine korrelierte Farbtemperatur von 6500K oder weniger aufweist und der erste Pseudo-Schwarzkörperpunkt eine korrelierte Farbtemperatur von 8000K oder größer aufweist, wobei die korrelierte Farbtemperatur als die Temperatur eines Schwarzkörperstrahlers berechnet ist, der den kleinsten euklidischen Abstand von der Farbe innerhalb des 1976-CIE-einheitlichen Chro-

matizitätsraums aufweist.

- 5 12. EL-Anzeige (302) nach Anspruch 9, bei der jeder EL-Emitter eine jeweilige Strahlungseffizienz aufweist und die Strahlungseffizienzen der drei zusätzlichen EL-Emitter (312, 314, 316) alle höher sind als die jeweiligen Strahlungseffizienzen der Gamut definierenden EL-Emitter (306, 308, 310).
13. EL-Anzeige (302) nach Anspruch 9, ferner umfassend entsprechende Farbfilter für jeden der drei Gamut definierenden EL-Emitter (306, 308, 310) und genau zwei der drei zusätzlichen EL-Emitter (312, 314, 316).
- 10 14. EL-Anzeige (2; 302) nach Anspruch 1 oder 9, bei der der Anzeigeweißpunkt einen entsprechenden Luminanzwert aufweist und das Steuergerät (20; 318) den Luminanzwert des Anzeigeweißpunkts in Antwort auf das Eingabebildsignal einstellt.
- 15 15. EL-Anzeige (2; 302) nach Anspruch 5 oder 14, bei der das Steuergerät (20; 318) den Luminanzwert des Anzeigeweißpunkts in Antwort auf eine Saturierung des Eingabebildsignals einstellt.

### Revendications

- 20 1. Afficheur EL (2) adapté à recevoir un signal d'image d'entrée en trois couleurs, comprenant :
- 25 a) trois émetteurs EL (6, 8, 10) définissant une gamme pour émettre une lumière colorée rouge, verte et bleue et un premier (12) et un deuxième (14) émetteur EL additionnel pour émettre deux couleurs de lumière additionnelles différentes ayant des coordonnées de chromaticité spécifiant des points respectifs de pseudo-corps noirs, les coordonnées de chromaticité des deux couleurs de lumière additionnelles se trouvant à l'intérieur d'une gamme définie par les trois émetteurs EL (6, 8, 10) définissant une gamme et dans lequel une distance euclidienne de plus ou moins 0,05 du point le plus proche sur le lieu géométrique planckien, dans lequel les deux points de pseudo-corps noirs ont des températures de couleur corrélées respectives qui diffèrent d'au moins 2 000 K, et dans lequel chaque émetteur EL délivre en sortie une lumière à une valeur de luminance correspondante en réponse à un signal d'excitation correspondant ;
- 30 b) un moyen pour fournir un point blanc d'affichage désiré fourni comme entrée ; et
- c) un contrôleur (20) répondant au point blanc d'affichage fourni et au signal d'image d'entrée en trois couleurs pour fournir des premiers signaux d'excitation séparés pour les trois émetteurs EL (6, 8, 10) définissant une gamme et des deuxièmes signaux d'excitation séparés pour les deux émetteurs EL (12, 14) additionnels, dans lequel les valeurs de luminance respectives correspondant aux deuxièmes signaux d'excitation séparés sont chacune une fonction du signal d'image d'entrée et des distances entre le point blanc d'affichage désiré fourni comme entrée et les points de pseudo-corps noirs des deux couleurs additionnelles, le contrôleur comprenant :
- 35 une unité (184) de réception de signal d'image d'entrée pour recevoir le signal d'image d'entrée ;
- 40 une unité (188) de réception de point blanc pour recevoir un signal indiquant le point blanc d'affichage fourni, fourni comme l'entrée ;
- une unité (190) de sélection de matrice d'adaptation pour sélectionner, sur la base du point blanc d'affichage désiré, une transformation de couleur pour faire tourner le signal d'image d'entrée jusqu'au point blanc d'affichage désiré ;
- 45 une unité (192) d'application de matrice d'adaptation pour appliquer la transformation au signal d'image d'entrée décodé pour normaliser le signal d'image d'entrée par rapport au point blanc d'affichage désiré ;
- une unité (194) de détermination de première matrice de normalisation pour sélectionner, sur la base du point blanc d'affichage désiré, une matrice de normalisation appropriée, dans lequel l'unité (194) de détermination de première matrice de normalisation détermine lequel des deux émetteurs EL additionnels a un point de pseudo-corps noir le plus éloigné des coordonnées de chromaticité du point blanc d'affichage et sélectionne ou calcule une matrice pour faire tourner la sortie de l'unité (192) d'application de matrice d'adaptation du point blanc d'affichage aux coordonnées de chromaticité de l'émetteur EL additionnel ayant un point de pseudo-corps noir le plus éloigné du point blanc d'affichage ;
- 50 une unité (196) d'application de première matrice de normalisation pour appliquer la matrice déterminée au flux de données d'entrée après application de la matrice d'adaptation ;
- 55 une première unité (198) de détermination de minimum pour déterminer une valeur minimum des trois canaux de couleur pour chaque pixel dans le signal d'image après application de la première matrice de normalisation ;

## EP 2 430 630 B1

une première unité (200) de soustraction de minimum pour soustraire la valeur minimum de chaque canal parmi les trois signaux de canal après application de la première matrice de normalisation ;  
une première unité (202) d'ajout de minimum pour ajouter la valeur minimum à une intensité pour un canal de couleur additionnelle correspondant à l'émetteur EL ayant un point de pseudo-corps noir le plus éloigné des coordonnées de chromaticité du point blanc d'affichage désiré ;  
une unité (204) de détermination de deuxième matrice de normalisation pour déterminer une matrice pour faire tourner les coordonnées de couleur des trois composantes de couleur différentes de zéro jusqu'à la couleur du deuxième point de pseudo-corps noir ;  
une unité (206) d'application de deuxième matrice de normalisation pour appliquer la matrice pour faire tourner les coordonnées de couleur des trois composantes de couleur différentes de zéro jusqu'au point de pseudo-corps noir de l'émetteur ayant des coordonnées de chromaticité les plus proches des coordonnées de chromaticité du point blanc d'affichage désiré ;  
une deuxième unité (208) de détermination de minimum pour déterminer le minimum des trois canaux différents de zéro résultants pour chaque pixel ;  
une deuxième unité (210) de soustraction de minimum pour soustraire le minimum du signal qui est acquis après application de l'unité de deuxième matrice de normalisation ;  
une deuxième unité (212) d'ajout pour ajouter la valeur minimum au cinquième canal de couleur correspondant à l'émetteur EL ayant des coordonnées de chromaticité les plus proches des coordonnées de chromaticité du point blanc d'affichage ;  
une unité (214) de formation de premier et deuxième signaux d'excitation pour former un premier signal d'excitation en utilisant les deux valeurs zéro qui sont fournies par les unités (200, 212) de soustraction de minimum en même temps que la valeur différente de zéro pour la valeur résultante pour les trois canaux de couleur restants dans le signal d'image d'entrée et pour former le deuxième signal d'excitation en utilisant les valeurs pour les deux canaux additionnels.

2. Afficheur EL (2) selon la revendication 1, dans lequel, lorsque le signal d'image d'entrée correspond au point blanc d'affichage fourni, l'émetteur EL additionnel ayant un point de pseudo-corps noir le plus proche des coordonnées de chromaticité du point blanc d'affichage fourni a une valeur de luminance supérieure à l'émetteur EL additionnel ayant le point de pseudo-corps noir le plus éloigné des coordonnées de chromaticité du point blanc d'affichage fourni.
3. Afficheur EL (2) selon la revendication 1, dans lequel un des points de pseudo-corps noirs des deux émetteurs EL (12, 14) additionnels a une température de couleur corrélée de 6 500 K ou moins et le deuxième a une température de couleur corrélée de 8 000 K ou plus, dans lequel la température de couleur corrélée est calculée comme la température d'un radiateur intégral ayant la plus petite distance euclidienne par rapport à la couleur dans l'espace chromatique uniforme CIE 1976.
4. Afficheur EL (2) selon la revendication 1, dans lequel chaque émetteur EL a un rendement énergétique respectif et les rendements énergétiques des deux émetteurs EL (12, 14) additionnels sont tous les deux supérieurs à la totalité des rendements énergétiques respectifs des émetteurs EL (6, 8, 10) définissant une gamme et/ou l'afficheur EL (2) inclut en outre des filtres couleur (56, 58, 60, 62) correspondants pour chacun des trois émetteurs EL (6, 8, 10) définissant une gamme et un des deux émetteurs EL (12, 14) additionnels.
5. Afficheur EL (2) selon la revendication 1, incluant en outre une couche non émettrice (166) ayant une épaisseur variable, dans lequel la couche non émettrice a une épaisseur différente dans le premier émetteur EL additionnel par rapport au deuxième émetteur EL additionnel.
6. Afficheur EL (2) selon la revendication 5, dans lequel la couche non émettrice (166) est un conducteur inorganique transparent ou un conducteur organique.
7. Afficheur EL (2) selon la revendication 5, dans lequel la couche non émettrice (166) a une épaisseur différente dans le premier émetteur EL définissant une gamme sélectionné par rapport à un deuxième émetteur EL définissant une gamme sélectionné.
8. Afficheur EL (2) selon la revendication 7, dans lequel le premier émetteur EL additionnel (12) a une température de couleur corrélée supérieure à celle du deuxième émetteur EL additionnel (14), dans lequel l'épaisseur de la couche non émettrice (166) à l'intérieur de l'émetteur EL définissant une gamme (10) pour émettre une lumière colorée bleue est égale à l'épaisseur de la couche non émettrice (166) à l'intérieur du premier émetteur EL additionnel (12) sélectionné ou l'épaisseur de la couche non émettrice (166) à l'intérieur de l'émetteur EL définissant une gamme

(6, 8) pour émettre une lumière colorée rouge ou verte est égale à l'épaisseur de la couche non émettrice (166) à l'intérieur du deuxième émetteur EL additionnel (14), et dans lequel la température de couleur corrélée est calculée comme la température d'un radiateur intégral ayant la plus petite distance euclidienne par rapport à la couleur dans l'espace chromatique uniforme CIE 1976.

5

9. Afficheur EL (302) adapté à recevoir un signal d'image d'entrée en trois couleurs, comprenant :

10

a) trois émetteurs EL (306, 308, 310) définissant une gamme pour émettre une lumière colorée rouge, verte et bleue, dans lequel les trois émetteurs EL (306, 308, 310) définissent une gamme et dans lequel chaque émetteur EL (306, 308, 310) délivre en sortie une lumière à une valeur de luminance correspondante en réponse à un signal d'excitation correspondant ;

15

b) des émetteurs EL additionnels (312, 314, 316) cyan, magenta et jaune pour émettre respectivement une lumière cyan, magenta et jaune, dans lequel chaque émetteur EL additionnel (312, 314, 316) est à l'intérieur de la gamme et a des coordonnées de chromaticité respectives, la ligne entre les coordonnées de chromaticité de l'émetteur EL cyan (316) et l'émetteur EL magenta (314) coupe le lieu géométrique planckien pour définir un premier point de pseudo-corps noir, la ligne entre les coordonnées de chromaticité de l'émetteur EL jaune (312) et l'émetteur EL magenta (314) coupe le lieu géométrique planckien pour définir un deuxième point de pseudo-corps noir, la distance entre les premier et deuxième points de pseudo-corps noirs le long du lieu géométrique planckien est supérieure à 2 000 K, et dans lequel chaque émetteur EL additionnel (312, 314, 316) délivre en sortie une lumière à une valeur de luminance correspondante en réponse à un signal d'excitation correspondant ;

20

c) un moyen pour fournir un point blanc d'affichage désiré fourni comme entrée ; et

25

d) un contrôleur (318) répondant au point blanc d'affichage fourni et au signal d'image d'entrée en trois couleurs pour fournir des premiers signaux d'excitation séparés pour les trois émetteurs EL (306, 308, 310) définissant une gamme et des deuxièmes signaux d'excitation séparés pour les trois émetteurs EL additionnels (312, 314, 316), dans lequel les valeurs de luminance respectives correspondant aux deuxièmes signaux d'excitation séparés sont chacune une fonction du signal d'image d'entrée et des distances entre les coordonnées de chromaticité du point blanc d'affichage désiré fourni comme entrée et les premier et deuxième points de pseudo-corps noirs, le contrôleur comprenant :

30

une unité (184) de réception de signal d'image d'entrée pour recevoir le signal d'image d'entrée ;

une unité (188) de réception de point blanc pour recevoir un signal indiquant le point blanc d'affichage fourni, fourni comme l'entrée ;

35

une unité (190) de sélection de matrice d'adaptation pour sélectionner, sur la base du point blanc d'affichage désiré, une transformation de couleur pour faire tourner le signal d'image d'entrée jusqu'au point blanc d'affichage désiré ;

40

une unité (192) d'application de matrice d'adaptation pour appliquer la transformation au signal d'image d'entrée décodé pour normaliser le signal d'image d'entrée par rapport au point blanc d'affichage désiré ;

une unité (194) de détermination de première matrice de normalisation pour sélectionner, sur la base du point blanc d'affichage désiré, une matrice de normalisation appropriée, dans lequel l'unité (194) de détermination de première matrice de normalisation détermine lequel des deux points de pseudo-corps noirs est le plus éloigné des coordonnées de chromaticité du point blanc d'affichage désiré comme entrée et sélectionne ou calcule une matrice pour faire tourner la sortie de l'unité (192) d'application de matrice d'adaptation du point blanc d'affichage aux coordonnées de chromaticité du point de pseudo-corps noir le plus éloigné du point blanc d'affichage ;

45

une unité (196) d'application de première matrice de normalisation pour appliquer la matrice déterminée au flux de données d'entrée après application de la matrice d'adaptation ;

une première unité (198) de détermination de minimum pour déterminer une valeur minimum de trois canaux de couleur pour chaque pixel dans le signal d'image après application de la première matrice de normalisation ;

50

une première unité (200) de soustraction de minimum pour soustraire la valeur minimum de chaque canal parmi les trois signaux de canal pour chaque pixel après application de la première matrice de normalisation ;

une première unité (202) d'ajout de minimum pour ajouter la valeur minimum à une intensité pour un premier canal de couleur additionnelle correspondant au point de pseudo-corps noir le plus éloigné des coordonnées de chromaticité du point blanc d'affichage désiré ;

55

une unité (204) de détermination de deuxième matrice de normalisation pour déterminer une matrice pour faire tourner les coordonnées de couleur des trois composantes de couleur différentes de zéro jusqu'à la couleur du deuxième point de pseudo-corps noir ;

une unité (206) d'application de deuxième matrice de normalisation pour appliquer la matrice pour faire tourner les coordonnées de couleur des trois composantes de couleur différentes de zéro jusqu'au point de pseudo-corps noir ayant des coordonnées de chromaticité les plus proches des coordonnées de chromaticité du point blanc d'affichage désiré ;

une deuxième unité (208) de détermination de minimum pour déterminer le minimum des trois canaux différents de zéro résultants pour chaque pixel ;

une deuxième unité (210) de soustraction de minimum pour soustraire le minimum du signal qui est acquis après application de l'unité de deuxième matrice de normalisation ;

une deuxième unité (212) d'ajout pour ajouter la valeur minimum à une intensité pour un deuxième canal de couleur additionnelle correspondant au point de pseudo-corps noir ayant des coordonnées de chromaticité les plus proches des coordonnées de chromaticité du point blanc d'affichage désiré fourni comme entrée ; et

une unité (214) de formation de premier et deuxième signaux d'excitation pour former un premier signal d'excitation en utilisant les deux valeurs zéro qui sont fournies par les unités (200, 212) de soustraction de minimum en même temps que la valeur différente de zéro pour la valeur résultante pour les trois canaux de couleur restants dans le signal d'image d'entrée et pour former le deuxième signal d'excitation en transformant les intensités pour les premier et deuxième canaux de couleur additionnelle correspondant au premier et deuxième points de pseudo-corps noirs en des valeurs d'intensité cyan, magenta et jaune en multipliant chacune de ces valeurs d'intensité par deux valeurs séparées de pondération pour les valeurs d'intensité cyan, magenta et jaune et en additionnant celles-ci pour chaque canal, dans lequel les valeurs de pondération représentent un rapport de chacun des émetteurs EL additionnels requis pour créer chacun des points de pseudo-corps noirs.

**10.** Afficheur EL (302) selon la revendication 9, dans lequel, lorsque le signal d'image d'entrée correspond au point blanc d'affichage fourni, la somme des valeurs de luminance des émetteurs EL additionnels (312, 314, 316) définissant un point de pseudo-corps noir le plus proche des coordonnées de chromaticité du point blanc d'affichage fourni est supérieure à la somme des valeurs de luminance des émetteurs EL additionnels (312, 314, 316) définissant un point de pseudo-corps noir le plus éloigné du point blanc d'affichage fourni.

**11.** Afficheur EL (302) selon la revendication 9, dans lequel le deuxième point de pseudo-corps noir a une température de couleur corrélée de 6 500 K ou moins et le premier point de pseudo-corps noir a une température de couleur corrélée de 8 000 K ou plus, dans lequel la température de couleur corrélée est calculée comme la température d'un radiateur intégral ayant la plus petite distance euclidienne par rapport à la couleur dans l'espace chromatique uniforme CIE 1976.


**12.** Afficheur EL (302) selon la revendication 9, dans lequel chaque émetteur EL a un rendement énergétique respectif et les rendements énergétiques des trois émetteurs EL additionnels (312, 314, 316) sont tous les deux supérieurs à la totalité des rendements énergétiques respectifs des émetteurs EL (306, 308, 310) définissant une gamme.

**13.** Afficheur EL (302) selon la revendication 9, incluant en outre des filtres couleur correspondants pour chacun des trois émetteurs EL (306, 308, 310) définissant une gamme et exactement deux des trois émetteurs EL additionnels (312, 314, 316).


**14.** Afficheur EL (2 ; 302) selon la revendication 1 ou 9, dans lequel le point blanc d'affichage a une valeur de luminance correspondante et le contrôleur (20 ; 318) ajuste la valeur de luminance du point blanc d'affichage en réponse au signal d'image d'entrée.

**15.** Afficheur EL (2 ; 302) selon la revendication 5 ou 14, dans lequel le contrôleur (20 ; 318) ajuste la valeur de luminance du point blanc d'affichage en réponse à une saturation du signal d'image d'entrée.



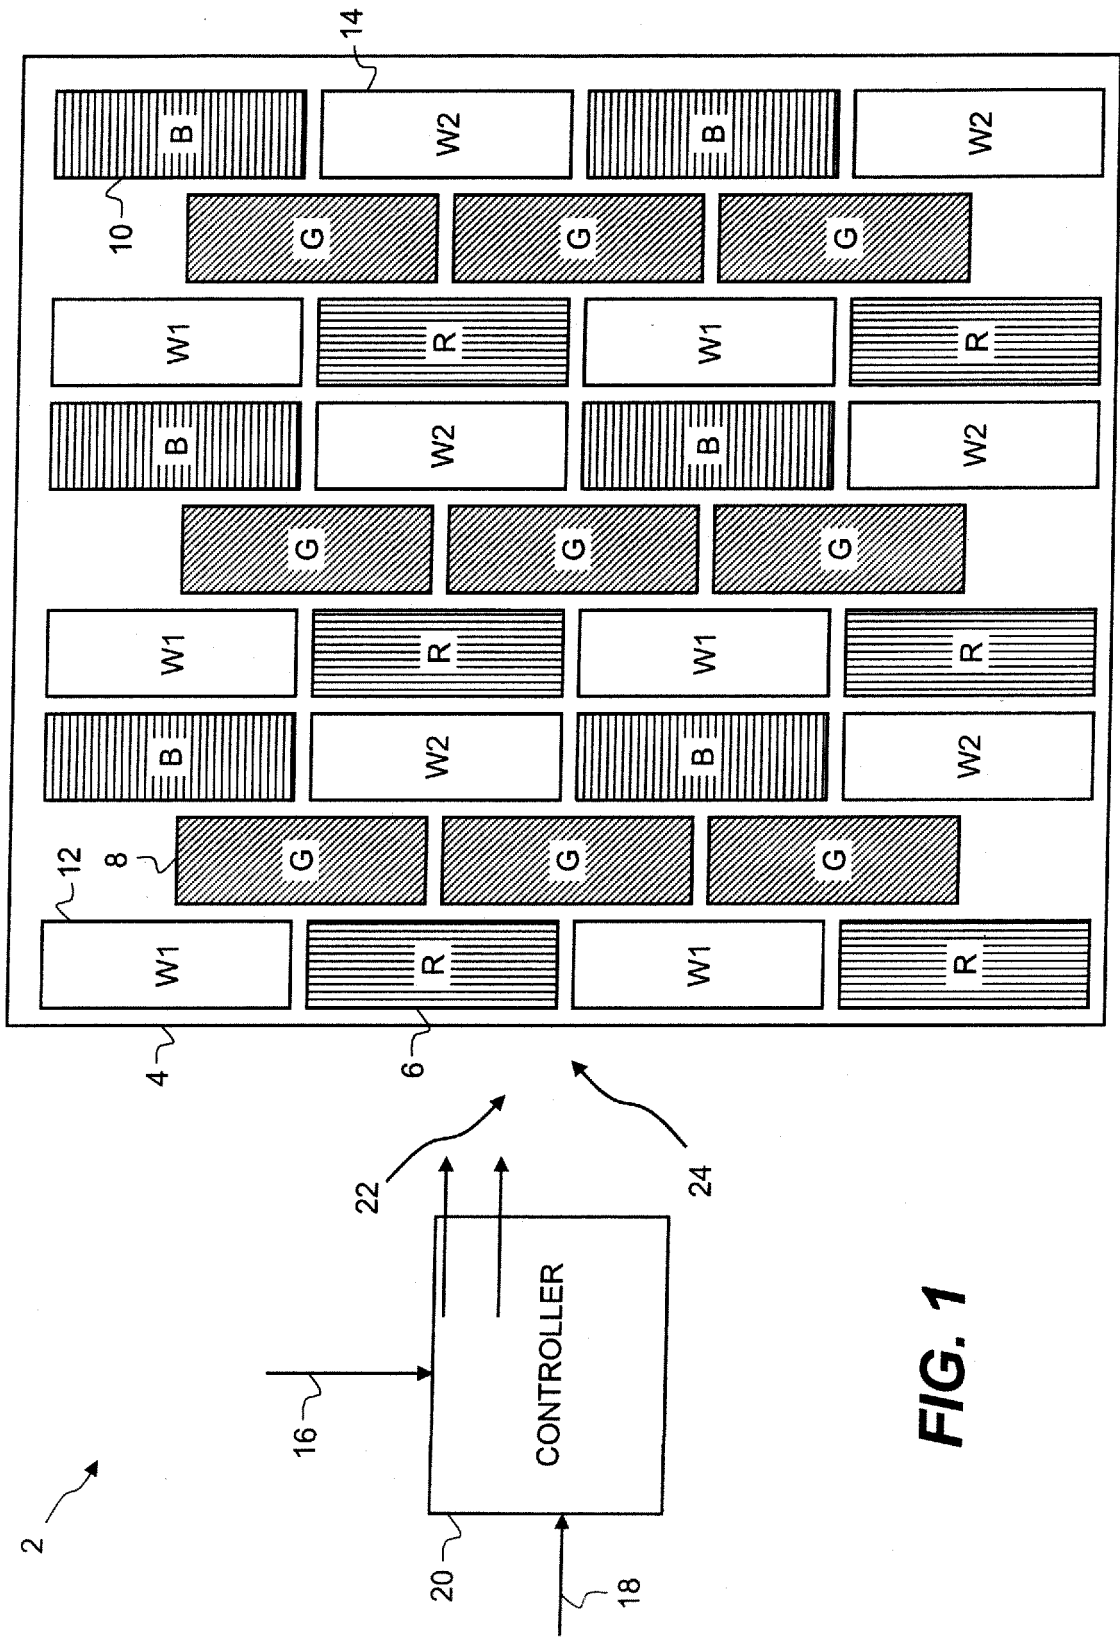

**FIG. 1**

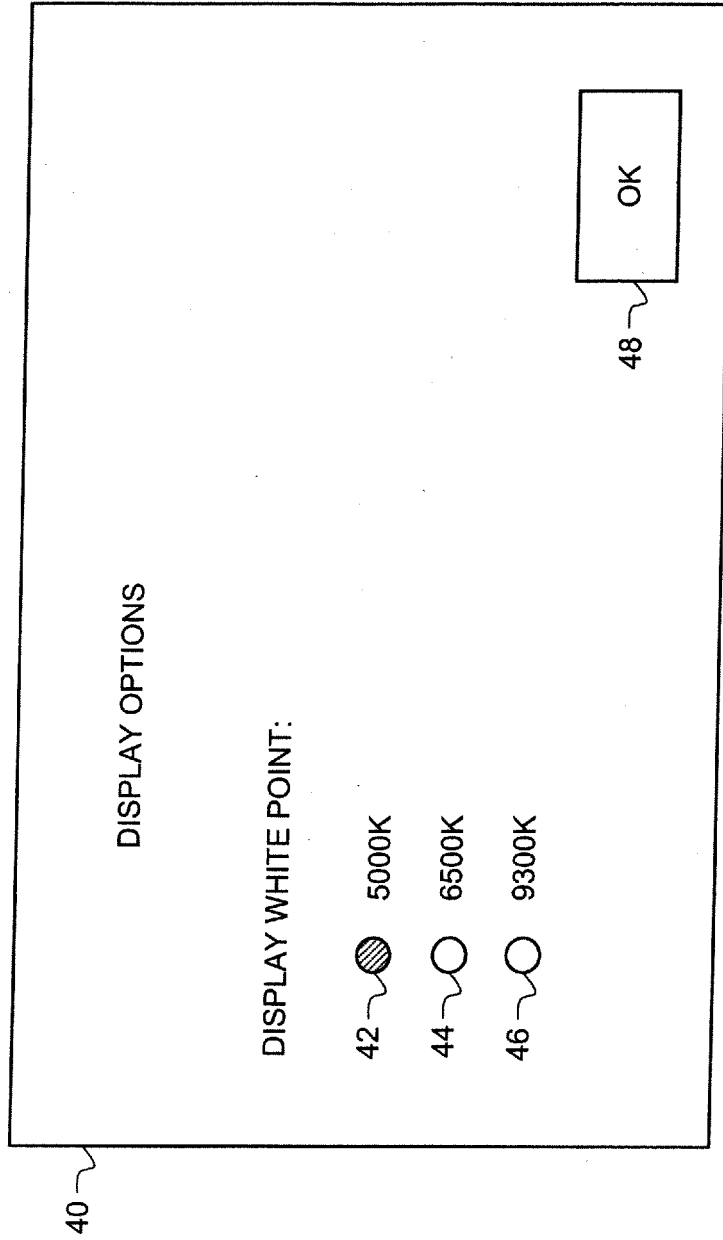

**FIG. 2**


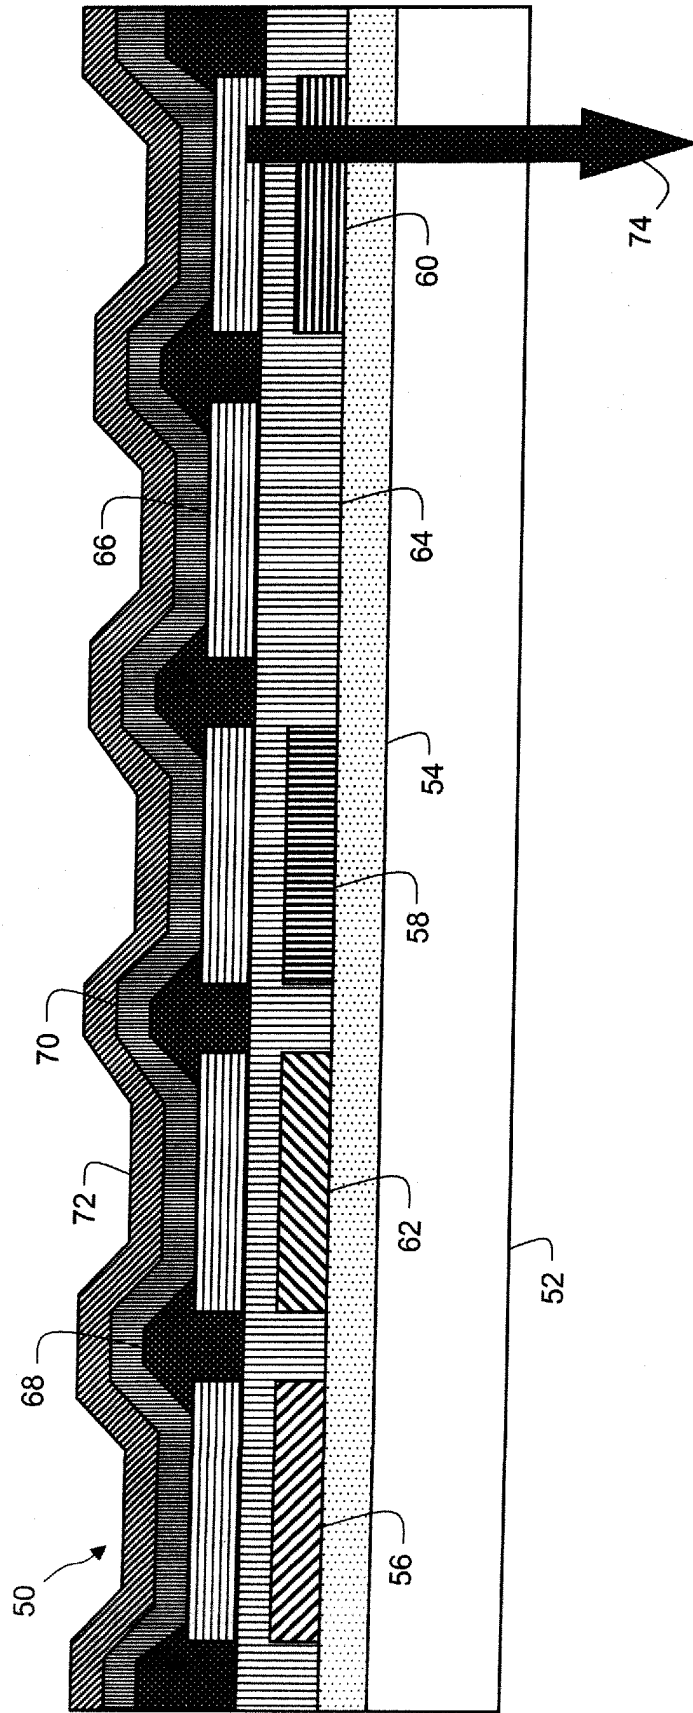


FIG. 3

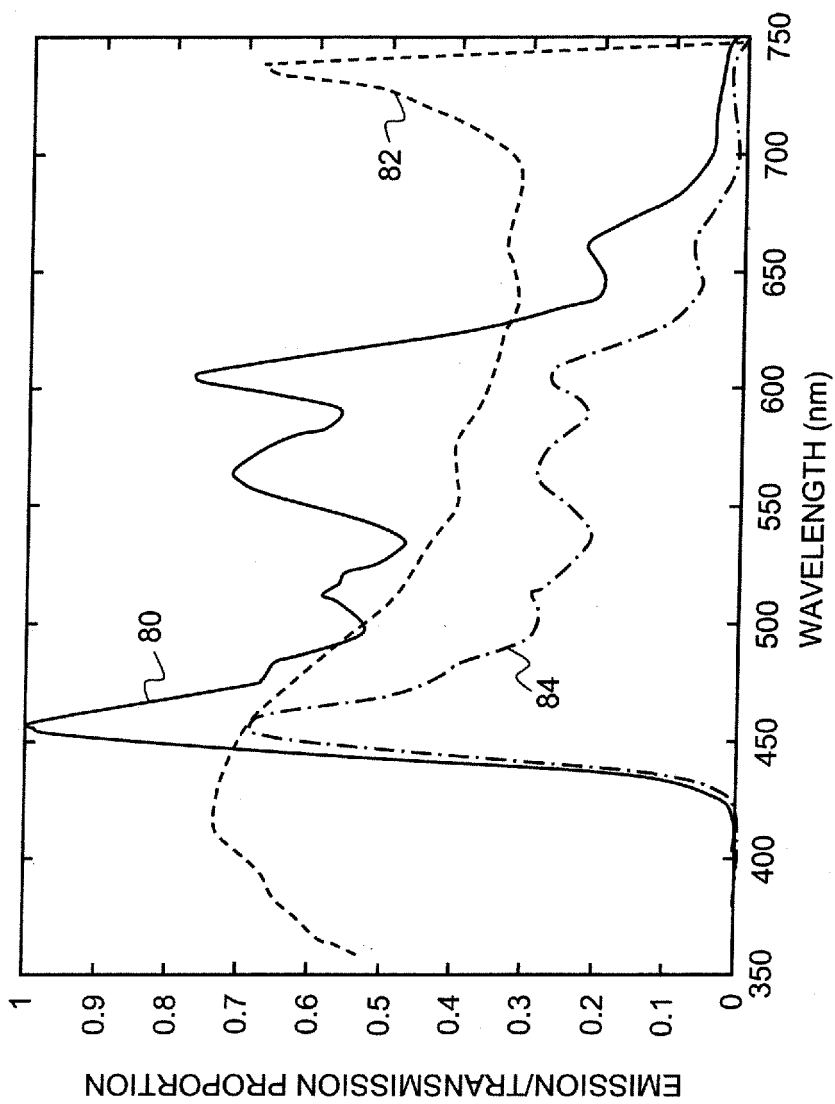

**FIG. 4**


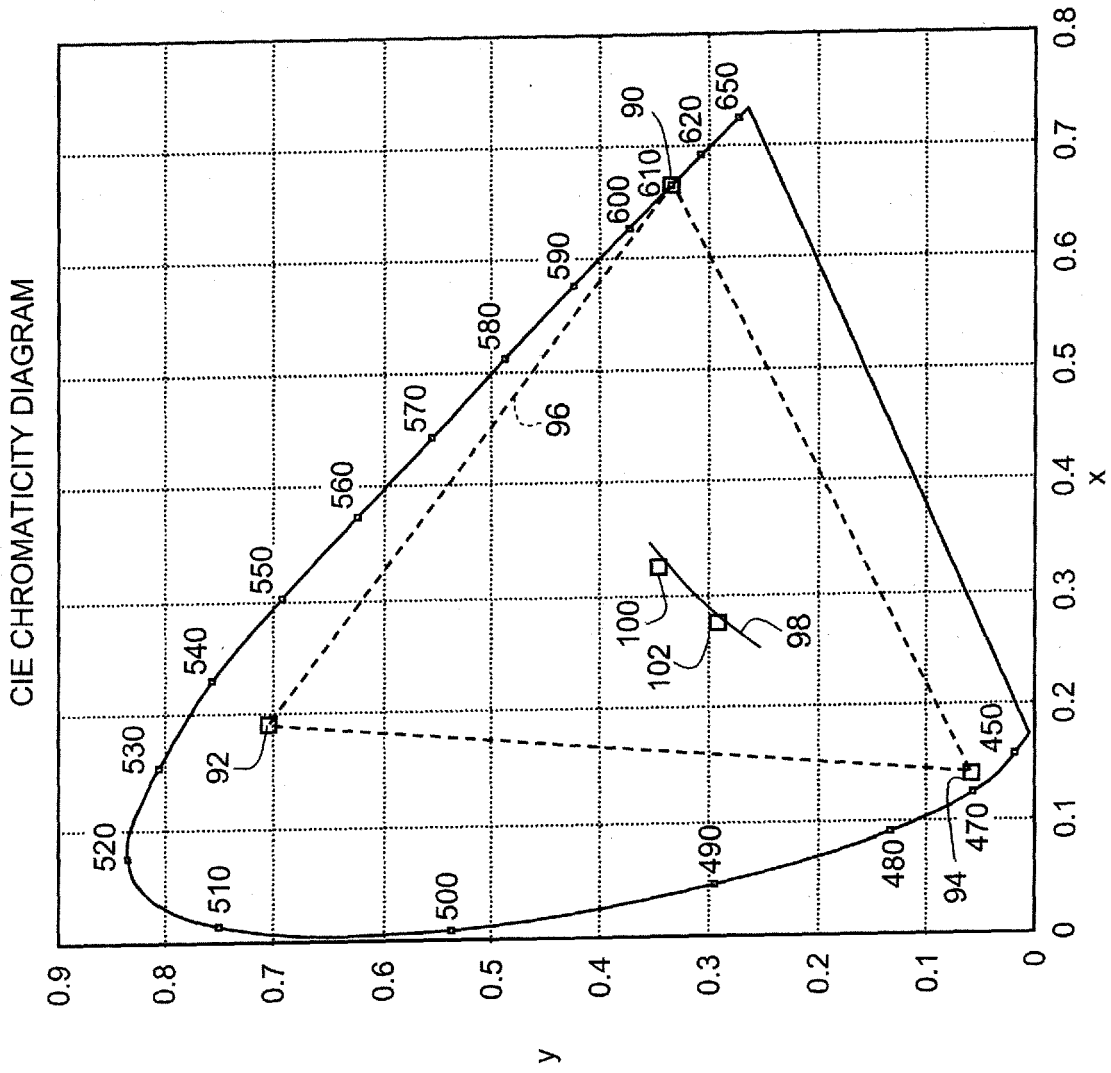


FIG. 5

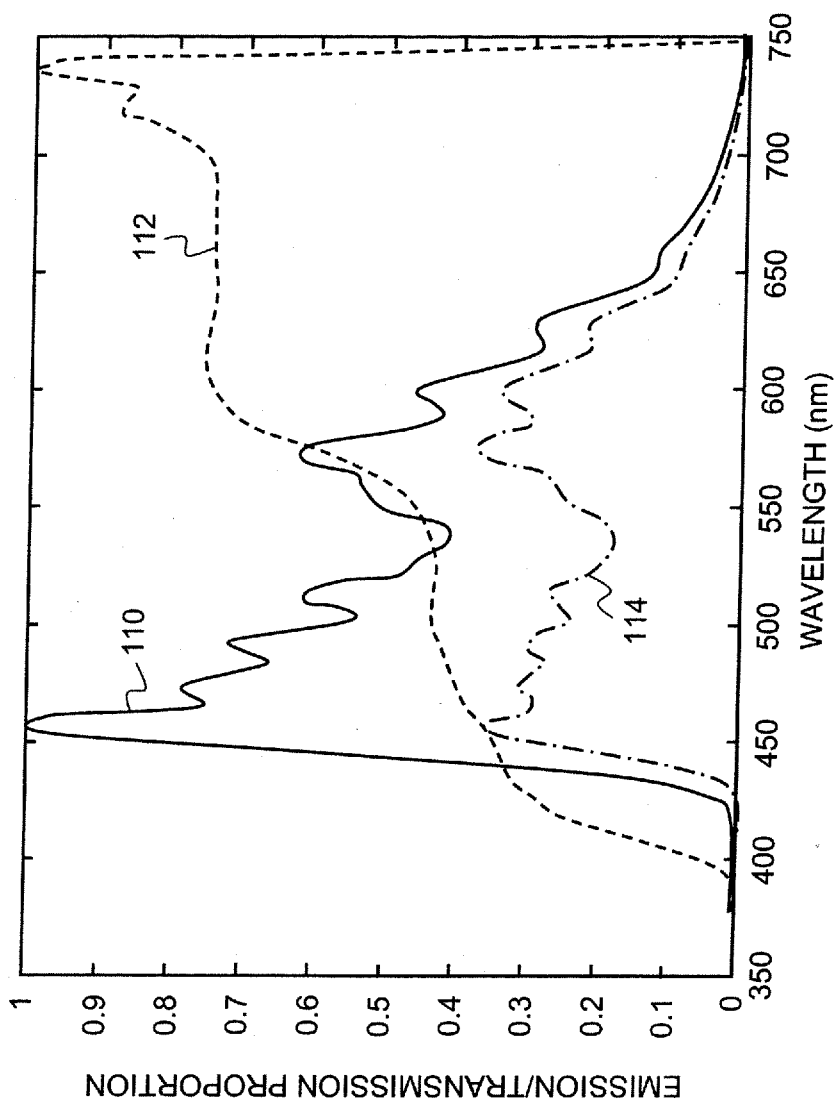

**FIG. 6**


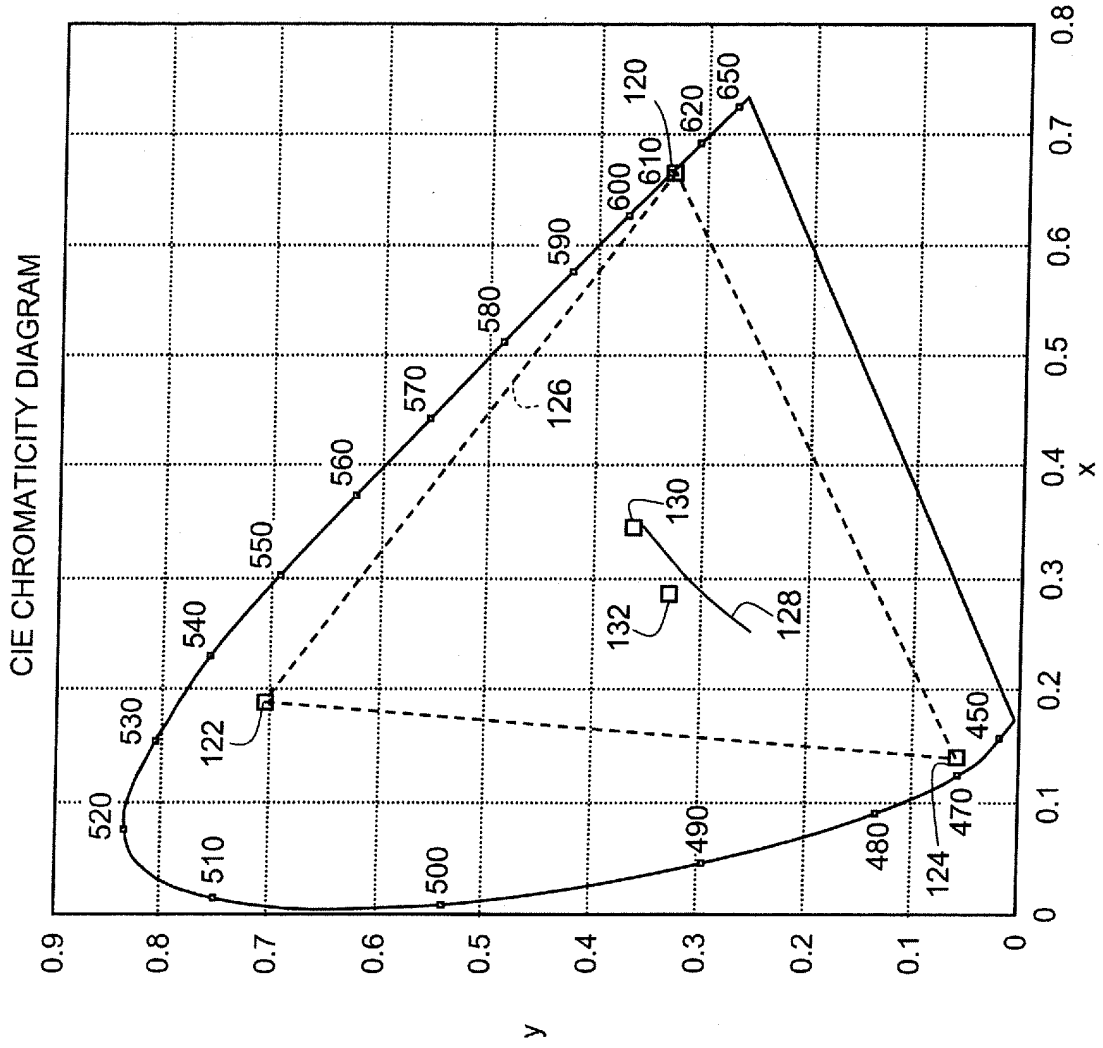


FIG. 7

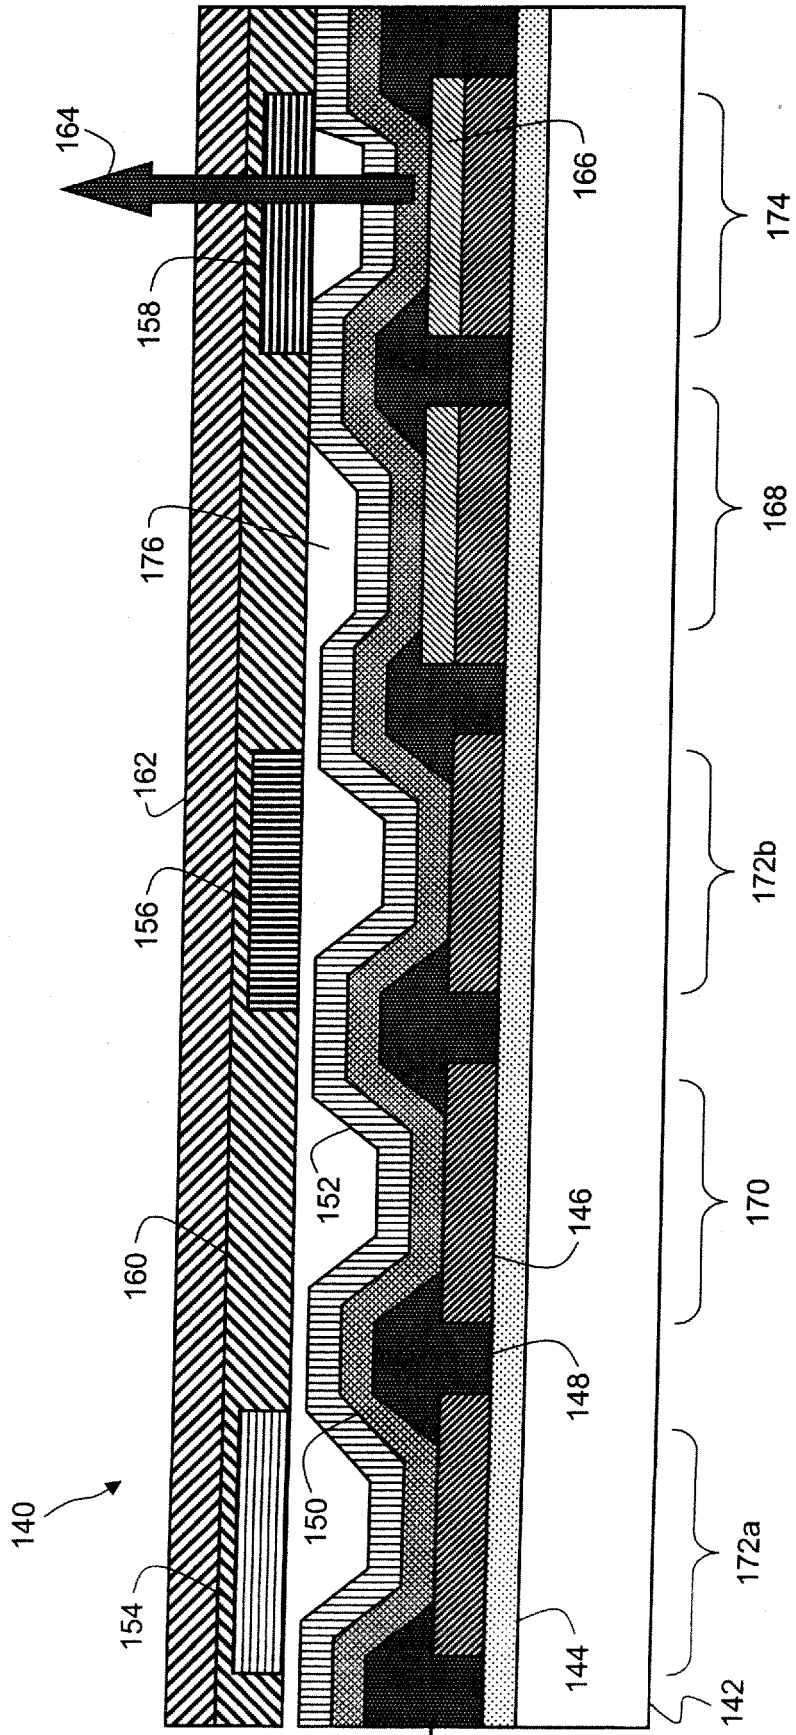

**FIG. 8**



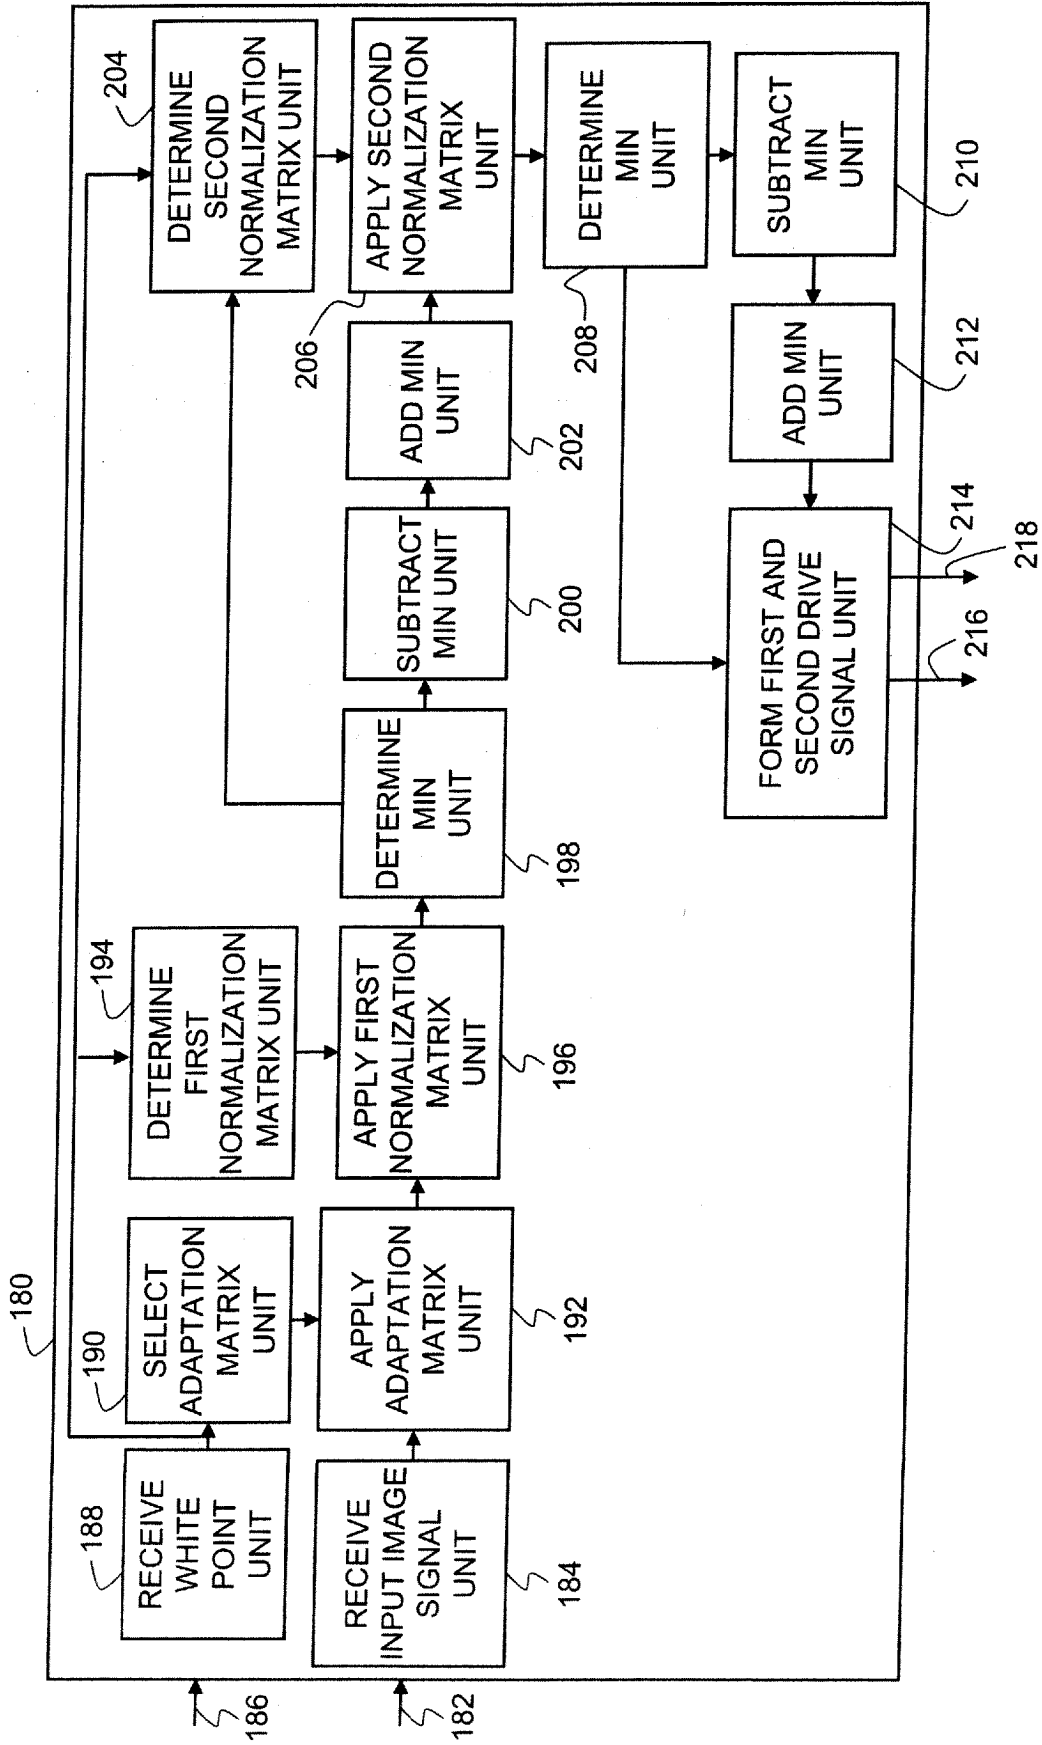


FIG. 9

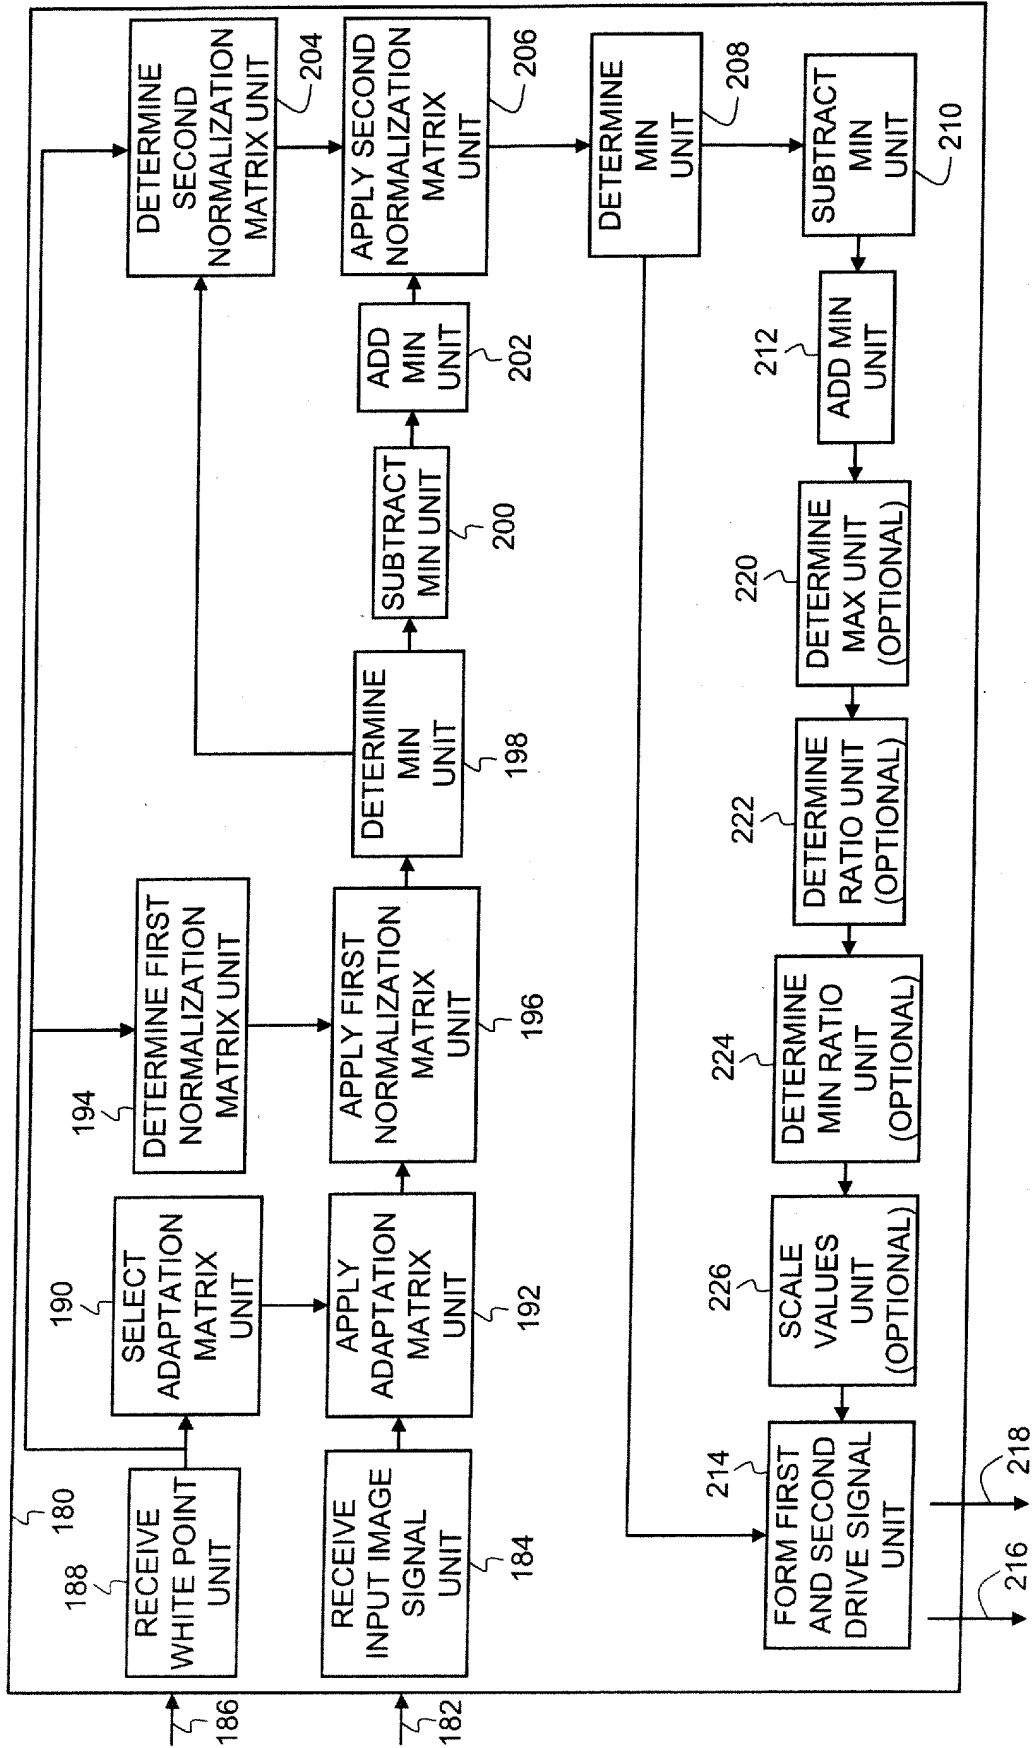


FIG. 10

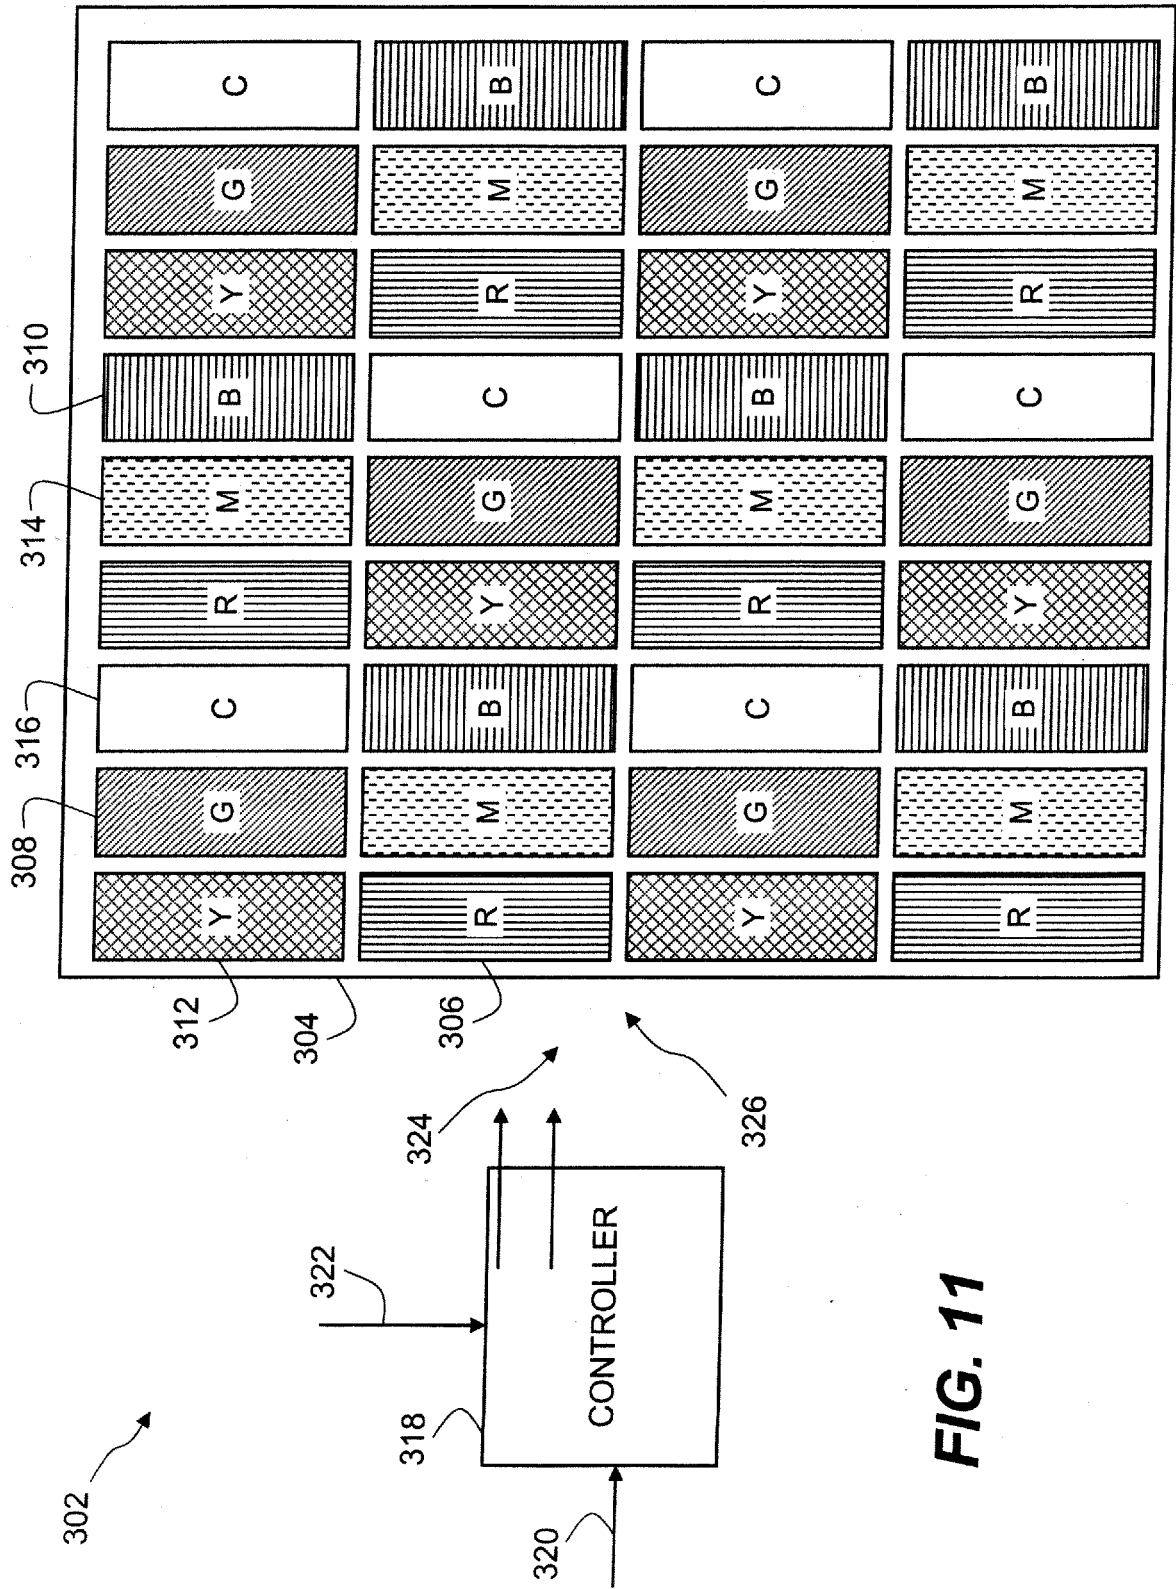


FIG. 11



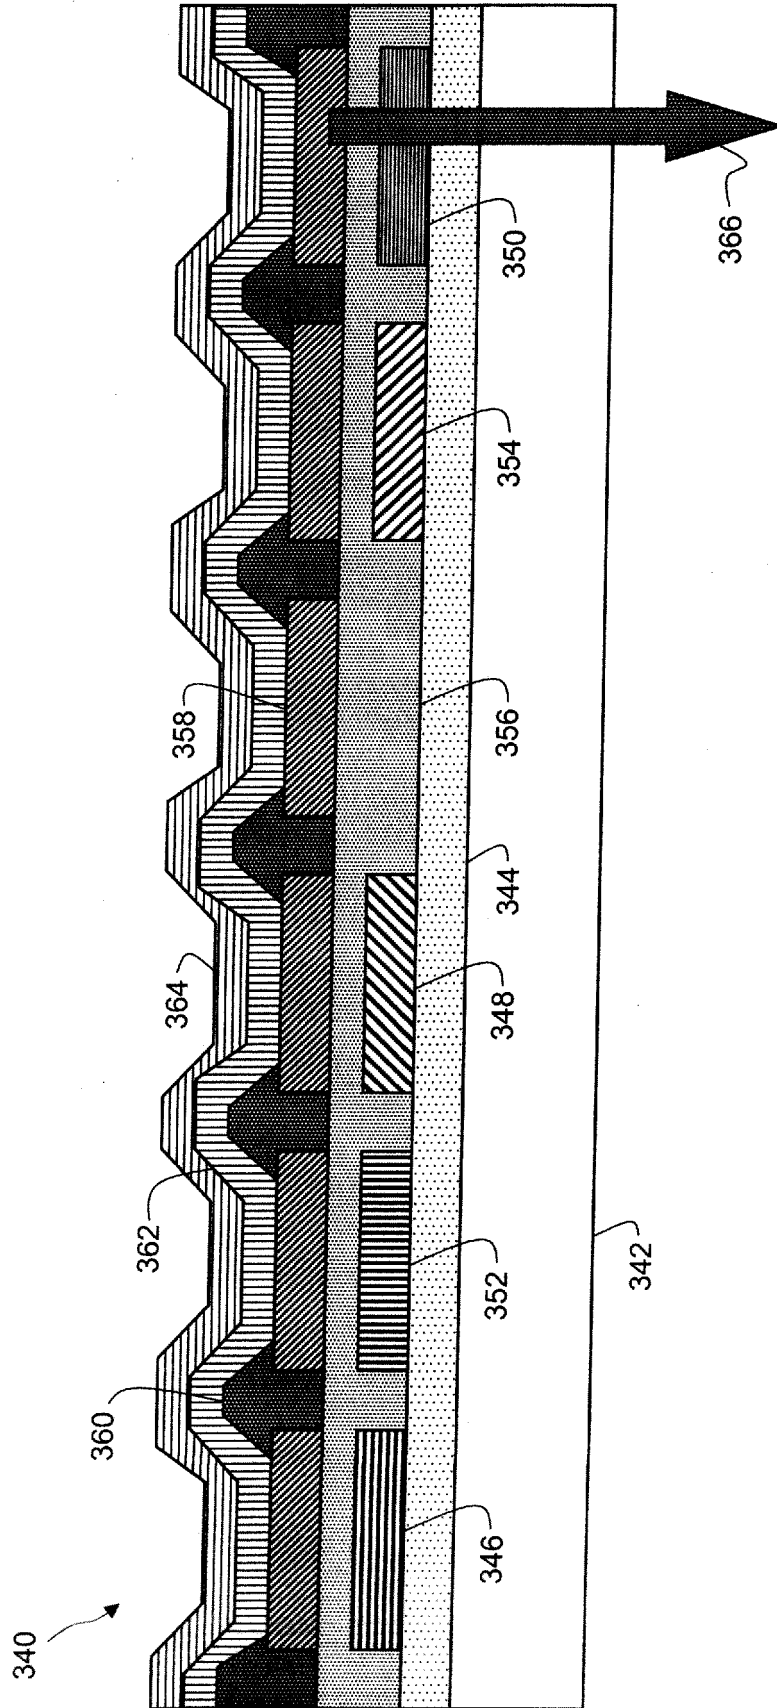


FIG. 12

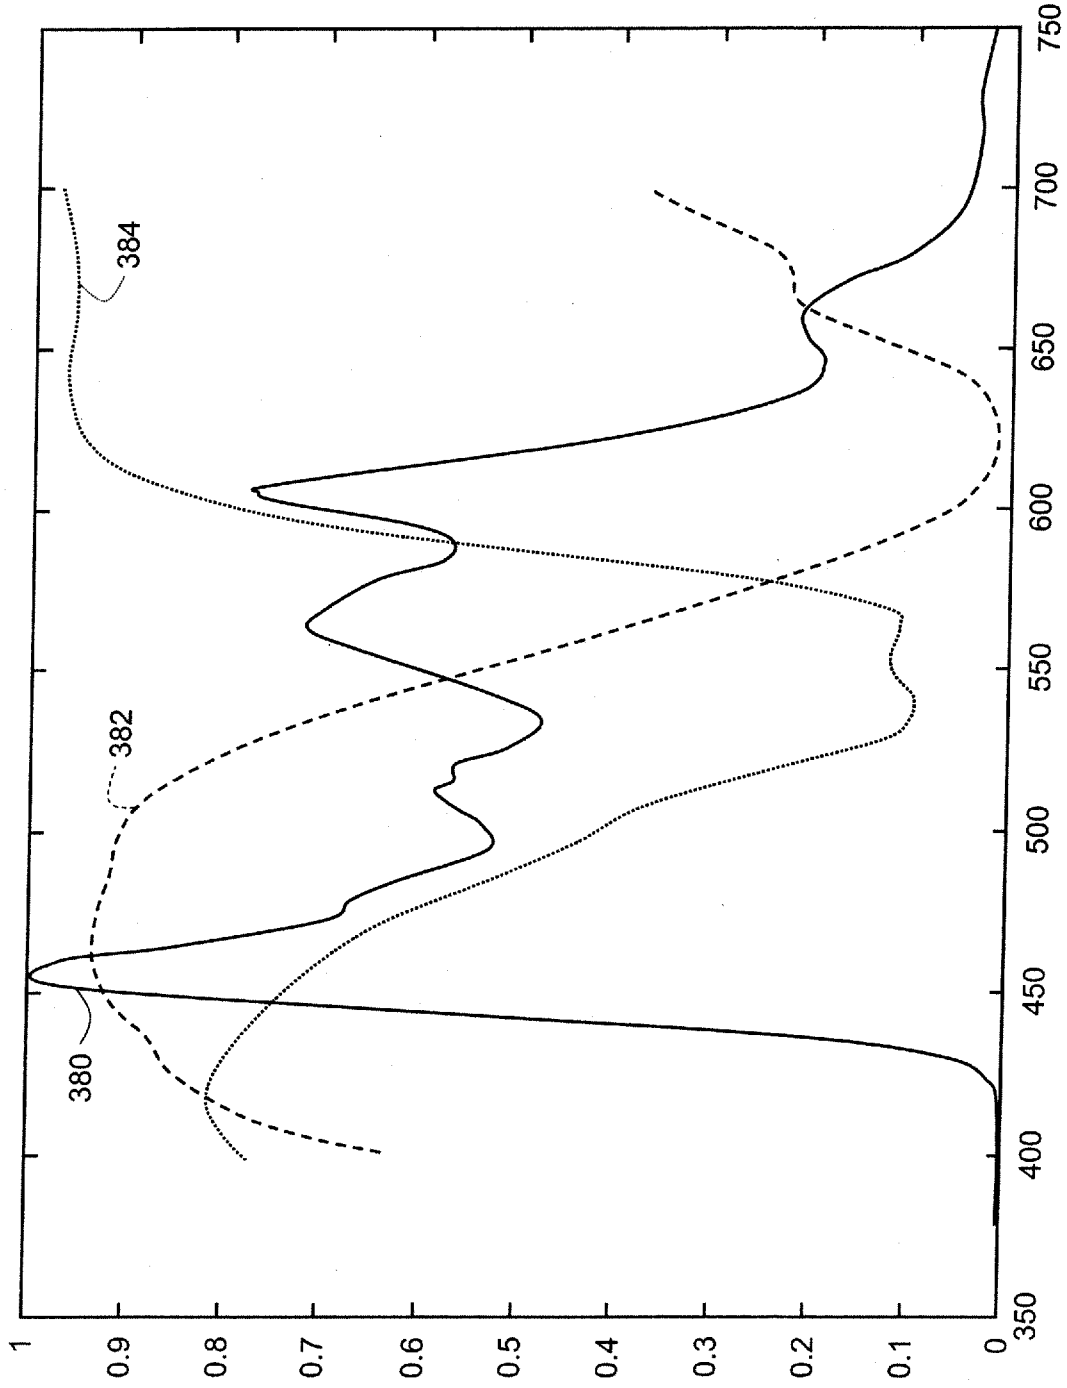

**FIG. 13**

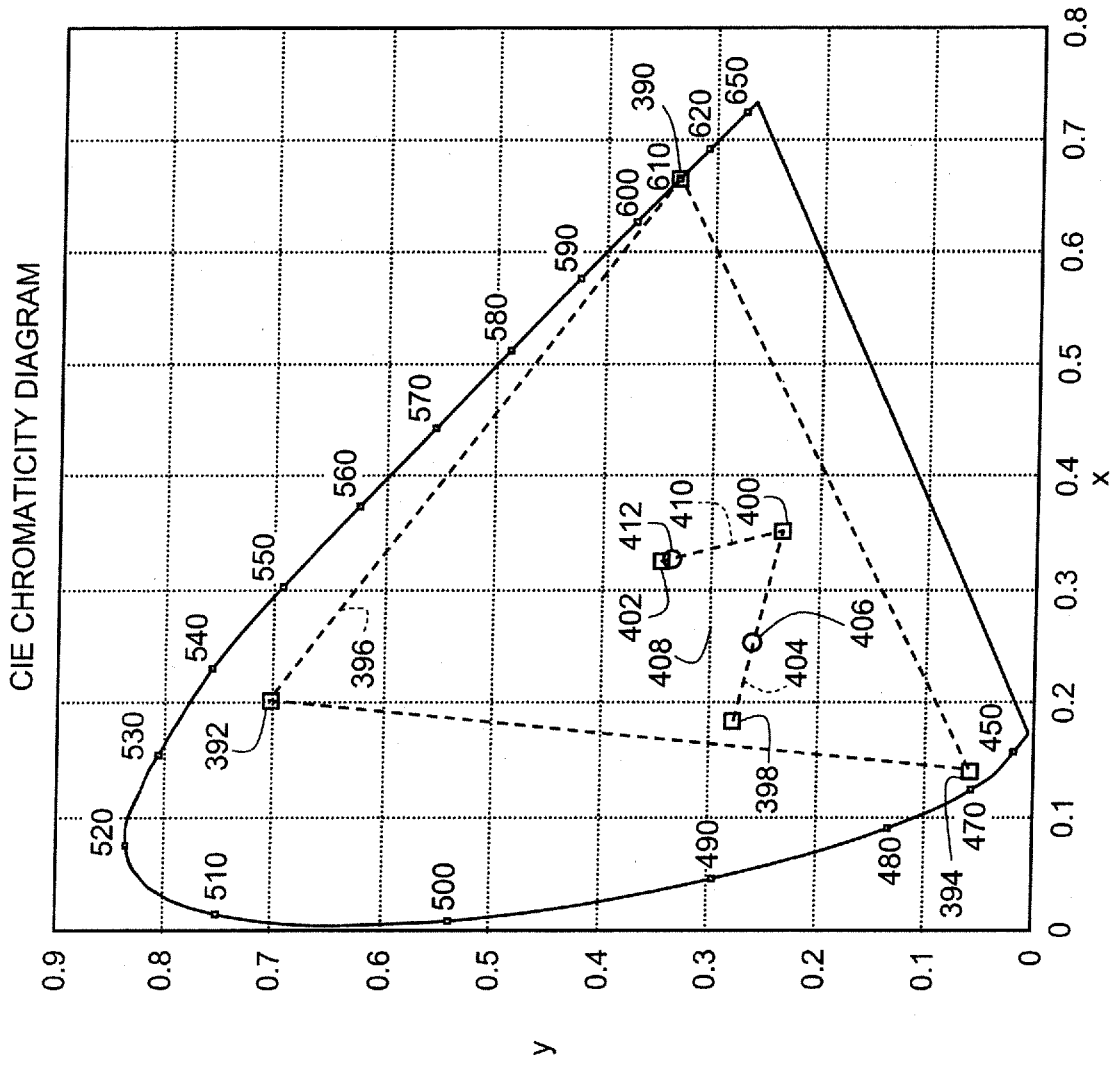

**FIG. 14**

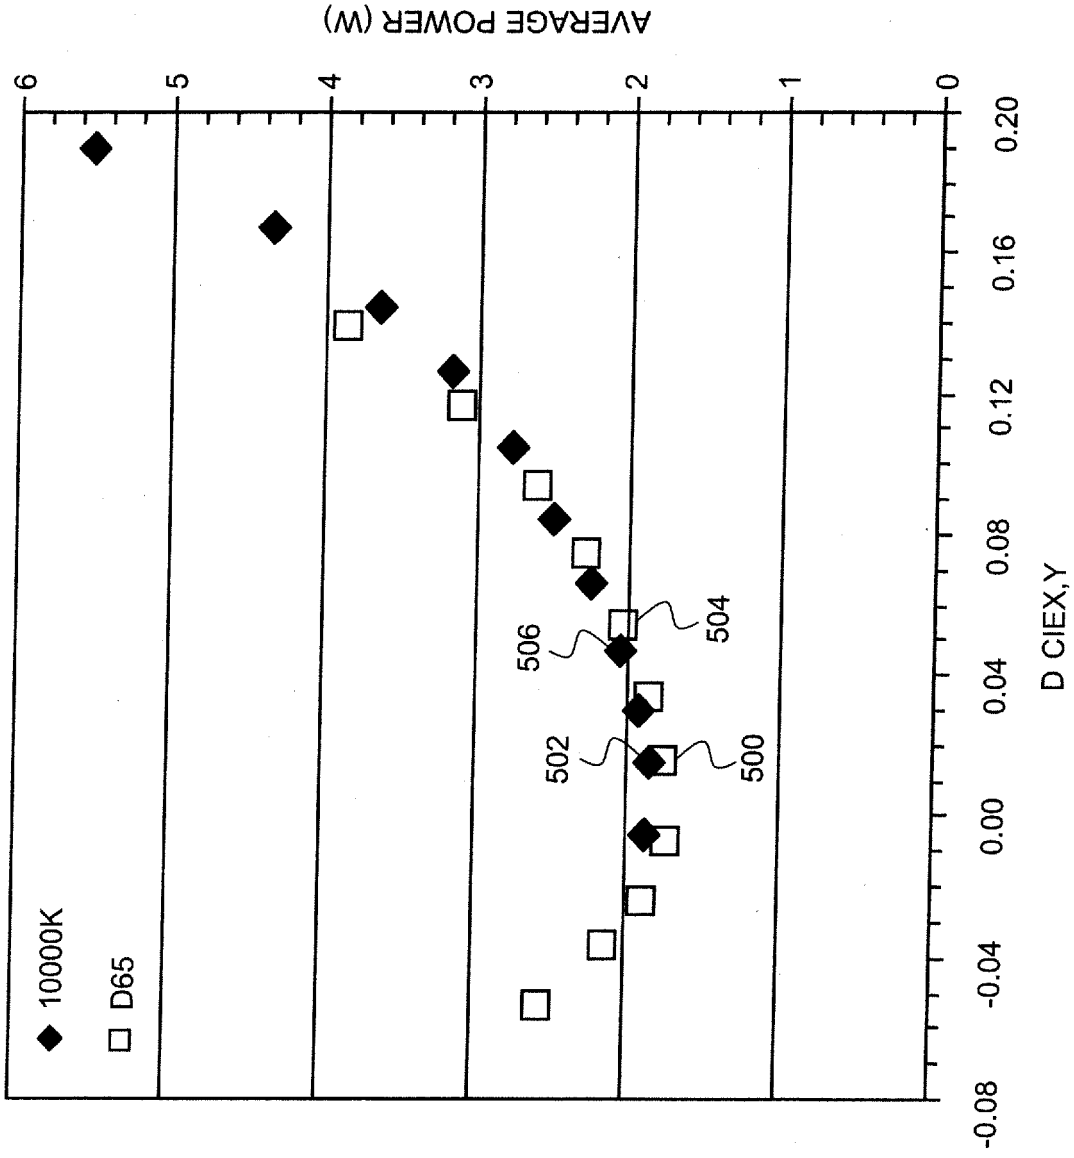


FIG. 15

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 17408508 A [0001]
- US 6840646 B [0006]
- US 6535190 B, Evanicky [0006]
- US 4449148 A, Inohara [0007]
- US 7230594 B, Miller [0008]
- US 6897876 B, Murdoch [0009]
- US 7301543 B, Higgins [0009]
- US 2008018798 A1 [0010]
- WO 2009001579 A1 [0010]
- US 2006044226 A1 [0010]
- JP 2008071664 A [0010]
- JP 2007141737 A [0010]
- US 12174085 B [0036]
- US 4769292 A, Tang [0045]
- US 5061569 A, VanSlyke [0045]



专利名称(译)	电致发光显示屏，具有额外的原色和可调节的白点		
公开(公告)号	<a href="#">EP2430630B1</a>	公开(公告)日	2017-04-26
申请号	EP2010722869	申请日	2010-05-07
[标]申请(专利权)人(译)	全球OLED TECH		
申请(专利权)人(译)	全球OLED科技有限责任公司		
当前申请(专利权)人(译)	全球OLED科技有限责任公司		
[标]发明人	MILLER MICHAEL E BOROSON MICHAEL L		
发明人	MILLER, MICHAEL, E. BOROSON, MICHAEL, L.		
IPC分类号	G09G3/3208 G09G3/30 H01L51/52 H01L27/32 G09G3/20		
CPC分类号	G09G3/2003 G09G3/30 G09G3/3208 G09G2300/0452 G09G2320/0666 G09G2330/021 H01L27/3213 H01L27/322 H01L51/5265		
优先权	12/464123 2009-05-12 US		
其他公开文献	EP2430630A1		
外部链接	<a href="#">Espacenet</a>		

摘要(译)

本发明提供一种适于接收三色输入图像信号的EL显示器，包括三个用于发射红色，绿色和蓝色光的色域限定EL发射器和两个用于发射至少两种附加颜色光的附加EL发射器，位于色域内和Plankian轨迹附近的至少两种其他颜色光的色度坐标;用于提供显示白点的结构;响应于所提供的显示白点和输入图像信号的控制器，用于为三个色域限定的EL发射器提供第一单独的驱动信号，为两个附加的EL发射器提供第二单独的驱动信号，其中相应的亮度值对应于第二个EL发射器单独的驱动信号每个都是输入图像信号和显示白点与两种附加颜色的伪黑体点之间的距离的函数。

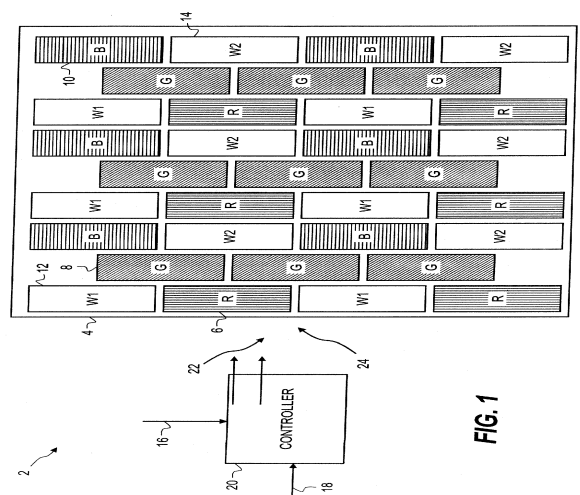


FIG. 1