



(11)

EP 3 404 077 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
21.11.2018 Bulletin 2018/47

(51) Int Cl.:
C09K 11/64 (2006.01) C09K 11/77 (2006.01)

(21) Application number: **18172459.2**

(22) Date of filing: **15.05.2018**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(30) Priority: **19.05.2017 JP 2017100133**

(71) Applicant: **NICHIA CORPORATION**
Anan-shi
Tokushima 774-8601 (JP)

(72) Inventor: **Suzuki, Tomokazu**
Anan-shi, Tokushima 774-8601 (JP)

(74) Representative: **Vossius & Partner**
Patentanwälte Rechtsanwälte mbB
Siebertstrasse 3
81675 München (DE)

(54) **FLUORESCENT MATERIAL HAVING COMPOSITION OF RARE EARTH ALUMINUM-GALLATE, AND LIGHT EMITTING DEVICE**

(57) Provided are a fluorescent material having a composition of a rare earth aluminum-gallate having a high light emission intensity, and a light emitting device using the fluorescent material. The fluorescent material has a composition of a rare earth aluminum gallate containing at least one rare earth element Ln selected from the group consisting of Y, Gd, La, Lu, Sc and Sm; at least one Group 13 element selected from Al and Ga; Tb; Ce; and Eu. When a total molar composition ratio 5 of Al and Ga is used as a basis, a total molar ratio of Ln, and Tb, Ce and Eu is 3, a molar ratio of Tb is a product of 3 and a value of a parameter a, a molar ratio of Ce is a product of 3 and a value of a parameter b, a molar ratio of Eu is a product of 3 and a value of a parameter c, a molar ratio of Ga is a product of 5 and a value of a parameter d, the parameter a is 0.25 or more and less than 1, the parameter b is 0.008×10^{-2} or more and 1.5×10^{-2} or less, the parameter c is 0.012×10^{-2} or more and 2×10^{-2} or less, and the parameter d is 0 or more and 0.85 or less.

EP 3 404 077 A1

Description

CROSS-REFERENCE TO RELATED PAYMENT APPLICATION

5 **[0001]** This application claims priority to Japanese Patent Application No. 2017-100133, filed on May 19, 2017, the entire disclosures of which is incorporated herein by reference in its entirety.

BACKGROUND

10 Technical Field

[0002] The present disclosure relates to a fluorescent material having a composition of a rare earth aluminum-gallate, and a light emitting device using the same. In this specification, the "fluorescent material" is used in the same meaning as a "fluorescent phosphor". Fluorescence refers to the emission of light by a substance that has absorbed light or other electromagnetic radiation. The light can e.g. be UV-radiation or visible light. Typically, the emitted electromagnetic radiation has a longer wavelength than the absorbed electromagnetic radiation.

Description of Related Art

20 **[0003]** A variety of light emitting devices including a light source, such as a light emitting diode (LED) chip, in combination with a fluorescent material have been developed. For example, a light emitting device emitting a white color through a combination of an LED chip emitting blue light with a fluorescent material emitting yellow light has been developed. As a fluorescent material that emits yellow light when excited by receiving blue light from an LED chip, a rare earth aluminate fluorescent material activated by cerium having a garnet structure, for example, $\text{Y}_3\text{Al}_5\text{O}_{12}:\text{Ce}$ (YAG: yttrium aluminium garnet) is known.

25 **[0004]** White emission from a combination of an LED chip to emit blue light and a YAG fluorescent material represented by $\text{Y}_3\text{Al}_5\text{O}_{12}:\text{Ce}$ that emits yellow light by receiving blue light is weak in red color emission. For compensating red color emission, a light emitting device combined with a red color-emitting fluorescent material represented by $\text{CaAlSiN}_3:\text{Eu}$, $\text{K}_2\text{SiF}_6:\text{Mn}$, or $3.5\text{MgO} \cdot 0.5\text{MgF}_2 \cdot \text{GeO}_2:\text{Mn}$ is also known.

30 **[0005]** For compensating a red component which a YAG fluorescent material represented by $\text{Y}_3\text{Al}_5\text{O}_{12}:\text{Ce}$ is poor in, for example, in Japanese Unexamined Patent Publication No.2002-363555, Japanese Unexamined Patent Publication No.2006-233158, and Japanese Unexamined Patent Publication No.2007-126670 respectively propose a fluorescent materials having a composition of a rare earth aluminum-gallate in which the kind of the element to be an activator or the molar ratio of the element to be an activator is changed.

35

SUMMARY

[0006] However, as the case may be, some fluorescent materials having a composition of a rare earth aluminum-gallate disclosed in Japanese Unexamined Patent Publication No.2002-363555, Japanese Unexamined Patent Publication No.2006-233158, and Japanese Unexamined Patent Publication No.2007-126670 could not provide emission capable of compensating the desired reddish emission.

40 **[0007]** An object of the present disclosure is to provide a fluorescent material having a composition of a rare earth aluminum-gallate in which a red component has been reinforced and which has a high emission intensity, and to provide a light emitting device using the fluorescent material. The term "rare earth aluminum-gallate" is used to denote fluorescent materials containing one or more rare earth metals and aluminum which may, or may not contain gallium.

45 **[0008]** For solving the above-mentioned problems, the present disclosure includes the following embodiments.

[0009] A first embodiment of the present disclosure relate to a fluorescent material having a composition of a rare earth aluminum-gallate, which contains at least one rare earth element Ln selected from the group consisting of Y, Gd, La, Lu, Sc and Sm; at least one Group 13 element selected from Al and Ga; Tb; Ce; and Eu, and wherein when a total molar ratio 5 of Al and Ga is used as a basis, the total molar ratio of Ln, and Tb, Ce and Eu is 3, the molar ratio of Tb is a product of 3 and a value of a parameter a, the molar ratio of Ce is a product of 3 and a value of a parameter b, the molar ratio of Eu is a product of 3 and a value of a parameter c, the molar ratio of Ga is a product of 5 and a value of a parameter d, the parameter a is 0.25 or more and less than 1, the parameter b is 0.008×10^{-2} or more and 1.5×10^{-2} or less, the parameter c is 0.012×10^{-2} or more and 2×10^{-2} or less, and the parameter d is 0 or more and 0.85 or less.

50 The term 'molar ratio' as used in the present invention refers to the molar amount of an element in one mole of the chemical composition of the fluorescent material.

55 **[0010]** A second aspect of the present invention is a light emitting device containing the fluorescent material and an excitation light source.

[0011] According to the embodiments of the present disclosure, there can be provided a fluorescent material having a composition of a rare earth aluminum-gallate in which a red component has been reinforced and which has a high light emission intensity, and a light emitting device using the fluorescent material.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012]

Fig. 1 is a diagram showing a light emission spectrum of the fluorescent material of Example 1 and a light emission spectrum of the fluorescent material of Comparative Example 1.

Fig. 2 is a diagram showing an excitation spectrum of the fluorescent material of Example 1 and an excitation spectrum of the fluorescent material of Comparative Example 1.

Fig. 3 is a graph showing a relative light emission intensity (%) at a wavelength of 591 nm of each fluorescent material relative to the amount of Tb (a value of a parameter a) contained in each of the fluorescent materials of Example 2, Examples 6 to 10 and the fluorescent material of Comparative Example 5.

Fig. 4 is a graph showing a relative light emission intensity (%) at a wavelength of 591 nm of each fluorescent material relative to the amount of Ce (a value of a parameter b) contained in each of the fluorescent materials of Example 2, Examples 11 to 18 and the fluorescent materials of Comparative Examples 6 to 8.

Fig. 5 is a graph showing a relative light emission intensity (%) at a wavelength of 591 nm of each fluorescent material relative to the amount of Eu (a value of a parameter c) contained in each of the fluorescent materials of Example 2, Examples 19 to 25 and the fluorescent materials of Comparative Examples 9 to 10.

Fig. 6 is a graph showing a relative light emission intensity (%) at a wavelength of 591 nm of each fluorescent material relative to the amount of Ga (a value of a parameter d) contained in each of the fluorescent materials of Example 5, Examples 26 to 32 and the fluorescent material of Comparative Example 11.

Fig. 7 is a diagram showing light emission spectra of the fluorescent materials of Comparative Examples 1 to 4.

Fig. 8 is a diagram showing excitation spectra of the fluorescent materials of Comparative Examples 1 to 4.


DETAILED DESCRIPTION

[0013] The fluorescent material and the light emitting device according to the present invention are described hereunder on the basis of embodiments. The embodiments as shown below are exemplifications for exemplifying the technical concept of the present invention, and the present invention is not limited to the fluorescent materials and the light emitting devices shown below. The relationship between the color name and the chromaticity coordinate, the relationship between the wavelength range of light and the color name of monochromatic light are in accordance with JIS Z8110 and can be determined as set out in the experimental examples.

[0014] The first embodiment of the present disclosure is a fluorescent material having a composition of a rare earth aluminum-gallate, which contains at least one rare earth element Ln selected from the group consisting of Y, Gd, La, Lu, Sc and Sm; at least one Group 13 element selected from Al and Ga; Tb; Ce; and Eu. When a total molar ratio 5 of Al and Ga is used as a basis, a total molar ratio of Ln, and Tb, Ce and Eu is 3, a molar ratio of Tb is a product of 3 and a value of a parameter a, a molar ratio of Ce is a product of 3 and a value of a parameter b, a molar ratio of Eu is a product of 3 and a value of a parameter c, a molar ratio of Ga is a product of 5 and a value of a parameter d. The parameter a is 0.25 or more and less than 1. The parameter b is 0.008×10^{-2} or more and 1.5×10^{-2} or less. The parameter c is 0.012×10^{-2} or more and 2×10^{-2} or less. The parameter d is 0 or more and 0.85 or less.

[0015] The fluorescent material of the first embodiment contains, as essential elements, at least one rare earth element Ln selected from the group consisting of Y, Gd, La, Lu, Sc and Sm; at least one Group 13 element selected from aluminum (Al) and gallium (Ga); and in addition to oxygen (O), three kinds of elements of terbium (Tb), cerium (Ce) and europium (Eu), which form part of a crystal structure of a rare earth aluminum-gallate. The total molar ratio of oxygen (O) is preferably 12. The fluorescent material having the composition of a rare earth aluminum-gallate contains three kinds of lanthanoid elements Tb, Ce and Eu each in a predetermined amount, in which, therefore, a part of the rare earth elements constituting a garnet-type crystal structure are substituted with three elements of Tb, Ce and Eu to reinforce a red color component, and accordingly, the material provides light emission when excited with light from an excitation light source. In the light emission spectrum of the material, a sharp and strong light emission peak appears at around a wavelength of 591 nm, and thus the material has a high light emission intensity. The rare earth element Ln to be comprised in the composition of the rare earth aluminum-gallate of the fluorescent material is preferably at least one selected from the group consisting of Y, Gd, La, Lu and Sc.

[0016] The fluorescent material having a composition of a rare earth aluminum-gallate preferably has a composition represented by the following formula (I):



wherein Ln represents at least one rare earth element selected from the group consisting of Y, Gd, La, Lu, Sc and Sm, and the values of parameters a, b, c and d are numbers satisfying $0.25 \leq a < 1$, $0.008 \times 10^{-2} \leq b \leq 1.5 \times 10^{-2}$, $0.012 \times 10^{-2} \leq c \leq 2 \times 10^{-2}$, and $0 \leq d \leq 0.85$, respectively.

[0017] In the composition of a rare earth aluminum-gallate for the fluorescent material, when the total molar ratio 5 of Al and Ga is used as a basis, the total molar ratio of the rare earth element Ln, and Tb, Ce and Eu is 3, and the molar ratio of Tb is a product of 3 and a value of a parameter a, the parameter a indicating the amount of Tb is 0.25 or more and less than 1, preferably 0.3 or more and less than 1, more preferably 0.35 or more and less than 1, even more preferably 0.35 or more and 0.9998 or less. In the composition of a rare earth aluminium gallate, when the parameter a is less than 0.25, the light emission intensity at around a wavelength of 591 nm is low.

[0018] In the fluorescent material, Tb functions as one light emission center. In the composition of a rare earth aluminum-gallate, the parameter a indicating the amount of Tb is 0.25 or more and less than 1, and therefore owing to energy transfer from Ce to Tb, a sharp and strong light emission peak appears at around a wavelength of 591 nm in the light emission spectrum. On the other hand, in the light emission spectrum of a YAG fluorescent material having Ce as a single activator or a YAG fluorescent material having two activators of Ce and Eu, a broad peak appears, having a light emission peak in a wavelength region for light emission in yellowish green to yellow.

[0019] In the composition of a rare earth aluminum-gallate for the fluorescent material, when the total molar ratio 5 of Al and Ga is used as a basis, the total molar ratio of the rare earth element Ln, and Tb, Ce and Eu is 3, and the molar ratio of Ce is a product of 3 and a value of a parameter b, the parameter b indicating the amount of Ce is 0.008×10^{-2} or more and 1.5×10^{-2} or less, preferably 0.01×10^{-2} or more and 0.95×10^{-2} or less, more preferably 0.015×10^{-2} or more and 0.7×10^{-2} or less. In the composition of a rare earth aluminium gallate, when the parameter b is less than 0.008×10^{-2} or more than 1.5×10^{-2} , the light emission intensity at around a wavelength of 591 nm is low.

[0020] In the fluorescent material, Ce functions as one light emission center. In the composition of a rare earth aluminum-gallate for the fluorescent material, when the parameter b indicating the amount of Ce is 0.008×10^{-2} or more and 1.5×10^{-2} or less and when the composition contains two elements Tb and Eu in addition to Ce, a sharp and strong light emission peak can appear at around a wavelength of 591 nm from a broad peak having a peak top at around a wavelength of 550 nm of a fluorescent material having Ce as a single activator, in the light emission spectrum.

[0021] In the composition of a rare earth aluminum-gallate for the fluorescent material, when the total molar ratio 5 of Al and Ga is used as a basis, the total molar ratio of the rare earth element Ln, and Tb, Ce and Eu is 3, and the molar ratio of Eu is a product of 3 and a value of a parameter c, the parameter c indicating the amount of Eu is 0.012×10^{-2} or more and 2×10^{-2} or less, preferably 0.014×10^{-2} or more and 1.6×10^{-2} or less, more preferably 0.02×10^{-2} or more and 1.2×10^{-2} or less. In the composition of a rare earth aluminum-gallate, when the parameter c is less than 0.012×10^{-2} or more than 2×10^{-2} , the light emission intensity at around a wavelength of 591 nm is low.

[0022] In the composition of a rare earth aluminum-gallate, Eu functions as one light emission center. In the composition of a rare earth aluminum-gallate for the fluorescent material, when the parameter c indicating the amount of Eu is 0.012×10^{-2} or more and 2×10^{-2} or less and when the composition contains Tb and Eu in addition to Ce, a sharp and strong light emission peak can appear in the light emission spectrum at around a wavelength of 591 nm as opposed to a broad peak having a peak top at around a wavelength of 550 nm of a fluorescent material having Ce as a single activator, owing to energy transfer from Ce to Eu and Tb.

[0023] For the fluorescent material of the first embodiment of the present disclosure, preferably, the composition of a rare earth aluminum-gallate contains Ga. In general, it is known that, in a YAG fluorescent material having a garnet structure, Ga is substituted with a site of Al in the crystal structure, and therefore the crystal structure becomes unstable and the light emission intensity lowers. Contrary to this general knowledge, the present inventors have found that when the composition of a rare earth aluminum-gallate for a fluorescent material contains Ga, the light emission intensity at around a wavelength of 591 nm becomes higher in the light emission spectrum. In the composition of a rare earth aluminum-gallate for the fluorescent material, the parameter d indicating the amount of Ga is 0 or more and 0.85 or less, preferably 0.1 or more and 0.8 or less, more preferably 0.15 or more and 0.75 or less. In the composition of a rare earth aluminum-gallate for the fluorescent material, when the parameter d indicating the amount of Ga is 0.85 or less, the light emission intensity at around 591 nm can be higher in the light emission spectrum.

[0024] In a CIE1931 chromaticity coordinate system, the chromaticity of the emission color from the fluorescent material of the first embodiment of the present disclosure preferably falls within a range of $0.420 \leq x \leq 0.600$, and $0.300 \leq y \leq 0.530$, more preferably within a range of $0.450 \leq x \leq 0.590$, and $0.350 \leq y \leq 0.525$, even more preferably within a range of $0.480 \leq x \leq 0.580$, and $0.400 \leq y \leq 0.520$. In a CIE1931 chromaticity coordinate system, when the chromaticity x, y of the emission color from the fluorescent material falls within the above-mentioned range, the red component in the fluorescent material is reinforced and therefore the material provides light emission from a reddish orange color to a yellowing orange color. The emission color that the fluorescent material of an embodiment of the present disclosure gives as a result of photoexcitation in a region of near-ultraviolet to blue color, specifically as a result of absorption of

light falling within a wavelength range of 380 nm or more and 485 nm or less, preferably falls within the above-mentioned range of x, y in a CIE1931 chromaticity coordinate system.

Method for producing the fluorescent material having a composition of a rare earth aluminum-gallate

[0025] As a method for producing the fluorescent material having a composition of a rare earth aluminum-gallate, the following method is exemplified.

[0026] In the method, respective raw materials including one or more compound containing at least one rare earth element Ln selected from the group consisting of Y, Gd, La, Lu, Sc and Sm, one or more compound containing at least one Group 13 element selected from Al and Ga, one or more compound containing Tb, one or more compound containing Ce and one or more compound containing Eu are mixed such that, when the total molar ratio 5 of Al and Ga is used as a basis, the total molar ratio of Ln, and Tb, Ce and Eu is 3, the molar ratio of Tb is a product of 3 and the value of the parameter a, the molar ratio of Ce is a product of 3 and the value of the parameter b, the molar ratio of Eu is the product of 3 and the value of the parameter c, the molar ratio of Ga is the product of 5 and the value of a parameter d, the parameter a is 0.25 or more and less than 1, preferably the parameter a is 0.25 or more and 0.9998 or less, the parameter b is 0.008×10^{-2} or more and 1.5×10^{-2} or less, the parameter c is 0.012×10^{-2} or more and 2×10^{-2} or less, and the parameter d is 0 or more and 0.85 or less, to give a raw material mixture, and this raw material mixture is heat-treated to give a fluorescent material having a composition of a rare earth aluminum-gallate.

Compound containing a rare earth element

[0027] Examples of the compound containing a rare earth element include an oxide, a hydroxide, a nitride, an oxynitride, a fluoride, and a chloride, each containing at least one rare earth element Ln selected from the group consisting of Y, Gd, La, Lu, Sc and Sm. Such a compound may be a hydrate. Among the compounds containing a rare earth element Ln, an unalloyed metal or an alloy containing a rare earth element may also be used as at least a part thereof.

[0028] Specifically, examples of the compound containing a rare earth element include Y_2O_3 , $Y(OH)_3$, YN, YF_3 , YCl_3 , Gd_2O_3 , $Gd(OH)_3$, GdN, GdF_3 , $GdCl_3$, Lu_2O_3 , LuF_3 , $LuCl_3$, La_2O_3 , $La(OH)_3$, LaF_3 , $LaCl_3$, Sc_2O_3 , ScN, ScF_3 , $ScCl_3$, Sm_2O_3 , SmN, SmF_3 , $SmCl_3$, etc. The compound containing a rare earth element may be used alone, or may be used in combination of two or more thereof. The compound containing a rare earth element is preferably an oxide. This is because, when compared to other materials, the oxide does not contain any other element than the desired composition of a rare earth aluminum-gallate.

Compound containing at least one Group 13 element selected from Al and Ga

[0029] Examples of the compound containing at least one Group 13 element selected from Al and Ga include an oxide, a hydroxide, a nitride, an oxynitride, a fluoride and a chloride each containing aluminum or gallium. Such a compound may be a hydrate. As the compound containing aluminum or gallium, an aluminum metal simple substance, a gallium metal simple substance, an aluminum alloy, or a gallium alloy may be used, and the metal simple substance or alloy may also be used in place of at least a part of the compound.

[0030] Specifically, example of the compound containing at least one Group 13 element selected from Al and Ga include aluminum oxynitride, Al_2O_3 , $Al(OH)_3$, AlN, AlF_3 , $AlCl_3$, Ga_2O_3 , $Ga(OH)_3$, GaN, GaF_3 , and $GaCl_3$. The compound containing at least one Group 13 element selected from Al or Ga may be used alone, or may be used in combination of two or more thereof. The compound containing at least one Group 13 element selected from Al and Ga is preferably an oxide. The reason for this resides in the matter that, when compared to other materials, the oxide does not contain any other element than the desired composition of a rare earth aluminum-gallate, and the fluorescent material having a desired composition is readily obtainable. In addition, in the case of using a compound containing any other element than the desired composition, there is a case where a residual impurity element may be existent in the resulting fluorescent material, and there is a concern that this residual impurity element becomes a killer element with respect to light emission, resulting in a remarkable lowering of the light emission intensity.

Compound Containing Tb

[0031] Examples of the compound containing Tb include an oxide, a fluoride and a chloride containing terbium. Such a compound may be a hydrate. As the compound containing terbium, a terbium metal simple substance or a terbium alloy may be used, and the metal simple substance or alloy may also be used in place of at least a part of the compound.

[0032] Specifically, examples of the compound containing Tb include Tb_4O_7 , TbF_3 , and $TbCl_3$. The compound containing Tb may be used alone, or may be used in combination of two or more thereof. The compound containing Tb is preferably an oxide. The reason for this resides in the matter that, when compared to other materials, the oxide does

not contain any other element than the desired composition of a rare earth aluminum-gallate, and the fluorescent material having a desired composition is readily obtainable. In addition, in the case of using a compound containing any other element than the desired composition, there is a case where a residual impurity element may be existent in the resulting fluorescent material, and there is a concern that this residual impurity element becomes a killer with respect to light emission, resulting in a remarkable lowering of the light emission intensity.

Compound containing Ce

[0033] Examples of the compound containing Ce include an oxide, a hydroxide, a nitride, a fluoride, and a chloride, each containing cerium. Such a compound may be a hydrate. As the compound containing cerium, a cerium metal simple substance or a cerium alloy may be used, and the metal simple substance or alloy may also be used in place of at least a part of the compound.

[0034] Specifically, examples of the compound containing Ce include CeO_2 , $\text{Ce}(\text{OH})_2$, $\text{Ce}(\text{OH})_4$, CeN , CeF_3 , and CeCl_3 . The compound containing Ce may be used alone, or may be used in combination of two or more thereof. The compound containing Ce is preferably an oxide. The reason for this resides in the matter that, when compared to other materials, the oxide does not contain any other element than the desired composition of a rare earth aluminum-gallate, and the fluorescent material having a desired composition is readily obtainable. In addition, in the case of using a compound containing any other element than the desired composition, there is a case where a residual impurity element may be existent in the resulting fluorescent material, and there is a concern that this residual impurity element becomes a killer with respect to light emission, resulting in a remarkable lowering of the light emission intensity.

Compound containing Eu

[0035] Examples of the compound containing Eu include an oxide, a fluoride, and a chloride, each containing europium. Such a compound may be a hydrate. As the compound containing europium, an europium metal simple substance or an europium alloy may be used, and the metal simple substance or alloy may also be used in place of at least a part of the compound.

[0036] Specifically, examples of the compound containing Eu include Eu_2O_3 , EuF_3 , and EuCl_3 . The compound containing Eu may be used alone, or may be used in combination of two or more thereof. The compound containing Eu is preferably an oxide. The reason for this resides in the matter that, when compared to other materials, the oxide does not contain any other element than the desired composition of a rare earth aluminum-gallate, and the fluorescent material having a desired composition is readily obtainable. In addition, in the case of using a compound containing any other element than the desired composition, there is a case where a residual impurity element may be existent in the resulting fluorescent material, and there is a concern that this residual impurity element becomes a killer with respect to light emission, resulting in a remarkable lowering of the light emission intensity.

Flux

[0037] The raw material mixture may contain a flux, such as a halide or the like, as the need arises. When a flux is contained in the raw material mixture, the reaction between the raw materials is promoted, and a solid phase reaction is easy to advance more uniformly. As for this matter, it may be considered that the temperature at which the raw material mixture is heat-treated is substantially the same as or higher than the formation temperature of a liquid phase of a halide or the like to be used as the flux, so that the reaction could be promoted.

[0038] Examples of the halide include fluorides, chlorides of a rare earth metal, an alkaline earth metal, or an alkali metal. In the case where a halide of a rare earth metal is used as a flux, the flux can also be added as the compound such that the product has a desired composition of a rare earth aluminum-gallate. In other words, if rare earth metal containing flux components are used, their amount is taken into account in the calculation of the final composition of the fluorescent material. Specifically, examples of the flux include barium fluoride (BaF_2), calcium fluoride (CaF_2), etc. The flux is preferably barium fluoride (BaF_2). This is because by using barium fluoride as the flux, the garnet crystal structure becomes stable, and a composition of the garnet crystal structure is readily formed.

[0039] In the case where the raw material mixture contains a flux, the content of the flux is preferably 20% by mass or less, more preferably 10% by mass or less, and preferably 0.1% by mass or more, on the basis of the raw material mixture (100% by mass). This is because when the content of the flux falls within the aforementioned range, the matter that the garnet crystal structure is hardly formed due to insufficient particle growth because of a small amount of the flux does not occur, and the matter that the garnet crystal structure is hardly formed because of an excessive amount of the flux does not also occur.

[0040] As for the raw material mixture, after weighing the respective raw materials in a desired blending ratio, for example, the raw materials may be ground and mixed using a dry grinder, such as a ball mill, a vibration mill, a hammer

mill, a roll mill, a jet mill, etc.; may be ground and mixed using a mortar and a pestle, etc.; may be mixed using a mixing machine, for example, a ribbon blender, a Henschel mixer, a V type blender, etc.; or may be ground and mixed using both a dry grinder and a mixing machine. In addition, the mixing may be achieved by means of either dry mixing or wet mixing with addition of a solvent, etc. The mixing is preferably dry mixing. This is because, when compared to the wet mode, the dry mode enables the process time to be shortened, leading to an improvement in productivity.

[0041] The raw material mixture can be heat-treated by charging in a crucible, a boat made of, as a material, a carbon material, such as graphite etc., or boron nitride (BN), aluminum oxide (alumina), tungsten (W), or molybdenum (Mo).

[0042] From the viewpoint of stability of the crystal structure, the temperature at which the raw material mixture is heat-treated is preferably in a range of 800°C or higher and 1800°C or lower, more preferably 900°C or higher and 1750°C or lower, even more preferably 1000°C or higher and 1700°C or lower, and especially preferably 1100°C or higher and 1650°C or lower.

[0043] The heat treatment time varies depending upon a temperature elevation rate, a heat treatment atmosphere, and so on, and after reaching the heat treatment temperature, the heat treatment time is preferably 1 hour or more, more preferably 2 hours or more, and even more preferably 3 hours or more, and preferably 20 hours or less, more preferably 18 hours or less, and even more preferably 15 hours or less.

[0044] As for the atmosphere where the raw material mixture is heat-treated, the heat treatment can be performed in an inert atmosphere of argon, nitrogen, or a reducing atmosphere containing hydrogen, etc., or an oxidizing atmosphere in the air, etc. It is preferred that the raw material mixture is heat-treated in a nitrogen atmosphere having reducing properties to give the fluorescent material. The atmosphere where the raw material mixture is heat-treated is more preferably a hydrogen gas-containing nitrogen atmosphere.

[0045] For the fluorescent material having a composition of a rare earth aluminum-gallate, the reactivity of the raw material mixture becomes good in an atmosphere having a high reducing power, such as a reducing atmosphere containing hydrogen and nitrogen, and can be heat-treated at atmospheric pressure without being pressurized. For the heat treatment, for example, an electric furnace, a gas furnace, and so on can be used.

[0046] The resulting fluorescent material may be wet dispersed and subjected to a post-treatment step, such as wet sieving, dehydration, drying, dry sieving, etc. According to such a post-treatment step, the fluorescent material having a desired average particle diameter is obtained. For example, the fluorescent material after the heat treatment is dispersed in a non-aqueous organic solvent or an aqueous solvent; a solvent flow is allowed to flow onto the dispersed fluorescent material on a sieve while applying a variety of vibrations via the sieve, thereby subjecting the calcined product to mesh passing to achieve wet sieving; and subsequently, dehydration, drying, and dry sieving are performed. There can be thus obtained the fluorescent material having a desired average particle diameter.

[0047] By dispersing the fluorescent material after the heat treatment in an aqueous medium, impurities, such as a calcination residue of the flux and unreacted components of the raw materials can be removed. For the wet dispersion, a dispersion medium, such as alumina balls, zirconia balls, etc. may be used.

Light Emitting Device

[0048] Next, a light emitting device utilizing the resulting fluorescent material as a constituent element of a wavelength conversion member is explained. The light emitting device of the second embodiment of the present disclosure includes at least fluorescent material of the first embodiment of the disclosure and an excitation light source.

[0049] For the excitation light source, a light emitting element can be used. The light emitting element is preferably one having a light emission peak wavelength in a wavelength range of 250 nm or more and 500 nm or less. The range of the light emission peak wavelength of the light emitting element is more preferably in a wavelength range of 350 nm or more and 490 nm or less, and even more preferably 380 nm or more and 485 nm or less, still more preferably 400 nm or more and 480 nm or less. By using such a light emitting element as the excitation light source, there can be provided a light emitting device having a combination of the fluorescent material of the first aspect of the invention that has a sharp and strong emission peak at around a wavelength of 591 nm in the light emission spectrum, and the excitation light source.

[0050] The full width at half maximum of the light emission spectrum of the light emitting element can be, for example, controlled to 30 nm or less. The full width at half maximum means the wavelength width of the emission peak showing the emission intensity of 50% of the maximum emission intensity in the light emission spectrum of the light emitting element.

[0051] For the light emitting element, a semiconductor light emitting element using a nitride-based semiconductor ($\text{In}_x\text{Al}_y\text{Ga}_{1-x-y}\text{N}$, $0 \leq x$, $0 \leq y$, $x+y \leq 1$) is preferably used. By using a semiconductor light emitting element as the light source, a stable light emitting device which is high in efficiency, high in linearity of an output to an input, and strong against mechanical impact can be provided.

[0052] The fluorescent material which is included in the light emitting device is preferably a fluorescent material having the composition represented by the aforementioned formula (I). The fluorescent material which is included in the light

emitting device is excited with light in a wavelength range of 250 nm or more and 500 nm or less. The light emitting device may be comprised of, as a first fluorescent material, the aforementioned fluorescent material of the first embodiment of the disclosure, and may include, in addition to this first fluorescent material, a second fluorescent material, and a combination of plurality of fluorescent materials may be used as the second fluorescent material.

[0053] The fluorescent material of the first embodiment of the disclosure may be contained, for example, in a fluorescent member that covers an excitation light source, and may form part of the light emitting device. In the light emitting device, the excitation light source is covered with the fluorescent member containing the fluorescent material of the first embodiment of the disclosure, and a part of light emitted by the excitation light source is absorbed by the fluorescent material of the first embodiment of the disclosure, and consequently, light having a sharp and strong emission peak at around a wavelength of 591 nm is thereby emitted.

[0054] It is preferred that the light emitting device contains the second fluorescent material which is different in the light emission peak wavelength from the first fluorescent material. For example, when the light emitting device suitably includes the light emitting element, the first fluorescent material which is excited with this and has a sharp light emission peak having a high light emission intensity at around a wavelength of 591 nm, and the second fluorescent material which is different in the wavelength region to be emitted, light in a broad wavelength region can be emitted.

[0055] The second fluorescent material may be a fluorescent material capable of absorbing the light from the light emitting element and wavelength-converting it into light having a different wavelength. For example, the second fluorescent material is preferably at least any one or more selected from a nitride-based fluorescent material mainly activated with a lanthanide series element, such as Eu, Ce, etc.; an oxynitride-based fluorescent material; a sialon-based fluorescent material; an alkaline earth halogen apatite fluorescent material mainly activated with a lanthanide series element, such as Eu, etc., or a transition metal series element, such as Mn, etc.; an alkaline earth metal halogen borate fluorescent material; an alkaline earth metal aluminate fluorescent material; an alkaline earth silicate; an alkaline earth sulfide; an alkaline earth thiogallate; an alkaline earth silicon nitride; a germanate; a rare earth aluminate mainly activated with a lanthanide series element, such as Ce, etc.; a rare earth silicate; an organic material and an organic complex mainly activated with a lanthanide series element, such as Eu, etc. By using such a fluorescent material alone or in combination of two or more thereof together with the fluorescent material of the first aspect of the invention, blue, green, yellow, red, and so on, as well as color tints that are neutral colors thereof, such as blue-green, yellow-green, orange and others, can be realized in addition to white color.

[0056] The fluorescent material of the first embodiment of the disclosure can form part of a fluorescent member covering the light emitting element together with the second fluorescent material and a sealing resin, as the need arises. Examples of the resin which forms part of the fluorescent member may include thermosetting resins, such as a silicone resin inclusive of a modified silicone resin, an epoxy resin, etc.

[0057] The fluorescent member may further contain, in addition to the resin and the fluorescent material, a filler, a light diffusing material, and so on. For example, when containing a light diffusing material, the directivity from the light emitting element is mitigated, thereby enabling a viewing angle to be increased. Examples of the filler may include silica, titanium oxide, zinc oxide, zirconium oxide, alumina, etc.

[0058] The light emitting device of the second aspect of the present invention can be used in lighting systems and security systems.

[0059] The fluorescent material of the first embodiment of the disclosure can be used in a light emitting device that emits a red color by laser excitation, in addition to the light emitting device of the second embodiment of the disclosure.

EXAMPLES

[0060] The present invention is hereunder specifically described by reference to the following Examples and Comparative Examples. The present invention is not limited to these Examples.

Example 1

[0061] 49.60 g of Y_2O_3 , 274.95 g of Tb_4O_7 , 0.66 g of CeO_2 , 0.67 g of Eu_2O_3 , 89.66 g of Al_2O_3 , and 134.78 g of Ga_2O_3 were weighed as raw materials. To the raw materials, 22.00 g of BaF_2 was added as a flux. These raw materials were dry mixed for 1 hour with a ball mill to give a raw material mixture. The resulting raw material mixture was filled in an alumina crucible and heat-treated at 1500°C for 10 hours. The heat treatment was performed in a nitrogen atmosphere containing a hydrogen gas having reducing properties. The resulting heat-treated product was passed through a sieve to give a fluorescent material having a composition of $(Y_{0.229}Tb_{0.768}Ce_{0.001}Eu_{0.002})_3(Al_{0.55}Ga_{0.45})_5O_{12}$.

Example 2

[0062] A fluorescent material having a composition of $(Y_{0.229}Tb_{0.767}Ce_{0.002}Eu_{0.002})_3(Al_{0.55}Ga_{0.45})_5O_{12}$ was obtained

in the same manner as in Example 1, except for weighing and using 49.57 g of Y_2O_3 , 274.79 g of Tb_4O_7 , 0.66 g of CeO_2 , 0.67 g of Eu_2O_3 , 89.61 g of Al_2O_3 , and 134.70 g of Ga_2O_3 as the raw materials.

Example 3

[0063] A fluorescent material having a composition of $(Y_{0.229}Tb_{0.767}Ce_{0.002}Eu_{0.002})_3(Al_{0.55}Ga_{0.45})_5O_{12}$ was obtained in the same manner as in Example 1, except for weighing and using 68.78 g of La_2O_3 , 264.24 g of Tb_4O_7 , 0.63 g of CeO_2 , 0.65 g of Eu_2O_3 , 86.17 g of Al_2O_3 , and 129.53 g of Ga_2O_3 as the raw materials.

Example 4

[0064] A fluorescent material having a composition of $(Y_{0.468}Tb_{0.528}Ce_{0.002}Eu_{0.002})_3(Al_{0.55}Ga_{0.45})_5O_{12}$ was obtained in the same manner as in Example 1, except for weighing and using 105.21 g of Y_2O_3 , 196.45 g of Tb_4O_7 , 0.69 g of CeO_2 , 0.70 g of Eu_2O_3 , 98.65 g of Al_2O_3 , and 148.30 g of Ga_2O_3 as the raw materials.

Example 5

[0065] A fluorescent material having a composition of $(Y_{0.228}Tb_{0.764}Ce_{0.006}Eu_{0.002})_3(Al_{0.8}Ga_{0.2})_5O_{12}$ was obtained in the same manner as in Example 1, except for weighing and using 52.64 g of Y_2O_3 , 291.76 g of Tb_4O_7 , 2.11 g of CeO_2 , 0.72 g of Eu_2O_3 , 138.95 g of Al_2O_3 , and 63.82 g of Ga_2O_3 as the raw materials.

Comparative Example 1

[0066] 230.50 g of Y_2O_3 , 93.92 g of Gd_2O_3 , 5.35 g of CeO_2 , and 220.23 g of Al_2O_3 were weighed as raw materials. As a flux, 22.00 g of BaF_2 was added to the raw materials. These raw materials were dry mixed for 1 hour with a ball mill to give a raw material mixture. The resulting raw material mixture was filled in an alumina crucible and heat-treated at 1450°C for 10 hours. The heat treatment was performed in a nitrogen atmosphere containing a hydrogen gas having reducing properties. The resulting heat-treated product was made to pass through a sieve to give a fluorescent material having a composition of $(Y_{0.788}Gd_{0.2}Ce_{0.012})_3Al_5O_{12}$.

Comparative Example 2

[0067] A fluorescent material having a composition of $(Y_{0.95}Ce_{0.017}Eu_{0.033})_3Al_5O_{12}$ was obtained in the same manner as in Example 1, except for weighing and using 293.48 g of Y_2O_3 , 8.01 g of CeO_2 , 15.89 g of Eu_2O_3 , and 232.60 g of Al_2O_3 as the raw materials.

Comparative Example 3

[0068] A fluorescent material having a composition of $(Tb_{0.92}Ce_{0.01}Eu_{0.07})_3Al_5O_{12}$ was obtained in the same manner as in Example 1, except for weighing and using 349.01 g of Tb_4O_7 , 3.49 g of CeO_2 , 25.00 g of Eu_2O_3 , and 172.50 g of Al_2O_3 as the raw materials.

Comparative Example 4

[0069] A fluorescent material having a composition of $(Y_{0.875}Tb_{0.119}Ce_{0.003}Eu_{0.003})_3(Al_{0.6}Ga_{0.4})_5O_{12}$ was obtained in the same manner as in Example 1, except for weighing and using 227.58 g of Y_2O_3 , 52.06 g of Tb_4O_7 , 1.21 g of CeO_2 , 1.23 g of Eu_2O_3 , 119.08 g of Al_2O_3 , and 145.85 g of Ga_2O_3 as the raw materials.

[0070] The fluorescent materials of Examples 1 to 5 and Comparative Examples 1 to 4 were subjected to composition analysis and to measurement of relative light emission intensity and luminescent chromaticity, according to the methods mentioned below.

Composition Analysis

[0071] Composition analysis was performed according to an alkali fusion method using an ICP emission spectrophotometer (OPTIMA, manufactured by Perkin Elmer, Inc.).

Relative Light Emission Intensity (%)

[0072] With respect to the fluorescent materials of the Examples and Comparative Examples, light was applied at an excitation wavelength of 450 nm, and a relative light emission intensity (PL Intensity) (%) to the wavelength was measured at room temperature ($25^{\circ}\text{C} \pm 5^{\circ}\text{C}$) with a spectrofluorophotometer (QE-2000, manufactured by Otsuka Electronics Co., Ltd.). With respect to the fluorescent materials of the Examples and Comparative Examples, the wavelength at which the light emission intensity is the highest in a wavelength region of 450 nm to 650 nm is referred to as the light emission peak wavelength (nm), and the light emission intensity at the light emission peak wavelength in Examples and Comparative Examples was expressed as a relative light emission intensity (%) relative to the light emission intensity at the light emission peak wavelength in Comparative Example 1, 100%. The results are shown in Table 1. Fig. 1 shows the light emission spectra in Example 1 and Comparative Example 1. Fig. 7 shows the light emission spectra in Comparative Examples 1 to 4.

Chromaticity (x, y) in CIE1931 Chromaticity Coordinate System

[0073] With respect to the fluorescent materials of the Examples and Comparative Examples, the chromaticity x, y was measured in a CIE1931 chromaticity coordinate system, using a quantum efficiency measuring apparatus (QE-2000, manufactured by Otsuka Electronics Co., Ltd.). The results are shown in Table 1.

Excitation Spectrometry

[0074] With respect to the fluorescent materials of the Examples and Comparative Examples, the excitation spectrum of each fluorescent material was measured at the light emission peak wavelength thereof, at room temperature ($25^{\circ}\text{C} \pm 5^{\circ}\text{C}$) and in a range of 250 nm or more and 510 nm or less, using a fluorescence spectrophotometer (product name: F-4500, manufactured by Hitachi High-Technologies Corporation). In the excitation spectrum pattern, the maximum intensity of the spectrum of each fluorescent material is referred to as 100%. Fig. 2 shows the excitation spectra in Example 1 and Comparative Example 1. Fig. 8 shows the excitation spectra in Comparative Examples 1 to 4.

Table 1

	Fluorescent Material Composition	Light Emission Peak Wavelength (nm)	Relative Light Emission Intensity (%)	Chromaticity	
				x	y
Example 1	$(\text{Y}_{0.229}\text{Tb}_{0.768}\text{Ce}_{0.001}\text{Eu}_{0.002})_3(\text{Al}_{0.55}\text{Ga}_{0.45})_5\text{O}_{12}$	591	273	0.576	0.419
Example 2	$(\text{Y}_{0.229}\text{Tb}_{0.767}\text{Ce}_{0.002}\text{Eu}_{0.002})_3(\text{Al}_{0.55}\text{Ga}_{0.45})_5\text{O}_{12}$	591	247	0.554	0.438
Example 3	$(\text{La}_{0.229}\text{Tb}_{0.767}\text{Ce}_{0.002}\text{Eu}_{0.002})_3(\text{Al}_{0.55}\text{Ga}_{0.45})_5\text{O}_{12}$	591	236	0.553	0.439
Example 4	$(\text{Y}_{0.468}\text{Tb}_{0.528}\text{Ce}_{0.002}\text{Eu}_{0.002})_3(\text{Al}_{0.55}\text{Ga}_{0.45})_5\text{O}_{12}$	591	213	0.486	0.498
Example 5	$(\text{Y}_{0.228}\text{Tb}_{0.764}\text{Ce}_{0.006}\text{Eu}_{0.002})_3(\text{Al}_{0.8}\text{Ga}_{0.2})_5\text{O}_{12}$	591	110	0.454	0.522
Comparative Example 1	$(\text{Y}_{0.788}\text{Gd}_{0.2}\text{Ce}_{0.012})_3\text{Al}_5\text{O}_{12}$	562	100	0.463	0.522
Comparative Example 2	$(\text{Y}_{0.95}\text{Ce}_{0.017}\text{Eu}_{0.033})_3\text{Al}_5\text{O}_{12}$	538	12	0.425	0.556
Comparative Example 3	$(\text{Tb}_{0.92}\text{Ce}_{0.01}\text{Eu}_{0.07})_3\text{Al}_5\text{O}_{12}$	-	-	-	-
Comparative Example 4	$(\text{Y}_{0.875}\text{Tb}_{0.119}\text{Ce}_{0.003}\text{Eu}_{0.003})_3(\text{Al}_{0.6}\text{Ga}_{0.4})_5\text{O}_{12}$	543	76	0.345	0.561

[0075] As shown in Table 1, the fluorescent materials of Examples 1 to 5 each contain three lanthanoid elements of Tb, Ce and Eu, in which, therefore, a part of the rare earth element Ln constituting the garnet type crystal structure was

substituted with the three lanthanoid elements Tb, Ce and Eu, and consequently, these fluorescent materials each gave a strong light emission peak at around a wavelength of 591 nm in the light emission spectrum thereof, as a result of receiving the light from the excitation light source, and therefore had a high relative light emission intensity. In addition, the fluorescent materials of Examples 1 to 5 each provided an emission color of such that the chromaticity x, y in a CIE1931 chromaticity coordinate system each fall within a range of $0.450 \leq x \leq 0.580$ and $0.410 \leq y \leq 0.530$, as a result of receiving the light from an excitation light source. The fluorescent materials of Examples 1 to 3 each provided an emission color having a strong red component. The fluorescent materials of Example 4 and Example 5 provided an emission color of orange having a strong yellowing tone.

[0076] Regarding the fluorescent material of Comparative Example 1, x in a CIE1931 chromaticity coordinate system was 0.463 and y was 0.522, that is, the fluorescent material emitted a yellow color. Regarding the fluorescent material of Comparative Example 2, the relative light emission intensity at a wavelength of 538 nm was 12% and was extremely low, and the fluorescent material emitted a yellow color light. The fluorescent material of Comparative Example 3 barely emitted light, and the relative light emission intensity and the chromaticity thereof could not be measured. Regarding the fluorescent material of Comparative Example 4, the relative light emission intensity at a wavelength of 543 nm was 76% and was low, and the fluorescent material emitted a yellowish green to yellow color light.

[0077] As shown in Fig. 1, the fluorescent material of Example 1 gave a sharp and strong light emission peak at around a wavelength of 591 nm in the light emission spectrum. On the other hand, the fluorescent material of Comparative Example 1 had a peak top at around a wavelength of 562 nm, and gave a broad light emission peak in a range of 480 nm or more and 750 nm or less.

[0078] As shown in Fig. 2, it is confirmed that the fluorescent material of Example 1 had a relative intensity of 80% or more in a wavelength range of 400 nm or more and 480 nm or less, more specifically 420 nm or more and 460 nm or less, and efficiently absorbed the light from the excitation light source having a light emission peak wavelength of 380 nm or more and 485 nm or less, and was thereby excited to give a high light emission intensity. In addition, as shown in Fig. 2, also the fluorescent material of Comparative Example 1 had a relative intensity of 80% or more in a wavelength region of 400 nm or more and 480 nm or less, more specifically 430 nm or more and 480 nm or less, and absorbed the light from the excitation light source having a light emission peak wavelength of 380 nm or more and 485 nm or less.

Examples 6 to 10, and Comparative Example 5

[0079] Garnet-structured fluorescent materials each having a composition of a rare earth aluminum-gallate were obtained in the same manner as in Example 1, except for using Y_2O_3 , Tb_4O_7 , CeO_2 , Eu_2O_3 , Al_2O_3 , and Ga_2O_3 as raw materials and weighing the raw materials such that the parameter a, the parameter b, the parameter c and the parameter d had the values shown in Table 2. The values of the parameter b and the parameter c in Table 2 are values calculated by multiplying the numerical values in Table 2 by 10^{-2} . In the same manner as in Example 1, the light emission spectra of the fluorescent materials of Examples 6 to 10 and Comparative Example 5 and the relative light emission intensity (%) at a peak wavelength of 591 nm thereof were determined. The results in Example 2, Examples 6 to 10 and Comparative Example 5 are shown in Table 2. Fig. 3 is a graph showing a relative light emission intensity (%) at a wavelength of 591 nm of each fluorescent material relative to the parameter a in the composition of each fluorescent material.

Table 2

	Tb	Ce	Eu	Ga	Peak Wavelength 591 nm
	Parameter a	Parameter b ($\times 10^{-2}$)	Parameter c ($\times 10^{-2}$)	Parameter d	Relative Light Emission Intensity (%)
Comparative Example 5	0.120	0.200	0.200	0.450	48
Example 6	0.269				85
Example 7	0.418				161
Example 8	0.528				213
Example 9	0.647				247
Example 2	0.767				247
Example 10	0.996				131

[0080] As shown in Table 2 and Fig. 3, in the case where the total molar ratio of the rare earth element Ln, and Tb

and Ce and Eu is 3 and where the molar ratio of Tb is a product of 3 and the parameter a, based on the total molar ratio of Al and Ga in the composition of a rare earth aluminum-gallate of the fluorescent material, which is 5, the light emission intensity of the fluorescent material at around a wavelength of 591 nm was high when the parameter a was 0.25 or more and less than 1. As known from Example 2 and Examples 7 to 9, when the parameter a is 0.350 or more and 0.995 or less, the relative light emission intensity at around a wavelength of 591 nm was 150 % or more and was higher. On the other hand, as known from Comparative Example 5, when the parameter a is less than 0.25, the relative light emission intensity at around a wavelength of 591 nm was less than 50% and was extremely low.

Examples 11 to 18, and Comparative Examples 6 to 8

[0081] Garnet-structured fluorescent materials each having a composition of a rare earth aluminum-gallate were obtained in the same manner as in Example 1, except for using Y_2O_3 , Tb_4O_7 , CeO_2 , Eu_2O_3 , Al_2O_3 , and Ga_2O_3 as raw materials and weighing the raw materials such that the parameter a, the parameter b, the parameter c and the parameter d had the values shown in Table 3. The values of the parameter b and the parameter c in Table 3 are values calculated by multiplying the numerical values in Table 3 by 10^{-2} . In the same manner as in Example 1, the light emission spectra of the fluorescent materials of Examples 11 to 18 and Comparative Examples 6 to 8 and the relative light emission intensity (%) at a peak wavelength of 591 nm thereof were determined. The results in Example 2, Examples 11 to 18 and Comparative Examples 6 to 8 are shown in Table 3. Fig. 4 is a graph showing a relative light emission intensity (%) at a wavelength of 591 nm of each fluorescent material relative to the parameter b in the composition of each fluorescent material.

Table 3

	Tb	Ce	Eu	Ga	Peak Wavelength 591 nm
	Parameter a	Parameter b ($\times 10^{-2}$)	Parameter c ($\times 10^{-2}$)	Parameter d	Relative Light Emission Intensity (%)
Comparative Example 6	0.767	0.003	0.200	0.450	32
Comparative Example 7		0.007			100
Example 11		0.010			130
Example 12		0.050			240
Example 13		0.100			273
Example 14		0.150			256
Example 2		0.200			247
Example 15		0.400			195
Example 16		0.600			151
Example 17		0.900			118
Example 18		1.200			100
Comparative Example 8		2.400			90

[0082] As shown in Table 3 and Fig. 4, in the case where the total molar ratio of the rare earth element Ln, and Tb and Ce and Eu is 3 and where the molar ratio of Ce is a product of 3 and the parameter b, based on the total molar ratio of Al and Ga in the composition of a rare earth aluminum-gallate of the fluorescent material, which is 5, the light emission intensity of the fluorescent material at around a wavelength of 591 nm was high when the parameter b was 0.008×10^{-2} or more and 1.5×10^{-2} or less, preferably 0.01×10^{-2} or more and 0.95×10^{-2} or less, more preferably 0.015×10^{-2} or more and 0.7×10^{-2} or less. On the other hand, as in Comparative Examples 6 to 7, when the parameter b is less than 0.008×10^{-2} , or as in Comparative Example 8, when the parameter b is more than 1.5×10^{-2} , the relative light emission intensity at around a wavelength of 591 nm was not more than 100% and was low.

Examples 19 to 25 and Comparative Examples 9 to 10

[0083] Garnet-structured fluorescent materials each having a composition of a rare earth aluminum-gallate were obtained in the same manner as in Example 1, except for using Y_2O_3 , Tb_4O_7 , CeO_2 , Eu_2O_3 , Al_2O_3 , and Ga_2O_3 as raw materials and weighing the raw materials such that the parameter a, the parameter b, the parameter c and the parameter d had the values shown in Table 4. The values of the parameter b and the parameter c in Table 4 are values calculated by multiplying the numerical values in Table 4 by 10^{-2} . In the same manner as in Example 1, the light mission spectra of the fluorescent materials of Examples 19 to 25 and Comparative Examples 9 to 10 and the relative light emission intensity (%) at a peak wavelength of 591 nm thereof were determined. The results in Example 2, Examples 19 to 25 and Comparative Examples 9 to 10 are shown in Table 4. Fig. 5 is a graph showing a relative light emission intensity (%) at a wavelength of 591 nm of each fluorescent material relative to the parameter c in the composition of each fluorescent material.

Table 4

	Tb	Ce	Eu	Ga	Peak Wavelength 591 nm
	Parameter a	Parameter b ($\times 10^{-2}$)	Parameter c ($\times 10^{-2}$)	Parameter d	Relative Light Emission Intensity (%)
Comparative Example 9	0.767	0.200	0.010	0.450	50
Example 19			0.015		100
Example 20			0.025		156
Example 21			0.050		216
Example 22			0.100		245
Example 2			0.200		247
Example 23			0.300		246
Example 24			0.800		185
Example 25			1.600		109
Comparative Example 10			3.000		36

[0084] As shown in Table 4 and Fig. 5, in the case where the total molar ratio of the rare earth element Ln, and Tb and Ce and Eu is 3 and where the molar ratio of Eu is a product of 3 and the parameter c, based on the total molar ratio of Al and Ga in the composition of a rare earth aluminum-gallate of the fluorescent material, which is 5, the light emission intensity of the fluorescent material at around a wavelength of 591 nm was high when the parameter c was 0.012×10^{-2} or more and 2×10^{-2} or less, preferably 0.014×10^{-2} or more and 1.6×10^{-2} or less, more preferably 0.02×10^{-2} or more and 1.2×10^{-2} or less. On the other hand, as in Comparative Example 9, when the parameter c is less than 0.012×10^{-2} , or as in Comparative Example 10, when the parameter c is more than 2×10^{-2} , the relative light emission intensity at around a wavelength of 591 nm was not more than 50% and was extremely low.

Examples 26 to 32, and Comparative Example 11

[0085] Garnet-structured fluorescent materials each having a composition of a rare earth aluminum-gallate were obtained in the same manner as in Example 1, except for using Y_2O_3 , Tb_4O_7 , CeO_2 , Eu_2O_3 , Al_2O_3 , and Ga_2O_3 as raw materials and weighing the raw materials such that the parameter a, the parameter b, the parameter c and the parameter d had the values shown in Table 5. The values of the parameter b and the parameter c in Table 5 are values calculated by multiplying the numerical values in Table 5 by 10^{-2} . In the same manner as in Example 1, the light mission spectra of the fluorescent materials of Examples 26 to 32 and Comparative Example 11 and the relative light emission intensity (%) at a peak wavelength of 591 nm thereof were determined. The results in Example 5, Examples 26 to 32 and Comparative Example 11 are shown in Table 5. Fig. 6 is a graph showing a relative light emission intensity (%) at a wavelength of 591 nm of each fluorescent material relative to the parameter d in the composition of each fluorescent material.

Table 5

	Tb	Ce	Eu	Ga	Peak Wavelength 591 nm
	Parameter a	Parameter b ($\times 10^{-2}$)	Parameter c ($\times 10^{-2}$)	Parameter d	Relative Light Emission Intensity (%)
Example 26	0.764	0.600	0.200	0.000	102
Example 27				0.150	104
Example 5				0.200	110
Example 28				0.350	134
Example 29				0.400	140
Example 30				0.450	151
Example 31				0.600	140
Example 32				0.800	100
Comparative Example 11				1.000	40

[0086] As shown in Table 5 and Fig. 6, in the case where the total molar ratio of the rare earth element Ln, and Tb and Ce and Eu is 3 and where the molar ratio of Ga is a product of 5 and the parameter d, based on the total molar ratio of Al and Ga in the composition of a rare earth aluminum-gallate of the fluorescent material, which is 5, the light emission intensity of the fluorescent material at around a wavelength of 591 nm was high when the parameter d was 0 or more and 0.85 or less, preferably 0.1 or more and 0.8 or less, more preferably 0.15 or more and 0.75 or less. On the other hand, as in Comparative Example 11, when the parameter d is more than 0.85, the relative light emission intensity at around a wavelength of 591 nm was not more than 50% and was extremely low.

[0087] As shown in Fig. 7, the relative light emission intensity at a wavelength of 538 nm of the fluorescent material of Comparative Example 2 was 12% and was extremely low, and the light emission peak was a broad peak in a broad wavelength range of 500 nm or more and 650 nm or less. Though the fluorescent material of Comparative Example 3 gave an extremely low peak at around a wavelength of 591 nm, the relative light emission intensity thereof was less than 5%, that is, the fluorescent material barely emitted light. The fluorescent material of Comparative Example 4 had a composition of a rare earth aluminum-gallate, in which, based on the total molar ratio of Al and Ga of 5, the total molar ratio of the rare earth element Ln, and Tb and Ce and Eu was 3 and the molar ratio of Tb was a product of 3 and the parameter a, but in which the parameter a was less than 0.25. Therefore, the peak wavelength of the fluorescent material, at which the light emission intensity thereof is the highest in a wavelength range of 450 nm to 650 nm, was 543 nm and the relative light emission intensity at a peak wavelength of 543 nm thereof was 76%, that is, the light emission intensity of the fluorescent material is lower than that of the fluorescent materials of Examples 1 to 5.

[0088] As shown in Fig. 8, the fluorescent materials of Comparative Examples 1 to 4 all had a relative light emission intensity of 80% or more in a wavelength range of 400 nm or more and 480 nm or less, and efficiently absorbed the light from an excitation light source having a light emission peak wavelength of 380 nm or more and 485 nm or less, but these fluorescent materials had a low relative light emission intensity as shown in Fig. 7.

[0089] In accordance with an embodiment of the present invention, there can be provided a fluorescent material having a composition of a rare earth aluminum-gallate having a high light emission intensity, and a light emitting device using the fluorescent material. The light emitting device can be used in lighting systems and sensor systems in security systems.

Claims


1. A fluorescent material having a composition of a rare earth aluminum-gallate, comprising:

at least one rare earth element Ln selected from the group consisting of Y, Gd, La, Lu, Sc and Sm; at least one Group 13 element selected from Al and Ga; Tb; Ce; and Eu, wherein
when a total molar ratio 5 of Al and Ga is used as a basis, a total molar ratio of Ln, and Tb, Ce and Eu is 3,
a molar ratio of Tb is a product of 3 and a value of a parameter a,

a molar ratio of Ce is a product of 3 and a value of a parameter b,
 a molar ratio of Eu is a product of 3 and a value of a parameter c,
 a molar ratio of Ga is a product of 5 and a value of a parameter d,
 the parameter a is 0.25 or more and less than 1,
 the parameter b is 0.008×10^{-2} or more and 1.5×10^{-2} or less,
 the parameter c is 0.012×10^{-2} or more and 2×10^{-2} or less, and
 the parameter d is 0 or more and 0.85 or less.

2. The fluorescent material according to claim 1, wherein the at least one Group 13 element contains Al and optionally Ga.

3. The fluorescent material according to claim 1 or 2, having a composition represented by the following formula (I):



wherein Ln represents at least one rare earth element selected from the group consisting of Y, Gd, La, Lu, Sc and Sm, and

the values of parameters a, b, c and d are numbers satisfying $0.25 \leq a < 1$, $0.008 \times 10^{-2} \leq b \leq 1.5 \times 10^{-2}$, $0.012 \times 10^{-2} \leq c \leq 2 \times 10^{-2}$, and $0 \leq d \leq 0.85$.

4. The fluorescent material according to any one of claims 1 to 3, wherein
 the parameter a is 0.3 or more and less than 1,
 the parameter b is 0.01×10^{-2} or more and 0.95×10^{-2} or less,
 the parameter c is 0.014×10^{-2} or more and 1.6×10^{-2} or less, and
 the parameter d is 0.1 or more and 0.8 or less.

5. The fluorescent material according to any one of claims 1 to 3, wherein
 the parameter a is 0.35 or more and less than 1,
 the parameter b is 0.015×10^{-2} or more and 0.7×10^{-2} or less,
 the parameter c is 0.02×10^{-2} or more and 1.2×10^{-2} or less, and
 the parameter d is 0.15 or more and 0.75 or less.

6. The fluorescent material according to any one of claims 1 to 5, wherein the rare earth element Ln is at least one selected from the group consisting of Y, Gd, La, Lu and Sc.

7. The fluorescent material according to any one of claims 1 to 6, wherein the chromaticity of an emission color of the fluorescent material falls within a range of $0.420 \leq x \leq 0.600$ and $0.300 \leq y \leq 0.530$ in a CIE1931 chromaticity coordinate system.

8. A light emitting device comprising the fluorescent material of any one of claims 1 to 7, and an excitation light source.

9. The light emitting device according to claim 8, wherein the excitation light source has a light emission peak wavelength within a range of 380 nm or more and 485 nm or less.

FIG. 1

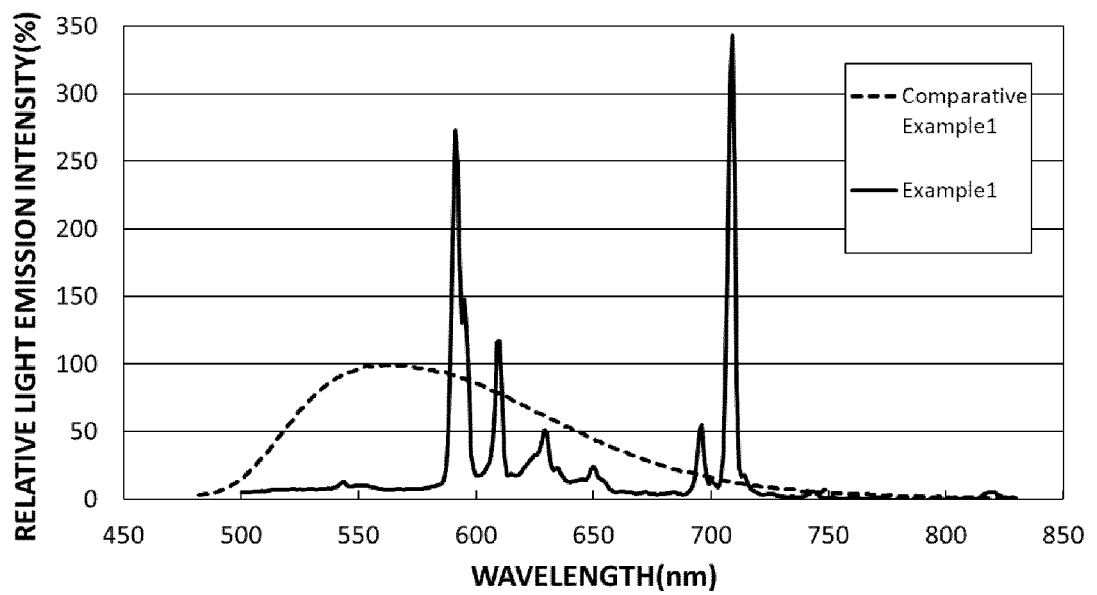


FIG. 2

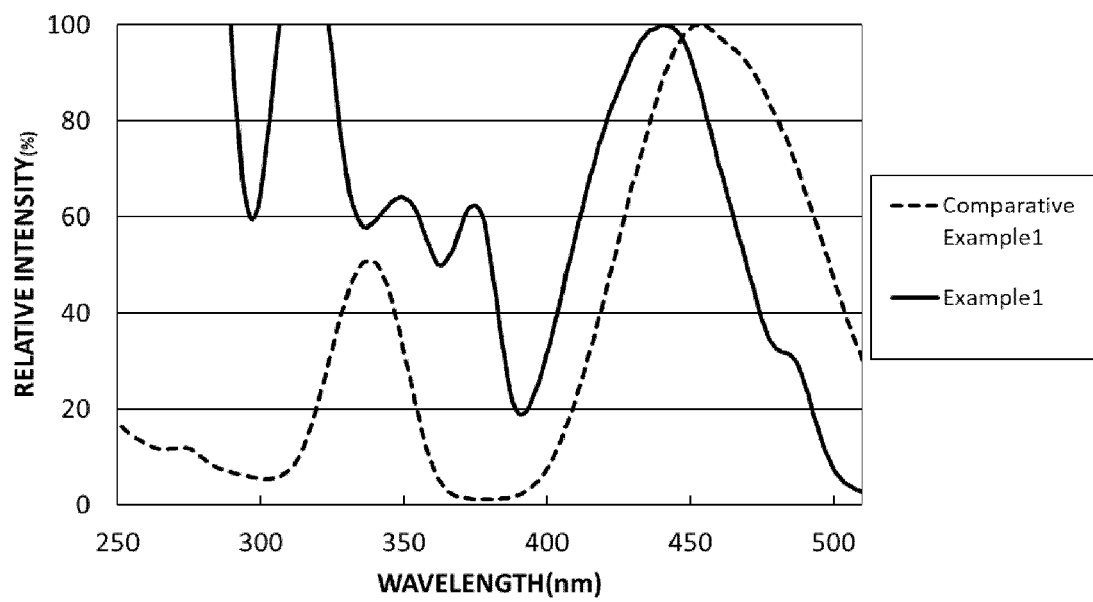


FIG. 3

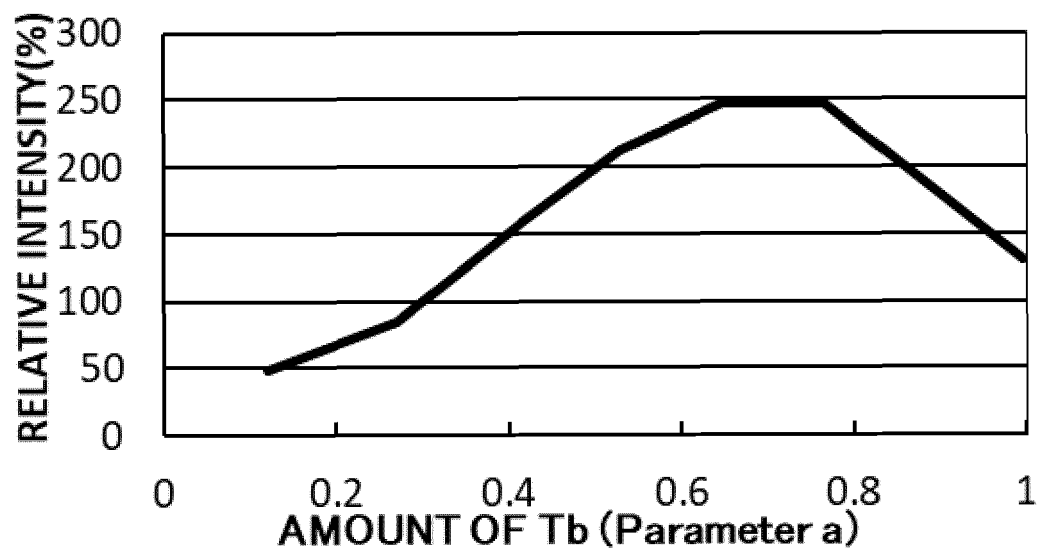


FIG. 4

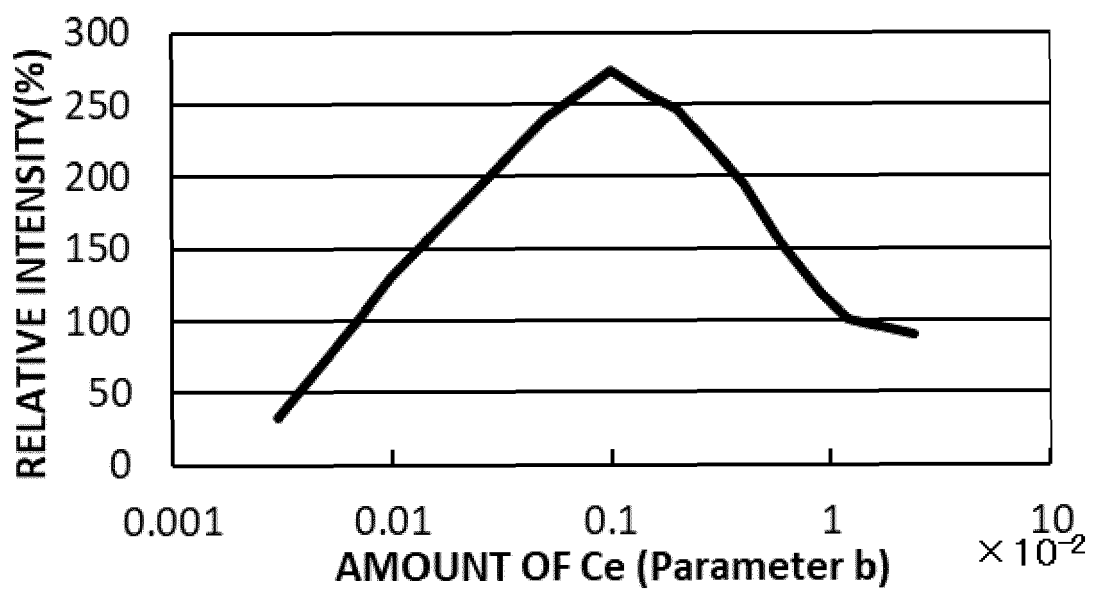


FIG. 5

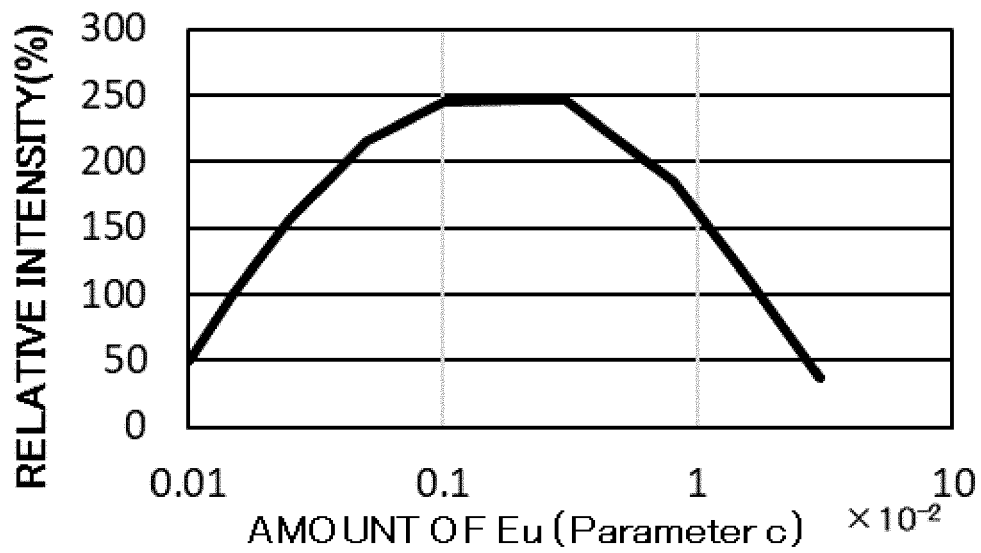


FIG. 6

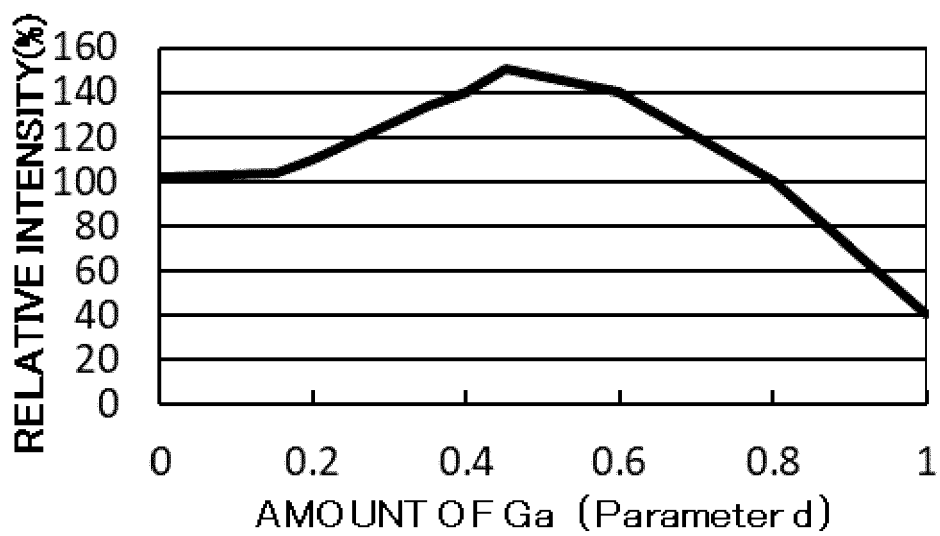


FIG. 7


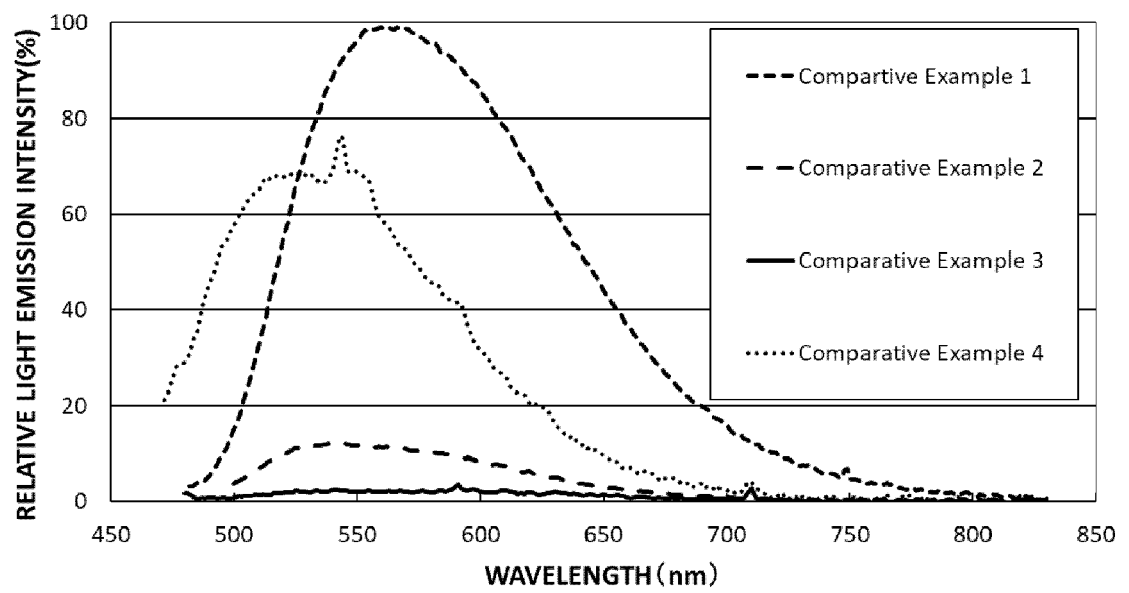


FIG. 8



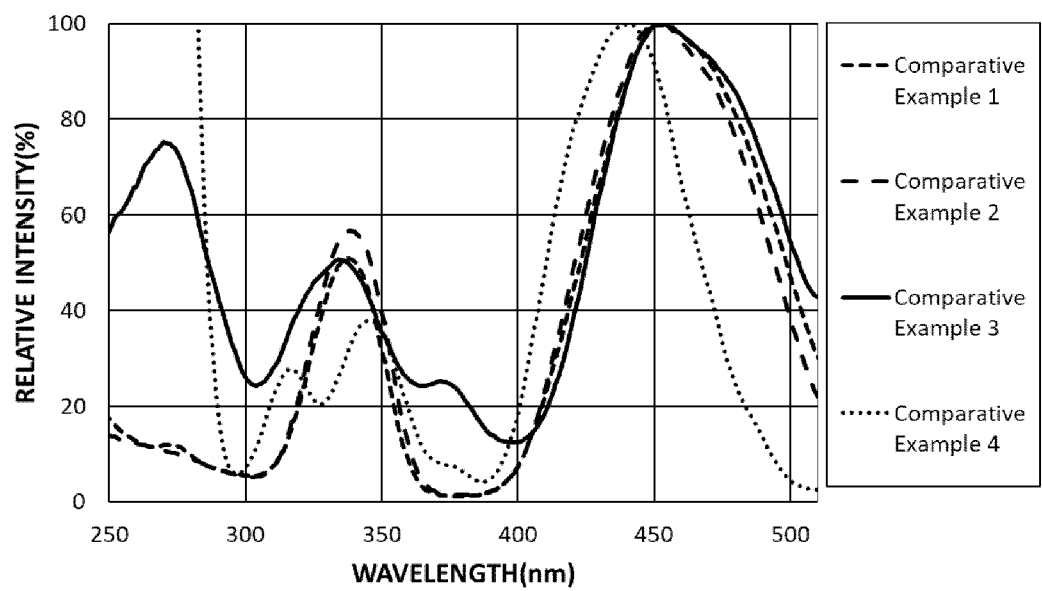

EUROPEAN SEARCH REPORT

 Application Number
 EP 18 17 2459

5

10

15

20

25

30

35

40

45

50

55

1

EPO FORM 1503 03.82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2007/103057 A1 (SOHN JONG R [KR] ET AL) 10 May 2007 (2007-05-10) * paragraphs [0012] - [0015], [0037]; claims 1-12 *	1,2,4-9	INV. C09K11/64 C09K11/77
A	JIA P Y ET AL: "Pechini sol-gel deposition and luminescence properties of Y ³ Al ⁵ "-xGa ^x O ¹ 2:Ln ³ + (Ln ³ + = Eu ³ +, Ce ³ +, Tb ³ +, 0 ≤ x ≤ 5) thin films", THIN SOLID F, ELSEVIER, AMSTERDAM, NL, vol. 483, no. 1-2, 1 July 2005 (2005-07-01), pages 122-129, XP004906507, ISSN: 0040-6090, DOI: 10.1016/J.TSF.2004.12.055 * paragraph [2.1Fabricationofthefilms] * * figures 4, 6, 8 *	1-9	
A	EP 0 936 682 A1 (NICHIA KAGAKU KOGYO KK [JP]) 18 August 1999 (1999-08-18) * claims 1-23 *	1-9	TECHNICAL FIELDS SEARCHED (IPC)
A	US 8 198 798 B2 (CHI MEI CORPORATION) 12 June 2012 (2012-06-12) * claims 1-10 *	1-9	C09K
A	US 2002/180338 A1 (WANG CHIEN-YUAN [TW] ET AL) 5 December 2002 (2002-12-05) * paragraphs [0011], [0020]; claims 1-21; example 1 *	1-9	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 12 October 2018	Examiner Kövecs, Monika
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 18 17 2459

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-10-2018

10

15

20

25

30

35

40

45

50

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007103057 A1	10-05-2007	JP 2007126670 A	24-05-2007
		KR 20070048374 A	09-05-2007
		US 2007103057 A1	10-05-2007

EP 0936682 A1	18-08-1999	AT 195831 T	15-09-2000
		AU 720234 B2	25-05-2000
		BR 9710792 A	11-01-2000
		BR PI9715264 B1	09-05-2017
		CA 2262136 A1	05-02-1998
		CA 2479538 A1	05-02-1998
		CA 2479842 A1	05-02-1998
		CA 2481364 A1	05-02-1998
		CN 1268250 A	27-09-2000
		CN 1495917 A	12-05-2004
		CN 1495918 A	12-05-2004
		CN 1495919 A	12-05-2004
		CN 1495920 A	12-05-2004
		CN 1495921 A	12-05-2004
		CN 1495925 A	12-05-2004
		CN 1825646 A	30-08-2006
		CN 1893131 A	10-01-2007
		CN 1893132 A	10-01-2007
		CN 1893133 A	10-01-2007
		DE 29724458 U1	26-04-2001
		DE 29724642 U1	08-08-2002
		DE 29724670 U1	19-09-2002
		DE 29724764 U1	08-01-2004
		DE 29724773 U1	12-02-2004
		DE 69702929 D1	28-09-2000
		DE 69702929 T2	01-02-2001
		DK 0936682 T3	30-10-2000
		DK 1017111 T3	11-01-2016
		DK 1429398 T3	30-11-2015
		DK 2194590 T3	27-06-2016
		DK 2197053 T3	14-09-2015
		DK 2197054 T3	27-06-2016
		DK 2197055 T3	02-05-2016
		DK 2197057 T3	18-04-2016
		DK 2276080 T3	14-09-2015
		EP 0936682 A1	18-08-1999
		EP 1017111 A2	05-07-2000
		EP 1017112 A2	05-07-2000
		EP 1045458 A2	18-10-2000
		EP 1271664 A2	02-01-2003
		EP 1429397 A2	16-06-2004
		EP 1429398 A2	16-06-2004

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

55

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 18 17 2459

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-10-2018

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		EP 2194590 A2	09-06-2010
		EP 2197053 A2	16-06-2010
		EP 2197054 A2	16-06-2010
		EP 2197055 A2	16-06-2010
		EP 2197056 A2	16-06-2010
		EP 2197057 A2	16-06-2010
		EP 2276080 A2	19-01-2011
		ES 2148997 T3	16-10-2000
		ES 2544690 T3	02-09-2015
		ES 2545981 T3	17-09-2015
		ES 2550823 T3	12-11-2015
		ES 2553570 T3	10-12-2015
		ES 2569615 T3	11-05-2016
		ES 2569616 T3	11-05-2016
		ES 2576052 T3	05-07-2016
		ES 2576053 T3	05-07-2016
		GR 3034493 T3	29-12-2000
		HK 1021073 A1	05-10-2001
		HK 1027668 A1	06-05-2016
		HK 1030095 A1	11-06-2004
		HK 1052409 A1	09-10-2015
		HK 1066095 A1	17-11-2006
		HK 1066096 A1	17-11-2006
		HK 1066097 A1	08-12-2006
		HK 1144978 A1	04-11-2016
		HK 1144979 A1	20-11-2015
		HK 1144980 A1	07-10-2016
		HK 1144982 A1	04-11-2016
		HK 1149851 A1	18-12-2015
		JP 3503139 B2	02-03-2004
		JP 3700502 B2	28-09-2005
		JP 3729166 B2	21-12-2005
		JP 4124248 B2	23-07-2008
		JP 4530094 B2	25-08-2010
		JP 5177199 B2	03-04-2013
		JP 5177317 B2	03-04-2013
		JP 5214253 B2	19-06-2013
		JP 5610056 B2	22-10-2014
		JP 5664815 B2	04-02-2015
		JP 5692445 B2	01-04-2015
		JP 5725045 B2	27-05-2015
		JP 5821154 B2	24-11-2015
		JP 5953514 B2	20-07-2016
		JP 6101943 B2	29-03-2017
		JP 2000208815 A	28-07-2000
		JP 2002198573 A	12-07-2002

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 18 17 2459

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-10-2018

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP 2003179259 A	27-06-2003
		JP 2005317985 A	10-11-2005
		JP 2006332692 A	07-12-2006
		JP 2008160140 A	10-07-2008
		JP 2009135545 A	18-06-2009
		JP 2011009793 A	13-01-2011
		JP 2012231190 A	22-11-2012
		JP 2013102196 A	23-05-2013
		JP 2014078746 A	01-05-2014
		JP 2014187398 A	02-10-2014
		JP 2014209656 A	06-11-2014
		JP 2014212335 A	13-11-2014
		JP 2014212336 A	13-11-2014
		JP 2016086176 A	19-05-2016
		JP 2016154247 A	25-08-2016
		JP 2016178320 A	06-10-2016
		KR 20000029696 A	25-05-2000
		KR 20030097577 A	31-12-2003
		KR 20030097578 A	31-12-2003
		KR 20030097609 A	31-12-2003
		KR 20050044817 A	12-05-2005
		KR 20050053800 A	10-06-2005
		MY 125748 A	30-08-2006
		PT 936682 E	31-01-2001
		PT 1017111 E	22-01-2016
		PT 1429398 E	16-12-2015
		PT 2197053 E	04-09-2015
		PT 2276080 E	12-10-2015
		SG 115349 A1	28-10-2005
		SG 182008 A1	30-07-2012
		SG 182856 A1	30-08-2012
		SG 182857 A1	30-08-2012
		SG 10201502321U A	28-05-2015
		TW 383508 B	01-03-2000
		TW 1156177 B	11-01-2005
		US 5998925 A	07-12-1999
		US 6069440 A	30-05-2000
		US 6614179 B1	02-09-2003
		US 2004000868 A1	01-01-2004
		US 2004004437 A1	08-01-2004
		US 2004090180 A1	13-05-2004
		US 2004222435 A1	11-11-2004
		US 2005280357 A1	22-12-2005
		US 2007114914 A1	24-05-2007
		US 2007159060 A1	12-07-2007
		US 2008138918 A1	12-06-2008

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 18 17 2459

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-10-2018

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 2009315014 A1	24-12-2009
		US 2009315015 A1	24-12-2009
		US 2009316068 A1	24-12-2009
		US 2010001258 A1	07-01-2010
		US 2010006819 A1	14-01-2010
		US 2010019224 A1	28-01-2010
		US 2010019270 A1	28-01-2010
		US 2010117516 A1	13-05-2010
		US 2010264841 A1	21-10-2010
		US 2010264842 A1	21-10-2010
		US 2011053299 A1	03-03-2011
		US 2011062864 A1	17-03-2011
		US 2011297990 A1	08-12-2011
		US 2014084323 A1	27-03-2014
		WO 9805078 A1	05-02-1998

US 8198798	B2 12-06-2012	TW 201139619 A	16-11-2011
		US 2011273078 A1	10-11-2011

US 2002180338	A1 05-12-2002	DE 10202742 A1	05-12-2002
		JP 2002363555 A	18-12-2002
		TW 1282357 B	11-06-2007
		US 2002180338 A1	05-12-2002
		US 2004258599 A1	23-12-2004

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2017100133 A [0001]
- JP 2002363555 A [0005] [0006]
- JP 2006233158 A [0005] [0006]
- JP 2007126670 A [0005] [0006]

专利名称(译)	具有稀土铝酸盐的组成的荧光材料和发光器件		
公开(公告)号	EP3404077A1	公开(公告)日	2018-11-21
申请号	EP2018172459	申请日	2018-05-15
申请(专利权)人(译)	日亚公司		
当前申请(专利权)人(译)	日亚公司		
[标]发明人	SUZUKI TOMOKAZU		
发明人	SUZUKI, TOMOKAZU		
IPC分类号	C09K11/64 C09K11/77		
CPC分类号	C09K11/7792 H01L33/502		
优先权	2017100133 2017-05-19 JP		
其他公开文献	EP3404077B1		
外部链接	Espacenet		

摘要(译)

本发明提供具有高发光强度的稀土铝酸盐的组成的荧光材料，以及使用该荧光材料的发光装置。荧光材料具有含有至少一种选自Y，Gd，La，Lu，Sc和Sm的稀土元素Ln的稀土铝酸盐的组成；至少一种选自Al和Ga的13族元素；铽；镱；和铕。当使用Al和Ga的总摩尔组成比5作为基础时，Ln和Tb，Ce和Eu的总摩尔比为3，Tb的摩尔比为3的乘积和参数a的值。，Ce的摩尔比是3的乘积和参数b的值，Eu的摩尔比是3的乘积和参数c的值，Ga的摩尔比是5的乘积和值参数d为0.25或更大且小于1，参数b为 0.008×10^{-2} 或更大且 1.5×10^{-2} 或更小，参数c为 0.012×10^{-2} 或更大且 2×10^{-2} 以下，参数d为0以上且0.85以下。

FIG. 1

