

(19)



(11)

EP 1 276 154 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
24.10.2012 Bulletin 2012/43

(51) Int Cl.:
H01L 27/32^(2006.01)

(21) Application number: **02014907.6**

(22) Date of filing: **05.07.2002**

(54) **Organic EL display device**

Organische elektrolumineszente Anzeigevorrichtung

Dispositif d'affichage électroluminescent organique

(84) Designated Contracting States:
DE FR GB NL

(30) Priority: **12.07.2001 KR 2001041891**

(43) Date of publication of application:
15.01.2003 Bulletin 2003/03

(60) Divisional application:
10183220.2 / 2 261 975

(73) Proprietor: **LG Electronics, Inc.**
Seoul (KR)

(72) Inventor: **Kim, Chang Nam**
Chungnang-gu,
Seoul (KR)

(74) Representative: **Trinks, Ole et al**
Meissner, Bolte & Partner GbR
P.O. Box 102605
86016 Augsburg (DE)

(56) References cited:
EP-A- 0 767 599 EP-A- 0 795 772
EP-A- 1 093 166

- **PATENT ABSTRACTS OF JAPAN vol. 2000, no. 06, 22 September 2000 (2000-09-22) -& JP 2000 082720 A (CANON INC), 21 March 2000 (2000-03-21)**

EP 1 276 154 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**BACKGROUND OF THE INVENTION****Field of the Invention**

[0001] The present invention relates to a display device, and more particularly, to an organic EL display device according to claim 1.

Discussion of the Related Art

[0002] FIG. 1 is a plan view showing an organic EL display panel to which a related art film type device is attached.

[0003] As shown in FIG. 1, the organic EL display panel includes a first electrode 2, a second electrode 4, a connecting part 4-1 of the second electrode, a barrier 6 and an organic EL layer 3.

[0004] The strip type electrode is formed by chemically etching on a transparent substrate 1, and the second electrode 4 is formed in perpendicular to the first electrode 2. At this time, the connecting part 4-1 of the second electrode is used to easily form second electrode patterns, and the barrier is formed to electrically disconnect the second electrode patterns with one another. After that, the organic EL layer 3 is deposited on the barrier 6 by a vacuum deposition method.

[0005] Referring to FIG. 1, the first electrode 2 is formed in perpendicular to the second electrode 4. In this respect, the related art organic EL display panel includes a film type device 5 (COF, FPC, TCP, etc.) having a line 5-1 for connecting the display panel to a driving chip (not shown), and two TAB regions for connecting the display panel to the first and second electrodes.

[0006] That is, the two film type devices 5 such as FPC, TCP and COF are required to mount the line on the PCB, and the TAB process steps are performed two times.

[0007] Accordingly, manufacturing cost is increased in that the two FPCs (or TCPs) are used and the TAB process steps are performed two times, so that competitive power of the organic EL display panel is weakened due to high manufacturing cost.

[0008] Further prior art is known from Patent Abstract of Japan JP 2000 082720 A, 21 March 2000/22 September 2000; EP-A-0 767 599; EP-A-1 093 166; EP-A-0 795 772.

SUMMARY OF THE INVENTION

[0009] Accordingly, the present invention is directed to an organic EL display panel that substantially obviates one or more problems due to limitations and disadvantages of the related art.

[0010] An object of the present invention is to provide an organic EL display panel, in which a TAB region of a film type device is formed at a minimum size to decrease manufacturing cost of the module, and electrode lines

having different lengths are alternately formed in the TAB region to increase a contact region of the electrode lines to connectors in a case of that the pitch of the electrode lines become narrow with high resolution of the organic EL display device, so that it is possible to stably connect the electrode lines to the film type device through the connectors even though an error range for aligning is wide.

[0011] Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the invention may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0012] To achieve these objects and other advantages and in accordance with the purpose of the invention, as embodied and broadly described herein, an organic EL display panel is provided as defined in claim 1.

[0013] It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention. In the drawings:

FIG. 1 is a plan view showing an organic EL display panel to which a related art film type device is attached;

[0015] FIG. 2 is a plan view showing an organic EL display panel to which a film type device according to the present invention is attached; and

FIG. 3 is a detailed view showing "A" portion of FIG. 2.

[0015] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

[0016] An organic EL display panel according to the present invention will be explained with reference to the accompanying drawings.

[0017] FIG. 2 is a plan view showing an organic EL display panel to which a film type device according to the present invention is attached.

[0018] As shown in FIG. 2, the organic EL display panel includes a transparent substrate 10, an organic EL layer

30, a connecting part 40-1 of a second electrode, a barrier 60, first electrode lines 20-2a, 20-2b and second electrode lines 40-2a, 40-2b.

[0019] At this time, the organic EL layer 30 is formed in a plurality of pixels defined by crossing a plurality of first and second electrodes 20, 40 to one another. Then, the connecting part 40-1 of the second electrode is used for easily forming second electrode patterns, and the barrier 60 is formed to electrically disconnect the second electrodes patterns 40 with one another. Also, the first electrode lines 20-2a, 20-2b having different lengths from each other are alternately formed on the transparent substrate 10 for being connected with a first electrode 20. The second electrode lines 40-2a, 40-2b having different lengths from each other are alternately formed on the transparent substrate 10 for being connected with the second electrode 40 through the connecting part 40-1 of the second electrode.

[0020] The organic EL display panel further includes first connectors 20-1a, 20-1b connected with the first electrode lines 20-2a, 20-2b, and second connectors 40-1a, 40-1b connected with the second electrode lines 40-2a, 40-2b.

[0021] The first and second electrode lines 20-2a, 20-2b and 40-2a, 40-2b may be formed with transparent electrodes, and supplementary electrodes of metal material for improving conductivity. In another way, the first and second electrode lines may be formed only with the supplementary electrodes.

[0022] The first and second connectors 20-1a, 20-1b and 40-2a, 40-2b are formed with transparent electrodes, and supplementary electrode of metal material for improving conductivity. In another way, the first and second connectors may be formed only with the transparent electrodes.

[0023] The first and second electrode lines 20-2a, 20-2b and 40-2a, 40-2b are arranged in one direction. Then, a film type device 50 (COF, FPC, TCP, etc.) having a line 50-1 of the same pitch with the first and second electrode lines 20-2a, 20-2b and 40-2a, 40-2b is attached to the display panel by a first TAB method.

[0024] The pitch and shape of the line 50-1 of the device 50 (FPC, TCP, COF, etc.) is same with that of the first and second electrode lines 20-2a, 20-2b and 40-2a, 40-2b.

[0025] The first and second electrode lines 20-2a, 20-2b and 40-2a, 40-2b are contacted to the line 50-1 of the device 50 by the first TAB method, and the line 50-1 is connected to a driving part (not shown) for driving the organic EL display panel.

[0026] FIG. 3 is a detailed view showing "A" portion of FIG. 2.

[0027] Referring to FIG. 3, long electrode lines 20-2b, 40-2b and short electrode lines 20-2a, 40-2a are alternately formed in a TAB region B of the organic EL display panel. At this time, the long electrode lines 20-2b, 40-2b formed between the short electrode lines are positioned at a lower part than the short electrode lines.

[0028] In this structure, the pitch Wp2 between the long electrode lines 20-2b, 40-2b and between the short electrode lines 20-2a, 40-2a is twice as high as the pitch "Wp1" between the electrodes of the display panel.

[0029] In the TAB region B, wide connectors 20-1a, 20-1b are formed at ends of the electrode lines 20-2a, 20-2b and 40-2a, 40-2b for easily connecting the line of the device to the electrode lines through the connectors.

[0030] Referring to FIG. 3, there is limitation in forming the pitch between the electrodes 20, 40 below the minimum pitch range.

[0031] Accordingly, the first and second electrodes 20, 40 are directly connected with the line 50-1 of the film type device 50 for driving the display panel by connecting the scan line (first electrode line) to the data line (second electrode line). At this time, an error range for aligning is narrow, so that the first and second electrode lines could be misaligned with the line 50-1 of the device 50.

[0032] However, if the electrode lines 20-2a, 20-2b and 40-2a, 40-2b having different lengths are alternately arranged, it is possible to increase the width of the connectors 20-1a, 20-1b and 40-1a, 40-1b connected to the electrode lines at a predetermined range, so that the line of the device can be contacted to the connectors within a narrow error range.

[0033] For example, if the line 50-1 of the related art device 50 is not within the range of "a" at both sides of the center in the connectors of the first electrode lines 20-2a, 20-2b, the line 50-1 of the device is not contacted to the first electrode 20.

[0034] However, in the present invention, the error range of the line 50-1 of the device 50 is varied according to the width of the connector 20-1a, 20-1b. That is, if the line 50-1 of the device 50 is within the range of "b" at both sides of the center in the connectors of the first electrode lines 20-2a, 20-2b, the line 50-1 of the device 50 is contacted to the first electrode 20.

[0035] The first electrode lines 20-2a, 20-2b having long and short lengths are alternately formed in the TAB region B of the display panel according to the present invention. In this respect, "2b" which is the width of the first connector 20-1a, 20-1b is wider than "2a" at a range of "x", which is the width between the first electrodes, to electrically connect the line 50-1 to the first electrode lines 20-2a, 20-2b.

[0036] If the width is increased at the range of "x", it is possible to stably perform the TAB process step even though the error range for aligning is wide.

[0037] Also, an insulating layer 70 is formed on the long first electrode line 20-2b between the short first electrode lines 20-2a, so that the long first electrode line 20-2b is insulated from the first connector 20-1a during the TAB process step of the device 50.

[0038] Even though the width of the first connector 20-1a connected to the first electrode line 20-2a is enlarged, the first electrode line 20-2b is insulated from the connector 20-1a in that the insulating layer 70 is formed on the first electrode line 20-2b.

[0039] At this time, the insulating layer 70 is formed of inorganic material such as oxide SiO₂ and nitride SiN_x, or organic material such as polyimide (especially, polyacryl, novolac, polyphenyl and polystyrene). Also, the insulating layer 70 is formed at a thickness of 0.01 μm to 10 μm.

[0040] The structure of the second electrode lines 40-2a, 40-2b and the second connectors 40-1a, 40-1b is same with that of FIG. 3, so that the explanation for the structure will be omitted.

[0041] The organic EL display panel is used for a display device having a film type device such as COF, TCP and FPC. At this time, the film type device has a driving chip connected to scan and data lines for driving the display panel.

[0042] The display device having the film type device such as COF, TCP and FPC includes the display panel, COF, a plurality of data and scan lines, and a plurality of connecting lines.

[0043] In the display panel, two first electrode lines having different lengths are alternately formed on the transparent substrate, and are connected to the first electrode. Also, two second electrode lines having different lengths are alternately formed in the display panel for being connected with the second electrode. Then, the COF includes a chip part at which the chip is positioned, and a connecting part at which the display panel is positioned. The plurality of data and scan lines are connected to the COF from the first and second electrode lines of the display panel. Subsequently, the plurality of connecting lines are formed in the connecting part to electrically connect the scan and data lines to the COF, respectively.

[0044] As explained above, the organic EL display panel according to the present invention has the following advantages.

[0045] With high resolution of the organic EL display panel, the pitch of the electrode line has been decreased. At this time, if the electrode lines having different lengths are alternately formed, it is possible to increase the width of the connector for connecting the electrode line to the line of the device such as COF, FPC and TCP by the TAB method. That is, even though the error range for aligning is wide, the electrode line is stably connected to the line of the device through the connector, so that the reliability of the display panel is obtained, and the yield is improved.

[0046] Also, it is possible to form the TAB regions at a minimum, so that the cost of the module is decreased in the manufacturing process steps.

[0047] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims.

Claims

1. An organic electroluminescent, EL, display device comprising:

a plurality of first electrodes (20) parallel to each other, extending along a first direction;
 a plurality of second electrodes (40) parallel to each other, extending along a second direction, which is perpendicular to the first direction;
 a matrix of organic EL pixels formed by the crossing of the plurality of first electrodes (20) and second electrodes (40) having an organic EL layer (30) therebetween;

first electrode lines (20-2a, 20-2b) and second electrode lines (40-2a, 40-2b), each of the first and second electrode lines respectively being arranged for connecting the first and second electrodes (20, 40) with a driving unit, each of said first and second electrode lines comprising a plurality of short electrode lines (20-2a, 40-2a) extending along said first direction and being alternately arranged with a plurality of long electrode lines (20-2b, 40-2b) extending along said first direction ; and

an electrical line connector (50) configured to connect the first electrodes and the second electrodes by means of the first and second electrode lines with a driving unit;

wherein the electrical line connector comprises:

first line connectors (20-1a, 20-1b) connected with the first electrode lines (20-2a, 20-2b) having a pitch;

connecting lines (40-1) connecting the second electrodes (40) with the second electrode lines (40-2a, 40-2b) in the direction of the first electrodes (20), and

second line connectors (40-1a, 40-1b) connected with the second electrode lines (40-2a, 40-2b), having a pitch, the first line connectors (20-1a, 20-1b) being wider than the first electrodes (20).

2. The organic EL display device as claimed in claim 1, wherein the pitch between the first line connectors and the second line connectors is wider than the pitch between first electrodes, and between second electrodes.

3. The organic EL display device as claimed in claim 1 or 2 further comprising an insulating layer formed on the first and second electrode lines, wherein the first and second electrode lines are insulated from the connector by the insulating layer.

4. The organic EL display device as claimed in one of the claims 1 to 3, wherein the connecting lines (40-1)

comprise:

first connecting lines connected with the second electrodes (40) and extending in the direction of the second electrodes; and
 second connecting lines connected with the first connecting lines and extending in the direction of the first electrodes (20).

5. The organic EL display device as claimed in one of the preceding claims, wherein the electrical line connector further comprises a film type device having third lines, which are connected to the first and second line connectors (20-1a, 20-1b, 40-1a, 40-1b).
6. The organic EL display device as claimed in one of the preceding claims, wherein the pitch and the shape of the third lines are same with that of the first and second electrode lines (20-2a, 20-2b, 40-2a, 40-2b).

Patentansprüche

1. Organische elektrolumineszente Anzeigevorrichtung (EL-Anzeigevorrichtung), die Folgendes umfasst:

mehrere erste Elektroden (20) parallel zueinander, die sich entlang einer ersten Richtung erstrecken;

mehrere zweite Elektroden (40) parallel zueinander, die sich entlang einer zweiten Richtung erstrecken, die senkrecht zu der ersten Richtung verläuft;

eine Matrix aus organischen EL-Pixeln, die ausgebildet wird durch die Kreuzung der mehreren ersten Elektroden (20) und zweiten Elektroden (40) mit einer organischen EL-Schicht (30) dazwischen;

erste Elektrodenleitungen (20-2a, 20-2b) und zweite Elektrodenleitungen (40-2a, 40-2b), wobei jede der ersten und zweiten Elektrodenleitungen jeweils ausgelegt sind zum Verbinden der ersten und zweiten Elektroden (20, 40) mit einer Ansteuereinheit, wobei jede der ersten und zweiten Elektrodenleitungen mehrere kurze Elektrodenleitungen (20-2a, 40-2a) umfasst, die sich entlang der ersten Richtung erstrecken und abwechselnd mit mehreren langen Elektrodenleitungen (20-2b, 40-2b), die sich entlang der ersten Richtung erstrecken, angeordnet sind; und ein elektrisches Leitungsverbindungsstück (50), das konfiguriert ist zum Verbinden der ersten Elektroden und der zweiten Elektroden mit Hilfe der ersten und zweiten Elektrodenleitungen mit einer Ansteuereinheit;

wobei das elektrische Leitungsverbindungs-

stück Folgendes umfasst:

erste Leitungsverbindungsstücke (20-1a, 20-1b), mit den ersten Elektrodenleitungen (20-2a, 20-2b), mit einer Teilung verbunden;

Verbindungsleitungen (40-1), die die zweiten Elektroden (40) mit den zweiten Elektrodenleitungen (40-2a, 40-2b) in der Richtung der ersten Elektroden (20) verbinden, und

zweite Leitungsverbindungsstücke (40-1a, 40-1b), mit den zweiten Elektrodenleitungen (40-2a, 40-2b) verbunden, mit einer Teilung,

die ersten Leitungsverbindungsstücke (20-1a, 20-1b), die breiter sind als die ersten Elektroden (20).

2. Organische EL-Anzeigevorrichtung nach Anspruch 1, wobei die Teilung zwischen den ersten Leitungsverbindungsstücken und den zweiten Leitungsverbindungsstücken breiter ist als die Teilung zwischen ersten Elektroden und zwischen zweiten Elektroden.

3. Organische EL-Anzeigevorrichtung nach Anspruch 1 oder 2, weiterhin umfassend eine auf den ersten und zweiten Elektrodenleitungen ausgebildete Isolierschicht, wobei die ersten und zweiten Elektrodenleitungen durch die Isolierschicht von dem Verbindungsstück isoliert sind.

4. Organische EL-Anzeigevorrichtung nach einem der Ansprüche 1 bis 3, wobei die Verbindungsleitungen (40-1) Folgendes umfassen:

erste Verbindungsleitungen, die mit den zweiten Elektroden (40) verbunden sind und sich in der Richtung der zweiten Elektroden erstrecken; und

zweite Verbindungsleitungen, die mit den ersten Verbindungsleitungen verbunden sind und sich in der Richtung der ersten Elektroden (20) erstrecken.

5. Organische EL-Anzeigevorrichtung nach einem der vorhergehenden Ansprüche, wobei das elektrische Leitungsverbindungsstück weiterhin eine Vorrichtung vom Filmtyp mit dritten Leitungen umfasst, die mit den ersten und zweiten Leitungsverbindungsstücken (20-1a, 20-1b, 40-1a, 40-1b) verbunden sind.

6. Organische EL-Anzeigevorrichtung nach einem der vorhergehenden Ansprüche, wobei die Teilung und die Form der dritten Leitungen gleich sind denen der ersten und zweiten Elektrodenleitungen (20-2a, 20-2b, 40-2a, 40-2b).

Revendications

1. Dispositif d'affichage électroluminescent (EL) organique comprenant :
 - plusieurs premières électrodes (20) parallèles les unes aux autres et s'étendant dans une première direction ;
 - plusieurs secondes électrodes (40) parallèles les unes aux autres et s'étendant dans une seconde direction perpendiculaire à la première direction ;
 - une matrice de pixels EL organiques formée en croisant lesdites plusieurs premières électrodes (20) et lesdites secondes plusieurs électrodes (40) qui sont séparées par une couche EL organique (30) ;
 - des premières lignes d'électrodes (20-2a, 20-2b) et des secondes lignes d'électrodes (40-2a, 40-2b), chacune des premières et secondes lignes d'électrodes étant respectivement disposées de manière à connecter les premières et secondes électrodes (20, 40) à une unité d'actionnement, chacune desdites premières et secondes lignes d'électrodes comprenant plusieurs lignes d'électrodes courtes (20-2a, 40-2a) s'étendant dans ladite première direction et disposées alternativement avec plusieurs lignes d'électrodes longues (20-2b, 40-2b) s'étendant dans ladite première direction ; et
 - un connecteur de lignes électriques (50) conçu pour connecter les premières électrodes et les secondes électrodes par le biais des premières et secondes lignes d'électrodes à une unité d'actionnement ;
 - lequel connecteur de lignes électriques comprend :
 - des premiers connecteurs de lignes (20-1a, 20-1b) connectés aux premières lignes d'électrodes (20-2a, 20-2b) ;
 - des lignes de connexion (40-1) connectant les secondes électrodes (40) aux secondes lignes d'électrodes (40-2a, 40-2b) dans la direction des premières électrodes (20) ; et
 - des seconds connecteurs de lignes (40-1a, 40-1b) connectés aux secondes lignes d'électrodes (40-2a, 40-2b) possédant un pas ;
 - les premiers connecteurs de lignes (20-1a, 20-1b) étant plus larges que les premières électrodes (20).
2. Dispositif d'affichage EL organique selon la revendication 1, dans lequel le pas entre les premiers connecteurs de lignes et les seconds connecteurs de lignes est plus large que le pas entre les premières électrodes et entre les secondes électrodes.
3. Dispositif d'affichage EL organique selon les revendications 1 ou 2, comprenant en outre une couche isolante formée sur les premières et secondes lignes d'électrodes, lesquelles premières et secondes lignes d'électrodes sont isolées du connecteur par la couche isolante.
4. Dispositif d'affichage EL organique selon l'une des revendications 1 à 3, dans lequel les lignes de connexion (40-1) comprennent :
 - des premières lignes de connexion connectées aux secondes électrodes (40) et s'étendant dans la direction des secondes électrodes ; et
 - des secondes lignes de connexion connectées aux premières lignes de connexion et s'étendant dans la direction des premières électrodes (20).
5. Dispositif d'affichage EL organique selon l'une des revendications précédentes, dans lequel le connecteur de lignes électriques comprend en outre un dispositif de type film comportant trois lignes qui sont connectées aux premiers et seconds connecteurs de lignes (20-1a, 20-1b, 40-1a, 40-1b).
6. Dispositif d'affichage EL organique selon l'une des revendications précédentes, dans lequel le pas et la forme des troisièmes lignes sont identiques à ceux des premières et secondes lignes d'électrodes (20-2a, 20-2b, 40-2a, 40-2b).

FIG. 1
Prior Art

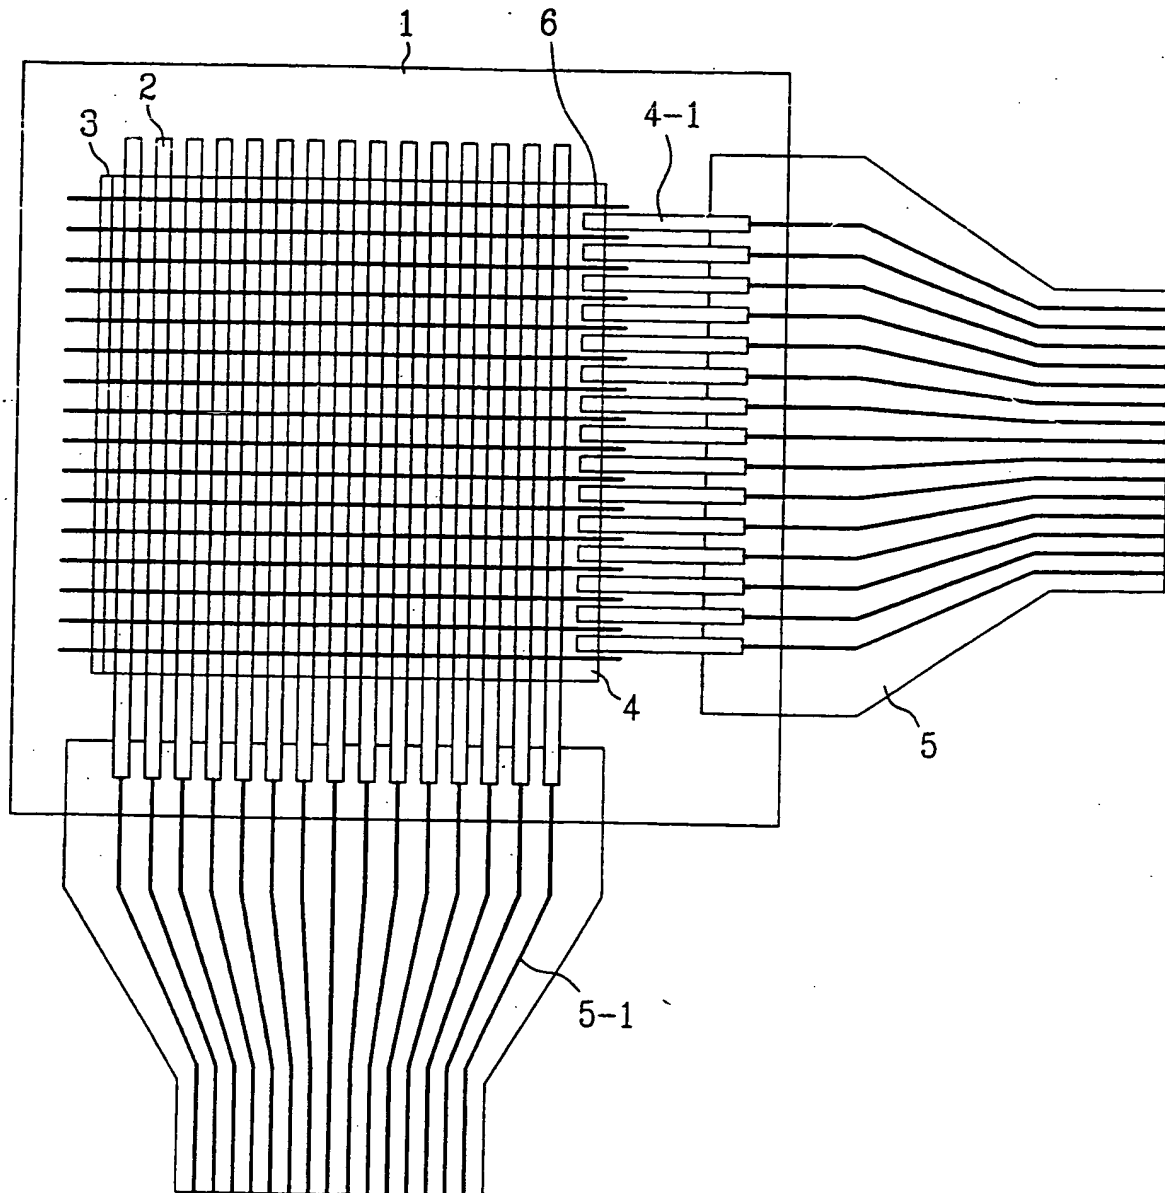


FIG. 2


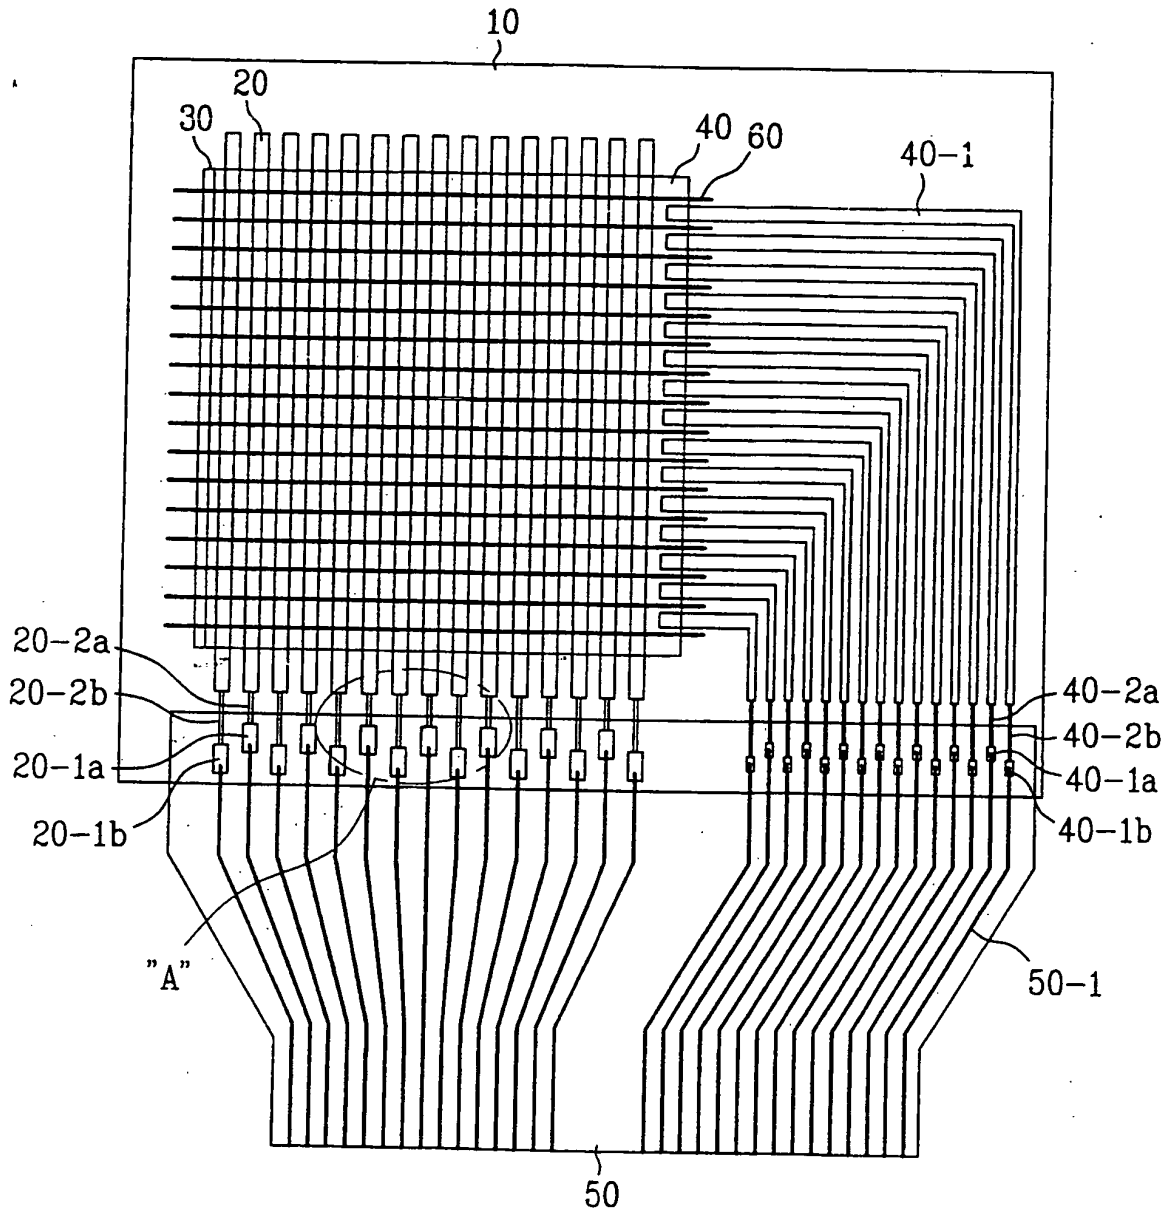


FIG. 3

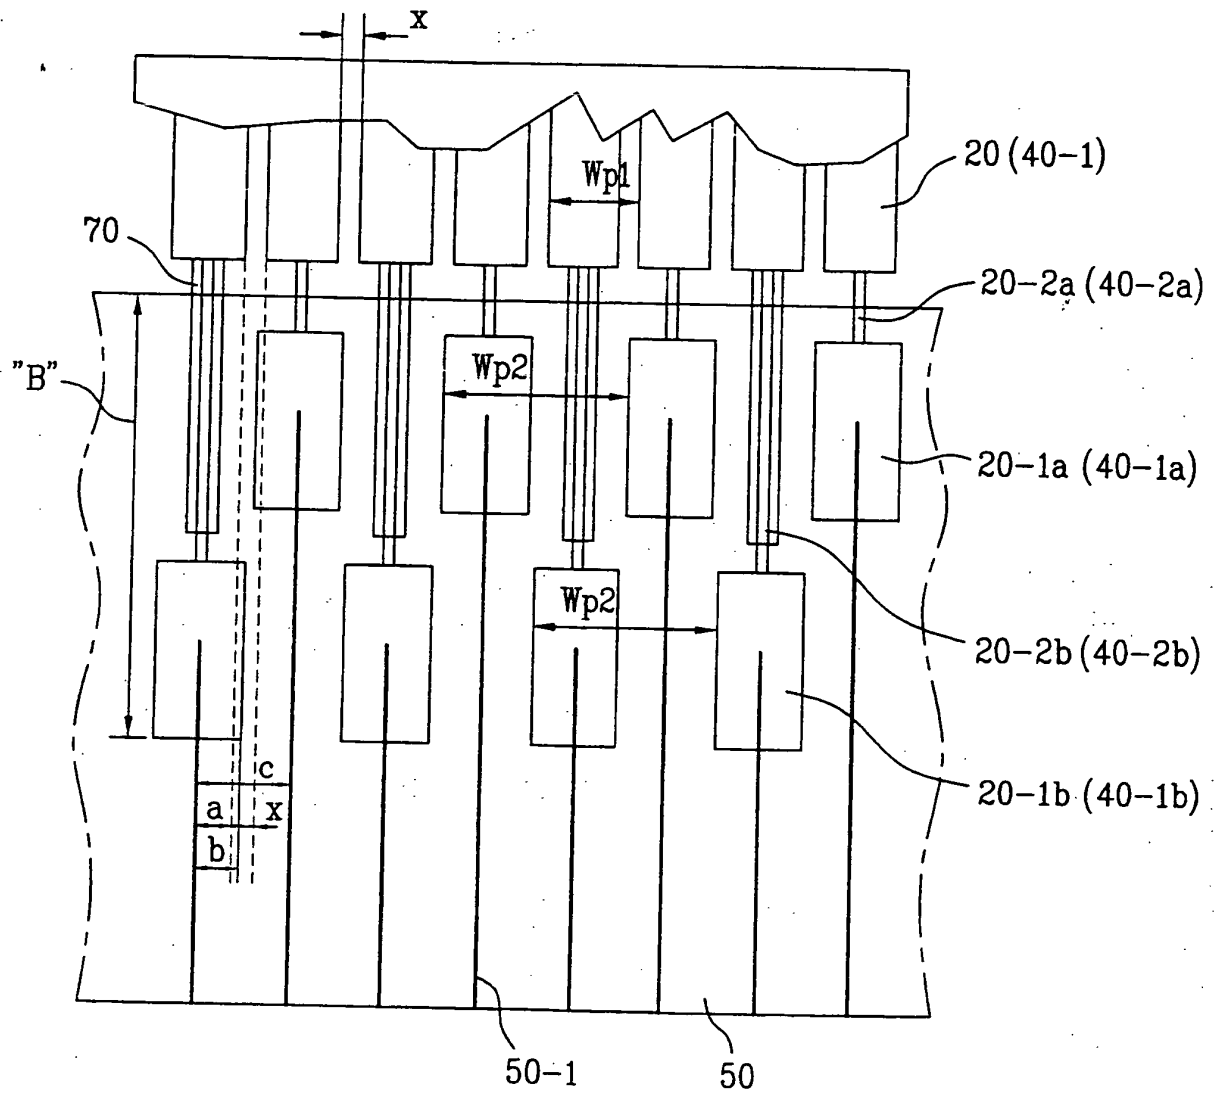

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 2000082720 A [0008]
- EP 0767599 A [0008]
- EP 1093166 A [0008]
- EP 0795772 A [0008]

专利名称(译)	有机EL显示装置		
公开(公告)号	EP1276154B1	公开(公告)日	2012-10-24
申请号	EP2002014907	申请日	2002-07-05
申请(专利权)人(译)	LG电子株式会社.		
当前申请(专利权)人(译)	LG电子公司.		
[标]发明人	KIM CHANG NAM		
发明人	KIM, CHANG NAM		
IPC分类号	H01L27/32 H05B33/06 H01L51/50		
CPC分类号	H01L27/3288		
代理机构(译)	TRINKS , OLE		
优先权	1020010041891 2001-07-12 KR		
其他公开文献	EP1276154A3 EP1276154A2		
外部链接	Espacenet		

摘要(译)

公开了一种有机EL显示装置，其以带式自动接合 (TAB) 方法制造。有机EL显示装置包括驱动部分;显示面板，包括基板，以矩阵形式形成在基板上的多个第一和第二电极;第一和第二线具有不同的长度，用于交替排列，并分别将信号从驱动部分施加到第一和第二电极;连接部分包括第三线，用于将第一和第二线电连接到驱动部分。

FIG. 1
Prior Art

