



US 20050171452A1

(19) **United States**

(12) **Patent Application Publication**  
Neff

(10) **Pub. No.: US 2005/0171452 A1**

(43) **Pub. Date: Aug. 4, 2005**

(54) **CEREBRAL SPINAL FLUID SHUNT  
EVALUATION SYSTEM**

(52) **U.S. Cl.** ..... **600/549; 604/9**

(76) **Inventor: Samuel Neff, Haddon Heights, NJ (US)**

(57) **ABSTRACT**

Correspondence Address:  
**CAESAR, RIVISE, BERNSTEIN,  
COHEN & POKOTILOV, LTD.  
11TH FLOOR, SEVEN PENN CENTER  
1635 MARKET STREET  
PHILADELPHIA, PA 19103-2212 (US)**


A method for evaluating cerebrospinal fluid (CSF) flow rate in a CSF shunt applied to a patient for transmitting the CSF between first and second locations of the patient includes applying temperature sensors to the CSF shunt for determining a flow rate of the CSF through the shunt to provide a determined CSF flow rate and applying an error correction sensor to the patient for providing an error correction signal. The determined CSF flow rate is adjusted in accordance with the error correction signal to provide a corrected CSF flow rate. The sensor can be a temperature sensor such as a thermistor. The CSF is cooled and a temperature value of the CSF is measured in accordance with the cooling. A time value is determined in accordance with the temperature value and the CSF flow rate is determined in accordance with the time value.

(21) **Appl. No.: 10/770,754**


(22) **Filed: Feb. 3, 2004**

**Publication Classification**

(51) **Int. Cl.<sup>7</sup> ..... A61B 5/00; A61M 5/00**

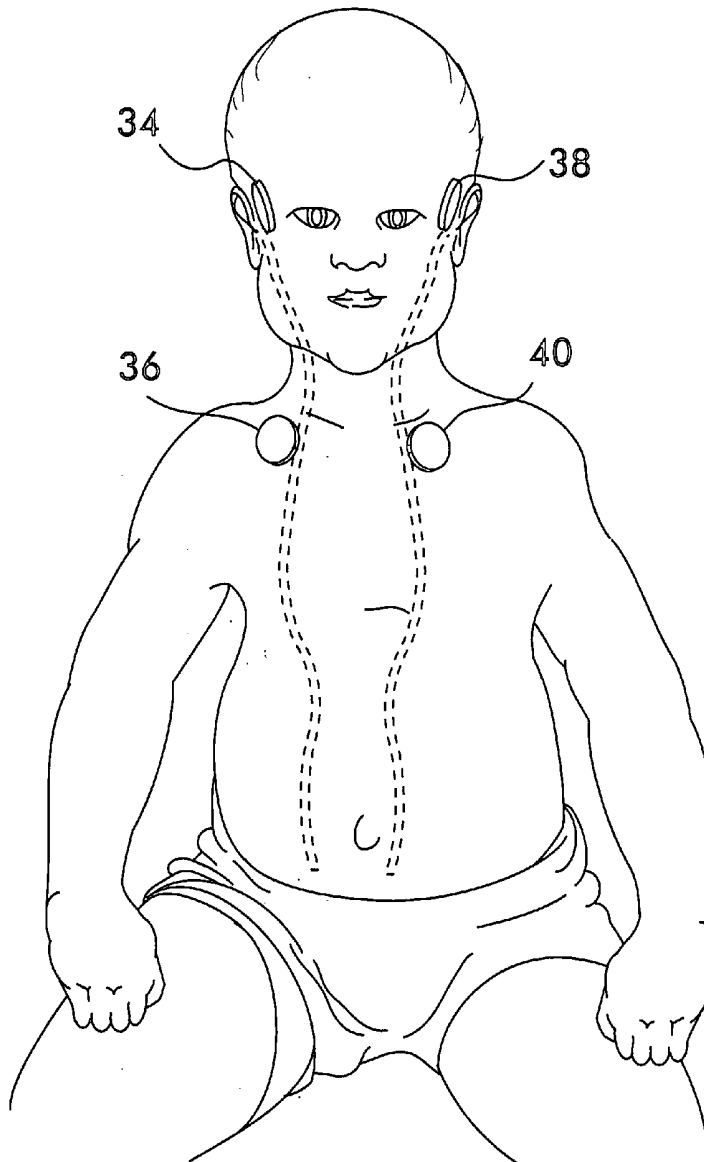

**FIG. 1**  
PRIOR ART

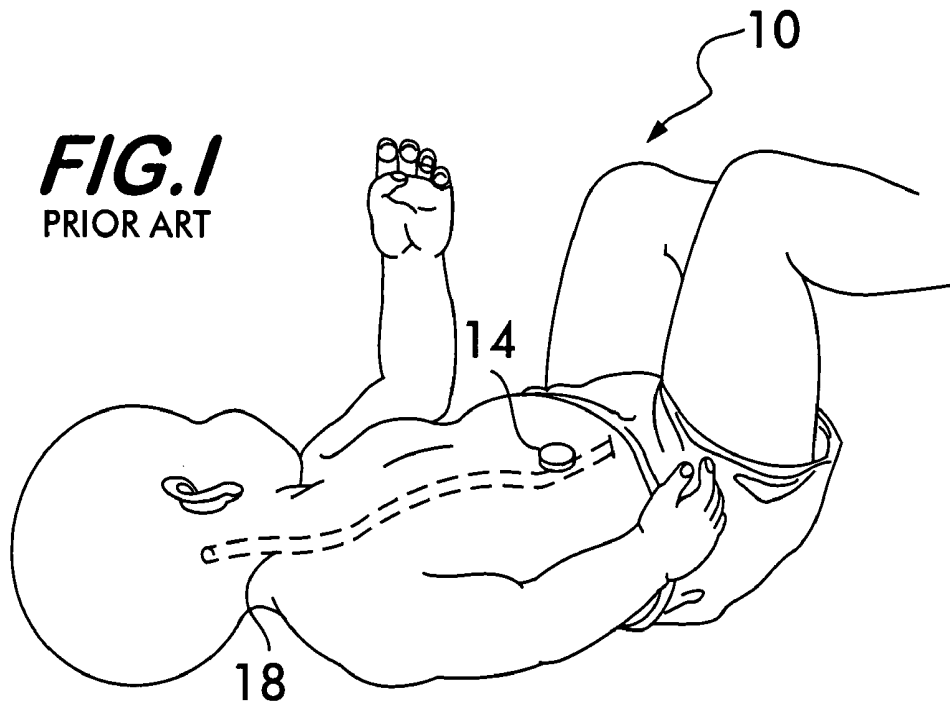

**FIG. 2**  
PRIOR ART




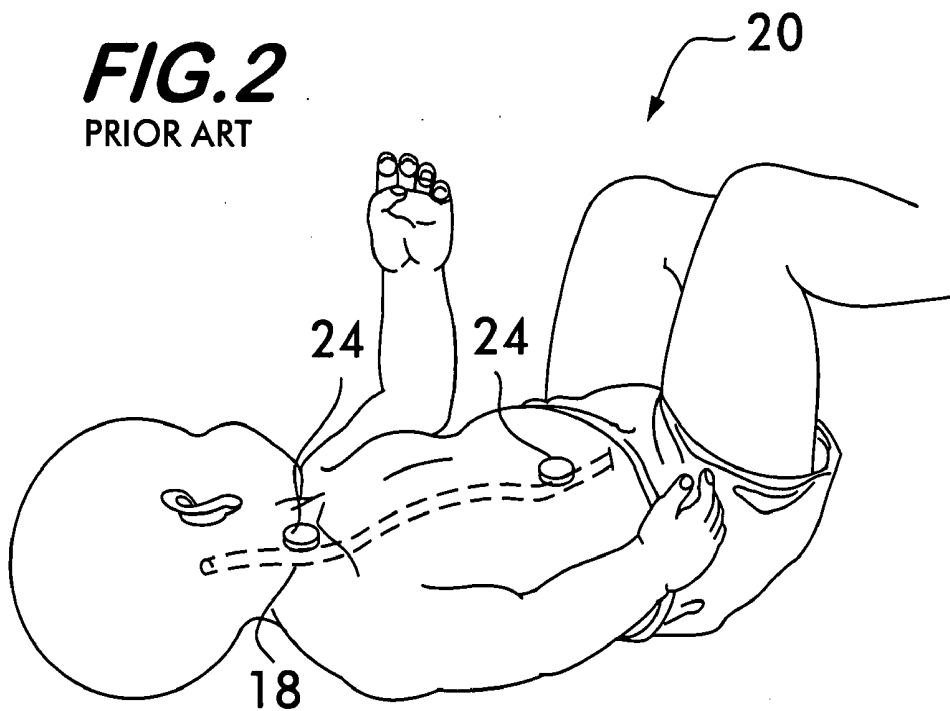


FIG. 3

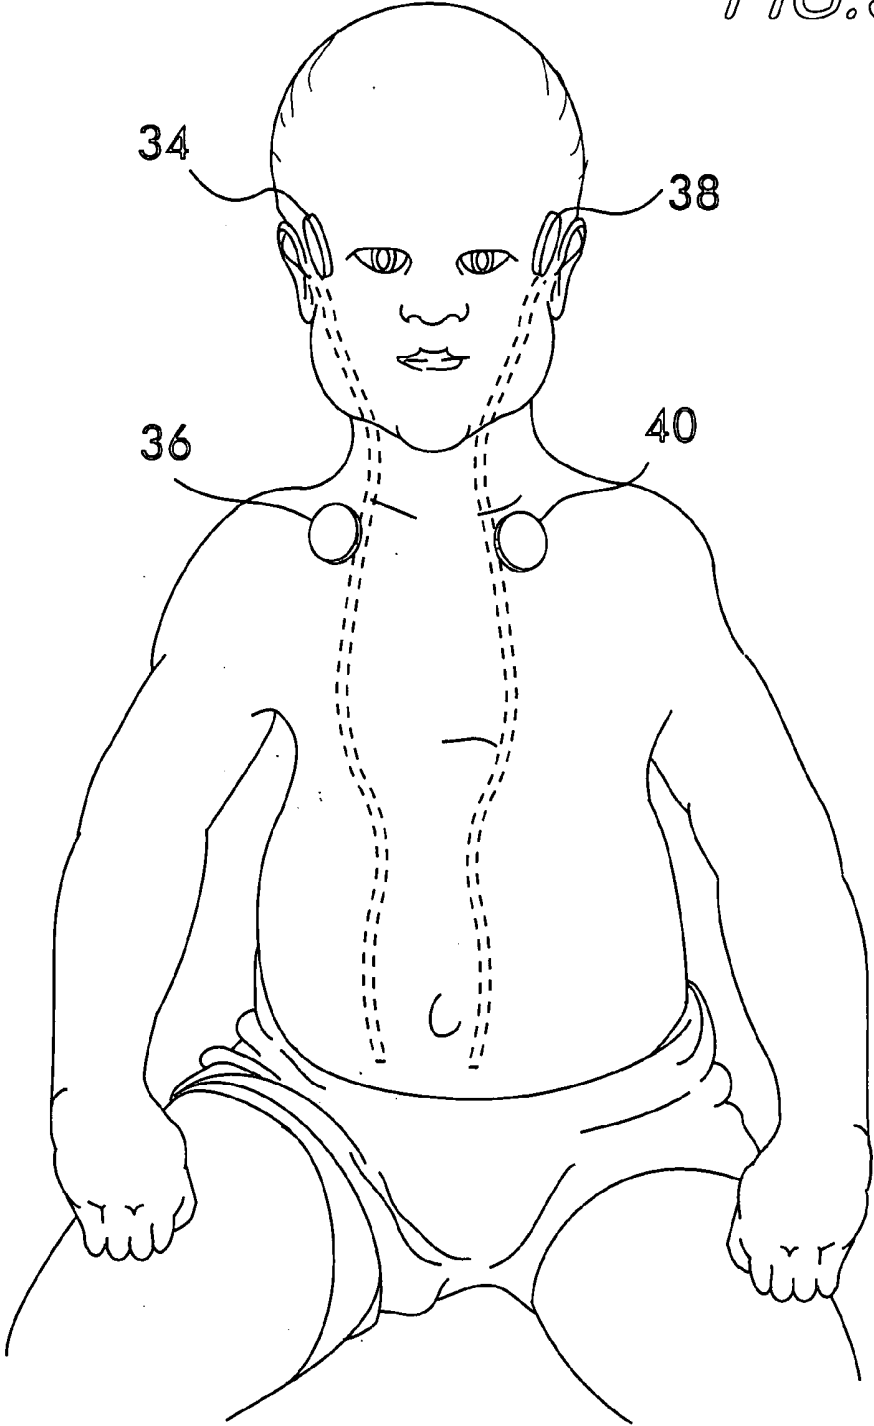

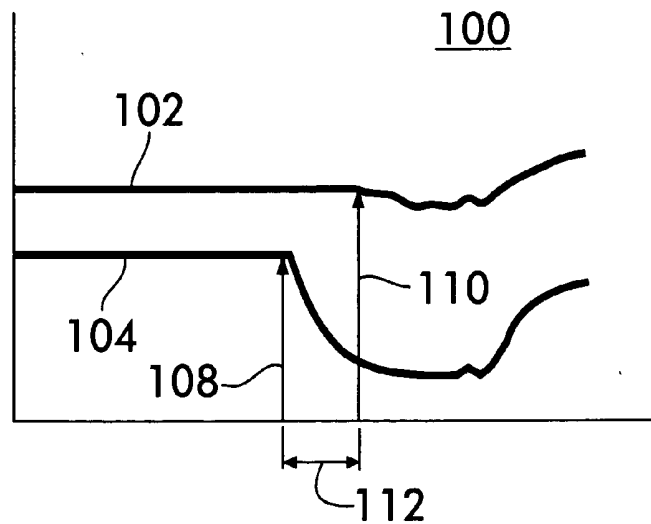

**FIG. 5**

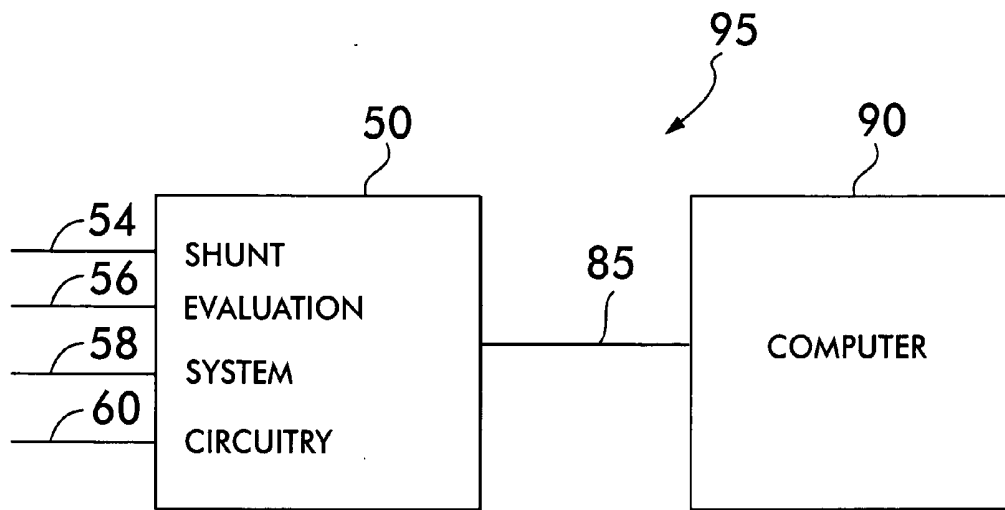

**FIG. 6**

## CEREBRAL SPINAL FLUID SHUNT EVALUATION SYSTEM

### BACKGROUND OF THE INVENTION

#### [0001] 1. Field of Invention

[0002] This invention relates to cerebrospinal fluid shunts and, more particularly, to apparatus and methods for quantitatively detecting the flow of cerebrospinal fluid in such shunts noninvasively.

#### [0003] 2. Description of Related Art

[0004] A cerebrospinal fluid (CSF) shunt includes a system of tubing that allows CSF to flow from a patient's brain to another part of the body (e.g., abdomen to relieve pressure in the spinal column). As a result, it is desirable to know, periodically, that the pathway of the CSF shunt remains unobstructed to permit CSF flow and what the flow rate is. It is also desirable to make these determinations noninvasively when quantifying the CSF flow.

[0005] The following describe different apparatus and methodologies that have been used to monitor, determine or treat body fluid flow, including CSF flow through a shunt.

[0006] "A Thermosensitive Device for the Evaluation of the Patency of Ventriculo-atrial Shunts in Hydrocephalus", by Go et al. (Acta Neurochirurgica, Vol. 19, pages 209-216, Fasc. 4) discloses the detection of the existence of flow in a shunt by placement of a thermistor and detecting means proximate the location of the shunt and the placement of cooling means downstream of the thermistor. The downstream thermistor detects the cooled portion of the CSF fluid as it passes from the region of the cooling means to the vicinity of the thermistor, thereby verifying CSF flow. However, among other things, the apparatus and method disclosed therein fails to teach or suggest an apparatus/method for quantifying the flow of the fluid through the shunt.

[0007] In "A Noninvasive Approach to Quantitative Measurement of Flow through CSF Shunts" by Stein et al., Journal of Neurosurgery, April 1981; 54(4):556-558, a method for quantifying the CSF flow rate is disclosed. In particular, a pair of series-arranged thermistors is positioned on the skin over the CSF shunt, whereby the thermistors independently detect the passage of a cooled portion of the CSF fluid. The time required for this cooled portion to travel between the thermistors is used, along with the shunt diameter, to calculate the CSF flow rate. See also "Noninvasive Test of Cerebrospinal Shunt Function," by Stein et al., Surgical Forum 30:442-442, 1979; and "Testing Cerebrospinal Fluid Shunt Function: A Noninvasive Technique," by S. Stein, Neurosurgery, June 1980 6(6): 649-651. However, the apparatus/method disclosed therein suffers from, among other things, variations in thermistor signal due to environmental changes.

[0008] U.S. Pat. No. 4,548,516 (Helenowski) discloses an apparatus for indicating fluid flow through implanted shunts by means of temperature sensing. In particular, the apparatus taught by Helenowski comprises a plurality of thermistors mounted on a flexible substrate coupled to a rigid base. The assembly is placed on the skin over the implanted shunt and a portion of the fluid in the shunt is cooled upstream of the assembly. The thermistors detect the cooled portion of the

fluid as it passes the thermistor assembly and the output of the thermistor is applied to an analog-to-digital converter for processing by a computer to determine the flow rate of the shunt fluid.

[0009] U.S. Pat. No. 6,413,233 (Sites et al.) discloses several embodiments that utilize a plurality of temperature sensors on a patient wherein a body fluid (blood, saline, etc.) flow is removed from the patient and treated, e.g., heated or cooled, and then returned to the patient. See also U.S. Pat. No. 5,494,822 (Sadri). U.S. Pat. No. 6,527,798 (Ginsburg et al.) discloses an apparatus/method for controlling body fluid temperature and utilizing temperature sensors located inside the patient's body.

[0010] U.S. Pat. No. 5,692,514 (Bowman) discloses a method and apparatus for measuring continuous blood flow by inserting a catheter into the heart carrying a pair of temperature sensors and a thermal energy source. See also U.S. Pat. No. 4,576,182 (Normann).

[0011] U.S. Pat. No. 4,684,367 (Schaffer et al.) discloses an ambulatory intravenous delivery system that includes a control portion of an intravenous fluid that detects a heat pulse using a thermistor to determine flow rate.

[0012] U.S. Pat. No. 4,255,968 (Harpster) discloses a fluid flow indicator which includes a plurality of sensors placed directly upon a thermally-conductive tube through which the flow passes. In Harpster a heater is located adjacent to a first temperature sensor so that the sensor is directly within the sphere of thermal influence of the heater.

[0013] U.S. Pat. No. 3,933,045 (Fox et al.) discloses an apparatus for detecting body core temperature utilizing a pair of temperature sensors, one located at the skin surface and another located above the first sensor wherein the output of the two temperature sensors are applied to a differential amplifier heater control circuit. The control circuit activates a heat source in order to drive the temperature gradient between these two sensors to zero and thereby detect the body core temperature.

[0014] U.S. Pat. No. 3,623,473 (Andersen) discloses a method for determining the adequacy of blood circulation by measuring the difference in temperature between at least two distinct points and comparing the sum of the detected temperatures to a reference value.

[0015] U.S. Pat. No. 3,762,221 (Coulthard) discloses an apparatus and method for measuring the flow rate of a fluid utilizing ultrasonic transmitters and receivers.

[0016] U.S. Pat. No. 4,354,504 (Bro) discloses a blood-flow probe that utilizes a pair of thermocouples that respectively detect the temperature of a hot plate and a cold plate (whose temperatures are controlled by a heat pump. The temperature readings are applied to a differential amplifier. Energization of the heat pump is controlled by a comparator that compares a reference signal to the differential amplifier output that ensures that the hot plate does not exceed a safety level during use.

[0017] All references cited herein are incorporated herein by reference in their entireties.

### BRIEF SUMMARY OF THE INVENTION

[0018] A method for evaluating cerebrospinal fluid (CSF) flow rate in a CSF shunt applied to the body of a patient for

transmitting the CSF between first and second locations of the body includes the steps of applying a plurality of temperature sensors to the CSF shunt for determining a flow rate of the CSF through the shunt to provide a determined CSF flow rate and applying an error correction sensor to the body of the patient for providing an error correction signal. The CSF flow rate determination is adjusted in accordance with the error correction signal to provide a corrected CSF flow rate. The sensor can be a temperature sensor such as a thermistor. The CSF is cooled and a temperature value of the CSF is measured in accordance with the cooling. A time value is determined in accordance with the temperature value and the CSF flow rate is determined in accordance with the time value. The CSF flow rate can be determined in accordance with a plurality of temperature values. A temperature correction value can be determined using the error correction sensor. The temperature correction value can be a background temperature value and the corrected CSF flow rate can be provided in accordance with the temperature correction value.

#### BRIEF DESCRIPTION OF SEVERAL VIEWS OF THE DRAWINGS

[0019] The invention will be described in conjunction with the following drawings in which like reference numerals designate like elements and wherein:

[0020] FIG. 1 shows a schematic representation of a prior art cerebral spinal fluid shunt evaluation system for monitoring the fluid flow through the shunt.

[0021] FIG. 2 shows a schematic representation of a prior cerebral spinal fluid shunt evaluation system for monitoring the fluid flow through the shunt.

[0022] FIG. 3 shows a schematic representation of the cerebral spinal fluid shunt evaluation system of the present invention for monitoring the fluid flow through the shunt.

[0023] FIG. 4 shows a schematic representation of a circuit suitable for use in the cerebral spinal fluid shunt evaluation system of FIG. 3.

[0024] FIG. 5 shows a cerebral spinal fluid flow rate calculation system including the circuit of FIG. 4.

[0025] FIG. 6 shows a graphical representation of the response time of two sensors within the cerebral spinal fluid shunt evaluation system of FIG. 3.

#### DETAILED DESCRIPTION OF THE INVENTION

[0026] Referring now to FIG. 1, there is shown a prior art cerebral spinal fluid (CSF) shunt evaluation system 10. The CSF shunt evaluation system 10 includes a shunt tubing 18 that allows CSF to flow from the brain of a patient to another part of the body of the patient such as the abdomen, e.g., for treatment of a patient with hydrocephalus. The CSF shunt evaluation system 10 monitors the flow of the CSF through the shunt tubing 18 by means of upstream cooling of the CSF and a downstream sensor 14. The sensor 14 can be a temperature sensor, such as a thermistor, a thermocouple or a semiconductor sensor. The downstream sensor 14 is disposed over the shunt tubing 18 in the vicinity where the shunt tubing 18 empties into the abdominal cavity in order

to detect changes in temperature as the cooled CSF is transported from the cooled region to the abdominal cavity.

[0027] The sensor 14 could be conventional temperature sensitive device wherein the internal resistance of the sensor 14 varies, either directly or inversely, according to the temperature of the sensor 14. Thus, changes in the temperature of the sensor 14 were detected by merely making a determination of its resistance or, equivalently, a measurement of the changes in the amount of current through the sensor 18.

[0028] In operation, a user of the shunt evaluation system 10 could place an ice cube on the scalp of the patient over the shunt tubing 18 for about one minute using, for example, forceps. While the safety of using ice makes it preferred for cooling the CSF, a Peltier stack maintained at zero or one degree centigrade can be used. The ice cube cooled the CSF in the shunt tubing 18 as it flowed from the scalp region toward the downstream sensor 14. The downstream sensor 14 was adapted to detect relatively small changes in skin temperature in regions over the shunt tubing 18 as the cooled CSF flowed from the head to the abdomen of the patient.

[0029] Referring now to FIG. 2, there is shown a prior art CSF shunt evaluation system 20. The CSF shunt evaluation system 20 included two sensors 24 disposed over the shunt tubing 18. The two sensors 24 were separated from each other by a known distance. The use of the two sensors 24 in the shunt evaluation system 20 in this manner permitted a determination of the flow rate of the CSF through the flow of the shunt tubing 18, in addition to a determination of whether the CSF fluid was flowing through the tubing 18. The flow rate of the CSF could then be calculated since a downward temperature deflection could be recorded for each sensor 24, and the difference in time between the deflections of the two sensors 24 could be easily related to the flow velocity of the CSF.

[0030] The output of the sensors 24 in the shunt evaluation system 20 could be read and processed in any conventional manner. For example, if the internal diameter of the shunt tubing 18 was known, the rate of flow of the CSF could be calculated from the following equation:

$$F = \frac{h\pi r^2}{t_1 - t_2}$$

[0031] Where F=the flow of CFS through the shunt tubing 18, h=the distances between the two sensors 24, r=the internal radius of the shunt tubing 18 and  $t_1-t_2$ =the time difference between the deflection responses of the two sensors 24.

[0032] Referring now to FIG. 3, there is shown the CSF shunt evaluation system 30 of the present invention. The CSF shunt evaluation system 30 is provided with four sensors 34-40 disposed at predetermined locations on the body of the patient for determining the existence of CSF flow through the shunt tubing 18, and determining the flow and the flow rate of the CSF through the shunt tubing 18. Additionally, the placement of the four sensors 34-40 in the CSF shunt evaluation system 30 is adapted to permit the calculation of error signals due to background effects such as body temperature and ambient temperature. The error sig-

nals within CSF shunt evaluation system **30** can be used to provide a more accurate determination of the CSF flow rate through the shunt tubing **18**.

[0033] In the method of the invention a sensor **34** is placed over the shunt tubing **18** in the vicinity of an ear of the patient for providing an electrical output signal representative of the temperature of the CSF near the vicinity of the cooling of the CSF of the patient. A sensor **36** is placed over the shunt tubing **18** in the vicinity of the clavicle of the patient for providing an electrical output signal representative of temperature of the CSF therebelow.

[0034] Preferably the sensors **34**, **36** can be disposed as close as possible to each other, as long as they are placed in an area where the shunt tubing **18** is substantially close to the surface of the body. The shunt tubing **18** is usually sufficiently close to the surface behind the pinna and on the neck. It is also close to the surface over the clavicle, which is often approximately fifteen centimeters from the pinna. Thus, in one preferred embodiment of the invention the spacing between the sensors **34**, **36** can be approximately fifteen centimeters or less. Furthermore, in one preferred embodiment the sensors **34**, **36** can be placed as close together as approximately three centimeters.

[0035] The sensors **38**, **40** are placed on the opposite side of the body of the patient in locations substantially symmetrically with the sensors **34**, **36**. Thus, the sensor **38** is placed in the vicinity of the ear opposite the ear where the sensor **34** is disposed. The sensor **38** is placed in the vicinity of the clavicle opposite the clavicle where the sensor **36** is disposed. The sensors **38**, **40** thus provide electrical output signals representative of background conditions such as the body temperature of the patient and the ambient temperature. The output signals from the sensors **38**, **40** permit control readings to be performed by the CSF evaluation system **30** for error correction of the flow rate calculations that can be obtained using the sensors **34**, **36**.

[0036] Referring now to FIG. 4, there is shown a schematic diagram of the shunt evaluation system circuitry **50**. The shunt evaluation system circuitry **50** can be used for receiving and processing the electrical output signals provided by the sensors **34-40** of the CSF shunt evaluation system **30**. The shunt evaluation system circuitry **50** processes the signals from the sensors **34-40** to provide further electrical signals representative of the temperatures of the sensors **34-40** to permit the determination of the flow rate of the CSF through the shunt tubing **18** as previously described.

[0037] The output signals of the sensors **34-40** applied to the body of the patient are received at the input lines **54-60** of the evaluation system circuitry **50**. In one preferred embodiment of the invention, the signals received on the input lines **54-60** can be sequentially switched onto a common input line **62** of a general purpose precision timer **68**. Additionally, in an alternate embodiment of the invention, the signals on the input lines **54-60** can be applied to an analog-to-digital converter (not shown) to provide digital signals representative of the output of the sensors **34-40** suitable for processing within the evaluation system circuitry **50**.

[0038] The precision timer **68** of the evaluation system circuitry **50** that sequentially receives the signals from the sensors **34-40** is adapted to operate as a relaxation oscillator

circuit **70** having a varying output frequency related to a varying RC time constant. The precision timer **68** within the relaxation oscillator circuit **70** can be the well known ICM7555 or any other equivalent device.

[0039] The precision timer **68** is coupled to a capacitor **72** and to the common input line **62** of the four input lines **54-60**. Each of the sensors **34-40** coupled in sequence to the common input line **62** operates as a variable resistor whose resistance varies with a sensed temperature as previously described. The sequential coupling of the sensors **34-40** to the capacitor **72** permits RC time constant within the relaxation oscillator circuit **70** to vary when the sensors **34-40** sense different temperatures. Thus, the varying RC time constant results in varying frequencies of oscillation for the relaxation oscillator circuit **70** that correspond to the varying temperatures sensed by the sensors **34-40**.

[0040] When the relaxation circuit **70** of the shunt evaluation system circuitry **50** oscillates a battery **64** charges the capacitor **72** according to the resistance of the sensor **34-40** coupled to the capacitor **72**. This causes the voltage across the capacitor **72** to rise. When the voltage across the capacitor **72** rises to a predetermined level, the precision timer **68** triggers. The triggering of the precision timer **68** causes the capacitor **72** to discharge through the precision timer **68** by way of the line **74**, thereby completing one cycle of the relaxation oscillator **70**. The time period it takes for the capacitor **72** to charge to the predetermined voltage level and trigger is determined by the amount of charging current, and thus the amount of resistance, of the sensor **34-40** coupled to the common input line **62**. Thus, the oscillation frequency of the relaxation oscillator **70** is determined by the resistance, and thus the temperature, of the active sensor **34-40**.

[0041] The use of the relaxation oscillator **70** for obtaining an electrical signal representative of the resistance of the sensors **34-40** suitable for algorithmic processing is believed to be easier and less expensive than the use of an analog-to-digital converter for this purpose. Additionally, use of the relaxation oscillator **70** is believed to be more noise resistant than an analog-to-digital converter. Furthermore, the relaxation oscillator **70** uses less power than an analog-to-digital converter uses.

[0042] The frequency signal output of the precision timer **68** is applied to an input pin of a microprocessor **80** of the shunt evaluation system circuitry **50**. The microprocessor **80** can be an AT90S2313 8-bit microcomputer, or any other microprocessor known to those skilled in the art. In addition to controlling the sequential switching of the sensors **34-40** onto the common input line **62**, the microprocessor **80** can operate as a frequency counter to determine a frequency value in accordance with the oscillation frequency of the relaxation oscillator **70**. The frequency value determined by the microprocessor **80** is provided as an output of the shunt evaluation system circuitry **50** on an output bus **85**. The output bus **85** can be coupled to a conventional RS-232 transceiver. In keeping with the system of the present invention, the output frequency value can also be provided on a parallel bus.

[0043] Referring now to FIG. 5, there is shown the CSF flow rate calculation system **95**. Within the CSF flow rate calculation system **95** a computer **90** receives the frequency values determined by the shunt evaluation system circuitry **50** by way of the output bus **85**. When the frequency values

are received, the computer **90** performs calculations on them in order to determine the flow rate of the CSF through the shunt tubing **18** of the system **30** under the control of a stored program. Signals from the sensors **34, 36** can be used by the computer **90** to calculate the flow rate through the shunt tubing **18** as previously described. For example, the flow rate calculation set forth above with respect to the CSF shunt evaluation system **20** can then be used to determine the CSF flow rate in accordance with the determined time difference **112**. Signals from one or both of the sensors **38, 40** can be used to determine an error correction signal representative of background conditions for use in correcting the calculations performed on the signals from the sensors **34, 36**. One example of a stored program having algorithms suitable for performing these operations within the computer **90** is attached hereto as an Appendix.

[**0044**] Referring now to **FIG. 6**, there is shown a graphical representation **100** of the response times of the sensors **34, 36** within the CSF flow rate calculation system **95**. The inflection point of the temperature inflection curve **104**, representing the temperature of the sensor **34**, occurs first since the cooled CSF reaches the sensor **34** first. The curve **104** inflection point occurs at time **108**. At a time thereafter, varying according to the flow rate of the CSF, the inflection point of the curve **102** occurs. Curve **102** represents the temperature of the sensor **36**. The temperature inflection curve **102** inflection point occurs at time **110**. A skilled practitioner, preferably a neurosurgeon, determines the time difference **112** between the inflection points **108, 110**.

[**0045**] In the error correction protocol, the skin temperature at the location **38**, which is the mirror-image of the location **34**, is subtracted from the skin temperature at the location of sensor **34**. Additionally, the skin temperature at the location of sensor **40** is subtracted from the skin temperature at the location of sensor **36**. These subtractions correct for global skin temperature changes such as changes due to environment and physiology, for example excitement, attention and pain, and provide error correction for adjusting the flow rate to provide a corrected CSF flow rate.

[**0046**] Using the correct (subtracted) temperature curve makes it possible in a realistic clinical situation to accurately detect inflection points as the cooled CSF passes under the thermistors. When the time of the inflection points **108, 110** and the time difference between the inflection points **108, 110** are determined the flow calculation can be performed in substantially the same manner as the flow calculations of the prior art.

[**0047**] For example, in one embodiment of the invention the software providing graphical representation **100** displays on the screen two temperature inflection curves **102, 104** one for the proximal (shunt temperature minus control temperature) pair of thermistors and one for the distal (shunt temperature minus control temperature) pair. The operator can use a mouse to move two vertical bars to the inflection points **108, 110**.

[**0048**] The software can provide a window showing the times corresponding to the inflection points **108, 110** selected and prompting the operator for the diameter of the tubing. Since only two diameters are in common clinical use, the window can allow a choice between these two in the preferred embodiment. The software then calculated the flow rate from the time difference and the diameter.

[**0049**] While the invention has been described in detail and with reference to specific examples thereof, it will be apparent to one skilled in the art that various changes and modifications can be made therein without departing from the spirit and scope thereof.

What is claimed is:

1. A method for evaluating cerebrospinal fluid (CSF) flow rate in a CSF shunt applied to the body of a patient for transmitting said CSF between first and second locations of said body, comprising the steps of:

- (a) applying a plurality of temperature sensors to said CSF shunt for determining a flow rate of said CSF through said shunt to provide a determined CSF flow rate;
- (b) applying an error correction sensor to said body of said patient for providing an error correction signal; and
- (c) adjusting said determined CSF flow rate in accordance with said error correction signal to provide a corrected CSF flow rate.

2. A method for evaluating CSF flow rate in a CSF shunt applied to the body of a patient of claim 1, wherein said sensor comprises a temperature sensor.

3. A method for evaluating CSF flow rate in a CSF shunt applied to the body of a patient of claim 2, wherein said temperature sensor comprises a thermistor.

4. A method for evaluating CSF flow rate in a CSF shunt applied to the body of a patient of claim 2, comprising the further step of cooling said CSF.

5. A method for evaluating CSF flow rate in a CSF shunt applied to the body of a patient of claim 4, comprising the further step of measuring a temperature value of said CSF in accordance with said cooling.

6. A method for evaluating CSF flow rate in a CSF shunt applied to the body of a patient of claim 5, comprising the further step of determining a time value in accordance with said temperature value.

7. A method for evaluating CSF flow rate in a CSF shunt applied to the body of a patient of claim 6, comprising the further step of determining said determined CSF flow rate in accordance with said time value.

8. A method for evaluating CSF flow rate in a CSF shunt applied to the body of a patient of claim 7, determining said determined CSF flow rate in accordance with a plurality of temperature values.

9. A method for evaluating CSF flow rate in a CSF shunt applied to the body of a patient of claim 7, comprising the further step of measuring a temperature correction value using said error correction sensor.

10. A method for evaluating CSF flow rate in a CSF shunt applied to the body of a patient of claim 9, wherein said temperature correction value comprises a background temperature value.

11. A method for evaluating CSF flow rate in a CSF shunt applied to the body of a patient of claim 9, comprising the further step of providing said corrected CSF flow rate in accordance with said temperature correction value.

12. A method for evaluating CSF flow rate in a CSF shunt applied to the body of a patient of claim 11, including a further error correction sensor providing a further temperature correction signal comprising the further step of providing said corrected CSF flow rate in accordance with said further error correction signal.

**13.** A method for evaluating CSF flow rate in a CSF shunt applied to the body of a patient of claim 5, comprising the further step of providing a frequency signal in accordance with said measured temperature value.

**14.** A method for evaluating CSF flow rate in a CSF shunt applied to the body of a patient of claim 13, comprising the further step of providing said frequency signal in accordance with a temperature sensor resistance.

**15.** A method for evaluating CSF flow rate in a CSF shunt applied to the body of a patient of claim 14, comprising the further step of providing said frequency signal using an oscillator having an oscillation frequency dependent upon said temperature sensor resistance.

**16.** A method for evaluating CSF flow rate in a CSF shunt applied to the body of a patient of claim 15, wherein said oscillator comprises a relaxation oscillator.

**17.** A method for evaluating CSF flow rate in a CSF shunt applied to the body of a patient of claim 13, comprising the further step of determining a frequency oscillation value in accordance with a measured frequency of said frequency signal.

**18.** A method for evaluating CSF flow rate in a CSF shunt applied to the body of a patient of claim 17, comprising the further step of providing said corrected CSF flow rate in accordance with said frequency value.

\* \* \* \* \*

专利名称(译)	脑脊液分流评估系统		
公开(公告)号	<a href="#">US20050171452A1</a>	公开(公告)日	2005-08-04
申请号	US10/770754	申请日	2004-02-03
[标]申请(专利权)人(译)	NEFF SAMUEL		
申请(专利权)人(译)	NEFF SAMUEL		
当前申请(专利权)人(译)	NEURO诊断设备, INC.		
[标]发明人	NEFF SAMUEL		
发明人	NEFF, SAMUEL		
IPC分类号	A61M27/00 A61B5/00 A61M5/00		
CPC分类号	A61M2205/3379 A61M27/006		
其他公开文献	US7520862		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

摘要(译)

一种用于评估应用于患者的CSF分流器中的脑脊液 (CSF) 流速的方法，用于在患者的第一和第二位置之间传输CSF包括将温度传感器应用于CSF分流器以确定CSF通过分流器的流速提供确定的CSF流速并将误差校正传感器应用于患者以提供误差校正信号。根据误差校正信号调节所确定的CSF流速，以提供校正的CSF流速。传感器可以是温度传感器，例如热敏电阻。冷却CSF并根据冷却测量CSF的温度值。根据温度值确定时间值，并根据时间值确定CSF流速。

