



(11)

EP 2 457 912 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
04.12.2013 Bulletin 2013/49

(51) Int Cl.:
C09K 11/06 (2006.01) **C07D 471/04** (2006.01)
C07D 519/00 (2006.01) **H01L 51/50** (2006.01)
H01L 51/00 (2006.01)

(21) Application number: **12001215.8**(22) Date of filing: **16.08.2007**

(54) **Compound having pyridoindole ring structure having substituted pyridyl group attached thereto, and organic electroluminescence element**

Verbindung mit Pyridoindolringstruktur mit daran gebundener substituierter Pyridylgruppe sowie organisches elektrolumineszentes Element

Composé doté d'une structure de bague pyridoindole dotée d'un groupe de pyridyl substitué y étant fixé et élément électroluminescent organique

(84) Designated Contracting States:
DE FR GB

- **Hayashi, Shuichi**
Chuo-ku
Tokyo 104-0028 (JP)
- **Kusano, Shigeru**
Tsukuba-shi
Ibaraki (JP)

(30) Priority: **18.08.2006 JP 2006222890**

(74) Representative: **Müller-Boré & Partner**
Patentanwälte
Grafinger Straße 2
81671 München (DE)

(43) Date of publication of application:
30.05.2012 Bulletin 2012/22

(56) References cited:
EP-A1- 1 571 193 JP-A- 2006 156 445

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
07792593.1 / 2 053 051

(73) Proprietor: **Hodogaya Chemical Co., Ltd.**
Tokyo 104-0028 (JP)

(72) Inventors:

- **Yokoyama, Norimasa**
Chuo-ku
Tokyo 104-0028
(JP)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a compound suitable for an organic electroluminescence (EL) device which is a self-luminescent device suitable for various displaying devices and a device. More specifically, it relates to a compound having a pyridoindole ring structure having a substituted pyridyl group attached thereto, and to an organic EL device using the compound.

[0002] Since organic EL devices are self-luminescent devices, they are bright and excellent in visibility as compared with liquid-crystalline devices and capable of giving clear display, so that the organic EL devices have been actively studied.

[0003] In 1987, C. W. Tang et al. of Eastman Kodak Company put an organic EL device using organic materials into practical use by developing a device having a multilayered structure wherein various roles are assigned to respective materials. They formed a lamination of a fluorescent material capable of transporting electrons and an organic material capable of transporting holes, so that both charges are injected into the layer of the fluorescent material to emit light, thereby achieving a high luminance of 1000 cd/m² or more at a voltage of 10 V or lower (see e.g., Patent Documents 1 and 2).

Patent Document 1: JP-A-8-48656

Patent Document 2: Japanese Patent No. 3194657

[0004] To date, many improvements have been performed for practical utilization of the organic EL devices, and high efficiency and durability have been achieved by an electroluminescent device wherein an anode, a hole-injecting layer, a hole-transporting layer, an emitting layer, an electron-transporting layer, an electron-injecting layer, and a cathode are sequentially provided on a substrate, to further segmentalize various roles (see e.g., Non-Patent Document 1).

[0005] Non-Patent Document 1: Japan Society of Applied Physics Ninth Workshop Preprint pp. 55-61 (2001)

[0006] Further, for the purpose of further improvement of luminous efficiency, utilization of triplet exciton has been attempted and utilization of a phosphorescent material has been investigated (see e.g., Non-Patent Document 2).

[0007] Non-Patent Document 2: Japan Society of Applied Physics Ninth Workshop Preprint pp. 23-31 (2001)

[0008] The emitting layer can be also prepared by doping a carrier-transporting compound, generally called a host material, with a fluorescent material or a phosphorescent material. As described in the above-mentioned Workshop Preprints, the choice of the organic materials in organic EL devices remarkably affects efficiency and durability of the devices.

[0009] In the organic EL devices, the charges injected from the both electrode are recombined in the emitting layer to attain light emission. However, since the mobility of holes is higher than the mobility of electrons, a problem of reduction in efficiency caused by a part of the holes passing through the emitting layer arises. Therefore, it is required to develop an electron-transporting material in which the mobility of electrons is high.

[0010] A representative light-emitting material, tris(8-hydroxyquinoline)aluminum (hereinafter referred to as Alq) is commonly used also as an electron-transporting material but it cannot be considered that the material has hole-blocking capability.

[0011] As a technique to prevent the passing of a part of holes through the emitting layer and to improve probability of charge recombination in the emitting layer, there is a method of inserting a hole-blocking layer. As hole-blocking materials, there have been hitherto proposed triazole derivatives (see e.g., Patent Document 3), bathocuproine (hereinafter referred to as BCP), a mixed ligand complex of aluminum (Balq) (see e.g., Non-Patent Document 2), and the like.

[0012] For example, as an electron-transporting material excellent in hole-blocking ability, there is proposed 3-(4-biphenyl)-4-phenyl-5-(4-t-butylphenyl)-1,2,4-triazole (hereinafter referred to as TAZ) (see e.g., Patent Document 3).

[0013] Patent Document 3: Japanese Patent No. 2734341

[0014] Since TAZ has a work function as large as 6.6 eV and thus exhibits a high hole-blocking ability, it is used as an electron-transporting hole-blocking layer to be laminated onto the cathode side of a fluorescence-emitting layer or phosphorescence-emitting layer prepared by vacuum deposition, coating or the like, and contributes to increase the efficiency of organic EL devices (see e.g., Non-Patent Document 3).

[0015] Non-Patent Document 3: Fiftieth Meeting of Japan Society of Applied Physics and Related Societies, 28p-A-6 Lecture Preprint p. 1413 (2003)

[0016] However, TAZ has a great problem of having low electron transport property, and it is necessary to prepare an organic EL device in combination with an electron-transporting material having a higher electron transport property (see e.g., Non-Patent Document 4).

[0017] Non-Patent Document 4: Japan Society of Applied Physics, Journal of Organic Molecules/Bioelectronics Section, Vol. 11, No. 1, pp. 13-19 (2000)

[0018] Further, BCP has a work function as large as 6.7 eV and a high hole-blocking ability, but has a low glass transition point (Tg) which is 83°C, so that it is poor in thin-film stability and thus it cannot be considered that it sufficiently

functions as a hole-blocking layer.

[0019] All the materials are insufficient in film stability or are insufficient in the function of blocking holes. In order to improve characteristic properties of the organic EL devices, it is desired to develop an organic compound which is excellent in electron-injection/transport performances and hole-blocking ability and is highly stable in a thin-film state.

[0020] EP 1 571 193 A1 relates to an organic electroluminescent device material and an organic electroluminescent device using the same, wherein the organic electroluminescent device material comprises a compound having a specific condensed cyclic structure having nitrogen atom, and wherein the organic electroluminescent device comprises an organic thin film layer which comprises at least one layer and is sandwiched between an anode and a cathode, wherein at least one of the layers in the organic thin film layer contains said material.

[0021] JP 2006-156445 A describes an organic electroluminescent element, display device and lighting system, wherein the organic electroluminescent element has a structure layer comprising at least a phosphorescent light emitting layer between a pair of electrodes, and at least one layer in the structure layer comprises a substituted, nitrogen-containing heterocyclic compound.


[0022] Objects of the invention are to provide an organic compound which is excellent in electron-injection/transport performances, has hole-blocking ability and is highly stable in a thin-film state as a material for an organic EL device having a high efficiency and a high durability, and to provide an organic EL device having a high efficiency and a high durability using the compound. As physical properties of the organic compound suitable for the invention, there may be mentioned (1) good electron injection characteristic, (2) high electron mobility, (3) excellent hole-blocking ability, (4) good stability in a thin-film state, and (5) excellent thermal resistance. In addition, as physical properties of the device suitable for the invention, there may be mentioned (1) high luminous efficiency, (2) low emission initiation voltage, (3) low practical driving voltage, and (4) high maximum emission luminance.

[0023] Thus, in order to achieve the above objects, the present inventors have designed and chemically synthesized compounds having a pyridoindole ring structure having a substituted pyridyl group attached thereto, with focusing on the fact that the nitrogen atom of the pyridine ring which exhibits affinity to an electron has an ability of coordinating to a metal and is excellent in thermal resistance. The present inventors have experimentally produced various organic EL devices using the compounds, and have extensively performed property evaluation of the devices. As a result, they have accomplished the invention.

[0024] Namely, the invention provides a compound having a pyridoindole ring structure having a substituted pyridyl group attached thereto, which is represented by the general formula (1) as claimed in claim 1, and an organic EL device comprising a pair of electrodes and at least one organic layer interposed between the electrodes as claimed in claim 3, wherein at least one of the organic layer(s) contains the compound:

[0025]

[Chem. 1]

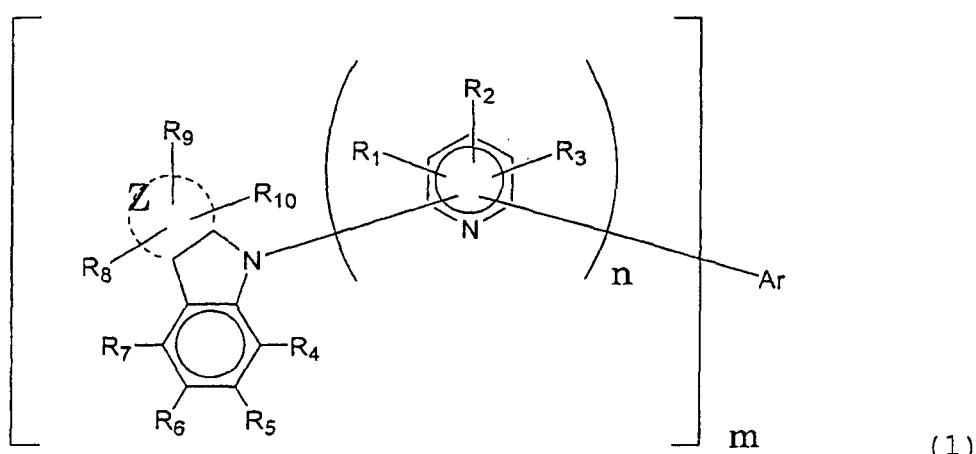

[0026] wherein Ar represents a substituted or unsubstituted aromatic hydrocarbon group, a substituted aromatic heterocyclic group, or a substituted or unsubstituted condensed polycyclic aromatic group; R1 to R10 may be the same or different from one another and each independently represents a hydrogen atom, a fluorine atom, a cyano group, an alkyl group, or a substituted or unsubstituted aromatic hydrocarbon group; Z represents a 6-membered aromatic heterocyclic ring containing one nitrogen atom,

wherein n is 1 and m is 2 or 3.

[0027] Furthermore, the invention provides a compound as claimed in claim 2.

[0028] The aromatic hydrocarbon group or condensed polycyclic aromatic group in the substituted or unsubstituted aromatic hydrocarbon group or substituted or unsubstituted condensed polycyclic aromatic group, which is represented by Ar in the general formula (1) specifically includes the following groups: a phenyl group, a biphenyl group, a terphenyl group, a tetrakisphenyl group, a styryl group, a naphthyl group, an anthryl group, an acenaphthyl group, a fluorenyl group, a phenanthryl group, an indenyl group, and a pyrenyl group. Furthermore, the aromatic heterocyclic group in the substituted aromatic heterocyclic group, which is represented by Ar in the general formula (1), is selected from the group consisting of a pyridyl group,

5 a pyridoindolyl group, a furanyl group, a pyranyl group, a thiophenyl group, a quinolyl group, an isoquinolyl group, a benzofuranyl group, a benzothiophenyl group, an indolyl group, a carbazolyl group, a benzoxazolyl group, a benzothiazolyl group, a quinoxalyl group, a benzimidazolyl group, a pyrazolyl group, a dibenzofuranyl group, a dibenzothiophenyl group, a naphthyridinyl group, a phenanthrolinyl group, and an acridinyl group.

10 [0029] The substituent in the substituted aromatic hydrocarbon group, substituted aromatic heterocyclic group, or substituted condensed polycyclic aromatic group represented by Ar in the general formula (1) specifically includes groups such as a fluorine atom, a chlorine atom,

15 a cyano group, a hydroxyl group, a nitro group, an alkyl group, a cycloalkyl group, an alkoxy group, an amino group, a phenyl group, a naphthyl group, an anthryl group, a styryl group, a pyridyl group, a pyridoindolyl group, a quinolyl group, and a benzothiazolyl group. These substituents may be further substituted.

20 [0030] The aromatic hydrocarbon group in the substituted or unsubstituted aromatic hydrocarbon group represented by R1 to R10 in the general formula (1) specifically includes a phenyl group, a biphenyl group, a terphenyl group, a tetrakisphenyl group, a styryl group, a naphthyl group, a fluorenyl group, a phenanthryl group, an indenyl group, and a pyrenyl group.

The substituent in the substituted aromatic hydrocarbon group represented by R1 to R10 in the general formula (1) specifically includes a fluorine atom, a chlorine atom, a trifluoromethyl group, and a linear or branched alkyl group having 1 to 6 carbon atoms. These substituents may be further substituted.

25 [0031] The compound having a pyridoindole ring structure having a substituted pyridyl group attached thereto, which is represented by the general formula (1) of the invention, provides high electron mobility as compared with conventional electron-transporting materials, has an excellent hole-blocking ability, and is stable in a thin-film state.

30 [0032] The compound having a pyridoindole ring structure having a substituted pyridyl group attached thereto, which is represented by the general formula (1) of the invention, can be used as a constituent material for an electron-transporting layer of an organic EL device. Since the compound of the invention exhibits a higher electron injection/mobile rate as compared with conventional materials, the compound provides effects of improving electron transport efficiency from the electron-transporting layer to an emitting layer to enhance luminous efficiency and also lowering a driving voltage to enhance durability of the organic EL device.

35 [0033] The compound having a pyridoindole ring structure having a substituted pyridyl group attached thereto, which is represented by the general formula (1) of the invention, can be also used as a constituent material for a hole-blocking layer of an organic EL device. Since the compound of the invention is excellent in hole-blocking ability and also excellent in electron transport property as compared with conventional materials and has high stability in a thin-film state, the compound provides effects of lowering a driving voltage, improving current resistance, and enhancing maximum emission luminance of the organic EL device, while exhibiting high luminous efficiency.

40 [0034] The compound having a pyridoindole ring structure having a substituted pyridyl group attached thereto, which is represented by the general formula (1) of the invention, can be also used as a constituent material for an emitting layer of an organic EL device. The use of an emitting layer prepared by using the compound excellent in electron transport property as compared with conventional materials and having a wide band-gap as a host material for the emitting layer and making a fluorescent material or a phosphorescent material, called a dopant, carried thereon provides an effect of realizing an organic EL device exhibiting a lowered driving voltage and having improved luminous efficiency.

45 [0035] Since the organic EL device of the invention uses the compound having a pyridoindole ring structure having a substituted pyridyl group attached thereto which exhibits high electron mobility as compared with conventional electron-transporting materials, has an excellent hole-blocking ability, and is stable in a thin-film state, it becomes possible to realize high efficiency and high durability.

50 [0036] The compound having a pyridoindole ring structure having a substituted pyridyl group attached thereto according to the invention is useful as a constituent material for an electron-transporting layer, a hole-blocking layer, or an emitting layer of an organic EL device and luminous efficiency and durability of a conventional organic EL device can be improved by producing an organic EL device using the compound.

55 [0037] It should be noted that in the following only those examples, which relate to compounds 157 to 159 and 169 to 177, are examples according to the present invention as claimed.

FIG. 1 is a 1H-NMR chart of the compound (Compound 2) of Example 1.

FIG. 2 is a 1H-NMR chart of the compound (Compound 4) of Example 2.

FIG. 3 is a 1H-NMR chart of the compound (Compound 6) of Example 3.
 FIG. 4 is a 1H-NMR chart of the compound (Compound 9) of Example 4.
 FIG. 5 is a 1H-NMR chart of the compound (Compound 10) of Example 5.
 FIG. 6 is a 1H-NMR chart of the compound (Compound 67) of Example 6.
 FIG. 7 is a 1H-NMR chart of the compound (Compound 124) of Example 7.
 FIG. 8 is a 1H-NMR chart of the compound (Compound 129) of Example 8.
 FIG. 9 is a 1H-NMR chart of the compound (Compound 155) of Example 9.
 FIG. 10 is a 1H-NMR chart of the compound (Compound 164) of Example 10.
 FIG. 11 is a drawing showing the constitution of the EL device of Example 14.
 FIG. 12 is a drawing showing the constitution of the EL device of Comparative Example 1.
 FIG. 13 is a drawing showing the constitution of the EL devices of Examples 15, 16, 17, 18, 19, and 20.
 FIG. 14 is a drawing showing the constitution of the EL device of Comparative Example 2.
 FIG. 15 is a graph comparing voltage/current density properties of Example 14 and Comparative Example 1.
 FIG. 16 is a graph comparing voltage/luminance properties of Example 14 and Comparative Example 1.
 FIG. 17 is a graph comparing current density/luminance properties of Example 14 and Comparative Example 1.
 FIG. 18 is a graph comparing current density/luminous efficiency properties of Example 14 and Comparative Example 1.


1: Glass substrate
 2: Transparent anode
 3: Hole-injecting layer
 4: Hole-transporting layer
 5: Emitting layer
 6: Hole-blocking layer
 7: Electron-transporting layer
 8: Electron-injecting layer
 9: Cathode

[0038] The compound having a pyridoindole ring structure having a substituted pyridyl group attached thereto according to the invention is a novel compound, and the compound can be synthesized, for example, by subjecting a corresponding halogenoanilinopyridine to a cyclization reaction with a palladium catalyst to synthesize a pyridoindol ring (see e.g., Non-Patent Document 5) and then by condensing it with one of various halogenopyridines to synthesize a compound having a pyridoindole ring structure having a substituted pyridyl group attached thereto.

[0039] Non-Patent Document 5: J. Chem. Soc., Perkin Trans. 1, p. 1505 (1999)

[0040] Among the compounds having a pyridoindole ring structure having a substituted pyridyl group attached thereto represented by the general formula (1) as shown below, only compounds 157 to 159 and 169 to 177 are according to the invention as claimed.


40 [Chem. 2]

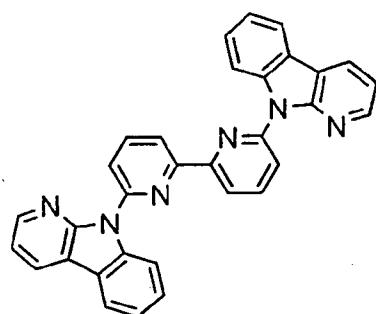

50 (Compound 2)

[Chem. 3]

5

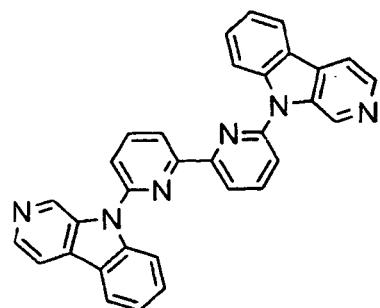


(Compound 3)

10

15

[Chem. 4]

20

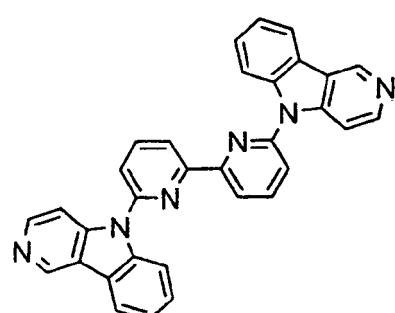

(Compound 4)

25


30

[Chem. 5]

35

40

45

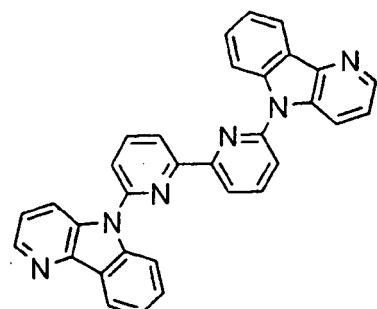


(Compound 5)

50


55

[Chem. 6]

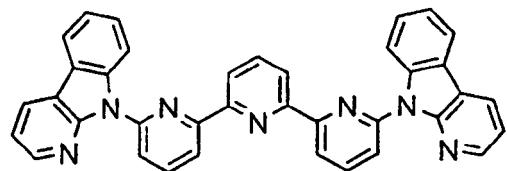

(Compound 6)


[Chem. 7]

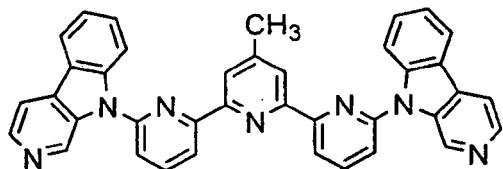

(Compound 7)

10


[Chem. 8]

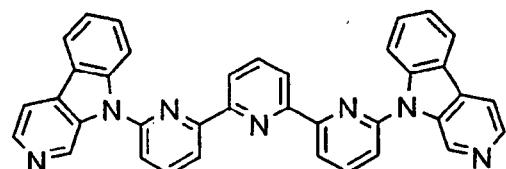

(Compound 8)

20


[Chem. 9]

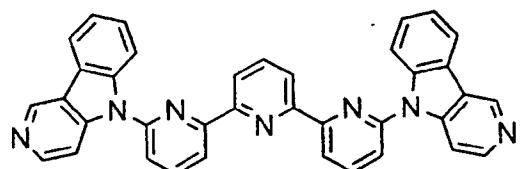

(Compound 9)

25


[Chem. 10]

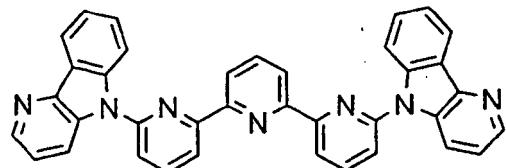

(Compound 10)

30

[Chem. 11]

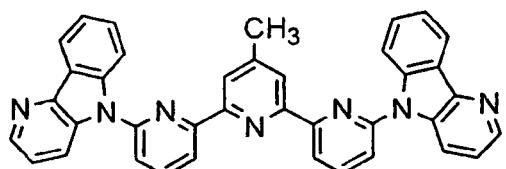


(Compound 11)

40

55

[Chem. 12]

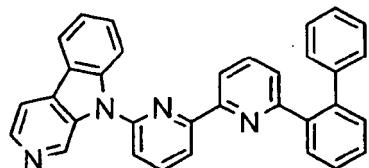


(Compound 12)

5

10

[Chem. 13]

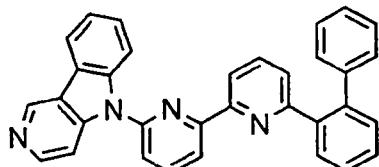


(Compound 13)

15

20

[Chem. 14]

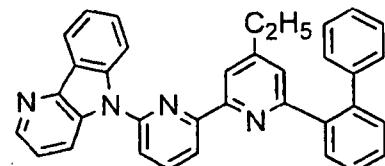


(Compound 14)

25

30

[Chem. 15]

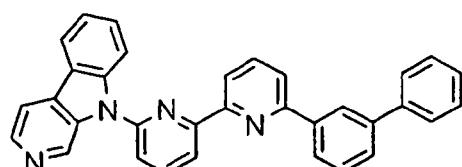


(Compound 15)

35

40

[Chem. 16]

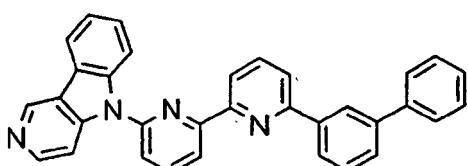

(Compound 16)

45

55

[Chem. 17]




(Compound 17)

5

10

[Chem. 18]

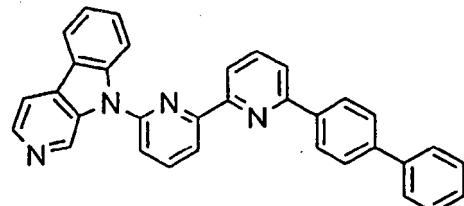


(Compound 18)

15

20

[Chem. 19]

25

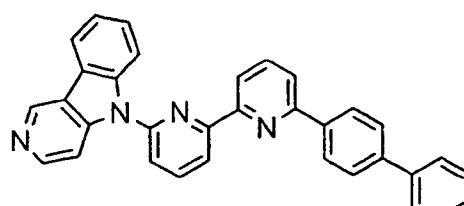

(Compound 19)


30

35

[Chem. 20]

40

45

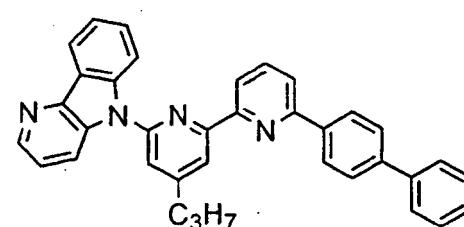


(Compound 20)

50


[Chem. 21]

55

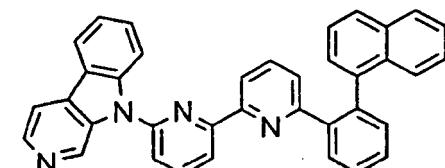

(Compound 21)


[Chem. 22]

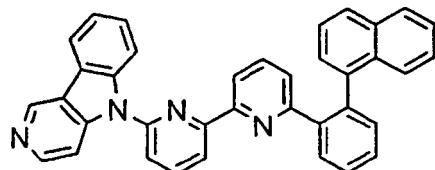

5 (Compound 22)

10


[Chem. 23]

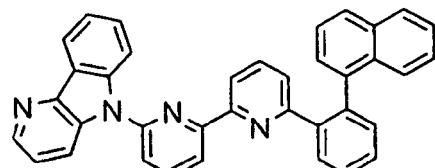

15 (Compound 23)

20


[Chem. 24]

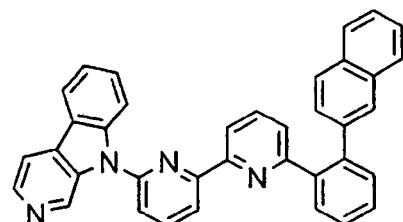

25 (Compound 24)

30


[Chem. 25]

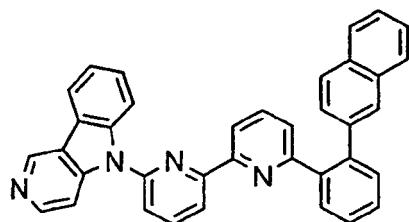

40 (Compound 25)

35

[Chem. 26]

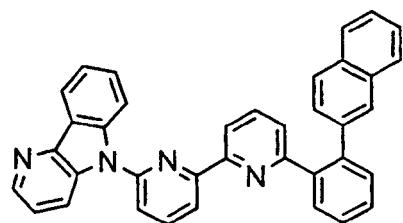


45 (Compound 26)

50

55


[Chem. 27]

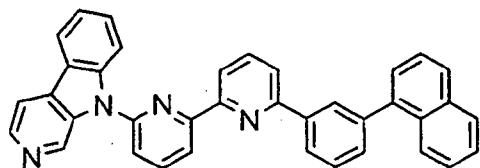

(Compound 27)

10


[Chem. 28]

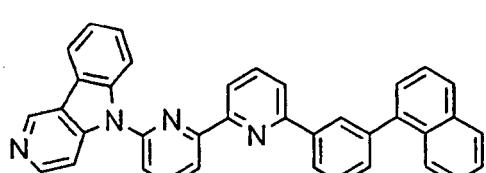

(Compound 28)

20


[Chem. 29]

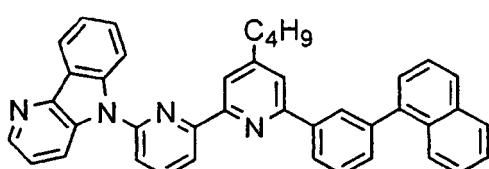

(Compound 29)

30


[Chem. 30]

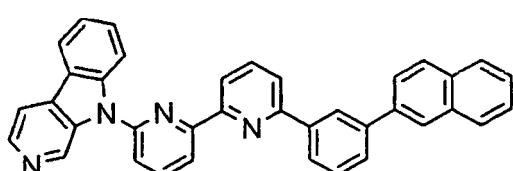

(Compound 30)

40

[Chem. 31]

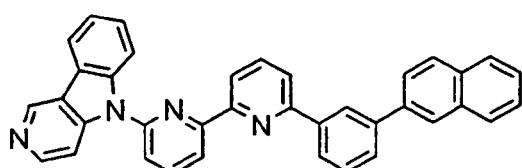


(Compound 31)

50

55

[Chem. 32]

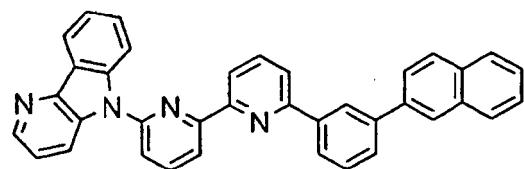

(Compound 32)


8

10

[Chem. 33]

15

20

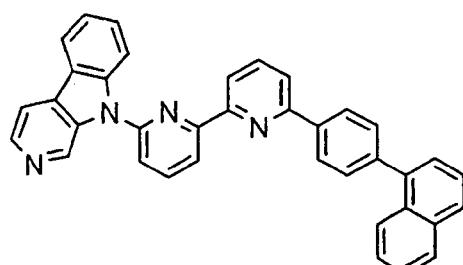


(Compound 33)

25

[Chem. 34]

30

35

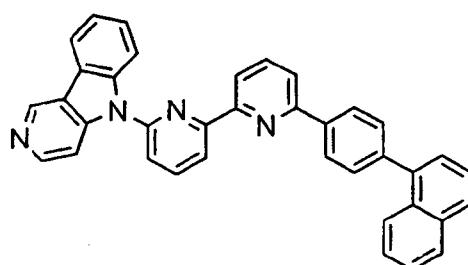


(Compound 34)

40

[Chem. 35]

45

50

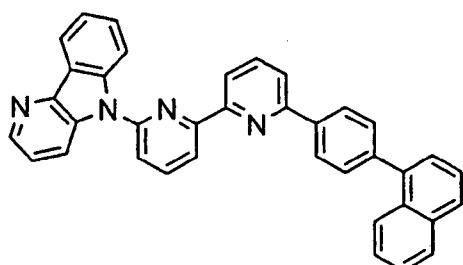


(Compound 35)

55

[Chem. 36]

5

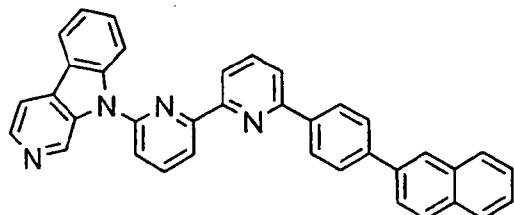


10

(Compound 36)

15

[Chem. 37]

20

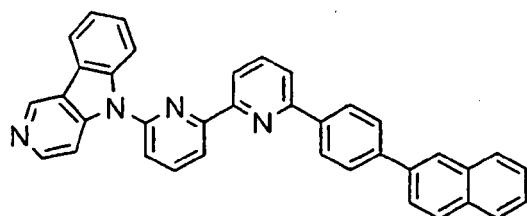


(Compound 37)

25

[Chem. 38]

30

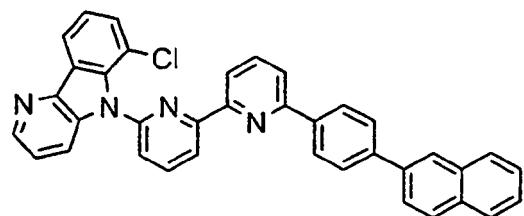


(Compound 38)

35

40

[Chem. 39]

45

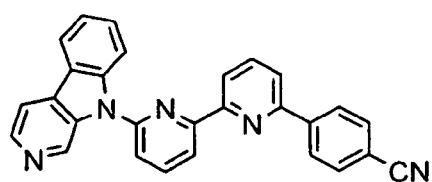


(Compound 39)

50

[Chem. 40]

55

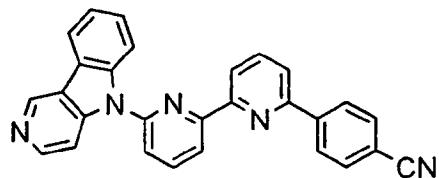


(Compound 40)

[Chem. 41]

5

10

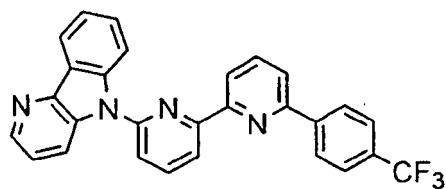


(Compound 41)

15

[Chem. 42]

20

25

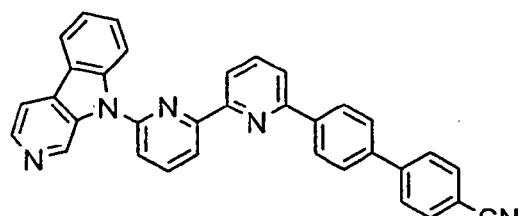


(Compound 42)

30

25

[Chem. 43]

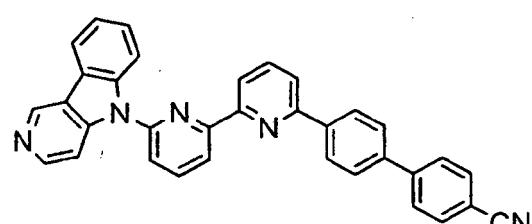


(Compound 43)

10

[Chem. 44]

45

50

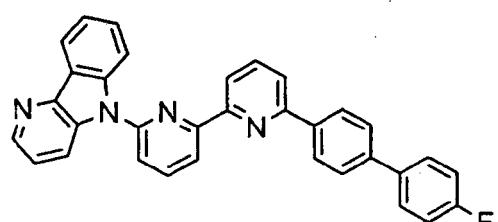


(Compound 44)

55

[Chem. 45]

5

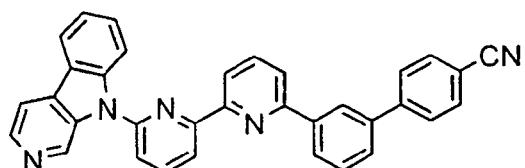


(Compound 45)

10

[Chem. 46]

15

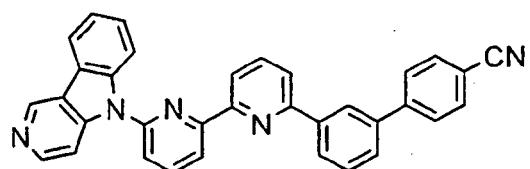


(Compound 46)

20

[Chem. 47]

25

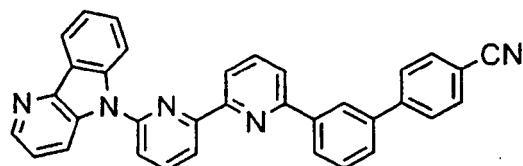


(Compound 47)

30

[Chem. 48]

35

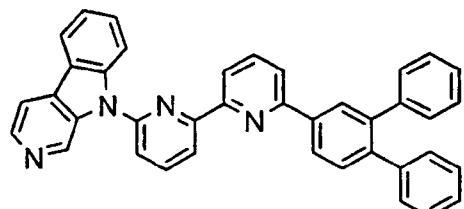


(Compound 48)

40

[Chem. 491]

45

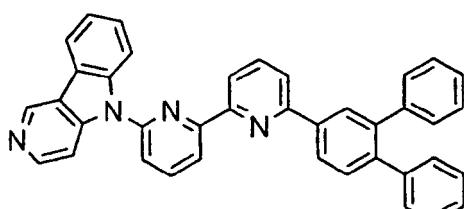


(Compound 49)

55

[Chem. 50]

5

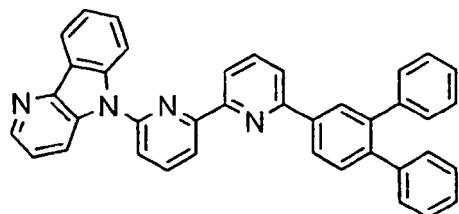


10

(Compound 50)

15

[Chem. 51]

20

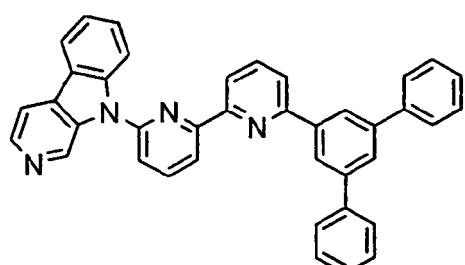


(Compound 51)

25

[Chem. 52]

30

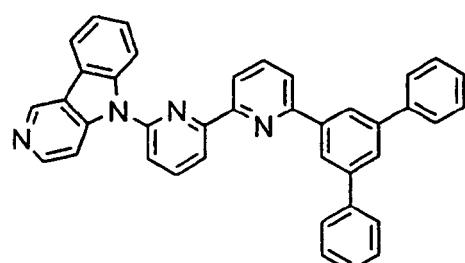


35

(Compound 52)

40

[Chem. 53]

45

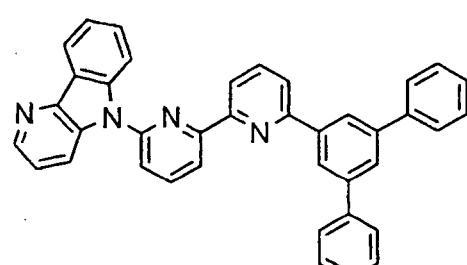


50

(Compound 53)

55

[Chem. 54]

5

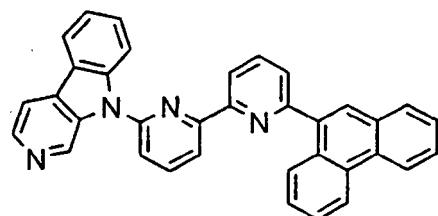


10

(Compound 54)

15

[Chem. 55]

20

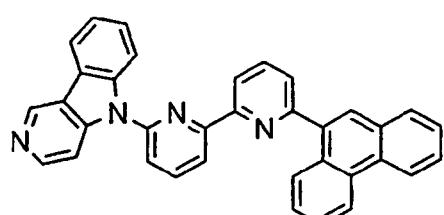


(Compound 55)

25

[Chem. 56]

30

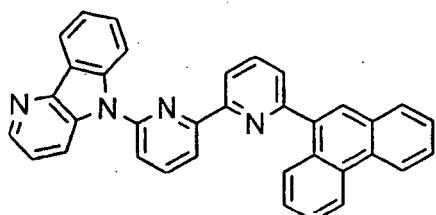


35

(Compound 56)

[Chem. 57]

40

45

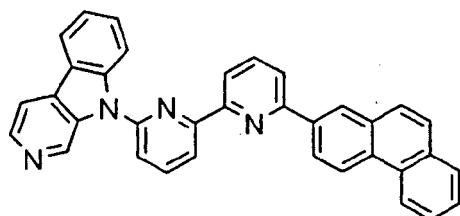


(Compound 57)

50

55

[Chem. 58]

5

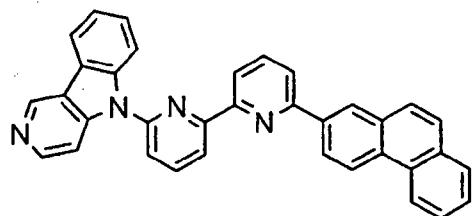


10

(Compound 58)

15

[Chem. 59]

20

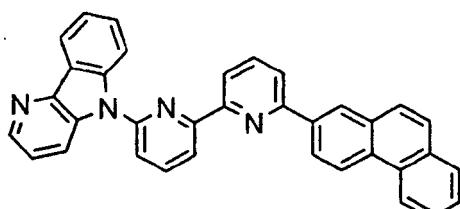


(Compound 59)

25

[Chem. 60]

30

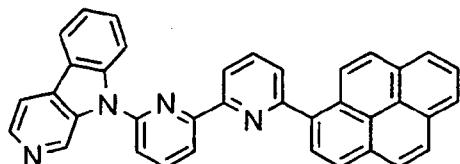


(Compound 60)

35

[Chem. 61]

40

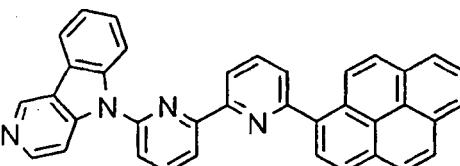


45

(Compound 61)

50

[Chem. 62]


55

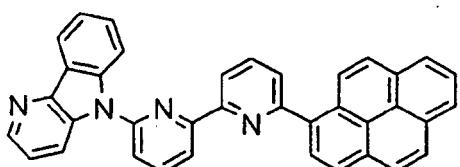

(Compound 62)

[Chem. 63]

5

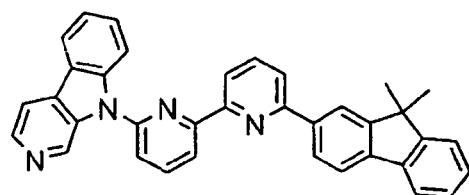


10

(Compound 63)

[Chem. 64]

15

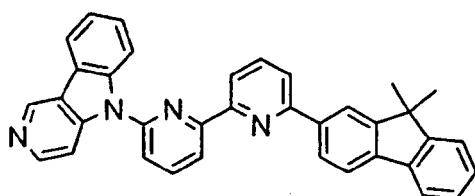


20

(Compound 64)

[Chem. 65]

25

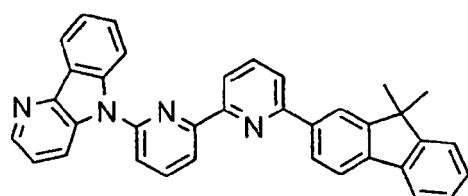


30

(Compound 65)

35

[Chem. 66]

40

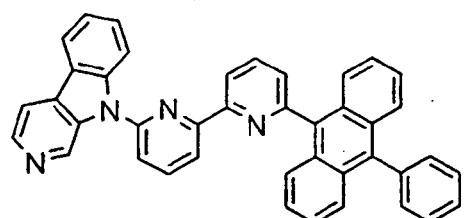


45

(Compound 66)

[Chem. 67]

50

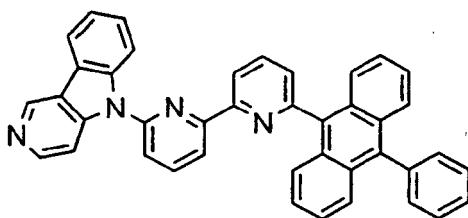


55

(Compound 67)

[Chem. 68]

5

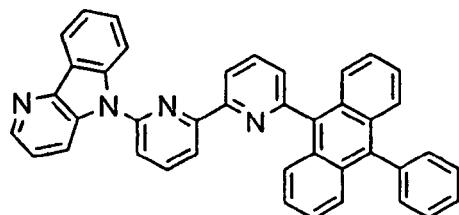


10

(Compound 68)

15

[Chem. 69]

20

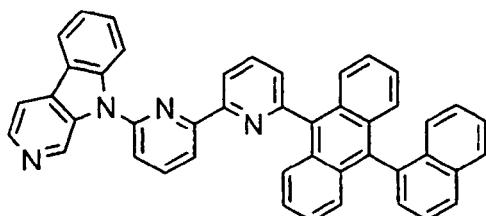


(Compound 69)

25

[Chem. 70]

30

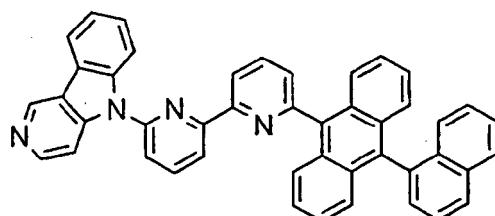


35

(Compound 70)

40

[Chem. 71]

45

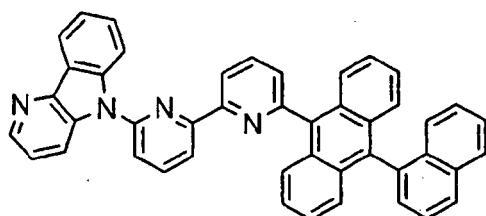


(Compound 71)

50

55

[Chem. 72]

5

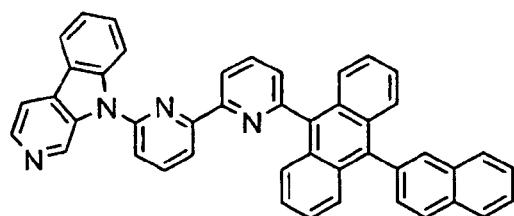


10

(Compound 72)

15

[Chem. 73]

20

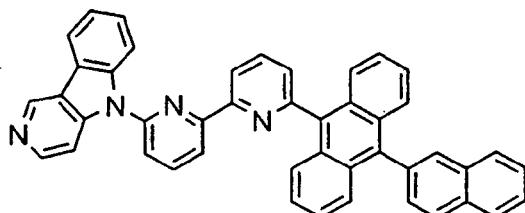


(Compound 73)

25

[Chem. 74]

30

35

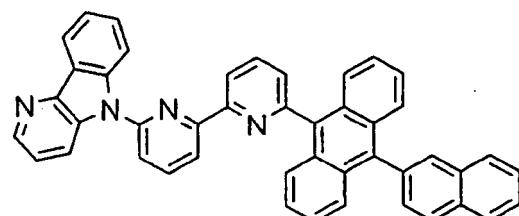


(Compound 74)

40

[Chem. 75]

45

50

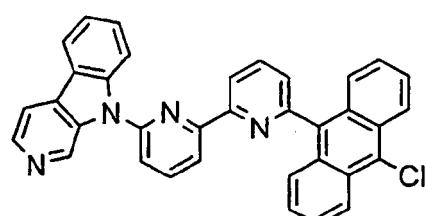


(Compound 75)

55

[Chem. 76]

5

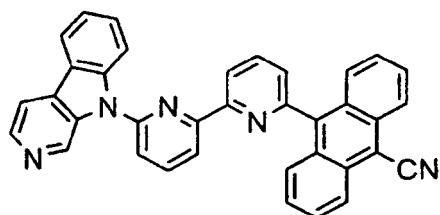


10

(Compound 76)

15

[Chem. 77]

20

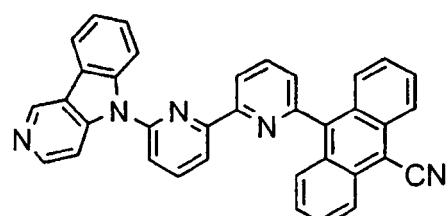


(Compound 77)

25

[Chem. 78]

30

35

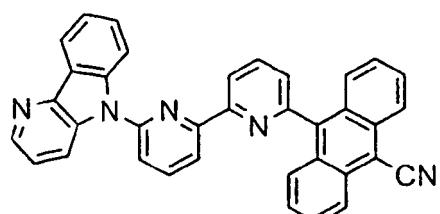


(Compound 78)

40

[Chem. 79]

45

50

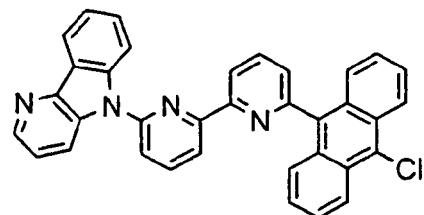


(Compound 79)

55

[Chem. 80]

5

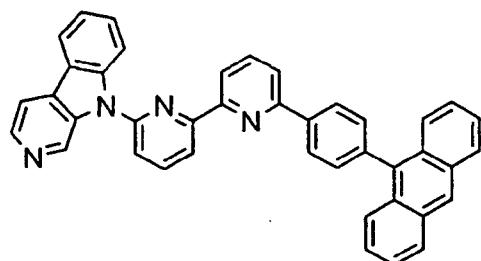


10

(Compound 80)

15

[Chem. 81]

20

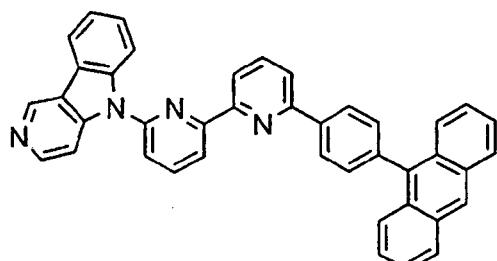


25

(Compound 81)

30

[Chem. 82]

35

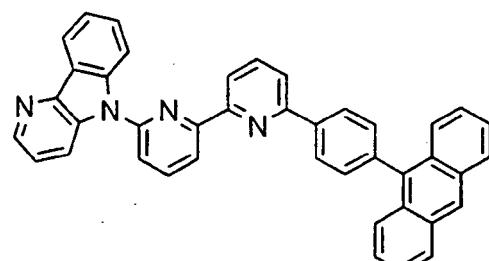


40

(Compound 82)

45

[Chem. 83]


50

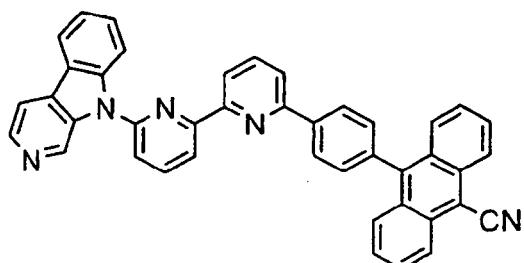

55

(Compound 83)


[Chem. 84]

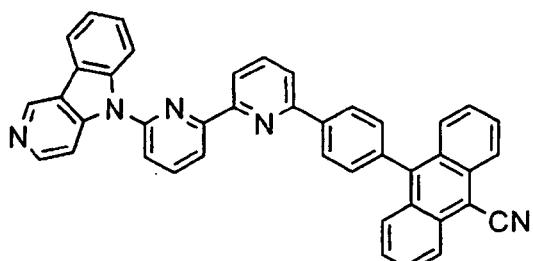

(Compound 84)

15


[Chem. 851]

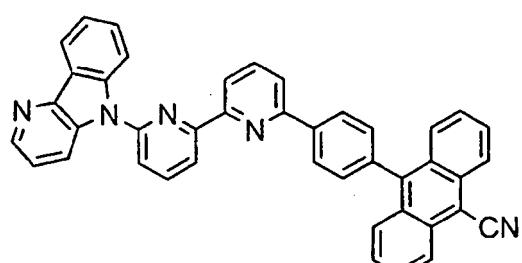

(Compound 85)

30


[Chem. 861]

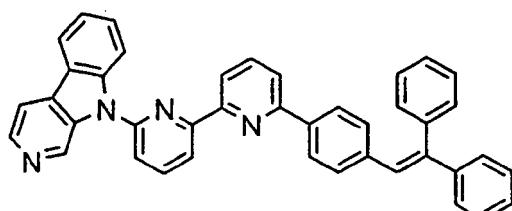

(Compound 86)

10


[Chem. 87]

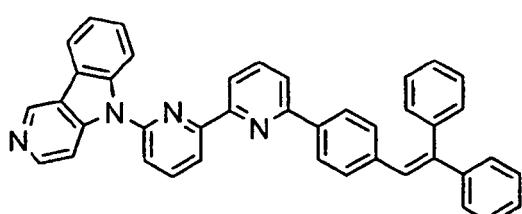

(Compound 87)

55


[Chem. 88]

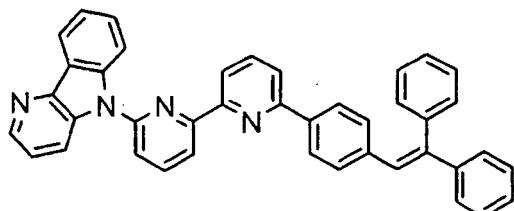

(Compound 88)

15


[Chem. 89]

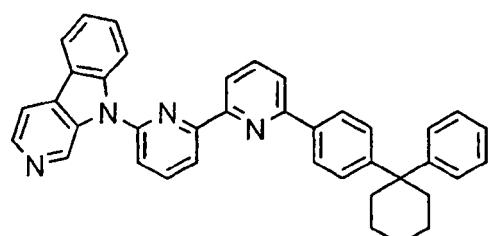

(Compound 89)

30


[Chem. 90]

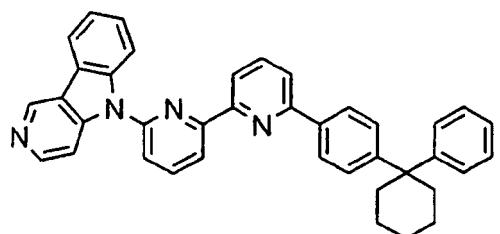

(Compound 90)

40

[Chem. 91]

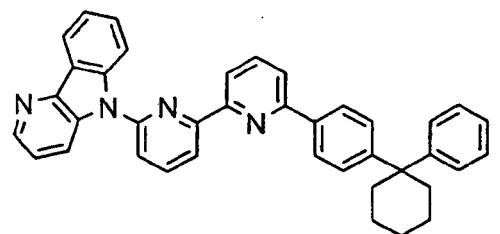


(Compound 91)

55

[Chem. 92]

5

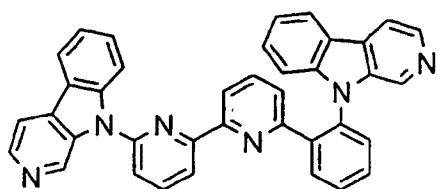


(Compound 92)

10

[Chem. 93]

15

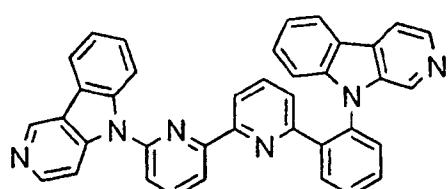


20

(Compound 93)

[Chem. 94]

25

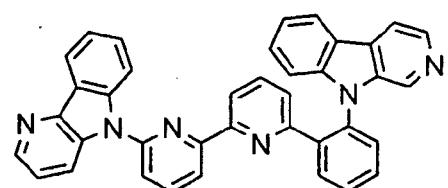


30

(Compound 94)

35

[Chem. 95]

40

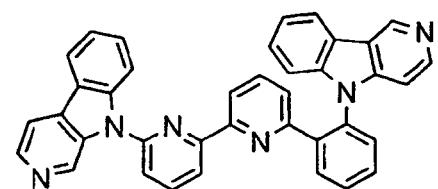


(Compound 95)

45

[Chem. 96]


50

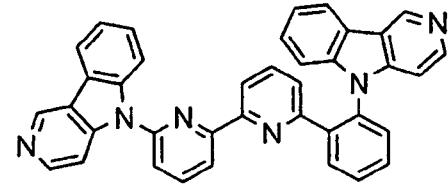

(Compound 96)

55

[Chem. 97]

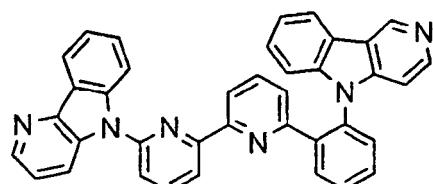

(Compound 97)


5

10

[Chem. 98]

15


20

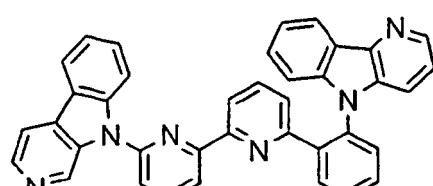

(Compound 98)

25


[Chem. 99]

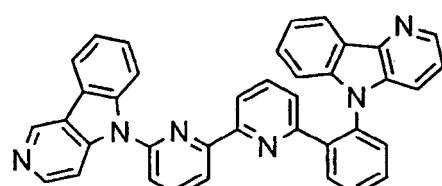

(Compound 99)

35

[Chem. 100]

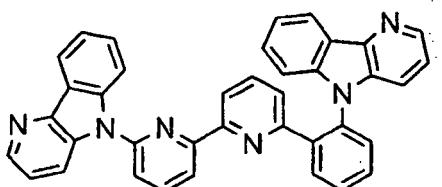


(Compound 100)

45

[Chem. 101]


50

55

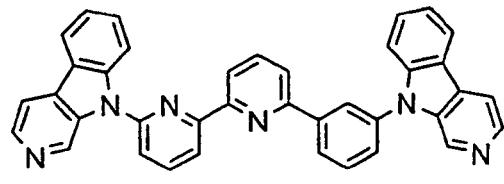

(Compound 101)

[Chem. 102]

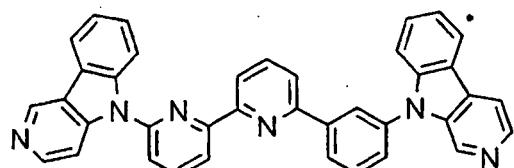


(Compound 102)

5

10

[Chem. 103]

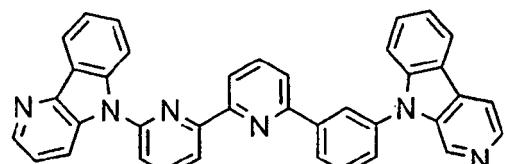


(Compound 103)

15

20

[Chem. 104]




(Compound 104)

25

30

[Chem. 105]




(Compound 105)

35

40

[Chem. 106]

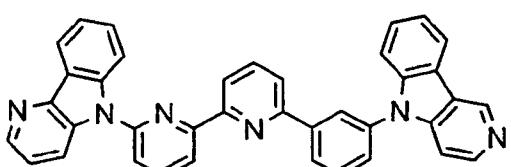

(Compound 106)


45

50

55

[Chem. 107]

5

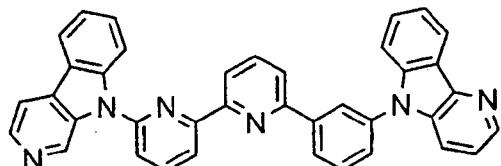


(Compound 107)

10

[Chem. 108]

15

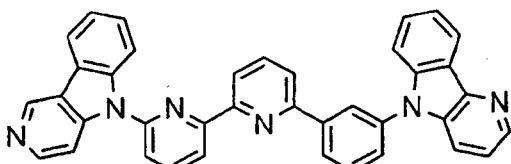


(Compound 108)

20

[Chem. 109]

25

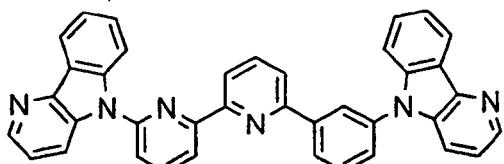


(Compound 109)

30

[Chem. 110]

35

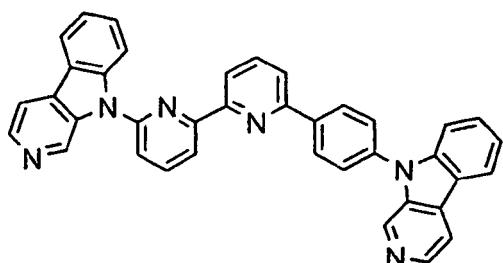


(Compound 110)

40

45

[Chem. 111]

50

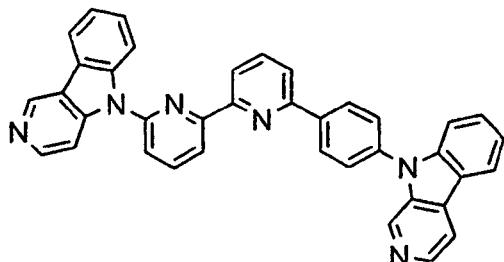

(Compound 111)


55

[Chem. 112]

5

10

15

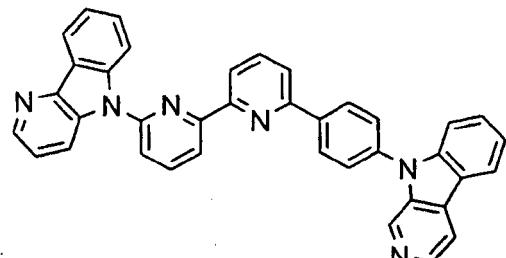


(Compound 112)

[Chem. 113]

20

25

30

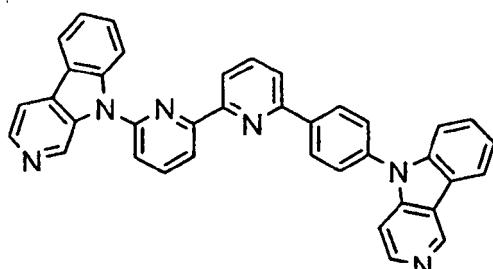


(Compound 113)

[Chem. 114]

35

40

45

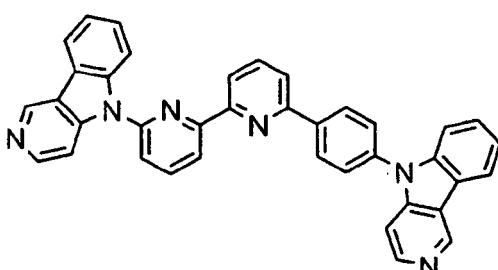


(Compound 114)

[Chem. 115]


50

55

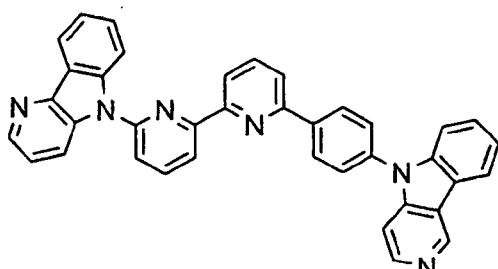


(Compound 115)

[Chem. 116]

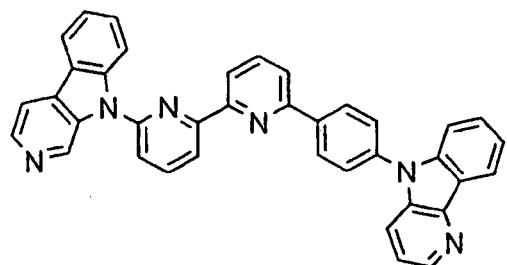


(Compound 116)

15 [Chem. 117]

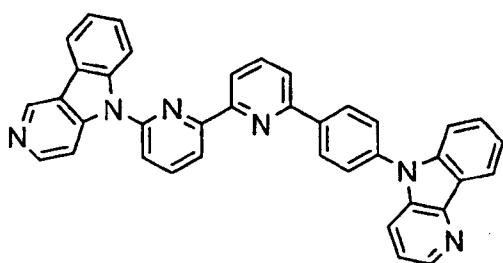


(Compound 117)

30 [Chem. 118]

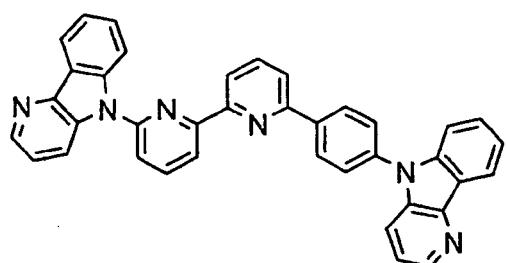

(Compound 118)


40 [Chem. 119]

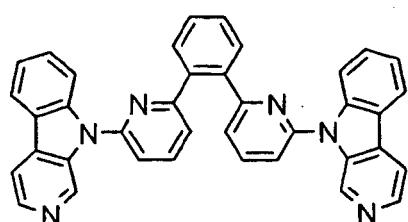

(Compound 119)

[Chem. 120]

5

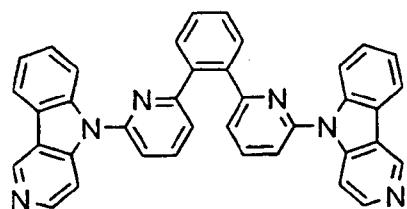


10

(Compound 120)

15

[Chem. 121]

20

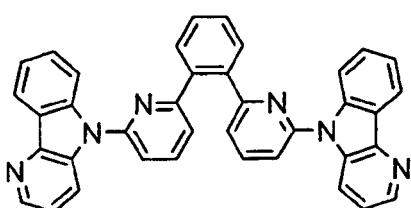


(Compound 121)

25

[Chem. 122]

30

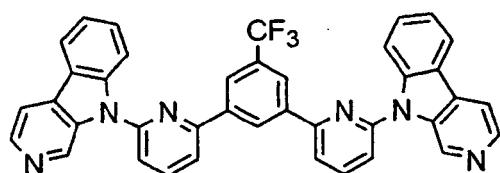


(Compound 122)

35

[Chem. 123]

40

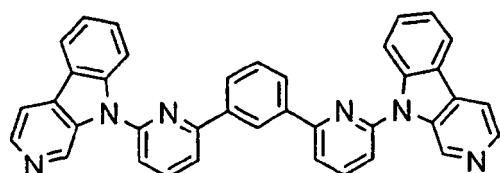


(Compound 123)

45


[Chem. 124]

50

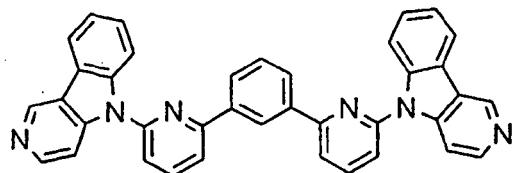

(Compound 124)

[Chem. 125]

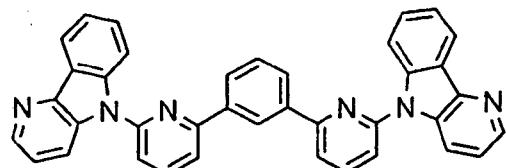


(Compound 125)

5

10

[Chem. 126]

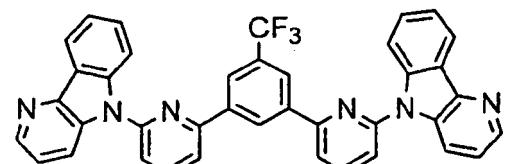


(Compound 126)

15

20

[Chem. 127]

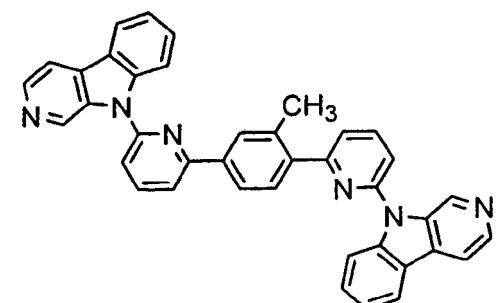


(Compound 127)

25

30

35

[Chem. 128]

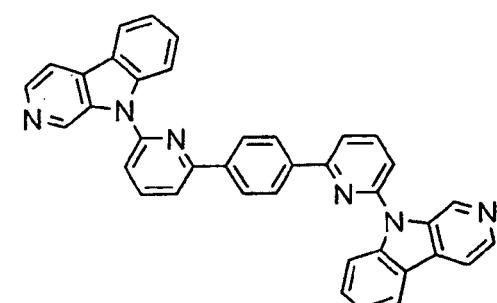

(Compound 128)

40


45

50

55

[Chem. 129]

5

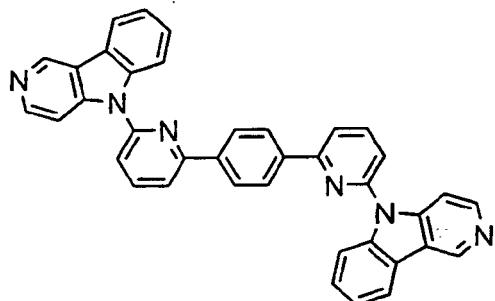


10

(Compound 129)

15

[Chem. 130]

20

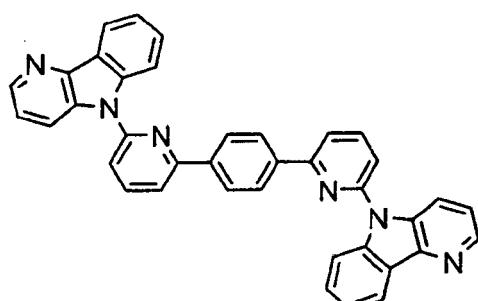


25

(Compound 130)

30

[Chem. 131]

35

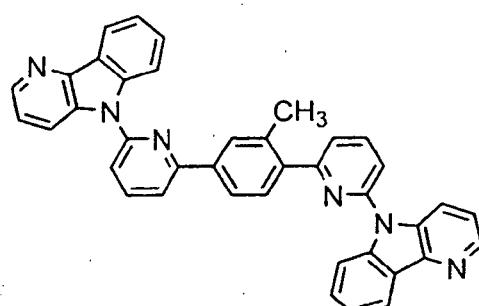

40

(Compound 131)

45

50

55


[Chem. 132]

5

10

15

20

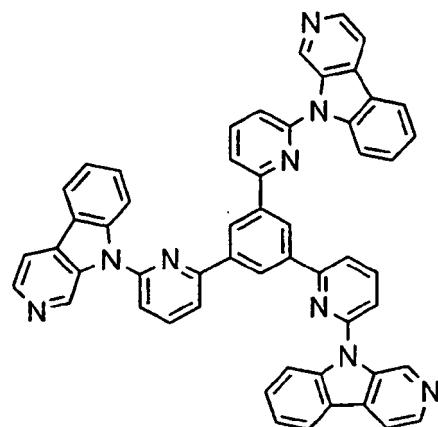


(Compound 132)

[Chem. 133]

25

30

35

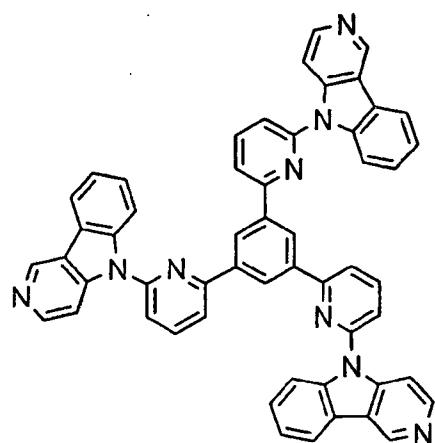

(Compound 133)

40


[Chem. 134]

45

50

55

5

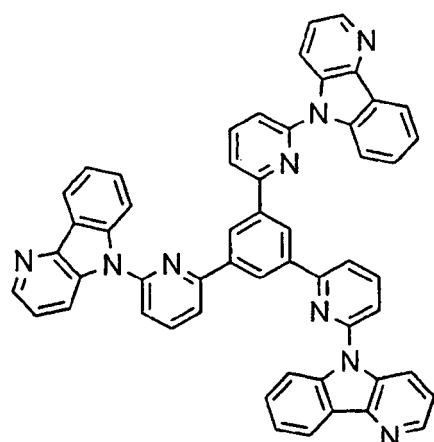


10

(Compound 134)

15

20

[Chem. 135]

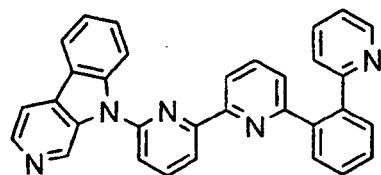


25

(Compound 135)

30

[Chem. 136]

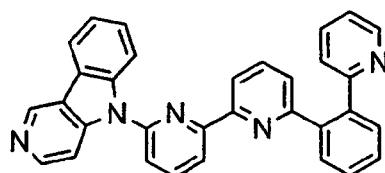


35

(Compound 136)

40

[Chem. 137]

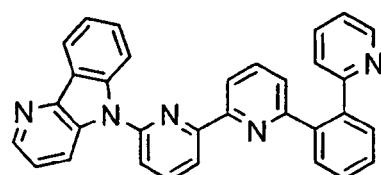


45

(Compound 137)

50

[Chem. 138]


55

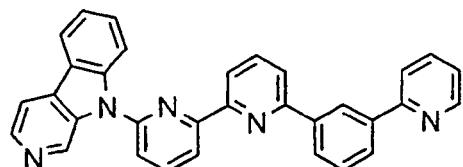

(Compound 138)

5


[Chem. 139]

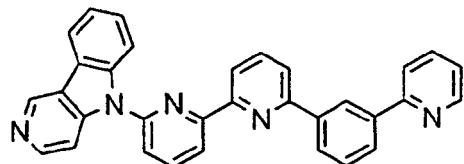

(Compound 139)

15


[Chem. 140]

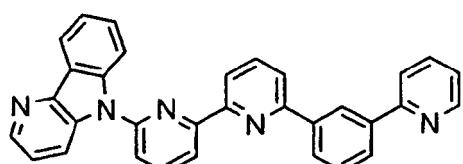

(Compound 140)

30


[Chem. 141]

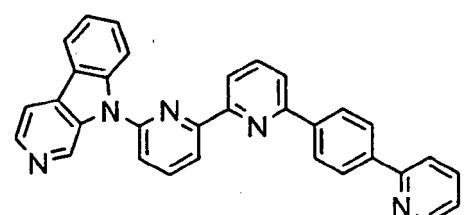

(Compound 141)

10

[Chem. 142]

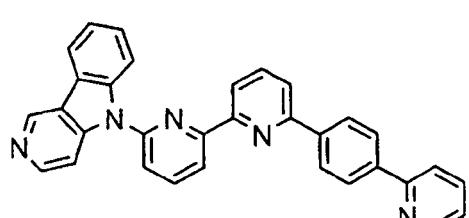


(Compound 142)

55

[Chem. 143]

5

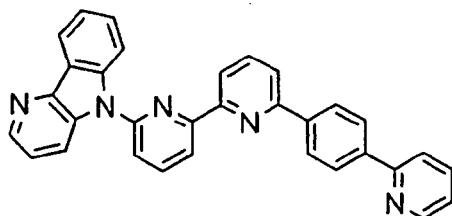


10

(Compound 143)

[Chem. 144]

15

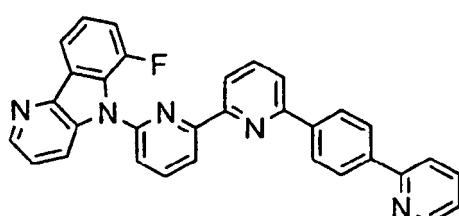


20

(Compound 144)

25

[Chem. 145]

30

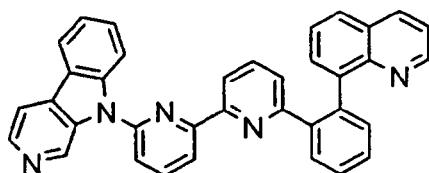


(Compound 145)

35

[Chem. 146]

40

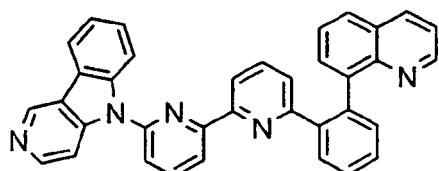


(Compound 146)

45

[Chem. 147]


50

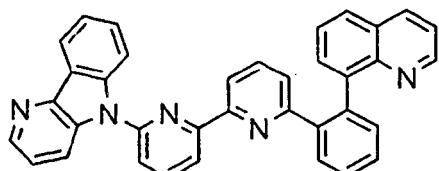

55

(Compound 147)

[Chem. 148]

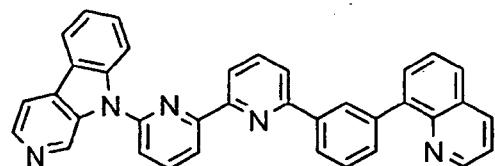


(Compound 148)

5

10

[Chem. 149]

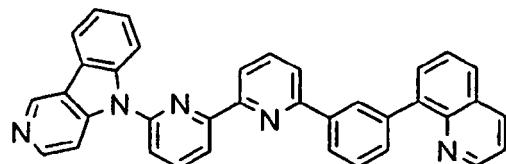


(Compound 149)

15

20

[Chem. 150]

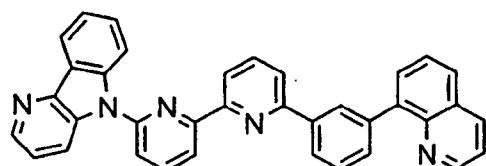


(Compound 150)

25

30

[Chem. 151]

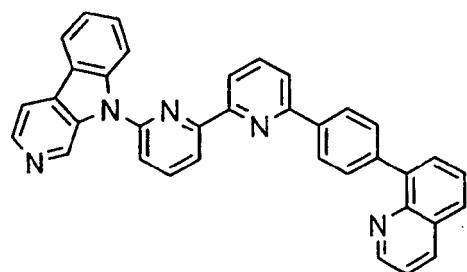


(Compound 151)

35

40

45

[Chem. 152]

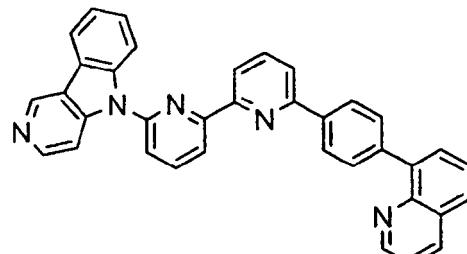


(Compound 152)

50

55

[Chem. 153]

5

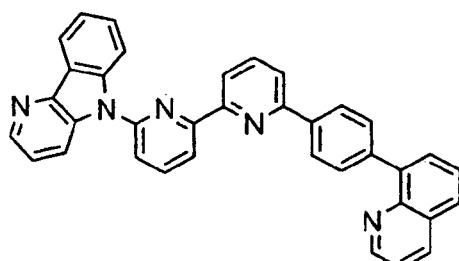


10

(Compound 153)

15

[Chem. 154]

20

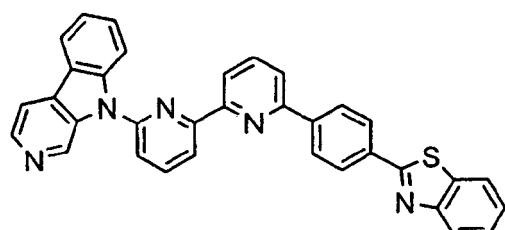


25

(Compound 154)

30

[Chem. 155]

35

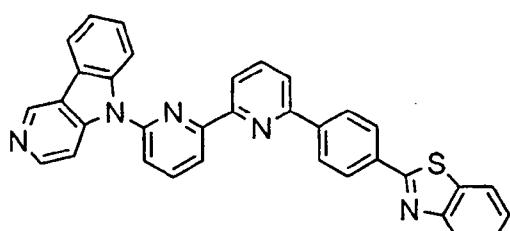


40

(Compound 155)

45

[Chem. 156]


50

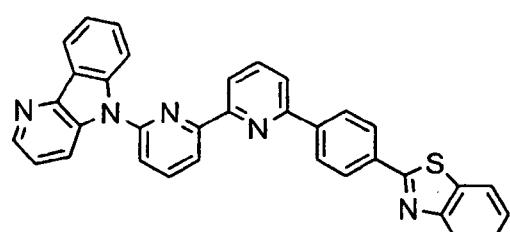

(Compound 156)

55

[Chem. 157]

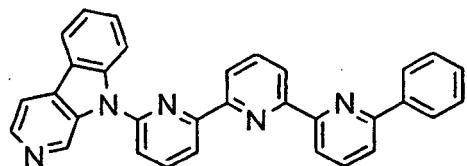


(Compound 157)

5

10

[Chem. 158]

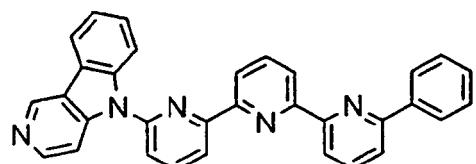


(Compound 158)

15

20

[Chem. 159]

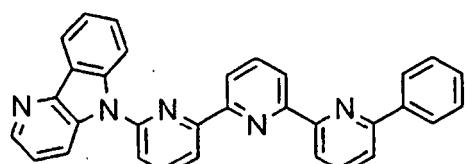


(Compound 159)

25

30

[Chem. 160]

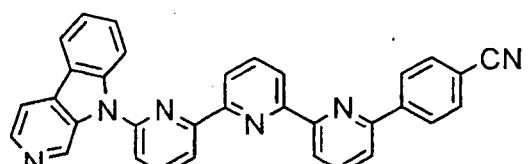


(Compound 160)

35

40

[Chem. 161]

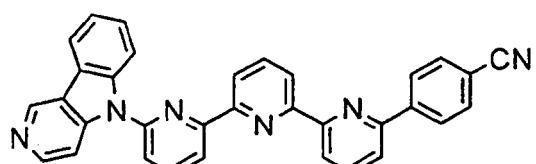


(Compound 161)

45

50


55

[Chem. 162]




(Compound 162)

[Chem. 163]




(Compound 163)

[Chem. 164]




(Compound 164)

[Chem. 165]



(Compound 165)

[Chem. 166]

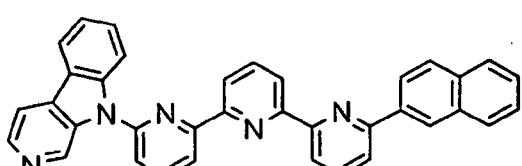

(Compound 166)

5

10

15

20

25

30

35


40

45

50

55


[Chem. 167]

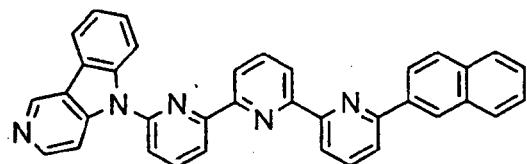

(Compound 167)

10

[Chem. 168]

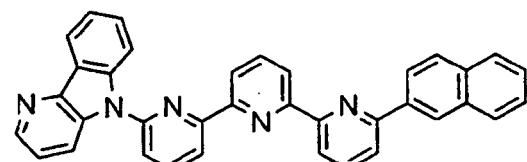


(Compound 168)

20

[Chem. 169]

25

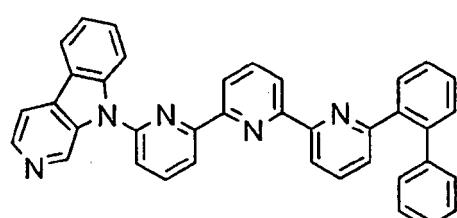


(Compound 169)

35

[Chem. 170]

40

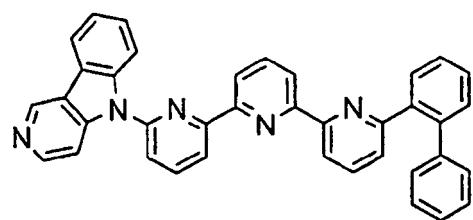


45

(Compound 170)

50


55

[Chem. 171]

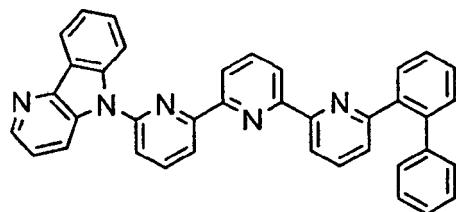


(Compound 171)

[Chem. 172]

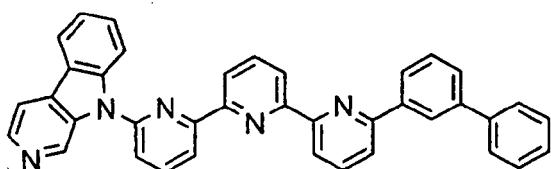


(Compound 172)

[Chem. 173]

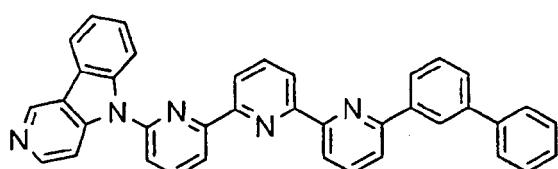


(Compound 173)

[Chem. 174]

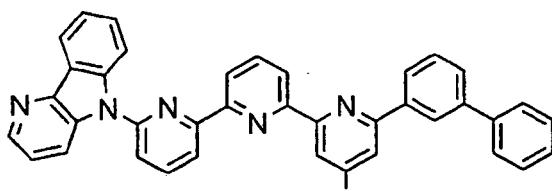


(Compound 174)

[Chem. 175]



(Compound 175)

[Chem. 176]

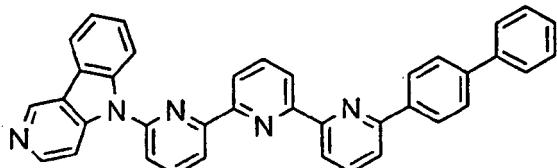


(Compound 176)

5

10

[Chem. 177]

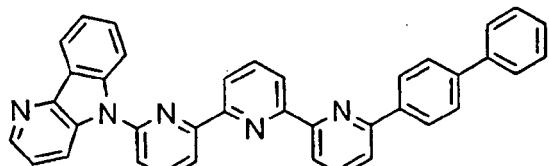


(Compound 177)

15

20

[Chem. 178]

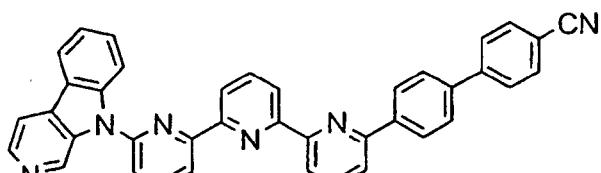

(Compound 178)

25


30

35

40

45

[Chem. 179]

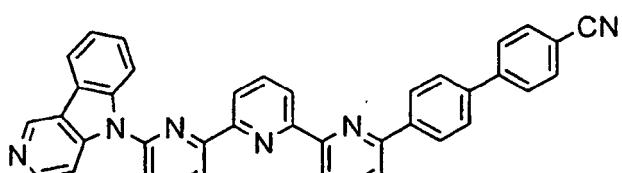


(Compound 179)

35

40

45

[Chem. 180]

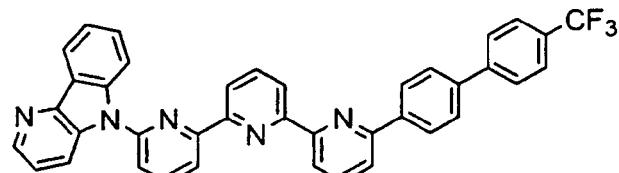


(Compound 180)

50

55

[Chem. 181]

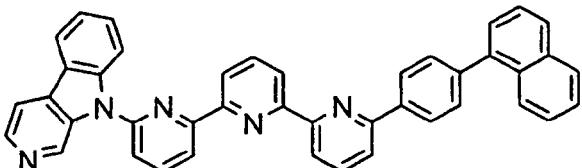


(Compound 181)

5

10

[Chem. 182]

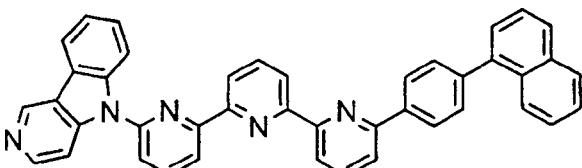


(Compound 182)

15

20

[Chem. 183]

25

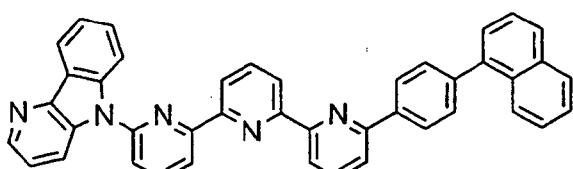


(Compound 183)

35

[Chem. 184]

30

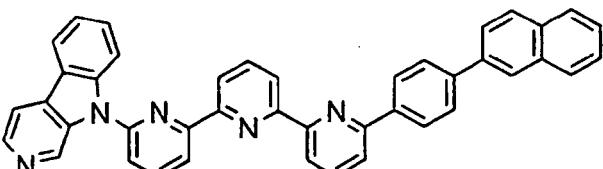


(Compound 184)

45

[Chem. 185]


50

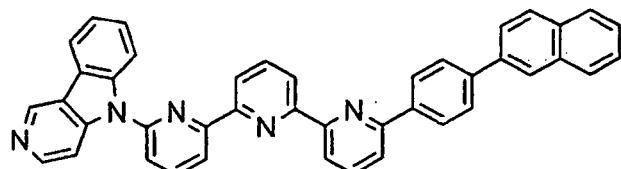

(Compound 185)

55

[Chem. 186]

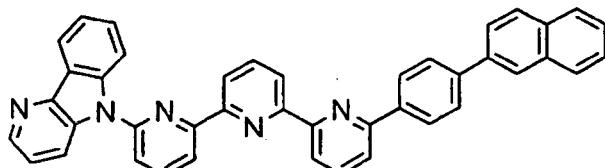


(Compound 186)

5

10

[Chem. 187]

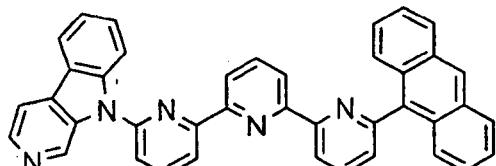


(Compound 187)

15

20

[Chem. 188]

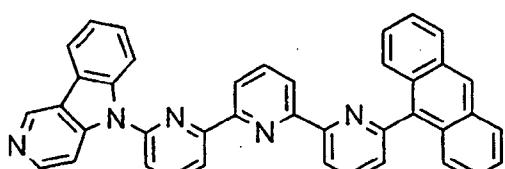


(Compound 188)

25

30

[Chem. 189]

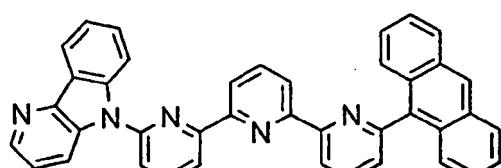


(Compound 189)

35

40

[Chem. 190]

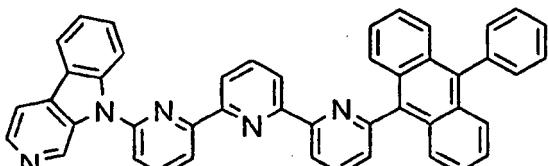


(Compound 190)

45

50

55

[Chem. 191]

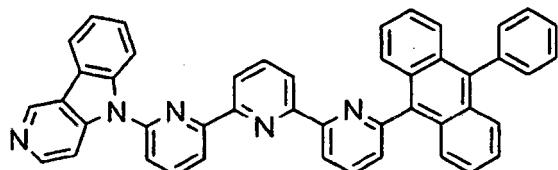


(Compound 191)

5

10

[Chem. 192]




(Compound 192)

15

20

[Chem. 193]

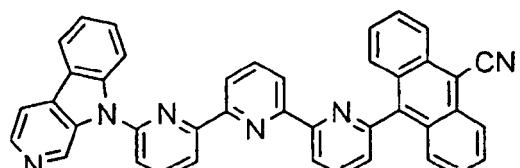


(Compound 193)

25

30

[Chem. 194]

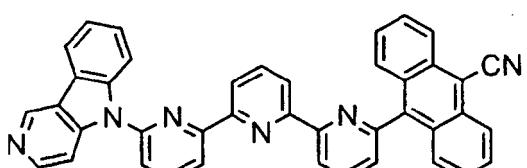


(Compound 194)

35

40

[Chem. 195]

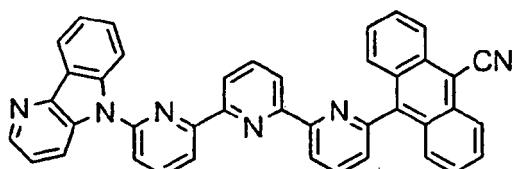


(Compound 195)

45

50

55

[Chem. 196]

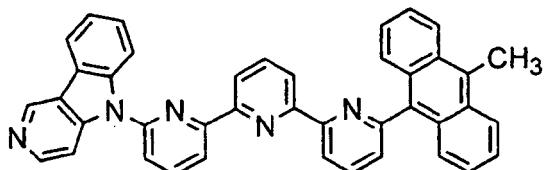


(Compound 196)

5

10

[Chem. 197]

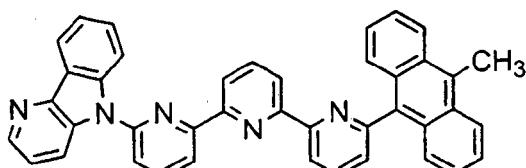


(Compound 197)

15

20

[Chem. 198]

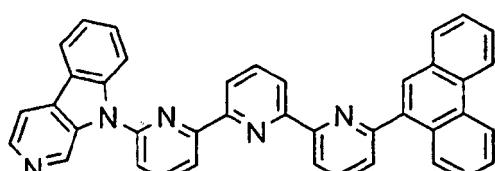


(Compound 198)

25

30

[Chem. 199]

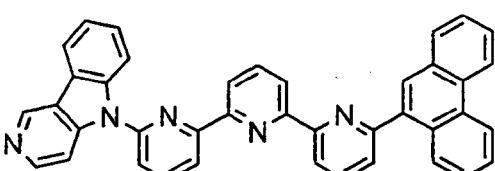


(Compound 199)

35

40

[Chem. 200]

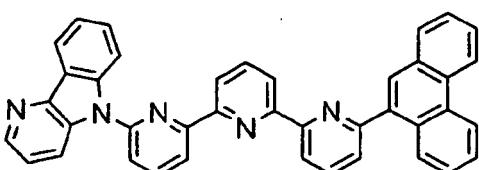


(Compound 200)

45

50

55

[Chem. 201]

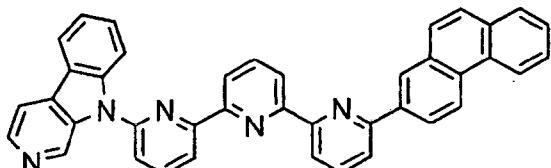


(Compound 201)

5

10

[Chem. 202]




(Compound 202)

15

20

[Chem. 203]

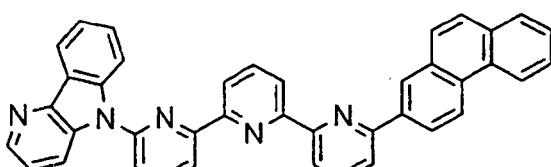


(Compound 203)

25

30

[Chem. 204]

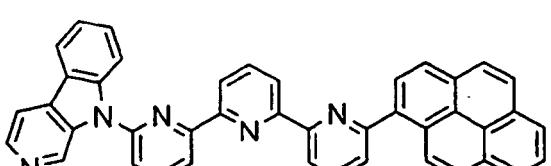


(Compound 204)

35

40

[Chem. 205]




(Compound 205)

45

50

55


[Chem. 206]

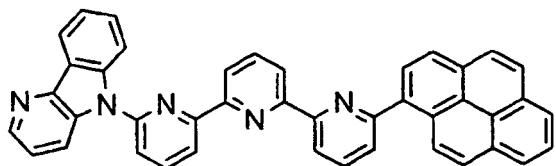

5 (Compound 206)

10


[Chem. 207]

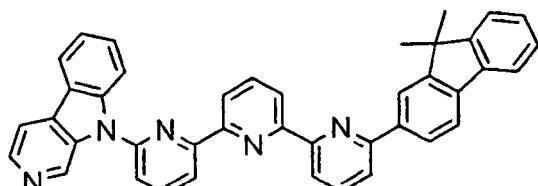

15 (Compound 207)

20


[Chem. 208]

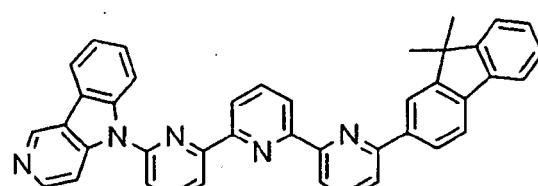

25 (Compound 208)

30


[Chem. 209]

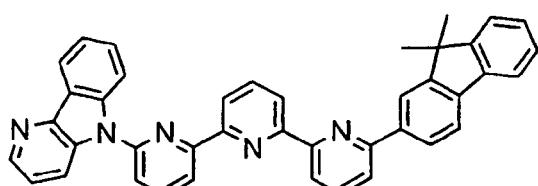

35 (Compound 209)

35

[Chem. 210]

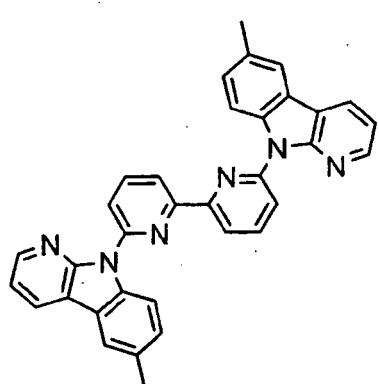


45 (Compound 210)

50

55

[Chem. 211]

5

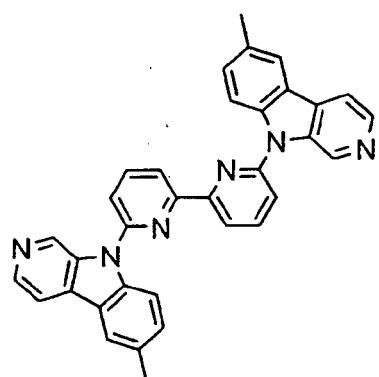


10

15

(Compound 211)

[Chem. 212]

20

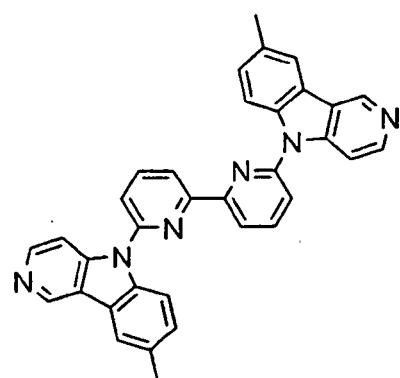

25


30

(Compound 212)

35

[Chem. 213]

40

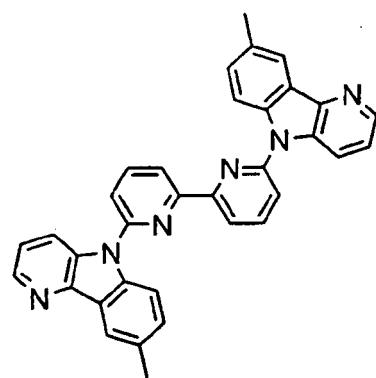

45


50

(Compound 213)

55

[Chem. 214]

5

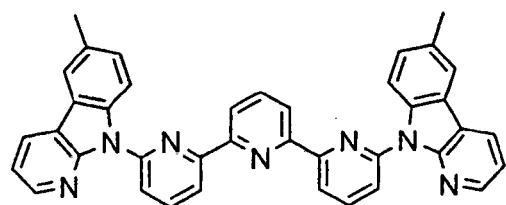


10

(Compound 214)

15

[Chem. 215]

20

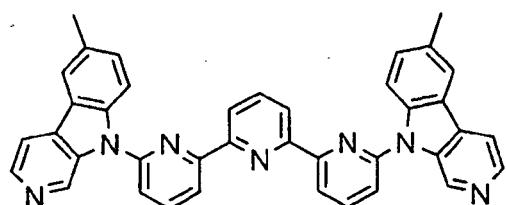


25

(Compound 215)

30

[Chem. 216]

35

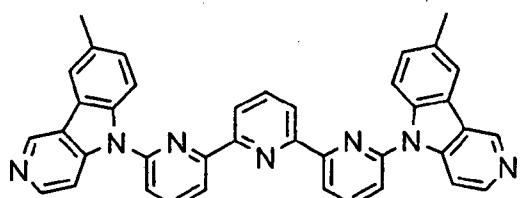


(Compound 216)

40

[Chem. 217]

45

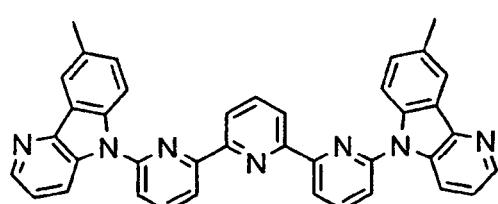


50

(Compound 217)

55

[Chem. 218]

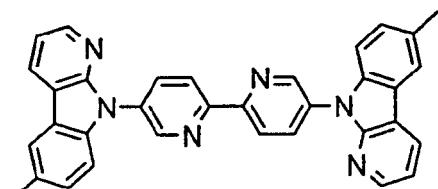


(Compound 218)

10

[Chem. 219]

15

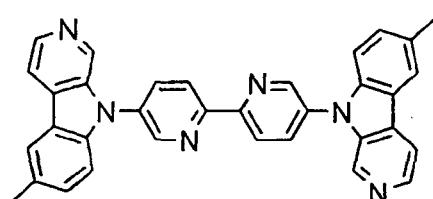


(Compound 219)

25

[Chem. 220]

35

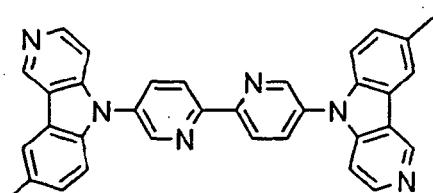


(Compound 220)

35

[Chem. 221]

40

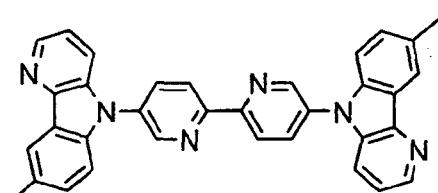

(Compound 221)

45

[0041] Purification of these compounds was performed by purification by column chromatography, adsorption purification with silica gel, alumina, activated clay or active carbon, a recrystallization or crystallization method with a solvent, or the like. Identification of the compounds can be performed by NMR analysis. As physical properties, DSC measurement (Tg) and measurement of melting point were performed. The melting point serves as an index of vapor deposition properties and the glass transition point (Tg) serves as an index of stability in a thin-film state.

[0042] The melting point and the glass transition point were measured using a powder material by means of a highly sensitive differential scanning calorimeter DSC 3100S manufactured by Bruker AXS.

[0043] Further, the work function was measured by preparing a thin film of 100 nm on an ITO substrate and using an atmospheric photoelectric spectrometer AC3 type manufactured by Riken Keiki Co., Ltd. The work function is regarded as an indicator of hole-blocking ability.

[0044] Examples of the structure of the organic EL device of the invention include a structure having an anode, a hole-injecting layer, a hole-transporting layer, an emitting layer, a hole-blocking layer, an electron-transporting layer and a

cathode in this order on a substrate, and a structure further having an electron-injecting layer between the electron-transporting layer and the cathode. In these multilayer structures, it is possible to omit several layers of the organic layers and, for example, the structure may have a constitution sequentially having an anode, a hole-transporting layer, an emitting layer, an electron-transporting layer and a cathode on a substrate.

5 [0045] As the anode of the organic EL device, an electrode material having a large work function, such as ITO or gold, is used. As the hole-injecting layer, besides copper phthalocyanine (hereinafter referred to as CuPc), materials such as star-burst type triphenylamine derivatives and wet-process type materials may be employed.

10 [0046] For the hole-transporting layer, N,N'-diphenyl-N,N'-di(m-tolyl)-benzidine (hereinafter referred to as TPD) and N,N'-diphenyl-N,N'-di(α -naphthyl)-benzidine (hereinafter referred to as NPD), various triphenylamine tetramers, or the like may be used. Further, as the hole-injecting/transporting layers, wet-process type polymer materials such as PE-DOT/PSS may be employed.

15 [0047] As the emitting layer, hole-blocking layer, and electron-transporting layer of the organic EL device of the invention, besides the compound having a pyridoindole ring structure having a substituted pyridyl group attached thereto represented by the general formula (1), aluminum complexes, thiazole derivatives, oxazole derivatives, carbazole derivatives, polydialkylfluorene derivatives, or the like may be used.

20 [0048] By using a conventional luminescence material such as an aluminum complex or styryl derivative for the emitting layer and using the compound having a pyridoindole ring structure having a substituted pyridyl group attached thereto represented by the general formula (1) as the hole-blocking layer and the electron-transporting layer, a high-performance organic EL device can be prepared. Further, a high-performance organic EL device can be prepared also by adding a dopant, for example, a fluorescent material such as quinacridone, coumarin or rubrene or a phosphorescent material such as an iridium complex of phenylpyridine, as a host material of the emitting layer.

25 [0049] Furthermore, the compound having a pyridoindole ring structure having a substituted pyridyl group attached thereto, which is represented by the general formula (1), can be used as the electron-transporting layer through multilayering or co-deposition with conventional electron-transporting material(s).

30 [0050] The organic EL device of the invention may have an electron-injecting layer. As the electron-injecting layer, lithium fluoride or the like may be used. For the cathode, an electrode material having a low work function such as aluminum, or an alloy having a low work function such as aluminum magnesium is used as an electrode material.

35 [0051] Embodiments of the present invention will be illustrated in greater detail with reference to the following Examples, but the invention should not be construed as being limited thereto so long as not exceeding the gist thereof.

Example 1

(Synthesis of 9,9'-[6,6'-bipyridine]-2,2'-diyl-bis-9H-pyrido[2,3-b]indol (Compound 2))

35 [0052] 2.0 g of 6,6'-Dibromo-2,2'-bipyridine, 2.4 g of 9H-pyrido[2,3-b]indol, 0.2 g of copper powder, 2.6 g of potassium carbonate, 0.2 ml of dimethyl sulfoxide, and 24 ml of o-dichlorobenzene were added and the whole was stirred for 30 hours under heating and refluxing. After cooling to room temperature, 100 ml of toluene was added thereto and insoluble solid was removed by filtration. After 200 ml of water was added to the insoluble solid and then stirring and washing was performed, 350 ml of o-dichlorobenzene was added and the whole was stirred under heating to 150°C to effect washing.

40 The resulting crude product was washed with methanol and then dried under reduced pressure at 70°C for 12 hours to obtain 2.40 g (yield 77%) of 9,9'-[6,6'-bipyridine]-2,2'-diyl-bis-9H-pyrido[2,3-b]indol (Compound 2) as a white powder.

[0053] The structure of the resulting white powder was identified using NMR. The results of 1H-NMR measurement are shown in FIG. 1.

45 [0054] The following 20 hydrogen signals were detected on 1H-NMR (CF₃COOD). δ (ppm) = 9.69 (2H), 9.16 (2H), 9.07 (2H), 8.95-9.00 (4H), 8.76 (2H), 8.54 (2H), 8.27-46 (6H).

Example 2

(Synthesis of 5,5'-[6,6'-bipyridine]-2,2'-diyl-bis-5H-pyrido[4,3-b]indol (Compound 4))

50 [0055] 2.0 g of 6,6'-Dibromo-2,2'-bipyridine, 2.4 g of 5H-pyrido[4,3-b]indol, 0.2 g of copper powder, 2.6 g of potassium carbonate, 0.2 ml of dimethyl sulfoxide, and 24 ml of o-dichlorobenzene were added and the whole was stirred for 15 hours under heating and refluxing. After cooling to room temperature, 200 ml of chloroform was added thereto and insoluble solid was removed by filtration. After 300 ml of a mixed solution of chloroform/methanol=4/1 (v/v) was added to the insoluble solid to dissolve it, insoluble solid was removed by filtration. After the filtrate was washed with 300 ml of water and dried over magnesium sulfate, the filtrate was concentrated under reduced pressure to obtain a crude product. The crude product was purified by column chromatography (carrier: NH silica gel, eluent: chloroform) to obtain 1.25 g (yield 40%) of 5,5'-[6,6'-bipyridine]-2,2'-diyl-bis-5H-pyrido[4,3-b]indol (Compound 4) as a white powder.

[0056] The structure of the resulting white powder was identified using NMR. The results of 1H-NMR measurement are shown in FIG. 2.

[0057] The following 24 hydrogen signals were detected on 1H-NMR (CDCl₃-CD3OD). δ (ppm) = 9.36 (2H), 8.50-58 (4H), 8.26 (2H), 8.18 (2H), 7.97 (2H), 7.89 (2H), 7.75 (2H), 7.62 (6H), 7.48 (2H).

5

Example 3

(Synthesis of 9,9'-[2,2';6',2"-terpyridine]-6,6"-diyl-bis-9H-pyrido[2,3-b]indol (Compound 6))

[0058] 1.0 g of 6,6"-Dibromo-2,2';6',2"-terpyridine, 0.95 g of 9H-pyrido[2,3-b]indol, 82 mg of copper powder, 1.1 g of potassium carbonate, 0.08 ml of dimethyl sulfoxide, and 10 ml of o-dichlorobenzene were added and the whole was stirred for 16 hours under heating and refluxing. After cooling to room temperature, 50 ml of toluene was added thereto and insoluble solid was removed by filtration. After 200 ml of a mixed solution of chloroform/methanol=5/1 (v/v) was added to the insoluble solid to dissolve it, insoluble solid was removed by filtration. After the filtrate was washed with 300 ml of water and dried over magnesium sulfate, the filtrate was concentrated under reduced pressure to obtain a crude product. The crude product was purified by recrystallization from o-dichlorobenzene and then the purified product was dried under reduced pressure at 70°C for 12 hours to obtain 960 mg (yield 66%) of 9,9'-[2,2';6',2"-terpyridine]-6,6"-diyl-bis-9H-pyrido[2,3-b]indol (Compound 6) as a white powder.

[0059] The structure of the resulting white powder was identified using NMR. The results of 1H-NMR measurement are shown in FIG. 3.

[0060] The following 23 hydrogen signals were detected on 1H-NMR (CF₃COOD). δ (ppm) = 9.72-78 (1H), 9.63 (2H), 9.54 (2H), 9.28-39 (4H), 9.10 (2H), 8.90 (2H), 8.72 (2H), 8.60 (2H), 8.50 (2H), 8.40 (2H), 7.70 (2H).

25

Example 4

(Synthesis of 5,5'-[2,2';6',2"-terpyridine]-6,6"-diyl-bis-5H-pyrido[4,3-b]indol (Compound 9))

[0061] 1.0 g of 6,6"-Dibromo-2,2';6',2"-terpyridine, 0.95 g of 5H-pyrido[4,3-b]indol, 82 mg of copper powder, 1.1 g of potassium carbonate, 0.08 ml of dimethyl sulfoxide, and 10 ml of o-dichlorobenzene were added and the whole was stirred for 10 hours under heating and refluxing. After cooling to room temperature, 50 ml of toluene was added thereto and insoluble solid was removed by filtration. After 300 ml of a mixed solution of chloroform/methanol=4/1 (v/v) was added to the insoluble solid to dissolve it, insoluble solid was removed by filtration. After the filtrate was washed with 300 ml of water and dried over magnesium sulfate, the filtrate was concentrated under reduced pressure to obtain a crude product. The crude product was purified by column chromatography (carrier: NH silica gel, eluent: chloroform/methanol) to obtain 893 mg (yield 62%) of 5,5'-[2,2';6',2"-terpyridine]-6,6"-diyl-bis-5H-pyrido[4,3-b]indol (Compound 9) as a white powder.

[0062] The structure of the resulting white powder was identified using NMR. The results of 1H-NMR measurement are shown in FIG. 4.

[0063] The following 23 hydrogen signals were detected on 1H-NMR (CDCl₃-CD3OD). δ (ppm) = 9.34 (2H), 8.78 (2H), 8.53 (4H), 8.19-26 (4H), 7.87-8.06 (5H), 7.73 (2H), 7.59 (2H), 7.46 (2H).

40

Example 5

(Synthesis of 5,5'-[2,2';6',2"-terpyridine]-6,6"-diyl-bis-5H-pyrido[3,2-b]indol (Compound 10))

45

[0064] 1.2 g of 6,6"-Dibromo-2,2';6',2"-terpyridine, 1.1 g of 5H-pyrido[3,2-b]indol, 95 mg of copper powder, 1.2 g of potassium carbonate, 0.09 ml of dimethyl sulfoxide, and 10 ml of o-dichlorobenzene were added and the whole was stirred for 6 hours under heating and refluxing. After cooling to room temperature, 50 ml of toluene was added thereto and insoluble solid was removed by filtration. After 300 ml of a mixed solution of chloroform/methanol=4/1 (v/v) was added to the insoluble solid to dissolve it, insoluble solid was removed by filtration. After the filtrate was washed with 300 ml of water and dried over magnesium sulfate, the filtrate was concentrated under reduced pressure to obtain a crude product. The crude product was purified by column chromatography (carrier: NH silica gel, eluent: chloroform/methanol) to obtain 761 mg (yield 45%) of 5,5'-[2,2';6',2"-terpyridine]-6,6"-diyl-bis-5H-pyrido[3,2-b]indol (Compound 10) as a white powder.

55

[0065] The structure of the resulting white powder was identified using NMR. The results of 1H-NMR measurement are shown in FIG. 5.

[0066] The following 23 hydrogen signals were detected on 1H-NMR (CDCl₃-CD3OD). δ (ppm) = 8.74 (2H), 8.62 (2H), 8.54 (2H), 8.49 (2H), 8.37 (2H), 8.19 (2H), 7.99-8.06 (3H), 7.73 (2H), 7.62 (2H), 7.42-50 (4H).

Example 6

(Synthesis of 6'-(10-phenylanthracen-9-yl)-6-(5H-pyrido[4,3-b]indol-5-yl)-[2,2']bipyridine (Compound 67))

[0067] 1.2 g of 6'-bromo-6-5H-pyrido[4,3-b]indol-5-yl-[2,2']bipyridine, 1.4 g of 9-(4,4,5,5-tetramethyl-[1,3,2]dioxaborolan-2-yl)-10-phenylanthracene, 15 ml of a 2M potassium carbonate aqueous solution, 180 mg of tetrakis(triphenylphosphine)palladium(0), 120 ml of toluene, and 30 ml of ethanol were added and the whole was stirred for 28 hours under heating and refluxing. After cooling to room temperature and concentration was performed under reduced pressure, 200 ml of chloroform was added thereto to effect dissolution. After the solution was washed with 100 ml of a saturated sodium chloride solution and dried over magnesium sulfate, the solution was concentrated under reduced pressure to obtain a crude product. The crude product was purified by column chromatography (carrier: NH silica gel, eluent: chloroform/hexane) to obtain 1.67 g (yield 97%) of 6'-(10-phenylanthracen-9-yl)-6-(5H-pyrido[4,3-b]indol-5-yl)-[2,2']bipyridine (Compound 67) as a white powder.

[0068] The structure of the resulting white powder was identified using NMR. The results of 1H-NMR measurement are shown in FIG. 6.

[0069] The following 26 hydrogen signals were detected on 1H-NMR (CDCl3). δ (ppm) = 9.43 (1H), 8.63-67 (2H), 8.53 (1H), 8.25 (1H), 8.09 (1H), 7.95-8.01 (2H), 7.87 (1H), 7.72-75 (4H), 7.32-65 (13H).

Example 7

(Synthesis of 1,3-bis[5H-pyrido[4,3-b]indol-5-yl-pyridine-6-yl]benzene (Compound 124))

[0070] 3.5 g of 5-(6-bromopyridin-2-yl)-5H-pyrido[4,3-b]indol, 0.9 g of benzene-1,3-diboronic acid, 27 ml of a 2M potassium carbonate aqueous solution, 185 mg of tetrakis(triphenylphosphine)palladium(0), 300 ml of toluene, and 75 ml of ethanol were added and the whole was stirred for 7 hours under heating and refluxing. After cooling to room temperature, 400 ml of water was added thereto and extraction with 200 ml of toluene was performed. After the extract was dried over magnesium sulfate, the extract was concentrated under reduced pressure to obtain a crude product. The crude product was purified by column chromatography (carrier: NH silica gel, eluent: chloroform/hexane) to obtain 1.62 g (yield 54%) of 1,3-bis[5H-pyrido[4,3-b]indol-5-yl-pyridine-6-yl]benzene (Compound 124) as a white powder.

[0071] The structure of the resulting white powder was identified using NMR. The results of 1H-NMR measurement are shown in FIG. 7.

[0072] The following 24 hydrogen signals were detected on 1H-NMR (CDCl3). δ (ppm) = 9.41 (2H), 8.94 (1H), 8.55 (2H), 8.27 (2H), 8.23 (2H), 8.06 (2H), 7.97 (2H), 7.93 (2H), 7.85 (2H), 7.69 (1H), 7.61 (2H), 7.48 (2H), 7.41 (2H).

Example 8

(Synthesis of 1,4-bis[5H-pyrido[4,3-b]indol-5-yl-pyridine-6-yl]benzene (Compound 129))

[0073] 1.5 g of 5-(6-bromopyridin-2-yl)-5H-pyrido[4,3-b]indol, 0.4 g of benzene-1,4-diboronic acid, 11 ml of a 2M potassium carbonate aqueous solution, 74 mg of tetrakis(triphenylphosphine)palladium(0), 120 ml of toluene, and 30 ml of ethanol were added and the whole was stirred for 3 hours under heating and refluxing. After cooling to room temperature, insoluble solid was removed by filtration. The resulting solid was dissolved in a mixed solution of chloroform/methanol and insoluble solid was removed by filtration. Thereafter, the filtrate was concentrated under reduced pressure to obtain a crude product. The crude product was purified by recrystallization from methanol to obtain 0.91 g (yield 76%) of 1,4-bis[5H-pyrido[4,3-b]indol-5-yl-pyridine-6-yl]benzene (Compound 129) as a yellow white powder.

[0074] The structure of the resulting yellow white powder was identified using NMR. The results of 1H-NMR measurement are shown in FIG. 8.

[0075] The following 24 hydrogen signals were detected on 1H-NMR (CDCl3-CD3OD). δ (ppm) = 9.35 (2H), 8.54 (2H), 8.31 (4H), 8.23 (2H), 8.11 (2H), 7.93-98 (4H), 7.87 (2H), 7.54-64 (4H), 7.45 (2H).

Example 9

(Synthesis of 6'-(4-benzothiazol-2-yl-phenyl)-6-(5H-pyrido[4,3-b]indol-5-yl)-[2,2']bipyridine (Compound 155))

[0076] 1.1 g of 6'-Bromo-6-5H-pyrido[4,3-b]indol-5-yl-[2,2']bipyridine, 0.9 g of 2-[4-(4,4,5,5-tetramethyl-[1,3,2]dioxaborolan-2-yl)phenyl]benzothiazole, 13 ml of a 2M potassium carbonate aqueous solution, 150 mg of tetrakis(triphenylphosphine)palladium(0), 120 ml of toluene, and 30 ml of ethanol were added and the whole was stirred for 4 hours under heating and refluxing. After cooling to room temperature and concentration was performed under reduced pressure, 200

ml of chloroform was added thereto to effect dissolution. After the solution was washed with 100 ml of a saturated sodium chloride solution and dried over magnesium sulfate, the solution was concentrated under reduced pressure to obtain a crude product. The crude product was purified by column chromatography (carrier: NH silica gel, eluent: chloroform/hexane) to obtain 0.84 g (yield 63%) of 6'-(4-benzothiazol-2-yl-phenyl)-6-(5H-pyrido[4,3-b]indol-5-yl)-[2,2']bipyridine (Compound 155) as a white powder.

[0077] The structure of the resulting white powder was identified using NMR. The results of 1H-NMR measurement are shown in FIG. 9.

[0078] The following 21 hydrogen signals were detected on 1H-NMR (COCl3-CD3OD). δ (ppm) = 9.35 (1H), 8.76 (1H), 8.54 (1H), 8.45 (1H), 8.10-37 (7H), 7.86-8.00 (5H), 7.70 (1H), 7.41-60 (4H).

Example 10

(Synthesis of 6"-naphthalen-1-yl-6-5H-pyrido[4,3-b]indol-5-yl-[2,2';6',2"]terpyridine (Compound 164))

[0079] 0.9 g of 6"-Bromo-6-5H-pyrido[4,3-b]indol-5-yl-[2,2';6',2"]terpyridine, 0.39 g of naphthaleneboronic acid, 9 ml of a 2M potassium carbonate aqueous solution, 0.1 g of tetrakis(triphenylphosphine)palladium(0), 120 ml of toluene, and 30 ml of ethanol were added and the whole was stirred for 6 hours under heating and refluxing. After cooling to room temperature, 200 ml of water was added thereto and extraction with 150 ml of chloroform was performed. After dried over magnesium sulfate, the extract was concentrated under reduced pressure to obtain a crude product. The crude product was purified by column chromatography (carrier: NH silica gel, eluent: chloroform) to obtain 799 mg (yield 80%) of 6"-naphthalen-1-yl-6-5H-pyrido[4,3-b]indol-5-yl-[2,2';6',2"]terpyridine (Compound 164) as a white powder.

[0080] The structure of the resulting white powder was identified using NMR. The results of 1H-NMR measurement are shown in FIG. 10.

[0081] The following 23 hydrogen signals were detected on 1H-NMR (CDCl3). δ (ppm) = 9.41 (1H), 8.71-78 (2H), 8.58-62 (2H), 8.47-50 (1H), 8.10-31 (3H), 7.90-8.06 (5H), 7.84 (1H), 7.43-72 (8H).

Example 11

[0082] For the compounds, melting point and glass transition point were determined by means of a highly sensitive differential scanning calorimeter (DSC 3100S manufactured by Bruker AXS). In this connection, "-" shown in the following results of the glass transition point means that glass transition point was not observed.

		Melting Point	Glass Transition Point
35	Compound of Example 1	359°C	-
	Compound of Example 2	375°C	-
	Compound of Example 3	324°C	-
	Compound of Example 4	307°C	129°C
40	Compound of Example 5	291°C	126°C
	Compound of Example 6	291°C	141°C
	Compound of Example 7	287°C	123°C
	Compound of Example 8	376°C	-
	Compound of Example 9	258°C	99°C
45	Compound of Example 10	207°C	98°C

[0083] The compounds show a glass transition point of 90°C or higher or show no glass transition point, and thus are stable in a thin-film state.

Example 12

[0084] Using each of the compounds, a deposited film having a film thickness of 100 nm was prepared on an ITO substrate and work function was measured on an atmospheric photoelectron spectrometer (AC3 type, manufactured by Riken Keiki Co., Ltd.).

	Work Function
	Compound of Example 1 5.7 eV
	Compound of Example 2 6.1 eV

(continued)

	Work Function
5	Compound of Example 4 5.9 eV
	Compound of Example 5 6.3 eV
	Compound of Example 6 6.5 eV
	Compound of Example 7 6.3 eV
	Compound of Example 8 6.1 eV

10 [0085] Thus, the compounds have values deeper than a work function of 5.4 eV possessed by common hole-transporting materials such as NPD and TPD and have a large hole-blocking ability.


Example 13

15 [0086] A thermal resistance test was performed at 300°C for 1 week. The thermal resistance test was performed as follows. A sample (10 mg) was placed in a glass test tube and, after evacuation to vacuum by means of a diaphragm pump, the test tube was sealed. The sealed tube containing the sample was placed in a constant-temperature chamber set at a predetermined temperature and allowed to stand. After the passage of a predetermined period, the evacuated sealed tube was broken and HPLC purity of the sample was measured. The HPLC purity was measured under the following measuring conditions. Column: Inertsil ODS-SP (inner diameter 4.6 mm, length 250 mm), Mobile phase: acetonitrile/0.05% (v/v) trifluoroacetic acid aqueous solution = 35/65 (v/v), Flow rate: 1.0 ml/minute, Column temperature: 40°C, Measuring wavelength: 254 nm. The HPLC purity (peak area percent, %) was as follows.

	Before test	After 300°C, 1 week
25	Compound of Example 4 99.6%	99.0%
	BCP (Illustrative compound 1) 99.9%	94.2%

30 [0087] As compared with BCP, it is obvious that the compound of Example 4 (Compound 9) is excellent in thermal resistance.

[Chem. 222]



(Illustrative compound 1)

Example 14

45 [0088] An organic EL device was prepared by depositing a hole-transporting layer 4, an emitting layer 5, a hole-blocking layer 6, an electron-transporting layer 7, an electron-injecting layer 8, and a cathode (aluminum electrode) 9 in this order on a glass substrate 1 on which an ITO electrode had been formed as a transparent anode 2 in advance, as shown in FIG. 11. After the glass substrate 1 on which ITO having a film thickness of 150 nm had been formed was washed with an organic solvent, the surface was washed by UV ozone treatment. It was mounted in a vacuum deposition machine, which was then evacuated to 0.001 Pa.

50 [0089] Subsequently, NPD was formed thereon at a deposition rate of 6 nm/min to a thickness of about 40 nm as the hole-transporting layer 4. As the emitting layer 5, Alq₃ was formed thereon at a deposition rate of 6 nm/min to a thickness of about 20 nm. On the emitting layer 5, the compound of Example 4 (Compound 9) was formed at a deposition rate of 6 nm/min to a thickness of about 20 nm as the hole-blocking layer-cum-electron-transporting layer 6 and 7. On the electron-transporting layer 7, lithium fluoride was formed at a deposition rate of 0.6 nm/min to a thickness of about 0.5 nm as the electron-injecting layer 8. Finally, aluminum was deposited to a thickness of about 200 nm to form the cathode 9. The prepared device was stored in a vacuum desiccator and characteristic properties were measured in the atmosphere

at ordinary temperature.

[0090] The results of applying direct voltage to the organic EL device thus formed are shown in FIG. 15 to FIG. 18. Namely, a luminescence of 100 cd/m² was observed from 3.04 V, and at 5.19 V, a current of 300 mA/cm² flowed to obtain a green luminescence of 7700 cd/m². The luminous efficiency at the luminance was 2.57 cd/A. Maximum luminance of the device before breakpoint was 24020 cd/m².

[Comparative Example 1]

[0091] For comparison, an organic EL device was prepared under the same conditions as in Example 14 except that the material of the electron-transporting layer 7 was replaced by Alq3, and characteristic properties thereof were investigated. Namely, Alq3 was formed at a deposition rate of 6 nm/min to a thickness of about 40 nm as the emitting layer-cum-electron-transporting layer 5 and 7. A luminescence of 100 cd/m² was observed from 3.14 V, and at 5.45 V, a current of 300 mA/cm² flowed to obtain a green luminescence of 6470 cd/m². The luminous efficiency at the luminance was 2.16 cd/A. Maximum luminance of the device before breakpoint was 23700 cd/m². The results are shown in FIG. 15 to FIG. 18 together with the results of Example 14.

Example 15

[0092] An organic EL device was prepared by depositing a hole-injecting layer 3, a hole-transporting layer 4, an emitting layer 5, a hole-blocking layer 6, an electron-transporting layer 7, an electron-injecting layer 8, and a cathode (aluminum electrode) 9 in this order on a glass substrate 1 on which an ITO electrode had been formed in advance, as shown in FIG. 13. After the glass substrate 1 on which ITO having a film thickness of 150 nm had been formed was washed with an organic solvent, the surface was washed by UV ozone treatment. It was mounted into a vacuum deposition machine, which was then evacuated to 0.001 Pa.

[0093] Subsequently, CuPc was formed at a deposition rate of 3.6 nm/min to a thickness of about 20 nm as the hole-injecting layer 3 thereon. On the hole-injecting layer 3, NPD was formed at a deposition rate of 3.6 nm/min to a thickness of about 40 nm as the hole-transporting layer 4. On the hole-transporting layer 4, as the emitting layer 5, Alq was formed at a deposition rate of 3.6 nm/min to a thickness of about 30 nm. On the emitting layer 5, the compound of Example 4 (Compound 9) was formed at a deposition rate of 3.6 nm/min to a thickness of about 30 nm as the hole-blocking layer-cum-electron-transporting layer 6 and 7. On the hole-blocking layer-cum-electron-transporting layer 6 and 7, lithium fluoride was formed at a deposition rate of 0.36 nm/min to a thickness of about 0.5 nm as the electron-injecting layer 8. Finally, aluminum was deposited to a thickness of about 200 nm to form the cathode 9. The prepared device was stored in a vacuum desiccator and characteristic properties were measured in the atmosphere at ordinary temperature.

[0094] The results of measuring luminescence properties when direct voltage was applied to the organic EL device prepared using the compound of Example 4 (Compound 9) are summarized in Table 1.

Example 16

[0095] An organic EL device was prepared under the same conditions as in Example 15 except that the material of the hole-blocking layer-cum-electron-transporting layer 6 and 7 was replaced by the compound of Example 5 (Compound 10), and characteristic properties thereof were investigated.

[0096] The results of measuring luminescence properties when direct voltage was applied to the organic EL device prepared using the compound of Example 5 (Compound 10) are summarized in Table 1.

Example 17

[0097] An organic EL device was prepared under the same conditions as in Example 15 except that the material of the hole-blocking layer-cum-electron-transporting layer 6 and 7 was replaced by the compound of Example 6 (Compound 67), and characteristic properties thereof were investigated.

[0098] The results of measuring luminescence properties when direct voltage was applied to the organic EL device prepared using the compound of Example 6 (Compound 67) are summarized in Table 1.

Example 18

[0099] An organic EL device was prepared under the same conditions as in Example 15 except that the material of the hole-blocking layer-cum-electron-transporting layer 6 and 7 was replaced by the compound of Example 7 (Compound 124), and characteristic properties thereof were investigated.

[0100] The results of measuring luminescence properties when direct voltage was applied to the organic EL device

prepared using the compound of Example 7 (Compound 124) are summarized in Table 1.

Example 19

5 [0101] An organic EL device was prepared under the same conditions as in Example 15 except that the material of the hole-blocking layer-cum-electron-transporting layer 6 and 7 was replaced by the compound of Example 8 (Compound 129), and characteristic properties thereof were investigated.

10 [0102] The results of measuring luminescence properties when direct voltage was applied to the organic EL device prepared using the compound of Example 8 (Compound 129) are summarized in Table 1.

15 Example 20

[0103] An organic EL device was prepared under the conditions the same as in Example 15 except that the material of the hole-blocking layer-cum-electron-transporting layer 6 and 7 was replaced by the compound of Example 9 (Compound 155), and characteristic properties thereof were investigated.

20 [0104] The results of measuring luminescence properties when direct voltage was applied to the organic EL device prepared using the compound of Example 9 (Compound 155) are summarized in Table 1.

25 [Comparative Example 2]

30 [0105] For comparison, an organic EL device was prepared under the same conditions as in Example 15 except that the material of the electron-transporting layer 7 was replaced by Alq3, and characteristic properties thereof were investigated.

35 [Table 1]

	Compound	Voltage [V]	Luminance	Luminous	Power efficiency
		(@20mA/cm ²)	(@20mA/cm ²)	(@20mA/cm ²)	(@20mA/cm ²)
30 Example 15	Compound 9	7.06	928	4.64	2.06
35 Example 16	Compound 10	6.68	1045	5.23	2.45
Example 17	Compound 67	5.96	943	4.72	2.48
Example 18	Compound 124	6.28	908	4.54	2.27
Example 19	Compound 129	6.71	930	4.65	2.17
Example 20	Compound 155	6.64	814	4.07	1.93
40 Comparative Example 2	Alq3	7.20	923	4.62	2.02

45 [0106] Thus, it was revealed that the organic EL devices are excellent in luminous efficiency, can achieve remarkable decrease in driving voltage, and further are excellent in thermal resistance, as compared with the devices using Alq3 which is a commonly employed general electron-transporting material.

50 [0107] While the invention has been described in detail and with reference to specific embodiments thereof, it will be apparent to one skilled in the art that various changes and modifications can be made therein without departing from the scope thereof.

55 [0108] Since the compound having a pyridoindole ring structure having a substituted pyridyl group attached thereto according to the invention exhibits good injection of electrons and is stable in a thin-film state, the compound is excellent as a compound for organic EL devices. By preparing organic EL devices using the compound, driving voltage can be decreased and durability can be improved. For example, it becomes possible to spread the compound onto applications of electric home appliances and illumination.

55 **Claims**

1. A compound having a pyridoindole ring structure having a substituted pyridyl group attached thereto, which is

represented by the general formula (1):


[Chem. 1]

5

10

15

20

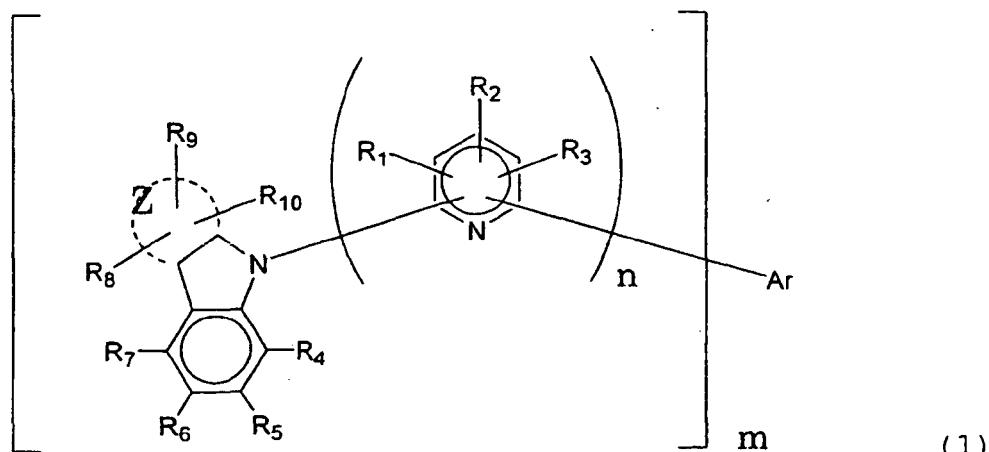

wherein Ar represents a substituted or unsubstituted aromatic hydrocarbon group, a substituted aromatic heterocyclic group, wherein the aromatic heterocyclic group is selected from the group consisting of a pyridyl group, a pyridoindolyl group, a furanyl group, a pyranyl group, a thiophenyl group, a quinolyl group, an isoquinolyl group, a benzofuranyl group, a benzothiophenyl group, an indolyl group, a carbazolyl group, a benzoxazolyl group, a benzothiazolyl group, a quinoxalyl group, a benzimidazolyl group, a pyrazolyl group, a dibenzofuranyl group, a dibenzothiophenyl group, a naphthyridinyl group, a phenanthrolinyl group, and an acridinyl group, or a substituted or unsubstituted condensed polycyclic aromatic group; R₁ to R₁₀ may be the same or different from one another and each independently represents a hydrogen atom, a fluorine atom, a cyano group, an alkyl group, or a substituted or unsubstituted aromatic hydrocarbon group and Z represents a 6-membered aromatic heterocyclic ring containing one nitrogen atom, wherein n is 1 and m is 2 or 3.

2. A compound having a pyridoindole ring structure having a substituted pyridyl group attached thereto, which is represented by the general formula (1):


[Chem. 1]

40

45

50

55

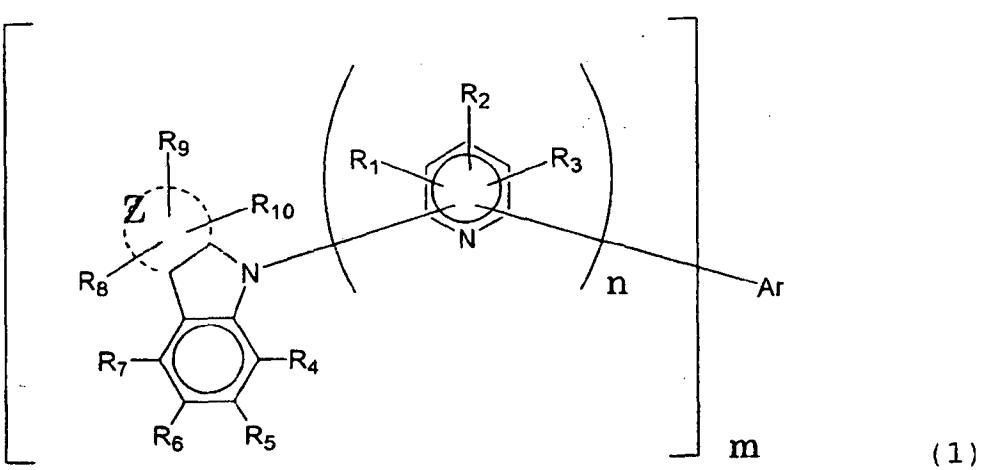

wherein Ar represents an unsubstituted aromatic hydrocarbon group; R₁ to R₁₀ may be the same or different from one another and each independently represents a hydrogen atom, a fluorine atom, a cyano group, an alkyl group,


or a substituted or unsubstituted aromatic hydrocarbon group and Z represents a 6-membered aromatic heterocyclic ring containing one nitrogen atom, wherein m is 1 and n is 3.

- 5 3. An organic electroluminescent device comprising a pair of electrodes and at least one organic layer interposed between the electrodes, wherein at least one of the organic layer(s) contains the compound having a pyridoindole ring structure according to claim 1 or 2.
- 10 4. The organic electroluminescent device according to claim 3, wherein the organic layer(s) comprises an electron-transporting layer, and the compound represented by the general formula (1) is present in the electron-transporting layer.
- 15 5. The organic electroluminescent device according to claim 3, wherein the organic layer(s) comprises a hole-blocking layer, and the compound represented by the general formula (1) is present in the hole-blocking layer.
- 20 6. The organic electroluminescent device according to claim 3, wherein the organic layer(s) comprises an emitting layer, and the compound represented by the general formula (1) is present in the emitting layer.
7. The organic electroluminescent device according to claim 3, wherein the organic layer(s) comprises an electron-injecting layer, and the compound represented by the general formula (1) is present in the electron-injecting layer.

Patentansprüche

- 25 1. Verbindung mit einer Pyridoindolringstruktur mit einer daran gebundenen substituierten Pyridylgruppe, welche durch die allgemeine Formel (1) dargestellt ist:

[Chem. 1]

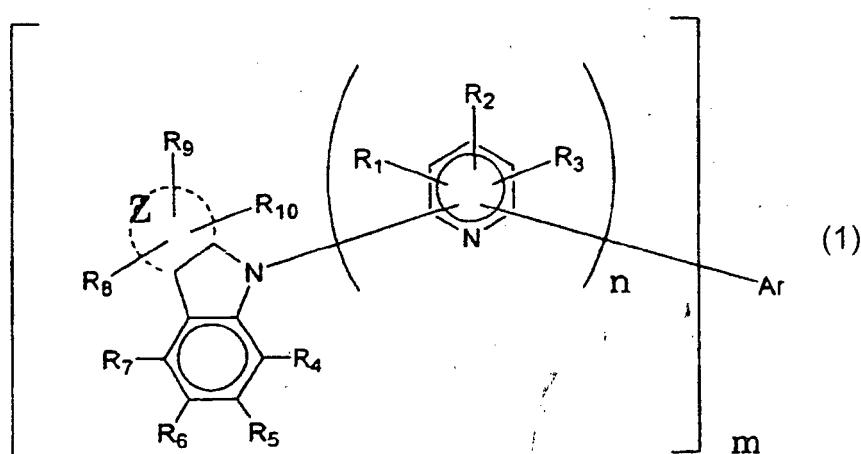

worin Ar eine substituierte oder unsubstituierte aromatische Kohlenwasserstoffgruppe, eine substituierte aromatische heterocyclische Gruppe, wobei die aromatische heterocyclische Gruppe aus der Gruppe, bestehend aus einer Pyridylgruppe, einer Pyridoindolylgruppe, einer Furanylgruppe, einer Pyranylgruppe, einer Thiophenylgruppe, einer Chinolylgruppe, einer Isochinolylgruppe, einer Benzofuranylgruppe, einer Benzothiophenylgruppe, einer Indolylgruppe, einer Carbazolylgruppe, einer Benzoxazolylgruppe, einer Benzothiazolylgruppe, einer Chinoxalylgruppe, einer Benzimidazolylgruppe, einer Pyrazolylgruppe, einer Dibenzofuranylgruppe, einer Dibenzothiophenylgruppe, einer Naphthyridinylgruppe, einer Phenanthrolinylgruppe und einer Acridinylgruppe, ausgewählt ist, oder eine substituierte oder unsubstituierte kondensierte polycyclische aromatische Gruppe darstellt, R₁ bis R₁₀ gleich oder von einander verschieden sein können und jeweils unabhängig ein Wasserstoffatom, ein Fluoratom, eine Cyanogruppe, eine Alkylgruppe oder eine substituierte oder unsubstituierte aromatische Kohlenwasserstoffgruppe darstellen, und Z einen 6-gliedrigen aromatischen heterocyclischen Ring darstellt, der ein Stickstoffatom enthält, wobei n 1 ist und m 2 oder 3 ist.

2. Verbindung mit einer Pyridoindolringstruktur mit einer daran gebundenen substituierten Pyridylgruppe, welche durch die allgemeine Formel (1) dargestellt ist:

5

[Chem. 1]

10

15

20

25


30

35

40

45

50

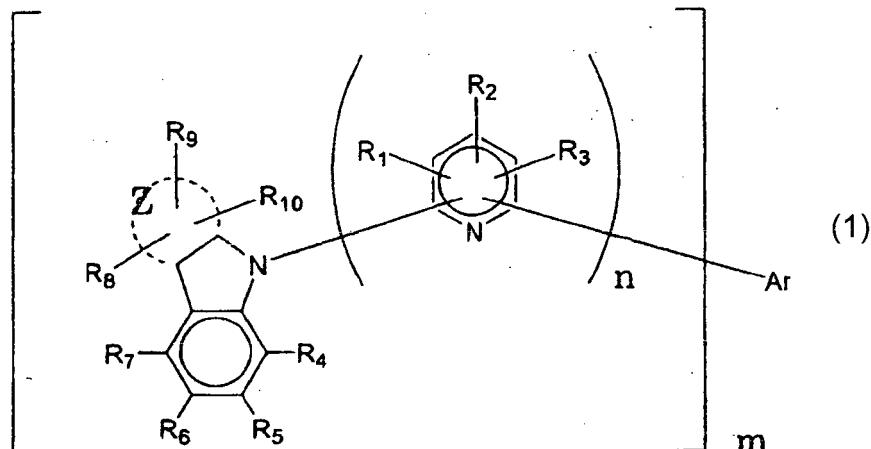

worin Ar eine unsubstituierte aromatische Kohlenwasserstoffgruppe darstellt, R₁ bis R₁₀ gleich oder voneinander verschieden sein können und jeweils unabhängig ein Wasserstoffatom, ein Fluoratom, eine Cyanogruppe, eine Alkylgruppe oder eine substituierte oder unsubstituierte aromatische Kohlenwasserstoffgruppe darstellen, und Z einen 6-gliedrigen aromatischen heterocyclischen Ring darstellt, der ein Stickstoffatom enthält, wobei m 1 ist und n 3 ist.

3. Organische Elektrolumineszenzvorrichtung, die ein Paar von Elektroden und mindestens eine zwischen den Elektroden angeordnete organische Schicht umfasst, wobei mindestens eine der organischen Schichten die Verbindung mit einer Pyridoindolringstruktur nach Anspruch 1 oder 2 enthält.

4. Organische Elektrolumineszenzvorrichtung nach Anspruch 3, wobei die organische(n) Schicht(en) eine Elektronen-transportsschicht umfasst/umfassen und die Verbindung, die durch die allgemeine Formel (1) dargestellt ist, in der Elektronen-transportsschicht vorliegt.

5. Organische Elektrolumineszenzvorrichtung nach Anspruch 3, wobei die organische(n) Schicht(en) eine Lochblockierschicht umfasst/umfassen und die Verbindung, die durch die allgemeine Formel (1) dargestellt ist, in der Lochblockierschicht vorliegt.

6. Organische Elektrolumineszenzvorrichtung nach Anspruch 3, wobei die organische(n) Schicht(en) eine emittierende Schicht umfasst/umfassen und die Verbindung, die durch die allgemeine Formel (1) dargestellt ist, in der emittierenden Schicht vorliegt.

7. Organische Elektrolumineszenzvorrichtung nach Anspruch 3, wobei die organische(n) Schicht(en) eine Elektronen-injizierende Schicht umfasst/umfassen und die Verbindung, die durch die allgemeine Formel (1) dargestellt ist, in der Elektronen-injizierenden Schicht vorliegt.


50

Revendications

1. Composé présentant une structure de cycle pyridoindole présentant un groupe pyridyle substitué fixé à celle-ci, lequel est représenté par la formule générale (1) :

55


[Chem. 1]

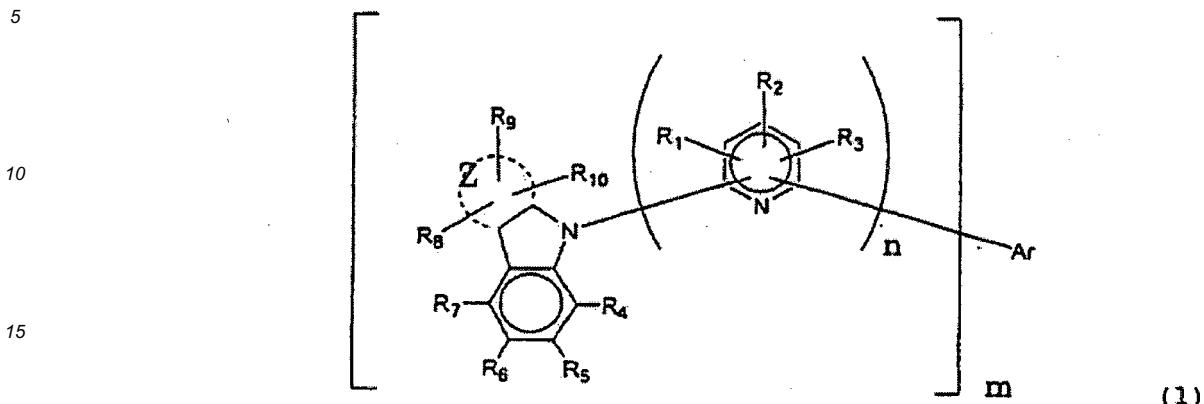

dans laquelle Ar représente un groupe hydrocarboné aromatique substitué ou non substitué, un groupe hétérocyclique aromatique substitué, où le groupe hétérocyclique aromatique est choisi dans le groupe constitué par un groupe pyridyle, un groupe pyridoindolyle, un groupe furanyle, un groupe pyranyle, un groupe thiophényle, un groupe quinolyle, un groupe isoquinolyle, un groupe benzofuranyle, un groupe benzothiophényle, un groupe indolyle, un groupe carbazolyle, un groupe benzoxazolyle, un groupe benzothiazolyle, un groupe quinoxalyle, un groupe benzimidazolyle, un groupe pyrazolyle, un groupe dibenzofuranyle, un groupe dibenzothiophényle, un groupe naphthyridinyle, un groupe phénanthrolinyle, et un groupe acridinyle, ou un groupe aromatique polycyclique condensé substitué ou non substitué; R₁ à R₁₀ peuvent être identiques ou différents l'un de l'autre et représentent chacun indépendamment un atome d'hydrogène, un atome de fluor, un groupe cyano, un groupe alkyle ou un groupe hydrocarboné aromatique substitué ou non substitué et Z représente un cycle hétérocyclique aromatique à 6 éléments contenant un atome d'azote, dans laquelle m est égal à 1 et n est égal à 2 ou à 3.

2. Composé présentant une structure de cycle pyridoindole présentant un groupe pyridyle substitué fixé à celle-ci, lequel est représenté par la formule générale (1) :

[Chem. 1]

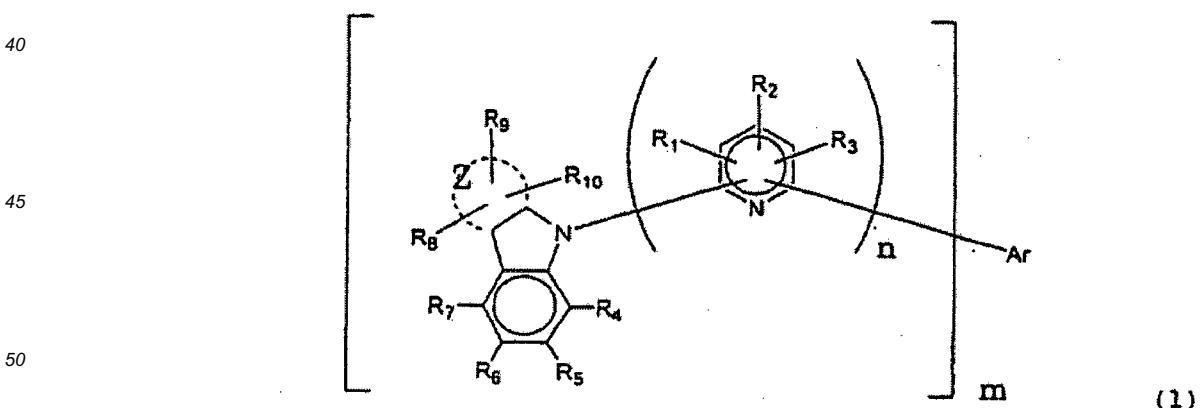

dans laquelle Ar représente un groupe hydrocarboné aromatique non substitué ; R₁ à R₁₀ peuvent être identiques ou différents l'un de l'autre et représentent chacun indépendamment un atome d'hydrogène, un atome de fluor, un groupe cyano, un groupe alkyle, ou un groupe hydrocarboné aromatique substitué ou non substitué et Z représente un cycle hétérocyclique aromatique à 6 éléments contenant un atome d'azote, dans laquelle m est égal à 1 et n est égal à 3.

3. Dispositif électroluminescent organique comprenant une paire d'électrodes et au moins une couche organique intercalée entre les électrodes, dans lequel au moins une des couche(s) organique(s) contient le composé présentant une structure de cycle pyridoindole selon la revendication 1 ou 2.

5 4. Dispositif électroluminescent organique selon la revendication 3, dans lequel la(les) couche(s) organique(s) comprend(comprennent) une couche de transport d'électrons, et le composé représenté par la formule générale (1) est présent dans la couche de transport d'électrons.

10 5. Dispositif électroluminescent organique selon la revendication 3, dans lequel la(les) couche(s) organique(s) comprend(comprennent) une couche de blocage de trous, et le composé représenté par la formule générale (1) est présent dans la couche de blocage de trous.

15 6. Dispositif électroluminescent organique selon la revendication 3, dans lequel la(les) couche(s) organique(s) comprend(comprennent) une couche émettrice, et le composé représenté par la formule générale (1) est présent dans la couche émettrice.

20 7. Dispositif électroluminescent organique selon la revendication 3, dans lequel la(les) couche(s) organique(s) comprend(comprennent) une couche d'injection d'électrons, et le composé représenté par la formule générale (1) est présent dans la couche d'injection d'électrons.

25

30

35

40

45

50

55

FIG. 1

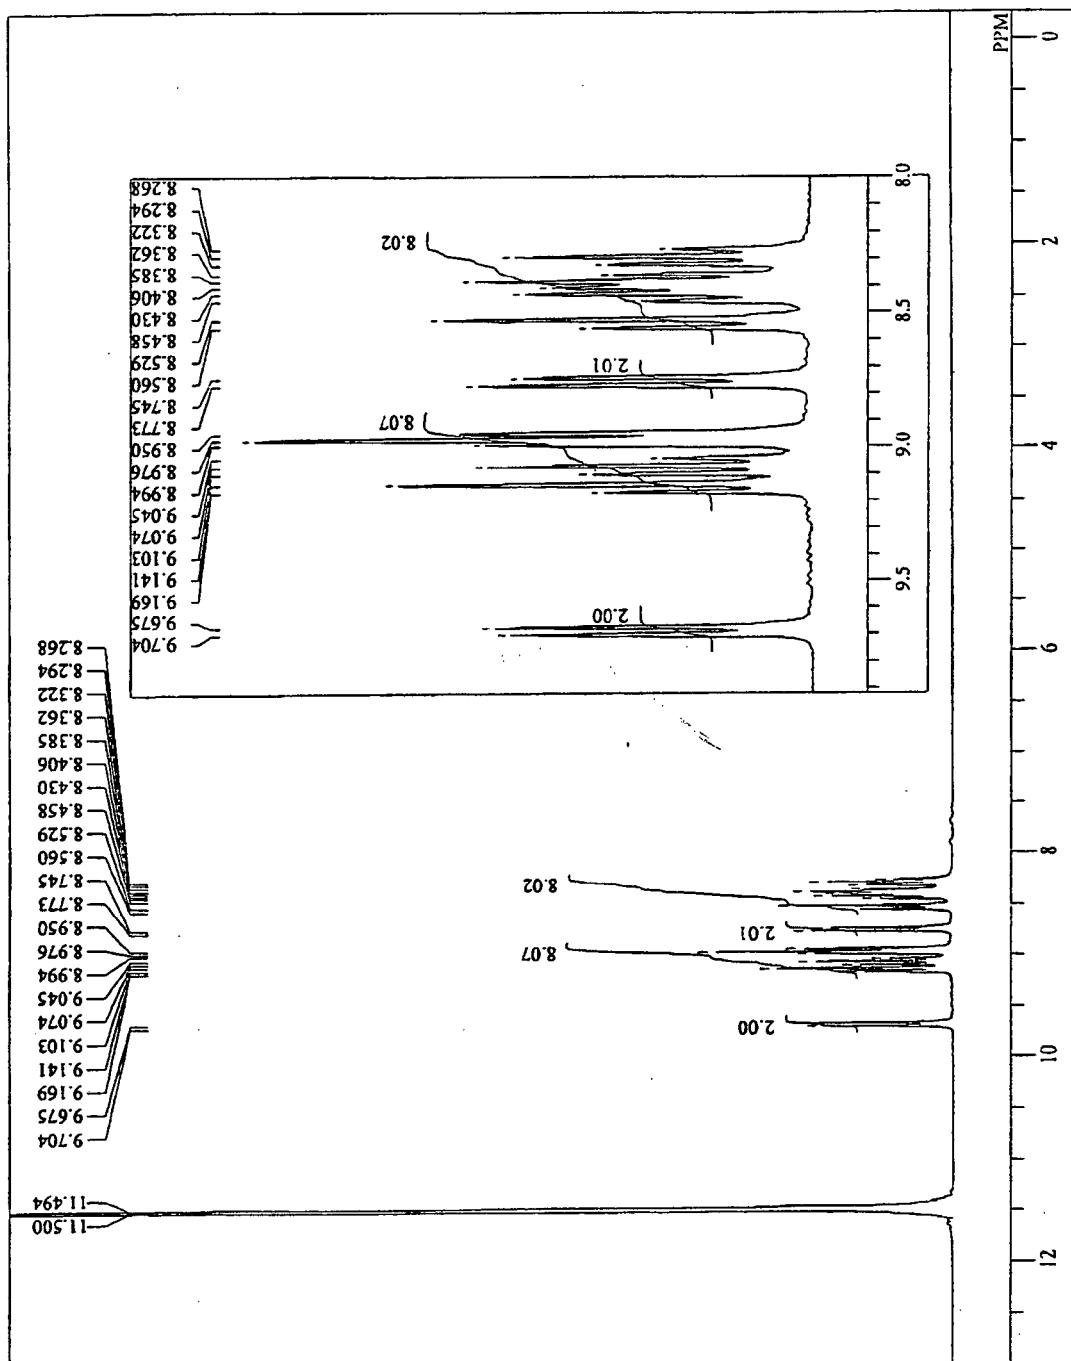


FIG. 2

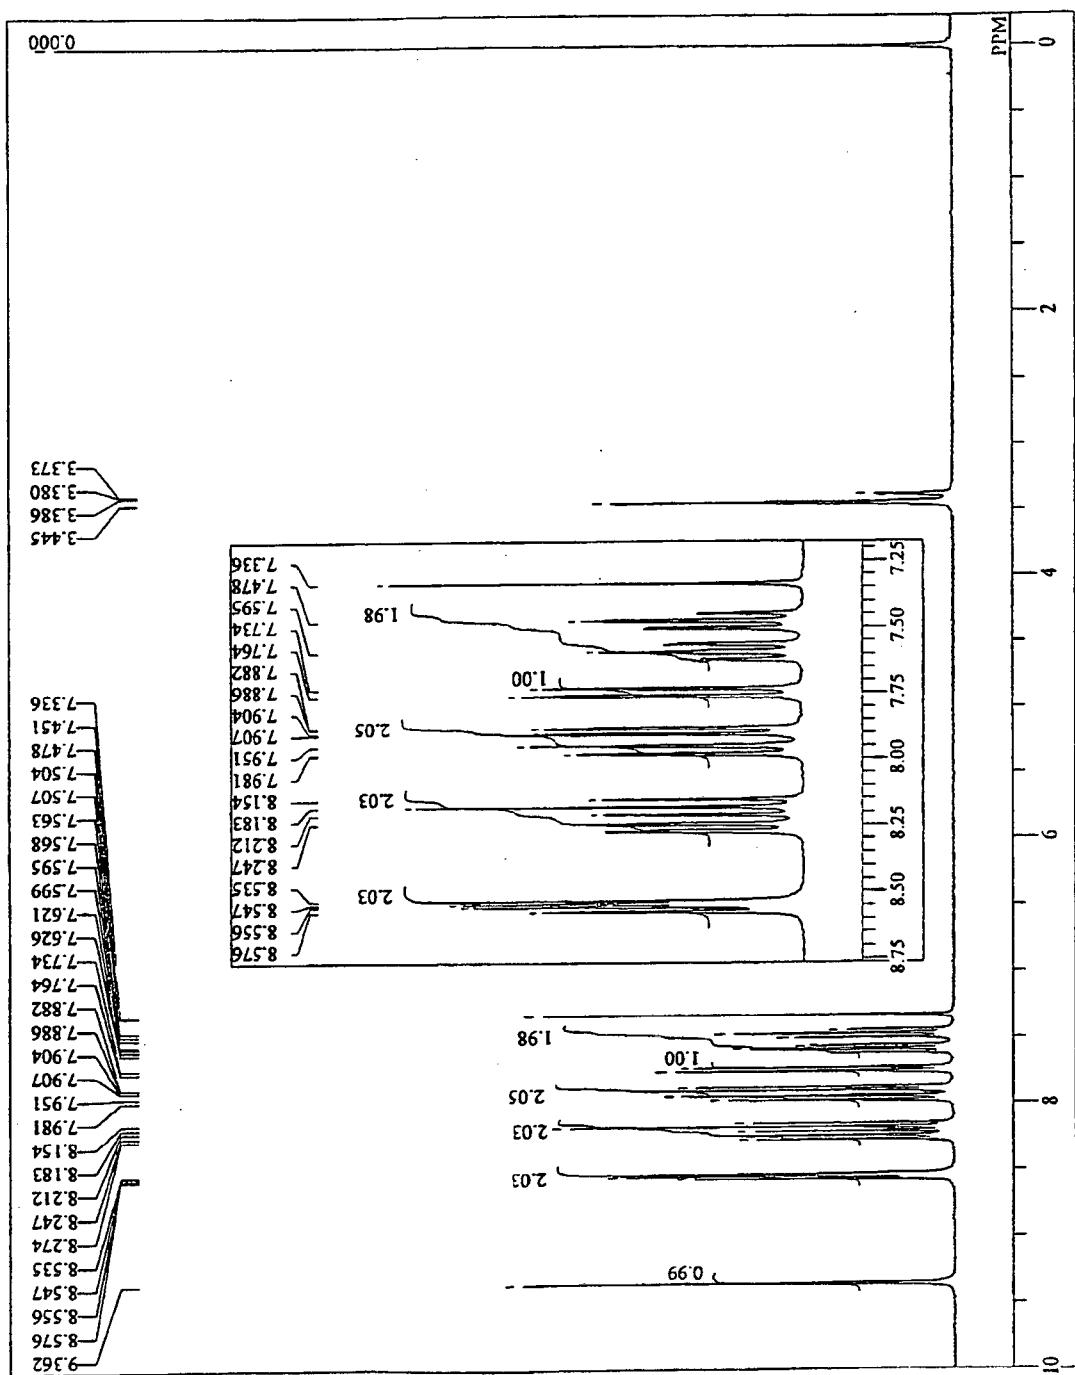


FIG. 3

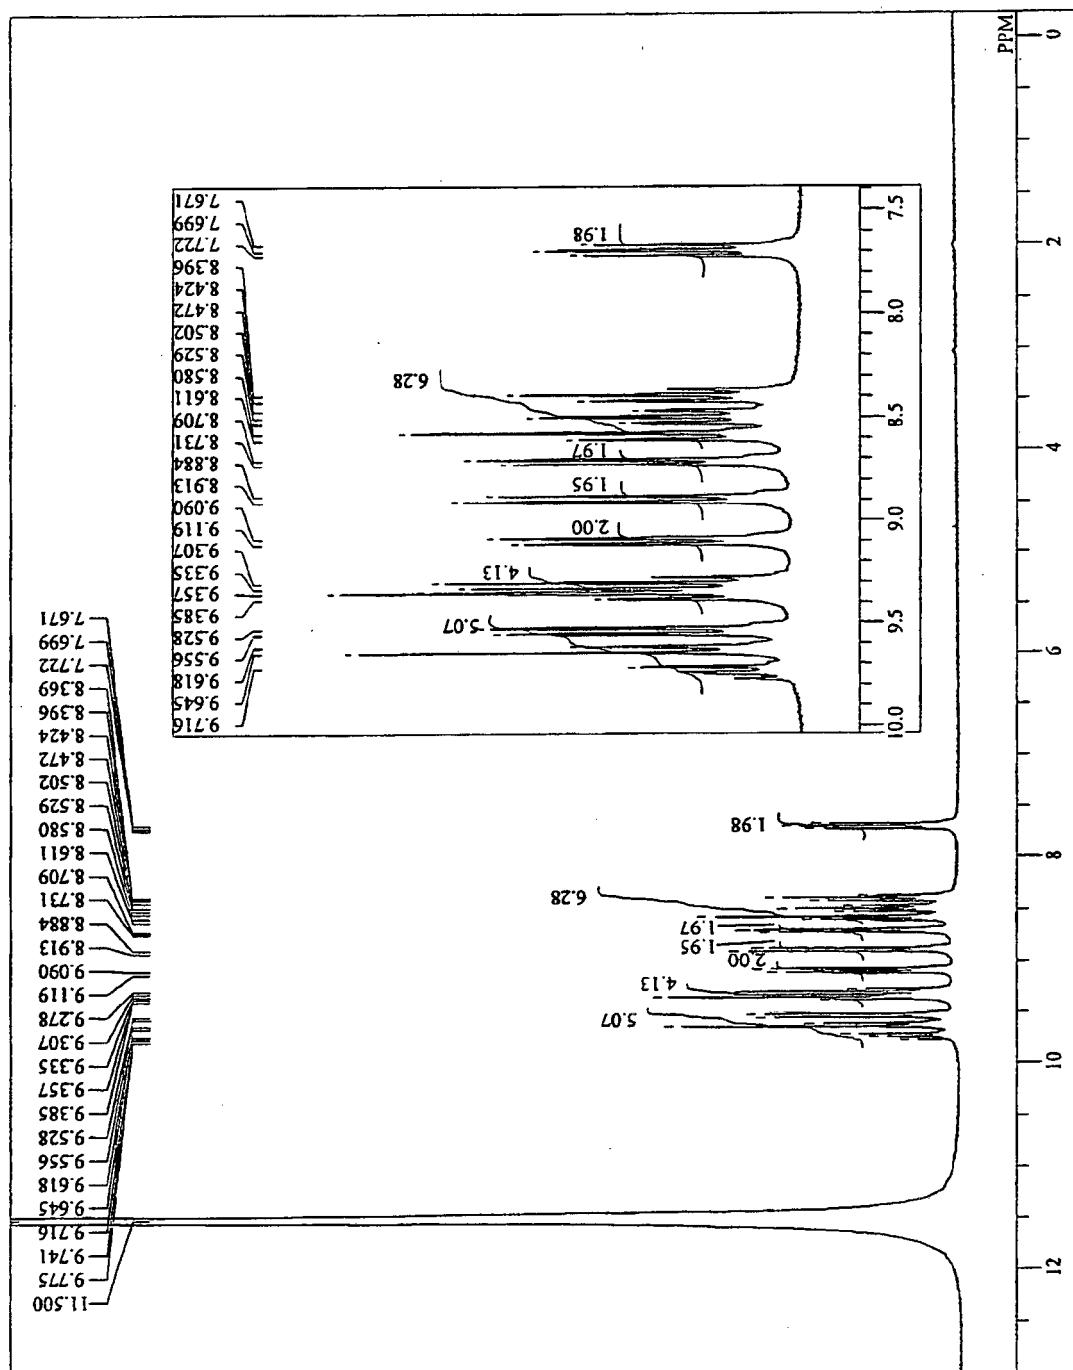


FIG. 4

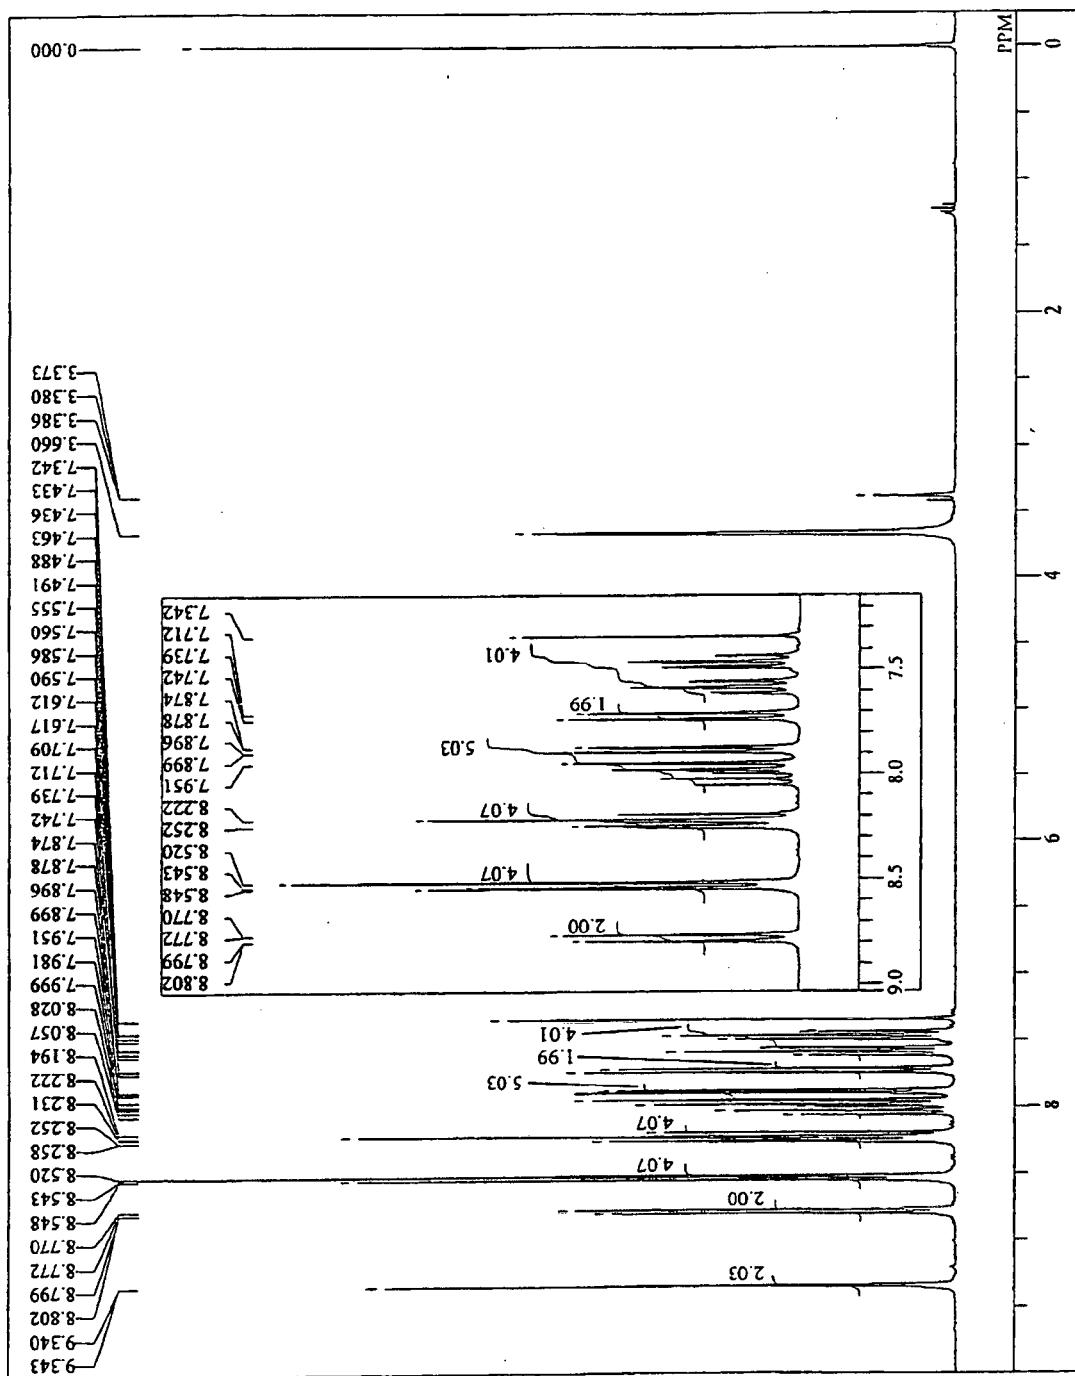


FIG. 5

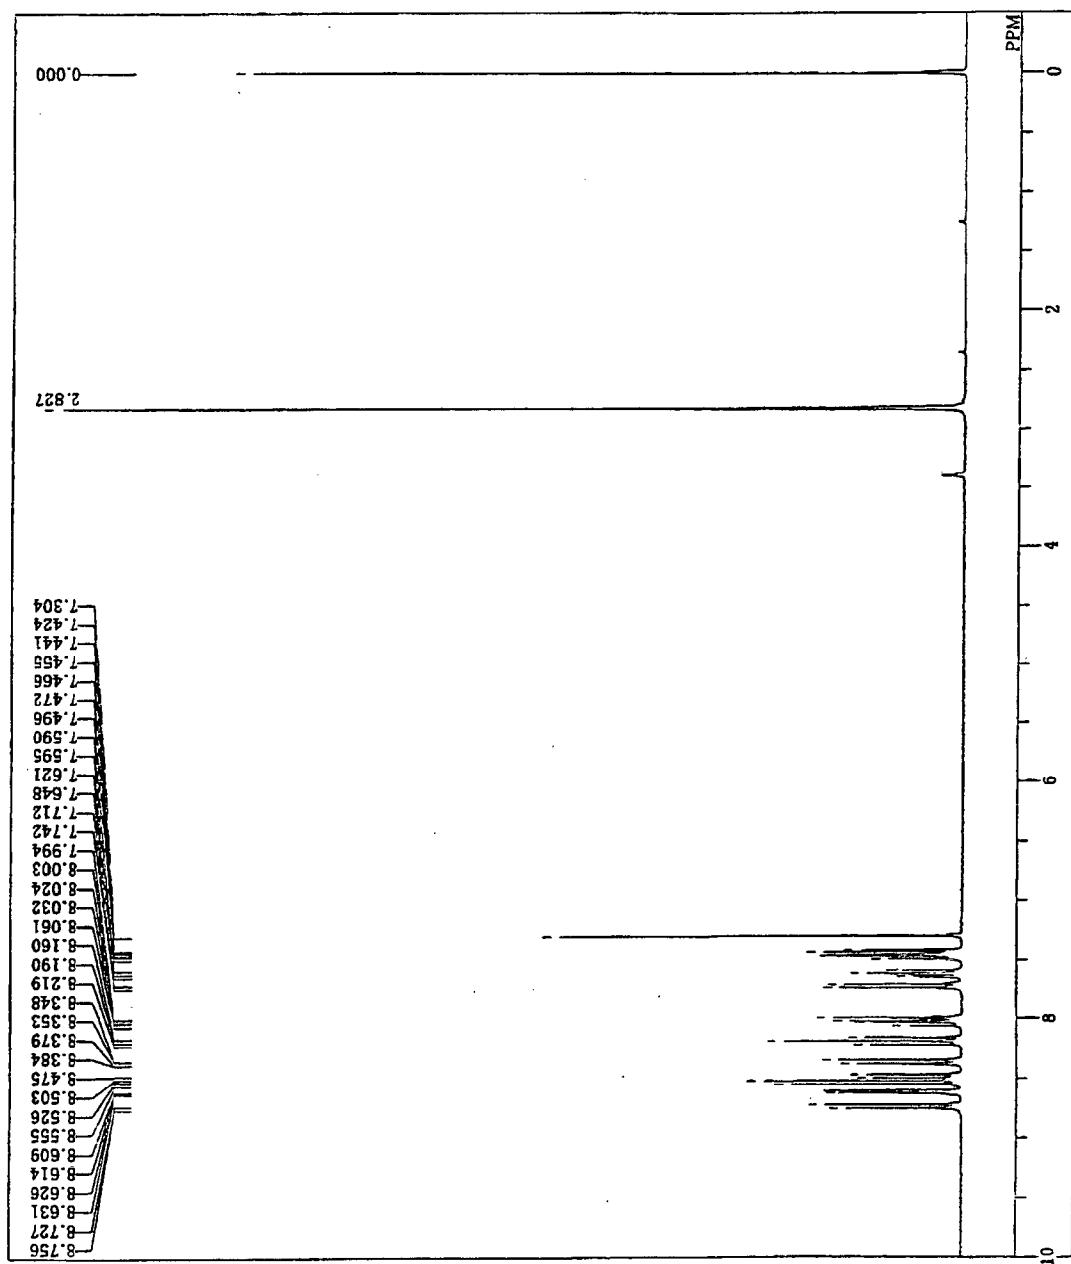


FIG. 6

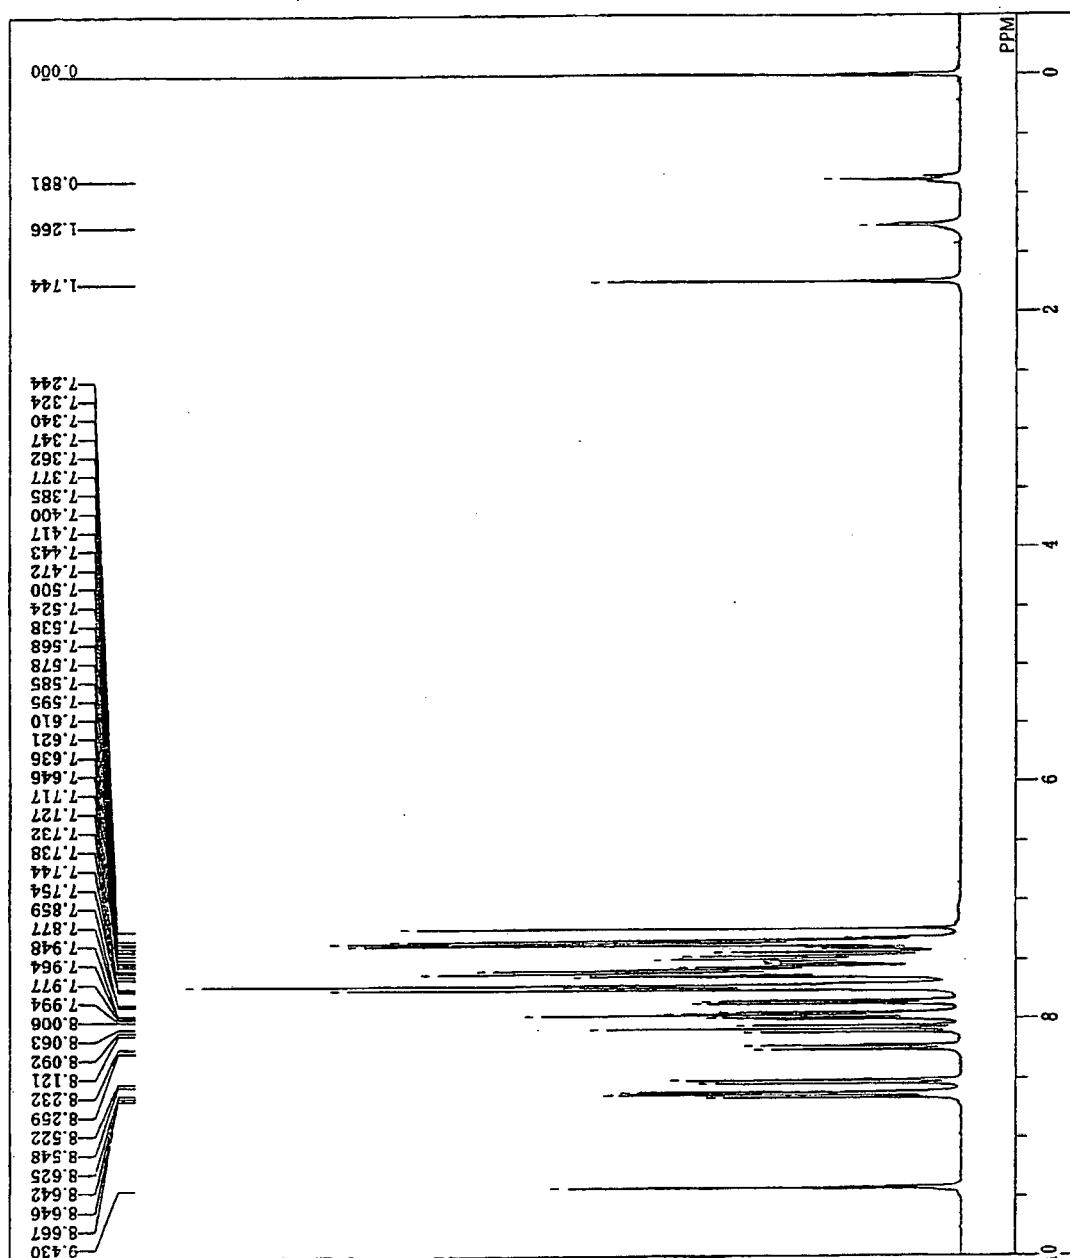


FIG. 7

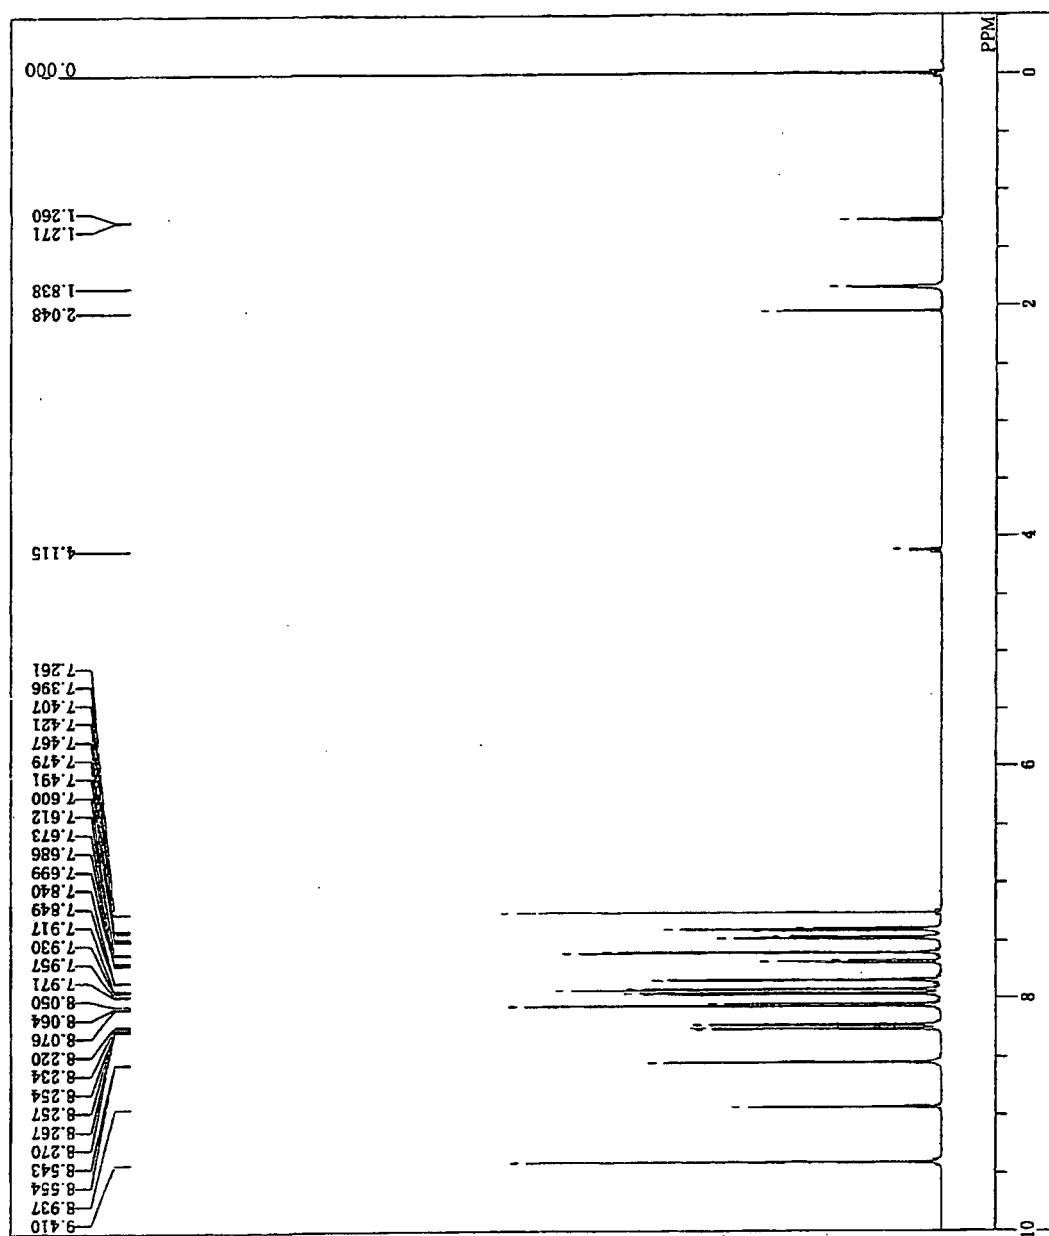


FIG. 8

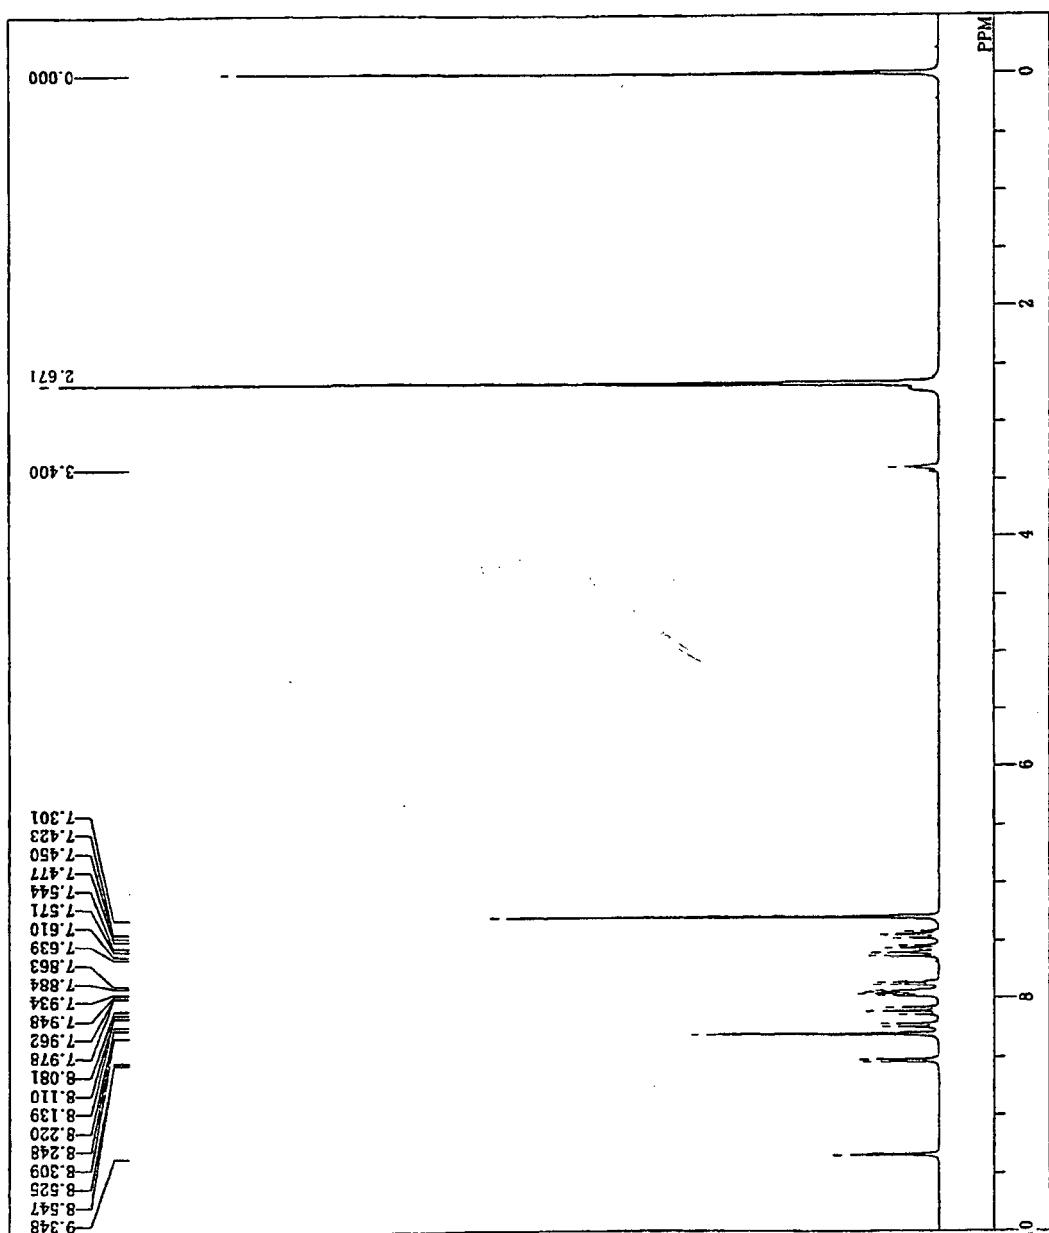


FIG. 9

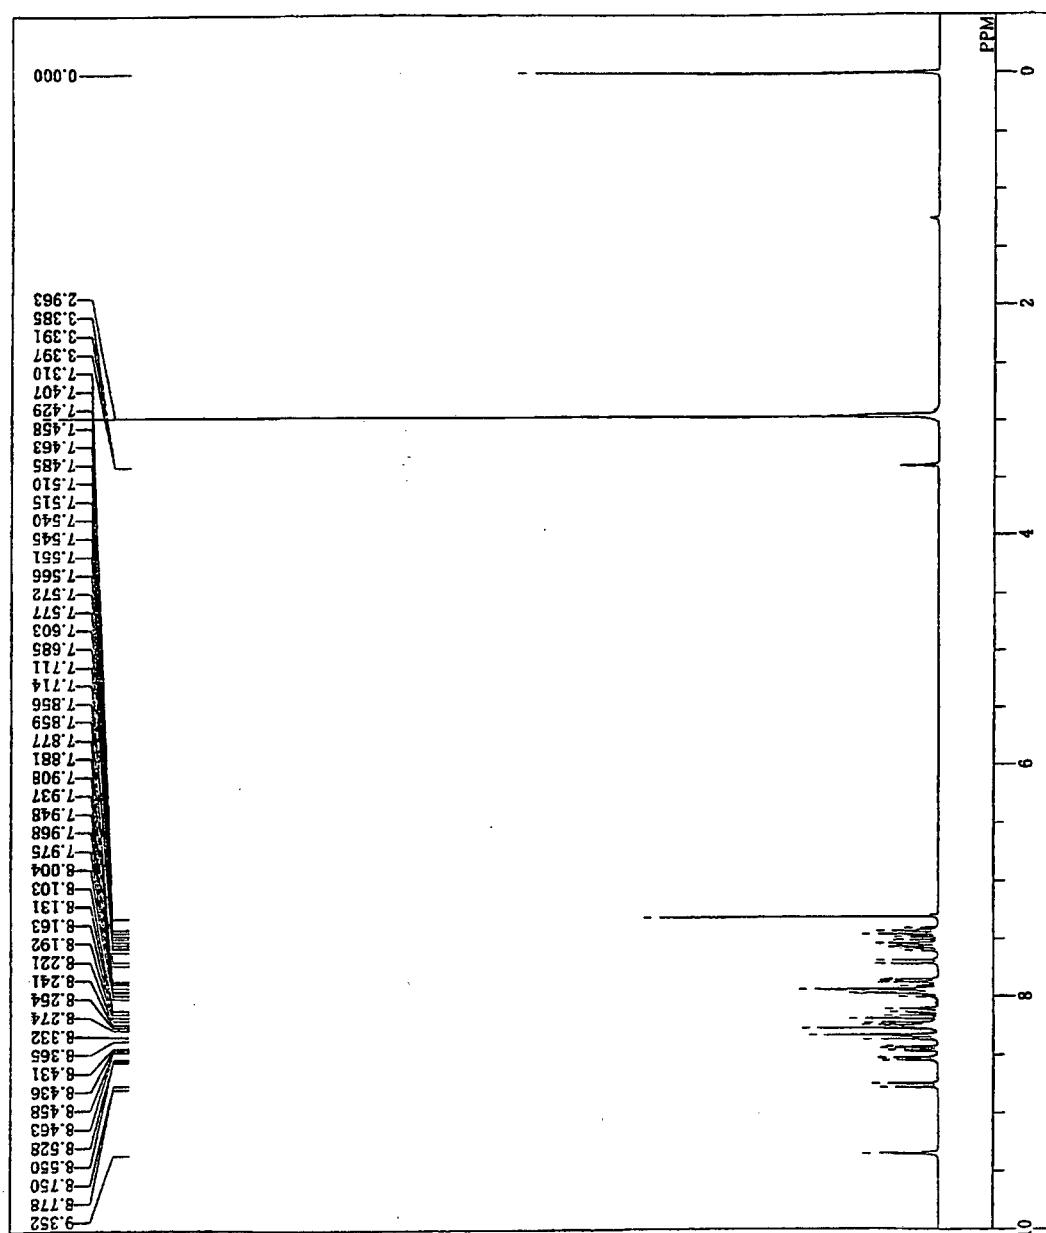


FIG. 10

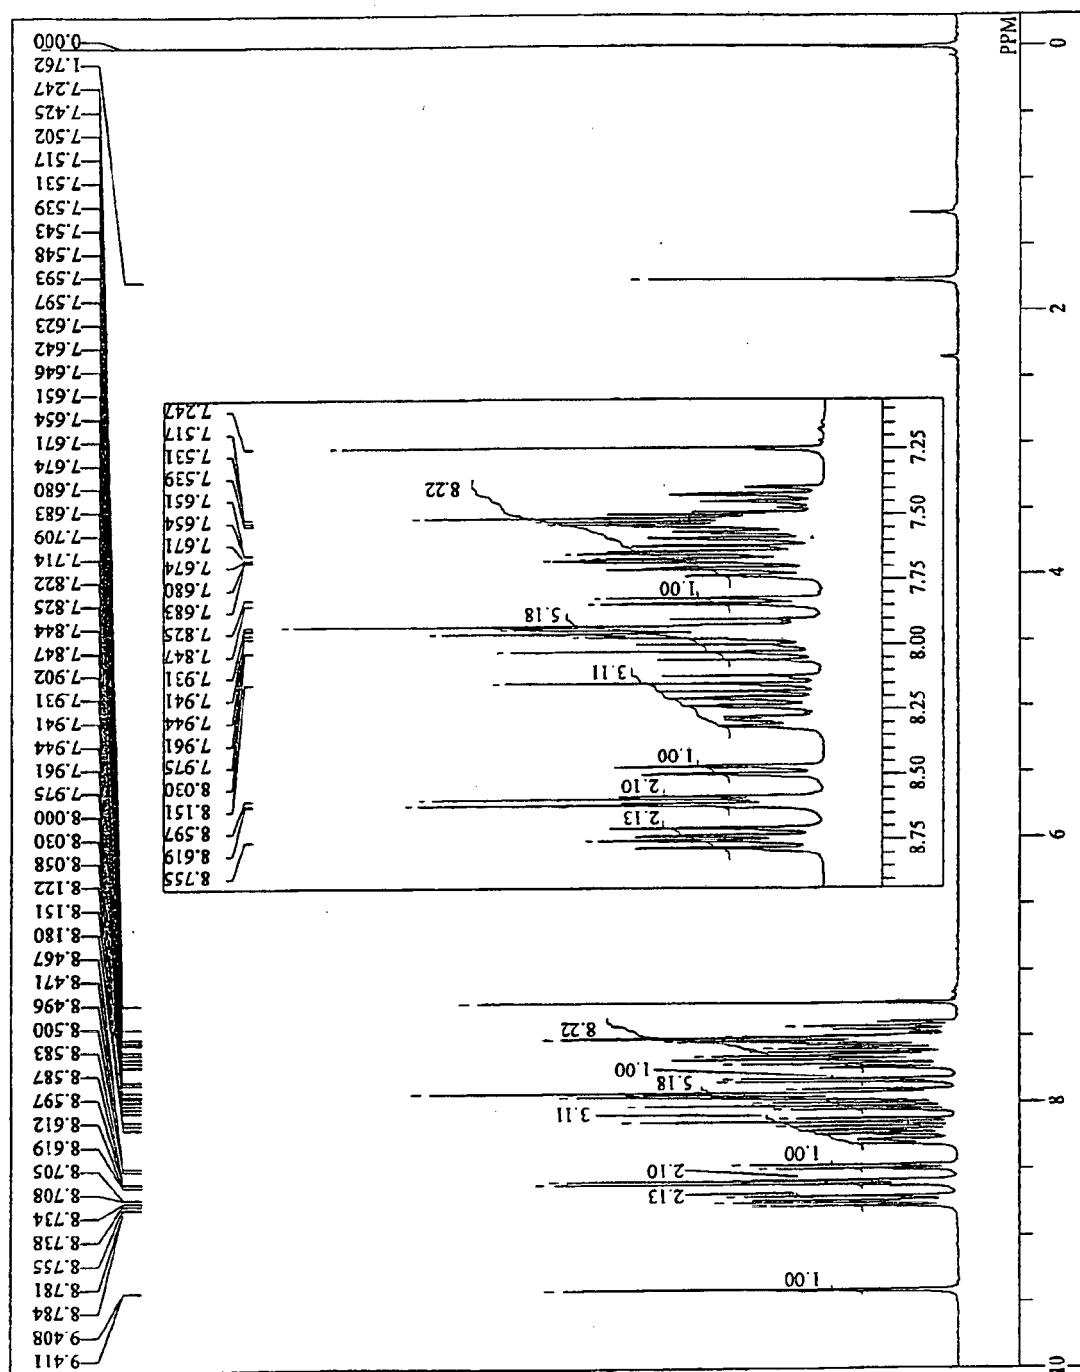


FIG. 11

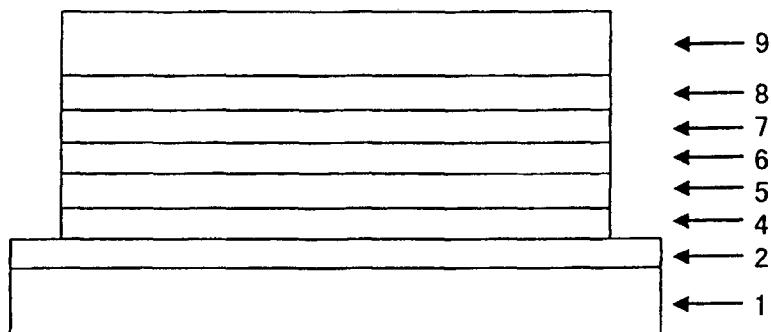


FIG. 12

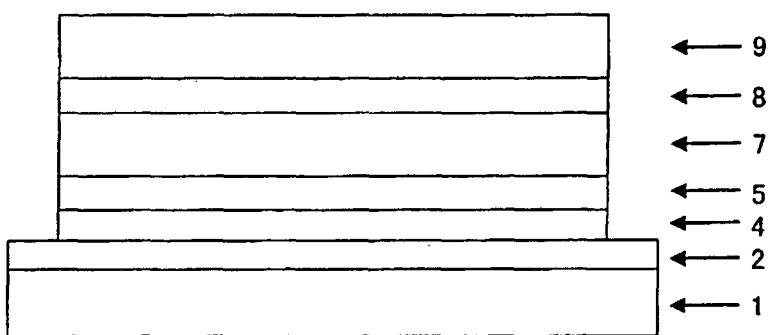


FIG. 13

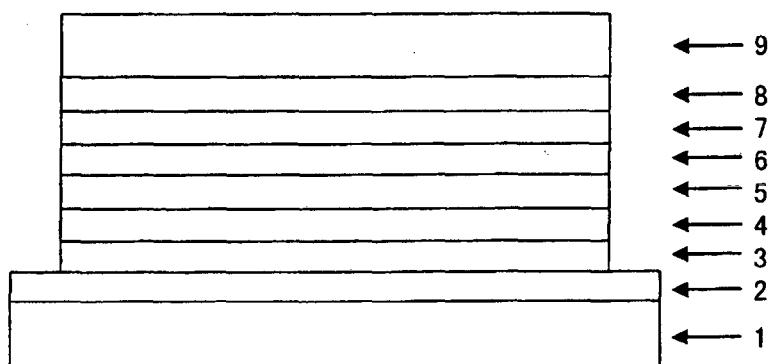


FIG. 14

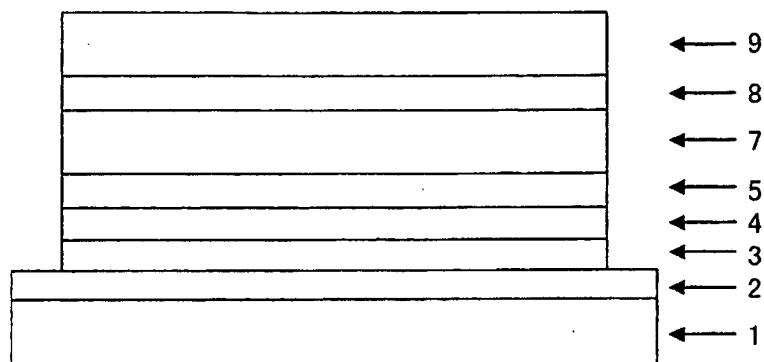


FIG. 15

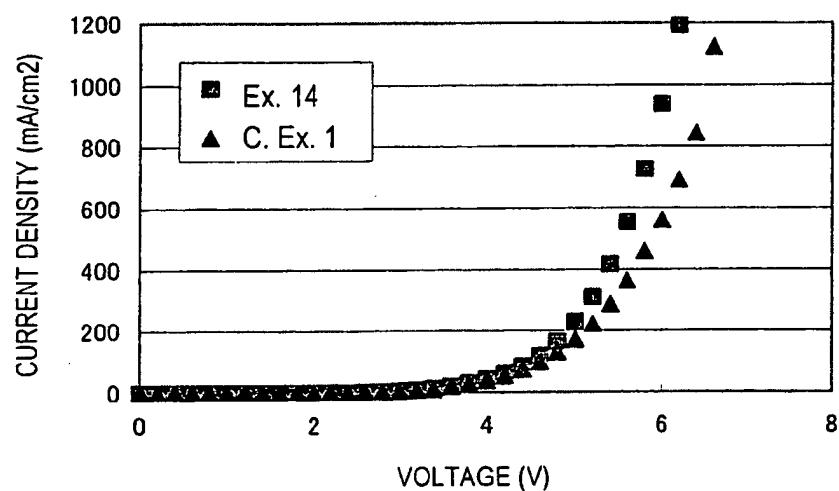


FIG. 16

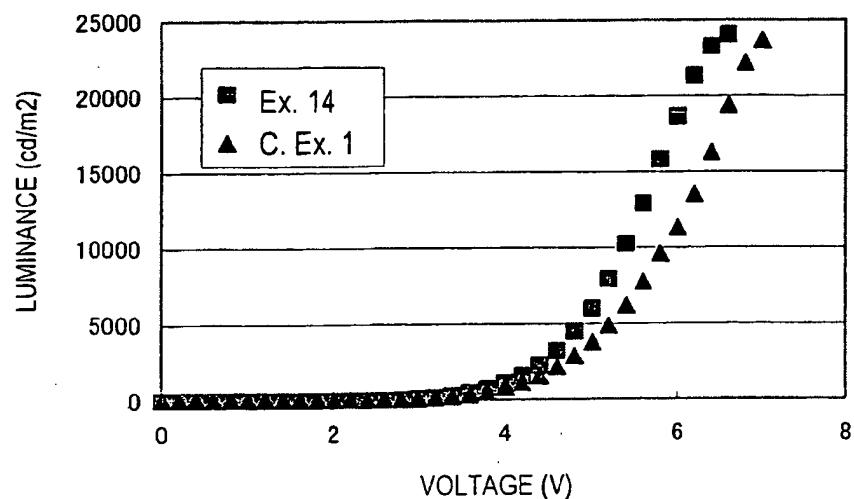


FIG. 17


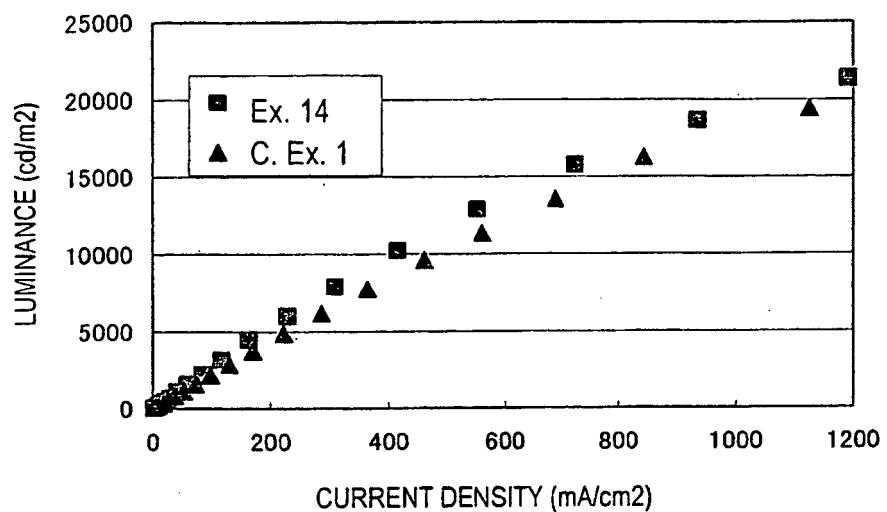


FIG. 18

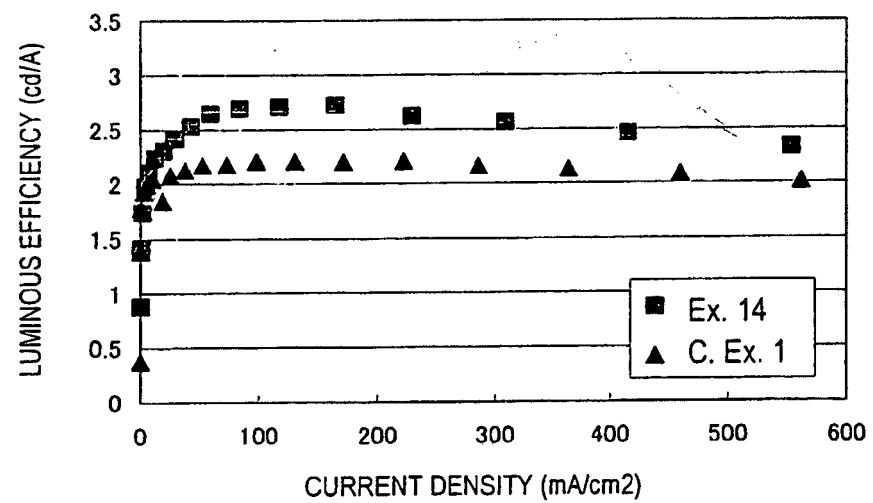

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP 8048656 A [0003]
- JP 3194657 B [0003]
- JP 2734341 B [0013]
- EP 1571193 A1 [0020]
- JP 2006156445 A [0021]

Non-patent literature cited in the description

- *Japan Society of Applied Physics Ninth Workshop Preprint*, 2001, 55-61 [0005]
- *Japan Society of Applied Physics Ninth Workshop Preprint*, 2001, 23-31 [0007]
- *Fiftieth Meeting of Japan Society of Applied Physics and Related Societies, 28p-A-6 Lecture Preprint*, 2003, 1413 [0015]
- *Japan Society of Applied Physics, Journal of Organic Molecules/Bioelectronics Section*, 2000, vol. 11 (1), 13-19 [0017]
- *J. Chem. Soc., Perkin Trans.*, 1999, vol. 1, 1505 [0039]

专利名称(译)	具有连接有取代的吡啶基的吡啶并吲哚环结构的化合物和有机电致发光元件		
公开(公告)号	EP2457912B1	公开(公告)日	2013-12-04
申请号	EP2012001215	申请日	2007-08-16
[标]申请(专利权)人(译)	保土谷化学工业株式会社		
申请(专利权)人(译)	HODOGAYA化学有限公司.		
当前申请(专利权)人(译)	HODOGAYA化学有限公司.		
[标]发明人	YOKOYAMA NORIMASA HAYASHI SHUICHI KUSANO SHIGERU		
发明人	YOKOYAMA, NORIMASA HAYASHI, SHUICHI KUSANO, SHIGERU		
IPC分类号	C09K11/06 C07D471/04 C07D519/00 H01L51/50 H01L51/00		
CPC分类号	C09K11/06 C07D471/04 C07D519/00 C09K2211/1007 C09K2211/1011 C09K2211/1029 C09K2211/1044 H01L51/0072 H01L51/0081 H01L51/5048 H01L51/5096 H05B33/14 Y10S428/917		
优先权	20062222890 2006-08-18 JP		
其他公开文献	EP2457912A1		
外部链接	Espacenet		

摘要(译)

[Chem. 1]

本发明提供具有优异特性的有机化合物作为具有高效率和高耐久性的有机EL器件的材料，并且通过使用该化合物提供具有高效率和高耐久性的有机EL器件。本发明涉及具有连接有取代吡啶基的吡啶并吲哚环结构的化合物，其由通式(1)表示；和包含一对电极和插入在电极之间的至少一个有机层的有机电致发光器件，其中至少一个有机层含有化合物：其中Ar代表取代或未取代的芳族烃基，取代的芳香族杂环基，或取代或未取代的稠合多环芳香族基团；R1至R10可以彼此相同或不同，各自独立地表示氢原子，氟原子，氰基，烷基或取代或未取代的芳族烃基，Z表示6元芳族杂环。含有一个氮原子，其中n是1，m是2或3.其中n是1，m是2或3。

