



US 20150073512A1

(19) **United States**(12) **Patent Application Publication****Libbus et al.**(10) **Pub. No.: US 2015/0073512 A1**(43) **Pub. Date: Mar. 12, 2015**

(54) **IMPLANTABLE DEVICE FOR EVALUATING
AUTONOMIC CARDIOVASCULAR DRIVE IN
A PATIENT SUFFERING FROM CHRONIC
CARDIAC DYSFUNCTION**

(71) Applicant: **CYBERONICS, INC.**, Houston, TX
(US)

(72) Inventors: **Imad Libbus**, St. Paul, MN (US); **Badri
Amurthur**, Los Gatos, CA (US); **Bruce
H. KenKnight**, Maple Grove, MN (US)

(21) Appl. No.: **14/540,337**

(22) Filed: **Nov. 13, 2014**

Related U.S. Application Data

(63) Continuation of application No. 13/314,133, filed on
Dec. 7, 2011, now Pat. No. 8,918,190.

Publication Classification

(51) **Int. Cl.**
A61N 1/36 (2006.01)
A61B 5/00 (2006.01)
A61B 5/02 (2006.01)

(52) **U.S. Cl.**
CPC *A61N 1/36167* (2013.01); *A61B 5/02*
(2013.01); *A61B 5/4836* (2013.01); *A61N*
1/36053 (2013.01); *A61N 1/36114* (2013.01)
USPC **607/72**

(57) **ABSTRACT**

An implantable device (11) for evaluating autonomic cardiovascular drive in a patient (10) suffering from chronic cardiac dysfunction is provided. A stimulation therapy lead (13) includes helical electrodes (14) configured to conform to an outer diameter of a cervical vagus nerve sheath, and a set of connector pins (28) electrically connected to the helical electrodes (14). A neurostimulator (12) includes an electrical receptacle (25) into which the connector pins (28) are securely and electrically coupled. The neurostimulator (12) also includes a pulse generator configured to therapeutically stimulate the vagus nerve through the helical electrodes (14) in alternating cycles of stimuli application and stimuli inhibition (90) that are tuned to both efferently activate the heart's intrinsic nervous system and afferently activate the patient's central reflexes by triggering bi-directional action potentials. The neurostimulator (12) includes a recordable memory (29) storing a baseline heart rate. The neurostimulator (12) includes an integrated leadless heart rate sensor (31) configured to continually monitor heart rate in light of the baseline heart rate.

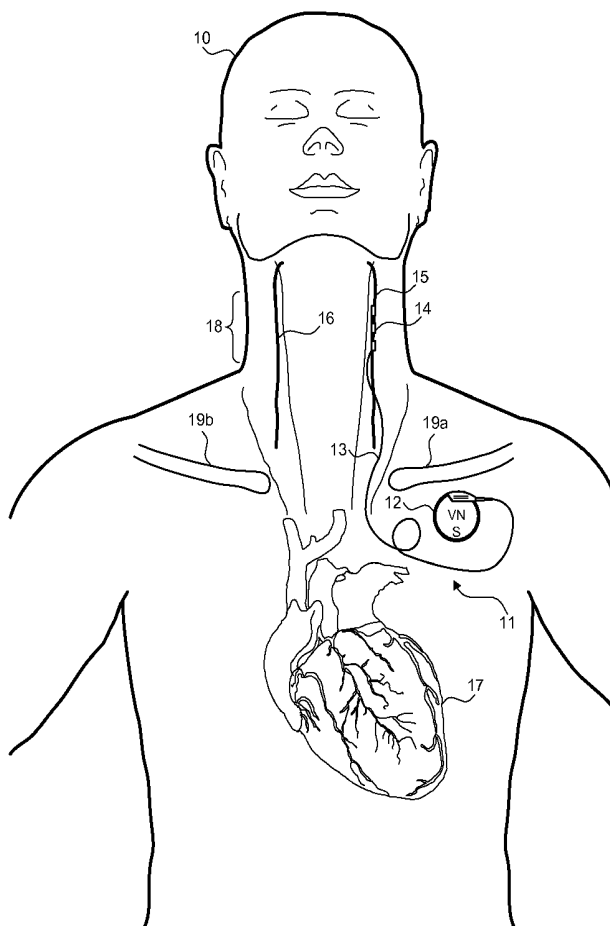


Fig. 1.

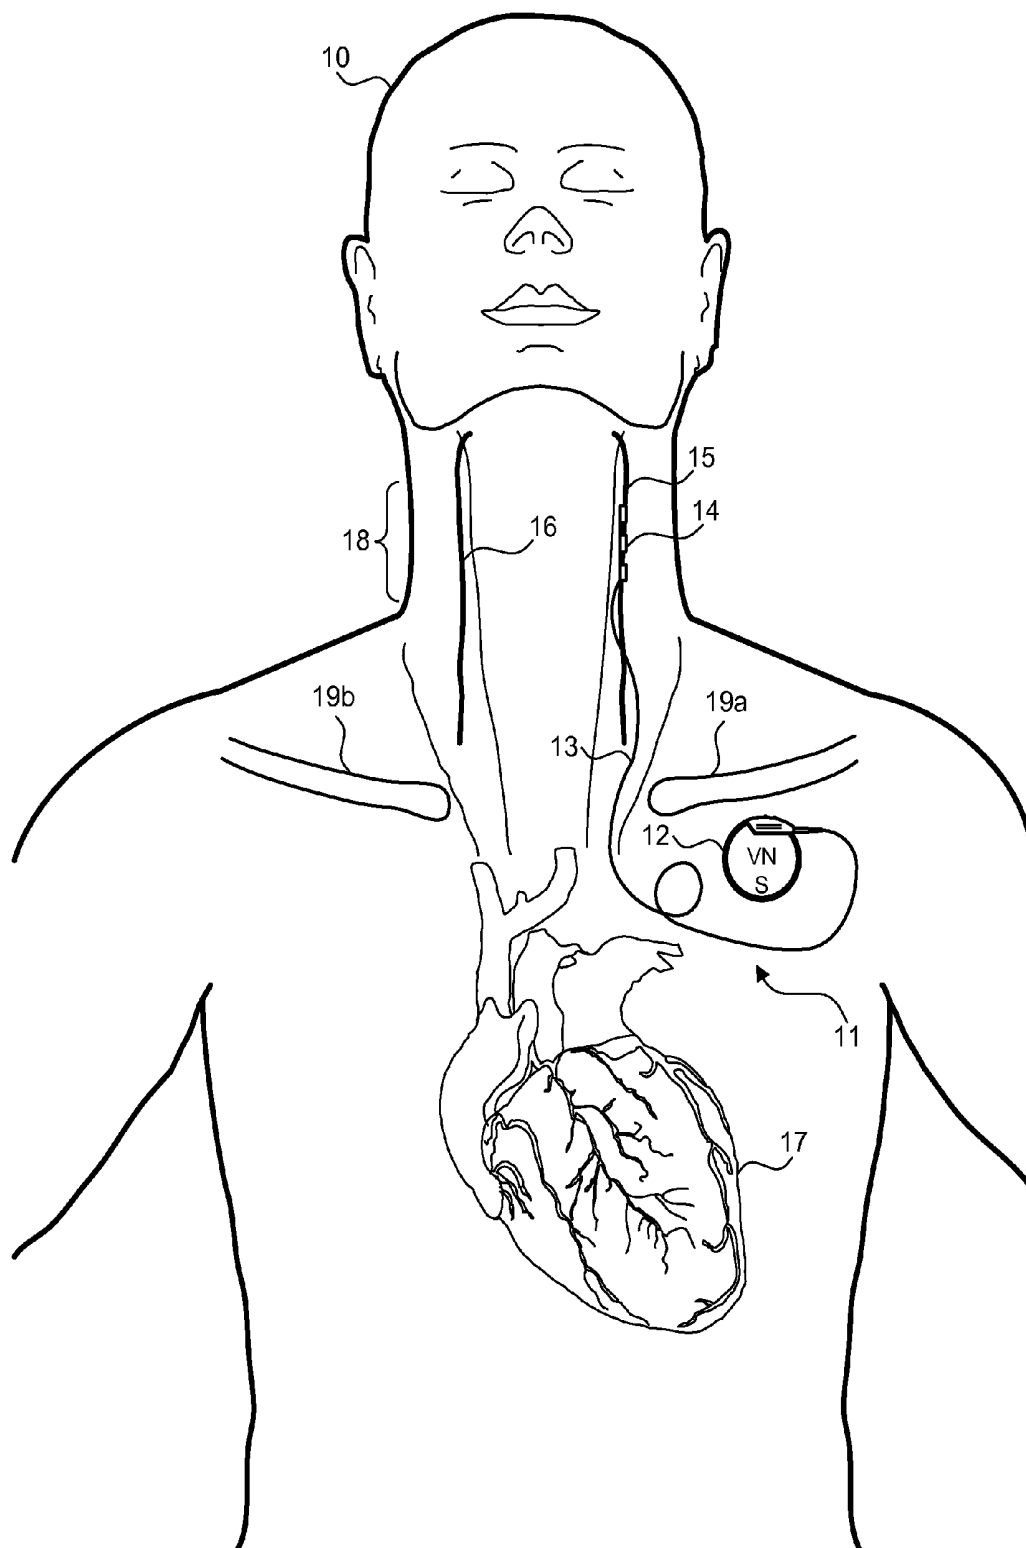


Fig. 2.

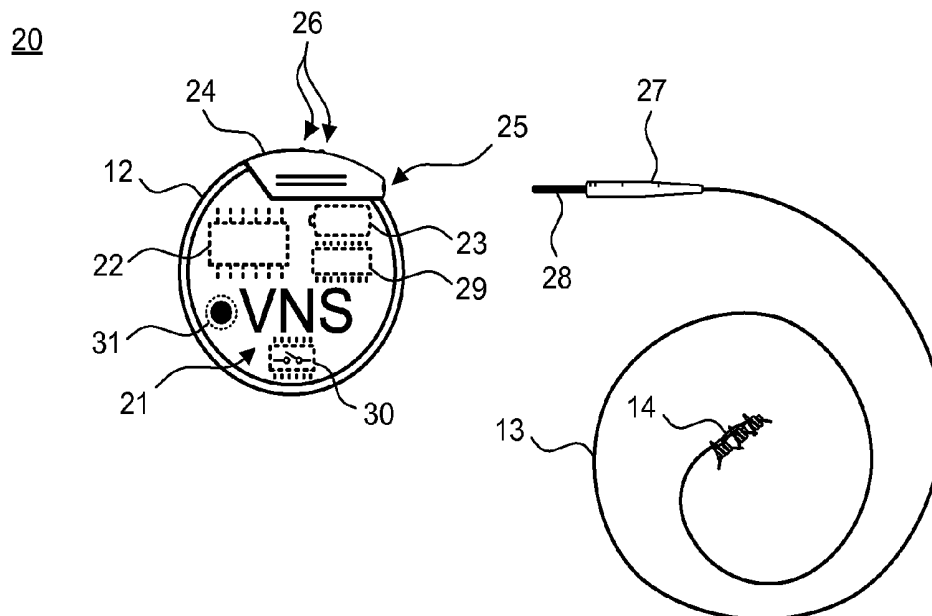


Fig. 3.

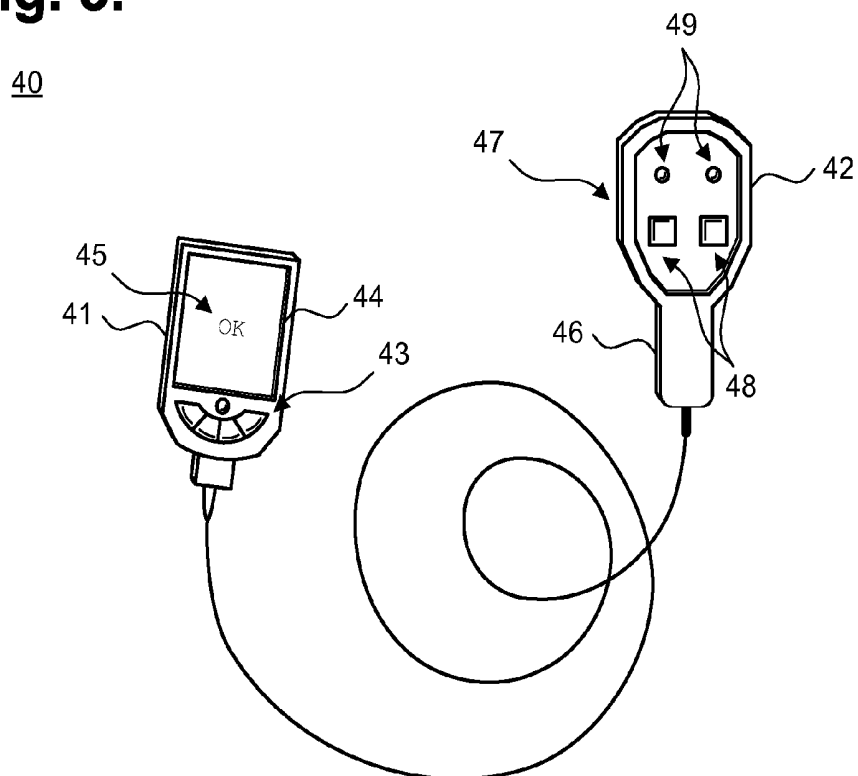


Fig. 4.

50

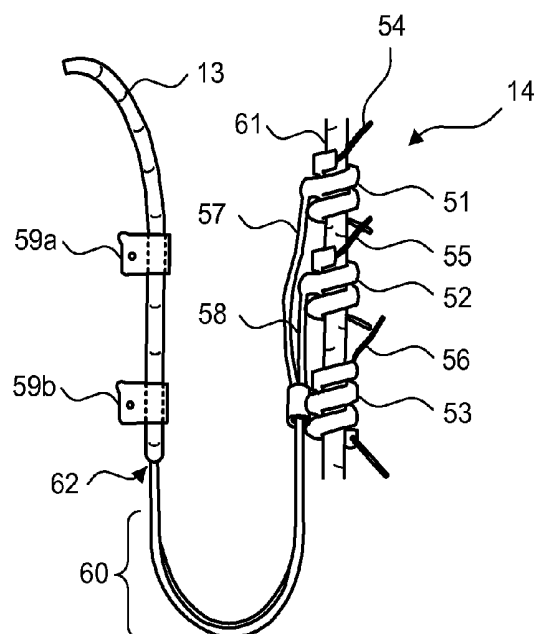


Fig. 5.

70

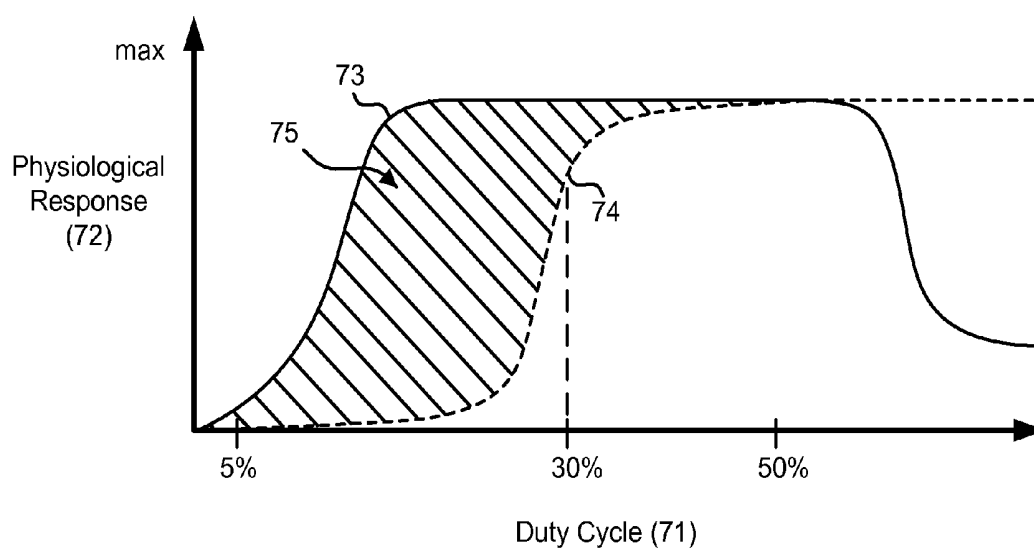


Fig. 6.

80


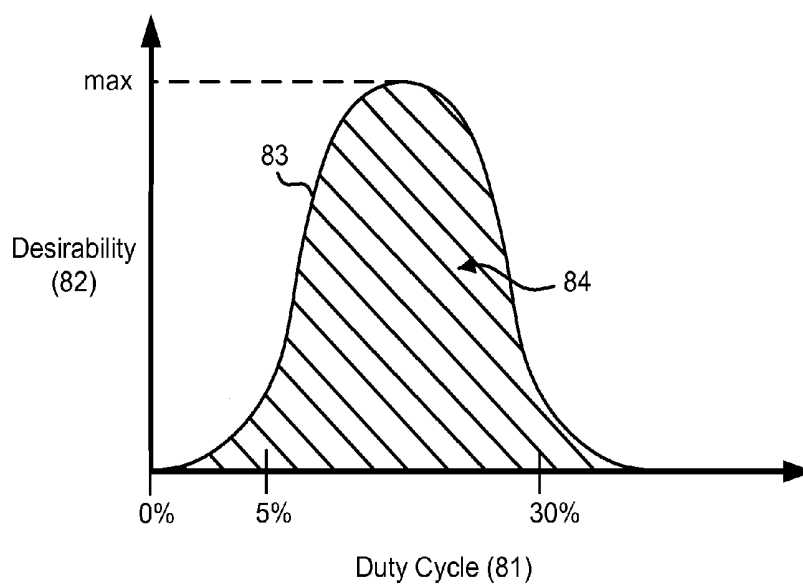


Fig. 7.

90

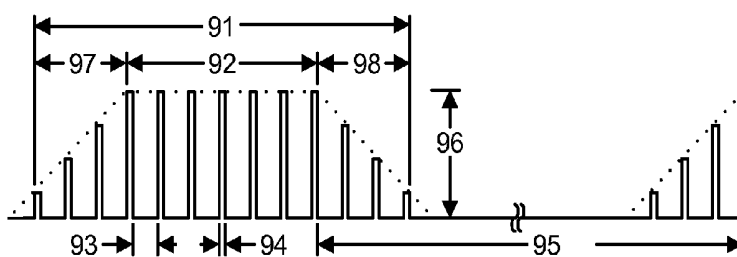

**IMPLANTABLE DEVICE FOR EVALUATING
AUTONOMIC CARDIOVASCULAR DRIVE IN
A PATIENT SUFFERING FROM CHRONIC
CARDIAC DYSFUNCTION**

**CROSS REFERENCE TO RELATED
APPLICATION**

[0001] This patent application is a continuation of U.S. patent application Ser. No. 13/314,133, filed Dec. 7, 2011, pending, the priority of which is claimed and the disclosure of which is incorporated by reference in its entirety.

FIELD

[0002] This application relates in general to chronic cardiac dysfunction therapy and, in particular, to an implantable device for evaluating autonomic cardiovascular drive in a patient suffering from chronic cardiac dysfunction.

BACKGROUND OF THE INVENTION

[0003] Congestive heart failure (CHF) is a progressive and physically debilitating chronic medical condition in which the heart is unable to supply sufficient blood flow to meet the body's needs. CHF is a form of chronic cardiac dysfunction that affects nearly five million people each year in the United States alone and continues to be the leading cause of hospitalization for persons over the age of 65. CHF requires seeking timely medical attention.

[0004] Pathologically, CHF is characterized by an elevated neuroexcitatory state that is accompanied by impaired arterial and cardiopulmonary baroreflex function and reduced vagal activity. CHF is initiated by cardiac dysfunction, which triggers compensatory activations of the sympathoadrenal (sympathetic) nervous and the renin-angiotensin-aldosterone hormonal systems. Initially, these two mechanisms help the heart to compensate for deteriorating pumping function. Over time, however, overdriven sympathetic activation and increased heart rate promote progressive left ventricular dysfunction and remodeling, and ultimately foretell poor long term patient outcome.

[0005] Anatomically, the heart is innervated by sympathetic and parasympathetic nerves originating through the vagus nerve and arising from the body's cervical and upper thoracic regions. The sympathetic and parasympathetic nervous systems, though separate aspects of the autonomous nervous system, dynamically interact thorough signals partially modulated by cAMP and cGMP secondary messengers. When in balance, each nervous system can presynaptically inhibit the activation of the other nervous system's nerve traffic. During CHF, however, the body suffers an autonomic imbalance of these two nervous systems, which leads to cardiac arrhythmogenesis, progressively worsening cardiac function, and eventual mortality.

[0006] Currently, the standard of care for managing chronic cardiac dysfunction, such as CHF, includes prescribing medication and mandating changes to a patient's diet and lifestyle, to counteract cardiac dysfunction. These medications include diuretics, angiotensin-converting enzyme inhibitors, angiotensin receptor blockers, beta-blockers, and aldosterone antagonists, which cause vasodilation, reduce secretion of vasopressin, reduce production and secretion of aldosterone, lower arteriolar resistance, increase venous capacity, increase cardiac output, index and volume, lower renovascular resistance, and lead to increased natriuresis, among other effects.

The effectiveness of these medications is palliative, but not curative. Moreover, patients often suffer side effects and comorbidities, such as pulmonary edema, sleep apnea, and myocardial ischemia. Re-titration of drug therapy following crisis may be required, and neither continued drug efficacy nor patient survival are assured.

[0007] More recently, cardiac resynchronization therapy (CRT) has become available to patients presenting with impairment of systolic function, such as is caused by an intraventricular conduction delay or bundle-branch block that forces the heart's ventricles to contract dyssynchronously. Typically, implantable CRT devices use a set of biventricular leads to stimulate both the ventricular septum and the lateral wall of the left ventricle. CRT restores the synchronous beating of the heart through coordinated pacing of both ventricles. However, CRT is only helpful for treating systolic dysfunction and is not indicated for patients presenting with preserved ejection fraction. Thus, CRT is limited to patients exhibiting a wide QRS complex and mechanical dyssynchrony, whereas patients presenting with systolic dysfunction or impaired ejection fraction and a narrow QRS have limited therapeutic options.

[0008] Medication and CRT are only partial solutions to managing chronic cardiac dysfunction, and neural stimulation has been proposed as an alternative way to treat chronic cardiac dysfunction conditions, such as CHF, by correcting the underlying autonomic imbalance of the sympathetic and parasympathetic nervous systems. The heart contains an intrinsic nervous system that includes spatially-distributed sensory afferent neurons, interconnecting local circuit neurons, and motor adrenergic and cholinergic efferent neurons. Peripheral cell stations of these neurons activate under the tonic influence of spinal cord and medullary reflexes and circulating catecholamines to influence overlapping regions of the heart. Suppression of excessive neural activation by electrically modulating select vagal nerve fibers may help improve the heart's mechanical function as well as to reduce the heart's intrinsic nervous system's propensity to induce atrial arrhythmias during autonomic imbalance.

[0009] Electrical vagus nerve stimulation (VNS) is currently used clinically for the treatment of drug-refractory epilepsy and depression, and is under investigation for applications in Alzheimer's disease, anxiety, heart failure, inflammatory disease, and obesity. In particular, vagus nerve stimulation has been proposed as a long-term therapy for the treatment of CHF, as described in Sabbah et al., "Vagus Nerve Stimulation in Experimental Heart Failure," *Heart Fail. Rev.*, 16:171-178 (2011), the disclosure of which is incorporated by reference. The Sabbah paper discusses canine studies using a vagus stimulation device, manufactured by BioControl Medical Ltd., Yehud, Israel, which includes a signal generator, right ventricular sensing lead, and right vagus nerve cuff stimulation lead. The sensing leads enable stimulation of the right vagus nerve to be synchronized to the cardiac cycle through feedback on-demand heart rate control. A bipolar nerve cuff electrode was surgically implanted on the right vagus nerve at the mid-cervical position. Electrical stimulation to the right cervical vagus nerve was delivered only when heart rate increased beyond a preset level to reduce basal heart rate by ten percent. Self-titration using "magnet mode" was impracticable in light of the test subject, here canine. Stimulation was provided at an impulse rate and intensity intended to keep the heart rate within a desired range by preferential stimulation of efferent nerve fibers leading to the heart while

blocking afferent neural impulses to the brain. An asymmetric bi-polar multi-contact cuff electrode was employed to provide cathodic induction of action potentials while simultaneously applying asymmetric anodal blocks that were expected to lead to preferential, but not exclusive, activation of vagal efferent fibers. Although effective in restoring baroreflex sensitivity and, in the canine model, significantly increasing left ventricular ejection fraction and decreasing left ventricular end diastolic and end systolic volumes, restoration of autonomic balance was left unaddressed.

[0010] Other uses of electrical nerve stimulation for therapeutic treatment of various physiological conditions are described. For instance, U.S. Pat. No. 6,600,954, issued Jul. 29, 2003 to Cohen et al. discloses a method and apparatus for selective control of nerve fibers. At least one electrode device is applied to a nerve bundle capable, upon activation, of generating unidirectional action potentials to be propagated through both small diameter and large diameter sensory fibers in the nerve bundle, and away from the central nervous system. The device is particularly useful for reducing pain sensations, such as propagating through the legs and arms.

[0011] U.S. Pat. No. 6,684,105, issued Jan. 27, 2004 to Cohen et al. discloses an apparatus for treatment of disorders by unidirectional nerve stimulation. An apparatus for treating a specific condition includes a set of one or more electrode devices that are applied to selected sites of the central or peripheral nervous system of the patient. For some applications, a signal is applied to a nerve, such as the vagus nerve, to stimulate efferent fibers and treat motility disorders, or to a portion of the vagus nerve innervating the stomach to produce a sensation of satiety or hunger. For other applications, a signal is applied to the vagus nerve to modulate electrical activity in the brain and rouse a comatose patient, or to treat epilepsy and involuntary movement disorders.

[0012] U.S. Pat. No. 7,123,961, issued Oct. 17, 2006 to Kroll et al. discloses stimulation of autonomic nerves. An autonomic nerve is stimulated to affect cardiac function using a stimulation device in electrical communication with the heart by way of three leads suitable for delivering multi-chamber stimulation and shock therapy. In addition, the device includes a fourth lead having three electrodes positioned in or near the heart, or near an autonomic nerve remote from the heart. Power is delivered to the electrodes at a set power level. The power is delivered at a reduced level if cardiac function was affected.

[0013] U.S. Pat. No. 7,225,017, issued May 29, 2007 to Shelchuk discloses terminating ventricular tachycardia. Cardioversion stimulation is delivered upon detecting a ventricular tachycardia. A stimulation pulse is delivered to a lead having one or more electrodes positioned proximate to a parasympathetic pathway. Optionally, the stimulation pulse is delivered post inspiration or during a refractory period to cause a release of acetylcholine.

[0014] U.S. Pat. No. 7,277,761, issued Oct. 2, 2007 to Shelchuk discloses vagal stimulation for improving cardiac function in heart failure or CHF patients. An autonomic nerve is stimulated to affect cardiac function using a stimulation device in electrical communication with the heart by way of three leads suitable for delivering multi-chamber stimulation and shock therapy. In addition, the device includes a fourth lead having three electrodes positioned in or near the heart, or near an autonomic nerve remote from the heart. A need for increased cardiac output is detected and a stimulation pulse is delivered through an electrode, for example, proximate to the

left vagosympathetic trunk or branch to thereby stimulate a parasympathetic nerve. If the stimulation has caused sufficient increase in cardiac output, ventricular pacing may then be initiated at an appropriate reduced rate.

[0015] U.S. Pat. No. 7,295,881, issued Nov. 13, 2007 to Cohen et al. discloses nerve branch-specific action potential activation, inhibition and monitoring. Two preferably unidirectional electrode configurations flank a nerve junction from which a preselected nerve branch issues, proximally and distally to the junction, with respect to the brain. Selective nerve branch stimulation can be used in conjunction with nerve-branch specific stimulation to achieve selective stimulation of a specific range of fiber diameters, substantially restricted to a preselected nerve branch, including heart rate control, where activating only the vagal B nerve fibers in the heart, and not vagal A nerve fibers that innervate other muscles, can be desirous.

[0016] U.S. Pat. No. 7,778,703, issued Aug. 17, 2010 to Gross et al. discloses selective nerve fiber stimulation for treating heart conditions. An electrode device is adapted to be coupled to a vagus nerve of a subject and a control unit drives the electrode device by applying to the vagus nerve a stimulating current and also an inhibiting current, which are capable of respectively inducing action potentials in a therapeutic direction in a first set and a second set of nerve fibers in the vagus nerve and inhibiting action potentials in the therapeutic direction in the second set of nerve fibers only. The nerve fibers in the second set have larger diameters than the nerve fibers in the first set. The control unit typically drives the electrode device to apply signals to the vagus nerve to induce the propagation of efferent action potentials towards the heart and suppress artificially-induced afferent action potentials toward the brain.

[0017] U.S. Pat. No. 7,813,805, issued Oct. 12, 2010 to Farazi and U.S. Pat. No. 7,869,869, issued Jan. 11, 2011 to Farazi both disclose subcardiac threshold vagal nerve stimulation. A vagal nerve stimulator is configured to generate electrical pulses below a cardiac threshold of the heart, which are transmitted to a vagal nerve, so as to inhibit or reduce injury resulting from ischemia. The cardiac threshold is a threshold for energy delivered to the heart above which there is a slowing of the heart rate or conduction velocity. In operation, the vagal nerve stimulator generates the electrical pulses below the cardiac threshold, such that heart rate is not affected.

[0018] Finally, U.S. Pat. No. 7,885,709, issued Feb. 8, 2011 to Ben-David discloses nerve stimulation for treating disorders. A control unit can be configured to drive an electrode device to stimulate the vagus nerve, so as to modify heart rate variability, or to reduce heart rate, by suppressing the adrenergic (sympathetic) system. The vagal stimulation reduces the release of catecholamines in the heart, thereby lowering adrenergic tone at its source. For some applications, the control unit synchronizes the stimulation with the subject's cardiac cycle, while for other applications, the stimulation can be applied, for example, in a series of pulses. To reduce heart rate, stimulation is applied using a target heart rate lower than the subject's normal average heart rate.

[0019] Accordingly, a need remains for an approach to therapeutically treating chronic cardiac dysfunction, including CHF, through a form of electrical stimulation of the cervical vagus nerve to confirm pre-therapeutic cardiovascular drive and subsequently restore autonomic balance.

SUMMARY OF THE INVENTION

[0020] Excessive sustained activation of the sympathetic nervous system has a deleterious effect on long term cardiac performance and ultimately on the survival of chronic cardiac dysfunction patients. Bi-directional afferent and efferent neural stimulation through the vagus nerve can beneficially restore autonomic balance and improve long term patient outcome. Stimulus delivery can be provided through a vagal neurostimulator per a schedule specified in stored stimulation parameters or based on sensory-based therapy triggers provided through an integrated heart rate sensor.

[0021] One embodiment provides a vagus nerve neurostimulator for evaluating autonomic cardiovascular drive. An implantable neurostimulator includes a pulse generator configured to drive electrical therapeutic stimulation tuned to restore autonomic balance through electrical pulses continuously and periodically delivered in both afferent and efferent directions of the cervical vagus nerve through a pair of helical electrodes via an electrically coupled nerve stimulation therapy lead. The implantable neurostimulator also includes a leadless heart rate sensor configured to continually monitor heart rate against a stored baseline heart rate.

[0022] A further embodiment provides an implantable device for evaluating autonomic cardiovascular drive. An implantable neurostimulator device includes a pulse generator configured to deliver both afferent and efferent therapeutic electrical stimulation to a cervical vagus nerve in continuous alternating cycles of stimuli application and stimuli inhibition. A cervical vagus nerve stimulation therapy lead is electrically coupled to the pulse generator and is terminated by a pair of helical electrodes through which the therapeutic electrical stimulation is delivered to the cervical vagus nerve. An integrated leadless heart rate sensor configured to continually monitor heart rate against a baseline heart rate stored in a memory in the pulse generator.

[0023] A still further embodiment provides an implantable device for evaluating autonomic cardiovascular drive in a patient suffering from chronic cardiac dysfunction. A cervical vagus nerve stimulation therapy lead includes a pair of helical electrodes configured to conform to an outer diameter of a cervical vagus nerve sheath of a patient and a set of connector pins electrically connected to the helical electrodes by an insulated electrical lead body. A neurostimulator is powered by a primary battery and enclosed in a hermetically sealed housing. The neurostimulator includes an electrical receptacle included on an outer surface of the housing into which the connector pins are securely and electrically coupled. The neurostimulator also includes a pulse generator configured to therapeutically stimulate the cervical vagus nerve through the helical electrodes in alternating cycles of stimuli application and stimuli inhibition that are tuned to both efferently activate the heart's intrinsic nervous system and afferently activate the patient's central reflexes by triggering bi-directional action potentials. The neurostimulator further includes a recordable memory within which is stored a baseline heart rate for the patient prior to stimulation therapy initiation. Finally, the neurostimulator includes an integrated leadless heart rate sensor configured to continually monitor the patient's heart rate in light of the baseline heart rate.

[0024] By restoring autonomic balance, therapeutic VNS operates acutely to decrease heart rate, increase heart rate variability and coronary flow, reduce cardiac workload through vasodilation, and improve left ventricular relaxation. Over the long term, VNS provides the chronic benefits of

decreased negative cytokine production, increased baroreflex sensitivity, increased respiratory gas exchange efficiency, favorable gene expression, renin-angiotensin-aldosterone system down-regulation, and anti-arrhythmic, anti-apoptotic, and ectopy-reducing anti-inflammatory effects.

[0025] Still other embodiments of the present invention will become readily apparent to those skilled in the art from the following detailed description, wherein are described embodiments by way of illustrating the best mode contemplated for carrying out the invention. As will be realized, the invention is capable of other and different embodiments and its several details are capable of modifications in various obvious respects, all without departing from the spirit and the scope of the present invention. Accordingly, the drawings and detailed description are to be regarded as illustrative in nature and not as restrictive.

BRIEF DESCRIPTION OF THE DRAWINGS

[0026] FIG. 1 is a front anatomical diagram showing, by way of example, placement of an implantable vagus stimulation device in a male patient, in accordance with one embodiment.

[0027] FIG. 2 is a diagram showing the implantable neurostimulator and stimulation therapy lead of FIG. 1 with the therapy lead unplugged.

[0028] FIG. 3 is a diagram showing an external programmer for use with the implantable neurostimulator of FIG. 1.

[0029] FIG. 4 is a diagram showing the helical electrodes provided as on the stimulation therapy lead of FIG. 2 in place on a vagus nerve in situ.

[0030] FIG. 5 is a graph showing, by way of example, the relationship between the targeted therapeutic efficacy and the extent of potential side effects resulting from use of the implantable neurostimulator of FIG. 1.

[0031] FIG. 6 is a graph showing, by way of example, the optimal duty cycle range based on the intersection depicted in FIG. 5.

[0032] FIG. 7 is a timing diagram showing, by way of example, a stimulation cycle and an inhibition cycle of VNS as provided by implantable neurostimulator of FIG. 1.

DETAILED DESCRIPTION OF THE INVENTION

[0033] The sympathetic nervous system affects cardiovascular physiology in an "all-or-nothing" form of neurological response, whereas the parasympathetic nervous system selectively modulates specific regions of the heart at various levels of activation. Through these two nervous systems, the autonomic nervous system directly controls the heart by affecting conduction, refractoriness, impulse formation, and the electrophysiological properties of the cardiac tissue, and indirectly by influencing the heart's hemodynamics, blood flow, and metabolism, as well as exercising control over other body functions that rely on the heart.

[0034] The sympathetic and parasympathetic nervous systems dynamically interact thorough signals partially modulated by cAMP and cGMP secondary messengers to presynaptically influence the activation of each other's nerve traffic. Changes to one nervous system can indirectly affect nerve activation in the other. For instance, during autonomic imbalance, sympathetic neural activity increases while cardiac vagal activation, and therefore sympathetic innervation, is withdrawn. In view of their collaborative influence over car-

diac function, the restoration of autonomic balance between these nervous systems is crucial to managing chronic cardiac dysfunction.

[0035] Conventional therapeutic alteration of cardiac vagal efferent activation through electrical stimulation of sympathetic vagal nerve fibers can produce beneficial bradycardia and modification in atrial and ventricular contractile function. However, such targeting of only the efferent nerves of the sympathetic nervous system is clinically insufficient to restore autonomic balance, as any affect on parasympathetic activation merely occurs due to incidental recruitment of parasympathetic nerve fibers. In contrast, propagating bi-directional action potentials through parasympathetic afferent and efferent nerve fibers in the vagus nerve resulting from neural stimulation engages both medullary and cardiac reflex control components and works to directly restore autonomic balance by engaging both components of both nervous systems. Moreover, many of the conventional approaches to VNS monitor heart rate through an intracardiac lead, typically implanted into the right ventricle and adapted from sensing leads used in pacemakers and defibrillators. Implantation of these leads is surgically complex and increases risk of injury to the patient and post-surgical complications.

[0036] An implantable vagus nerve stimulator with integrated heart rate sensor, such as used to treat drug-refractory epilepsy and depression, can be adapted to use in managing chronic cardiac dysfunction through therapeutic bi-directional vagal stimulation. In addition, an integrated heart rate sensor can allow the patient's heart rate to be determined prior to the initiation of therapy delivery, or the heart rate can be provided to the stimulator from an external source. FIG. 1 is a front anatomical diagram showing, by way of example, placement of an implantable vagus stimulation device 11 in a male patient 10, in accordance with one embodiment. The VNS provided through the stimulation device 11 operates under several mechanisms of action. These mechanisms include increasing parasympathetic outflow and inhibiting sympathetic effects by blocking norepinephrine release. More importantly, VNS triggers the release of acetylcholine (ACh) into the synaptic cleft, which has beneficial anti-arrhythmic, anti-apoptotic, and ectopy-reducing anti-inflammatory effects.

[0037] The implantable vagus stimulation device 11 includes three main components, an implantable neurostimulator 12, a therapy lead 13, and helical electrodes 14. In addition, the operation of the neurostimulator 12 can be remotely checked, downloaded, diagnosed, and programmed by healthcare professionals using an external programmer (as further described below with reference to FIG. 3). Together, the implantable vagus stimulation device 11 and the external programmer form a VNS therapeutic delivery system.

[0038] The neurostimulator 12 is implanted in the patient's right or left pectoral region generally on the same side of the patient's body as the vagus nerve 15, 16 to be stimulated. A subcutaneous pocket is formed in the subclavicular region into which the neurostimulator 12 is placed. The helical electrodes 14 are generally implanted on the vagus nerve 15, 16 about halfway between the clavicle 19a-b and the mastoid process. The therapy lead 13 and helical electrodes 14 are implanted by first exposing the carotid sheath and chosen vagus nerve 15, 16 through a latero-cervical incision on the ipsilateral side of the patient's neck 18. The helical electrodes 14 are then placed onto the exposed nerve sheath and tethered. A subcutaneous tunnel is formed between the respective

implantation sites of the neurostimulator 12 and helical electrodes 14, through which the therapy lead 13 is guided to the neurostimulator 12 and securely connected.

[0039] Anatomically, the vagus nerve includes a pair of nerve fiber bundles 15, 16 that both proceed laterally through the neck, thorax, and abdomen, and distally innervate the heart 17 and other major organs and body tissue. The stimulation device 11 bi-directionally stimulates the vagus nerve 15, 16 through application of continuous, periodic electrical stimuli. Both sympathetic and parasympathetic nerve fibers are stimulated through the helical electrodes 14 of the stimulation device 11. Stimulation of the cervical vagus nerve results in propagation of action potentials in both afferent and efferent directions from the site of stimulation. Afferent action potentials propagate toward the parasympathetic nervous system's origin in the medulla in the nucleus ambiguus, nucleus tractus solitarius, and the dorsal motor nucleus, as well as towards the sympathetic nervous system's origin in the intermediolateral cell column of the spinal cord.

[0040] Efferent action potentials propagate toward the heart to innervate the components of the heart's intrinsic nervous system. Intracardially, the cardiac nervous system is conceived as two major outflow branches exerting reciprocal control over cardiac indices under sole influence of central neuronal command. The outflow branches respectively regulate adrenergic (sympathetic) and cholinergic (parasympathetic) efferent preganglionic neuronal activity. Innervation of the heart 17 is regionalized and exhibits a high degree of asymmetry. Within the heart 17, the greatest concentration of vagal nerves is found first in the sinus node and then in the atrioventricular node. Cardiac efferents of the left vagus nerve 15 regulate cardiac contractility through their influence on conduction in the atrioventricular (AV) node. Cardiac efferents of the right vagus nerve 16 affect sinus node automaticity and regulate heart rate. Thus, right-sided cervical vagal stimulation tends to produce sinus bradycardia, whereas left-sided cervical vagal stimulation tends to produce AV nodal blockage.

[0041] Either the left or right vagus nerve 15, 16 can be stimulated by the stimulation device 11, although stimulation of the left vagus nerve 15 is preferred because stimulation of the left vagus nerve 15 is less likely to be arrhythmogenic. The left vagus nerve 15 has fewer projections to the sinoatrial node and is therefore less likely to severely reduce heart rate. Left VNS increases AV nodal conduction time and refractory period. In current form, VNS elicits bi-directional activation of both afferent and efferent nerve fibers. The balance between achieving therapeutic benefits (afferent) and side-effects (efferent) is largely determined by the threshold differences between activation of the different vagus nerve fibers.

[0042] The VNS therapy is autonomously delivered to the patient's vagus nerve 15, 16 through three implanted components, a neurostimulator 12, therapy lead 13, and helical electrodes 14. FIG. 2 is a diagram showing the implantable neurostimulator 12 and stimulation therapy lead 13 of FIG. 1 with the therapy lead unplugged 20. In one embodiment, the neurostimulator 12 can be adapted from a VNS Therapy AspireSR Model 106 generator, manufactured and sold by Cyberonics, Inc., Houston, Tex., although other manufactures and types of single-pin receptacle implantable VNS neurostimulators with integrated leadless heart rate sensors could also be used. The stimulation therapy lead 13 and helical electrodes 14 are generally fabricated as a combined assem-

bly and can be adapted from a Model 302 lead, Perennia-DURA Model 303 lead, or PerenniaFLEX Model 304 lead, all of which are also manufactured and sold by Cyberonics, Inc., in two sizes based on helical electrode inner diameter, although other manufactures and types of single-pin receptacle-compatible therapy leads and electrodes could also be used.

[0043] The neurostimulator **12** provides continuous alternating ON-OFF cycles of vagal stimulation that when applied to the vagus nerve through the electrodes **14**, produce action potentials in the underlying nerves that propagate bi-directionally; afferently propagating action potentials activate the medial medullary sites responsible for central reflex control and efferently propagating action potentials activate the heart's intrinsic nervous system. Cardiac motor neurons, when activated, influence heart rate, AV nodal conduction, and atrial and ventricular inotropy, thereby providing chronic cardiac dysfunction therapeutic effects. In addition, the alternating cycles can be tuned to activate phasic parasympathetic response in the vagus nerve **15**, **16** being stimulated by bi-directionally modulating vagal tone.

[0044] The neurostimulator **12** includes an electrical pulse generator that drives electrical therapeutic stimulation, which is tuned to restore autonomic balance, through electrical pulses that are continuously and periodically delivered in both afferent and efferent directions of the vagus nerve **15**, **16**. The neurostimulator **12** is enclosed in a hermetically sealed housing **21** constructed of a biocompatible, implantation-safe material, such as titanium. The housing **21** contains electronic circuitry **22** powered by a primary battery **23**, such as a lithium carbon monofluoride battery. The electronic circuitry **22** is implemented using complementary metal oxide semiconductor integrated circuits that include a microprocessor that executes a control program according to the stored stimulation parameters as programmed into the neurostimulator **12**; a voltage regulator that regulates system power; logic and control circuitry, including a recordable memory **29** within which the stimulation parameters are stored, that controls overall pulse generator function, receives and implements programming commands from the external programmer, or other external source, and collects and stores telemetry information, processes sensory input, and controls scheduled and sensory-based therapy outputs; a transceiver that remotely communicates with the external programmer using radio frequency signals; an antenna, which receives programming instructions and transmits the telemetry information to the external programmer; and a reed switch **30** that provides a manually-actuatable mechanism to place the neurostimulator into an on-demand stimulation mode or to inhibit stimulation, also known as "magnet mode." Other electronic circuitry and components, such as an integrated heart rate sensor, are possible.

[0045] The neurostimulator **12** delivers VNS under control of the electronic circuitry **22**, particularly the logic and control circuitry, which control stimulus delivery per a schedule specified in the stored stimulation parameters, based on sensory-based therapy triggers (as further described infra) or on-demand in response to magnet mode, a programming wand instruction, or other external source. The stored stimulation parameters are programmable (as further described below with reference to FIG. 7). In addition, sets of pre-selected stimulation parameters can be provided to physicians through the external programmer and fine-tuned to a patient's physiological requirements prior to being pro-

grammed into the neurostimulator **12**, such as described in commonly-assigned U.S. Pat. No. 8,630,709, entitled "Computer-Implemented System and Method for Selecting Therapy Profiles of Electrical Stimulation of Cervical Vagus Nerves for Treatment of Chronic Cardiac Dysfunction," Ser. No. 13/314,138, filed on Dec. 7, 2011, the disclosure of which is incorporated by reference. The magnet mode can be used by the patient **10** to exercise on-demand manual control over the therapy delivery and titration of the neurostimulator, such as described in commonly-assigned U.S. Pat. No. 8,600,505, entitled "Implantable Device for Facilitating Control of Electrical Stimulation of Cervical Vagus Nerves for Treatment of Chronic Cardiac Dysfunction," Ser. No. 13/314,130, filed on Dec. 7, 2011, the disclosure of which is incorporated by reference. The stimulation parameters also include the levels of stimulation for the bi-directional action potentials.

[0046] Externally, the neurostimulator **12** includes a header **24** to securely receive and connect to the therapy lead **13**. In one embodiment, the header **24** encloses a receptacle **25** into which a single pin for the therapy lead **13** can be received, although two or more receptacles could also be provided, along with the requisite additional electronic circuitry **22**. The header **24** internally includes a lead connector block (not shown) and a set of set screws **26**.

[0047] The therapy lead **13** delivers an electrical signal from the neurostimulator **12** to the vagus nerve **15**, **16** via the helical electrodes **14**. On a proximal end, the therapy lead **13** has a lead connector **27** that transitions an insulated electrical lead body to a metal connector pin **28**. During implantation, the connector pin **28** is guided through the receptacle **25** into the header **24** and securely fastened in place using the set screws **26** to electrically couple the therapy lead **13** to the neurostimulator **12**. On a distal end, the therapy lead **13** terminates with the helical electrode **14**, which bifurcates into a pair of anodic and cathodic electrodes **62** (as further described below with reference to FIG. 4). In one embodiment, the lead connector **27** is manufactured using silicone and the connector pin **28** is made of stainless steel, although other suitable materials could be used, as well. The insulated lead body **13** utilizes a silicone-insulated alloy conductor material.

[0048] The housing **21** also contains a heart rate sensor **31** that is electrically interfaced with the logic and control circuitry, which receives the patient's sensed heart rate as sensory inputs. The heart rate sensor **31** monitors heart rate using an ECG-type electrode. Through the electrode, the patient's heart beat can be sensed by detecting ventricular depolarization. In a further embodiment, a plurality of electrodes can be used to sense voltage differentials between electrode pairs, which can be signal processed and combined into other cardiac physiological measures, for instance, P, QRS and T complexes. These cardiac artifacts can be used to derive other physiological measures and diagnose abnormal rhythm disorders and indicia, including sleep apnea, hypopnea index, dysautonomias (postural orthostatic tachycardia syndrome (POTS), vasovagal syncope, inappropriate sinus tachycardia (IST), and the like), and arrhythmia detection (atrial fibrillation, ventricular tachycardia, ventricular fibrillation, heart block, and so forth). Other direct and indirect uses of the heart rate sensor **31** are possible. In one embodiment, the heart rate sensor **31** can be adjusted for sensitivity and is capable of detecting heart beats in the range of 20 to 240 bpm. Other levels and ranges of heart beat sensitivity are possible.

[0049] Prior to the initiation of titration and eventual therapeutic stimulation, the neurostimulator **12** remains idle, yet the time period between implantation and therapy initiation provides an opportunity to passively monitor the patient's heart rate or other physiology, depending upon the capabilities of the neurostimulator **12**. Ordinarily, the heart rate sensor **31** provides the sensed heart rate to the control and logic circuitry as sensory inputs, which can be stored as data in the recordable memory **29**. When sensed prior to therapy initiation, the sensory inputs of the heart rate sensor **31** can be used as a baseline heart rate, which reflects the pre-therapeutic condition of the patient's cardiovascular drive. The sensed heart rate can be chosen as either a direct measurement of heart rate, or statistically by taking an average, minimum, maximum, or mean heart rate over time. Other ways of determining a baseline heart rate through use of the heart rate sensor **31** or other sensory-input sources or devices integrated into the neurostimulator **12** are possible.

[0050] Once therapy has begun, the sensory inputs of the heart rate sensor **31** serve as sensory-based therapy triggers to autonomously titrate VNS delivery in light of the baseline heart rate. The logic and control circuitry can then determine whether the stimulation needs to be adjusted or inhibited. Alternatively, the baseline heart rate can be programmed into the neurostimulator **12** using, for instance, an external programmer. Importantly, the baseline heart rate need not necessarily be based on the patient's heart rate per se; non-heart rate ECG measurements, for example, could be used to derive the baseline heart rate and then programmed into the neurostimulator **12**. Other ways of determining a baseline heart rate from a source outside of the neurostimulator **12** are possible.

[0051] Therapy can be adjusted whenever the sensed heart rate falls out of bounds relative to the baseline heart rate, such as outside of a predetermined heart rate range. A lower bound, stored in the recordable memory **29**, can be set to indicate bradycardia or an asystolic heart condition. The lower bound can be expressed as a ratio, percentile, or function, of the baseline heart rate, or as discrete independent (absolute) values with respect to the baseline heart rate. If the heart rate sensed by the heart rate sensor **31** falls below the lower bound on the baseline heart rate, the neurostimulator **12** can be instructed, through the stimulation parameters, to suspend the triggering of the bi-directional action potentials altogether. Therapy can also be programmed to resume automatically after a fixed time period. Alternatively, the neurostimulator **12** can be instructed to down titrate therapy by gradually adjusting the stimulation parameters downwards until the bradycardia or asystole are no longer present. Therapy can also be programmed to gradually up titrate by adjusting the stimulation parameters upwards after first inhibiting stimulation for a fixed time period. Both the down titration and the up titration can occur stepwise, where the changes in the stimulation parameters occur in small increments spread out over time, rather than all at once. VNS therapy can be titrated by adjusting the stored stimulation parameters, including output current, pulse width, and signal frequency, to different VNS therapeutic setting that are less intense (down titrate) or more intense (up titrate). An upper bound, stored in the recordable memory **29**, can also be set to indicate insufficient therapy delivery. The upper bound can be expressed as a ratio, percentile, or function, of the baseline heart rate, or as discrete independent (absolute) values with respect to the baseline heart rate. If the heart rate sensed by the heart rate sensor **31** rises above an upper bound on the baseline heart rate, the

neurostimulator **12** can be instructed, again through the stimulation parameters, to up titrate the triggering of the bi-directional action potentials and thereby lower heart rate.

[0052] The neurostimulator **12** is preferably interrogated prior to implantation and throughout the therapeutic period for checking proper operation, downloading recorded data, diagnosing problems, and programming operational parameters. FIG. 3 is a diagram showing an external programmer **40** for use with the implantable neurostimulator **12** of FIG. 1. The external programmer **40** includes a healthcare provider-operable programming computer **41** and a programming wand **42**. Generally, use of the external programmer **40** is restricted to healthcare providers, while more limited manual control is provided to the patient through "magnet mode."

[0053] In one embodiment, the programming computer **41** executes application software specially designed to interrogate the neurostimulator **12**. The programming computer **41** interfaces to the programming wand **42** through a standardized wired data connection, including a serial data interface, for instance, an EIA RS-232 or USB serial port. Alternatively, the programming computer **41** and the programming wand **42** could interface wirelessly. The programming wand **42** can be adapted from a Model 201 Programming Wand, manufactured and sold by Cyberonics, Inc. Similarly, the application software can be adapted from the Model 250 Programming Software suite, licensed by Cyberonics, Inc. Other configurations and combinations of computer **41**, programming wand **42**, and application software **45** are possible.

[0054] The programming computer **41** can be implemented using a general purpose programmable computer and can be a personal computer, laptop computer, netbook computer, handheld computer, or other form of computational device. In one embodiment, the programming computer is a personal digital assistant handheld computer operating under the Pocket-PC or Windows Mobile operating systems, licensed by Microsoft Corporation, Redmond, Wash., such as the Dell Axim X5 and X50 personal data assistants, sold by Dell, Inc., Round Top, Tex., the HP Jornada personal data assistant, sold by Hewlett-Packard Company, Palo Alto, Tex.

[0055] The programming computer **41** functions through those components conventionally found in such devices, including, for instance, a central processing unit, volatile and persistent memory, touch-sensitive display, control buttons, peripheral input and output ports, and network interface. The computer **41** operates under the control of the application software **45**, which is executed as program code as a series of process or method modules or steps by the programmed computer hardware. Other assemblages or configurations of computer hardware, firmware, and software are possible.

[0056] Operationally, the programming computer **41**, when connected to a neurostimulator **12** through wireless telemetry using the programming wand **42**, can be used by a healthcare provider to remotely interrogate the neurostimulator **12** and modify stored stimulation parameters. The programming wand **42** provides data conversion between the digital data accepted by and output from the programming computer and the radio frequency signal format that is required for communication with the neurostimulator **12**.

[0057] The healthcare provider operates the programming computer **41** through a user interface that includes a set of input controls **43** and a visual display **44**, which could be touch-sensitive, upon which to monitor progress, view downloaded telemetry and recorded physiology, and review and modify programmable stimulation parameters. The telemetry

can include reports on device history that provide patient identifier, implant date, model number, serial number, magnet activations, total ON time, total operating time, manufacturing date, and device settings and stimulation statistics and on device diagnostics that include patient identifier, model identifier, serial number, firmware build number, implant date, communication status, output current status, measured current delivered, lead impedance, and battery status. Other kinds of telemetry or telemetry reports are possible.

[0058] During interrogation, the programming wand **42** is held by its handle **46** and the bottom surface **47** of the programming wand **42** is placed on the patient's chest over the location of the implanted neurostimulator **12**. A set of indicator lights **49** can assist with proper positioning of the wand and a set of input controls **48** enable the programming wand **42** to be operated directly, rather than requiring the healthcare provider to awkwardly coordinate physical wand manipulation with control inputs via the programming computer **41**. The sending of programming instructions and receipt of telemetry information occur wirelessly through radio frequency signal interfacing. Other programming computer and programming wand operations are possible.

[0059] Preferably, the helical electrodes **14** are placed over the cervical vagus nerve **15, 16** at the location below where the superior and inferior cardiac branches separate from the cervical vagus nerve. FIG. **4** is a diagram showing the helical electrodes **14** provided as on the stimulation therapy lead **13** of FIG. **2** in place on a vagus nerve **15, 16** in situ **50**. Although described with reference to a specific manner and orientation of implantation, the specific surgical approach and implantation site selection particulars may vary, depending upon physician discretion and patient physical structure.

[0060] The helical electrodes **14** are positioned over the patient's vagus nerve **61** oriented with the end of the helical electrodes **14** facing the patient's head. At the distal end, the insulated electrical lead body **13** is bifurcated into a pair of lead bodies **57, 58** that are connected to a pair of electrodes proper **51, 52**. The polarity of the electrodes **51, 52** could be configured into a monopolar cathode, a proximal anode and a distal cathode, or a proximal cathode and a distal anode. In addition, an anchor tether **53** is fastened over the lead bodies **57, 58** that maintains the helical electrodes' position on the vagus nerve **61** following implant. In one embodiment, the conductors of the electrodes **51, 52** are manufactured using a platinum and iridium alloy, while the helical materials of the electrodes **51, 52** and the anchor tether **53** are a silicone elastomer.

[0061] During surgery, the electrodes **51, 52** and the anchor tether **53** are coiled around the vagus nerve **61** proximal to the patient's head, each with the assistance of a pair of sutures **54, 55, 56**, made of polyester or other suitable material, which help the surgeon to spread apart the respective helices. The lead bodies **57, 58** of the electrodes **51, 52** are oriented distal to the patient's head and aligned parallel to each other and to the vagus nerve **61**. A strain relief bend **60** can be formed on the distal end with the insulated electrical lead body **13** aligned parallel to the helical electrodes **14** and attached to the adjacent fascia by a plurality of tie-downs **59a-b**.

[0062] In one embodiment, the stimulation protocol calls for a six-week titration period. During the first three-weeks, the surgical incisions are allowed to heal and no VNS therapy occurs. During the second three-weeks, the neurostimulator **12** is first turned on and operationally tested. The impulse rate and intensity of the VNS is then gradually increased every

three or four days until full therapeutic levels of stimulation are achieved, or maximal patient tolerance is reached, whichever comes first. Patient tolerance can be gauged by physical discomfort or pain, as well as based on presence of known VNS side-effects, such as ataxia, coughing, hoarseness, or dyspnea.

[0063] Therapeutically, the VNS is delivered through continual alternating cycles of electrical pulses and rest (inhibition), which is specified to the neurostimulator **12** through the stored stimulation parameters. The neurostimulator **12** can operate either with or without an integrated heart rate sensor, such as respectively described in commonly-assigned U.S. Pat. No. 8,577,458, entitled "Implantable Device for Providing Electrical Stimulation of Cervical Vagus Nerves for Treatment of Chronic Cardiac Dysfunction with Leadless Heart Rate Monitoring," Ser. No. 13/314,126, filed on Dec. 7, 2011, and U.S. patent application, entitled "Implantable Device for Providing Electrical Stimulation of Cervical Vagus Nerves for Treatment of Chronic Cardiac Dysfunction," Ser. No. 13/314,119, filed on Dec. 7, 2011, pending, the disclosures of which are incorporated by reference. Additionally, where an integrated leadless heart rate sensor is available, the neurostimulator **12** can provide self-controlled titration, such as described in commonly-assigned U.S. Patent Publication No. 2013-0158617A1, entitled "Implantable Device for Providing Electrical Stimulation of Cervical Vagus Nerves for Treatment of Chronic Cardiac Dysfunction with Bounded Titration," Ser. No. 13/314,135, filed on Dec. 7, 2011, pending, the disclosure of which is incorporated by reference.

[0064] A "duty cycle" is the percentage of time that the neurostimulator **12** is stimulating, that is, the percentage of ON times. The VNS can be delivered with a periodic duty cycle in the range of around 5% to 30%. The selection of duty cycle is a tradeoff between competing medical considerations. FIG. **5** is a graph **70** showing, by way of example, the relationship between the targeted therapeutic efficacy **73** and the extent of potential side effects **74** resulting from use of the implantable neurostimulator **12** of FIG. **1**. The x-axis represents the duty cycle **71**. The duty cycle is determined by dividing the stimulation time by the sum of the ON and OFF times of the neurostimulator **12**. However, the stimulation time may also need to include ramp-up time and ramp-down time, where the stimulation frequency exceeds a minimum threshold (as further described below with reference to FIG. **7**). The y-axis represents physiological response **72** to VNS therapy. The physiological response **72** can be expressed quantitatively for a given duty cycle **71** as a function of the targeted therapeutic efficacy **73** and the extent of potential side effects **74**, as described infra. The maximum level of physiological response **72** ("max") signifies the highest point of targeted therapeutic efficacy **73** or potential side effects **74**.

[0065] Targeted therapeutic efficacy **73** and the extent of potential side effects **74** can be expressed as functions of duty cycle **71** and physiological response **72**. The targeted therapeutic efficacy **73** represents the intended effectiveness of VNS in provoking a beneficial physiological response for a given duty cycle and can be quantified by assigning values to the various acute and chronic factors that contribute to the physiological response **72** of the patient **10** due to the delivery of therapeutic VNS. Acute factors that contribute to the targeted therapeutic efficacy **73** include increase in heart rate variability and coronary flow, reduction in cardiac workload through vasodilation, and improvement in left ventricular relaxation. Chronic factors that contribute to the targeted

therapeutic efficacy **73** include decreased parasympathetic activation and increased sympathetic activation, as well as decreased negative cytokine production, increased baroreflex sensitivity, increased respiratory gas exchange efficiency, favorable gene expression, renin-angiotensin-aldosterone system down-regulation, anti-arrhythmic, anti-apoptotic, and ectopy-reducing anti-inflammatory effects. These contributing factors can be combined in any manner to express the relative level of targeted therapeutic efficacy **73**, including weighting particular effects more heavily than others or applying statistical or numeric functions based directly on or derived from observed physiological changes. Empirically, targeted therapeutic efficacy **73** steeply increases beginning at around a 5% duty cycle, and levels off in a plateau near the maximum level of physiological response at around a 30% duty cycle. Thereafter, targeted therapeutic efficacy **73** begins decreasing at around a 50% duty cycle and continues in a plateau near a 25% physiological response through the maximum 100% duty cycle.

[0066] The extent of potential side effects **74** represents the occurrence of a possible physiological effect, either adverse or therapeutic, that is secondary to the benefit intended, which presents in the patient **10** in response to VNS and can be quantified by assigning values to the physiological effects presented due to the delivery of therapeutic VNS. The degree to which a patient **10** may be prone to exhibit side effects depends in large part upon the patient's condition, including degree of cardiac dysfunction, both acute and chronic, any comorbidities, prior heart problems, family history, general health, and similar considerations. As well, the type and severity of a side effect is patient-dependent. For VNS in general, the more common surgical- and stimulation-related adverse side effects include infection, asystole, bradycardia, syncope, abnormal thinking, aspiration pneumonia, device site reaction, acute renal failure, nerve paralysis, hypesthesia, facial paresis, vocal cord paralysis, facial paralysis, hemidiaphragm paralysis, recurrent laryngeal injury, urinary retention, and low grade fever. The more common non-adverse side effects include hoarseness (voice alteration), increased coughing, pharyngitis, paresthesia, dyspnea, dyspepsia, nausea, and laryngismus. Less common side effects, including adverse events, include ataxia, hypesthesia, increase coughing, insomnia, muscle movement or twitching associated with stimulation, nausea, pain, paresthesia, pharyngitis, vomiting, aspiration, blood clotting, choking sensation, nerve damage, vasculature damage, device migration or extrusion, dizziness, dysphagia, duodenal or gastric ulcer, ear pain, face flushing, facial paralysis or paresis, implant rejection, fibrous tissue formation, fluid pocket formation, hiccupping, incision site pain, irritability, laryngeal irritation, hemidiaphragm paralysis, vocal cord paralysis, muscle pain, neck pain, painful or irregular stimulation, seroma, skin or tissue reaction, stomach discomfort, tinnitus, tooth pain, unusual scarring at incision site, vagus nerve paralysis, weight change, worsening of asthma or bronchitis. These quantified physiological effects can be combined in any manner to express the relative level of extent of potential side effects **74**, including weighting particular effects more heavily than others or applying statistical or numeric functions based directly on or derived from observed physiological changes. Empirically, the extent of potential side effects **74** is initially low until around a 25% duty cycle, at which point the potential begins to steeply increase. The extent of potential side effects **74** levels off in a

plateau near the maximum level of physiological response at around a 50% duty cycle through the maximum 100% duty cycle.

[0067] The intersection **75** of the targeted therapeutic efficacy **73** and the extent of potential side effects **74** represents the optimal duty cycle range for VNS. FIG. 6 is a graph **80** showing, by way of example, the optimal duty cycle range **83** based on the intersection **75** depicted in FIG. 5. The x-axis represents the duty cycle **81** as a percentage of stimulation time over inhibition time. The y-axis represents the desirability **82** of operating the neurostimulator **12** at a given duty cycle **81**. The optimal duty range **83** is a function **84** of the intersection **74** of the targeted therapeutic efficacy **73** and the extent of potential side effects **74**. The desirability **82** can be expressed quantitatively for a given duty cycle **81** as a function of the values of the targeted therapeutic efficacy **73** and the extent of potential side effects **74** at their point of intersection in the graph **70** of FIG. 5. The maximum level of desirability **82** ("max") signifies a tradeoff that occurs at the point of highest targeted therapeutic efficacy **73** in light of lowest potential side effects **74** and that point will typically be found within the range of a 5% to 30% duty cycle **81**. Other expressions of duty cycles and related factors are possible.

[0068] The neurostimulator **12** delivers VNS according to stored stimulation parameters, which are programmed using an external programmer **40** (shown in FIG. 3). Each stimulation parameter can be independently programmed to define the characteristics of the cycles of therapeutic stimulation and inhibition to ensure optimal stimulation for a patient **10**. The programmable stimulation parameters affecting stimulation include output current, signal frequency, pulse width, signal ON time, signal OFF time, magnet activation (for VNS specifically triggered by "magnet mode"), "AutoStim" activation (delivered upon detection of a biological signal indicative of physiological conditions, such as bradycardia or asystole), and reset parameters. Other programmable parameters are possible.

[0069] VNS is delivered in alternating cycles of stimuli application and stimuli inhibition that are tuned to both efferently activate the heart's intrinsic nervous system and heart tissue and afferently activate the patient's central reflexes. FIG. 7 is a timing diagram showing, by way of example, a stimulation cycle and an inhibition cycle of VNS **90** as provided by implantable neurostimulator **12** of FIG. 1. The stimulation parameters enable the electrical stimulation pulse output by the neurostimulator **12** to be varied by both amplitude (output current **96**) and duration (pulse width **94**). The number of output pulses delivered per second determines the signal frequency **93**. In one embodiment, a pulse width in the range of 100 to 250 μ sec delivers between 0.02 and 50 mA of output current at a signal frequency of about 20 Hz, although other therapeutic values could be used as appropriate.

[0070] In the simplest case, the stimulation time is the time period during which the neurostimulator **12** is ON and delivering pulses of stimulation. The OFF time **95** is always the time period occurring in-between stimulation times **91** during which the neurostimulator **12** is OFF and inhibited from delivering stimulation. In one embodiment, the neurostimulator **12** implements a ramp-up time **97** and a ramp-down time **98** that respectively precede and follow the ON time **92** during which the neurostimulator **12** is ON and delivering pulses of stimulation at the full output current **96**. The ramp-up time **97** and ramp-down time **98** are used when the stimulation frequency is at least 10 Hz, although other minimum thresholds

could be used, and both times last two seconds, although other time periods could also be used. The ramp-up time 97 and ramp-down time 98 allow the strength of the output current 96 of each output pulse to be gradually increased and decreased, thereby avoiding unnecessary trauma to the vagus nerve due to sudden delivery or inhibition of stimulation at full strength. [0071] While the invention has been particularly shown and described as referenced to the embodiments thereof, those skilled in the art will understand that the foregoing and other changes in form and detail may be made therein without departing from the spirit and scope.

What is claimed is:

1. A vagus nerve neurostimulator for modulating autonomic cardiovascular drive, comprising:

a pulse generator, wherein the pulse generator generates a pulsed electrical signal comprising:

a signal ON time;

a signal OFF time;

an output current;

a signal frequency of approximately 10 Hz;

a pulse width; and

a duty cycle defined by dividing the signal ON time by the sum of the signal ON time and signal OFF time;

a therapy lead; and

an electrode communicatively coupled to the pulse generator via the therapy lead, wherein the electrical signal is applied to a vagus nerve via the electrode to propagate action potentials in both afferent and efferent directions along the vagus nerve at an intensity that avoids acute physiological side effects

2. The vagus nerve neurostimulator according to claim 1, wherein the pulsed electrical signal further comprises a signal ramp-up time.

3. The vagus nerve neurostimulator according to claim 1, wherein the pulsed electrical signal further comprises a signal ramp-down time.

4. The vagus nerve neurostimulator according to claim 1, wherein the duty cycle comprises a value in a range of 5% to 20%.

5. The vagus nerve neurostimulator according to claim 1, wherein application of the electrical signal to the vagus nerve further induces heart rate variability during the signal ON time.

6. The vagus nerve neurostimulator according to claim 1, wherein the pulsed electrical signal further comprises a ramp-up time and a ramp-down time; and

application of the electrical signal to the vagus nerve further induces heart rate variability during the ramp-up time, the signal ON time, and the ramp-down time.

7. A vagus nerve neurostimulator for modulating autonomic cardiovascular drive, comprising:

a pulse generator, wherein the pulse generator generates a pulsed electrical signal comprising:

a signal ramp-up time;

a signal ramp-down time;

a signal ON time;

a signal OFF time;

an output current;

a signal frequency of approximately 10 Hz;

a pulse width; and

a duty cycle defined by dividing the signal ON time by the sum of the signal ON time and signal OFF time;

a therapy lead; and

an electrode communicatively coupled to the pulse generator via the therapy lead, wherein the electrical signal is applied to a vagus nerve via the electrode to propagate action potentials in both afferent and efferent directions along the vagus nerve at an intensity that avoids acute physiological side effects.

8. The vagus nerve neurostimulator according to claim 7, wherein application of the electrical signal to the vagus nerve further induces heart rate variability during the ramp-up time, the signal ON time, and the ramp-down time.

9. The vagus nerve neurostimulator according to claim 7, wherein the signal ramp-up time is two seconds.

10. The vagus nerve neurostimulator according to claim 7, wherein the signal ramp-down time is two seconds.

11. The vagus nerve neurostimulator according to claim 7, wherein the output current, the signal frequency or the pulse width of the pulsed electrical signal is modified during the ramp-up time.

12. The vagus nerve neurostimulator according to claim 7, wherein the output current, the signal frequency or the pulse width of the pulsed electrical signal is modified during the ramp-down time.

13. A vagus nerve neurostimulator for modulating autonomic cardiovascular drive, comprising:

a pulse generator, wherein the pulse generator generates a pulsed electrical signal comprising:

a signal ON time;

a signal OFF time;

an output current;

a signal frequency of approximately 10 Hz;

a pulse width; and

a duty cycle defined by dividing the signal ON time by the sum of the signal ON time and signal OFF time;

a therapy lead; and

an electrode communicatively coupled to the pulse generator via the therapy lead, wherein the electrical signal is applied to a vagus nerve via the electrode to:

propagate action potentials in both afferent and efferent directions along the vagus nerve; and induce heart rate variability during the signal ON time at an intensity that avoids acute physiological side effects

14. The vagus nerve neurostimulator according to claim 13, wherein the pulsed electrical signal further comprises a signal ramp-up time.

15. The vagus nerve neurostimulator according to claim 13, wherein the pulsed electrical signal further comprises a signal ramp-down time.

16. The vagus nerve neurostimulator according to claim 13, wherein the duty cycle comprises a value in a range of 5% to 20%.

* * * * *

专利名称(译)	用于评估患有慢性心脏功能障碍的患者的自主心血管驱动的可植入装置		
公开(公告)号	US20150073512A1	公开(公告)日	2015-03-12
申请号	US14/540337	申请日	2014-11-13
申请(专利权)人(译)	Cyberonics公司 , INC.		
当前申请(专利权)人(译)	Cyberonics公司 , INC.		
[标]发明人	LIBBUS IMAD AMURTHUR BADRI KENKNIGHT BRUCE H		
发明人	LIBBUS, IMAD AMURTHUR, BADRI KENKNIGHT, BRUCE H.		
IPC分类号	A61N1/36 A61B5/00 A61B5/02		
CPC分类号	A61N1/36167 A61B5/02 A61N1/36114 A61N1/36053 A61B5/4836 A61B5/02438 A61B5/686 A61N1/05 A61N1/0551 A61N1/36139		
其他公开文献	US9114262		
外部链接	Espacenet USPTO		

摘要(译)

提供了一种用于评估患有慢性心脏功能障碍的患者 (10) 中的自主心血管驱动的可植入装置 (11)。刺激治疗导联 (13) 包括配置成符合颈部迷走神经鞘外径的螺旋电极 (14) 和一组连接器针 (> 28 电连接到螺旋电极 (14))。神经刺激器 (12) 包括电插座 (25)，连接器插脚 (28) 牢固且电耦合到该插座中。神经刺激器 (12) 还包括脉冲发生器配置为通过螺旋电极 (14) 在刺激应用和刺激抑制 (90) 的交替循环中治疗性地刺激迷走神经，这些循环被调整为同时激活心脏的内在通过触发双向动作电位，神经系统并通过触发激活患者的中枢反射。神经刺激器 (12) 包括存储基线心率的可记录存储器 (29)。神经刺激器 (12) 包括一个集成的无引线心率传感器 (31)，配置为根据基线心脏连续监测心率率。

