

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 April 2004 (15.04.2004)

PCT

(10) International Publication Number
WO 2004/032576 A1

(51) International Patent Classification⁷: H05B 33/14, 33/22, G02F 1/00

UZ, VC, VN, YU, ZA, ZM, ZW only): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(21) International Application Number: PCT/IB2003/004116

(72) Inventors; and
(75) Inventors/Applicants (for US only): BOERNER, Herbert, Friedrich [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE). JÜSTEL, Thomas [DE/DE]; c/o Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).

(22) International Filing Date: 23 September 2003 (23.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 02102402.1 1 October 2002 (01.10.2002) EP

(74) Agent: MEYER, Michael; Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).

(71) Applicant (for DE only): PHILIPS INTELLECTUAL PROPERTY & STANDARDS GMBH [DE/DE]; Stein-damm 94, 20099 Hamburg (DE).


(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (for AE, AG, AL, AM, AT, AU, AZ, BA, BB, BE, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CY, CZ, DK, DM, DZ, EC, EE, ES, FI, FR, GB, GD, GE, GH, GM, GR, HR, HU, ID, IE, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, SZ, TJ, TM, TN, TR, TT, TZ, UA, UG,

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: ELECTROLUMINESCENT DISPLAY WITH IMPROVED LIGHT OUTCOUPLING

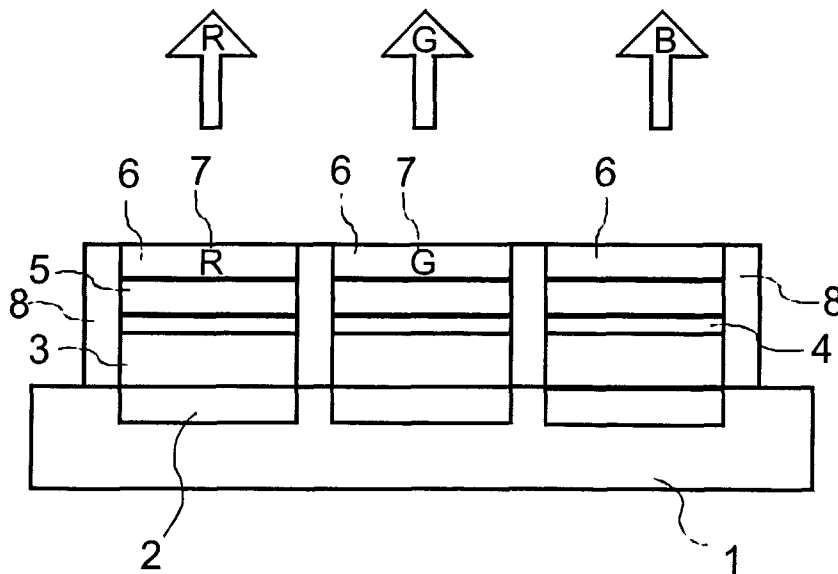

(57) Abstract: A full color electroluminescent display is disclosed, the display including a common substrate and an array of electroluminescent devices disposed on the common substrate, wherein each of said electroluminescent devices comprises an electroluminescent layer that is sandwiched between a first and a second electrode, a color converting material that is capable of changing light emitted by the electroluminescent layer into light having a longer wavelength and a stack of 2n + 1 transparent dielectric layers wherein n = 0, 1, 2, 3, ... and said transparent dielectric layers show alternating refractive indexes n. The electroluminescent display shows improved light outcoupling.

WO 2004/032576 A1



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

Electroluminescent display with improved light outcoupling

5

The present invention relates to an electroluminescent display comprising a common substrate and an array of electroluminescent devices disposed on the common substrate. In addition, the invention relates to an electroluminescent device.

Organic light emitting diodes (“OLEDs”) have been known for
10 approximately two decades. All OLEDs work on the same principles. One or more layers of semiconducting organic material are sandwiched between two electrodes. An electric voltage is applied to the device, causing negatively charged electrons to move into the organic material(s) from the cathode. Positive charge, typically referred to as holes, moves in from the anode. The positive and negative charges meet in the center
15 layers (i.e., the semiconducting organic material), combine, and produce a photon. The wavelength – and consequently the color – of the emitted light depend on the electronic properties of the organic material in which photons are generated. The organic material may comprise an organic electroluminescent polymer or small electroluminescent molecules. An OLED comprising an organic electroluminescent polymer is also referred
20 to as polymer light emitting diode (polyLED or PLED). An OLED comprising electroluminescent small molecules is also referred to as small molecule organic light emitting diode (SMOLED).

25

An organic light-emitting device is typically a laminate formed on a substrate such as glass. An electroluminescent layer, as well as adjacent semiconductor layers, is sandwiched between a cathode and an anode. The semiconductor layers may be hole-injecting and electron-injecting layers. A typical stack is described in „Philips Journal of Research, 1998, 51, 467”.

30

In a typical electroluminescent display, numerous electroluminescent

devices are formed on a single substrate and arranged in groups in a regular grid pattern. Addressing of the individual electroluminescent devices may be done in a passive mode or in a active mode. In a passive matrix electroluminescent display several electroluminescent devices forming a column of the grid may share a common cathode and several electroluminescent devices forming a row of the grid may share a common anode. The individual electroluminescent devices in a given group emit light when their cathodes and anodes are activated at the same time. In an active matrix electroluminescent display the individual electroluminescent devices comprise individual anode and/or cathode pads and are addressed individually.

10 In a full-color electroluminescent display, each electroluminescent device forms a sub-pixel of the display. Three neighboring sub-pixel emitting green, red and blue light form a pixel of the electroluminescent display. Known methods to obtain a full-color electroluminescent display include, for example, a method of color changing a blue emission. In such an electroluminescent display only a blue-emitting material is used in the electroluminescent layer of all electroluminescent devices. For a blue sub-pixel the light passes unchanged through the electroluminescent device whereas for the red or green sub-pixels the blue light is converted into red or green light, respectively, by a efficient color converting material such as a fluorescent material.

Passive matrix electroluminescent displays usually transmit the generated visible light through a transparent substrate whereas active matrix electroluminescent displays transmit light through a transparent cathode.

For efficiency reasons only metals are suitable cathode materials. To obtain a sufficient high conductivity, the metal layer needs to have a layer thickness of 10 to 30 nm that leads to low transmission of the generated visible light in an active matrix electroluminescent display.

It is an object of the present invention to provide an electroluminescent display comprising an array of electroluminescent devices with improved light outcoupling through a transparent cathode.

This object is achieved by an electroluminescent display comprising a

common substrate and an array of electroluminescent devices disposed on the common substrate, wherein each of said electroluminescent devices comprise an electroluminescent layer that is sandwiched between a first and a second electrode, a color converting material that is capable of changing light emitted by the electroluminescent layer into light having a longer wavelength and a stack of $2n + 1$ transparent dielectric layers wherein $n = 0, 1, 2, 3, \dots$,

said transparent dielectric layers having a high refractive index of $n > 1.7$ or a low refractive index of $n \leq 1.7$,

said transparent dielectric layers having a high refractive index n being arranged in alternating manner with said transparent dielectric layers having a low refractive index n ,

said stack of $2n + 1$ transparent dielectric layers being arranged adjacent to one of the electrodes and a dielectric transparent layer having a high refractive index n adjoining said electrode.

Since the dielectric layer adjoining the second electrode has a high refractive index n , reflection of visible light generated in the electroluminescent layer at the second, metallic electrode is reduced and more light passes the second electrode. With the help of the stack of transparent dielectric layers a Bragg-like optical filter is obtained. The transmission properties of the electroluminescent device can be adjusted with the help of this optical filter. Especially transmission of light or reflection of light can be adjusted in a wavelength selective manner.

The preferred transparent materials according to claim 2 and 3 show a high transmission for visible light.

A stack of transparent dielectric layers comprising the transparent dielectric materials according to claim 4 functions as an optical filter. It can be designed to show high transparency for blue light and high reflectance for red and green light and thus to enhance emission from the color converting material into forward direction.

The preferred embodiment according to claim 5 allows manufacture of large electroluminescent displays comprising large screen width.

With the preferred embodiments according to claim 6 the color converting material is placed very close but not in electrical contact with the

electroluminescent layer. The proximity keeps optical cross talk small. The electroluminescent layer emits light in a hemispherical way (Frenel distribution). By placing the color converting materials close to the emitter, more light rays at the outer edge of the hemisphere are still absorbed by the color converting material and do not reach adjacent sub-pixel units.

The materials as claimed in claim 7 efficiently convert blue light into light having a longer wavelength such as red, green, orange or yellow.

The invention also relates to an electroluminescent device comprising an electroluminescent layer which is sandwiched between a first and a second electrode, a color converting material which is capable of changing light emitted by the electroluminescent layer into light having a longer wavelength and a stack of $2n + 1$ transparent dielectric layers wherein $n = 0, 1, 2, 3, \dots$,

said transparent dielectric layers having a high refractive index of $n > 1.7$ or a low refractive index of $n \leq 1.7$,

said transparent dielectric layers having a high refractive index n being arranged in alternating manner with said transparent dielectric layers having a low refractive index n ,

said stack of $2n + 1$ transparent dielectric layers being arranged adjacent to one of the electrodes and a dielectric transparent layer having a high refractive index n adjoining said electrode.

The accompanying drawings, which are included to provide further understanding of the invention illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

25

In the drawings:

Fig. 1 illustrates a cross-sectional side view of several sub-pixels in a full color electroluminescent display according to an embodiment of the present invention.

Fig. 2 illustrates a cross-sectional side view of several sub-pixels in a full color electroluminescent display according to a further embodiment of the present invention.

30

Fig. 1 illustrates a cross-sectional side view of several sub-pixels in a full color electroluminescent display in accordance with a preferred embodiment of the present invention. The full color electroluminescent display includes a substrate 1. The substrate 1 is preferably from an opaque material because the electroluminescent display is an upwardly emitting device. Most preferred the opaque substrate 1 comprises silicon. An active matrix addressing system having pixelated electrodes is formed in the opaque substrate 1. A pixelated electrode of the active matrix addressing system forms the first electrode 2 of an electroluminescent device. An electroluminescent layer 3 is formed on the substrate 1 and the first electrodes 2. The electroluminescent layer 3 preferably emits blue light. A second transparent electrode 4 is formed on electroluminescent layer 3. A stack 5 of $2n + 1$ wherein $n = 0, 1, 2, 3 \dots \infty$ transparent dielectric layers is formed on top of the second electrode 4. The transparent dielectric layers comprise an alternating refractive index. The first group of transparent dielectric layers 9 comprises a high refractive index $n > 1.7$ and the second group transparent dielectric layers 10 comprises a low refractive index $n \leq 1.7$. The dielectric layer that is adjacent to the second electrode 4 comprises a refractive index $n > 1.7$. The first group of transparent dielectric layers 9 may be comprised of a material selected from the group consisting of TiO_2 , ZnS and SnO_2 . The second group of transparent dielectric layers 10 may be comprised of a material selected from the group consisting of SiO_2 , MgF_2 and alumino silicates.

A capping layer 6 is formed on top of the stack 5 of transparent dielectric layers that is transparent and impervious to moisture and/or organic solvents. Capping layer 6 may be comprised of a polymeric material such as polymethylmethacrylate, polystyrene, silicone, epoxy resin or teflon. In addition, Capping layer 6 may be comprised of a SiO_2 sol-gel-layer. Color converting materials 7 capable of converting blue light into green or red light are embedded in capping layer 6 in a pixel pattern. The pixel pattern is in alignment with the pixelated pattern of the first electrode 2 in the substrate 1. In a blue-emitting sub-pixel, capping layer 6 does not contain a color converting material 7 and is only comprised of the polymeric material or SiO_2 .

In order to minimize color contamination it is preferred that the electroluminescent display comprises an array of parallel walls 8 to laterally separate

each sub-pixel element. The parallel walls 8 may be comprised of glass. It may be preferred that the parallel walls 8 are colored by graphite particles.

Fig. 2 shows another preferred embodiment in which the color converting materials 7 are disposed onto the capping layer 6 in a pixelated manner.

- 5 Again, a blue-emitting sub-pixel does not contain color converting material 7. In this preferred embodiment, several sub-pixels share a common second electrode 4.

In another preferred embodiment a ceramic translucent layer of the color converting material 7 forms capping layer 6 in a red- emitting or green-emitting sub-pixel. A blue-emitting sub-pixel contains a glass plate as capping layer 6. In General, it
10 is possible that the electroluminescent display does not only comprise red, green and blue sub-pixel but also yellow or orange sub-pixels.

The color converting materials 7 show a strong absorption between 350 and 500 nm and an emission between 520 and 550 nm for green or an emission between 600 and 650 nm for red. In addition, the color converting materials 7 have high (>
15 90 %) fluorescence quantum efficiencies. Suitable color converting materials 7 may comprise inorganic phosphors. Inorganic phosphors are especially suitable for environments with high optical flux and/or higher temperatures. Suitable color converter materials 7 may also comprise organic fluorescent materials. Organic fluorescent materials are especially suitable for environments with less optical flux and
20 ambient temperatures. In addition, quantum dots like CdS, CdSe or InP may be used. The emission spectra of the quantum dots can be controlled and adjusted by their size. Table 1 lists suitable color converting materials 7 for down-conversion of blue light.

Table1: Suitable color converting materials 7 for down-conversion of blue light

Color converting material	Emission color	Emission wavelength [nm]
(Ba,Sr) ₂ SiO ₄ :Eu	green	525
SrGa ₂ S ₄ :Eu	green	535
CaS:Ce	green	520
Ba ₂ ZnS ₃ :Ce,K	green	525
Lumogen yellow ED206	yellow	555
(Sr,Ca) ₂ SiO ₄ :Eu	yellow	575
Y ₃ Al ₅ O ₁₂ :Ce	yellow	570
(Y,Gd) ₃ (Al,Ga) ₅ O ₁₂ :Ce	yellow	575
Lumogen F orange 240	orange	545, 575

SrGa ₂ S ₄ :Pb	orange	595
Sr ₂ Si ₅ N ₈ :Eu	red	610
SrS:Eu	red	610
Lumogen F red 300	red	615
Ca ₂ Si ₅ N ₈ :Eu	red	605
Ba ₂ Si ₅ N ₈ :Eu	red	640
CaSiN ₂ :Eu	red	620
CaS:Eu	red	650

Ink jet printing can do application of the color converting materials 7 onto capping layer 6 in an electroluminescent display according to Fig. 2. This method is especially suitable for organic fluorescent materials and inorganic phosphors if the grain size of the latter is small enough. For some inorganic phosphors also vapor deposition processes are applicable. In general, printing with micro-stencils is an option for all materials.

In case the color converting materials 7 are embedded into capping layer 6 a monomeric precursor of the material used in capping layer 6 is mixed with the color converting material 7. After application the obtained mixture is polymerized by thermal or photochemical initiation.

Fig. 3 shows an enlarged view of the stack 5 of transparent layers. As mentioned above the layers of the first group of transparent dielectric layers 9 alternate with layers of the second group of transparent dielectric layers 10.

Fig. 4 shows the transmission curve of a 15 nm silver layer that is covered by a stack 5 of nineteen layers that in alternating manner comprise ZnS and MgF₂. The stack 5 of transparent dielectric layers shows a high transparency in the blue region of the visible spectra and high reflectance for the green and the red regions of the visible light. This measure enhances light emission from the color converting material-containing layer into the forward direction. With the help of the stack 5 of transparent dielectric layers the red and the green light is reflected immediately so that it gets not further into the device. On the other hand the stimulating blue light passes the stack 5 of transparent dielectric layers almost without losses.

CLAIMS:

1. An electroluminescent display comprising a common substrate and an array of electroluminescent devices disposed on the common substrate, wherein each of said electroluminescent devices comprise an electroluminescent layer which is sandwiched between a first and a second electrode, a color converting material which is
5 capable of changing light emitted by the electroluminescent layer into light having a longer wavelength and a stack of $2n + 1$ transparent dielectric layers wherein $n = 0, 1, 2, 3, \dots,$
said transparent dielectric layers having a high refractive index of $n > 1.7$ or a low refractive index of $n \leq 1.7,$
10 said transparent dielectric layers having a high refractive index n being arranged in alternating manner with said transparent dielectric layers having a low refractive index $n,$
said stack of $2n + 1$ transparent dielectric layers being arranged adjacent to one of the electrodes and a dielectric transparent layer having a high refractive index
15 n adjoining said electrode.
2. An electroluminescent display as claimed in claim 1, wherein said transparent dielectric layers having a refractive index $n > 1.7$ is selected from the group consisting of TiO_2, ZnS and $\text{SnO}_2.$
20
3. An electroluminescent display as claimed in claim 1, wherein said transparent dielectric layers having a refractive index $n \leq 1.7$ is selected from the group consisting of $\text{SiO}_2, \text{MgF}_2$ and alumino silicates.
25

4. An electroluminescent display as claimed in claim 1, wherein said transparent dielectric layers having a high refractive index n is ZnS and said transparent dielectric layers having a low refractive index n is MgF₂.
- 5 5. An electroluminescent display as claimed in claim 1, wherein said electroluminescent device is an active matrix device having a pixelated first electrode.
6. An electroluminescent display as claimed in claim 1, wherein a capping layer is placed adjacent to the second electrode and wherein the color converter
10 material is embedded in or placed on top of the capping layer.
7. An electroluminescent display as claimed in one of the claims 1 to 6, wherein the color converting material is selected from the group consisting of
(Ba,Sr)₂SiO₄:Eu, SrGa₂S₄:Eu, CaS:Ce, Ba₂ZnS₃:Ce,K, Lumogen yellow ED206,
15 (Sr,Ca)₂SiO₄:Eu, (Y,Gd)₃(Al,Ga)₅O₁₂:Ce, Y₃Al₅O₁₂:Ce, Lumogen F orange 240, SrGa₂S₄:Pb, Sr₂Si₅N₈:Eu, SrS:Eu, Lumogen F red 300, Ba₂Si₅N₈:Eu, Ca₂Si₅N₈:Eu CaSiN₂:Eu and CaS:Eu.
8. An electroluminescent device comprising an electroluminescent layer
20 which is sandwiched between a first and a second electrode, a color converting material which is capable of changing light emitted by the electroluminescent layer into light having a longer wavelength and a stack of $2n + 1$ transparent dielectric layers wherein $n = 0, 1, 2, 3, \dots$,
said transparent dielectric layers having a high refractive index of $n > 1.7$
25 or a low refractive index of $n \leq 1.7$,
said transparent dielectric layers having a high refractive index n being arranged in alternating manner with said transparent dielectric layers having a low refractive index n ,
said stack of $2n + 1$ transparent dielectric layers being arranged adjacent
30 to one of the electrodes and a dielectric transparent layer having a high refractive index n adjoining said electrode.

1/2



FIG. 1

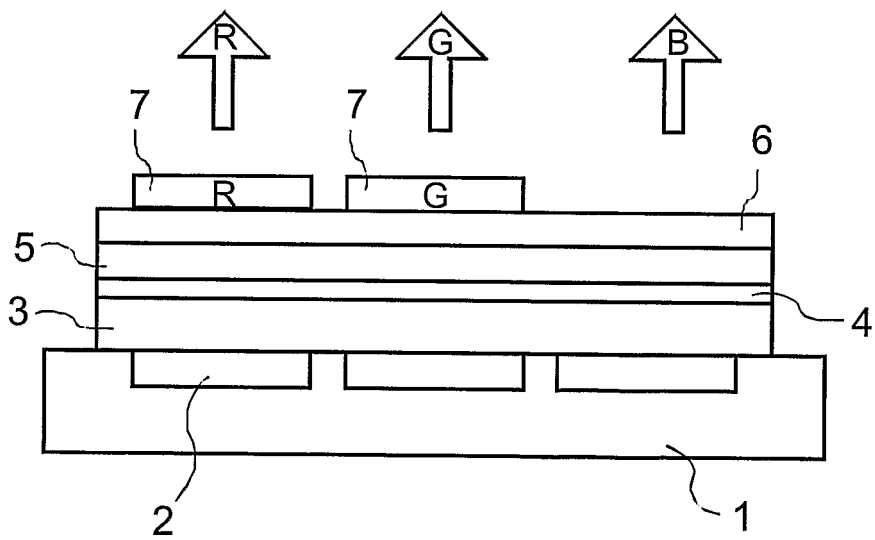


FIG. 2

2/2

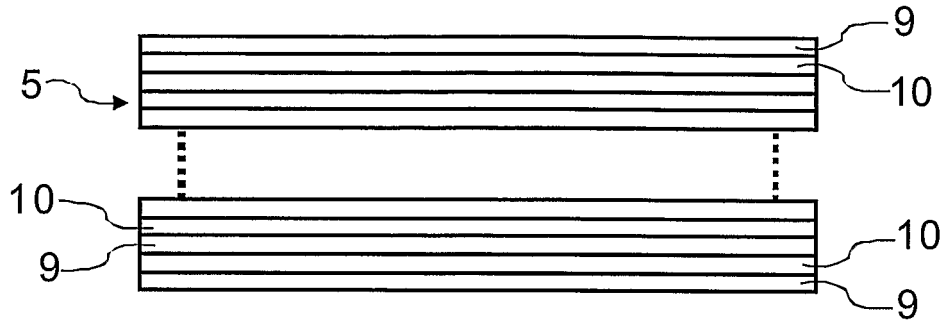


FIG. 3

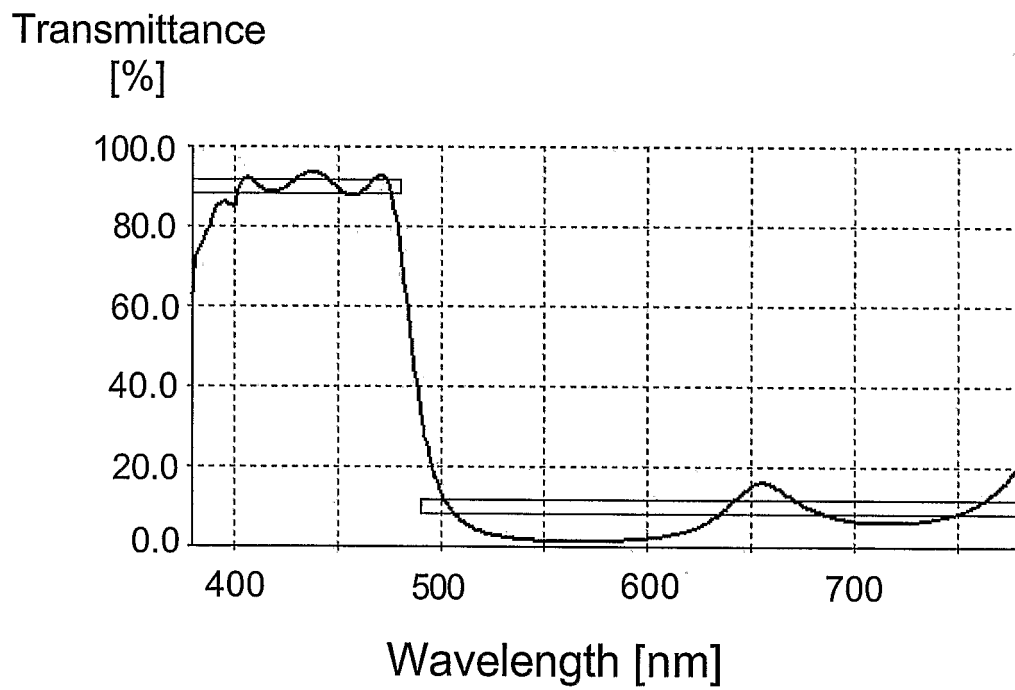


FIG. 4

INTERNATIONAL SEARCH REPORT

International tion No
PCT/IB 4116

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H05B33/14 H05B33/22 G02F1/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H05B G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 272 760 A (PHILIPS NV) 29 June 1988 (1988-06-29) column 5, line 20 -column 6, line 28 claims 5,6 ---	1-8
X	US 5 003 221 A (SHIMIZU YASUMOTO) 26 March 1991 (1991-03-26) examples ---	1-8
X	US 5 804 918 A (YONEKAWA TOMOHIRO ET AL) 8 September 1998 (1998-09-08) column 3, line 66 -column 4, line 63 example 4 ---	1-8
A	US 6 091 195 A (FORREST STEPHEN R ET AL) 18 July 2000 (2000-07-18) column 6, line 22-26 -----	1-3,8

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

9 January 2004

Date of mailing of the international search report

19/01/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Doslík, N

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 03/04116

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0272760	A	29-06-1988	AT 86765 T 15-03-1993
			AU 8293187 A 30-06-1988
			CN 87105954 A ,B 06-07-1988
			DE 3784660 D1 15-04-1993
			DE 3784660 T2 09-09-1993
			EP 0272760 A1 29-06-1988
			JP 2032776 C 19-03-1996
			JP 7069541 B 31-07-1995
			JP 63172120 A 15-07-1988
			US 4822144 A 18-04-1989
US 5003221	A	26-03-1991	JP 1194292 A 04-08-1989
US 5804918	A	08-09-1998	JP 9134788 A 20-05-1997
US 6091195	A	18-07-2000	AU 5621598 A 17-07-1998
			EP 0956741 A1 17-11-1999
			JP 2001507503 T 05-06-2001
			TW 379514 B 11-01-2000
			WO 9828947 A1 02-07-1998
			US 6650045 B1 18-11-2003

专利名称(译)	电致发光显示器具有改进的光输出耦合		
公开(公告)号	EP1550356A1	公开(公告)日	2005-07-06
申请号	EP2003799000	申请日	2003-09-23
[标]申请(专利权)人(译)	皇家飞利浦电子股份有限公司		
申请(专利权)人(译)	飞利浦知识产权及标准部GMBH 皇家飞利浦电子N.V.		
当前申请(专利权)人(译)	飞利浦知识产权及标准部GMBH 皇家飞利浦电子N.V.		
[标]发明人	BOERNER HERBERT FRIEDRICH		
发明人	BOERNER, HERBERT FRIEDRICH JÜSTEL, THOMAS, PHILIPS INT. PROP. & STAND. GMBH		
IPC分类号	C09K11/08 C09K11/66 C09K11/77 G02F1/00 H01L27/32 H01L33/00 H01L51/52 H05B33/14 H05B33/22		
CPC分类号	C09K11/7718 C09K11/0883 C09K11/663 C09K11/7716 C09K11/7729 C09K11/7734 C09K11/7774 C09K11/7786 H01L27/322 H01L27/3244 H01L51/5253 H01L51/5262 H01L51/5284 H01L2251/5315 H05B33/14 H05B33/22		
优先权	2002102402 2002-10-01 EP		
外部链接	Espacenet		

摘要(译)

本发明公开了一种全彩色电致发光显示器，该显示器包括公共基板和设置在公共基板上的电致发光器件阵列，其中每个所述电致发光器件包括夹在第一和第二电极之间的电致发光层，颜色转换能够将由电致发光层发射的光变成具有更长波长的光和叠加 $2n + 1$ 个透明介电层的材料，其中 $n = 0, 1, 2, 3, \dots$ ，并且所述透明介电层显示交替折射索引电致发光显示器显示出改善的光输出耦合。