



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication: **05.03.2003 Bulletin 2003/10** (51) Int Cl.<sup>7</sup>: **C09K 11/06, H05B 33/14**

(21) Application number: **02078395.7**

(22) Date of filing: **16.08.2002**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
IE IT LI LU MC NL PT SE SK TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

• **Shi, Jianmin, c/o Eastman Kodak Company  
Rochester, New York 14650-2201 (US)**  
• **Vaeth, Kathleen M.,  
c/o Eastman Kodak Company  
Rochester, New York 14650-2201 (US)**

(30) Priority: **28.08.2001 US 941120**

(74) Representative: **Parent, Yves et al  
KODAK INDUSTRIE,  
Département Brevets,  
CRT - Zone Industrielle  
71102 Chalon-sur-Saône Cedex (FR)**

(71) Applicant: **EASTMAN KODAK COMPANY  
Rochester, New York 14650 (US)**


(72) Inventors:  
• **Zheng, Shiyong, c/o Eastman Kodak Company  
Rochester, New York 14650-2201 (US)**

(54) **Electroluminescent devices having diarylanthracene polymers**

(57) An electroluminescent device comprises an anode, a cathode, and an emissive layer having a polymer luminescent material disposed between the anode and cathode, the polymer luminescent material includes diarylanthracene-based conjugated polymer having a repeating unit of the following formula:

wherein:

Ar<sup>1</sup>, Ar<sup>2</sup>, and Ar are each individually aryl or substituted aryl of from 6 to 40 carbon atoms; or Ar<sup>1</sup>, Ar<sup>2</sup>, and Ar are each individually substituted heteroaryl or unsubstituted heteroaryl having 4 to 40 carbons.



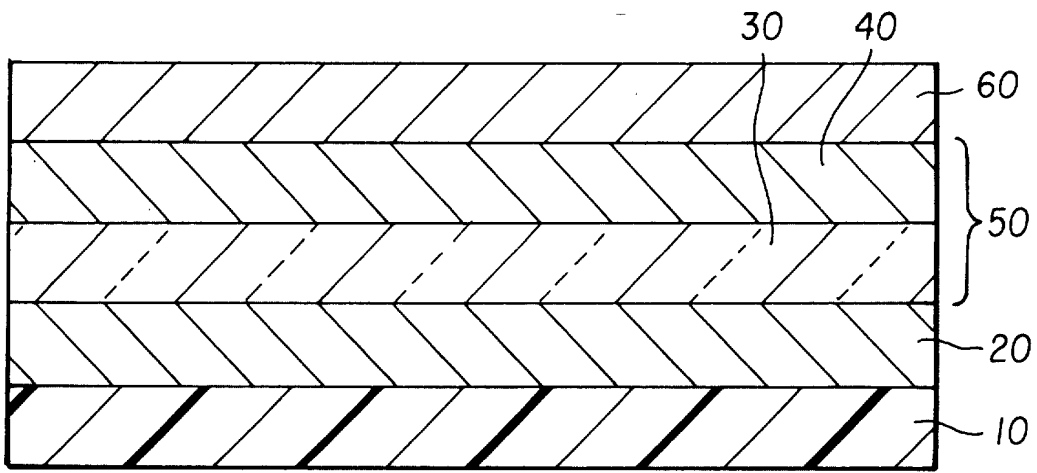


FIG. 1

## Description

[0001] The present invention relates to electroluminescent (EL) devices having diarylanthracene polymers.

[0002] Electroluminescent (EL) devices such as light emitting diode (LED) are opto-electronic devices which radiate light on the application of an electrical field. Organic materials including both polymers and small molecules have been used to fabricate LEDs. LEDs fabricated from these materials offer several advantages over other technologies, such as simpler manufacturing, low operating voltages, and the possibility of producing large area and full-color displays. Organic polymers generally offer significant processing advantages over small molecules especially for large area EL display because polymer films can be easily produced by casting from solution.

[0003] Conjugated polymers are a class of polymers that possess an extended  $\pi$ -bond network along polymer main chain. Their electronic states can delocalize caused by the effect of the electron-lattice and electron-electron interactions. Conjugated polymers such as poly(phenylvinylene) (PPV) were first introduced as EL materials by Burroughes and others in 1990 (Burroughes, J. H. *Nature* 1990, 347, 539-41). To improve the polymer solubility, dialkoxy-substituted PPV such as poly(2,5-dialkoxy-p-phenylenevinylene) and MEH-PPV, poly[2-methoxy-5-(2'-ethyl-hexoxyl)-p-phenylenevinylene] have been developed. EL efficiency has been improved by balanced electron-hole injection and recombination of the charge carriers. Other conjugated polymers such as polydialkylfluorene (PF) (Ohmori, Y. and others *Jpn. J. Appl. Phys. Part 2* 1991, 20, L1941-L1943), poly(p-phenylene) (PPP) (Grem, G. and others *Adv. Mater.* 1992, 4, 36-7), and poly(thiophene) (Ohmori, Y. and others *Solid State Commun.* 1991, 80, 605) have also been studied.


[0004] The light-emitting layer of an EL device comprises a highly luminescent material where electroluminescence is produced as a result of electron-hole pair recombination in this region. In order to achieve efficient light output the efficient and highly fluorescent materials are required. 9,10-Diaryl substituted anthracenes are well known for their high fluorescence efficiency. The highly efficient light output and high operational stability of EL devices have been disclosed in commonly assigned US-A-5,935,721 and US-A-5,972,247 by using substituted anthracenes as light-emitting materials.

[0005] It is an object of the present invention to provide luminescent polymeric materials useful for polymer EL devices.

[0006] It is a further object of the present invention to provide various energy bandgap luminescent polymers which emit broad range of color.

[0007] A new class of anthracene-based polymers has been discovered for use in electroluminescent devices.

[0008] These objects are achieved in an electroluminescent device comprises an anode, a cathode, and an emissive layer having a polymer luminescent material disposed between the anode and cathode, the polymer luminescent material includes diarylanthracene-based conjugated polymer having a repeating unit of the following formula:



wherein:

Ar<sup>1</sup>, Ar<sup>2</sup>, and Ar are each individually aryl or substituted aryl of from 6 to 40 carbon atoms; or

Ar<sup>1</sup>, Ar<sup>2</sup>, and Ar are each individually substituted heteroaryl or unsubstituted heteroaryl having 4 to 40 carbons.

[0009] The present invention provides light-emitting materials with a number of advantages that include good solubility, efficiency and stability. The emitting color of the polymer can be easily tuned by the incorporation of desired Ar group. Furthermore, other electro-optical properties can also be tuned with Ar group. The materials from the present invention can also be used as host materials for other light emitting materials.

FIG. 1 illustrates in cross-section a bi-layer EL device which can use a polymer in accordance with the present invention;

FIG. 2 illustrates a cross-section of a modified bi-layer EL device which can use a polymer in accordance with the present invention;

FIG. 3 illustrates a cross-section of a single-layer EL device which can use a polymer in accordance with the present invention;

FIG. 4 illustrates the absorption, emission, and photoluminescence spectra of polymer 17;


# EP 1 288 276 A1

FIG. 5 illustrates the absorption, emission, and photoluminescence spectra of polymer 20;  
FIG. 6 illustrates the absorption, emission, and photoluminescence spectra of polymer 4; and  
FIG. 7 illustrates the electroluminescence spectra of single-layer EL device fabricated from polymers 17 and 20.

5 **[0010]** The present invention provides light emitting polymers containing diarylanthracene with good solubility and thermal stability as shown in formula I. The rigid chromophore in the polymer main chain increases the rigidity of the polymer backbone and improves thermal properties. Polymers containing such chromophore are highly fluorescent and efficient light emitting materials. Incorporation of the Ar group has the following features:

- 10 1) to further improve solubility of the polymer;  
2) to achieve balanced electron-hole injection and recombination of the charge carriers;  
3) to improve electron or hole transporting ability; and  
4) to improve the emitting hue of the polymer.

15 **[0011]** The polymer shown in formula I is a homopolymer or a copolymer containing a diarylanthracene repeating unit.

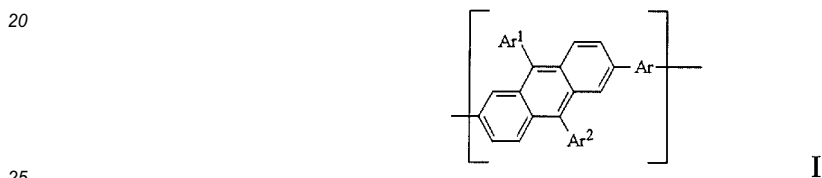


wherein:

- 30 Ar<sup>1</sup>, Ar<sup>2</sup>, and Ar are each individually aryl or substituted aryl of from 6 to 40 carbon atoms; or  
Ar<sup>1</sup>, Ar<sup>2</sup>, and Ar are each individually substituted heteroaryl or unsubstituted heteroaryl having 4 to 40 carbons;

**[0012]** For example, Ar<sup>1</sup> and Ar<sup>2</sup> individually represent



55



or




15

wherein: R is a substituent including hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 carbon atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 carbons, or a cyano group, a nitro group, a chlorine, bromine, or a fluorine atom;

[0013] Ar represents the following groups:

20

Group 1:




30

wherein: R is a substituent including hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 carbon atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 carbons, or a cyano group, a nitro group, a chlorine, bromine, or a fluorine atom; and m is an integer from 1 to 3;


35

Group 2:




45

Group 3:



Group 4:


5



10

Group 5:


15



20

Group 6:


25



30

Group 7:


35



40

Group 8:

45




50

55

Group 9:


5



10

15

Group 10:




20

wherein: X is an O or S atom;

25

Group 11:

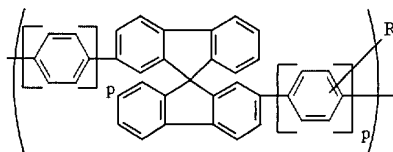


30

wherein:  $p$  is an integer from 0 to 2;

35


Group 12:



40

45

Group 13:




50

55

Group 14:


5



10

Group 15:

15




20

wherein: X<sub>1</sub> is an O atom or two cyano groups;

Group 16:

25




30

wherein: R<sub>1</sub> is a substituent including hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 carbon atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 carbons;

35

Group 17:




40

wherein: X<sub>2</sub> is a nitrogen or carbon atom;

45

Group 18:


50



55

Group 19


5



10

Group 20:


15



20

Group 21:


25



30

Group 22:


35

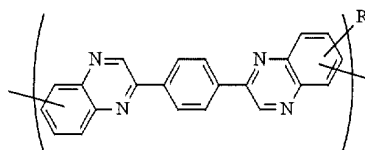

40


Group 23:

45



50

Group 24:




55

wherein:  $R_1$  is defined as above, and  $p$  is an integer from 0 to 2.

Group 25:

5




10

wherein: Ar<sup>3</sup> is defined as Ar, R<sub>2</sub> and R<sub>3</sub> are each independently hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 atoms, or a cyano group. Preferably, R<sub>2</sub> and R<sub>3</sub> are hydrogen, or a cyano group; p is an integer from 0 to 2.

15

**[0014]** The following molecular structures constitute specific examples of preferred polymers satisfying the requirement of this invention:

20




25

polymer 1

30

35

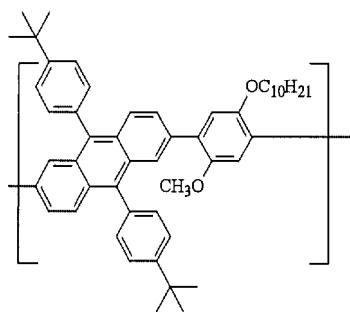

40


45

polymer 2

50

55

5




10

polymer 3

15

20

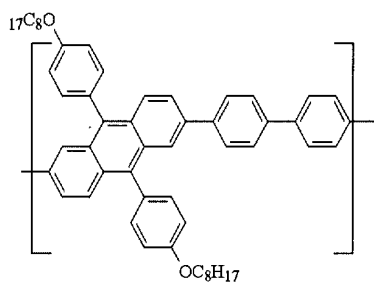


25

polymer 4

30

35

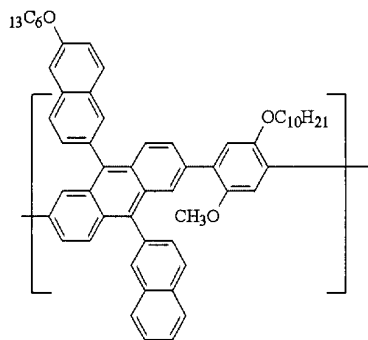

40


45

polymer 5

50

55

5

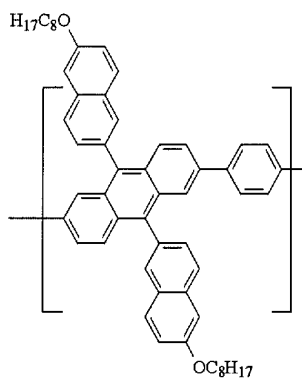


10

15

polymer 6

20

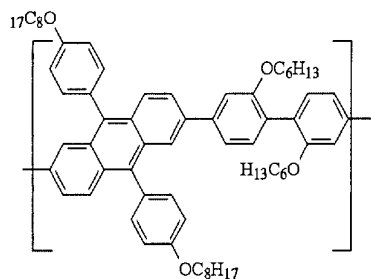


25

30

polymer 7

35



40


45

polymer 8

50

55

5

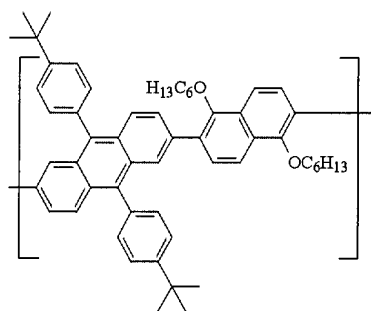


10

polymer 9

15

20




25

polymer 10

30

35

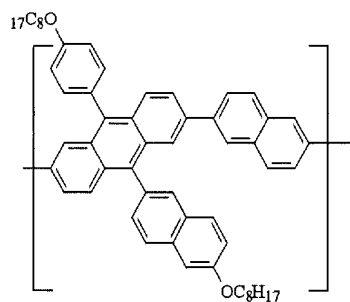

40

polymer 11


45

50

55

5

10

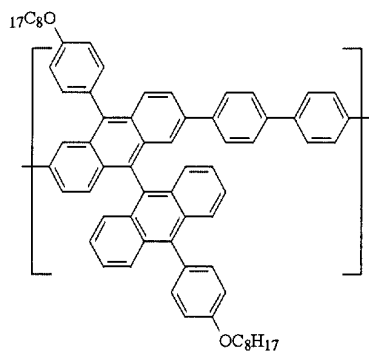


15

polymer 12

20

25

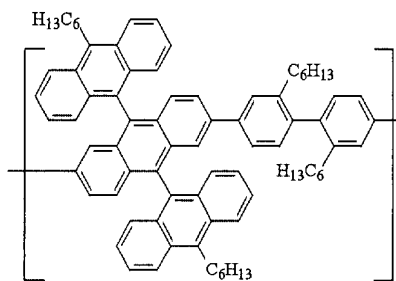

30


polymer 13

35

40

45


50

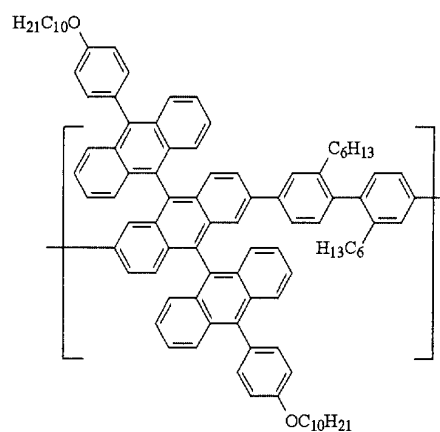

55

polymer 14


5

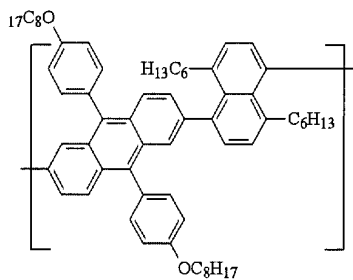

polymer 15

15

20

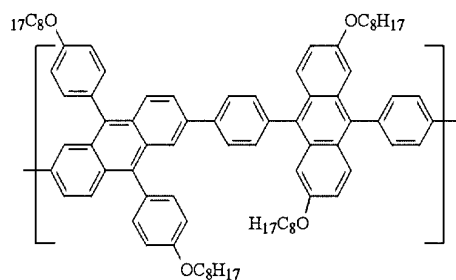


polymer 16

25

30

35



polymer 17

40


45

50

55

5

10

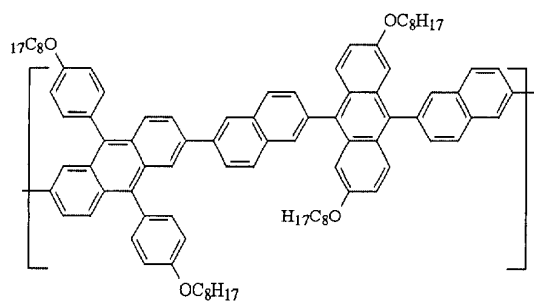


15

polymer 18

20

25

30

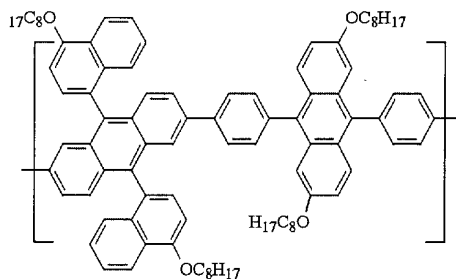


polymer 19

35

40

45



polymer 20


50

55

5

10

15

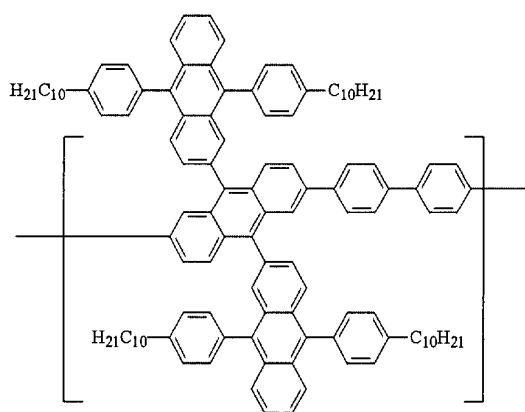


polymer 21

20

25

30

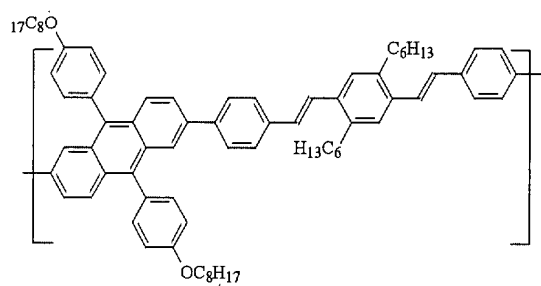


polymer 22

35

40

45


50

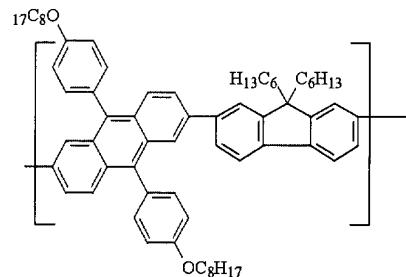

polymer 23

55

5

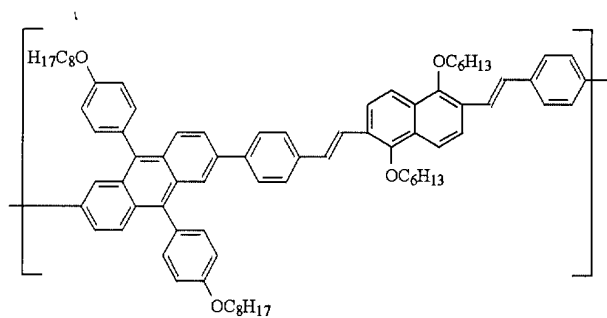


10

15

polymer 24

20

25

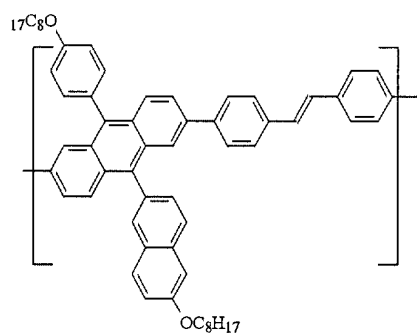


30

35

polymer 25

40

45

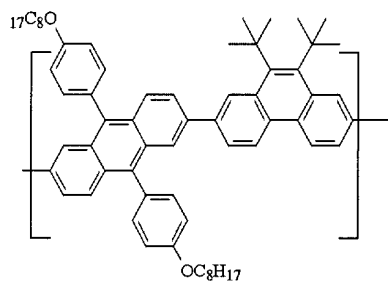

50


55

polymer 26



5

10

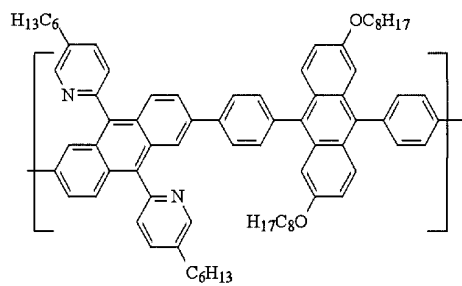


polymer 30

15

20

25

30

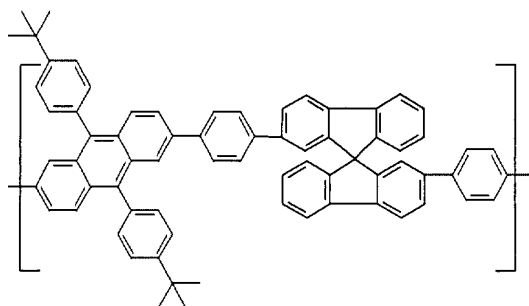


polymer 31

35

40

45

50

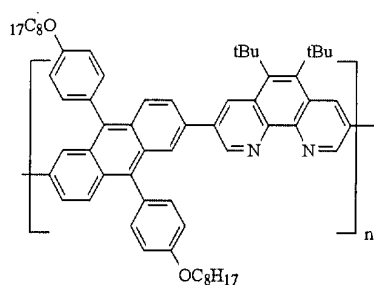


polymer 32

55

5

10




polymer 33

15

20

25

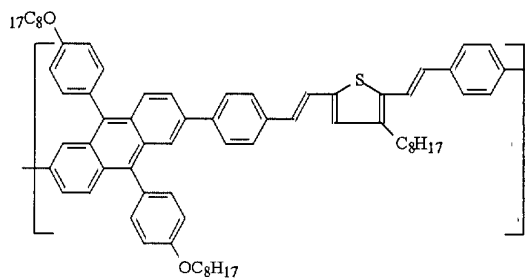


polymer 34

30

35

40

45




polymer 35

50

55

5

10

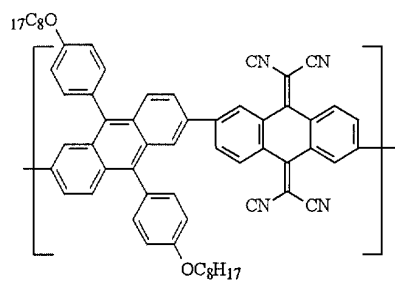


polymer 36

15

20

25

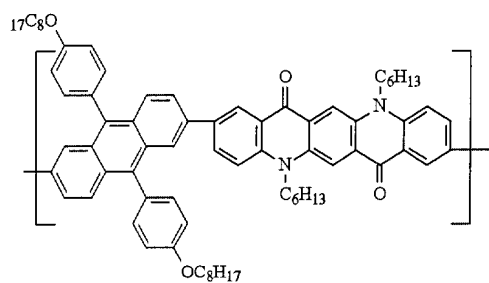


polymer 37

30

35

40


45

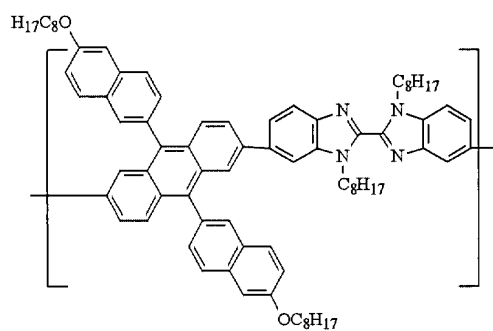


polymer 38

50


55

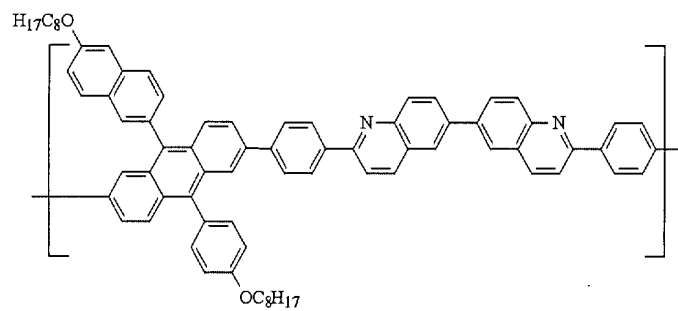


polymer 39

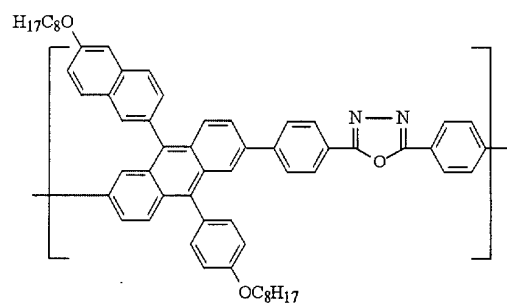


polymer 40

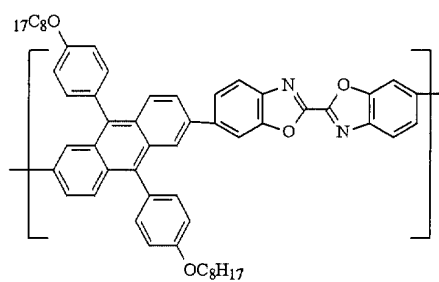


polymer 41

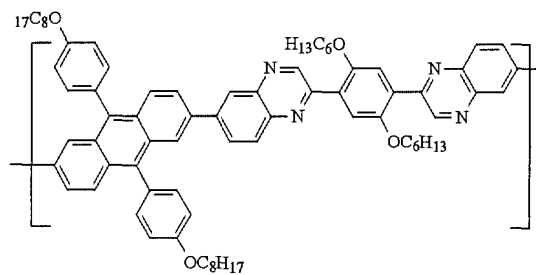

polymer 42

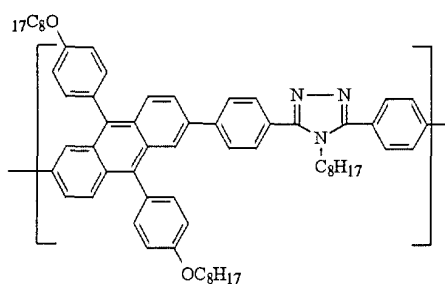


polymer 43

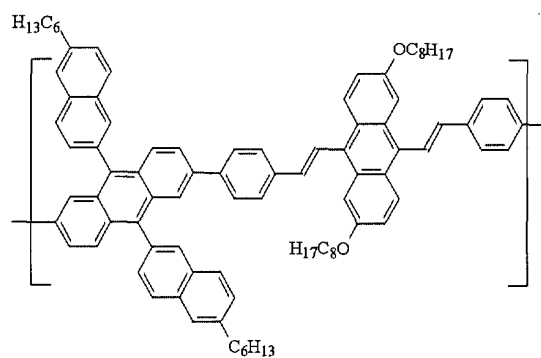

polymer 44

[0015] In formula I:



[0016] Ar can be one or the combination of more than one of the above divided groups. The specific molecular structures can be the combination of any of the above drawn structures.

[0017] The polymerization method and the molecular weights of the resulting polymers used in the present invention are illustrative only. The polymers may be prepared by condensation polymerizations, preferably by cross-coupling reactions such as the Pd-catalyzed Suzuki coupling reaction. Such a reaction was first reported by Suzuki and others on the coupling of aromatic boronic acid derivatives with aromatic halides (Suzuki, A. and others *Synthetic Comm.* 1981, 11(7), 513). A modified process was reported by Inbasekaran and others to prepare conjugated polymers for EL devices (Inbasekaran, M. and others US-A-5,777,070). According to the present invention, the above mentioned polymers were prepared by Suzuki coupling reaction of an aromatic diboronic acid ester with an aromatic dibromide. The synthetic schemes for polymers and monomers are illustrated in Schemes 1-3.

[0018] FIG. 1 illustrates the basic structure used to construct organic EL devices. It is a bi-layer structure including a hole transport layer 30 and an electron transport layer 40. The electron transport layer 40 is also the emissive layer from which electroluminescence originates. Together they form the EL medium 50. The anode layer 20 is adjacent to the hole transport layer 30 and the cathode 60 is adjacent to the electron transport layer 40. The substrate is layer 10. This figure is for illustration only and the individual layer thickness is not scaled according to the actual thickness.

[0019] FIG. 2 illustrates an alternative construction of the EL device. It is a modified bi-layer structure. The EL medium contains an emissive layer between the hole transport layer and the electron transport layer. This emissive layer is the layer where electroluminescence originates. Thus, layer 300 is the hole transport layer, layer 400 is the emissive layer, layer 500 is the electron transport layer, and together they form the electroluminescent medium 600. Layer 200 is the anode and layer 700 is the cathode. The substrate is layer 100. This figure is for illustration only and the individual layer thickness is not scaled according to the actual thickness.

[0020] The bi-layer EL devices are the basic structure providing high luminous efficiency and low operating voltage. Alternative EL device structures have been demonstrated to provide improved device performance. These alternative structures include features in addition to the basic bi-layer structure such as the following structure a) hole injection layer as disclosed in the commonly-assigned US-A-4,356,429; b) cathode modification with alkaline or alkaline halides as disclosed in the commonly-assigned US-A-5,776,622; c) anode modification with plasma-deposited fluorocarbons; and d) doped emitter layer inserted between the hole transport and electron transport layer as disclosed in the commonly-assigned US-A-4,769,292.

[0021] FIG. 3 illustrates another alternative construction of an EL device. It is a single-layer structure comprising an emitting layer 3000, sandwiched between an anode 2000 and a cathode 4000. The emitting layer 3000 also acts as a charge carrier layer. Thus, single layer 3000 is the electroluminescent medium. The substrate is layer 1000. This figure is for illustration only and the individual layer thickness is not scaled according to the actual thickness.


[0022] A preferred EL device structure of this invention is a single-layer structure including an anode, a cathode, and single layer of electroluminescent medium. This electroluminescent layer is the emissive layer, and is also capable of transporting electrons as well as holes. The principal function of this layer is to provide efficient emissive centers for electroluminescence. This layer can include one of the above-mentioned polymers or the blend of two or more polymers; or polymers doped with one or more fluorescent dyes (FD), phosphorescent materials, or other light-emitting material; or the above-mentioned polymers used as dopants for other EL materials; or the above-mentioned polymers finely distributed in a non-EL polymer, such as in the matrix of a thermoplastic polymer. Such distribution can improve the processing and physical properties of the polymers.

[0023] The fluorescent dye is usually present in an amount on the order of a few molar percent or less of the host polymer and it is sufficient to cause the EL emission to be predominantly that of the fluorescent dye. Using this method, highly efficient EL devices can be constructed. Simultaneously, the color of the EL devices can be tuned using fluorescent dyes of different emission wavelengths. By using a mixture of fluorescent dyes, EL color characteristics of the combined spectra of the individual fluorescent dyes are produced. This dopant scheme has been described in considerable detail for EL devices in the commonly-assigned US-A-4,769,292. An important criterion for choosing a fluorescent dye as a dopant capable of modifying the hue of light emission when present in a host material is a comparison of their energy bandgap. For efficient energy transfer from the host to the dopant molecule, a necessary condition is that the energy band gap of the dopant is smaller than that of the host polymer. For efficient energy transfer from the host to phosphorescent dopants, the criterion is that the triplet energy of the host is larger than that of the dopants. Preferred fluorescent dyes used as the dopant in the emissive layer include but are not limited to coumarins, stilbenes, distyrylstilbenes, anthracene derivatives, tetracene, perlenes, rhodamines, and arylamines. Preferred phosphorescent dopants include but are not limited to organometallic iridium, platinum, palladium, or osmium compounds.

[0024] The molecular structures of the preferred fluorescent dyes for the emissive layer in the EL device are listed as follows:

EP 1 288 276 A1

5




10 FD 1 R=H

FD 2 R=CO<sub>2</sub>Pr-i

15


20



FD 3 R=H, R'=t-Bu

25 FD 4 R=R'=t-Bu

30




35

FD 5

40

45




FD 6

50

55

5




10

FD 7

15

20



25

FD 8 R=H


FD 9 R=Me

FD 10 R=Pr-i

30

FD 11 R=2-ethylhexyl

35



40

FD 12 R<sub>1</sub>=R<sub>2</sub>=Me, X=O

45

FD 12 R<sub>1</sub>=R<sub>2</sub>=Me, X=O

FD 13 R<sub>1</sub>=R<sub>2</sub>=hexyl, X=O

FD 14 R<sub>1</sub>=R<sub>2</sub>=phenyl, X=O

50


FD 15 R<sub>1</sub>=R<sub>2</sub>=Me, X=S

FD 16 R<sub>1</sub>=R<sub>2</sub>=hexyl, X=S

55

FD 17 R<sub>1</sub>=R<sub>2</sub>=phenyl, X=S

5



10

FD 18 R=n-hexyl

FD 19 R=phenyl

15

**[0025]** The above-mentioned polymers can be deposited as high quality transparent thin films by spin-coating or inkjet printing the polymer solutions. Preferably, the spin-coating technique is used to form layer 3000, and preferably, only one polymer is deposited as single layer of electroluminescent medium.

20

**[0026]** Preferred materials are used in forming the anode modified with fluorocarbons. The anode can also be modified by a conducting polymer such as poly(3,4-ethylene dioxythiophene) (PEDOT) (Groenendaal, L. and others *Adv. Mater.* 2000, 12, 481). Preferred materials for use in forming the cathode of the EL devices of this invention are Mg, Li, or alloys of these materials as disclosed in US-A-5,429,884 (Namiki and others) and the commonly-assigned US-A-5,776,622.


### EXAMPLES

25

**[0027]** The invention and its advantages are further illustrated by the following specific examples:

**[0028]** Monomers to be used in the present invention are illustrative only. Any monomers can be used as long as the polymer formed satisfies the general formula:

30



35

Typical monomer and polymer synthesis is illustrated in Schemes 1-3.

40

45


50

55


## Synthesis of Monomers

[0029]

5




10

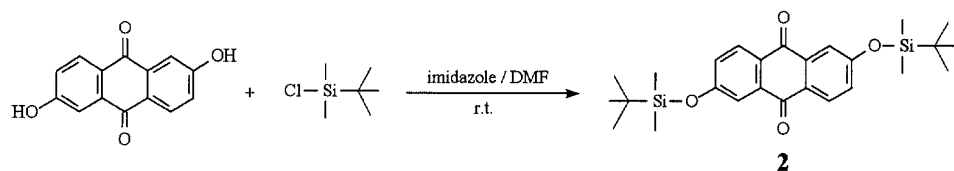


15

20

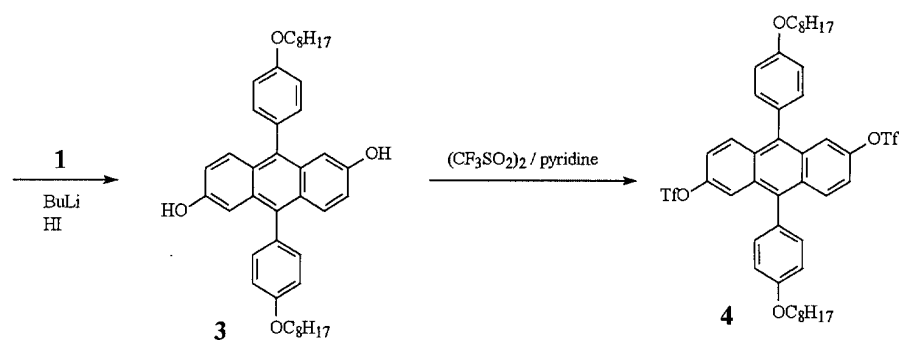

25

30

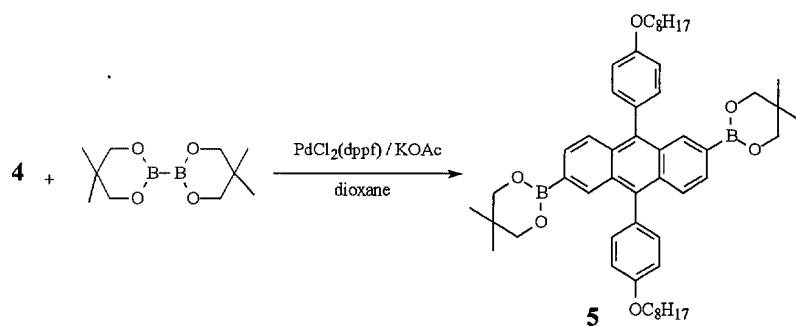

35


40

45


50

55

## Scheme 1

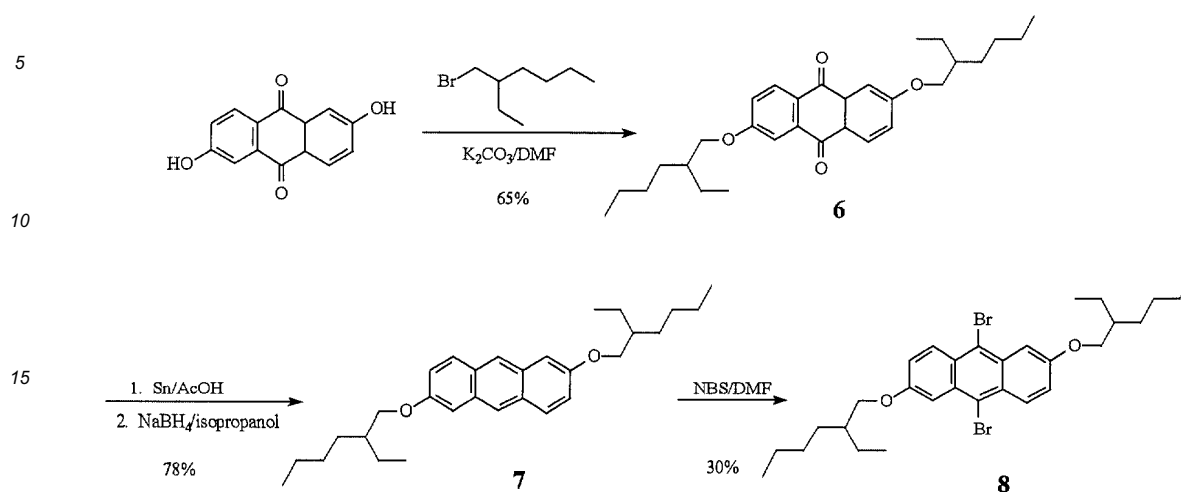

## Scheme 2

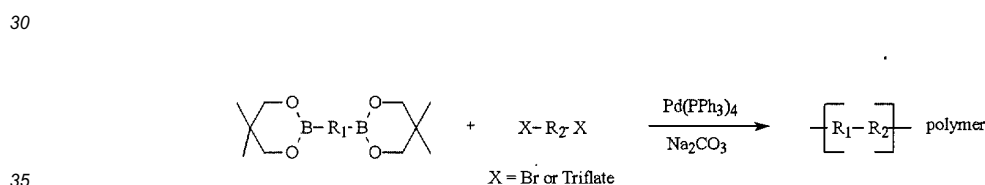

## Scheme 3

## 40 Example 1: synthesis of 4-(2-ethylhexyloxy)-bromobenzene (compound 1)

45 [0030] To a 1-L round-bottomed flask were added 4-bromophenol (60.0 g, 0.35 mol), potassium carbonate (52.7 g, 0.38 mol), 2-ethylhexyl bromide (73.7 g, 0.38 mol) and DMF 200 mL. The reaction mixture was stirred at 90 °C under nitrogen overnight. The reaction was poured into water and extracted with ether three times and the combined organic phase was washed with water three times and dried over MgSO<sub>4</sub>. After solvent was removed, the crude product was obtained as light brown liquid. Pure product was obtained by column chromatography on silica gel using ether/hexane (10/90) as an eluent to give 71.2 g of light yellow liquid at 72% yield. <sup>1</sup>H NMR (CDCl<sub>3</sub>) δ (ppm): 0.88-0.93 (m, 6 H, CH<sub>3</sub>), 1.27-1.46 (m, 8 H), 1.65-1.74 (m, 1 H), 3.78 (d, J = 5.7 Hz, 2 H, OCH<sub>2</sub>), 6.76 (d, J = 8.9 Hz, 2 H), 7.33 (d, J = 8.9 Hz, 2 H). <sup>13</sup>C NMR (CDCl<sub>3</sub>): 11.08, 14.08, 23.03, 23.80, 29.05, 30.46, 39.29, 70.72, 112.42, 116.29, 132.11, 158.47. FD-MS: m/z 285 (M<sup>+</sup>).

## Example 2: synthesis of 2,6-bis(t-butylidimethylsilyloxy)anthraquinone (compound 2)

55 [0031] To a 2-L round-bottomed flask were added 2,6-dihydroxyanthraquinone (80.0 g, 0.33 mol), imidazole (108.8 g, 1.6 mol), t-butylidimethylsilyl chloride (115.5 g, 0.77 mol), and DMF 600 mL. The dark red mixture was heated to 90 °C for 3 h. TLC indicated the completion of the reaction. The reaction was cooled down and poured into 2 L of cool water. The dark green needle like precipitate was filtered off and washed with water and methanol. The dark green crystals were dissolved in ether and the black insoluble part was filtered off. The bright yellow filtrate was concentrated

## EP 1 288 276 A1

and the crude product was suspended in boiling methanol. The yellow precipitated was filtered to give pure 85.1 g product as yellow silky crystals at 54% yield. <sup>1</sup>H NMR (CDCl<sub>3</sub>) δ (ppm): 0.28 (s, 12H), 1.00 (s, 18 H), 7.14 (dd, *J*<sub>1</sub> = 8.5 Hz, *J*<sub>2</sub> = 2.5 Hz, 2 H), 7.64 (d, *J* = 2.5 Hz, 2 H), 8.17 (d, *J* = 8.5 Hz, 2 H). <sup>13</sup>C NMR (CDCl<sub>3</sub>): -4.36, 25.53, 117.35, 125.34, 127.57, 129.73, 135.73, 161.26, 182.17. Mp 131-133 °C. FD-MS: *m/z* 468 (M<sup>+</sup>).

### Example 3: synthesis of 2,6-dihydroxy-9,10-di(4-(2-ethylhexyloxy)phenyl)anthracene (compound 3)

[0032] Compound 1 (18.3 g, 0.064 mol) was dissolved in 60 mL of anhydrous THF and cooled to -78 °C. To this solution was added n-BuLi (2.5 M in hexane, 25.6 mL, 0.064 mol) slowly to maintain the temperature below -60 °C. After addition, the orange-yellow solution was stirred at -78 °C for an hour. Compound 2 (10.0 g, 0.021 mol) was dissolved in 30 mL of anhydrous THF and added dropwise to the above cooled solution. TLC analysis indicated the completion of the reaction after 3 h. The reaction was warmed up slightly and HI solution (47% in water, 39 mL, 0.21 mol) was added slowly to quench the reaction and to de-protect the TBDMS group. The deep brown reaction was heated to reflux for 10 min. and most of the solvent was removed under reduced pressure. The reaction mixture was then extracted with methylene chloride three times. The combined organic phase was washed with saturated sodium metabisulfate solution, water, and brine, and dried over MgSO<sub>4</sub>. The crude product was obtained as brown viscous oil and was purified by column chromatography on silica gel with 15/85 ether/hexane as an eluent. The pure product was obtained as 5.5 g of light green-yellow solid at 42% yield. <sup>1</sup>H NMR (CDCl<sub>3</sub>) δ (ppm): 0.92-1.01 (m, 12 H, CH<sub>3</sub>), 1.26-1.46 (m, 16 H), 1.77-1.86 (m, 2 H), 3.96 (d, *J* = 5.7 Hz, 4 H, OCH<sub>2</sub>), 4.93 (s, br, 2 H, OH), 6.91 (d, *J* = 2.3 Hz, 2 H), 6.95 (dd, *J*<sub>1</sub> = 9.5 Hz, *J*<sub>2</sub> = 2.4 Hz, 2 H), 7.09 (d, *J* = 8.6 Hz, 4 H, phenyl), 7.31 (d, *J* = 8.6 Hz, 4 H, phenyl), 7.60 (d, *J* = 9.4 Hz, 2 H). <sup>13</sup>C NMR (CDCl<sub>3</sub>): 11.17, 14.13, 23.09, 23.91, 29.13, 30.58, 39.46, 70.62, 106.88, 114.49, 118.59, 127.33, 129.00, 129.93, 131.02, 132.21, 151.75, 158.72. M.p. 195-197 °C. FD-MS: *m/z* 618 (M<sup>+</sup>).

### Example 4: synthesis of 2,6-di(triflate)-9,10-di(4-(2-ethylhexyloxy)phenyl)anthracene (compound 4)

[0033] Compound 3 (4.5 g, 0.007 mol) was dissolved in 50 mL of dry pyridine and cooled to 0 °C. To this brown red solution was added slowly triflate anhydride (6.2 g, 0.022 mol). The dark green reaction was stirred at room temperature for 20 min. TLC indicated the completion of the reaction. The reaction was poured into water and extracted with ether (3x200 mL). The combined organic phase was washed with 2N HCl (2x200 mL) and dried over MgSO<sub>4</sub>. The crude product was purified by column chromatography on silica gel using CH<sub>2</sub>Cl<sub>2</sub>/hexane (10/90) to give 5.9 g of blue fluorescent yellow crystalline product at 92% yield. <sup>1</sup>H NMR (CDCl<sub>3</sub>) δ (ppm): 0.94-1.04 (m, 12 H, CH<sub>3</sub>), 1.38-1.60 (m, 16H), 1.81-1.88 (m, 2 H), 4.01 (d, *J* = 5.7 Hz, 4 H, OCH<sub>2</sub>), 7.16 (d, *J* = 8.5 Hz, 4 H, phenyl), 7.25 (dd, *J*<sub>1</sub> = 9.5 Hz, *J*<sub>2</sub> = 2.4 Hz, 2 H), 7.35 (d, *J* = 8.5 Hz, 4 H, phenyl), 7.66 (d, *J* = 2.3 Hz, 2 H), 7.88 (d, *J* = 9.5 Hz, 2H). M.p. 103-104 °C. FD-MS: *m/z* 882 (M<sup>+</sup>).

### Example 5: synthesis of 2,6-di(2,2-dimethyltrimethylene diboronate)-9,10-di(4-(2-ethylhexyloxy)phenyl)anthracene (compound 5)

[0034] Compound 4 (4.1 g, 0.005 mol), bis(neopentyl glycolato)diboron (2.3 g, 0.01 mol), 1,1'-bis(diphenylphosphino)ferrocene)dichloropalladium (II)dichloromethane complex (0.23 g, 6 mol% to compound 4), 1,1'-bis(diphenylphosphino)ferrocene (0.15 g, 6 mol% to 4), and potassium acetate (2.7 g, 0.028 mol) were mixed with 50 mL of dioxane. The mixture was degassed with nitrogen for 10 min. and then heated to 80 °C overnight. The reaction was cooled and ice water 50 mL was added. Brown precipitate formed and was filtered, washed with water and hexane. The brownish yellow solid was dissolved in ether, washed with water (5x100 mL) to remove the by-product neopentyl glycol to give 3.3 g of product as light brownish yellow solid at 88% yield. <sup>1</sup>H NMR (CDCl<sub>3</sub>) δ (ppm): 0.94-1.04 (m, 24 H, CH<sub>3</sub>), 1.21-1.43 (m, 16 H), 1.80-1.88 (m, 2 H), 3.72 (s, 8 H), 4.02 (d, *J* = 5.7 Hz, 4 H, OCH<sub>2</sub>), 7.14 (d, *J* = 8.5 Hz, 4 H, phenyl), 7.38 (d, *J* = 8.5 Hz, 4 H, phenyl), 7.62-7.70 (m, 4 H), 8.28 (s, 2 H). <sup>13</sup>C NMR (CDCl<sub>3</sub>): 11.24, 14.16, 21.95, 23.12, 23.95, 29.20, 30.64, 31.83, 39.57, 70.71, 72.24, 114.38, 126.02, 128.25, 130.20, 130.98, 131.26, 132.38, 132.49, 134.41, 134.52, 137.47, 158.59. M.p. 191-193 °C. FD-MS: *m/z* 810 (M<sup>+</sup>).

### Example 6: synthesis of 2,6-di(2-ethylhexyloxy)anthraquinone (compound 6)

[0035] 2,6-Dihydroxyanthraquinone (100.0 g, 0.42 mol) and 2-ethylhexyl bromide (165.0 g, 0.86 mol) were dissolved in 1 L of DMF. To this solution was added anhydrous K<sub>2</sub>CO<sub>3</sub> (120.0 g, 0.87 mol). The reaction was heated at 90 °C overnight. Most of DMF was removed and 500 mL of water was added. The reaction was extracted with ether (3x400 mL), washed with brine (1x200 mL), and dried over MgSO<sub>4</sub>. Solvent was removed and the crude product was recrystallized from methanol to give 125.2 g of yellow powdery product at 65% yield. <sup>1</sup>H NMR (CDCl<sub>3</sub>) δ (ppm): 0.92-0.98 (m, 12 H, CH<sub>3</sub>), 1.34-1.54 (m, 16 H), 1.75-1.81 (m, 2 H, CH<sub>2</sub>(CH<sub>3</sub>)), 4.02 (d, *J* = 5.5 Hz, 4 H, OCH<sub>2</sub>), 7.19 (d, *J* = 8.4

## EP 1 288 276 A1

Hz, 2 H), 7.70 (s, 2 H), 8.19 (d,  $J = 8.5$  Hz, 2 H).  $^{13}\text{C}$  NMR ( $\text{CDCl}_3$ ): 11.12, 14.06, 23.04, 23.88, 29.08, 30.51, 39.34, 71.34, 110.64, 120.84, 127.00, 129.62, 135.88, 164.29, 182.27. M.p. 49-51 °C. FD-MS:  $m/z$  464 ( $\text{M}^+$ ).

### Example 7. synthesis of 2,6-di(2-ethylhexyloxy)anthracene (compound 7)

[0036] To a 1-L round-bottomed flask was added compound **6** (75.0 g, 0.16 mol), tin (80.0 g, 0.67 mol), and 375 mL of acetic acid. The reaction was refluxed for 2 h during which the reaction became a slurry. The reaction was cooled to room temperature and the top layer was decanted. The solid was washed with  $\text{CH}_2\text{Cl}_2$ . The combined organic phase was washed with water, saturated  $\text{NaHCO}_3$  solution and brine, and dried over  $\text{MgSO}_4$ . Solvent was removed to yield 72.1 g of yellow solid. The yellow solid was dissolved in 200 mL of isopropanol and added dropwise to a solution of  $\text{NaBH}_4$  (6.50 g, 0.17 mol) in 300 mL of isopropanol. The reaction was heated at reflux overnight. After cooled to room temperature, the reaction was quenched with dilute HCl solution and then poured into water. The yellow precipitate was collected by filtration, washed with water and ethanol and dried to give 55.2 g of pure product as yellow powder at 78% yield in two steps.  $^1\text{H}$  NMR ( $\text{CDCl}_3$ )  $\delta$  (ppm): 0.92-1.62 (m, 14 H, alkyl), 1.79-1.87 (m, 1 H, alkyl), 3.99 (d,  $J = 5.7$  Hz, 2 H,  $\text{OCH}_2$ ), 7.14 (d,  $J = 9.4$  Hz, 2 H), 7.17 (s, 2 H, 1 and 5 of anthracene), 8.17 (s, 2 H, 9 and 10 of anthracene).  $^{13}\text{C}$  NMR ( $\text{CDCl}_3$ ): 11.19, 14.10, 23.10, 24.07, 29.18, 30.72, 39.44, 70.48, 104.58, 120.85, 124.09, 128.71, 129.06, 131.30, 156.22. M.p. 60-62 °C. FD-MS:  $m/z$  436 ( $\text{M}^+$ ).

### Example 8: synthesis of 9,10-dibromo-2,6-di(2-ethylhexyloxy)anthracene (compound 8)

[0037] Compound **7** (13.5 g, 0.031 mol) was added to 150 mL of DMF and cooled down to 0 °C. To this suspension was added NBS (11.60 g, 0.065 mol) in 60 mL of DMF. Upon addition of NBS, the reaction became clear and turned to dark green color. The reaction was stirred at room temperature under nitrogen overnight. The reaction was poured into 200 mL of water, and extracted with methylene chloride (3x300 mL). The combined organic phase was washed thoroughly with water (3x100 mL) and brine (1x100 mL), and dried over  $\text{MgSO}_4$ . After removal of the solvent, the dark brown residue was washed with hexane to collect greenish yellow crystals. The crude crystals were recrystallized from acetone to give flake like greenish yellow fluorescent product. The filtrates were combined and purified by chromatography on silica gel with hexane as eluent. The total yield of the reaction is 5.5 g at 30% yield.  $^1\text{H}$  NMR ( $\text{CDCl}_3$ )  $\delta$  (ppm): 0.93-1.70 (m, 14 H, alkyl), 1.81-1.89 (m, 1 H, alkyl), 3.12 (d,  $J = 5.4$  Hz, 2 H,  $\text{OCH}_2$ ), 7.34 (d,  $J = 9.2$  Hz, 2H), 8.00 (d,  $J = 9.2$  Hz, 2 H), 8.71 (s, 2 H, 1 and 5 of anthracene).  $^{13}\text{C}$  NMR ( $\text{CDCl}_3$ ): 11.12, 14.10, 23.08, 23.93, 29.15, 30.52, 39.88, 72.76, 107.74, 117.02, 125.27, 129.51, 129.75, 130.12, 152.87. M.p. 103-105 °C. FD-MS:  $m/z$  590 ( $\text{M}^+$ ).

## Synthesis of Polymers

### Example 9: synthesis of polymer 17

[0038] Compound **5** (0.73 g, 0.9 mmol), compound **4** (0.80 g, 0.9 mmol), and Aliquat® 336 (0.050 g, 13 mol% to compound **5**) were dissolved in 4.5 mL of toluene. To this solution was added 2 M  $\text{Na}_2\text{CO}_3$  aqueous solution (1.5 mL, 3.0 mmol). The reaction mixture was bubbled with dry nitrogen for 15 min and catalyst tetrakis(triphenylphosphine) palladium (40 mg, 3mol% to compound **5**) was added. The reaction was heated under vigorous reflux for 24 h, and small amount of phenylboronic acid was added for end-capping of bromo group. The reaction was heated for 13 h and bromobenzene was added to end-cap boronate group. The reaction was heated for another 6 h and then poured into 60 mL of methanol. The precipitated polymer was washed with methanol, diluted HCl solution, and dried to give light yellow polymer 0.82 g at 7% yield. The polymer was then extracted with acetone with a Soxhlet setup overnight to remove oligomer and residual catalyst. Polymer was re-precipitated from chloroform into methanol three times to give final polymer 0.80 g. Size exclusion chromatography (SEC) (in THF with polystyrene as standard) analysis indicates that the polymer has a weight average molecular weight (Mw) of 9390 and a polydispersity of 1.78. Thermal analysis indicates that polymer has a thermal onset decomposition temperature 435 °C, and no glass transition temperature was observed before 435 °C.

### Example 10: synthesis of polymer 20

[0039] The procedure used to prepare polymer **17** was followed. Compound **5** (1.50 g, 1.85 mmol), compound **2** (1.10 g, 1.85 mmol), and Aliquat® 336 (0.10 g) were dissolved in 9.5 mL of toluene. To this solution were added 2 M  $\text{Na}_2\text{CO}_3$  aqueous solution (3.1 mL, 6.2 mmol) and catalyst tetrakis(triphenylphosphine)palladium (80 mg). After polymerization and purification 1.18 g of light yellow polymer was obtained. The polymer has a Mw of 8420 and a polydispersity of 1.59. Thermal analysis indicates that polymer has a thermal onset decomposition temperature 395 °C, and no glass transition temperature was observed before 395 °C.

**Example 11: synthesis of polymer 4**

[0040] The procedure used to prepare polymer 17 was followed. Compound 4 (0.85 g, 1.05 mol), 4,4'-biphenyl di-boronate (0.36 g, 1.05 mmol), and Aliquat® 336 (0.05 g) were dissolved in 5 mL of toluene. To this solution were added 2 M Na<sub>2</sub>CO<sub>3</sub> aqueous solution (1.6 mL, 3.2 mmol) and tetrakis(triphenylphosphine)palladium catalyst (36 mg). After polymerization and purification 0.30 g of light yellow polymer was obtained.

**EL Device Fabrication and Performance****Example 12**

[0041] An EL device satisfying the requirements of the invention was constructed in the following manner. The organic EL medium has single layer of polymer thin film.


- a) An indium-tin-oxide (ITO) coated glass substrate was sequentially ultra-sonicated in a commercial detergent, rinsed with deionized water, degreased in toluene vapor and exposed to ultraviolet light and ozone for a few minutes.
- b) An aqueous solution of PEDOT (1.3% in water, Baytron P from Bayer Corp.) was spin-coated onto ITO under a controlled spinning speed to obtain thickness of 500 Angstroms. The coating was baked in an oven at 120 °C for 20 min.
- c) A toluene solution of a polymer (30 mg in 30 mL of solvent) was filtered through a 0.2 μm Teflon filter. The polymer solution was then spin-coated onto PEDOT under a controlled spinning speed. The thickness of the polymer film was between 500-700 Angstroms.
- d) On the top of the polymer film was deposited a cathode layer of 2000 Angstroms thick consisting of a 10:1 atomic ratio of Mg and Ag.

[0042] The above sequence completed the deposition of the EL device. The device was then hermetically packaged in a dry glove box for protection against ambient environment.

[0043] FIGS. 4, 5 and 6 show the absorption, emission, and PL spectra of polymers 17, 20 and 4 respectively. EL spectra of device fabricated from polymer 17 and 20 are shown in FIG 7. Absorption and emission spectra were obtained from dilute toluene solutions, photoluminescence (PL) spectra from solid thin films of the polymers, and EL spectra were obtained from ITO(PEDOT)/polymer/Mg:Ag EL devices.


[0044] Other features of the invention are included below.

[0045] The electroluminescent device wherein Ar represents:




wherein: R is a substituent including hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 carbon atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 carbons, or a cyano group, a nitro group, a chlorine, bromine, or a fluorine atom.

[0046] The electroluminescent device wherein Ar represents:




[0047] The electroluminescent device wherein Ar represents:

EP 1 288 276 A1




10 wherein: R is a substituent including hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 carbon atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 carbons, or a cyano group, a nitro group, a chlorine, bromine, or a fluorine atom.

[0048] The electroluminescent device wherein Ar represents:



[0049] The electroluminescent device wherein Ar represents:




35 wherein: R is a substituent including hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 carbon atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 carbons, or a cyano group, a nitro group, a chlorine, bromine, or a fluorine atom;

R<sub>1</sub> is a substituent, and can be hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 carbon atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 carbons; and

X<sub>2</sub> is a nitrogen or carbon atom.


[0050] The electroluminescent device wherein Ar represents:



50 wherein: R<sub>1</sub> is a substituent including hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 carbon atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 carbons; and

X<sub>2</sub> is a nitrogen or carbon atom.

[0051] The electroluminescent device wherein Ar represents:




10 wherein:

Ar<sup>3</sup> is the same as Ar;

R<sub>2</sub> and R<sub>3</sub> are independently hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 atoms, or a cyano group; and

15 R is a substituent including hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 carbon atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 carbons, or a cyano group, a nitro group, a chlorine, bromine, or a fluorine atom.

[0052] The electroluminescent device wherein Ar represents:




30 wherein:



Ar<sup>3</sup> is the same as Ar; and


R<sub>2</sub> and R<sub>3</sub> are independently hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 atoms, or a cyano group.

[0053] The electroluminescent device wherein Ar is:



45 wherein: R is a substituent including hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 carbon atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 carbons, or a cyano group, a nitro group, a chlorine, bromine, or a fluorine atom;






5

wherein:

X is an O or S atom;


10




15

wherein:  $p$  is an integer from 0 to 2;


20




25



30




35



40

wherein:  $X_1$  is an O atom or two cyano groups;


50




55

wherein:  $R_1$  is a substituent including hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 carbon atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 carbons;


5




10




15



20




25

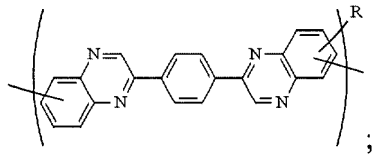

30


35



40

or


45




50

**[0054]** The electroluminescent device wherein Ar is:


55




5



10



15




20

wherein:

X is an O or S atom;


25

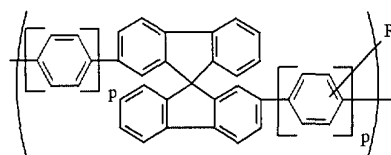


30

wherein: p is an integer from 0 to 2;


35



40




45



50


55



EP 1 288 276 A1

wherein: X<sub>1</sub> is an O atom or two cyano groups;


5




10

wherein: R<sub>1</sub> is a substituent including hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 carbon atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 carbons;


15




20




25




30



35

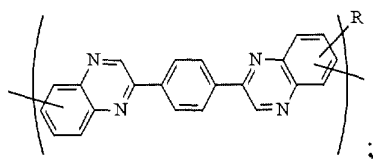

40




45

50

or

55




5

10 **Claims**

1. An electroluminescent device comprises an anode, a cathode, and an emissive layer having a polymer luminescent material disposed between the anode and cathode, the polymer luminescent material includes diarylanthracene-based conjugated polymer having a repeating unit of the following formula:

15



20

wherein:

25

Ar<sup>1</sup>, Ar<sup>2</sup>, and Ar are each individually aryl or substituted aryl of from 6 to 40 carbon atoms; or  
 Ar<sup>1</sup>, Ar<sup>2</sup>, and Ar are each individually substituted heteroaryl or unsubstituted heteroaryl having 4 to 40 carbons.

2. The electroluminescent device of claim 1 wherein:


30

Ar<sup>1</sup> and Ar<sup>2</sup> individually represent


35



40




45



50

55

5



or

10




15

20

wherein: R is a substituent including hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 carbon atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 carbons, or a cyano group, a nitro group, a chlorine, bromine, or a fluorine atom.

3. The electroluminescent device of claim 1 wherein Ar represents:

25



30


wherein: R is a substituent including hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 carbon atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 carbons, or a cyano group, a nitro group, a chlorine, bromine, or a fluorine atom; and

35

*m* is an integer from 1 to 3.

4. The electroluminescent device of claim 2 wherein Ar represents:

40




45

wherein:

*m* is an integer from 1 to 3.

5. The electroluminescent device of claim 1 wherein Ar represents:

50



55


wherein: R is a substituent including hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl

## EP 1 288 276 A1

of from 6 to 28 carbon atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 carbons, or a cyano group, a nitro group, a chlorine, bromine, or a fluorine atom.


6. The electroluminescent device of claim 2 wherein Ar represents:

5



7. The electroluminescent device of claim 1 wherein Ar represents:

15




wherein: R is a substituent including hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 carbon atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 carbons, or a cyano group, a nitro group, a chlorine, bromine, or a fluorine atom.

25


8. The electroluminescent device of claim 2 wherein Ar represents:

30



9. The electroluminescent device of claim 1 wherein Ar represents:

40




wherein: R is a substituent including hydrogen, alkyl group of from 1 to 24 carbon atoms, or aryl or substituted aryl of from 6 to 28 carbon atoms, or heteroaryl or substituted heteroaryl of from 4 to 40 carbons, or a cyano group, a nitro group, a chlorine, bromine, or a fluorine atom.

50

10. The electroluminescent device of claim 2 wherein Ar represents:

55



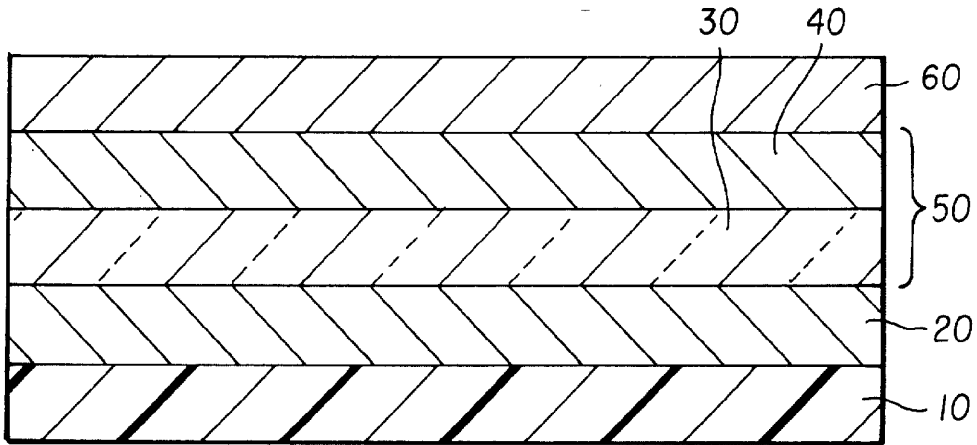


FIG. 1

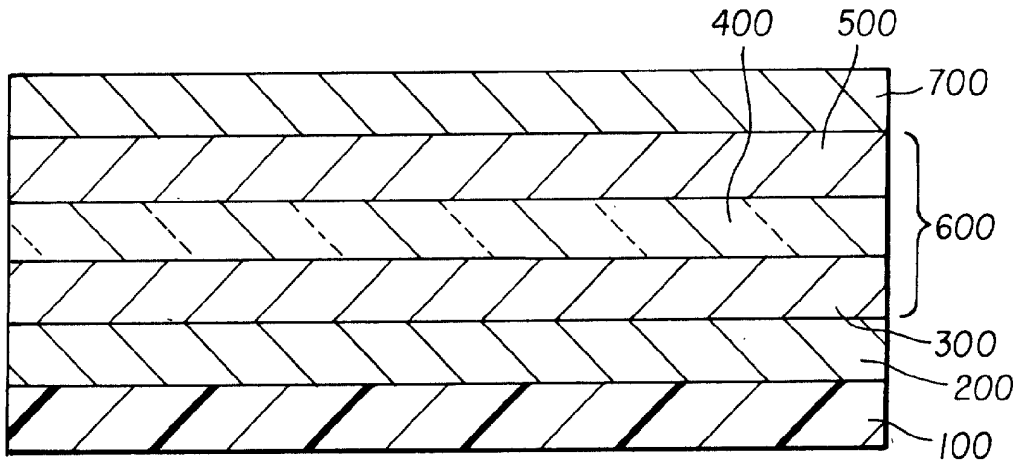


FIG. 2

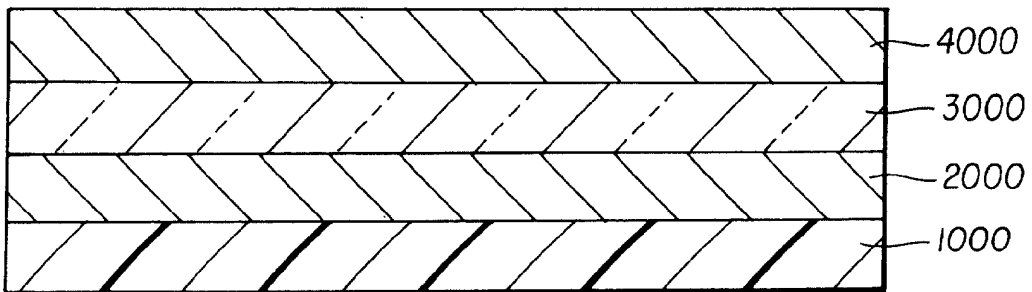


FIG. 3

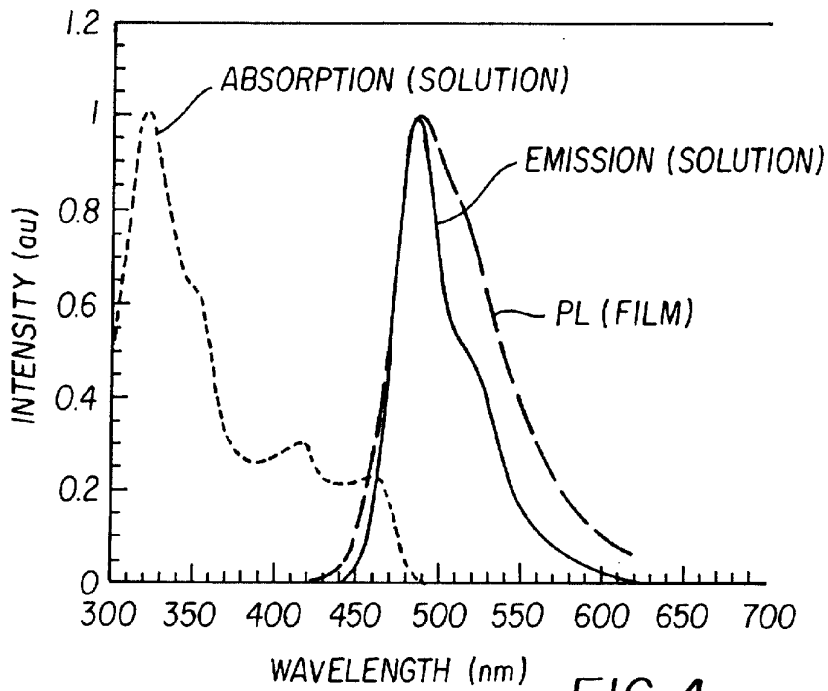


FIG. 4

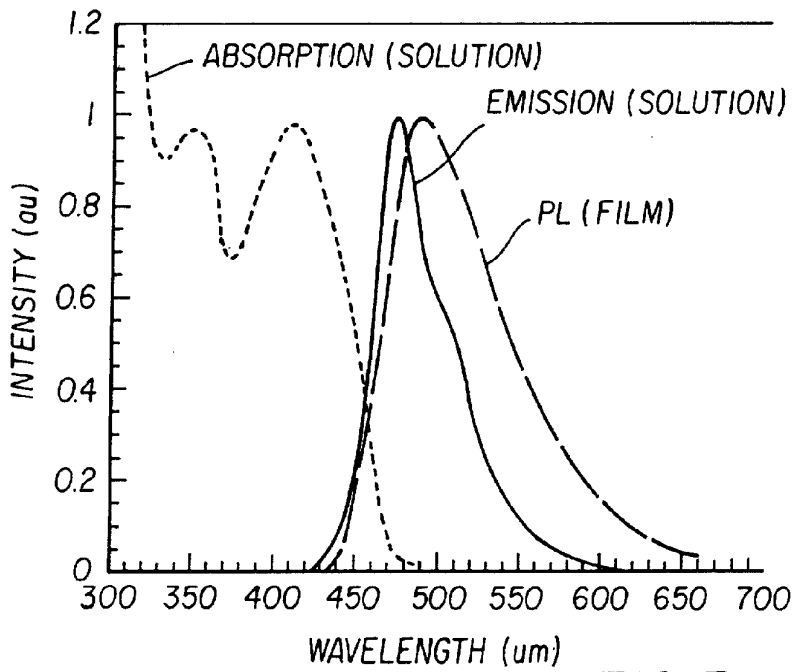


FIG. 5

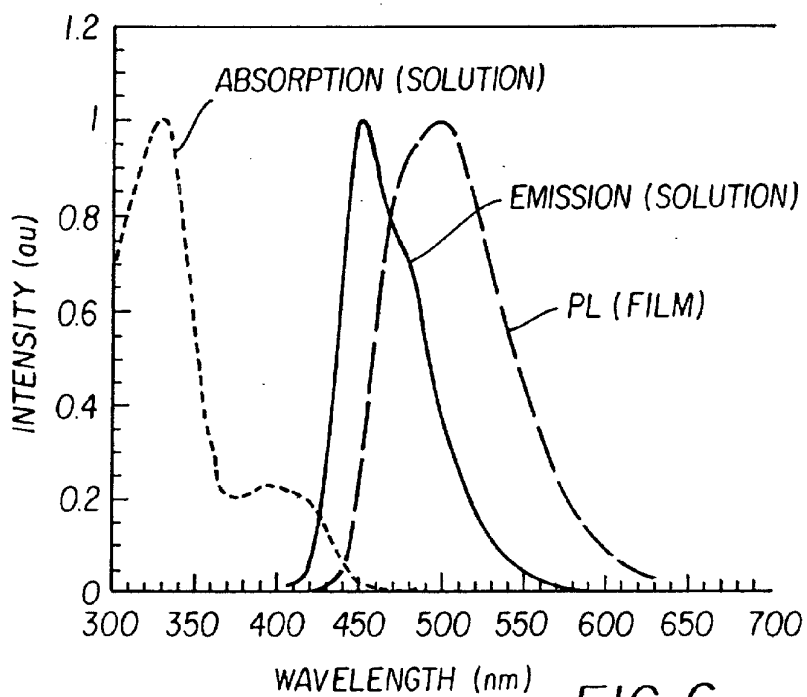


FIG. 6

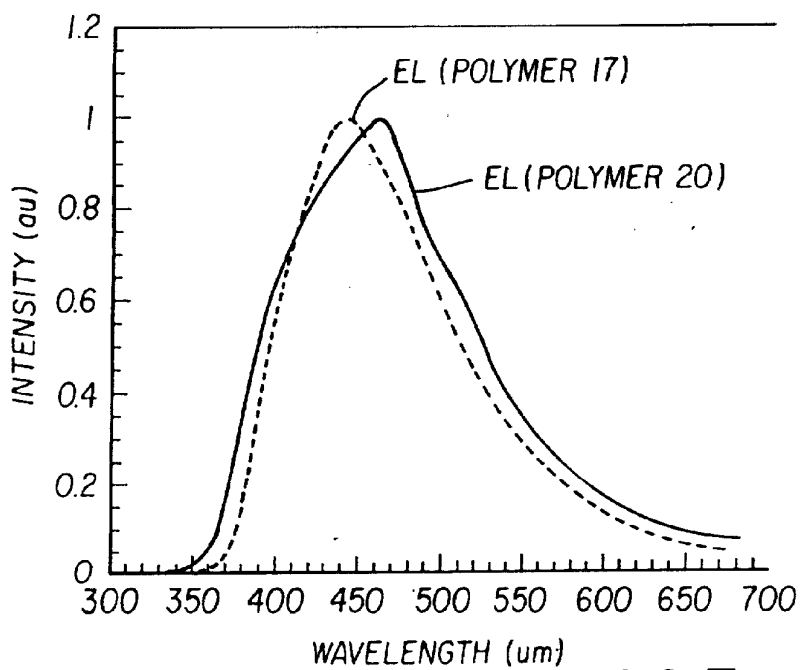


FIG. 7



European Patent  
Office

EUROPEAN SEARCH REPORT

Application Number  
EP 02 07 8395

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 681 019 A (TDK CORP) 8 November 1995 (1995-11-08)	1,2	C09K11/06 H05B33/14
A	* page 3; claims 1,2 * * page 4 *	3-10	
A	----- EP 0 952 200 A (EASTMAN KODAK CO) 27 October 1999 (1999-10-27) * page 7-21; claims 1-10 *	1-10	
A	----- US 5 935 721 A (CHEN CHIN H ET AL) 10 August 1999 (1999-08-10) * column 7-49; claims 1-9 *	1-10	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			C09K H05B
Place of search	Date of completion of the search	Examiner	
THE HAGUE	10 December 2002	Wengeler, H	
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		& : member of the same patent family, corresponding document	

EPO FORM 1503 03.B2 (FOA/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 07 8395

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-12-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0681019 A	08-11-1995	DE 69511755 D1	07-10-1999
		DE 69511755 T2	13-01-2000
		EP 0681019 A2	08-11-1995
		JP 8012600 A	16-01-1996
		US 5635308 A	03-06-1997
EP 0952200 A	27-10-1999	US 5972247 A	26-10-1999
		EP 0952200 A2	27-10-1999
		JP 11312588 A	09-11-1999
US 5935721 A	10-08-1999	NONE	

EPO FORM P0489

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

专利名称(译)	具有二芳基蒽聚合物的电致发光器件		
公开(公告)号	<a href="#">EP1288276A1</a>	公开(公告)日	2003-03-05
申请号	EP2002078395	申请日	2002-08-16
[标]申请(专利权)人(译)	伊斯曼柯达公司		
申请(专利权)人(译)	伊士曼柯达公司		
当前申请(专利权)人(译)	伊士曼柯达公司		
[标]发明人	ZHENG SHIYING C O EASTMAN KODAK COMPANY SHI JIANMIN C O EASTMAN KODAK COMPANY		
发明人	ZHENG, SHIYING, C/O EASTMAN KODAK COMPANY SHI, JIANMIN, C/O EASTMAN KODAK COMPANY VAETH, KATHLEEN M., C/O EASTMAN KODAK COMPANY		
IPC分类号	H01L51/50 C08G61/02 C08G61/10 C08G61/12 C09K11/06 H01L51/00 H01L51/30 H05B33/14		
CPC分类号	H01L51/0036 C08G61/10 C08G61/123 C09K11/06 C09K2211/1416 C09K2211/1458 C09K2211/1466 C09K2211/1475 H01L51/0035 H01L51/0038 H01L51/0039 H01L51/0043 H01L51/0052 H01L51/5012 Y10S428/917		
代理机构(译)	家长, YVES		
优先权	09/941120 2001-08-28 US		
外部链接	<a href="#">Espacenet</a>		

摘要(译)

一种电致发光器件，包括阳极，阴极和发光层，发光层具有设置在阳极和阴极之间的聚合物发光材料，聚合物发光材料包括具有下式重复单元的二芳基蒽基共轭聚合物：其中：Ar<sup>1</sup>，Ar<sup>2</sup>和Ar各自为6至40个碳原子的芳基或取代芳基；或Ar<sup>1</sup>，Ar<sup>2</sup>和Ar各自为具有4至40个碳的单独取代的杂芳基或未取代的杂芳基。

