

(19)



(11)

**EP 2 500 343 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:  
**31.01.2018 Bulletin 2018/05**

(51) Int Cl.:  
**C09K 11/06** <sup>(2006.01)</sup>      **H01L 51/50** <sup>(2006.01)</sup>  
**H01L 51/54** <sup>(2006.01)</sup>      **C07D 213/53** <sup>(2006.01)</sup>  
**H01L 51/00** <sup>(2006.01)</sup>      **H05B 33/14** <sup>(2006.01)</sup>

(21) Application number: **09851216.3**

(86) International application number:  
**PCT/CN2009/076276**

(22) Date of filing: **30.12.2009**

(87) International publication number:  
**WO 2011/057461 (19.05.2011 Gazette 2011/20)**

**(54) ORGANIC MATERIALS AND ORGANIC ELECTROLUMINESCENT APPARATUSES USING THE SAME**

ORGANISCHE MATERIALIEN UND ORGANISCHE ELEKTROLUMINESZENZVORRICHTUNGEN DAMIT

MATIÈRES ORGANIQUES ET DISPOSITIFS ÉLECTROLUMINESCENTS ORGANIQUES LES UTILISANT

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR**

(74) Representative: **Klunker IP**  
**Patentanwälte PartG mbB**  
**Destouchesstraße 68**  
**80796 München (DE)**

(30) Priority: **13.11.2009 CN 200910234760**  
**19.11.2009 CN 200910234478**

(56) References cited:  
**EP-A1- 2 112 214**      **EP-A2- 2 141 214**  
**EP-A2- 2 161 319**      **WO-A1-2009/008351**  
**CN-A- 101 364 636**      **CN-A- 101 407 493**  
**CN-A- 101 412 907**      **CN-A- 101 452 997**  
**US-A1- 2008 111 473**      **US-A1- 2010 140 603**

(43) Date of publication of application:  
**19.09.2012 Bulletin 2012/38**

- (73) Proprietors:
- **Beijing Visionox Technology Co., Ltd.**  
**Beijing 100085 (CN)**
  - **Kunshan Visionox Display Co., Ltd.**  
**Kunshan Jiangsu**  
**215300 (CN)**
  - **Tsinghua University**  
**Beijing 100084 (CN)**

- **DATABASE CAPLUS [Online] CHEMICAL ABSTRACTS SERVICE, COLUMBUS, OHIO, US; OSHIYAMA, TOMOHIRO ET AL: "Organic electroluminescent devices for display and light sources and materials for the same", XP002696121, retrieved from STN Database accession no. 2009:1401952 -& JP 2009 266927 A (KONICA MINOLTA HOLDINGS, INC., JAPAN) 12 November 2009 (2009-11-12)**
- **DATABASE CAPLUS [Online] CHEMICAL ABSTRACTS SERVICE, COLUMBUS, OHIO, US; YAMAMOTO, TOSHIHIRO ET AL: "Organic electroluminescent element", XP002696122, retrieved from STN Database accession no. 2009:1394448 -& WO 2009/136596 A1 (NIPPON STEEL CHEMICAL CO., LTD., JAPAN; PIONEER CORPORATION; TOHOKU PI) 12 November 2009 (2009-11-12)**

- (72) Inventors:
- **QIU, Yong**  
**Beijing 100084 (CN)**
  - **LI, Yinkui**  
**Beijing 100085 (CN)**
  - **XIE, Jing**  
**Beijing 100085 (CN)**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 2 500 343 B1**

- DATABASE CAPLUS [Online] CHEMICAL ABSTRACTS SERVICE, COLUMBUS, OHIO, US; OSHIYAMA, TOMOHIRO ET AL: "Organic electroluminescent device, display device and illuminating device", XP002696123, retrieved from STN Database accession no. 2009:519356 -& WO 2009/054253 A1 (KONICA MINOLTA HOLDINGS, INC., JAPAN) 30 April 2009 (2009-04-30)
- DATABASE CAPLUS [Online] CHEMICAL ABSTRACTS SERVICE, COLUMBUS, OHIO, US; JE, JONG TAE ET AL: "Preparation of anthracene compounds as n-type organic semiconductor materials for organic electroluminescent device", XP002696124, retrieved from STN Database accession no. 2009:364648 & KR 2009 029 111 A (SFC LTD., S. KOREA) 20 March 2009 (2009-03-20)
- DATABASE CAPLUS [Online] CHEMICAL ABSTRACTS SERVICE, COLUMBUS, OHIO, US; TAKASHIMA, YORIYOSHI ET AL: "Benzothiadiazoles, organic electroluminescent materials containing them, and blue-emitting organic", XP002696125, retrieved from STN Database accession no. 2008:856996 -& JP 2008 162921 A (IDEMITSU KOSAN CO., LTD., JAPAN) 17 July 2008 (2008-07-17)

**Description**

## FIELD OF THE INVENTION

5 **[0001]** The present invention relates to a novel organic material and an organic electroluminescent apparatus using the novel organic material, and belongs to the technical field of organic electroluminescent display.

## BACKGROUND OF THE INVENTION

10 **[0002]** Currently, the requirement on performance of a panel display becomes higher due to development of multimedia technique and coming of information society. Organic electroluminescent display has a series of advantages such as autonomous luminescence, direct current driving at a low voltage, full solidification, wide view angle and being colorful. Its response speed is 1,000 times higher than LCD, while its manufacturing cost is lower than LCD having equal resolution. Thus, the organic electroluminescent display has broad prospects.

15 **[0003]** Research on organic electroluminescent display (also called organic light emitting diode, OLED) starts in 1960's. Electroluminescent phenomenon of single crystal of anthracene is firstly reported by Pope et al. (Pope M., Kallmann H. P. and Magnante R. J., Chem. Phys., 1963, 38, 2042), which preludes organic solid electroluminescence. In 1987, on the basis of summarizing previous researchers' work, the researcher C. W. Tang et al. (C. W. Tang, S. A. Vanslyke, Appl. Phys. Lett., 1987, 51, 913) in Kodak Company, U.S. proposes a design concept of structure of double layer and respectively selects triarylamine compounds and 8-hydroxyquinolinato aluminum complex (Alq<sub>3</sub>) having a good film-forming property for a hole transport layer and a luminescent layer (also acting as an electron transport layer), leading to an organic electroluminescent apparatus having high quantum efficiency (>1%), high efficiency (1.5 lm/W), high luminance (>1000cd/m<sup>2</sup>) and low driving voltage (<10V). In 1990, R. H. Friend et al. (Burroughes J., Bradley D. D. C., Brown A. R., Friend R. H., Nature, 1990, 347, 539) in Cavendish laboratory of University of Cambridge prepares a polymer electroluminescent apparatus by using polyphenylene vinylene (PPV) as a material for luminescent layer, and sets up another new field of light emitting apparatus, polymer thin film electroluminescent apparatus. These two significant progresses make the organic electroluminescent apparatus have potential to be a new generation of panel display.

25 **[0004]** The organic electroluminescent apparatus is composed of two opposite electrodes and an organic medium between the electrodes, the organic medium including a hole injection layer, a hole transport layer, a luminescent layer, an electron transport layer, a charge blocking layer and the like. It is generally believed that holes are often more than electrons in the OLED apparatus, causing imbalance of two carriers at interface of recombination and reducing luminance and efficiency of the apparatus. Meanwhile, redundant holes are easily transported into the electron transport layer and even a cathode, which accelerate aging of the apparatus and shorten life of OLED. Therefore, enhancing the injection and transport of electron become a subject being concerned and investigated extensively in the field. In addition to the cathode being highly efficient and stable, a hole blocking layer, the electron transport layer and the electron injection are disposed between the luminescent layer and the cathode, respectively performing functions of blocking holes to restrict excitons in the emissive region, transport electrons, and injecting electrons.

30 **[0005]** An electron transport material conventionally used in the organic electroluminescent apparatus is Alq<sub>3</sub>, but it has a lower electron mobility (at about 10<sup>-6</sup> cm<sup>2</sup>/Vs). In order to enhance the electron transport property of the organic electroluminescent apparatus, much exploratory development has been made. Yang Yang et al. employs nanometer cesium carbonate as an electron transport and injection material in the organic electroluminescent apparatus, thereby increasing luminous efficiency of the apparatus (Advanced Functional Materials, 2007, 17, 1966-1973). It is reported by LG Chemical Co. Ltd. that when benzimidazole, benzothiazole or benzoxazole compounds are used as an electron transport material in the organic electroluminescent apparatus, electron transport property of the apparatus is improved and turn-on voltage is reduced. (Chinese Patent Application No. 200680041587.4 with Publication Number CN 101305071A). When ammonium salt of derivative of terfluorene (abbreviated FFF-BIm4) synthesized by Cao Yong et al. (J. Am. Chem. Soc., 2008, 130(11), 3282-3283) is used a material for an electron injection layer, electron injection and transport of the apparatus are significantly improved, and electroluminescent efficiency is increased. Cao Yong et al. also uses gold which is stable to air and various chemical corrosion as a cathode material of high efficient electron injection type, which improve electron injection ability of the organic electroluminescent apparatus (Organic Electronics, 2005, 6, 118-128). CN101419907 describes polyaryl-substituted pyridine derivatives for use of in preparing an organic electroluminescent apparatus. It is very important to develop stable and highly efficient electron transport material and/or electron injection material, thereby reducing turn-on voltage, improving efficiency of the apparatus, and increasing life of the apparatus.

55 **[0006]** A desirable electron transport material should have following characteristics: reversible electrochemical reduction reaction, suitable HOMO and LUMO levels, high electron mobility, good film-forming ability, high T<sub>g</sub>, and preferably blocking holes. In terms of structure of compound, it is required that molecular configuration is close to plane, thereby enhancing  $\pi$ - $\pi$  interaction among molecules when the molecules are stacked, while it is required that the structure of


the molecule is not completely planar, thereby preventing the film-forming property from being affected by crystallization of the molecule; it is required that the molecule contains a structural unit lack of electron, thereby possessing good electron accepting ability; and the molecular weight is high enough to ensure high T<sub>g</sub> and thus good thermal stability, while the molecular weight can not be too high in order to facilitate film-forming by vacuum deposition.

## SUMMARY OF THE INVENTION

**[0007]** A compound containing a pyridyl group is a typical system lack of electron and has good electron accepting ability. Planar regularity of fused-ring aromatic compounds is better. Larger the fused-ring system is, better the planarity is, which is more beneficial for stacking  $\pi$ - $\pi$  orbits of molecules and forming electron channels. However, if the fused-ring system is too large, the molecules are prone to form crystals instead of forming a film. Thus, in the present invention, a benzene ring is introduced to be connected with the pyridyl group on the basis of the fused-ring system to sterically generate distortion to a certain degree and enhance its film-forming property. In view of its practicability and whether vacuum deposition is easy, the electron transport material of the present invention generally has a molecular weight of less than 800.

**[0008]** Based on the above consideration, the present invention develops a novel organic material having good thermal stability and high electron mobility, which can be used as a material having stronger electron transport ability in the organic electroluminescent apparatus.

**[0009]** The present invention provides an organic material of Formula 1 as defined in claim 1. Described herein is an organic material represented by following structural general formula:

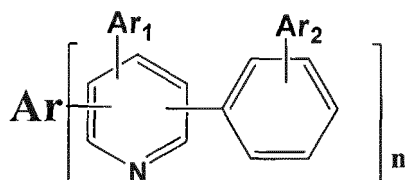

wherein Ar is selected from residues of C<sub>6</sub>-C<sub>30</sub> fused-ring aromatic hydrocarbons, Ar<sub>1</sub> and Ar<sub>2</sub> are each independently selected from the group consisting of hydrogen, C<sub>6</sub>-C<sub>24</sub> aryl, and C<sub>6</sub>-C<sub>24</sub> heterocyclic aryl, and n is an integer selected from 2 and 3.

**[0010]** The present invention also provides use of the organic material of Formula 1 as defined in claim 1 in an electron transport material in an organic electroluminescent apparatus.

**[0011]** The present invention also provides an organic electroluminescent apparatus comprising a pair of electrodes and an organic luminescent medium disposed between the pair of electrodes, the organic luminescent medium comprising the organic material of Formula 1 as defined in claim 1.

## DESCRIPTION OF DRAWINGS

### [0012]

Fig. 1 is a graph illustrating luminance with respect to voltage of light emitting apparatuses of Examples 12 to 14 and Comparative Examples 11 to 12;

Fig. 2 is a graph illustrating current density with respect to voltage of light emitting apparatuses of Examples 12 to 14 and Comparative Examples 11 to 12;


Fig. 3 is a graph illustrating current efficiency with respect to current density of light emitting apparatuses of Examples 12 to 14 and Comparative Examples 11 to 12; and

Fig. 4 is a graph illustrating life of light emitting apparatuses of Examples 12 to 14 and Comparative Examples 11 to 12.

## DETAILED DESCRIPTION

**[0013]** The structural general formula of the organic material of the present invention is as follows:

5


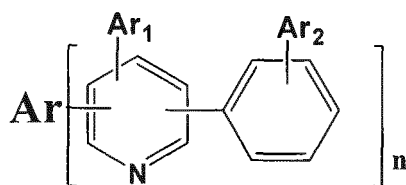


wherein wherein Ar, Ar<sub>1</sub>, Ar<sub>2</sub> and n are as defined in claim 1.



10

[0014] In particular, the structural general formulae of the compounds of the present invention are as follows:

15

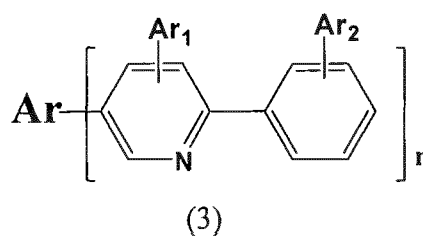
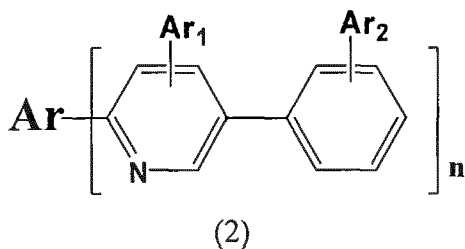


20

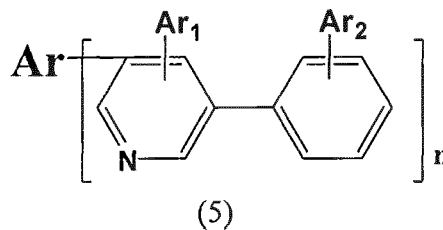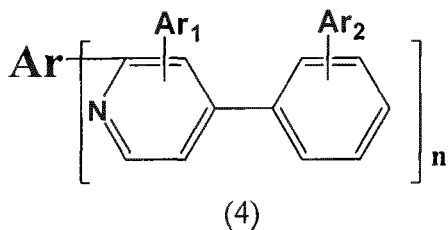

25

30

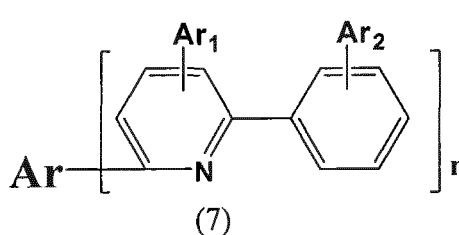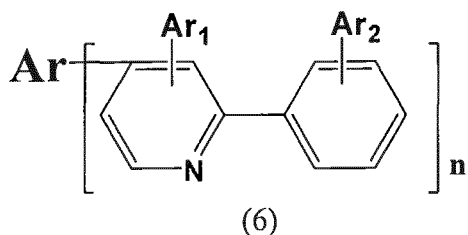


35

[0015] In order to illustrate the present invention more clearly, preferable structures of the compounds involved in the present invention are provided as follows.


40

(1) When n is 2, the structures of some main electron transport materials are as follows, wherein the structures 2-10, 2-11, 2-12, 2-13, 2-14, 2-34, 2-35, 2-36, 2-37, 2-38 are reference examples not covered by the claims.

45

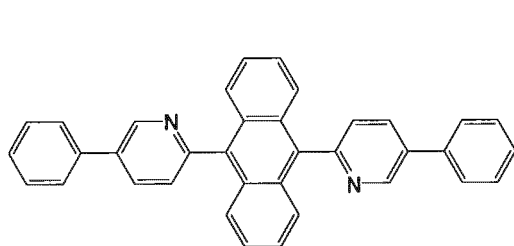

2-1

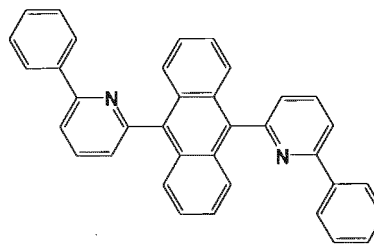


2-2


50

55

5

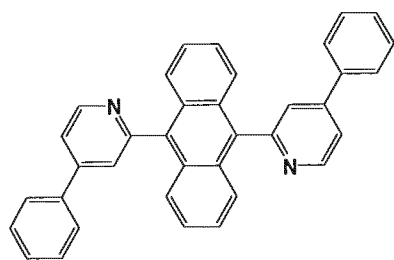


2-3

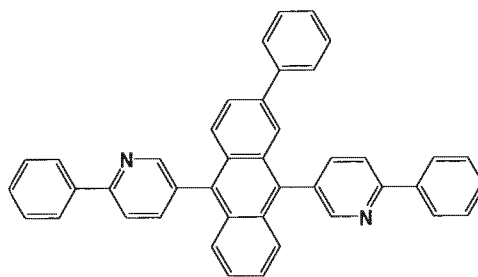


2-4

10

15

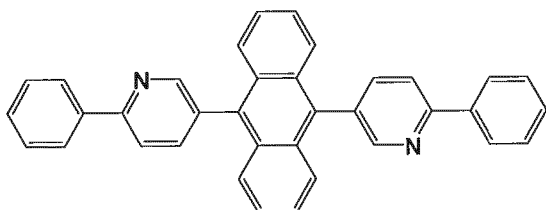


2-5

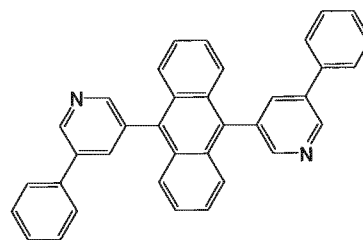


2-6

20

25




2-7

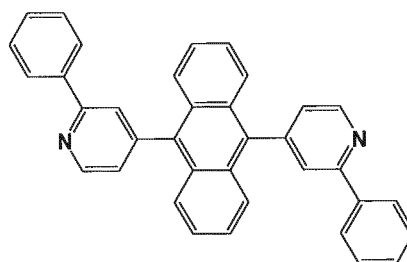


2-8

30

35



2-9

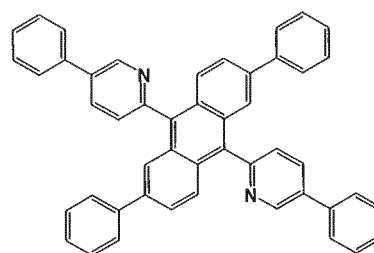

2-10


40

45

50


55

5

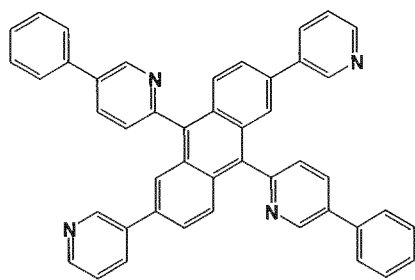


2-11

10

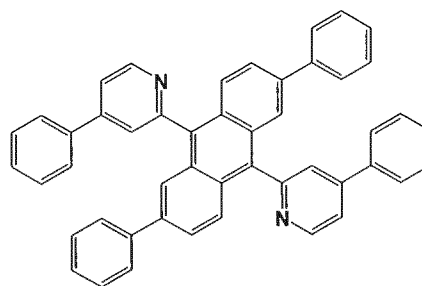


2-12

15

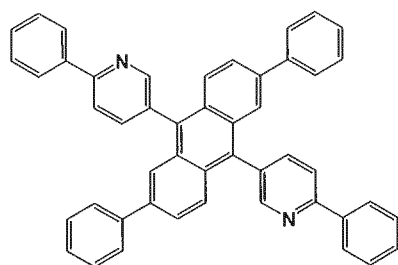

2-13


20

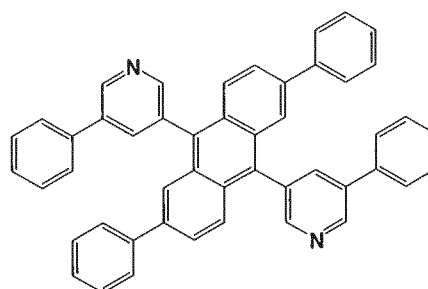

2-14


25

30

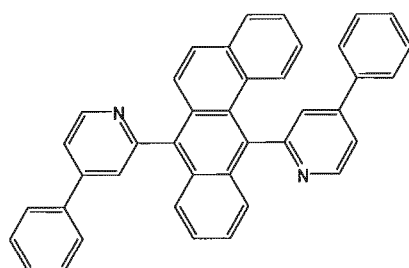


2-15

35

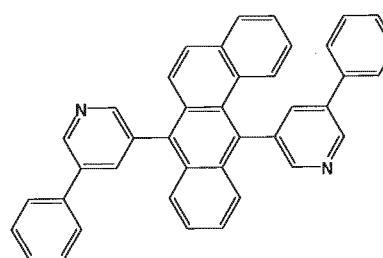


2-16

40




2-17

45

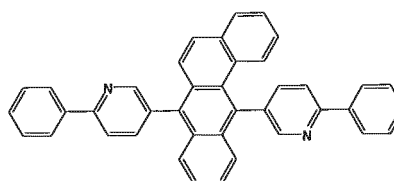


2-18

50

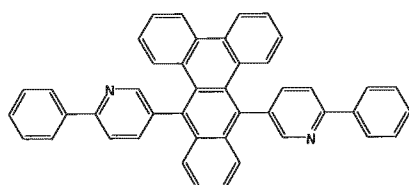


2-19

55




2-20


5  
10  
15  
20  
25  
30  
35  
40  
45  
50  
55

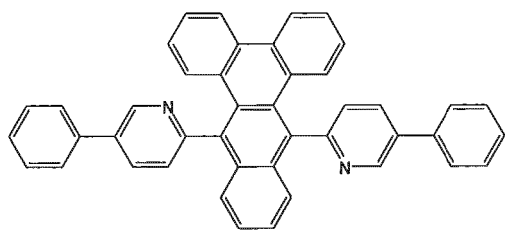


2-21




2-22




2-23

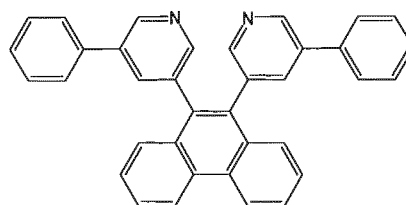


2-24

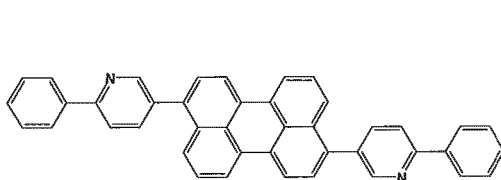


2-25

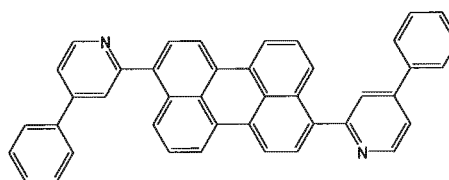


2-26

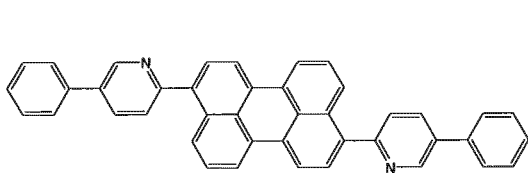


2-27

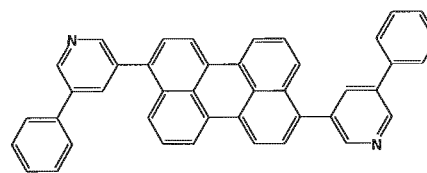

2-28

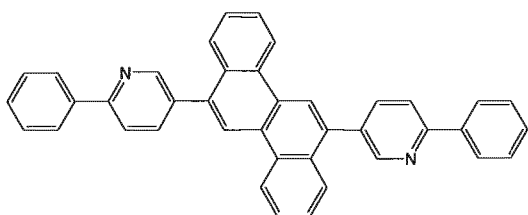


2-29

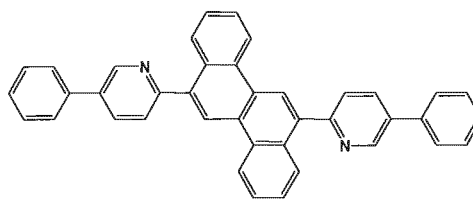


2-30

5

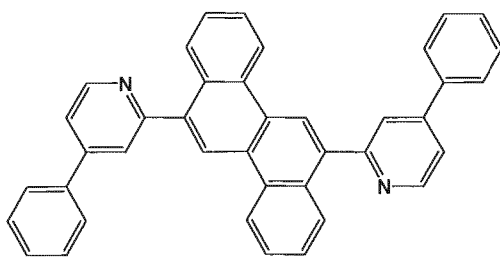


2-31

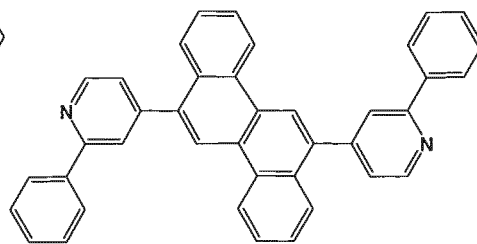


2-32

10

15

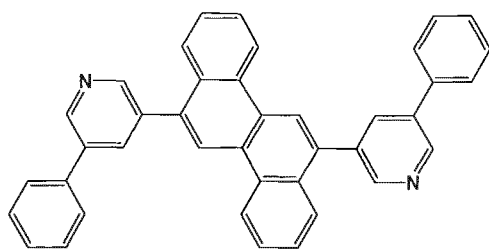


2-33




2-34

20

25




2-35

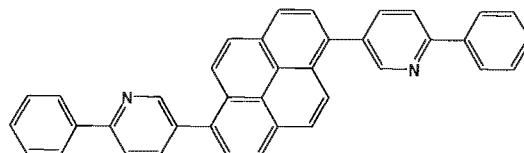


2-36

30

35



2-37




2-38


(1) For illustrative purpose, when n is 3, the structures of typical electron transport materials are as follows (reference examples not covered by the claims).

40

45

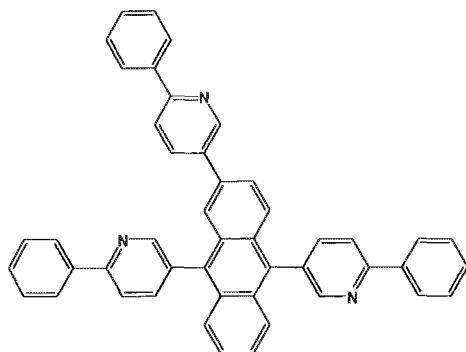


3-1

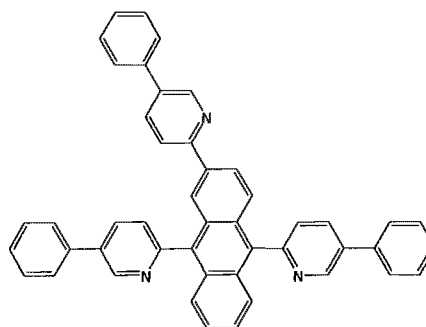

3-2

50

55

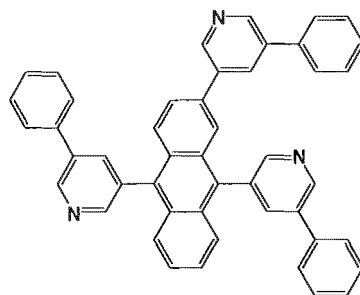

3-3

**[0016]** The present invention further relates to a novel organic electroluminescent apparatus having better performance.

**[0017]** The organic electroluminescent apparatus of the present invention employs the above novel compound as an electron transport material, has suitable HOMO and LUMO levels, has higher electron injection ability and electron transport ability, enhances ability of supplying electrons to luminescent region, thus significantly reduces driving voltage of the apparatus and improve luminance and luminous efficiency.

**[0018]** The organic electroluminescent apparatus of the present invention employs the above novel compound, and at the same time, can select other suitable material and optimize the structure of the apparatus, to achieve a combination of two functional layers, an electron transport layer and a hole blocking layer, and prevent accelerated deterioration due to holes entering the cathode while ensuring efficient electron transport. Thus, the highly efficient and stable organic electroluminescent apparatus can be obtained.

**[0019]** The organic electroluminescent apparatus of the present invention simultaneously selects a reducing material matchable with the above novel compound as a dopant, which can further reduce barrier of electron injection and enhance efficiency of electron injection. Meanwhile, the dopant is dispersed in the host material of the compound of the present invention, which can weaken interaction among the molecules and perform function of increasing stability of the apparatus and improving life of the apparatus. On the other hand, a buffer layer is disposed between a luminescent layer and an electron inject and transport functional layer, and an organic material having electron transport property can be selected as the material for the buffer layer, which can separate the luminescent layer from the reducing dopant in space, thus preventing the dopant from diffusing into the luminescent region to form luminescent quenching center. Therefore, the buffer layer is beneficial to further enhance stability of the apparatus and prolong life of the apparatus. The material having electron transport property as the first choice for the buffer layer can ensure driving voltage, efficiency and the like of the apparatus to satisfy the requirement for practicability without bringing new burden to the performance of the apparatus.

**[0020]** The organic electroluminescent apparatus of the present invention employs the above new compound doped with an active metal as an N-type layer in connection layers. Preferably, N/P connection layers connect two or more luminescent units as a charge generating layer. Current efficiency of the apparatus in which n luminescent units are stacked is n times than that of the apparatus having a single unit, while its driving voltage is n or less times than that of the apparatus having the single unit. Thus, power efficiency of the apparatus of the present invention is improved to a certain extent.

**[0021]** In addition, the material of the present invention has higher glass transition temperature and higher stability. The material has lower molecular weight and lower thin film deposition temperature, which is beneficial to form a uniform and dense thin film by thermal deposition with a relative simple preparation process.

**[0022]** The present invention also provides an organic electroluminescent apparatus comprising a pair of electrodes and an organic luminescent medium disposed between the pair of electrodes, the organic luminescent medium comprising the novel material the present invention selected from the above general formulae.

**[0023]** The above luminescent medium in the organic apparatus of the present invention comprise a luminescent layer and an electron transport functional layer, wherein the above novel material of the present invention is used in said electron transport functional layer.

**[0024]** The above electron transport functional layer further contain another electron transport material which is selected from the group consisting of oxazole compounds, metal chelates, triazole compounds, imidazole compounds, phenanthroline compounds or anthracene compounds.

**[0025]** The above oxazole compounds, metal chelates, triazole compounds, imidazole compounds, phenanthroline compounds or anthracene compounds includes: 2-(4-tertbutylphenyl)-5-(4-biphenyl)-1,3,4-oxadiazole, tris(8-hydroxyquinolato)aluminum, 3-(4-biphenyl)-4-phenyl-5-(4-butylphenyl)-1,2,4-triazole, 4,7-diphenyl-1,10-phenanthroline, 2,9-dimethyl-4,7-diphenyl-1,10-phenanthroline, and 2-phenyl-9,10-dinaphthylanthracene.

**[0026]** The above electron transport layer comprising two electron transport materials is further doped with alkaline metals, alkaline metal oxides, alkaline metal halides, alkaline metal nitrides, alkaline metal salts.

**[0027]** The above dopant is selected from the group consisting of lithium, cesium, lithium nitride, lithium fluoride, lithium cobaltate, lithium oxide, 8-hydroxyquinolato lithium, cesium carbonate, potassium borohydride, lithium borohydride, sodium fluoride, sodium chloride, cesium fluoride, cesium chloride, and rubidium oxide.

**[0028]** The doping concentration of the above dopant in the electron transport functional layer is in the range of 1% to 49%, based on the weight of the host material.

**[0029]** The above luminescent medium in the organic apparatus of the present invention comprise a luminescent layer and an electron inject and transport functional layer, wherein said electron inject and transport functional layer contains the above novel compound of the present invention, and at the same time, further contains a dopant, the dopant is selected from the group consisting of alkaline metals, alkaline metal oxides, alkaline metal halides, alkaline metal nitrides, and alkaline metal salts.

**[0030]** The above dopant is selected from the group consisting of lithium, cesium, lithium nitride, lithium fluoride, lithium cobaltate, lithium oxide, 8-hydroxyquinolato lithium, cesium carbonate, potassium borohydride, lithium borohydride, sodium fluoride, sodium chloride, cesium fluoride, cesium chloride, and rubidium oxide.

**[0031]** The above electron injection and transport functional layer has a thickness in the range of 2 nm to 5 nm, preferable in the range of 5 nm to 25 nm. The doping ratio of the dopant in the electron injection and transport layer is in the range of 0.1% to 49% by weight, preferably in the range of 0.5% to 30% by weight.

**[0032]** In the above organic electroluminescent apparatus of the present invention, a buffer layer is disposed between the electron inject and transport layer and the luminescent layer. The material for the buffer layer is selected from the above novel compounds of the present invention, or selected from the group consisting of oxazole compounds, metal complexes, triazole compounds, imidazole compounds, quinoline compounds, oxaline (quinoxaline) compounds, phenazine compounds, and phenanthroline compounds.

**[0033]** The material for the buffer layer is preferably selected from the group consisting of the above compounds 2-1 to 2-38 and 3-1 to 3-3 or selected from the group consisting of 2-(4-tertbutylphenyl)-5-(4-biphenyl)-1,3,4-oxadiazole, tris(8-hydroxyquinolato)aluminum, 3-(4-biphenyl)-4-phenyl-5-(4-butylphenyl)-1,2,4-triazole, 4,7-diphenyl-1,10-phenanthroline, 2,9-dimethyl-4,7-diphenyl-1,10-phenanthroline, and 2-phenyl-9,10-dinaphthylanthracene.

**[0034]** The above buffer layer has a thickness in the range of 2 nm to 20 nm.

**[0035]** In the above organic electroluminescent apparatus of the present invention, the organic luminescent medium comprises at least two luminescent units with a connection layer disposed between the luminescent units, wherein the connection layer contains the above novel compound of the present invention.

**[0036]** A dopant selected from the group consisting of alkaline metals, alkaline metal oxides, alkaline metal halides, alkaline metal nitrides, and alkaline metal salts is doped in the above connection layer. The dopant is preferably selected from the group consisting of lithium, cesium, lithium nitride, lithium fluoride, lithium cobaltate, lithium oxide, 8-hydroxyquinolato lithium, cesium carbonate, potassium borohydride, lithium borohydride, sodium fluoride, sodium chloride, cesium fluoride, cesium chloride, and rubidium oxide.

#### Examples of Methods for Synthesizing Materials

**[0037]** All the basic chemical raw materials such as various pyridyl boric acids, phenyl pyridyl boric acids, pyridyl phenyl boric acid, bromoanthracenes, bromoperylene, bromonaphthalenes, anthraquinones, benzoanthraquinones, dibenzoanthracene and the like used in the present invention are easily available in the chemical product market. Each of phenyl pyridyl boric acids can be synthesized by using common organic methods.

**[0038]** All the basic chemical raw materials such as various bromiodopyridine, anthraquinones, benzoanthraquinones, dibenzoanthracene and the like used in the present invention are easily available in the domestic chemical product market. Each of bromoanthracenes, bromoperylene, and phenyl pyridyl boric acids can be synthesized by using common organic methods.

#### Examples

**[0039]** The methods for synthesizing a part of the main compounds in the present invention are illustrated as follows.


#### Synthesis Example 1: Synthesis of Compound 2-1

(1) Reaction of the first step

**[0040]**

EP 2 500 343 B1

5

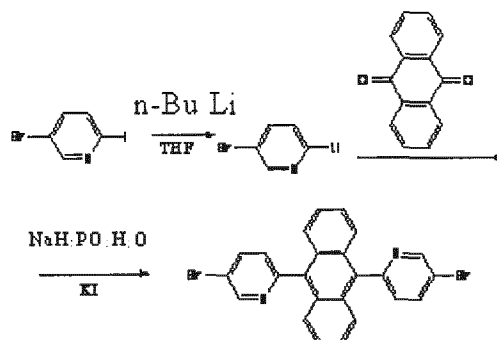

10


[0041] After argon replacement in a three-neck bottle of 500 ml equipped with magnetic stirrer, 13.4 g of 2-iodo-5-bromopyridine (purity of 99%, 0.0473 mol) and 200 ml of THF are sequentially added thereto. 19 ml of n-butyl lithium (concentration of 2.5 M, 0.0475 mol) is dropwise added at -83°C, and then 4.8 g of anthraquinone (purity of 99%, 0.023 mol) is immediately added. After addition, the temperature is naturally raised to room temperature, and the solution exhibits bright yellow color. 200 ml of water is added for hydrolysis, the resultant is extracted with ethyl acetate, and the solvent is evaporated. After adding 300 ml of acetic acid, 18 g of KI and 18 g of sodium hypophosphite, the resultant is refluxed and allowed to react for 1 hour. Then, the temperature is reduced, acetic acid is evaporated, and the resultant is washed with water. Thus, 5.05 g of yellow compound is obtained with purity of 87.42% and yield of 39.19%.

20

(2) Reaction of the second step

25

[0042]

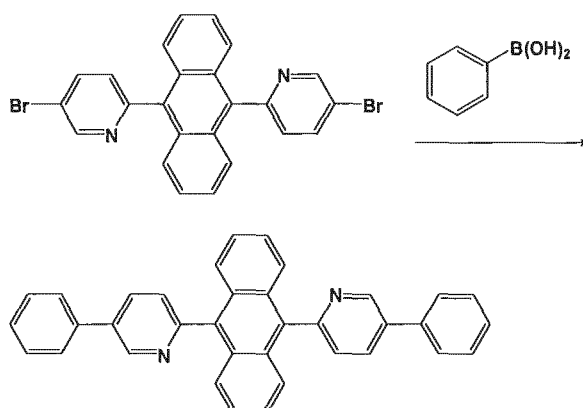

30

35

40

[0043] Under protection of N<sub>2</sub> gas, 6.0 g of 9,10-di(5-bromopyrid-2-yl)anthracene (molecular weight of 490, purity of 87.42%, 0.0106 mol), 3.73 g of phenyl boric acid (purity of 98%, 0.03 mol), 0.21 g of palladium chloride (purity of AR, 0.00124 mol), 0.63 g of triphenylphosphine (purity of AR, 0.0024 mol), 5.3 g of potassium carbonate (purity of AR, 0.0486 mol), 86 ml of toluene, 60 ml of ethanol, and 72 ml of water are added into a three-neck bottle of 500 ml. The above materials are heated to reflux, and phenyl boric acid is supplemented twice (1 g once). The reaction is stopped after 4 hours. The resultant is cooled and filtered. The filter cake is boiled in toluene with heating and filtered. Then, the catalyst is removed, and toluene is evaporated. The solid obtained is boiled in water/THF with a ratio of 1/10, cooled and filtered, which are repeated twice. Thus, 4.1 g of grey compound 2-1 is obtained with purity of 99.14% and yield of 77.97%.

45

[0044] Mass Spectrum (MS) of the product (m/e): 484; Elemental analysis (C<sub>36</sub>H<sub>24</sub>N<sub>2</sub>): Theoretical, C: 89.23%, H: 4.99%, N: 5.78%; Measured, C: 89.10%, H: 5.08%, N: 5.82%.

50

Synthesis Example 2: Synthesis of Compound 2-3

55


[0045] The pale yellow compound 2-3 is obtained by using anthraquinone, 2-iodo-4-bromopyridine and phenyl boric acid via the same two-step reaction as in the Example 1.

[0046] Mass Spectrum (MS) of the product (m/e): 484; Elemental analysis (C<sub>36</sub>H<sub>24</sub>N<sub>2</sub>): Theoretical, C: 89.23%, H: 4.99%, N: 5.78%; Measured, C: 89.21%, H: 5.05%, N: 5.74%.

## Synthesis Example 3: Synthesis of Compound 2-5

(1) Reaction of the first step


[0047]

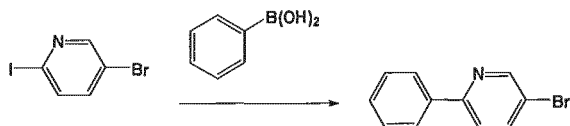

[0048] After argon replacement in a three-neck bottle of 500 ml equipped with magnetic stirrer, 8.26 g of 2-iodo-5-bromopyridine (purity of 99%, 0.0288 mol), 3.58 g of phenyl boric acid (purity of 98%, 0.0292 mol), 1.79 g of Pd(PPh<sub>3</sub>)<sub>4</sub> (AR, 0.00155 mol), 175 ml of aqueous solution of sodium carbonate (concentration of 2M), 175 ml of benzene, and 175 ml of ethanol are sequentially added thereto, refluxed, and allowed to react for 2 hours. The temperature is reduced, and the organic layer is separated and evaporated. The resultant is subjected to column separation with ethyl acetate/petroleum ether in a ratio of 1/20. Thus, 6.75 g of product is obtained with purity of 95.45% and yield of 94.43%.

(2) Reaction of the second step

[0049]

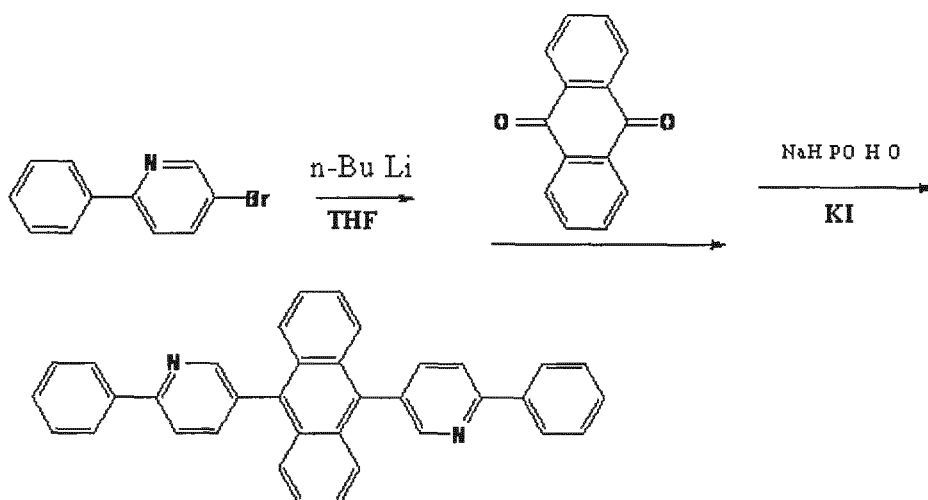

[0050] After nitrogen replacement in a three-neck bottle of 500 ml equipped with magnetic stirrer, 6.75 g of 2-phenyl-5-bromopyridine (purity of 95.45%, 0.0274 mol) and 110 ml of THF are sequentially added thereto. 13 ml of n-butyl lithium (concentration of 2.5 M, 0.0325 mol) is dropwise added at -70°C. After agitation for 10 minutes, 2.6 g of anthraquinone (purity of 99%, 0.0124 mol) is added. After addition, the temperature is naturally raised to room temperature, and the solution exhibits bright yellow color. 200 ml of water is added for hydrolysis, the resultant is extracted with ethyl acetate, and the solvent is evaporated. After adding 220 ml of acetic acid, 22 g of KI and 22 g of sodium hypophosphite, the resultant is refluxed and allowed to react for 1 hour. Then, the temperature is reduced, and the resultant is filtered to obtain 2.8 g of pale yellow product. The pale yellow product is boiled in water/THF with a ratio of 15/100, cooled and filtered, which are repeated for several times. Thus, 2.1g of pale white compound 2-5 is obtained with purity of 99.0% and yield of 20.48%.

[0051] Mass Spectrum of the product (MS) (m/e): 484; Elemental analysis (C<sub>36</sub>H<sub>24</sub>N<sub>2</sub>): Theoretical, C: 89.23%, H: 4.99%, N: 5.78%; Measured, C: 89.30%, H: 5.01%, N: 5.69%.

## Synthesis Example 4: Synthesis of Compound 2-7

[0052] The pale yellow compound 2-7 is obtained by using 2-phenylanthraquinone and 3,5-bromopyridine via the same two-step reaction as in the Example 3. Mass Spectrum (MS) of the product (m/e): 560; Elemental analysis (C<sub>42</sub>H<sub>28</sub>N<sub>2</sub>): Theoretical, C: 89.97%, H: 5.03%, N: 5.00%; Measured, C: 89.91%, H: 5.06%, N: 5.03%.

**Synthesis Example 5: Synthesis of Compound 2-9**

5 [0053] The pale yellow compound 2-9 is obtained by using anthraquinone and 2-phenyl-4-bromopyridine via the same reaction as in the Example 3. Mass Spectrum (MS) of the product (m/e): 560; Elemental analysis (C<sub>42</sub>H<sub>28</sub>N<sub>2</sub>): Theoretical, C: 89.97%, H: 5.03%, N: 5.00%; Measured, C: 89.98%, H: 5.05%, N: 4.97%.

**Synthesis Example 6: Synthesis of Compound 2-11 (reference example)**

10 [0054] The yellow compound 2-11 is obtained by using 2,6-di(3-pyridyl)anthraquinone and 2-iodo-5-bromopyridine via the same reaction as in the Example 1. Mass Spectrum (MS) of the product (m/e): 638; Elemental analysis (C<sub>46</sub>H<sub>30</sub>N<sub>4</sub>): Theoretical, C: 86.49%, H: 4.73%, N: 8.77%; Measured, C: 86.40%, H: 4.79%, N: 8.81%.

**Synthesis Example 7: Synthesis of Compound 2-13 (refence example)**

15 [0055] The pale yellow compound 2-13 is obtained by using 2,6-diphenylanthraquinone and 2-iodo-5-bromopyridine via the same reaction as in the Example 3. Mass Spectrum (MS) of the product (m/e): 636; Elemental analysis (C<sub>48</sub>H<sub>32</sub>N<sub>4</sub>): Theoretical, C: 90.53%, H: 5.07%, N: 4.40%; Measured, C: 90.50%, H: 5.12%, N: 4.38%.

**Synthesis Example 8: Synthesis of Compound 2-15**

20 [0056] The yellow compound 2-15 is obtained by using benzoanthraquinone and 4-phenyl-2-bromopyridine via the same second step reaction as in the Example 3. Mass Spectrum (MS) of the product (m/e): 534; Elemental analysis (C<sub>40</sub>H<sub>26</sub>N<sub>2</sub>): Theoretical, C: 89.86%, H: 4.90%, N: 5.24%; Measured, C: 89.80%, H: 4.91%, N: 5.29%.

**Synthesis Example 9: Synthesis of Compound 2-18**

25 [0057] The yellow compound 2-18 is obtained by using benzoanthraquinone and 2-iodo-5-bromopyridine via the same reaction as in the Example 3. Mass Spectrum (MS) of the product (m/e): 534; Elemental analysis (C<sub>40</sub>H<sub>26</sub>N<sub>2</sub>): Theoretical, C: 89.86%, H: 4.90%, N: 5.24%; Measured, C: 89.85%, H: 4.82%, N: 5.33%.

**Synthesis Example 10: Synthesis of Compound 2-19**

30 [0058] The yellow compound 2-19 is obtained by using dibenzoanthraquinone and 2-iodo-5-bromopyridine via the same reaction as in the Example 3. Mass Spectrum (MS) of the product (m/e): 584; Elemental analysis (C<sub>44</sub>H<sub>28</sub>N<sub>2</sub>): Theoretical, C: 90.38%, H: 4.83%, N: 4.79%; Measured, C: 90.34%, H: 4.90%, N: 4.76%.

**Synthesis Example 11: Synthesis of Compound 2-21**

35 [0059] The yellow compound 2-21 is obtained by using dibenzoanthraquinone and 2-iodo-5-bromopyridine via the same reaction as in the Example 1. Mass Spectrum (MS) of the product (m/e): 584; Elemental analysis (C<sub>44</sub>H<sub>28</sub>N<sub>2</sub>): Theoretical, C: 90.38%, H: 4.83%, N: 4.79%; Measured, C: 90.46%, H: 4.70%, N: 4.84%.

**Synthesis Example 12: Synthesis of Compound 2-23**


40 [0060] The yellow compound 2-23 is obtained by using phenanthraquinone and 2-iodo-5-bromopyridine via the same reaction as in the Example 1. Mass Spectrum (MS) of the product (m/e): 484; Elemental analysis (C<sub>36</sub>H<sub>24</sub>N<sub>2</sub>): Theoretical, C: 89.23%, H: 4.99%, N: 5.78%; Measured, C: 89.40%, H: 4.85%, N: 5.75%.

**Synthesis Example 13: Synthesis of Compound 2-25**

50 [0061]

55

## EP 2 500 343 B1

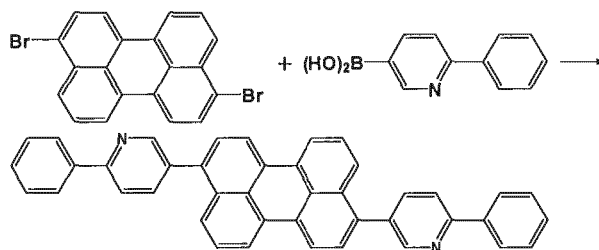

5  
10  
15  
[0062] Under protection of N<sub>2</sub> gas, 4.32 g of 3,9-dibromo-perylene (purity of 95%, 0.01 mol), 5.1 g of 6-phenylpyridyl-3-boric acid (purity of 98%, 0.025 mol), 0.21 g of palladium chloride (purity of AR, 0.0012 mol), 0.63 g of triphenylphosphine (purity of AR, 0.0024 mol), 5.3 g of potassium carbonate (purity of AR, 0.0486 mol), 86 ml of toluene, 60 ml of ethanol, and 72 ml of water are added into a three-neck bottle of 500 ml. The above materials are heated to reflux. The reaction is stopped after 4 hours. The resultant is cooled and filtered. The filter cake is boiled in toluene with heating and filtered. Then, the catalyst is removed, and toluene is evaporated. The solid obtained is boiled in water/THF with a ratio of 1/10, cooled and filtered, which are repeated twice. Thus, 4.2 g of offwhite product is obtained with purity of 99.10% and yield of 75.26%.

20  
[0063] Mass Spectrum (MS) of the product (m/e): 558; Elemental analysis (C<sub>42</sub>H<sub>26</sub>N<sub>2</sub>): Theoretical, C: 90.29%, H: 4.69%, N: 5.01%; Measured, C: 90.11%, H: 4.88%, N: 5.01%.

### Synthesis Example 14: Synthesis of Compound 2-28

25  
[0064] The yellow compound 2-28 is obtained by using 3,9-dibromoperylene and 5-phenylpyridyl-3-boric acid via the same reaction as in the Example 13. Mass Spectrum (MS) of the product (m/e): 558; Elemental analysis (C<sub>42</sub>H<sub>26</sub>N<sub>2</sub>): Theoretical, C: 90.29%, H: 4.69%, N: 5.01%; Measured, C: 90.11%, H: 4.88%, N: 5.01%.

### Synthesis Example 15: Synthesis of Compound 2-31

30  
[0065] The yellow compound 2-31 is obtained by using 6,12-dibromochrysene and 6-phenylpyridyl-3-boric acid via the same reaction as in the Example 13. Mass Spectrum (MS) of the product (m/e): 534; Elemental analysis (C<sub>40</sub>H<sub>26</sub>N<sub>2</sub>): Theoretical, C: 89.96%, H: 4.90%, N: 5.24%; Measured, C: 90.01%, H: 4.86%, N: 5.13%.

### Synthesis Example 16: Synthesis of Compound 2-33

35  
[0066] The yellow compound 2-33 is obtained by using 6,12-dibromochrysene and 5-phenylpyridyl-3-boric acid via the same reaction as in the Example 13. Mass Spectrum (MS) of the product (m/e): 534; Elemental analysis (C<sub>40</sub>H<sub>26</sub>N<sub>2</sub>): Theoretical, C: 89.96%, H: 4.90%, N: 5.24%; Measured, C: 89.80%, H: 4.93%, N: 5.27%.

### Synthesis Example 17: Synthesis of Compound 2-35 (reference example)

40  
[0067] The yellow compound 2-35 is obtained by using 1,6-dibromopyrene and 4-phenylpyridyl-2-boric acid via the same reaction as in the Example 13. Mass Spectrum (MS) of the product (m/e): 508; Elemental analysis (C<sub>38</sub>H<sub>24</sub>N<sub>2</sub>): Theoretical, C: 89.74%, H: 4.76%, N: 5.51%; Measured, C: 89.81%, H: 4.70%, N: 5.49%.

### Synthesis Example 18: Synthesis of Compound 2-37 (reference example)

45  
50  
[0068] The yellow compound 2-37 is obtained by using 1,6-dibromopyrene and 2-phenylpyridyl-4-boric acid via the same reaction as in the Example 13. Mass Spectrum (MS) of the product (m/e): 508; Elemental analysis (C<sub>38</sub>H<sub>24</sub>N<sub>2</sub>): Theoretical, C: 89.74%, H: 4.76%, N: 5.51%; Measured, C: 89.70%, H: 4.81%, N: 5.49%.

### Synthesis Example 19: Synthesis of Compound 3-1 (reference example)

55  
[0069] The pale yellow compound 3-1 is obtained by using 2,9,10-tribromoanthracene and 2-phenylpyridyl-4-boric acid via the same reaction as in the Example 13. Mass Spectrum (MS) of the product (m/e): 637; Elemental analysis (C<sub>47</sub>H<sub>31</sub>N<sub>3</sub>): Theoretical, C: 88.51%, H: 4.90%, N: 6.59%; Measured, C: 88.49%, H: 4.95%, N: 6.56%.

**Synthesis Example 20: Synthesis of Compound 3-3 (reference example)**

**[0070]** The pale yellow compound 3-3 is obtained by using 2,9,10-tribromoanthracene and 6-phenylpyridyl-3-boric acid via the same reaction as in the Example 13. Mass Spectrum (MS) of the product (m/e): 637; Elemental analysis ( $C_{47}H_{31}N_3$ ): Theoretical, C: 88.51%, H: 4.90%, N: 6.59%; Measured, C: 88.55%, H: 4.93%, N: 6.52%.

**Examples of Organic Electroluminescent Apparatuses**

**[0071]** The basic structure of the organic electroluminescent apparatus proposed in the present invention includes: a substrate, a pair of electrodes, and an organic medium disposed between the electrodes, the organic medium including a hole inject layer, a hole transport layer, a luminescent layer, an electron transport layer, an electron inject layer, a blocking layer and the like.

**[0072]** The substrate is a transparent substrate which can be glass or flexible substrate, wherein the flexible substrate can employ a material of polyester compounds and polyimide compounds. The first electrode layer (anode layer) can employ an inorganic material or an organic conductive polymer, wherein the inorganic material is generally metal oxide such as ITO, zinc oxide, tin zinc oxide and the like or metal having a higher work function such as gold, copper, silver and the like, and most preferably ITO, and the organic conductive polymer is preferably a material of polythiophene/sodium polystyrene sulfonate (below abbreviated as PEDOT:PSS) and polyaniline (below abbreviated as PANI). The second electrode layer (cathode layer, metal layer) generally either employs metal having a lower work function such as lithium, magnesium, calcium, strontium, aluminum, indium and the like, or alloy of the metal having a lower work function with copper, gold, or silver, or employs electrode layers alternately formed of metal and metal fluoride. Preferably, the second electrode layer in the present invention is successive Mg:Ag alloy layer and Ag layer, and successive LiF layer and Al layer.


**[0073]** The organic luminescent medium mainly includes an organic electroluminescent layer (EML). EML generally employs a small molecule material which can be a fluorescent material such as compounds of organic metal complex type (e.g., Alq<sub>3</sub>, Gaq<sub>3</sub>, Al(Saph-q) or Ga(Saqh-q)). The small molecule material can be doped with dye in a doping concentration of 0.01 wt% to 20 wt% of the small molecule material. The dye generally is a material of aromatic fused-ring series (e.g., rubrene), coumarin series (e.g., DMQA, C545T), or dipyran series (e.g., DCJTb, DCM). The material for EML also can employ carbazole compounds such as 4,4'-N,N'-dicarbazolyl-biphenyl (CBP), polyvinyl carbazole (PVK). The material can be doped with a phosphorescent dye such as tris(2-phenylpyridine) iridium (Ir(ppy)<sub>3</sub>), di(2-phenylpyridine)(acetylacetonate) iridium (Ir(ppy)<sub>2</sub>(acac)), octaethylporphyrin platinum (PtOEP) and the like.

**[0074]** The hole injection layer and the hole transport layer can also be included in the structure of the above apparatus. The host material for the hole inject layer (HIL) can employ copper phthalocyanine (CuPc), 4,4',4''-tris(N-3-methylphenyl-N-phenyl-amino)-triphenylamine (m-MTDATA), 4,4',4''-tris(N-2-naphthyl-N-phenyl-amino)-triphenylamine (2-TNATA).

**[0075]** The material for the hole transport layer can employ N,N'-bis-(1-naphthyl)-N,N'-diphenyl-1,1'-biphenyl-4,4'-diamine (NPB), TPD and the like.

**[0076]** The material for the electron inject and transport layer in the apparatus employs the material of the present invention.

**[0077]** Several materials used in the present invention are as follows.

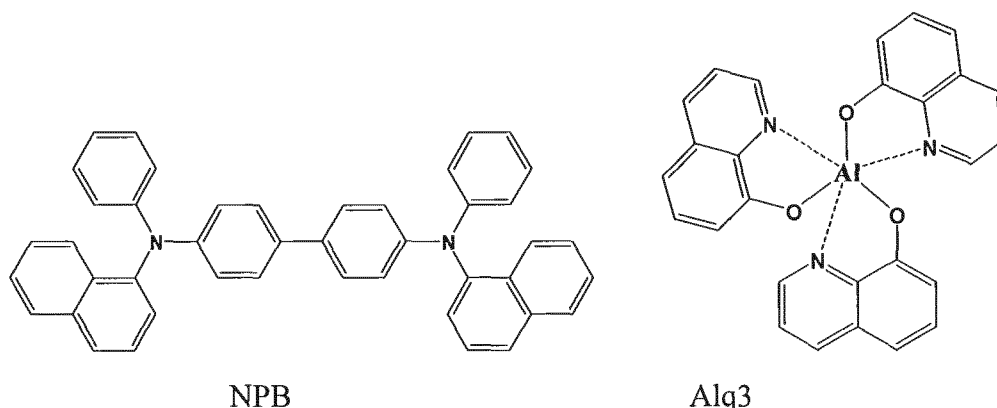



**Comparative Example 3**

**[0092]** Structure of apparatus: ITO/NPB (40nm)/ADN (30nm)/ET-11 (20nm)/ LiF (0.5nm)/Al (150nm)

**[0093]** The apparatus is prepared according to the manner in the Example 1, except that the electron transport layer employs ET-11 and has a thickness of 20nm.

Table 1

	Material used	Voltage at 1000 cd/m <sup>2</sup> V	Current efficiency at 1000 cd/m <sup>2</sup> cd/A	x	y
Example 1	Compound 2-1 (20nm)	8.14	0.97	0.1997	0.2525
Example 2	Compound 2-3 (30nm)	9.95	1.02	0.1858	0.2620
Comparative Example 1	Alq <sub>3</sub> (20nm)	10.76	0.82	0.1927	0.2623
Comparative Example 2	Alq <sub>3</sub> (30nm)	11.58	0.78	0.1951	0.2611
Comparative Example 3	ET-11(20nm)	8.16	0.90	0.1920	0.2565

**[0094]** It can be seen from Table 1 that as compared with Alq<sub>3</sub>, when the electron transport layer employs the Compound 2-1 or 2-3, voltage is lower and current efficiency, lumen efficiency and external quantum efficiency are higher at luminance of 1000 cd/m<sup>2</sup>, and no red shift occurs in chromaticity coordinate. Although the thickness of the electron transport layer in the Example 2 increases by 10nm, the influence on the performance of the apparatus is less. However, when the thickness of the electron transport layer in the Comparative Example 2 also increases by 10nm, the driving voltage of the apparatus increases significantly and the efficiency decreases. As compared with the Example 1, the Comparative Example 3 employing ET-11 as the electron transport layer has a high driving voltage and a low efficiency. The above results demonstrate that the novel organic material of the present invention can be preferably used as the electron transport layer in the organic electroluminescent apparatus.

**Example 3**

**[0095]** Structure of apparatus: ITO/NPB (40nm)/ADN (30nm): 7% of TBPe/Compound 2-9 (30nm)/ LiF/Al

**[0096]** An ITO substrate is treated according to the manner in the Example 1 and placed in a deposition chamber in which a hole inject layer, a hole transport layer, a luminescent layer, an electron transport layer, an electron inject layer and a cathode are successively deposited under a chamber pressure of less than  $5.0 \times 10^{-3}$  Pa during deposition. In the present Example, NPB with a thickness of 40nm is firstly deposited as the hole transport layer, ADN and 2,5,8,11-tetraterbutylperylene (TBPe) with a thickness of 30nm are deposited as the luminescent layer by a method of double source codeposition wherein a ratio of TBPe in ADN is controlled at 7% by rate, the Compound 2-9 with a thickness of 20nm is deposited as the electron transport layer, and LiF with a thickness of 0.5nm and Al with a thickness of 150nm are deposited respectively as the electron inject layer and the cathode.

**Example 4**

**[0097]** Structure of apparatus: ITO/NPB (40nm)/ADN (30nm): 7% of TBPe/Compound 2-9 (20nm)/Alq<sub>3</sub> (10nm)/ LiF/Al

**[0098]** The apparatus is prepared according to the manner in the Example 3, except that the Compound 2-9 with a thickness of 20nm and Alq<sub>3</sub> with a thickness of 10 nm are successively deposited on the luminescent layer as the electron transport layer, and finally LiF with a thickness of 0.5nm and Al with a thickness of 150nm are deposited respectively as the electron inject layer and the cathode.

**Example 5**

**[0099]** Structure of apparatus: ITO/NPB (40nm)/ADN (30nm): 7% of TBPe/Compound 2-9 (20nm)/Compound 3-1 (10nm)/ LiF/Al

**[0100]** The apparatus is prepared according to the manner in the Example 3, except that the Compound 2-9 with a thickness of 20nm and the Compound 3-1 with a thickness of 10 nm are successively deposited on the luminescent layer as the electron transport layer, and finally LiF with a thickness of 0.5nm and Al with a thickness of 150nm are deposited respectively as the electron inject layer and the cathode.

#### Comparative Example 4

**[0101]** Structure of apparatus: ITO/NPB (40nm)/ADN (30nm): 7% of TBPe/Alq<sub>3</sub> (30nm)/ LiF/Al

**[0102]** The apparatus is prepared according to the manner in the Example 3, except that Alq<sub>3</sub> with a thickness of 30 nm are successively deposited on the luminescent layer as the electron transport layer, and finally LiF with a thickness of 0.5nm and Al with a thickness of 150nm are deposited respectively as the electron inject layer and the cathode.

#### Comparative Example 5

**[0103]** Structure of apparatus: ITO/NPB (40nm)/ADN (30nm): 7% of TBPe/ET-12 (30nm)/ LiF/Al

**[0104]** The apparatus is prepared according to the manner in the Example 3, except that ET-12 with a thickness of 30 nm are successively deposited on the luminescent layer as the electron transport layer, and finally LiF with a thickness of 0.5nm and Al with a thickness of 150nm are deposited respectively as the electron inject layer and the cathode.

**[0105]** Table 2

	Condition	Luminance at 8V (cd/m <sup>2</sup> )	Efficiency at 8V (cd/A)	Current density at 8V (A/m <sup>2</sup> )
Example 3	Compound 2-9 (30nm)	15,320	7.3	2,099
Example 4	Compound 2-9 (20nm)/Alq <sub>3</sub> (10nm)	11,350	6.4	1,773
Example 5	Compound (20nm)/Compound 3-1 (10nm)	15,660	7.2	2,175
Comparative Example 4	Alq <sub>3</sub> (30nm)	10,070	6.0	1,678
Comparative Example 5	ET-12	13,850	6.8	2,036

**[0106]** From Table 2, the Example 3 employs the Compound 2-9 of the present invention as the electron transport layer, which achieves higher luminance and efficiency in the system of blue doping layer. The Examples 4 and 5 employs a double-layer structure for the electron transport layer with a difference that the electron transport materials in the two layers are different. View from the apparatuses, the Examples 4 and 5 still achieve higher luminance and efficiency. As compared with the apparatus comprising only the electron transport layer of Alq<sub>3</sub>, the apparatuses of the Examples 3 to 5 are improved in all aspects of luminance, efficiency and current density. It shows that the compound of the present invention can be matched with other electron transport material (e.g., Alq<sub>3</sub>) in order to achieve higher performance of the apparatus.

#### Example 6

**[0107]** Structure of apparatus: ITO/NPB (40nm)/PADN (30nm): 1% of C545T/Compound 2-13 (30nm)/Mg:Ag/Ag

**[0108]** The apparatus is prepared according to the manner in the Example 3, except that the luminescent layer of the present Example is PADN and 2,3,6,7-tetrahydro-1,1,7,7-tetramethyl-1H,5H,11H-10-(2-benzothiazolyl)quinolizinocoumarin (C545T) with a thickness of 30nm by double source codeposition wherein a ratio of C545T in PADN is controlled at 1% by rate, the Compound 2-13 with a thickness of 30nm is deposited on the luminescent layer as the electron transport layer, Mg:Ag (10:1) with a thickness of 100nm is deposited as the cathode by double source codeposition, and finally Ag with a thickness of 50nm is coated as the protective layer.

#### Example 7

**[0109]** Structure of apparatus: ITO/NPB (40nm)/PADN (30nm): 1% of C545T/Compound 2-13 (20nm)/3-3 (10nm)/Mg:Ag/Ag

[0110] The apparatus is prepared according to the manner in the Example 6, except that the Compound 2-13 with a thickness of 20nm and the Compound 3-3 with a thickness of 10 nm are successively deposited on the luminescent layer as the electron transport layer, Mg:Ag (10:1) with a thickness of 100nm is deposited as the cathode by double source codeposition, and finally Ag with a thickness of 50nm is coated as the protective layer.

#### Comparative Example 6

[0111] Structure of apparatus: ITO/NPB (40nm)/PADN (30nm): 1% of C545T/Alq<sub>3</sub> (30nm)/Mg:Ag/Ag

[0112] The apparatus is prepared according to the manner in the Example 6, except that Alq<sub>3</sub> with a thickness of 30nm is deposited on the luminescent layer as the electron transport layer, Mg:Ag (10:1) with a thickness of 100nm is deposited as the cathode by double source codeposition, and finally Ag with a thickness of 50nm is coated as the protective layer.

#### Comparative Example 7

[0113] Structure of apparatus: ITO/NPB (40nm)/PADN (30nm): 1% of C545T/ET-11 (30nm)/Mg:Ag/Ag

[0114] The apparatus is prepared according to the manner in the Example 6, except that ET-11 with a thickness of 30nm is deposited on the luminescent layer as the electron transport layer, Mg:Ag (10:1) with a thickness of 100nm is deposited as the cathode by double source codeposition, and finally Ag with a thickness of 50nm is coated as the protective layer.

Table 3

	Condition	Luminance at 8V (cd/m <sup>2</sup> )	Efficiency at 8V (cd/A)	Current density at 8V (A/m <sup>2</sup> )
Example 6	Compound 2-13 (30nm)	25,780	19.6	1,316
Example 7	Compound 2-13(20nm)/ Compound 3-3(10nm)	27,880	18.7	1,488
Comparative Example 6	Alq <sub>3</sub> (30nm)	20,350	11.8	1,725
Comparative Example 7	ET-11	23,890	17.9	1,334

[0115] From Table 3, the Examples 6 and 7 employs conventional green system of PADN:C545T for the luminescent layer, and its purpose is to verify the application prospect of the compound of the present invention as the electron transport layer in the green system. It can be seen from the comparison of the results of the apparatuses that the electron transport layer used whether in the double layer structure or in the single layer structure can efficiently reduce driving voltage and increase luminance and efficiency of the apparatus. The Examples 6 and 7 are greatly improved in all aspects of luminance, efficiency and current density as compared with the Comparative Example 6.

#### Example 8

[0116] Structure of apparatus: ITO/NPB (40nm)/Alq<sub>3</sub> (50nm)/Compound 2-21 :CsCO<sub>3</sub> (20nm, 10%)/Al (150nm)

[0117] An ITO conductive glass substrate with a specific pattern etched is used as a substrate. The substrate is placed in deionized water containing a cleaning liquid at about 60 °C for ultrasonic cleaning. Then, the cleaned substrate is dried by using an infrared lamp and placed into a deposition chamber in which a hole inject layer, a hole transport layer, a luminescent layer, an electron transport layer, an electron inject layer and a cathode are successively deposited under a chamber pressure of less than  $5.0 \times 10^{-3}$  Pa during deposition.

[0118] In the present Example, NPB with a thickness of 40 nm is firstly deposited on the ITO anode as the hole transport layer, 8-hydroxyquinolino aluminum (Alq<sub>3</sub>) with a thickness of 50nm is successively deposited as the luminescent layer, the electron inject and transport functional layer with a thickness of 20nm is deposited by codepositon wherein the doping concentration of the compound of CsCO<sub>3</sub> in the Compound 2-21 of the present invention is 10% (by weight), and finally Al with a thickness of 150nm is deposited as the cathode.

#### Example 9

[0119] Structure of apparatus: ITO/NPB (40nm)/Alq<sub>3</sub> (50nm)/Compound 2-25:CsF (20nm, 10%)/Al (150nm)

[0120] The apparatus having the above structure is prepared according to the method in the Example 8, except that the Compound 2-25 of the present invention doped with 10% (by weight) of CsF is used as the electron inject and transport functional layer.

5 **Example 10**

[0121] Structure of apparatus: ITO/NPB (40nm)/Alq<sub>3</sub> (50nm)/Compound 2-28:KBH (20nm, 10%)/Al (150nm)

[0122] The apparatus having the above structure is prepared according to the method in the Example 8, except that the Compound 2-28 doped with 10% (by weight) of KBH is used as the electron inject and transport functional layer.

10

**Example 11**

[0123] Structure of apparatus: ITO/NPB (40nm)/Alq<sub>3</sub> (20nm)/Compound 2-18 (20nm)/Compound 2-3:Li<sub>3</sub>N (20nm, 10%)/Al (150nm)

15 [0124] The apparatus having the above structure is prepared according to the method in the Example 8, except that the luminescent layer is Alq<sub>3</sub> with a thickness of 30nm, the Compound 2-18 with a thickness of 20nm is firstly deposited thereon as a buffer layer of the apparatus, and then the Compound 2-3 doped with 10% (by weight) of Li<sub>3</sub>N is used as the electron inject and transport functional layer.

20 **Comparative Example 8**

[0125] Structure of apparatus: ITO/NPB (40nm)/Alq<sub>3</sub> (50nm)/LiF (0.5nm)/Al (150nm)

[0126] The apparatus having the above structure is prepared according to the method in the Example 8, except that the apparatus contains no electron inject and transport functional layer of the present invention, and only employs the electron inject layer of LiF.

25

**Comparative Example 9**

[0127] Structure of apparatus: ITO/NPB (40nm)/Alq<sub>3</sub> (50nm)/Alq<sub>3</sub>:KBH (20nm, 10%)/Al (150nm)

30 [0128] The apparatus having the above structure is prepared according to the method in the Example 8, except that the apparatus contains no electron inject and transport functional layer of the present invention, and only employs the electron inject layer of Alq<sub>3</sub>:KBH.

30

**Comparative Example 10**

[0129] Structure of apparatus: ITO/NPB (40nm)/Alq<sub>3</sub> (50nm)/ET-12:Li<sub>3</sub>N (20nm, 10%)/Al (150nm)

[0130] The apparatus having the above structure is prepared according to the method in the Example 8, except that the apparatus contains no electron inject and transport functional layer of the present invention, and only employs the electron inject layer of ET-12:Li<sub>3</sub>N.

35

40 [0131] The performance data of the apparatuses in the above Examples are listed in following Table 4.

Table 4

	Structure of apparatus	Luminance cd/m <sup>2</sup>	Voltage V	Current density A/m <sup>2</sup>	Current efficiency cd/A	T <sub>70%</sub> (h) @2000cd/ m <sup>2</sup>	
45	Example 8	Compound 2-21:CsCO <sub>3</sub> (20nm, 10%)/Al	2000	6.78	539.94	3.70	358
50	Example 9	Compound 2-25:CsF (20nm, 10%)/Al	2000	6.86	628.54	3.18	216
	Example 10	Compound 2-28:KBH (20nm, 10%)/Al	2000	7.52	554.56	3.61	455
55	Example 11	Compound 2-18(20nm)/ Compound 2-3:Li <sub>3</sub> N (20nm, 10%)/Al	2000	6.48	662.71	3.02	558

(continued)

	Structure of apparatus	Luminance cd/m <sup>2</sup>	Voltage V	Current density A/m <sup>2</sup>	Current efficiency cd/A	T <sub>70%</sub> (h) @2000cd/ m <sup>2</sup>	
5	Comparative Example 8	LiF(0.5nm)/Al(150nm)	2000	6.58	645.16	3.10	120
10	Comparative Example 9	Alq <sub>3</sub> :KBH(20nm, 10%)/Al (150nm)	2000	7.55	692.04	2.89	169
	Comparative Example 10	ET-12:Li <sub>3</sub> N(20nm, 10%)/Al (150nm)	2000	7.21	653.59	3.06	187

15 **[0132]** From Table 4, the Examples 8 to 11 are typical double layer apparatuses of NPB/Alq<sub>3</sub> and employ the Compound 2-21, the Compound 2-25 and the Compound 2-28 to be mixed with different dopants. Their driving voltages, efficiencies and stabilities are compared. At luminance of 2000 cd/m<sup>2</sup>, the driving voltages are distributed in the range of 6.48V to 7.52V, and the efficiencies are up to 3.7 cd/A. The stabilities are compared by lives during which the luminance is decreased to 70%, and the lives are possibly 200 hours to 560 hours.

20 **[0133]** In the Example 11, one buffer layer which is the Compound 2-18 with a thickness of 20nm is further disposed between the luminescent layer and the doped electron transport and inject layer. Adding the buffer layer can separate the luminescent layer from the inorganic dopant, prevent the inorganic dopant from diffusing into the luminescent layer, and thus increase the life of the apparatus more efficiently, the life being 558 hours when the luminance is decreased to 70%, which is significantly longer than the other Examples and the Comparative Examples.

25 **[0134]** The Comparative Example 8 is a conventional double layer apparatus of NPB/Alq<sub>3</sub>/LiF/Al, and does not employ the doped structure of the present invention. Since the overall thickness of the organic layer in the apparatus is less than that in the Examples 1-4 (by 20nm), the driving voltage is lower, 6.58V and the efficiency reaches 3.10 cd/A, but the life is only 120 hours. Besides, the Comparative Example 9 employ commonly used Alq<sub>3</sub>, and the Comparative Example 10 employs the material of ET-12. Since the electron mobilities of Alq<sub>3</sub> and BAq is less than that of the organic material of the present invention, After the dopant is mixed therewith, the Comparative Examples show higher driving voltages and lower efficiencies. The lives of the Comparative Examples 9 and 10 are less than that of the Examples by 20% or more, although they are improved relative to the Comparative Example 8, which is related to lower glass transition temperatures of Alq<sub>3</sub> and ET-12.

### 35 Example 12

**[0135]** Structure of apparatus: ITO/m-MTDATA:F<sub>4</sub>-TCNQ (150nm, 2%)/NPB (20nm)/MADN:TBPe (30nm, 5%)/Alq<sub>3</sub> (10nm)/Compound 2-33:CsF (10nm, 5%)/Al (150nm)

40 **[0136]** The apparatus having the above structure is prepared according to the method in the Example 1. The hole inject layer is deposited on the ITO anode surface, the hole inject layer being m-MTDATA doped with 2% of F<sub>4</sub>-TCNQ with a thickness of 150nm. NPB with a thickness of 20nm is deposited thereon as the hole transport layer. The luminescent layer is a blue host of 2-methyl-9,10-di(2-naphthyl)-anthracene (MADN) doped with 5% of a blue dye of 2,5,8,11-tetrater-butylperylene (TBPe) and has a thickness of 30nm. The buffer layer between the luminescent layer and the electron transport and inject layer has a thickness of 10nm and the deposition material thereof is Alq<sub>3</sub>. The electron inject and transport functional layer is prepared using the Compound 2-33 and CsF by codeposition and has a thickness of 10nm, and the doping concentration of CsF is 5%. Finally, Al metal with a thickness of 150nm is deposited as the cathode.

### 50 Example 13

**[0137]** Structure of apparatus: ITO/m-MTDATA:F<sub>4</sub>-TCNQ (150nm, 2%)/NPB (20nm)/MADN:TBPe (30nm, 5%)/BCP (2nm)/Compound 2-33:Li<sub>3</sub>N (10nm, 25%)/Al (150nm)

55 **[0138]** The apparatus having the above structure is prepared according to the method in the Example 12, except that the buffer layer between the luminescent layer and the electron transport and inject layer has a thickness of 2nm and the deposition material thereof is 2,9-dimethyl-4,7-diphenyl-1,10-phenanthroline (BCP), and the electron inject and transport functional layer is prepared using the Compound 2-33 and Li<sub>3</sub>N by codeposition and has a thickness of 10nm, and the doping concentration of Li<sub>3</sub>N is 25%.

**Example 14**

**[0139]** Structure of apparatus: ITO/m-MTDATA:F<sub>4</sub>-TCNQ (150nm, 2%)/NPB (20nm)/MADN:TBPc (30nm, 5%)/PBD (20nm)/Compound 2-33:LiF (10nm, 50%)/Al

(150nm)

**[0140]** The apparatus having the above structure is prepared according to the method in the Example 12, except that the buffer layer between the luminescent layer and the electron transport and inject layer has a thickness of 20nm and the deposition material thereof is 2-(4-diphenyl)-5-(4-tertbutylphenyl)-1,3,4-oxadiazole (PBD), and the electron inject and transport functional layer is prepared using the Compound 2-33 and LiF by codeposition and has a thickness of 10nm, and the doping concentration of LiF is 50%.

**Comparative Example 11**

**[0141]** Structure of apparatus: ITO/m-MTDATA:F<sub>4</sub>-TCNQ (150nm, 2%)/NPB (20nm)/MADN:TBPc (30nm, 5%)/Alq<sub>3</sub> (20nm)/LiF (0.5nm)/Al (150nm)

**[0142]** The apparatus having the above structure is prepared according to the method in the Example 12, except that there is no doped electron transport and inject layer, and instead, Alq<sub>3</sub> with a thickness of 20nm is directly deposited on the luminescent layer as the electron transport layer, and finally LiF with a thickness of 0.5nm and Al with a thickness of 150nm are respectively deposited as the electron inject layer and the cathode.

**Comparative Example 12**

**[0143]** Structure of apparatus: ITO/m-MTDATA:F<sub>4</sub>-TCNQ (150nm, 2%)/NPB (20nm)/MADN:TBPc (30nm, 5%)/Compound 2-33 (20nm)/LiF (0.5nm)/Al (150nm)

**[0144]** The apparatus having the above structure is prepared according to the method in the Example 12, except that there is no doped electron transport and inject layer, and instead, the Compound 2-33 with a thickness of 20nm is directly deposited on the luminescent layer as the electron transport layer, and finally LiF with a thickness of 0.5nm and Al with a thickness of 150nm are respectively deposited as the electron inject layer and the cathode.

**[0145]** The performance data of the apparatuses in the above Examples 12 to 14 and the Comparative Examples 11 and 12 are listed in following Table 5.

	Structure of apparatus	Luminance cd/m <sup>2</sup>	Voltage V	Current density A/m <sup>2</sup>	Current efficiency cd/A	x(5V)	y(5V)
Example 12	Alq <sub>3</sub> (10nm)/ Compound 2-33:CsF (10nm, 5%)	5000	8.06	722.07	6.92	0.1434	0.1901
Example 13	BCP(2nm)/ Compound 2-33:Li <sub>3</sub> N (10nm, 25%)	5000	8.52	762.84	6.55	0.1419	0.1892
Example 14	PBD(20nm)/ Compound 2-33:LiF (10nm, 50%)	5000	8.35	813.71	6.14	0.1415	0.1874
Comparative Example 11	Alq <sub>3</sub> (20nm)/LiF/Al	5000	9.85	915.39	5.46	0.1417	0.1879
Comparative Example 12	Compound 2-33 (20nm)/LiF/Al	5000	5.90	751.57	6.65	0.1417	0.1810

**[0146]** The Examples 12 to 14 employ the Compound 2-33 doped with the dopant in different ratios (the concentration being 5% to 50%), while the buffer layer employs different materials having electron transport property, and thus the obtained apparatuses have better performance. As compared with the Comparative Example 11, they have lower driving voltages wherein the voltage is reduced by 1.8V at best. The efficiencies of the apparatuses wherein the Compound 2-33 is doped are also higher, and are increased by 0.5 to 1.5 cd/A as compared with 5.46 cd/A in the Comparative

Example 11 which increases by 27% at best. Meanwhile, from the comparison of the stabilities, after the Compound 2-33 is doped, the apparatuses all have prolonged half lives (initial luminance of 5000 cd/m<sup>2</sup>), which increased by 50% or more relative to that of the Comparative Example 11. The use of the buffer layer separates the inorganic dopant from the luminescent layer, which avoids luminescent quenching phenomenon and is beneficial for improvement of the stability of the apparatus.

[0147] In addition, the Comparative Example 12 employs undoped Compound 2-33. As compared with the Examples 12 to 14, the Comparative Example 12 has very low driving voltage which is only 5.9V due to lack of Alq<sub>3</sub> having lower mobility. However, the life of the Comparative Example 12 is less than those of the Examples 12 to 14 due to undoping.

[0148] It can be seen that by matching ETL and a dopant material and designing reasonable doping ratio and structure of apparatus, a balance point can be found among the driving voltage, the efficiency and the stability, thereby achieving an apparatus having optimal performance and higher practicability, and improving performance of OLED product.

#### Example 15

[0149] Structure of apparatus: ITO/NPB (40nm)/Alq<sub>3</sub> (30nm)/Compound 2-5 (20nm)/Compound 2-5:Li<sub>3</sub>N (10nm, 10%)/V<sub>2</sub>O<sub>5</sub> (10nm)/NPB (40nm)/Alq<sub>3</sub> (30nm)/Compound 2-5 (20nm)/LiF (0.5nm)/Al (150nm)

[0150] An ITO conductive glass substrate with a specific pattern etched is used as a substrate. The substrate is placed in deionized water containing a cleaning liquid at about 60 °C for ultrasonic cleaning. Then, the cleaned substrate is dried by using an infrared lamp and placed into a deposition chamber in which each functional layer is successively deposited under a chamber pressure of less than 5.0×10<sup>-3</sup> Pa during deposition.

[0151] In the present Example, a first luminescent unit is firstly prepared on the ITO anode. NPB with a thickness of 40 nm is deposited as the hole transport layer, Alq<sub>3</sub> with a thickness of 30nm is then deposited thereon as the luminescent layer, the electron transport layer with a thickness of 20nm is deposited and employs the Compound 2-5 of the present invention. Then, connection layers are prepared on the first luminescent unit. An N-type connection layer is deposited by codepositing the Compound 2-5 and 10% by weight of Li<sub>3</sub>N to a thickness of 10nm, and a P-type connection layer is obtained by depositing V<sub>2</sub>O<sub>5</sub> to a thickness of 10nm. Subsequently, a second luminescent unit is prepared on the connection layers by deposition, and the structure and the deposition order of the second luminescent unit are the same as those of the first luminescent unit. Finally, the electron inject layer of LiF with a thickness of 0.5nm is deposited by thermal deposition, and the cathode metal layer of Al with a thickness of 150nm is coated thereon.

#### Example 16

[0152] Structure of apparatus: ITO/NPB (40nm)/Alq<sub>3</sub> (30nm)/Compound 2-35 (20nm)/Compound 2-35:Li<sub>3</sub>N (10nm, 10%)/V<sub>2</sub>O<sub>5</sub> (10nm)/NPB (40nm)/Alq<sub>3</sub> (30nm)/Compound 2-35 (20nm)/LiF (0.5nm)/Al (150nm)

[0153] The apparatus having the above structure is prepared according to the manner in the Example 15, except that the material used in the electron transport layer and in the N-type layer in the connection layers is changed to the Compound 2-35.

#### Example 17

[0154] Structure of apparatus: ITO/NPB (40nm)/Alq<sub>3</sub> (30nm)/Compound 3-3 (20nm)/Compound 2-13:Li<sub>3</sub>N (10nm, 10%)/V<sub>2</sub>O<sub>5</sub> (10nm)/NPB (40nm)/Alq<sub>3</sub> (30nm)/Compound 3-3 (20nm)/LiF (0.5nm)/Al (150nm)

[0155] The apparatus having the above structure is prepared according to the manner in the Example 15, except that the material used in the electron transport layer is changed to the Compound 3-3 and the material used in the N-type layer in the connection layers is changed to the Compound 2-13.

#### Comparative Example 8

[0156] Structure of apparatus: ITO/NPB (40nm)/Alq<sub>3</sub> (30nm)/Alq<sub>3</sub> (20nm)/LiF (0.5nm)/Al (150nm)

[0157] The preparation method is described as above.

#### Comparative Example 13

[0158] Structure of apparatus: ITO/NPB (40nm)/Alq<sub>3</sub> (30nm)/Alq<sub>3</sub> (20nm)/Alq<sub>3</sub>:Li<sub>3</sub>N (10nm, 10%)/V<sub>2</sub>O<sub>5</sub> (10nm)/NPB (40nm)/Alq<sub>3</sub> (30nm)/Alq<sub>3</sub> (20nm)/LiF (0.5nm)/Al (150nm)

[0159] The apparatus having the above structure is prepared according to the manner in the Example 15, except that the material used in the electron transport layer and in the N-type layer in the connection layers is changed to Alq<sub>3</sub>.

	Voltage at 2000cd/m <sup>2</sup> V	Current efficiency at 2000cd/m <sup>2</sup> cd/A	Lumen efficiency at 2000cd/m <sup>2</sup> lm/W
Example 15	13.0	6.1	1.2
Example 16	13.2	5.8	1.1
Example 17	12.8	6.4	1.2
Comparative Example 8	6.6	3.1	1.2
Comparative Example 13	13.8	5.3	1.1

**[0160]** The Comparative Example 8 is an apparatus having a single luminescent unit, and employs Alq<sub>3</sub> with a thickness of 20nm as the electron transport layer. The Examples 15 to 17 and the Comparative Example 13 are apparatuses wherein two luminescent units are stacked, and their difference lies that the Comparative Example employs Alq<sub>3</sub> as the electron transport layer and the N-type layer in the connection layers, while the Examples 15 to 17 employ the compounds of the present invention.

**[0161]** It can be seen from the comparison of the performance in the above table that the current efficiency of the apparatus employing the structure wherein two luminescent units are stacked is increased about 100% as compared with the apparatus comprising the single luminescent unit. The compounds 2-5, 2-35 and 2-13 of the present invention not only are used as the electron transport layer, but also are used as the host material in the N-type connection of the N/P connection layers. Moreover, the current efficiencies of the Examples 15 to 17 are also obviously higher than that of the Comparative Example 13. By comparing the Examples and the Comparative Example 8, the driving voltages of the Examples 15 to 17 are less than twice of the driving voltage of the Comparative Example 8, although the Examples 15 to 17 have two luminescent units. It can be seen that the compound of the present invention as the N-type layer in the connection layers has more efficient electron generating and inject ability and can significantly decrease driving voltage and increase efficiency.

#### Example 18

**[0162]** Structure of apparatus: ITO/HAT (5nm)/NPB (20nm)/Alq<sub>3</sub>:C545T (30nm, 1%)/Alq<sub>3</sub> (20nm)/Compound 2-28:Li<sub>3</sub>N (20nm, 5%)/MoO<sub>3</sub> (15nm)/NPB (20nm)/Alq<sub>3</sub>:C545T (30nm, 1%)/Alq<sub>3</sub> (20nm)/LiF (0.5nm)/Al (150nm)

**[0163]** The apparatus having the above structure is prepared according to the manner in the Example 15, except that the hole inject layer of HAT with a thickness of 5nm is firstly deposited on ITO, the hole transport layer of NPB has a thickness of 20nm, the luminescent layer is a system in which Alq<sub>3</sub> is doped with C545T and has a thickness of 30nm, the concentration of the green dye is 1%, the electron transport layer is changed to Alq<sub>3</sub>, the N-type layer in the connection layers is the Compound 2-28 doped with 5% of Li<sub>3</sub>N and has a thickness of 20nm, and the P-type connection layer is MoO<sub>3</sub> and has a thickness of 15nm.

#### Example 19

**[0164]** Structure of apparatus: ITO/HAT (5nm)/NPB (20nm)/Alq<sub>3</sub>:C545T (30nm, 1%)/Alq<sub>3</sub> (20nm)/Compound 2-28:Li<sub>3</sub>N (15nm, 20%)/m-MTDATA:F<sub>4</sub>-TCNQ (20nm, 2%)/NPB (20nm)/Alq<sub>3</sub>:C545T (30nm, 1%)/Alq<sub>3</sub> (20nm)/LiF (0.5nm)/Al (150nm)

**[0165]** The apparatus having the above structure is prepared according to the manner in the Example 18, except that the N-type layer in the connection layers has a thickness of 15nm and a doping ratio of 20%, and the P-type layer is m-MTDATA doped with 2% of F<sub>4</sub>-TCNQ and has a thickness of 20nm.

#### Example 20

**[0166]** Structure of apparatus: ITO/HAT (5nm)/NPB (20nm)/Alq<sub>3</sub>:C545T (30nm, 1%)/Alq<sub>3</sub> (20nm)/Compound 2-28:Li<sub>3</sub>N (5nm, 10%)/HAT (5nm)/NPB (20nm)/Alq<sub>3</sub>:C545T (30nm, 1%)/Alq<sub>3</sub> (20nm)/LiF (0.5nm)/Al (150nm)

**[0167]** The apparatus having the above structure is prepared according to the manner in the Example 18, except that the N-type layer in the connection layers has a thickness of 5nm and a doping ratio of 10%, and the P-type layer is HAT (hexanitride hexaazatriphenylene) and has a thickness of 5nm.

**Example 21**

**[0168]** Structure of apparatus: ITO/HAT (5nm)/NPB (20nm)/Alq<sub>3</sub>:C545T (30nm, 1%)/Alq<sub>3</sub> (20nm)/Compound 2-28: 70% of Li<sub>3</sub>N (5nm, 10%)/HAT (5nm)/NPB (20nm)/Alq<sub>3</sub>:C545T (30nm, 1%)/Alq<sub>3</sub> (20nm)/LiF (0.5nm)/Al (150nm)

**[0169]** The apparatus having the above structure is prepared according to the manner in the Example 20, except that the doping ratio of Li<sub>3</sub>N in the N-type layer of the connection layers is 70%.

**Comparative Example 14**

**[0170]** Structure of apparatus: ITO/HAT (5nm)/NPB (20nm)/Alq<sub>3</sub>:C545T (30nm, 1%)/Alq<sub>3</sub> (20nm)/LiF (0.5nm)/Al (150nm)

**[0171]** The apparatus having the above structure is prepared according to the manner in the Example 18, except that the apparatus comprises only one luminescent unit and no connection layer.

**Comparative Example 15**

**[0172]** Structure of apparatus: ITO/HAT (5nm)/NPB (20nm)/Alq<sub>3</sub>:C545T (30nm, 1%)/Alq<sub>3</sub> (20nm)/Alq<sub>3</sub>:Li (10nm, 10%)/HAT (10nm)/NPB (20nm)/Alq<sub>3</sub>:C545T (30nm, 1%)/Alq<sub>3</sub> (20nm)/LiF (0.5nm)/Al (150nm)

**[0173]** The apparatus having the above structure is prepared according to the manner in the Example 18, except that the N-type layer in the connection layers is Alq<sub>3</sub> doped with 10% of Li and has a thickness of 10nm, and the P-type layer is HAT with a thickness of 10nm.

**Comparative Example 16**

**[0174]** Structure of apparatus: ITO/HAT (5nm)/NPB (20nm)/Alq<sub>3</sub>:C545T (30nm, 1%)/Alq<sub>3</sub> (20nm)/ET-11:Li (10nm, 10%)/HAT (10nm)/NPB (20nm)/Alq<sub>3</sub>:C545T (30nm, 1%)/Alq<sub>3</sub> (20nm)/LiF (0.5nm)/Al (150nm)

**[0175]** The apparatus having the above structure is prepared according to the manner in the Example 18, except that the N-type layer in the connection layers is ET-11 doped with 10% of Li and has a thickness of 10nm, and the P-type layer is HAT with a thickness of 10nm.

	Voltage at 1000cd/m <sup>2</sup> V	Current efficiency at 1000cd/m <sup>2</sup> cd/A	Lumen efficiency at 1000cd/m <sup>2</sup> lm/W
Example 18	8.0	15.0	5.89
Example 19	8.5	14.8	5.47
Example 20	7.5	16.2	6.78
Example 21	9.2	14.5	4.95
Comparative Example 14	4.2	8.0	5.9
Comparative Example 15	8.9	14.6	5.16
Comparative Example 16	8.8	14.8	5.21

**[0176]** The Comparative Example 14 is an apparatus having a single luminescent unit. The Comparative Example 15 and the Examples 18 to 21 are apparatuses wherein two luminescent units are stacked, and their difference lies that the material of the N-type connection layer in the Comparative Example 15 employs Alq<sub>3</sub>, while the material of the N-type connection layer in the Examples 18 to 21 employ the Compound 2-28 of the present invention and matches with different P-type connection layers. The N-type connection layer in the Comparative Example 16 employs ET-11, and the driving voltage of the apparatus is slightly higher than that of the Examples and the efficiency is slightly lower. It demonstrates that the compound of the present invention has better transport property than ET-11.


**[0177]** It can be seen from the comparison of the performance in the above table that the connection layer of 2-28: 10% of Li<sub>3</sub>N/HAT is the preferable structure in this series. The Example 20 are significantly improved in terms of current efficiency and lumen efficiency as compared with the other apparatuses. As compared with the Comparative Example 14 comprising the single luminescent unit, the Example 20 has a driving voltage less than twice of the voltage of the

Comparative Example. It shows that the connection layer in the Example 20 has optimal carrier generating and inject property and increases efficiency of the stacked apparatus.

5 **Claims**

1. An organic material represented by following Formula 1:

10

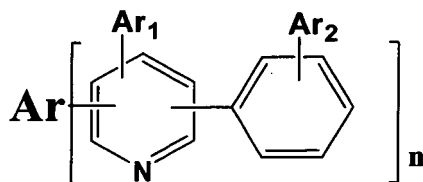


15

(1)

wherein Ar<sub>1</sub> is hydrogen atom, and Ar<sub>2</sub> is selected from the group consisting of hydrogen, C<sub>6</sub>-C<sub>24</sub> aryl, and C<sub>6</sub>-C<sub>24</sub> heterocyclic aryl, and n is an integer selected from 2, wherein Ar has following structure:

20

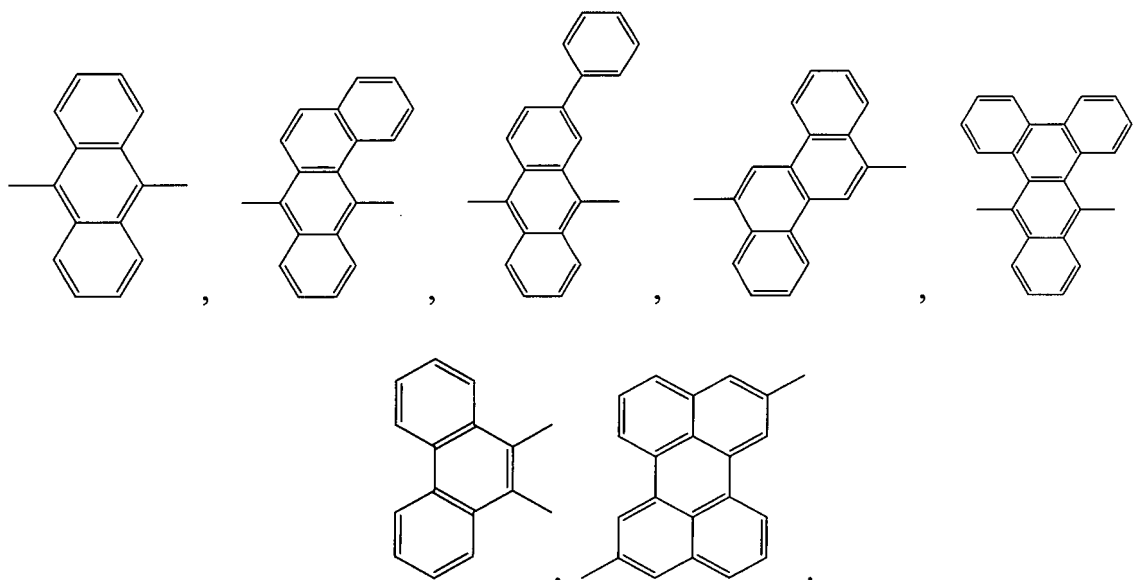

25


30

35

40


2. The organic material of claim 1, **characterized in that** the Formula 1 is one of following Formulae 2 to 7:

45

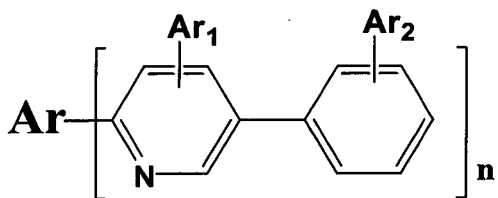


(2)

50

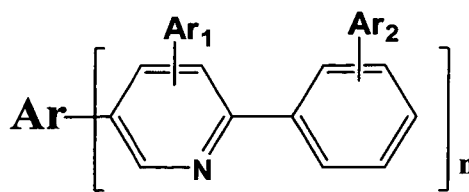

(3)


55

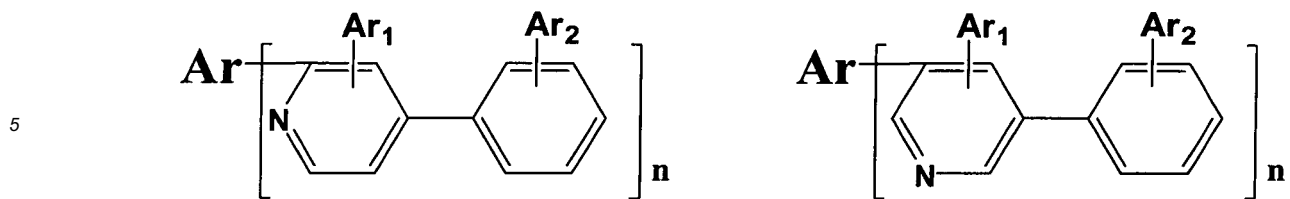

(4)

(5)

10

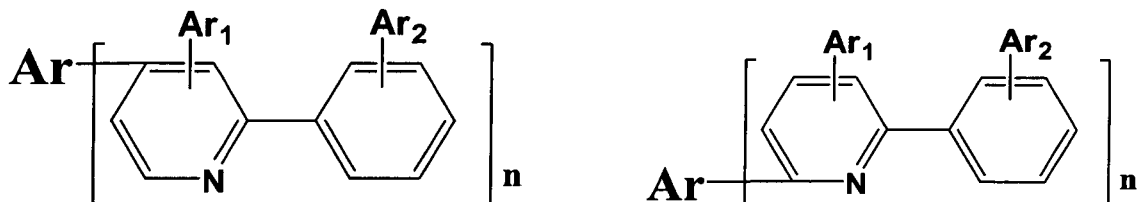


(6)

(7)


20

3. The organic material of claim 1 or 2, **characterized in that** the group connected to Ar is

25

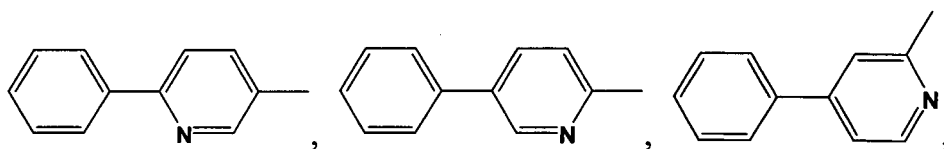


30

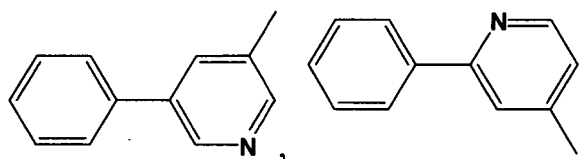

35

4. The organic material of claim 1 or 2, **characterized in that** the organic material is represented by following structural formulae:

40

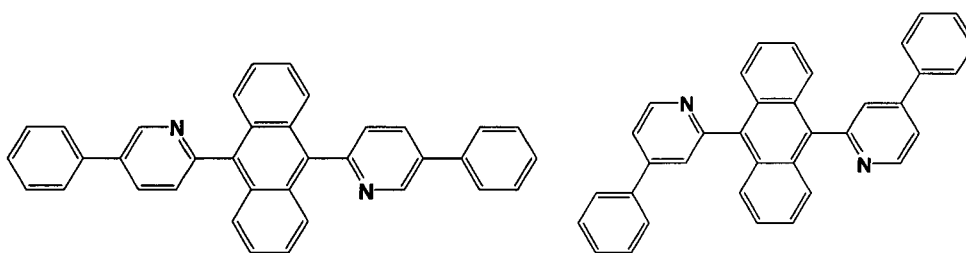


2-1

2-3


50

55

5

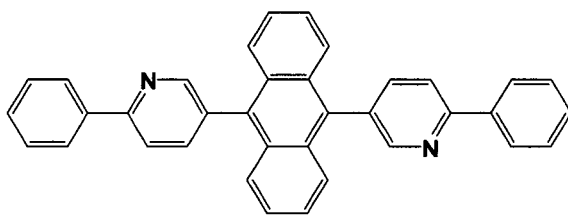


2-5

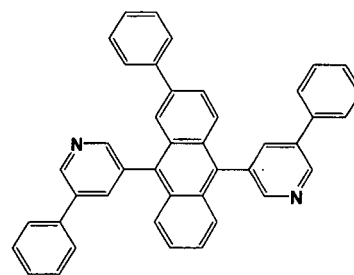

2-7

10


15

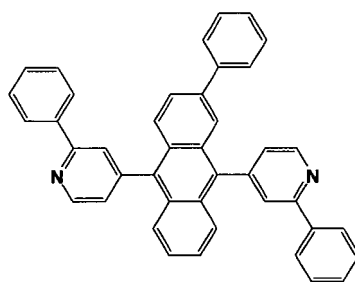

2-9

20

25

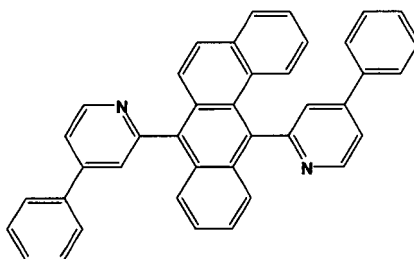


2-15


30

35

40

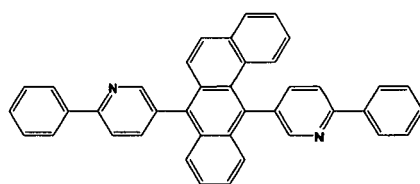


2-18

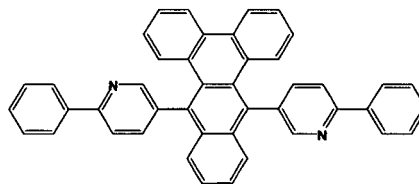


2-19

45

50

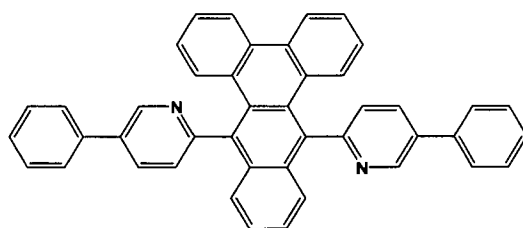


2-21




2-23


55

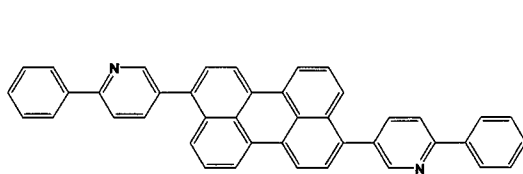


2-25

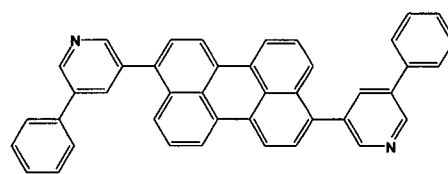

2-28

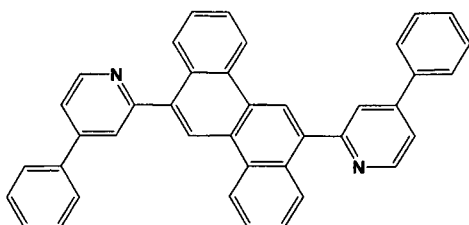

2-31

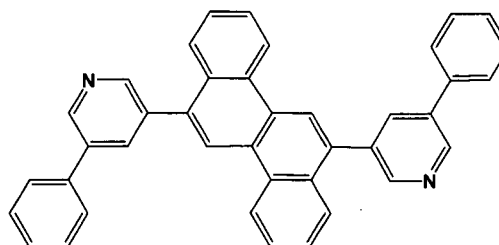

2-33

- 5
- 10
- 15
- 20
- 25
- 30
- 35
- 40
- 45
- 50
- 55
5. Use of the organic material of any of claims 1 to 4 as an electron transport material in an organic electroluminescent apparatus.
  6. An organic electroluminescent apparatus comprising a pair of electrodes and an organic luminescent medium disposed between the pair of electrodes, the organic luminescent medium comprising the organic material of any of claims 1 to 4.
  7. The organic electroluminescent apparatus of claim 6, the organic luminescent medium comprising a luminescent layer and an electron transport functional layer, wherein the organic material of any of claims 1 to 4 is contained in the electron transport functional layer.
  8. The organic electroluminescent apparatus of claim 7, wherein the electron transport functional layer further contains another electron transport material selected from the group consisting of oxazole compounds, metal chelates, triazole compounds, imidazole compounds, phenanthroline compounds or anthracene compounds.
  9. The organic electroluminescent apparatus of claim 8, **characterized in that** the oxazole compounds, metal chelates, triazole compounds, imidazole compounds, phenanthroline compounds or anthracene compounds are:
    - 2-(4-tertbutylphenyl)-5-(4-biphenyl)-1,3,4-oxadiazole,
    - tris(8-hydroxyquinolato)aluminum,
    - 3-(4-biphenyl)-4-phenyl-5-(4-butylphenyl)-1,2,4-triazole,
    - 4,7-diphenyl-1,10-phenanthroline, 2,9-dimethyl-4,7-diphenyl-1,10-phenanthroline, or
    - 2-phenyl-9,10-dinaphthylanthracene.
  10. The organic electroluminescent apparatus of claim 6, the organic luminescent medium comprising a luminescent layer and an electron inject and transport functional layer, wherein the organic material of any of claims 1 to 4 is contained in the electron inject and transport functional layer, and the electron inject and transport functional layer further contains a dopant selected from the group consisting of alkaline metals, alkaline metal oxides, alkaline metal halides, alkaline metal nitrides, and alkaline metal salts.
  11. The organic electroluminescent apparatus of claim 10, wherein the dopant is selected from the group consisting of lithium, cesium, lithium nitride, lithium fluoride, lithium cobaltate, lithium oxide, 8-hydroxyquinolato lithium, cesium carbonate, potassium borohydride, lithium borohydride, sodium fluoride, sodium chloride, cesium fluoride, cesium chloride, and rubidium oxide.
  12. The organic electroluminescent apparatus of claim 10, **characterized in that** the electron inject and transport functional layer has a thickness of 2nm to 40nm, and a doping ratio of the dopant in the electron inject and transport functional layer is 0.1% to 49% by weight based on the organic material of any of claims 1 to 4.

13. The organic electroluminescent apparatus of claim 12, **characterized in that** the electron inject and transport functional layer has a thickness of 5nm to 25nm, and the doping ratio of the dopant in the electron inject and transport functional layer is 0.5% to 30% by weight based on the organic material of any of claims 1 to 4.

14. The organic electroluminescent apparatus of claim 10, **characterized in that** a buffer layer is further included between the electron inject and transport functional layer and the luminescent layer, and the material of the buffer layer is selected from the compounds as defined in claim 1 or 2, or selected from the group consisting of oxazole compounds, metal complexes, triazole compounds, imidazole compounds, quinoline compounds, oxaline compounds, phenazine compounds, and phenanthroline compounds.

15. The organic electroluminescent apparatus of claim 14, **characterized in that** the material of the buffer layer is selected from the compound as defined in claim 4, or selected from the group consisting of 2-(4-tertbutylphenyl)-5-(4-biphenyl)-1,3,4-oxadiazole, tris(8-hydroxyquinolato)aluminum, 3-(4-biphenyl)-4-phenyl-5-(4-butylphenyl)-1,2,4-triazole, 4,7-diphenyl-1,10-phenanthroline, 2,9-dimethyl-4,7-diphenyl-1,10-phenanthroline, and 2-phenyl-9,10-dinaphthylanthracene.

16. The organic electroluminescent apparatus of claim 14, **characterized in that** the buffer layer has a thickness of 2nm to 20nm.


17. The organic electroluminescent apparatus of claim 6, the organic luminescent medium comprising at least two luminescent units, a connection layer being disposed between the luminescent units, wherein the organic material of any of claims 1 to 4 is contained in the connection layer.

18. The organic electroluminescent apparatus of claim 17, **characterized in that** a dopant selected from the group consisting of alkaline metals, alkaline metal oxides, alkaline metal halides, alkaline metal nitrides, and alkaline metal salts is further doped in the connection layer.

19. The organic electroluminescent apparatus of claim 18, **characterized in that** the dopant is selected from the group consisting of lithium, cesium, lithium nitride, lithium fluoride, lithium cobaltate, lithium oxide, 8-hydroxyquinolato lithium, cesium carbonate, potassium borohydride, lithium borohydride, sodium fluoride, sodium chloride, cesium fluoride, cesium chloride, and rubidium oxide.


**Patentansprüche**

1. Organisches Material, das repräsentiert wird durch folgende Formel 1:

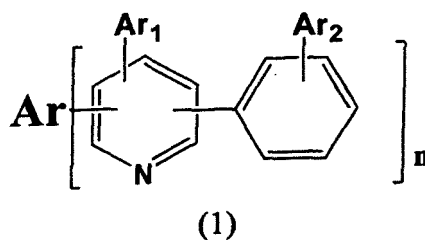


worin Ar<sub>1</sub> ein Wasserstoffatom ist und Ar<sub>2</sub> ausgewählt ist aus der Gruppe, die aus Wasserstoff, C6-C24-Aryl und heterocyclischem C6-C24-Aryl besteht, und n eine ganze Zahl ist, die ausgewählt ist aus 2, worin Ar folgende Struktur hat:

5  
10


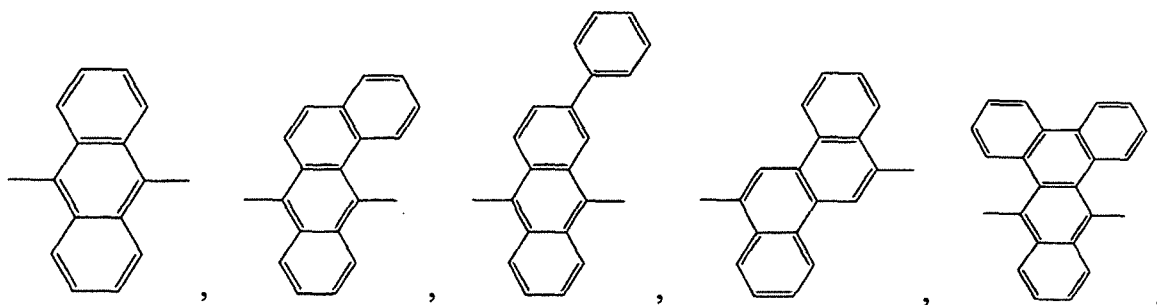


15  
20


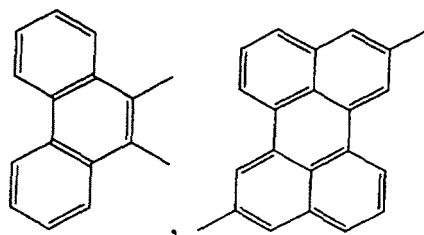


2. Organisches Material nach Anspruch 1, **dadurch gekennzeichnet**, dass die Formel 1 eine der folgenden Formeln 2 bis 7 ist:

25  
30

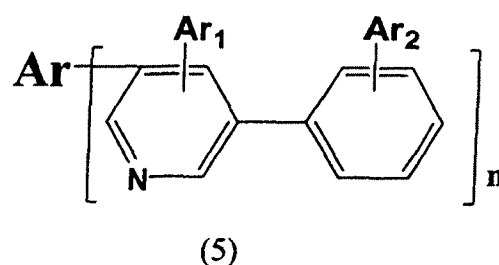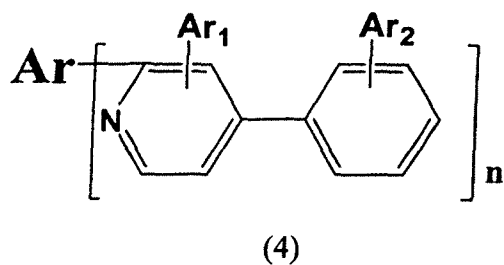


35  
40

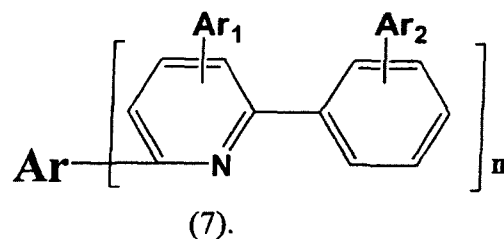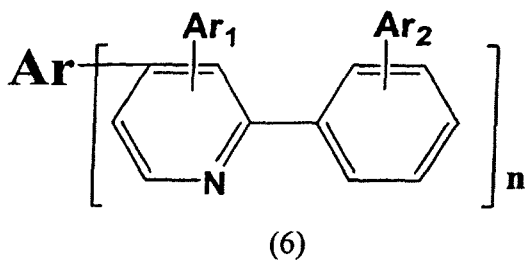

45

3. Organisches Material nach Anspruch 1 oder 2, **dadurch gekennzeichnet**, dass die mit Ar verbundene Gruppe

50  
55

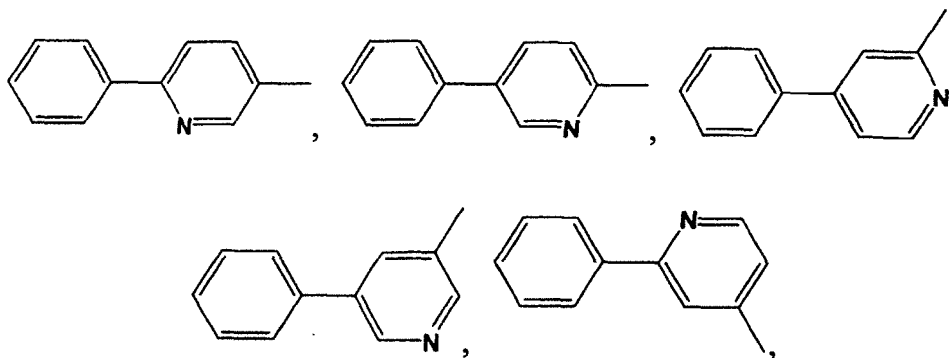


ist.

4. Organisches Material nach Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** das organische Material repräsentiert wird durch folgende Strukturformeln:

5

10

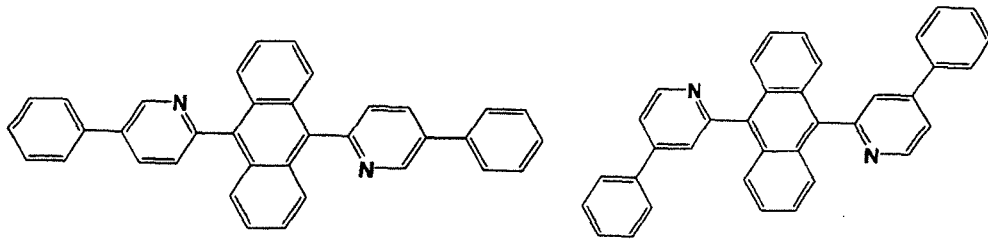


15

2-1

2-3

20

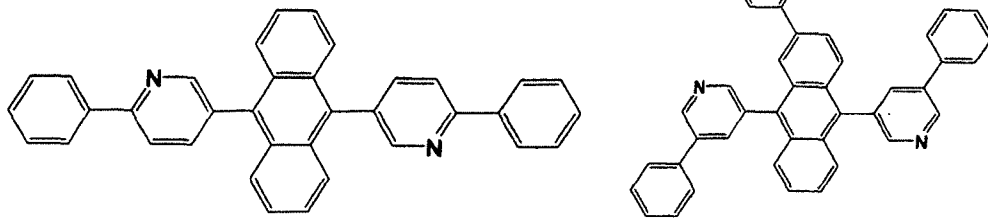

25

2-5

2-7

30

35


40

45

50

55


5

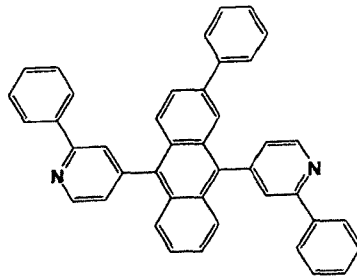

10

2-9


15

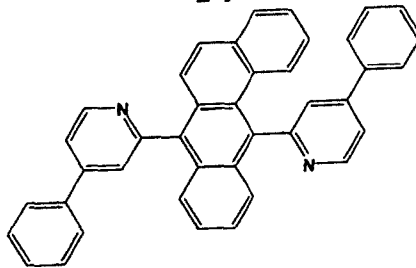

20

2-15

25

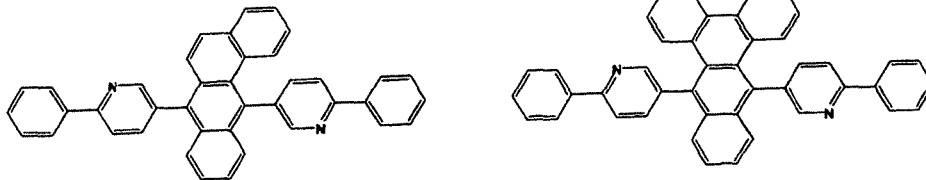


30

2-18

2-19

35

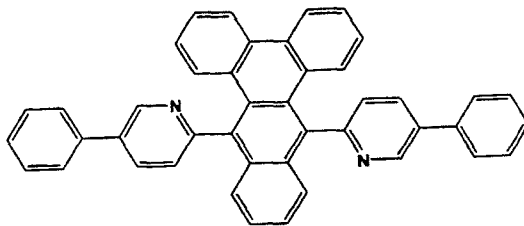


40

2-21

2-23

45

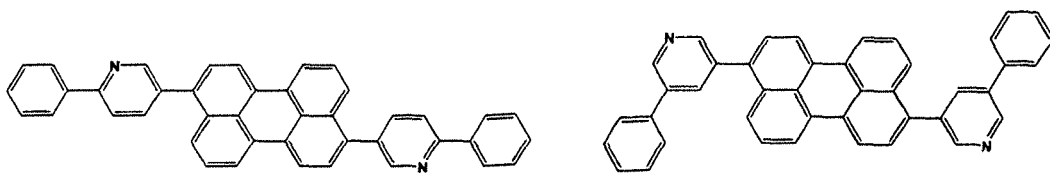

50

2-25

2-28


55



14. Organische Elektrolumineszenzvorrichtung nach Anspruch 10, **dadurch gekennzeichnet, dass** außerdem eine Pufferschicht zwischen der Elektroneninjektions- und Elektronentransport-Funktionsschicht und der Lumineszenzschicht vorhanden ist, und dass das Material der Pufferschicht aus den Verbindungen, wie sie in Anspruch 1 oder 2 definiert sind, ausgewählt ist oder aus der Gruppe ausgewählt ist, die besteht aus Oxazol-Verbindungen, Metallkomplexen, Triazol-Verbindungen, Imidazol-Verbindungen, Chinolin-Verbindungen, Oxalin-Verbindungen, Phenazin-Verbindungen und Phenanthrolin-Verbindungen.
15. Organische Elektrolumineszenzvorrichtung nach Anspruch 14, **dadurch gekennzeichnet, dass** das Material der Pufferschicht ausgewählt ist aus der Verbindung, wie sie in Anspruch 4 definiert ist, oder ausgewählt ist aus der Gruppe, die besteht aus  
2-(4-Tertbutylphenyl)-5-(4-biphenyl)-1,3,4-oxadiazol,  
Tris(8-hydroxychinolato)aluminium,  
3-(4-Biphenyl)-4-phenyl-5-(4-butylphenyl)-1,2,4-triazol,  
4,7-Diphenyl-1,10-phenanthrolin, 2,9-Dimethyl-4,7-diphenyl-1,10-phenanthrolin, und  
2-Phenyl-9,10-dinaphthylanthracen.
16. Organische Elektrolumineszenzvorrichtung nach Anspruch 14, **dadurch gekennzeichnet, dass** die Pufferschicht eine Dicke von 2 nm bis 20 nm hat.
17. Organische Elektrolumineszenzvorrichtung nach Anspruch 6, wobei das organische Lumineszenzmedium mindestens zwei Lumineszenzeinheiten aufweist, wobei zwischen den Lumineszenzeinheiten eine Verbindungsschicht angeordnet ist, wobei das organische Material nach einem der Ansprüche 1 bis 4 in der Verbindungsschicht enthalten ist.
18. Organische Elektrolumineszenzvorrichtung nach Anspruch 17, **dadurch gekennzeichnet, dass** die Verbindungsschicht außerdem dotiert ist mit einem Dotiermittel, das ausgewählt ist aus der Gruppe, die besteht aus Alkalimetallen, Alkalimetalloxiden, Alkalimetallhalogeniden, Alkalimetallnitriden und Alkalimetallsalzen.
19. Organische Elektrolumineszenzvorrichtung nach Anspruch 18, **dadurch gekennzeichnet, dass** das Dotiermittel ausgewählt ist aus der Gruppe, die besteht aus Lithium, Cäsium, Lithiumnitrid, Lithiumfluorid, Lithiumcobaltat, Lithiumoxid, 8-Hydroxychinolato-lithium, Cäsiumcarbonat, Kaliumborhydrid, Lithiumborhydrid, Natriumfluorid, Natriumchlorid, Cäsiumfluorid, Cäsiumchlorid und Rubidiumoxid.


## Revendications

1. Matériau organique représenté par la formule suivante 1 :

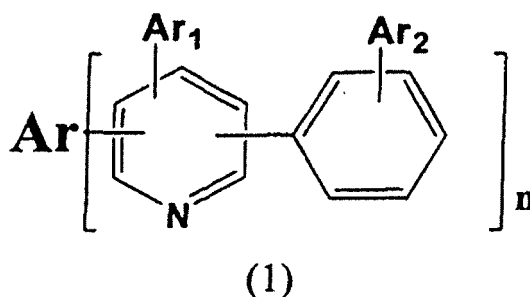


dans lequel  $Ar_1$  est un atome d'hydrogène, et  $Ar_2$  est sélectionné parmi le groupe consistant en l'hydrogène, un aryle en C6-C24, et un aryle hétérocyclique en C6-C24, et n est un entier sélectionné de 2, dans lequel Ar présente la structure suivante :

5

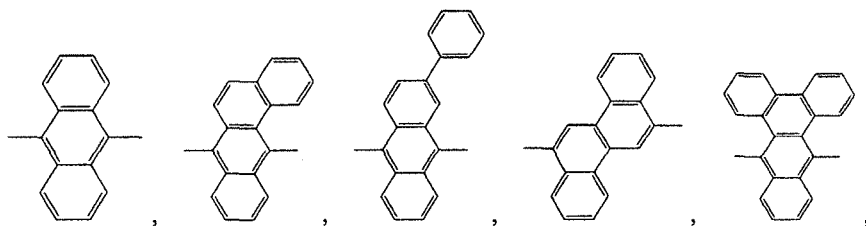


10

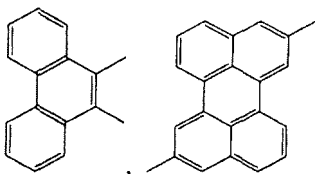

15



2. Matériau organique selon la revendication 1, caractérisé en ce que la formule 1 est une des formules suivantes 2 à 7 :

20

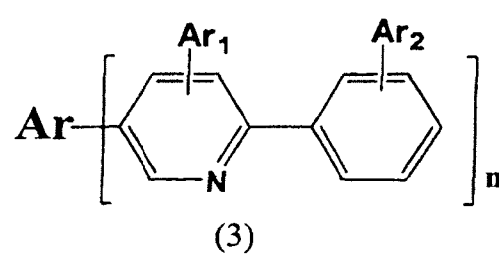



25

30

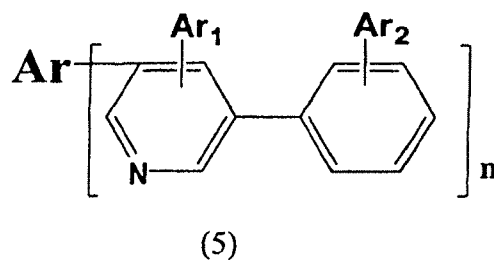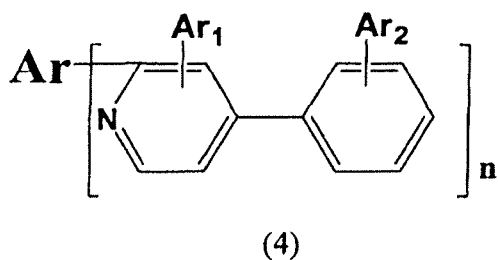

35


40

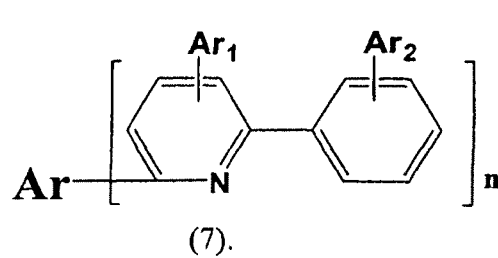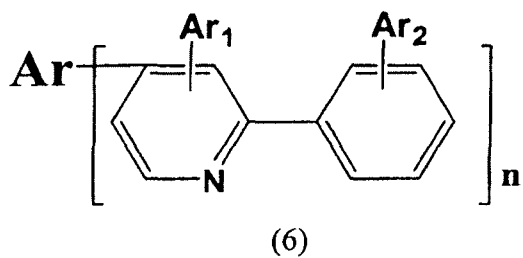

45


3. Matériau organique selon la revendication 1 ou 2, caractérisé en ce que le groupe relié à Ar est :

50

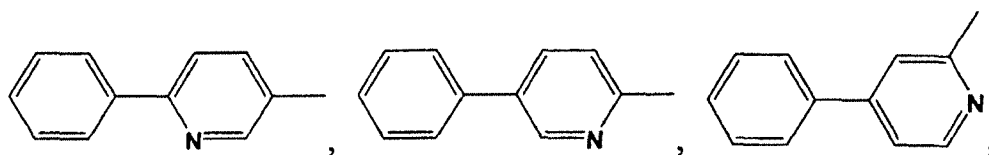


55

5

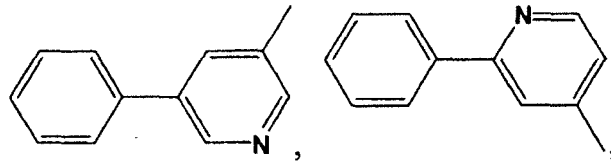


4. Matériau organique selon la revendication 1 ou 2, caractérisé en ce que le matériau organique est représenté par les formules de constitution suivantes :

10

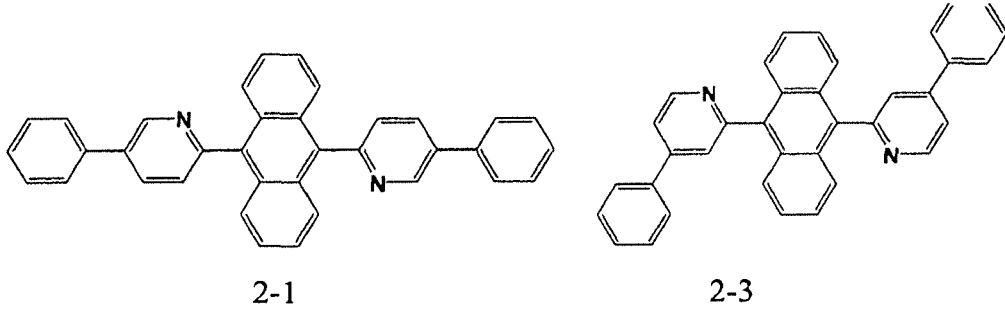

15


20

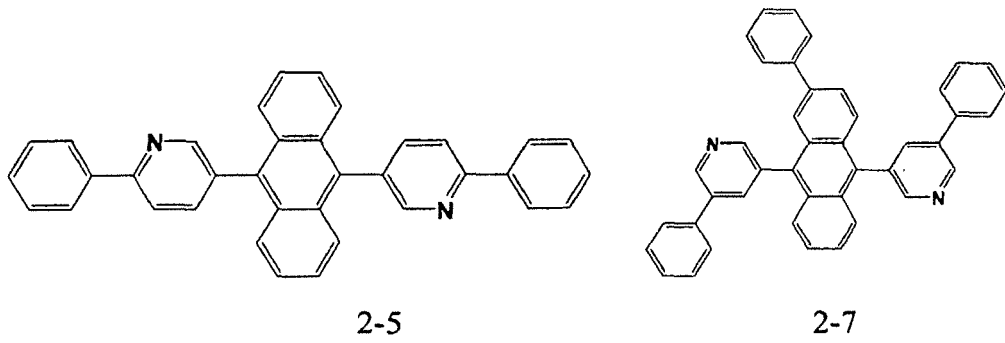

25


30

35

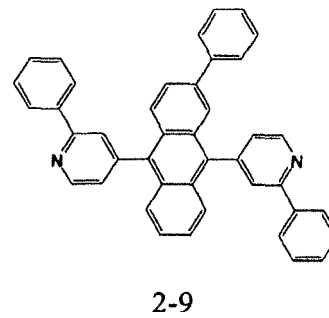


40

45

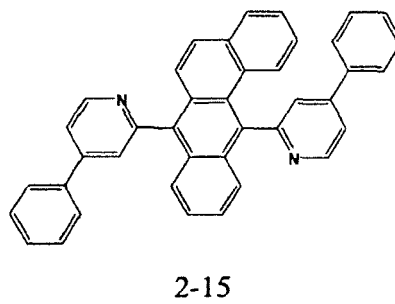


50


55

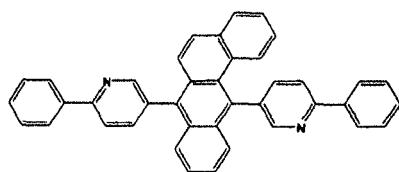


2-18

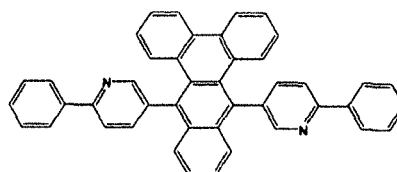


2-19

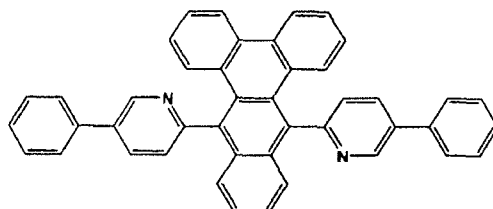


2-21




2-23

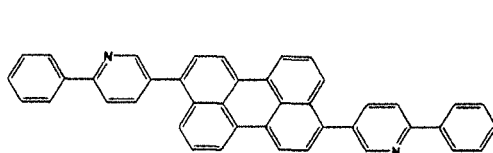


2-25

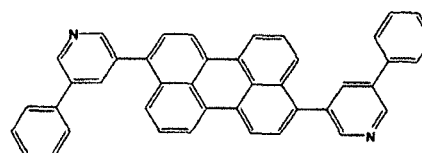

2-28

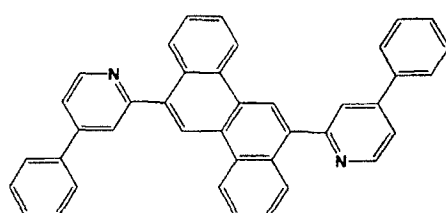

2-31

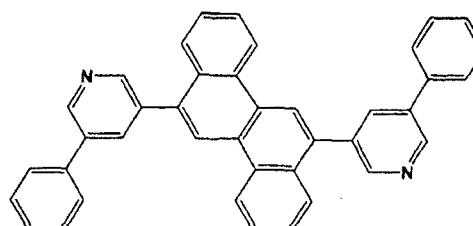

2-33

5. Utilisation du matériau organique selon l'une quelconque des revendications 1 à 4 comme matériau de transport d'électrons dans un appareil électroluminescent organique.
6. Appareil électroluminescent organique comprenant une paire d'électrodes et un milieu luminescent organique disposé entre la paire d'électrodes, le milieu luminescent organique comprenant le matériau organique selon l'une quelconque des revendications 1 à 4.
7. Appareil électroluminescent organique selon la revendication 6, le milieu luminescent organique comprenant une couche luminescente et une couche fonctionnelle de transport d'électrons, dans lequel le matériau organique selon l'une quelconque des revendications 1 à 4 est contenu dans la couche fonctionnelle de transport d'électrons.
8. Appareil électroluminescent organique selon la revendication 7, dans lequel la couche fonctionnelle de transport d'électrons contient en outre un autre matériau de transport d'électrons sélectionné parmi le groupe consistant en des composés oxazole, des chélates métalliques, des composés triazole, des composés imidazole, des composés phénanthroline ou des composés anthracène.
9. Appareil électroluminescent organique selon la revendication 8, **caractérisé en ce que** les composés oxazole, les chélates métalliques, les composés triazole, les composés imidazole, les composés phénanthroline ou les composés anthracène sont : 2-(4-tertbutylphényl)-5-(4-biphényl)-1,3,4-oxadiazole, tris(8-hydroxyquinolato)aluminium, 3-(4-biphényl)-4-phényl- 5-(4-butylphényl)-1,2,4-triazole, 4,7-diphényl-1,10-phénanthroline, 2,9-diméthyl-4,7-diphényl-

1,10-phénanthroline, ou 2-phényl-9,10-dinaphtylanthracène.

- 5
10. Appareil électroluminescent organique selon la revendication 6, le milieu luminescent organique comprenant une couche luminescente et une couche fonctionnelle d'injection et de transport d'électrons, dans lequel le matériau organique selon l'une quelconque des revendications 1 à 4 est contenu dans la couche fonctionnelle d'injection et de transport d'électrons, et la couche fonctionnelle d'injection et de transport d'électrons contient en outre un dopant sélectionné parmi le groupe consistant en des métaux alcalins, des oxydes de métaux alcalins, des halogénures de métal alcalins, des nitrures de métal alcalins, et des sels de métal alcalins.
- 10
11. Appareil électroluminescent organique selon la revendication 10, dans lequel le dopant est sélectionné parmi le groupe consistant en du lithium, du césium, du nitrure de lithium, du fluorure de lithium, du cobaltate de lithium, de l'oxyde de lithium, du 8-hydroxyquinolato-lithium, du carbonate de césium, du borohydrure de potassium, du borohydrure de lithium, du fluorure de sodium, du chlorure de sodium, du fluorure de césium, du chlorure de césium, et de l'oxyde de rubidium.
- 15
12. Appareil électroluminescent organique selon la revendication 10, **caractérisé en ce que** la couche fonctionnelle d'injection et de transport d'électrons présente une épaisseur de 2 nm à 40 nm, et un rapport de dopage du dopant dans la couche fonctionnelle d'injection et de transport d'électrons est de 0,1 % à 49 % en poids sur la base du matériau organique selon l'une quelconque des revendications 1 à 4.
- 20
13. Appareil électroluminescent organique selon la revendication 12, **caractérisé en ce que** la couche fonctionnelle d'injection et de transport d'électrons présente une épaisseur de 5 nm à 25 nm, et le rapport de dopage du dopant dans la couche fonctionnelle d'injection et de transport d'électrons est de 0,5 % à 30 % en poids sur la base du matériau organique selon l'une quelconque des revendications 1 à 4.
- 25
14. Appareil électroluminescent organique selon la revendication 10, **caractérisé en ce qu'une** couche tampon est en outre incluse entre la couche fonctionnelle d'injection et de transport d'électrons et la couche luminescente, et le matériau de la couche tampon est sélectionné parmi les composés définis selon la revendication 1 ou 2, ou sélectionné parmi le groupe consistant en des composés oxazole, des complexes métalliques, des composés triazole, des composés imidazole, des composés quinoline, des composés oxaline, des composés phénazine, et des composés phénanthroline.
- 30
15. Appareil électroluminescent organique selon la revendication 14, **caractérisé en ce que** le matériau de la couche tampon est sélectionné parmi le composé défini selon la revendication 4, ou sélectionné parmi le groupe consistant en 2-(4-terbutylphényl)-5-(4-biphényl)-1,3,4-oxadiazole, tris(8-hydroxyquinolato)aluminium, 3-(4-biphényl)-4-phényl-5-(4-butylphényl)-1,2,4-triazole, 4,7-diphényl-1,10-phénanthroline, 2,9-diméthyl-4,7-diphényl-1,10-phénanthroline, ou 2-phényl-9,10-dinaphtylanthracène.
- 35
16. Appareil électroluminescent organique selon la revendication 14, **caractérisé en ce que** la couche tampon matériau organique présente une épaisseur de 2 nm à 20 nm.
- 40
17. Appareil électroluminescent organique selon la revendication 6, le milieu luminescent organique comprenant au moins deux unités luminescentes, une couche de connexion étant disposée entre les unités luminescentes, dans lequel le matériau organique selon l'une quelconque des revendications 1 à 4 est contenu dans la couche de connexion.
- 45
18. Appareil électroluminescent organique selon la revendication 17, **caractérisé en ce qu'un** dopant sélectionné parmi le groupe consistant en des métaux alcalins, des oxydes de métaux alcalins, des halogénures de métal alcalins, des nitrures de métal alcalins, et des sels de métal alcalins est en outre dopé dans la couche de connexion.
- 50
19. Appareil électroluminescent organique selon la revendication 18, **caractérisé en ce que** le dopant est sélectionné parmi le groupe consistant en du lithium, du césium, du nitrure de lithium, du fluorure de lithium, du cobaltate de lithium, de l'oxyde de lithium, du 8-hydroxyquinolato-lithium, du carbonate de césium, du borohydrure de potassium, du borohydrure de lithium, du fluorure de sodium, du chlorure de sodium, du fluorure de césium, du chlorure de césium, et de l'oxyde de rubidium.
- 55

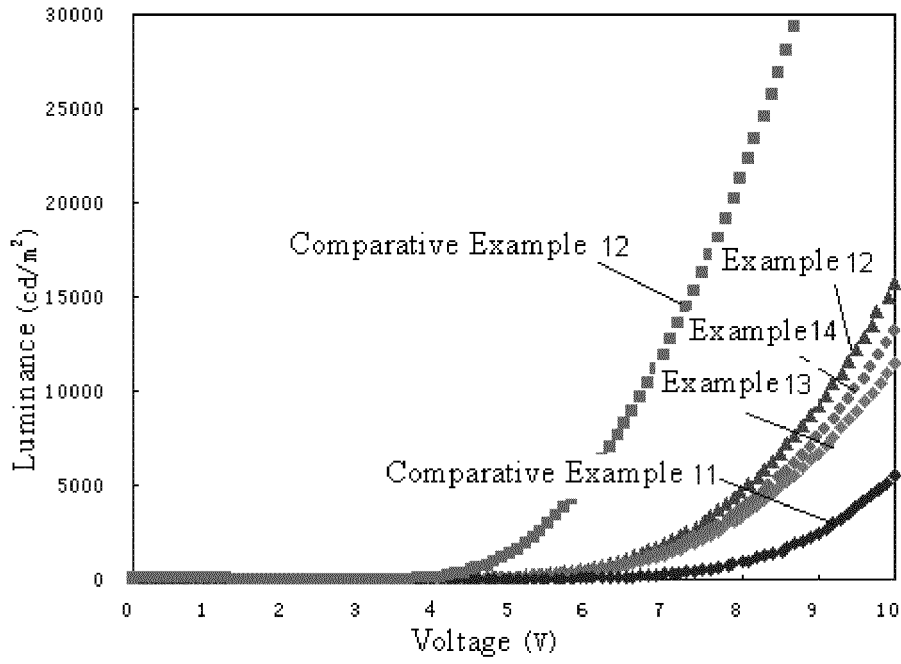


Fig. 1

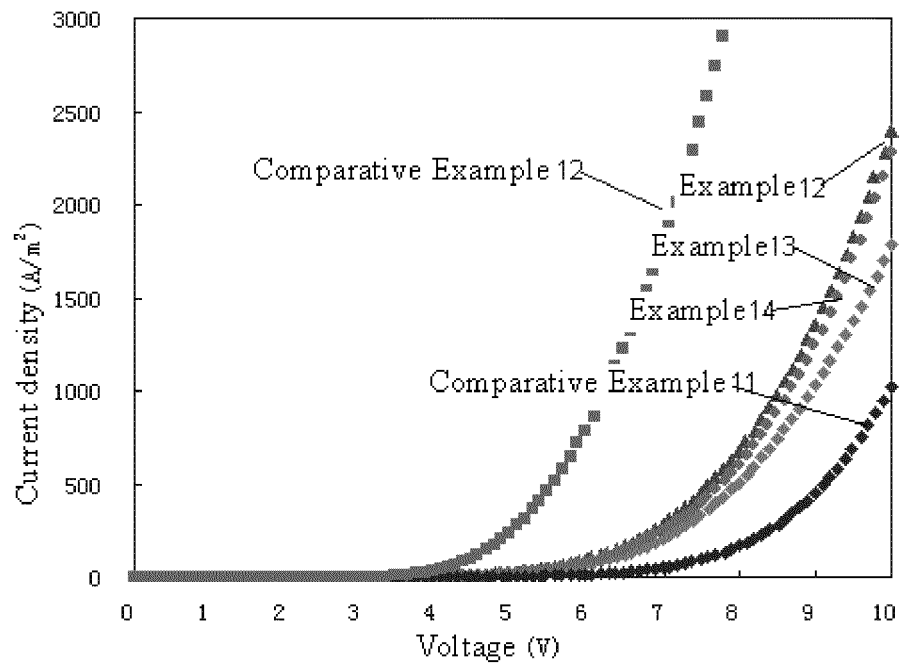


Fig. 2

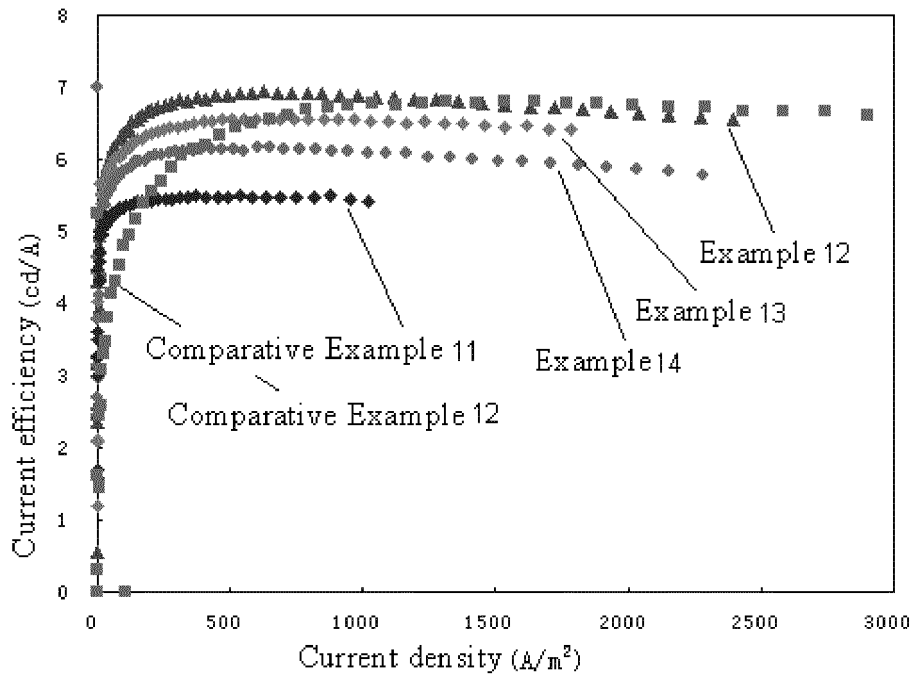


Fig. 3

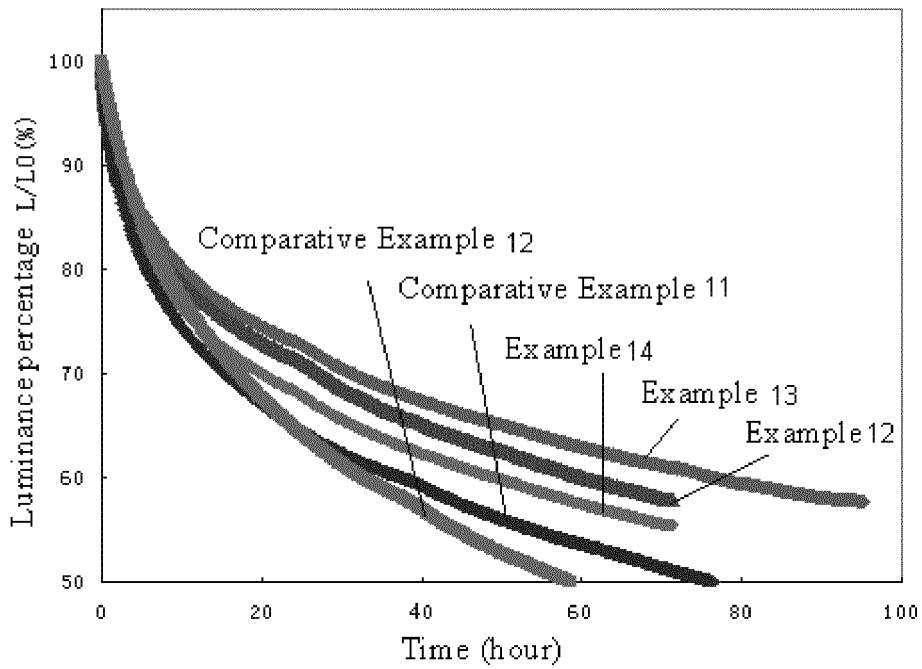


Fig. 4

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- CN 200680041587 [0005]
- CN 101305071 A [0005]
- CN 101419907 [0005]

**Non-patent literature cited in the description**

- **POPE M. ; KALLMANN H. P. ; MAGNANTE R. J.**, *Chem. Phys.*, 1963, vol. 38, 2042 [0003]
- **C. W. TANG ; S. A. VANSLYKE.** *Appl. Phys. Lett.*, 1987, vol. 51, 913 [0003]
- **BURROUGHES J. ; BRADLEY D. D. C. ; BROWN A. R. ; FRIEND R. H.** *Nature*, 1990, vol. 347, 539 [0003]
- *Advanced Functional Materials*, 2007, vol. 17, 1966-1973 [0005]
- **CAO YONG et al.** *J. Am. Chem. Soc.*, 2008, vol. 130 (11), 3282-3283 [0005]
- *Organic Electronics*, 2005, vol. 6, 118-128 [0005]

专利名称(译)	有机材料和使用其的有机电致发光装置		
公开(公告)号	<a href="#">EP2500343B1</a>	公开(公告)日	2018-01-31
申请号	EP2009851216	申请日	2009-12-30
[标]申请(专利权)人(译)	北京维信诺科技有限公司 昆山维信诺显示技术有限公司 清华大学		
申请(专利权)人(译)	北京维信诺科技有限公司. 昆山维信诺显示CO., LTD. 清华大学		
当前申请(专利权)人(译)	北京维信诺科技有限公司. 昆山维信诺显示CO., LTD. 清华大学		
[标]发明人	QIU YONG LI YINKUI XIE JING		
发明人	QIU, YONG LI, YINKUI XIE, JING		
IPC分类号	C09K11/06 H01L51/50 H01L51/54 C07D213/53 H01L51/00 H05B33/14		
CPC分类号	H01L51/0052 C07D213/53 C09K11/06 C09K2211/1011 C09K2211/1029 H01L51/0067 H01L51/5048 H05B33/14		
优先权	200910234478.X 2009-11-19 CN 200910234760.8 2009-11-13 CN		
其他公开文献	EP2500343A4 EP2500343A1		
外部链接	<a href="#">Espacenet</a>		

摘要(译)

提供有机材料和使用其的有机电致发光装置。该材料的结构通式如下所示，其中Ar选自C6-C30稠环芳烃的残基，Ar 1和Ar 2各自独立地选自氢，C 6 -C 24芳基和C 6。-C24杂环芳基，n是选自2和3的整数。本发明的有机材料可用作有机电致发光装置中的电子传输层。

