



US 20170311867A1

(19) **United States**(12) **Patent Application Publication**
STANKUS(10) **Pub. No.: US 2017/0311867 A1**(43) **Pub. Date: Nov. 2, 2017**(54) **SYSTEM FOR THE ANALYSIS OF THE
DAILY HEART RHYTHM AUTONOMIC
NERVOUS SYSTEM BALANCE***G06F 19/00* (2011.01)*G06F 19/00* (2011.01)*G06F 19/00* (2011.01)(52) **U.S. Cl.**CPC *A61B 5/4035* (2013.01); *A61B 5/743*(2013.01); *A61B 5/0456* (2013.01); *A61B**5/4857* (2013.01); *A61B 5/02405* (2013.01);*A61B 5/7203* (2013.01); *G06F 19/322*(2013.01); *G06F 19/345* (2013.01); *G06F**19/3487* (2013.01)(71) Applicant: **UAB METAPRO HOLDING, Vilnius**
(LT)(72) Inventor: **Albinas STANKUS, Palanga (LT)**(21) Appl. No.: **15/521,279**(22) PCT Filed: **Apr. 13, 2015**(86) PCT No.: **PCT/IB2015/052676**


§ 371 (c)(1),

(2) Date: **Apr. 21, 2017**(30) **Foreign Application Priority Data**

Oct. 27, 2014 (LT) 2014125

Publication Classification(51) **Int. Cl.***A61B 5/00* (2006.01)*A61B 5/0456* (2006.01)*A61B 5/00* (2006.01)*A61B 5/00* (2006.01)*A61B 5/00* (2006.01)*A61B 5/024* (2006.01)(57) **ABSTRACT**

An analysis system for analysis of the balance of circadian heart rhythm autonomic nervous system, the analysis system having tools which are designed to perform the following steps after artifact and arrhythmias removal from RR interval series: identification of the chaotic part of the RR interval series and analysis of the chaotic part; separation of the chaotic part from RR interval series and acquisition of the clean circadian RR series; acquisition of the normalized RR interval series using—interpolation, resampling and normalization; analysis of the heart rate bimodal distribution and modes of the normalized RR interval series; identification of the heart rate circadian period in the normalized RR data series; analysis of the heart rhythm variable part SNS and PNS regulation indicators in the normalized RR data series; generation of the report on obtained results in graph and tabular form.

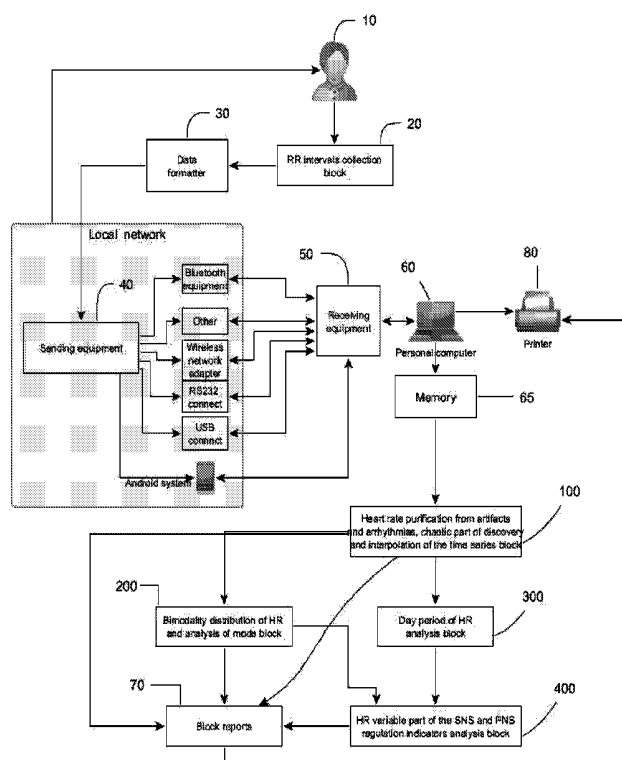

System for the analysis of the circadian heart rhythm autonomic nervous system balance

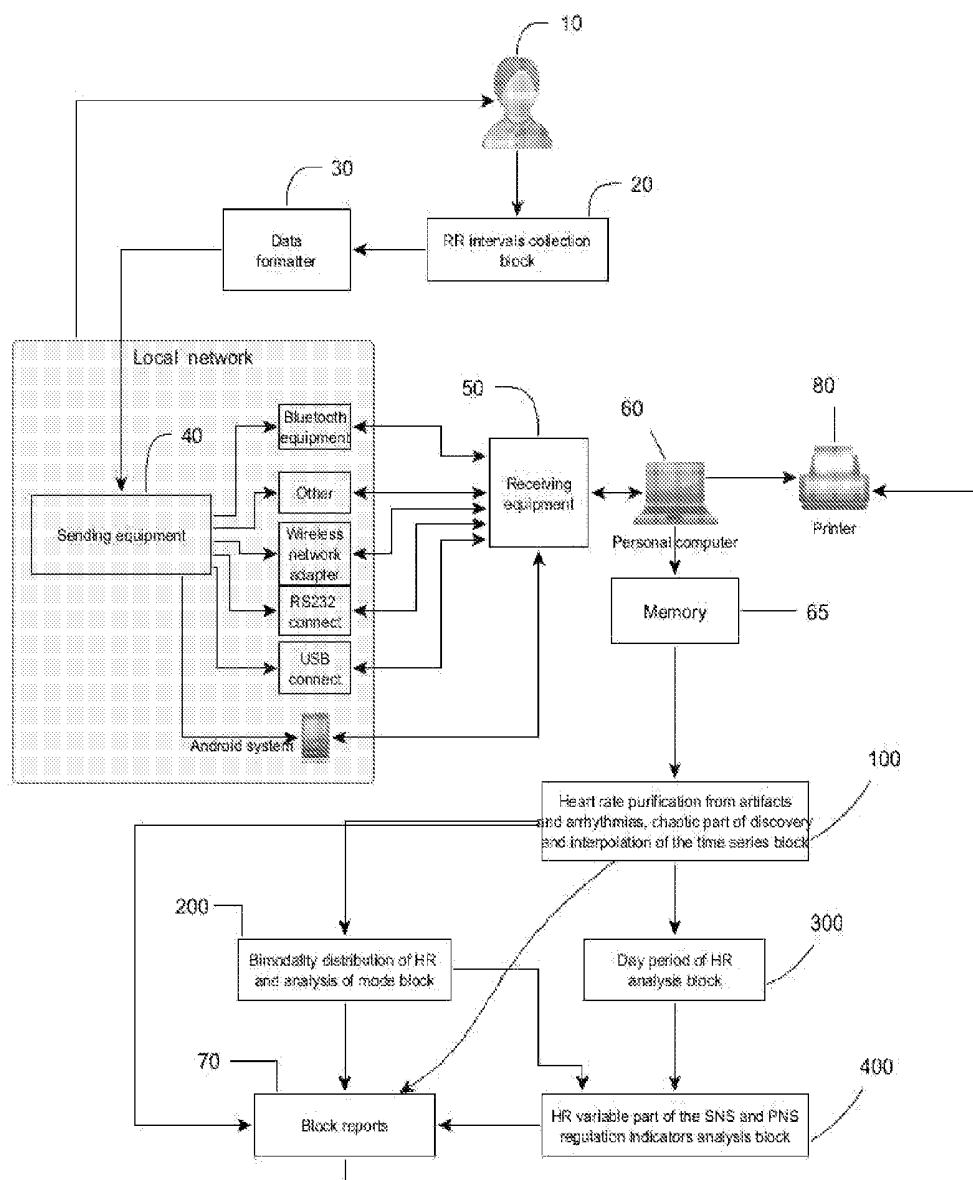


Fig. 1. System for the analysis of the circadian heart rhythm autonomic nervous system balance

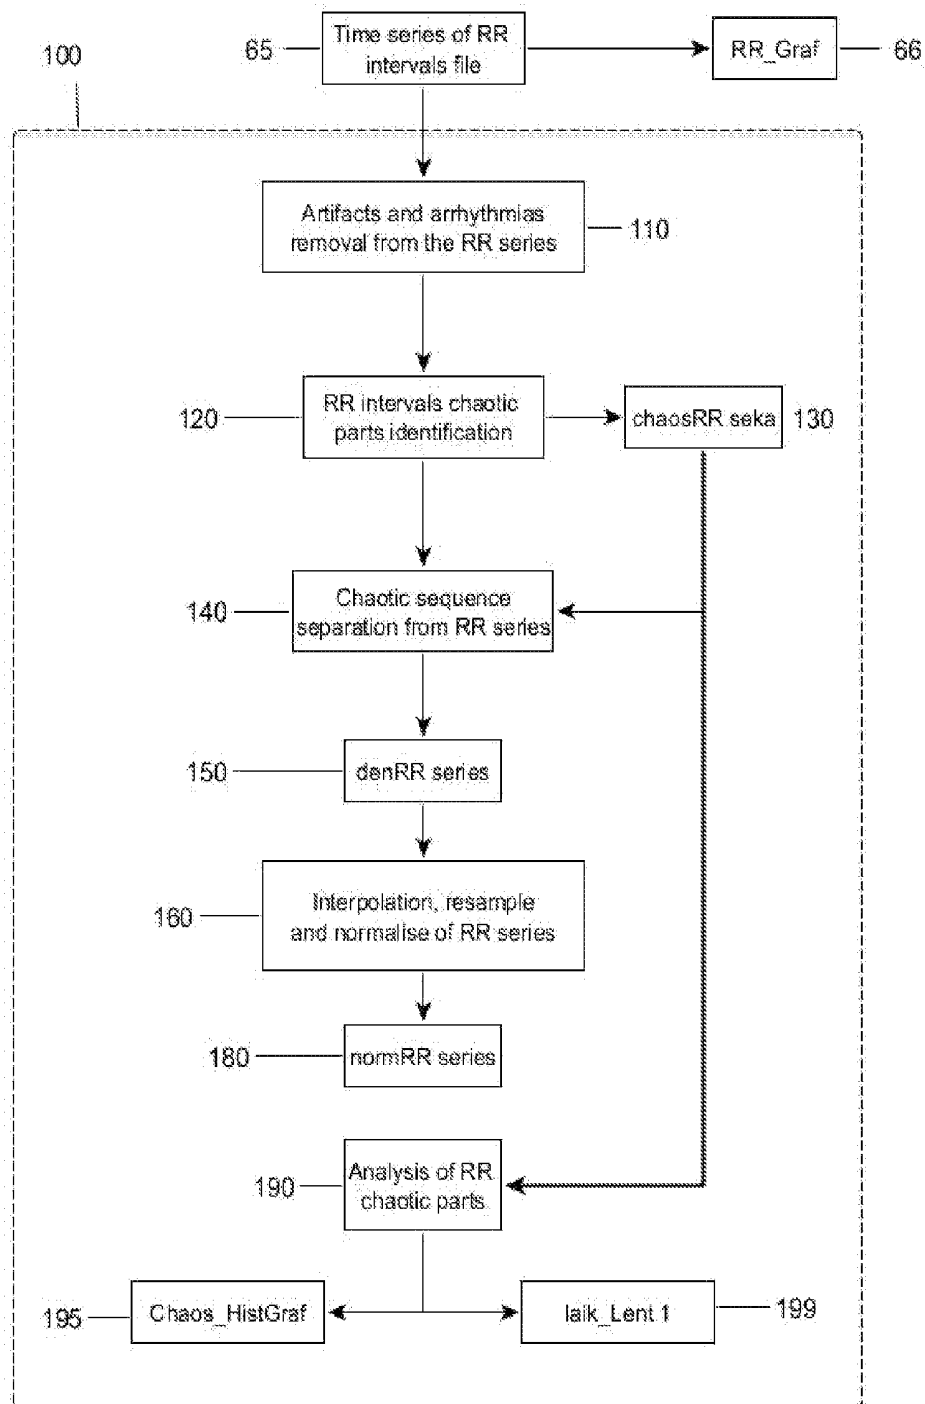


Fig. 2. Flow chart of the analysis system block for heart rhythm artifacts and arrhythmias removal, chaotic part detection and series interpolation

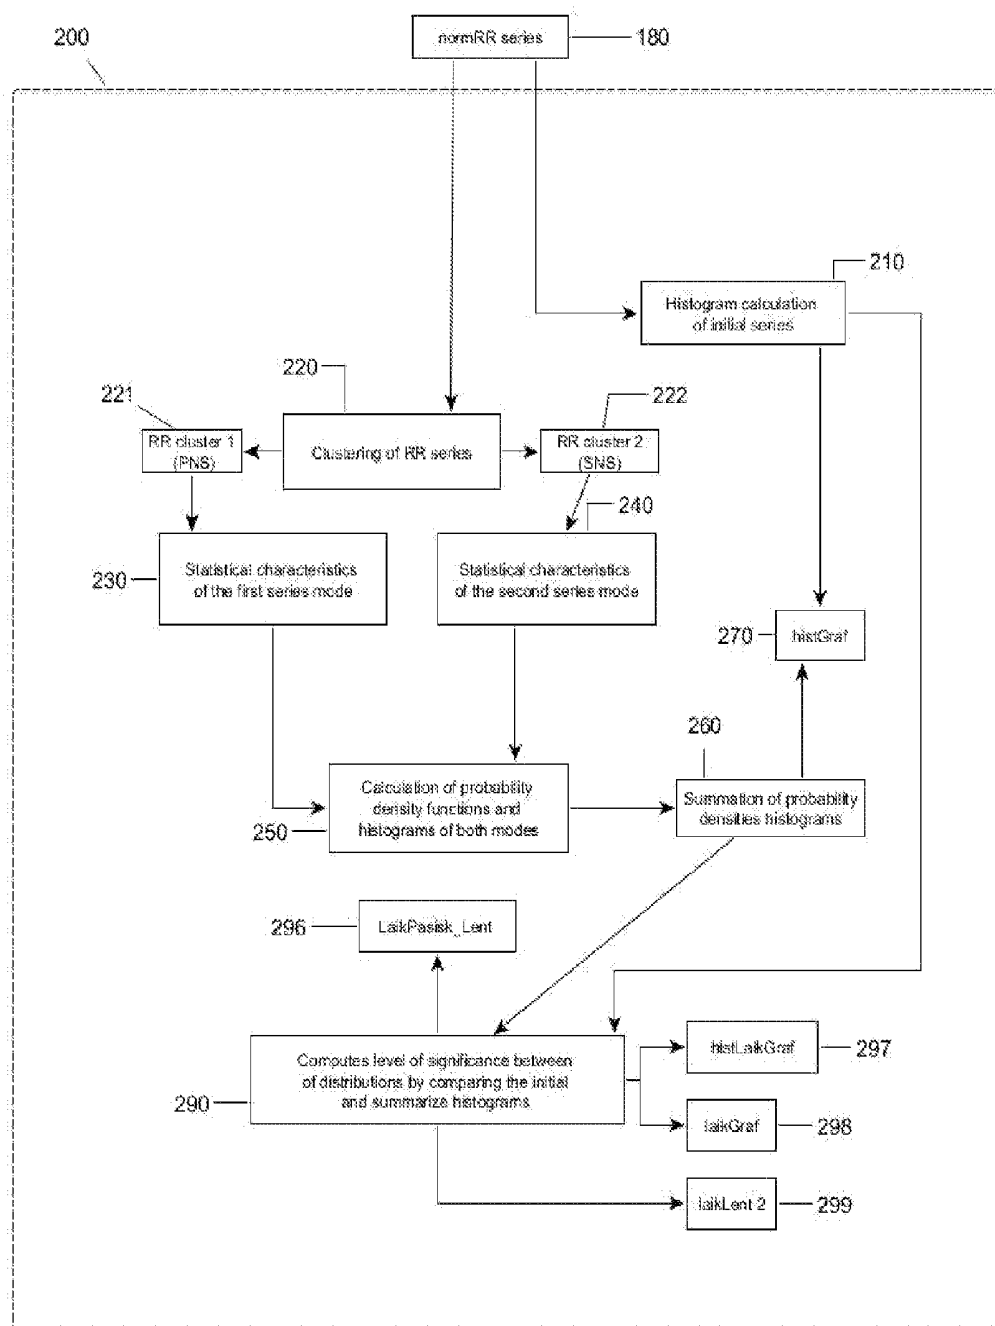


Fig. 3

Fig. 3. Flow chart of the block for the heart rhythm bimodal distribution and analysis of the detected modes

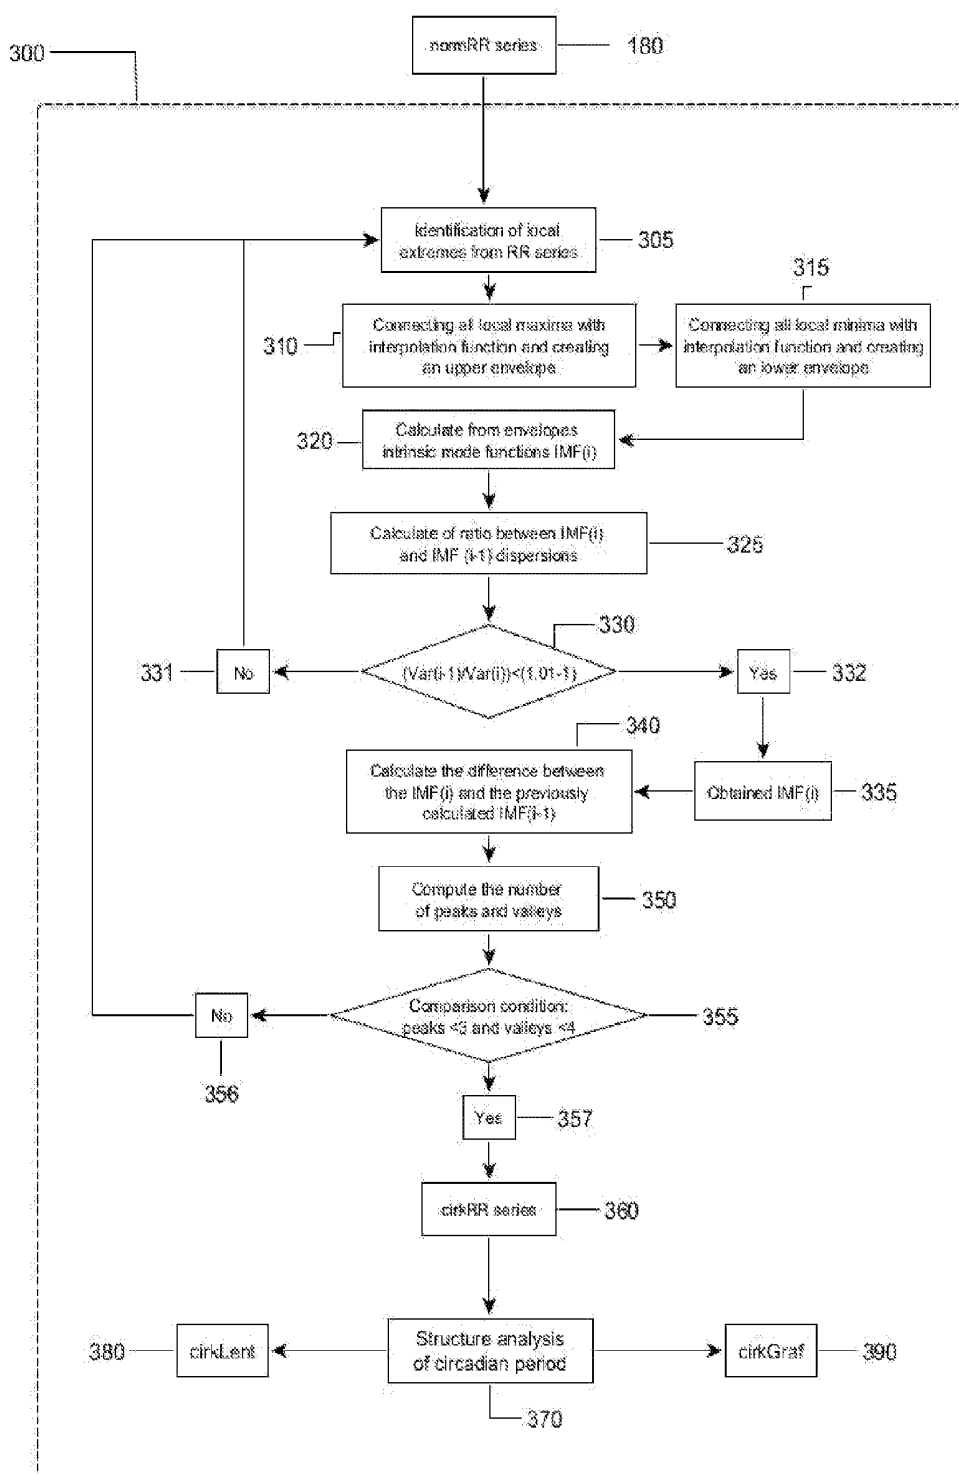


Fig. 4. Flow chart of the block for the identification of the circadian period of the heart rhythm

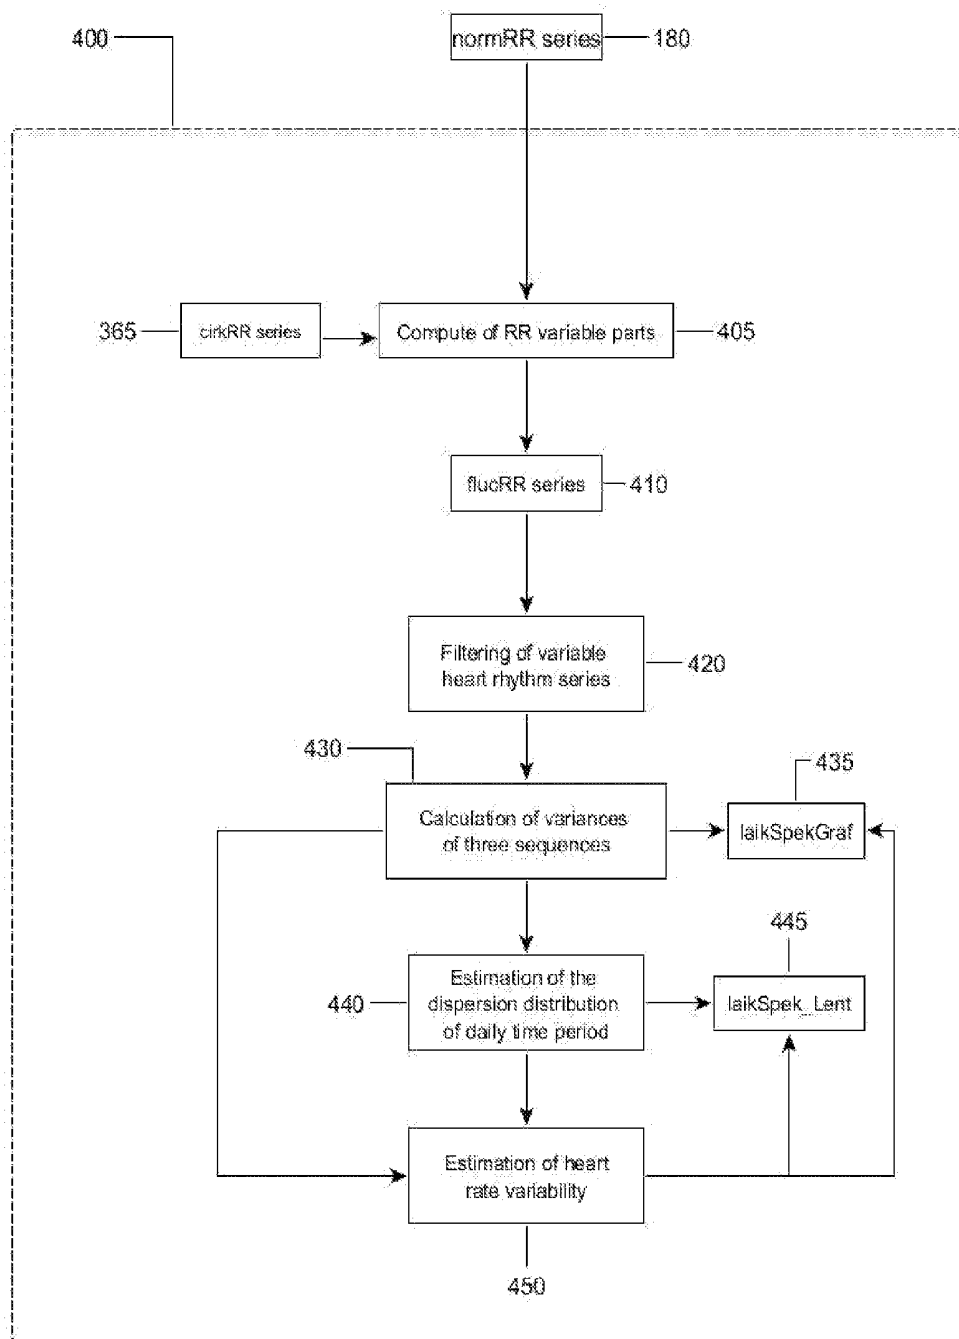


Fig. 5. Block for the analysis of the SNS and PNS regulation criteria of the heart rhythm variable part

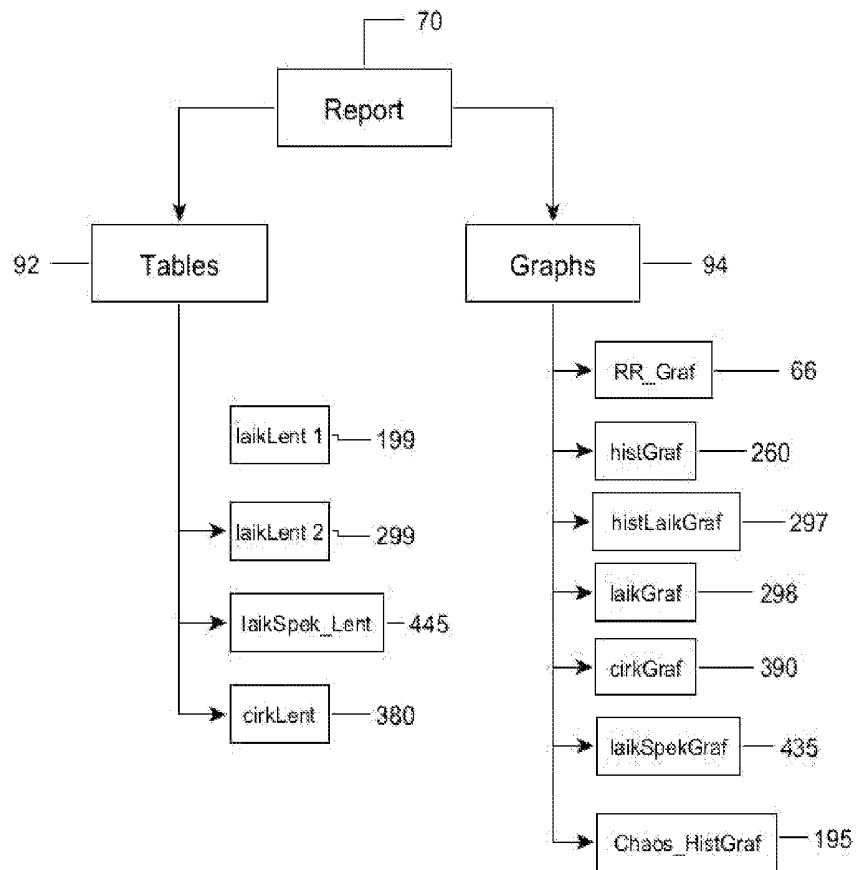


Fig. 6. Content of the data presented by the reporting block.

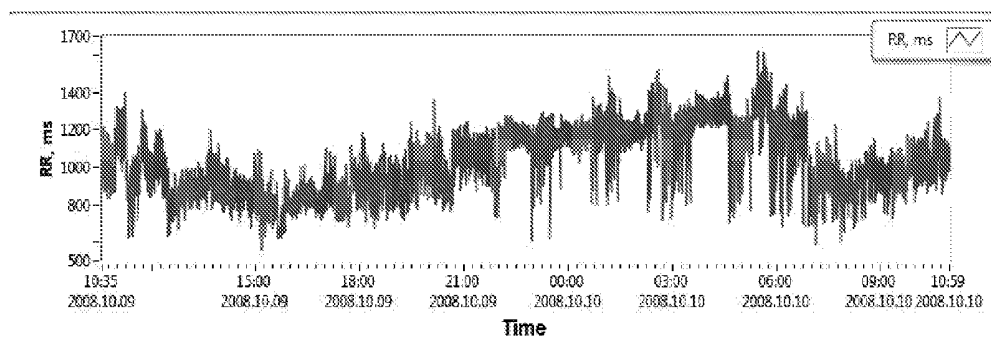


Fig. 7. RR interval series reporting graph

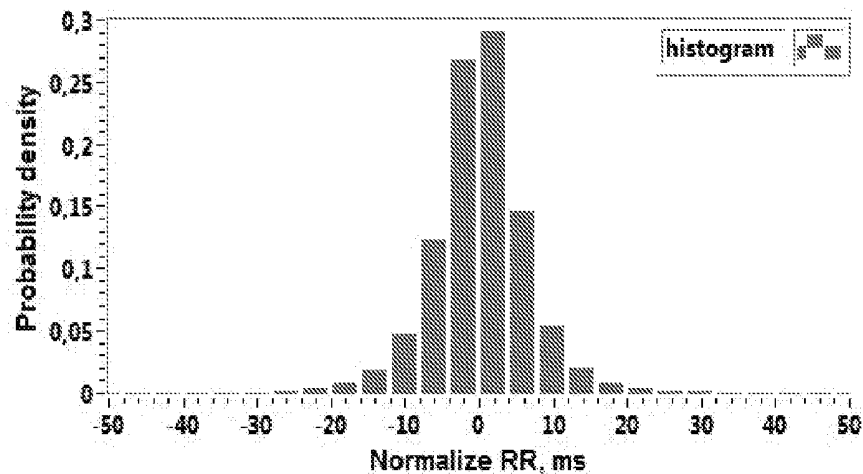


Fig. 8. Histogram of the block according to Fig. 2 chaotic series

HR daily period characteristics			
	SNS	PNS	General
RR mean, ms	894	1183	1028
RR standart deviation, ms	83	88	167
RR number	47095	40756	87792
Indices (RR number ratio)	0,54	0,46	1
Duration, (hh:mm:ss)	13: 4:55	11:19:16	24:23: 3
Coefficient of divergention, ms		289	
Middle level of RR value, ms		1048	
Coefficient of distribution asymmetry		1,16	
Duration of the day, (hh:mm:ss)	6:39:56	0:45: 5	
Duration of the night, (hh:mm:ss)	0:30:40	7:29:20	
Duration of free time, (hh:mm:ss)	5:54:19	3: 4:51	
Daily HR time asymmetry between the SNS and PNS		8,87	
HR night time asymmetry between the SNS and PNS		14,65	
Time ratio between the SNS and PNS another time		1,92	
Variance of chaos, ms ²			54

Fig. 9. Table containing data obtained according to Fig. 2 and Fig. 3 blocks

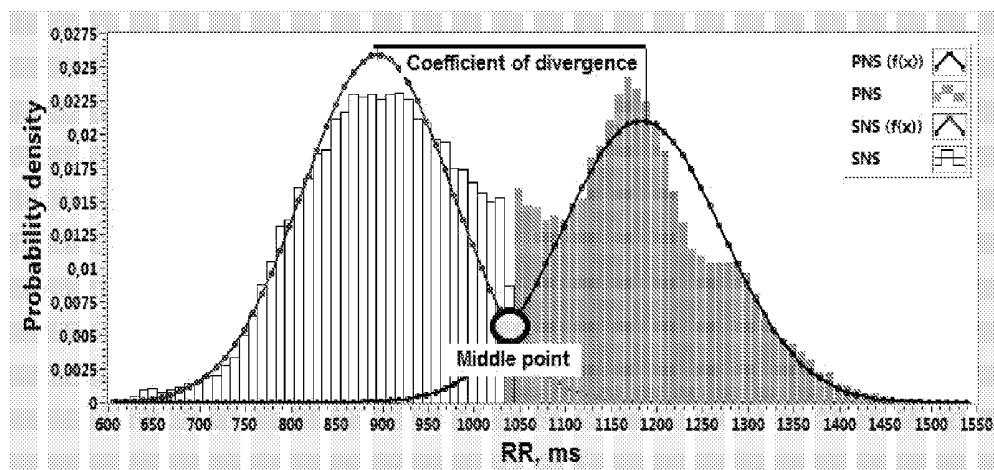


Fig. 10. Image of the histogram of the sequence according to Fig. 3

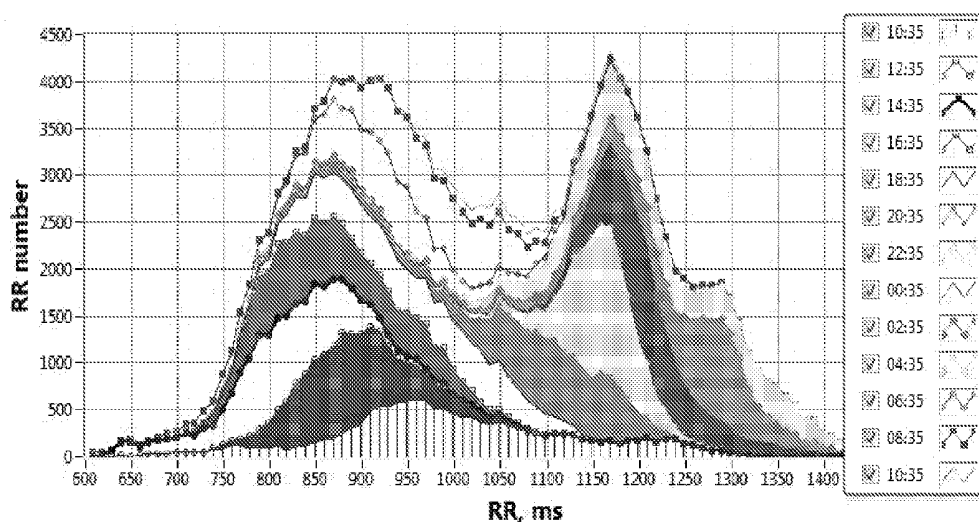


Fig. 11. Histogram of the RR interval bimodal distribution according to Fig. 3 block

The results of every (2) hour

	xRR(PNS) ms	sdRR(PNS) ms	xRR(SNS) ms	sdRR(SNS) ms	Aud.coef	SNS/PNS (time)	SNS s	PNS s	xRR ms	sdRR ms	VLF (sd) ms	LF (sd) ms	HF (sd) ms	LF/HF ms2/ms2
10:35	1144.17	73.25	926.64	79.07	164.84	1.82	4650.00	2550.00	1003.66	129.59	117.21	22.31	14.89	2.25
12:35	1060.12	25.79	884.89	56.74	84.18	87.89	7119.00	81.00	886.86	59.43	52.51	19.53	12.53	2.43
14:35	1060.35	13.57	811.96	68.75	132.67	247.28	7171.00	25.00	812.96	70.40	58.74	14.67	9.21	2.54
16:35	1064.83	29.08	870.62	72.62	95.57	63.00	7087.50	112.50	873.66	76.05	65.48	20.02	10.90	3.37
18:35	1078.37	31.88	922.93	69.58	176.68	4.05	5774.50	1425.50	953.71	88.99	78.99	24.71	15.79	2.53
20:35	1120.54	47.61	945.97	80.57	114.29	0.27	1521.50	5678.50	1063.65	90.76	80.65	18.14	13.52	1.80
22:35	1157.49	37.06	880.70	124.14	56.55	8.95	373.00	6877.00	1145.07	72.70	67.25	15.94	14.19	1.26
00:35	1214.08	60.30	919.84	76.30	86.69	0.04	258.50	6941.50	1203.52	81.92	75.40	22.89	17.83	1.65
02:35	1254.53	73.61	994.67	82.20	119.56	8.96	406.00	6794.00	1234.81	108.28	97.42	24.48	18.28	1.66
04:35	1276.17	106.28	836.84	107.24	96.50	0.08	503.50	6694.50	1212.48	136.80	124.82	28.48	23.23	1.50
06:35	1165.90	72.37	894.93	75.67	169.27	4.72	5943.50	1258.50	962.30	127.40	97.96	23.92	17.76	1.90
08:35	1077.57	47.54	956.04	51.93	143.73	3.90	5730.50	1469.50	980.84	69.52	55.65	21.55	16.66	1.67
10:35	1185.46	53.95	988.86	37.86	58.40	0.72	606.50	844.00	1056.71	74.84	64.90	20.15	20.12	1.00

Fig. 12. Statistical estimation of the RR interval bimodal time distribution every 2 hours

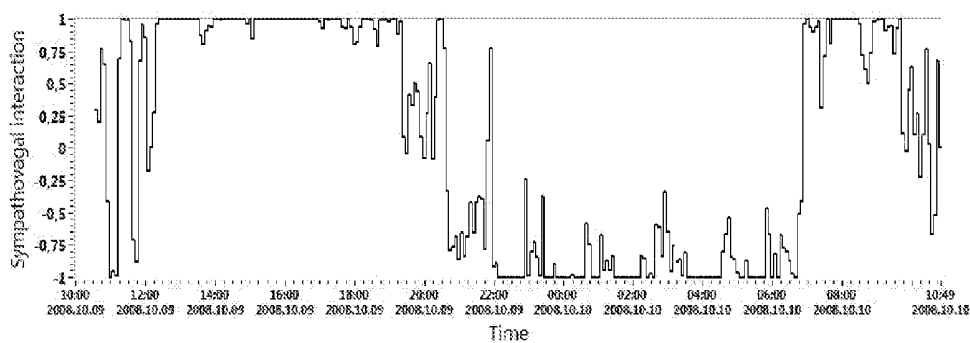


Fig. 13. Time course of the circadian tonic sympatho-vagal balance according to Fig. 3

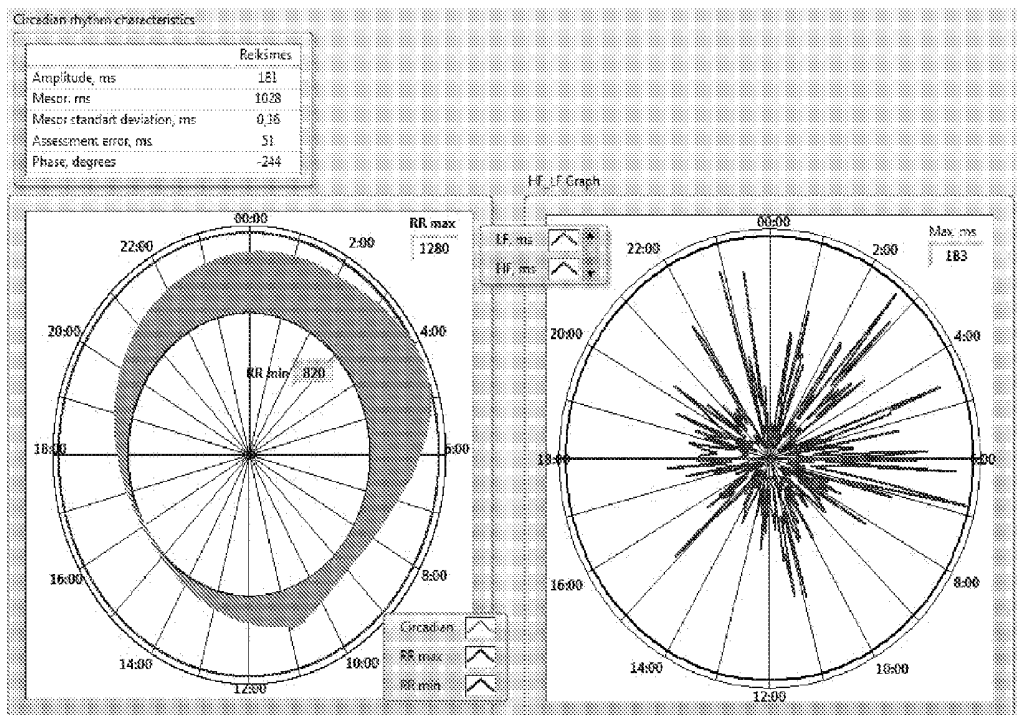


Fig. 14. Statistical evaluation of the structure of circadian period of the circadian heart rhythm

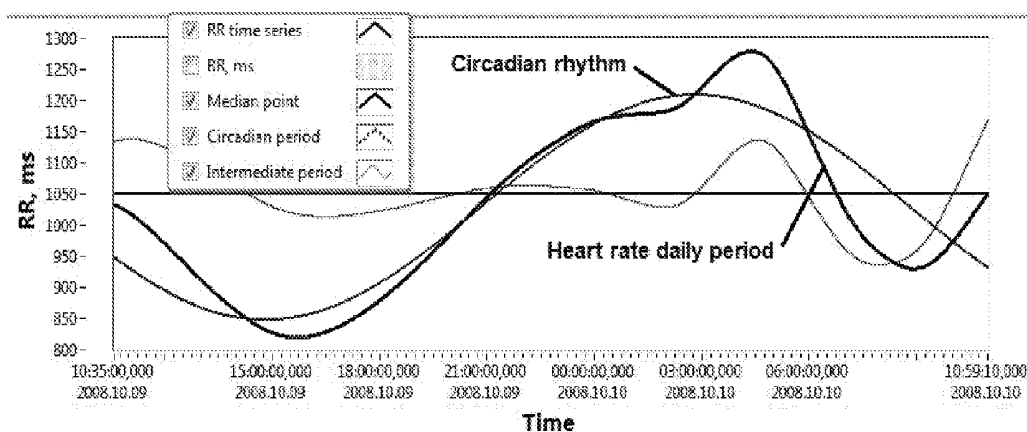


Fig. 15. Diagram of the circadian period sequence of the circadian heart rhythm

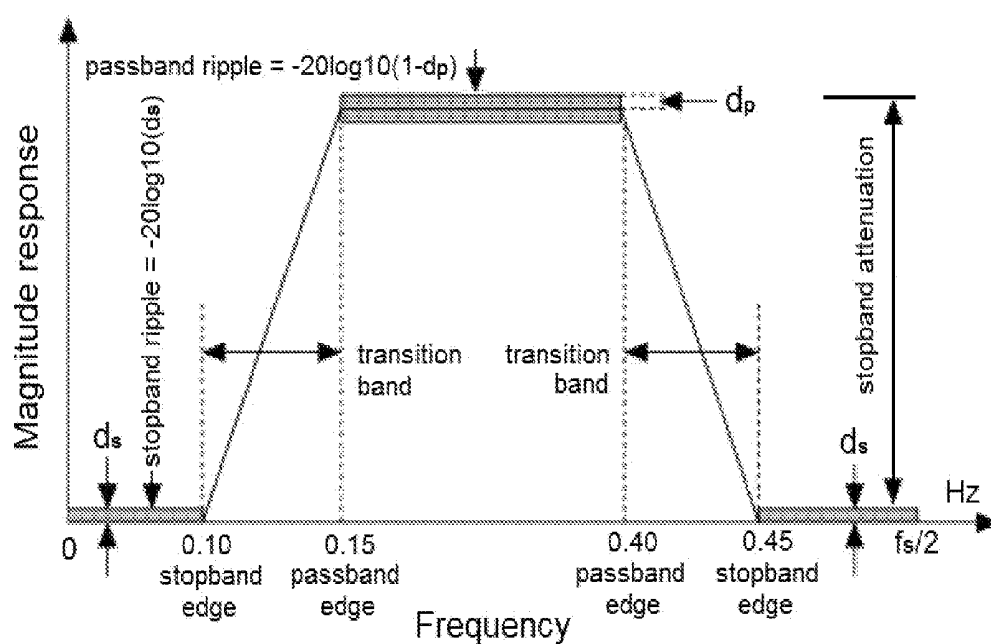


Fig. 16. Classical infinite impulse response three-filter system

The results of every (2) hour

	xRR(PNS), ms	sdRR(PNS), ms	xRR(SNS), ms	sdRR(SNS), ms	stud.coef	SNS/PNS (time)	SNS, s.	PNS, s.	xRR, ms	sdRR, ms	VLF(sd), ms	LF(sd), ms	HF(sd), ms	LF/HF, ms2/ms2
10:25	1144.17	73.85	826.64	78.07	164.84	1.82	4650.00	2550.00	1005.68	129.39	117.21	22.31	14.89	2.25
12:25	1060.12	25.79	884.89	56.74	84.18	87.89	7119.00	81.00	886.86	59.43	32.51	19.53	12.53	2.43
14:25	1060.35	13.57	811.96	68.75	132.67	247.38	7171.00	29.00	812.96	70.40	38.74	14.87	9.21	2.54
16:25	1064.83	29.08	870.62	72.62	95.57	63.00	7087.50	112.50	873.66	76.05	65.48	20.02	10.90	3.37
18:25	1078.37	31.80	922.93	69.58	176.68	4.05	5774.50	1425.50	953.71	88.99	78.99	24.31	15.29	2.53
20:25	1120.54	47.61	945.97	80.57	114.29	0.27	1521.50	5678.50	1083.65	90.76	80.65	18.14	13.52	1.80
22:25	1157.49	37.06	880.70	124.14	56.55	0.05	323.00	6877.00	1145.07	72.70	67.25	15.94	14.19	1.26
00:25	1214.08	60.30	919.84	76.30	86.69	0.04	258.50	6941.50	1203.52	81.92	75.40	22.89	17.83	1.65
02:25	1254.53	71.61	904.87	82.20	118.56	0.06	406.00	6794.00	1234.81	108.28	97.42	24.48	18.98	1.66
04:25	1236.17	106.28	898.84	107.24	96.50	0.08	505.50	6694.50	1212.48	136.89	124.82	28.48	23.23	1.50
06:25	1165.90	72.37	894.93	75.67	169.27	4.72	5941.50	1258.50	942.30	127.40	97.96	23.92	17.38	1.80
08:25	1077.57	37.54	956.04	51.93	143.73	3.90	5730.50	1468.50	980.84	69.52	55.65	21.55	16.68	1.67
10:25	1105.46	53.95	988.86	37.86	68.40	0.72	606.50	844.00	1056.71	74.54	64.90	20.15	20.12	1.00

Fig. 17. Circadian time course of the indicators of heart rhythm variability

SYSTEM FOR THE ANALYSIS OF THE DAILY HEART RHYTHM AUTONOMIC NERVOUS SYSTEM BALANCE

FIELD OF THE INVENTION

[0001] Invention is related to the system for the analysis of the human circadian heart rhythm autonomic nervous system balance including identification of diurnal periods which possess the hall-mark of the General Part of the claim 1 of the Claims.

BACKGROUND OF THE INVENTION

[0002] Identification of the autonomic nervous system (ANS) balance within the regulation of the heart rhythm (HR) is based on the fact that the duration of every single heartbeat is determined by the effect of the sympathetic nervous system (SNS) and parasympathetic nervous system (PNS) on the heart sinus node. Due to this effect short-term phase HR acceleration and deceleration occur. However, it has been established that circadian rhythms influence fluctuations in the change of cardiovascular system day and night functions and metabolic functions. It had recently been proved that central and peripheral circadian pacemakers exercise partial direct control of the cardiovascular system and metabolic processes. It suggests that HR observation may help to exclude safely various parameters from the circadian oscillations. These parameters are of highly important for the improvement of individual's sleep, physical and mental status and health. Their identification will help to adapt to night shifts, avoid sleep disorders, optimize professional activities, increase performance, and improve sporting achievements and quality of life.

[0003] Steady slow HR is related to the tonic PNS predominance on HR regulation and fast HR is related to the tonic SNS predominance. HR is involved in the energy and blood supply to the whole body, it is readily affected by respiration, physical and nerve stimulants. Short-term HR fluctuations could be easily observed due to these stimulants. Well-known structures, such as ANS sinus node and receptor system participate in their development.

[0004] Beside aforementioned regularities HR also contains stochastic elements, such as nerve impulsing, mediator release in the synapse or action potential formation in the node. Processes of synthesis of various active substances, ion channel activation and inactivation and matter diffusion could be observed at this level. This is a diffusion part of the HR process.

[0005] Heart rhythm is directly related to the body energy requirements. Heart physiology showed that two main states are observed: activity and rest that are distinctly manifesting as changes of day and night rhythm. Body energy requirements are maximum at one instance and minimum at another. This is caused by the level of energy consumption which is equivalently reflected by HR. HR is the indicator of the energy consumption in the body and allows describing and easily defining consumption ratio between two states over a period of observation. Basic bimodal distribution of HR with some deviations is usually observed; these deviations are caused by unsteadiness of external and internal body activities.

[0006] HR regulation by SNS and PNS is fairly complex; however, in the majority of cases it is exercised through ANS, except humoral responses. SNS effect on HR is quite

slow and is related to the increase of body's energy demands due to the increase of heart rate, blood pressure and/or cardiac output. PNS component responds much faster compared with sympathetic component and reduces heart rate, blood pressure and/or cardiac output. At rest and during sleep proper balance between SNS and PNS is achieved very quickly. This sympatho-vagal balance is extremely important both for healthy and ill body reactions to various stimuli.

[0007] Using HR variability methods ANS balance of short HR segments is defined as the ratio of two components of the spectrum of RR intervals: low frequencies (LF) and high frequencies (HF) ratio. One of the conditions of the analysis is stationary and linear origin of RR series. Such conditions are possible when subject itself is in a steady state. Otherwise results are unsteady and hardly reproducible especially during long-term heart rate registration. High frequency component of the heart rhythm frequently remains constant enough, whereas investigations of low frequency component currently give rise to doubts and criticism. Short-term (up to 5 minutes) circadian RR interval series are usually used to draw such conclusion. These calculations may be more precise when series duration is increased, and when observation period covers 24-hour period the impact of the additional frequency component and unsteadiness occurs. Currently circadian rhythm is being analyzed using HRV methods. It is clear that within 24 hours heart rate changes not only due to the short-term external and internal stimuli but also due to the circadian biorhythm characterized by much higher dispersion. Obtained circadian RR series are composed of the sum of circadian biorhythm, various unsteady fluctuations and chaotic part.

[0008] Patient's metabolism circadian rhythm may be established by the registration of whole body temperature in various body sites (US 20110144528 (A1), U.S. Pat. No. 5,304,212 (A)) and by the measurement of the illumination of the environment (U.S. Pat. No. 5,176,133 (A), US2008065177 (A1), US 2005001512 (A1), WO 2013184627 (A1)). Analysis system is known when circadian rhythm is calculated from patient's blood carbon dioxide (CO₂) parameters using implantable medical device (US 2004138716 (A1)). Recent studies showed that body cells have their own circadian clocks. Gene measurements updated these studies (US 2011193779 (A1)).

[0009] More precise system for the estimation of circadian rhythm combining together fitting and regression analysis for series of RR intervals (intervals between two cardiac contractions) and electrocardiographic interval (QT) series derived from the ECG (electrocardiogram) series obtained by Holter monitoring is presented in the application for the patent US 20100292597 (A1). Method is based on the cosine function application for the whole series that is used for the identification of circadian rhythm within data obtained by registering body temperature. These methods use an assumption that circadian period presents clear cosine-wave shape. However, ordinary person works, eats, sleeps, moves, has various diseases, and changes if his heart rhythm depend on the changes of metabolism, and therefore shape of circadian period is not always present regular cosinusoid. This causes more dynamic changes and intrinsic circadian periods of the HR. Therefore more precise diagnostic technique is needed enabling to derive true shape of circadian HR period and its parameters from the RR interval series.

[0010] Identification of the circadian rhythm using simulation principles when factor causing rhythm changes is known (EP2447866 (A1)) is also used. In this model, input signal could be RR series or other signal related to the circadian dynamics of the heart rhythm, such as actigraph presented in this patent. Autoregressive-moving-average model (ARMAX) is applied to the combination of first signal and second input signal. Output signal, namely, circadian period is fully dependent on periodicity of the input signal and may strongly influence the result, circadian rhythm signal. In order to represent (sharpen) circadian rhythm Cosinor regression model is additionally used to obtain aforementioned cosine-wave shape. Method described requires registration of the additional signal, and results are linearly dependent on its representation of circadian rhythm.

[0011] Obtained series of circadian RR intervals are composed of individual circadian biorhythm and the sum of various unsteady changes. Aforementioned inventions are not ultimately related to the principles of the regulation of heart rhythm, specifically with the peculiarities of autonomic nervous system and other systems. It has long been known that slow HR is related to the predominant effect of tonic PNS on the HR regulation and quick HR is related to the predominance of tonic SNS. Therefore study findings do not contain results of the analysis in terms of further changes of circadian rhythm.

[0012] Patent US 20040193066 (A1) presents heart rhythm managing system demonstrating patient's state; it is based on the balance between SNS and PNS components and uses RR interval signal filtration in two bandwidths not limiting strictly filter characteristics, and therefore further processing results (dispersion is calculated) may differ from the data described in other known sources.

[0013] Japanese application for the patent JP2004283523 (A) describes the system for the analysis of the balance of autonomic nervous system comprising a unit for the collecting of circadian RR intervals, tools for artifacts and arrhythmias removal from the RR interval series, circadian period identifier and RR data series analyzer determining balance of the sympathetic nervous system (SNS) and parasympathetic nervous system (PNS).

[0014] This system for the analysis of the autonomic nervous system balance for the first time allowed determine circadian period from heart rhythm. Detection of the circadian balance of the SNS and PNS elements of the autonomic nervous system is based on well-known methods of heart rhythm variability that are used for a long time (Heart Rate Variability: Standards of Measurement, Physiological Interpretation, and Clinical Use, Circulation, 93, (1996), pp. 1043-1065; Heart Rate Variability: Standards of Measurement, Physiological Interpretation, and Clinical Use, European Heart Journal, 17, published by the American Heart Association, Inc.; European Society of Cardiology, (1996), pp. 354-381). The simplest method is employed splitting circadian series of the heart rhythm by frequency distribution using fast Fourier transform (FFT) method. Data are collected using Holter monitors, and RR intervals are selected and arrhythmias and artifacts are excluded. Forward and backward Fourier transform is applied to circadian heart rhythm data and variation curve is obtained. Accuracy of the analysis depends on series length and duration of the period selected from the bandwidth in the analyzed series. Basically accuracy of the Fourier transform depends on the

length of the series and number of periods of interest in this analyzed series. Consequently, only one period is present in the 24-hours series, and therefore period discovered contains large error and is inaccurate.

[0015] Described analysis system focus on the detection of two intersections points on the transition curve obtained after inverse Fourier transform showing on the curve, according to the inventors, change of the vegetative nervous system 24-hours rhythm. Moreover, it is unclear what should be done with 48-hours data containing 4 points. It has not been considered that true ANS circadian rhythm due to internal hormonal fluctuations and temperature dynamics is governed by circadian metabolic rhythm possessing sinusoid shape and two intersection points. Heart rhythm follows development of the body metabolic processes; however, it is influenced also by other internal (hormones, blood pressure) and external (physical and nerve) factors. Therefore the period of circadian heart rhythm reflects not only main circadian metabolic rhythm of the body but also full ANS impact on the heart rhythm and exclusively may have several shorter periods and intersection points. Only circadian heart rhythm period comprising components of ANS and other components (known and unknown) could be evaluated. Obtained circadian period of heart rhythm approximated using Cosinor method to the cosine-wave shape could contain sizable errors as suggested in the aforementioned source US 201003292597 (A1).

SUMMARY OF THE INVENTION

[0016] It is therefore an object of the present invention by employing all known tools for the collecting data on circadian RR intervals develop on the basis of the collected data on circadian RR intervals a system for the analysis of the circadian heart rhythm autonomic nervous system balance that is free of disadvantages determined in the application for the patent JP2004283523 (A). Furthermore, this invention aims to expand methods of the analysis if HR and to apply them more widely in the medicine, ergonomics, sports and other fields requiring long-term monitoring of health status.

[0017] This object is achieved by the system for the analysis of the human circadian heart rhythm autonomic nervous system balance which possesses a hall-mark of the General Part of the claim 1 of the Claims.

[0018] This invention focuses on HR fluctuations that could be divided into 3 groups: slow fluctuations of the circadian period, higher frequencies compared with circadian and chaotic. Their division into parts is executed applying adequate empiric and mathematical methods allowing to determine series envelope curves, closely and individually related to the principal circadian series following by their separation from the input HR series and only after this procedure HR variability methods could be applied. This method increases accuracy of the analysis of HRV results and adds new HR regulation criteria to the analysis outcomes.

[0019] Superior and preferential alternatives of the implementation of this analysis system are presented in the additional Claims of the Invention.

[0020] According to the invention proposed System for the analysis of the circadian heart rhythm autonomic nervous system balance possesses tools that after removing of the artifacts and arrhythmias from the RR intervals accomplish the following steps:

[0021] Identification of the chaotic part and analysis of the chaotic series of the RR series;

[0022] separation of the chaotic part from RR interval series and acquisition of the clean circadian RR series;

[0023] acquisition of the normalized RR interval series using interpolation, resample and normalization;

[0024] analysis of the heart rhythm bimodal distribution and modes of the normalized RR interval series;

[0025] identification of the heart rhythm circadian period in the normalized RR data series;

[0026] analysis of the indicators of the heart rhythm variable part regulation by sympathetic nervous system (SNS) and parasympathetic nervous system (PNS) in the normalized RR data series;

[0027] findings report generation in graph and tabular form.

[0028] When tools for the exclusion of artifacts and arrhythmias from the RR interval series separating chaotic series from the RR series employ wave transformation method clean RR interval series is obtained. Normalized data series is obtained when interpolation of the circadian RR interval series is performed using cubic Hermite interpolation method.

[0029] The following steps are performed by heart rhythm bimodal distribution and modes obtained from the normalized RR data series analysis module:

[0030] calculation of the input histogram sequence out of normalized RR data series and histogram graphic presentation;

[0031] clustering of the normalized RR data series using k-means clustering method into two RR clusters (modes) of which the first RR cluster (first mode) involves low heart rhythm frequencies and second RR cluster (second mode) involves high heart rhythm frequencies;

[0032] calculation of the statistical characteristics of the first mode and second mode;

[0033] calculation of the probability density functions of the both modes and their histograms;

[0034] summation of the probability density histograms and their graphic presentation;

[0035] determination of the reliability of the compliance of the distribution of the summary histogram and input histogram using chi-square criteria and calculation of the summary histograms of both modes;

[0036] determination of the divergence coefficient of the summary histogram;

[0037] determination of the skewness coefficient of the heart rate and skewness coefficient of the total time in the input histogram;

[0038] tabular presentation of the statistical calculations of the RR intervals;

[0039] calculation and graphic presentation of the circadian time distribution of the RR interval within both modes;

[0040] graphic presentation of the normalized time course of the circadian tonic sympathovagal balance;

[0041] tabular presentation of the values of results of summary calculations of the values of RR interval analysis;

[0042] The following steps are performed by heart rhythm circadian period identification in the normalized RR data series module:

[0043] isolation of this period using continual empirical mode decomposition (Huang transform) and their gradual elimination from every residual RR interval series;

[0044] creation of the heart rhythm circadian period series and analysis of the circadian period structure.

[0045] Analysis of the circadian period structure is performed by separating circadian series of metabolic origin and heart rhythm circadian period series which is obtained using Cosinor calculation method and involves statistical evaluation of the series and parameters obtained; these results are presented in tabular and graphic form. This allows performing statistical analysis of interim HR fluctuation periods observed at specific points.

[0046] The following steps are executed by analyzer of the SNS and PNS regulation criteria of the heart rhythm variable part:

[0047] separation of the variable part which is achieved by the subtraction heart rhythm circadian period series from the normalized RR data sequence;

[0048] filtering of the variable heart rhythm series using infinite impulse response three-filter restriction method allowing to separate RR interval time series of different frequencies: very low frequency (VLF), low frequency (LF) and high frequency (HF) RR intervals time series;

[0049] calculation of the dispersion and mean standard deviations and of the RR intervals time series;

[0050] evaluation of the heart rhythm variability;

[0051] tabular and graphic presentation of the results of evaluation of heart rhythm variability.

[0052] Evaluation of the heart rhythm variability is carried out:

[0053] for the very low frequency filter (VLF, from 0 Hz to 0.04 Hz) determining passband edge frequency equal to 0.035 Hz and stopband edge frequency equal to 0.04 Hz;

[0054] for low frequency band filter (LSm 0.04-0.15 Hz) determining stopband edge frequency at low frequency side equal to 0.035 Hz, and at high frequency side equal to 0.0155 Hz, passband edge frequency at low frequency side equal to 0.04 Hz, and at high frequency side equal to 0.15 Hz;

[0055] for high frequency band filter (HF, 0.15-0.40 Hz) determining stopband edge frequency at low frequency side equal to 0.145 Hz, and at high frequency side equal to 0.45 Hz, passband edge frequency at low frequency side equal to 0.15 Hz, and at high frequency side equal to 0.40 Hz.

[0056] During the evaluation of the heart rhythm variability dispersion ratio for every time frame within low frequency (LF) and high frequency (HF) bands presenting phase balance of SNS and PNS changes are calculated.

SHORT DESCRIPTION OF THE FIGURES

[0057] Best options for the implementation of the invention are detailed below together with references to the attached diagrams involving:

[0058] FIG. 1: System for the analysis of the circadian heart rhythm autonomic nervous system balance.

[0059] FIG. 2: Flow chart of the analysis system block for heart rhythm artifacts and arrhythmias removal, chaotic part detection and series interpolation.

[0060] FIG. 3: Flow chart of the block for the heart rhythm bimodal distribution and analysis of the detected modes.

[0061] FIG. 4: Flow chart of the block for the identification of the circadian period of the heart rhythm.

[0062] FIG. 5: Block for the analysis of the SNS and PNS regulation criteria of the heart rhythm variable part.

[0063] FIG. 6: Content of the data presented by the reporting block.

[0064] FIG. 7: RR interval series reporting graph.

[0065] FIG. 8: Histogram of the block according to FIG. 2 chaotic series.

[0066] FIG. 9: Table containing data obtained according to FIG. 2 and FIG. 3 blocks.

[0067] FIG. 10: Image of the histogram of the sequence according to FIG. 3.

[0068] FIG. 11: Histogram of the RR interval bimodal distribution according to FIG. 3 block.

[0069] FIG. 12: Statistical estimation of the RR interval bimodal time distribution every 2 hours.

[0070] FIG. 13: Time course of the circadian tonic sympatho-vagal balance according to FIG. 3.

[0071] FIG. 14: Statistical evaluation of the structure of circadian period of the circadian heart rhythm.

[0072] FIG. 15: Diagram of the circadian period sequence of the circadian heart rhythm.

[0073] FIG. 16: Classical infinite impulse response three-filter system.

[0074] FIG. 17: Circadian time course of the indicators of heart rhythm variability.

DETAILED DESCRIPTION OF THE INVENTION (DESCRIPTION OF THE PREFERRED EMBODIMENT)

[0075] Subject's 10 physiological signals enter heart rhythm RR interval collection block 20 (FIG. 1) where digital values of signals are placed with at least 512 Hz discretization frequency. Block 20 is able to collect only signal values or employ software that could be able to produce durations of the heart action periods. Signal transmission from the block 20 to the data formatter 30 is performed after completion of daily data collection adding starting time and completion time (timer). Signals in the format of the selected data from the data formatter 30 through local network sending equipment 40 are transmitted to various computer network receiving equipment 50 which enables their storage in the computer 60 memory 65. Subsequently computer processes data received and transmit them to the report block 70 and printer.

[0076] The order of the processing of data downloaded to the memory 65 is detailed below. RR interval series file from the memory 65 is transferred directly to the report block 70 in the form of RR interval report graph RR-Graf, 66 (FIG. 6, FIG. 7) and enters block for heart rhythm purification, chaotic part identification and series interpolation 100 (FIG. 1, FIG. 2) where artifacts and arrhythmias are removed from RR series (100), RR series chaotic parts are identified (120) and chaotic series chaosRR, 130 is identified and separated from RR series (140); interpolation, resample and normalization (160) and analysis of chaotic parts (190) are also performed resulting in chaotic series histogram chaos_Hist-Graf, 195 (FIG. 8) and completion of time distribution table laik_Lent 1, 199 (FIG. 9).

[0077] Artifact and arrhythmias removal (110) from circadian RR interval series (65) is executed using wavelet transform method (Stephane Mallat. A Wavelet Tour of Signal Processing, Third Edition: The Sparse Way. Aca-

demic press of Elsevier, 805p., 2009, ISBN-13: 978-0123743701) which separates slow fluctuations from RR interval series and store them in the memory (65). Besides slow fluctuations series mean (LxRR) of frame and standard deviation (LsRR) are calculated in every RR interval series with moving time frame ($L \geq 300$ s) while moving through single memory address. RR interval values overriding $LxRR + 3 * LsRR$ boundaries are adjusted at every step by replacing them with new LxRR values. After completion of movement slow fluctuation RR interval series obtained after wavelet transform is added to the new adjusted RR interval series and clean circadian RR interval series is obtained (denRR, 150) which is stored in the memory 65.

[0078] Obtained RR interval series (denRR, 150) using obtained real time series (timer) is interpolated by cubic Hermite interpolation method (described Burden, Richard L.; Faires, J. Douglas (2004). Numerical Analysis. Belmont: Brooks/Cole. P. 872. 2011) with the period equal or shorter than 0.5 second. Mean (xRR) and standard deviation (sRR) of the obtained new RR data sequence is calculated and stored in the memory 65 for future calculations. This series is normalized (average is subtracted and result is divided by two) and final RR data series (norm RR) ready for analysis is obtained.

[0079] Block for the heart rhythm bimodal distribution and analysis of the detected modes 200 (FIG. 3) executes calculation of the initial histogram series (210) from normalized RR data series (norm RR, 180) with 60-80 graduation marks, their number is determined by selected histogram interval delta with values between 12 and 15 ms. Results are presented in graph form (histGraf, 270) (FIG. 10). Using k-means clustering method (Spaeth, Helmuth. Cluster-Analyse-Algorithmen zur Objektklassifizierung und Datenreduktion, Verfahren der Datenverarbeitung, Muenchen: R.Oldenbourg, P. 71, 1975) RR series clustering is carried out when normRR series (180) is divided into two clusters (modes): first mode is RR cluster 1 (221) with low heart rate frequency, and second mode is RR cluster 2 (222) with high heart rate frequency. For this mode (230) No 1 mean xRR1, standard deviation sdRR1 and number of RRs are calculated. Using the same interval delta out of xRR1 and sdRR1 probability density function PDF1 is calculated which is normalized with respect to the whole normRR series length (No 0) (240) using normalization coefficient $NO\ 1/No\ 0$ (240). For the second mode these calculations are repeated, however, using their mean xRR2, standard deviation sdRR2 and normalization coefficient $NO\ 2/No\ 1$ (250). Both density functions are analyzed in the form of histogram; they are summarized (260) and presented as the graph together with histogram graph (histGraf, 270) (FIG. 10). Using chi-square criteria distribution consistency between aggregated and initial (210) histogram is determined and calculation of the aggregate histogram of both modes is performed (290). Maximum values of peaks equal to xRR1 and xRR2 are found at aggregated histogram as well as their equivalence in the graduation marks of the RR value histogram. Difference between xRR1 and xRR2 is equal to the coefficient of divergence between PNS and SNS (FIG. 10) which shows level of the dominance of both parts of ANS in the heart rhythm tonic regulation. Level point of intersection of probability densities of xRR1 and xRR2 values is determined in the aggregate histogram as well as its equivalent to the graduation mark of the RR histogram (FIG. 10), which divides initial normRR sequence histogram hist-

Graf (270) into two parts where numbers of RR intervals nrRR1 and nrRR2 are counted as well as their summarized durations sekRR1 and sekRR2. Ratio of nrRR1 and nrRR2 is calculated which is defined as heart rate coefficient of asymmetry, and calculated ratio of sekRR1 and sekRR2 represent total duration asymmetry coefficient. Point of intersection of both distributions (level point) shows value of the RR interval dividing level of dominance of both parts of ANS (SMS and PNS) or value at which impact of both parts of ANS is equally balanced.

[0080] Summary duration times with desirable time frames (e.g., $L \geq 1$ hour) and RR interval histogram distribution per day presented in the histogram histLaikGraf, 297 (FIG. 11) showing ANS heart rhythm asymmetry 24-hour time course are calculated from the RR intervals of every mode. Statistical calculations of RR intervals are performed at every time frame, and results are presented in the table LaikPaisk_Lent, 296 (FIG. 12).

[0081] After figure of one was assigned to any value of RR of the first mode and figure of two was assigned to any value of RR of the second mode they are summarized in the new value frame ($L \geq 300$ s), result is multiplied by two, divided by the length of frame and after figure of three is subtracted from the result normalized sympatho-vagal balance time course laikGraf, 298 (FIG. 13) is obtained. When value equals to plus one (+1) is obtained, SNS is totally dominating in the heart rhythm regulation. Values equal to minus one (-1) show that PNS is totally dominating (FIG. 13). Additionally RR interval values in every time frame are also presented in the general table laikLent2, 299 (FIG. 9) as summary calculation.

[0082] In the block for the identification of the circadian period of the heart rhythm (FIG. 4) heart rhythm circadian periods are extracted from normalized RR data series (normRR, 180) using continual empirical mode decomposition (Huang transform) (Huang N. E., Shen, Z., Long, S. et al., The Empirical Mode Decomposition and the Hilbert Spectrum for Nonlinear and Non-Stationary Time Series Analysis. Proc. Royal Soc. London Series A, 1998, vol. 454, pp. 903-995; Ming-Chya Wu and Chin-Kun Hu. Application of Empirical Mode Decomposition to Cardiorespiratory Synchronization. S. K. Dana et al. (eds.), Complex Dynamics in Physiological Systems: From Heart to Brain, Understanding Complex Systems, Springer Science+Business Media B. V. 2009). Intrinsic mode functions (IMF) are identified in the RR data series (normRR, 180) and they are gradually removed from every occurred residual interval series. When less than three peaks and less than four valleys remain in the residual series operation is terminated. Residual series is the heart rhythm circadian period series (cirkRR). By applying empirical mode decomposition (EMD) (Huang transform) method to RR data series (180) its two components are extracted: RR values tonic circadian HR period and residual fluctuations of RR values that are shorter than circadian period.

[0083] The following stages and steps are performed applying empirical mode decomposition:

[0084] 1. By applying first derivative local extreme points (305) are identified in the whole RR data (normRR, 180) time line $x(t)$.

[0085] 2. All maxima are separately connected (310) by cubic splines using cubic Hermite polynomial interpolation (Burden, Richard L.; Faires, J. Douglas (2004).

Numerical Analysis. Belmont: Brooks/Cole. 872 p. 2011) resulting in the formation of upper envelope curve, $u(t)$.

[0086] 3. All local minima are connected (315) applying Hermite interpolation procedure for local minima resulting in the formation of lower envelope curve $l(t)$.

[0087] 4. Data mean for both envelope curves is calculated using operation $m(t) = [u(t) + l(t)]/2$ and interim intrinsic mode function IMF(t), $h(t)$ (320) is determined by calculating the difference between data $x(t)$ and obtained envelope values of mean $m(t)$, $h(t) = x(t) - m(t)$. IMF (1) is subtracted from the series normRR, 180 for the first time.

[0088] 5. INF(i) series, $h(t)$ dispersion and ratio with previously calculated IMF(i-1) dispersion $\text{Var}(i-1)$ are calculated in order to achieve reliable accuracy of calculation with the probability of 0.01 (Fisher's dispersion distribution coefficient).

[0089] 6. Steps 1-5 are repeated with interim intrinsic mode function IMF(i), $h(t)$ for as long as its magnitude of dispersion compared (330) with previously obtained IMF(i-1) match the criteria (331) (more than 0.01).

[0090] 7. When restriction (332) indicated in the 6th step is matched after previous steps, this stage and extraction of the interim IMF(i) is completed; this interim IMF(i) taken as a last IMF(i) component, $c(t)$ found at this stage.

[0091] 8. Next stage repeats steps 1-7 for remaining series $r(t)$: $r(t) = x(t) - c(t)$ (340), where $r(t)$ is considered as a new time series, $x(t)$.

[0092] 9. Number of peaks and valleys in the new time series $x(t)$ is determined.

[0093] Stages repeat steps 1-9 every time checking number of peaks and valleys (355) as long as restriction (355) is matches, and these steps are completed when residual time series contains less than three peaks and less than four valleys (357), and thus heart rhythm circadian period series (cirkRR, 360) is obtained which may have close to sinusoid wave shape. To obtain heart rhythm circadian period sinusoid-shaped curve multicomponent Cosinor calculation method is applied (Nelson W, Tong Y L, Lee J K, Halberg F. Methods for cosinor-rhythmometry. Chronobiologia. 1979, 6(4), 305-323; Cornelissen G. Cosinor-based rhythmometry. Theor Biol Med Model. 2014, 11; 11(1):16.; Bingham C, Arbogast B, Cornelissen Guillaume G, Lee J K, Halberg F: Inferential statistical methods for estimating and comparing cosinor parameters. Chronobiologia 1982, 9:397-439). Cosinor method allows obtaining heart rhythm circadian period curve and performs its structure analysis (370) extracting additional elements of smaller period. Cosinor method allows calculating structure indicators of the circadian heart rhythm circadian period: mean amplitudes of the circadian period and its components (MESOR), waves amplitudes, acrophases, their duration and dispersion. Statistical evaluation of obtained parameters is performed using Fisher's reliability criterion (F-test), and results are presented in the table cirkLent, 380 (FIG. 6) and also presented in graph form cirkGraf, 390 (FIG. 15).

[0094] In the block for the analysis of the SNS and PNS regulation criteria of the heart rhythm variable part (FIG. 5) first RR variable part separation is performed (405), which is obtained by subtraction of heart rhythm circadian period and its components series (cirkRR, 365) (FIG. 3) from normalized RR data series (normRR, 180) (FIG. 2). New

interim RR data series (flucRR, 410) obtained represents RR interval frequencies that are higher than circadian fluctuations.

[0095] Using classic infinite impulse response three-filter restriction method (Butterworth, Kaiser et al.) first of all filtering of the variable heart rhythm sequence (420) is performed determining three RR interval time series: very low frequency (VLF), low frequency (LF) and high frequency (HF).

[0096] Further by applying three-filter restriction system (FIG. 16) analysis of the variability of fluctuating RR data series is performed:

[0097] 1. For the very low frequency filter (VLF, from 0 Hz to 0.04 Hz) determining passband edge frequency equal to 0.035 Hz and stopband edge frequency equal to 0.04 Hz.

[0098] 2. For low frequency band filter (LF 0.04-0.15 Hz) determining stopband edge frequency at low frequency side equal to 0.035 Hz, and at high frequency side equal to 0.0155 Hz, passband edge frequency at low frequency side equal to 0.04 Hz, and at high frequency side equal to 0.15 Hz.

[0099] 3. For the high frequency band filter (HF, 0.15-0.40 Hz) determining stopband edge frequency at low frequency side equal to 0.145 Hz, and at high frequency side equal to 0.45 Hz, passband edge frequency at low frequency side equal to 0.15 Hz, and at high frequency side equal to 0.40 Hz.

[0100] 4. Equal conditions for all filters determining stopband percent ripple equal or larger than 60 dB and passband percent ripple equal and lower than 0.01 dB.

[0101] 5. Specified filter characteristics allow obtaining constant result regardless investigator's choice of available classic infinitive response filters for the filtering of circadian heart rhythm except filters for short time series because all these filters possess different distortions of the results initial sections of series.

[0102] 6. In order to avoid these distortions every defined time series is filtered twice, first direct filtering is performed, and second filtering is performed by turning around memory addressing of the reversely obtained series and by turning around filtering results once more. This helps to avoid violation of the structure of initial time in the RR interval series.

[0103] 7. After filtering every series is multiplied by median standard deviation of the initial RR sequence.

[0104] Dispersion and mean standard deviation values that selectively may be expressed by dispersion values (ms^2) or amplitude values (ms) are calculated in the selected time frames (≥ 100 s) of the three series obtained after filtering. To evaluate these dispersions and mean standard deviations their distribution in the desirable time frame within circadian time frame is calculated. Obtained results represent SNS and PNS involvement level in the regulation of the phase changes of heart rhythm throughout 24 hours.

[0105] To evaluate variability of heart rhythm (450) ratio of dispersions found in low frequency (LF) and high frequency (HF) bands is calculated showing changes in SNS and PNS phase balance within 24 hours in every time frame (No Authors Listed. Heart Rate Variability: Standards of Measurement, Physiological Interpretation, and Clinical Use, Circulation, 93, (1996), pp. 1043-1065; Heart Rate Variability: Standards of Measurement, Physiological Interpretation, and Clinical Use, European Heart Journal, 17,

Prepared by the Task Force of The European Society of Cardiology and The North American Society of Pacing and Electrophysiology; published by the American Heart Association, Inc.; European Society of Cardiology, (1996), pp. 354-381).

[0106] Time course of the heart rhythm variability is further presented in the graph (laikSpekGraf, 435) (FIG. 17) and table (laikSpek_Lent, 445) (FIG. 12).

1. An analysis system for analysis of the balance of circadian heart rhythm autonomic nervous system comprising a RR interval collection block (20), tools (110) for artifact and arrhythmias removal from RR interval series (65), an identifier for circadian period (360) and RR interval series (180) data analyzer finding sympathetic and parasympathetic nervous system balance, characterized in that the analysis system has tools which are designed to perform the following steps after artifact and arrhythmias removal from (110) RR interval series (65):

identification of the chaotic part of the RR interval series (120) and analysis of the chaotic part (190);

separation of the chaotic part from RR interval (140) series and acquisition of the clean circadian RR series (150);

acquisition of the normalized RR interval series (180) using—interpolation, resampling and normalization (160);

analysis (200) of the heart rate bimodal distribution and modes of the normalized RR interval series (180);

identification of the heart rate circadian period (300) in the normalized RR data series (180);

analysis (400) of the heart rhythm variable part SNS and PNS regulation indicators in the normalized RR data series (180);

generation of the report (70) on obtained results in graph (92) and tabular (94) form.

2. The analysis system according to claim 1, characterized in that tools (110) for artifact and arrhythmias removal from RR series (65) performing chaotic series separation from RR series (140) and obtaining clean circadian RR interval series (150) use wavelet transform method.

3. The analysis system according to claim 1, characterized in that to obtain normalized data series (180) interpolation of circadian RR interval series (150) is performed using cubic Hermite interpolation.

4. The analysis system according to claim 1, characterized in that the following steps are performed by the heart rhythm bimodal distribution and analysis of the modes detected in the normalized RR data series (180) block (200):

calculation of the input histogram sequence (210) out of normalized RR data series (180) and histogram graphic presentation (histGraf, 270);

clustering (220) of the normalized RR data series (180) into two RR clusters (modes) of which the RR cluster 1 (221) (first mode) involves low heart rhythm frequencies and RR cluster 2 (222) (second mode) involves high heart rhythm frequencies; calculation of the statistical characteristics of the first mode series (230) and second mode series (240);

calculation of the probability density functions for both modes and their histograms (250); summation of the probability density histograms (260) and their graphic presentation (histGraf, 270); determination of the reliability of the compliance of the distributions between summary histogram (260) and input histogram (210)

using chi-square criterion and calculation of the summary histogram for both modes (290);
determination of the divergence coefficient in the summary histogram (290) of both modes; determination of the skewness coefficient of the heart rate and skewness coefficient of the total time in the input histogram (290);
tabular presentation of the statistical calculations (Laik-Pask_Lent, 296);
graphic presentation of circadian time distribution of the RR interval within both modes (histLaikGraf, 297);
graphic presentation of the normalized time course of the circadian tonic sympathovagal balance ((laikGraf, 298);
tabular presentation of the values of results of summary calculations of the values of RR interval analysis (laikLent2, 299).

5. The analysis system according to claim 4, characterized in that heart rhythm bimodal distribution and analysis of the modes detected in normalized RR data series (180) block (200) is clustering (220) normalized RR data series (180) into two groups using k-means clustering method.

6. The analysis system according to claim 1, characterized in that block for heart rhythm circadian period identification within RR data series (180) performs:
isolation of the heart rhythm circadian period performing continual empirical mode decomposition (Huang transform) involving detection of interim modes (IMF) (320) and their gradual elimination from every residual RR interval series;
obtaining of the heart rhythm circadian period series (cirkRR, 360) and analysis of the circadian period structure (370).

7. The analysis system according to claim 6, characterized in that block (300) for heart rhythm circadian period identification within RR data series (180) performs analysis of the circadian period structure using Cosinor calculation method and includes statistical evaluation of parameters obtained presenting them in the tabular (cirkLent, 380) and graph form (cirkGraf, 390).

8. The analysis system according to claim 1, characterized in that block for the analysis of the heart rhythm variable part SNS and PNS regulation criteria (400) performs the following steps:

separation of the RR variable part which is achieved by subtraction of the heart rhythm circadian period (cirkRR, 365) from normalized RR data sequence (normRR, 180); filtering of the variable heart rhythm series (420) when three RR interval time series of different frequencies are separated;
calculation of the dispersion and mean standard deviations and of three RR intervals time series (430);
evaluation of the heart rhythm variability (450);
graphic (laikSpekGraf, 435) and tabular (laikSpekLent, 455) presentation of the evaluation of the heart rhythm variability.

9. The analysis system according to claim 8, characterized in that variable heart rhythm series filter (420) employs infinite impulse response three-filter restriction method determining very low frequency (VLF), low frequency (LF) and high frequency (HF) RR interval time series.

10. The analysis system according to claim 8, characterized in that block for the analysis of the heart rhythm variable part SNS and PNS regulation criteria (400) performs the following evaluating of heart rhythm variability (450):
for the very low frequency filter (VLF, from 0 Hz to 0.04 Hz) determining passband edge frequency equal to 0.035 Hz and stopband edge frequency equal to 0.04 Hz; for low frequency band filter (LF 0.04-0.15 Hz) determining stopband edge frequency at low frequency side equal to 0.035 Hz, and at high frequency side equal to 0.0155 Hz, passband edge frequency at low frequency side equal to 0.04 Hz, and at high frequency side equal to 0.15 Hz;
for the high frequency band filter (HF, 0.15-0.40 Hz) determining stopband edge frequency at low frequency side equal to 0.145 Hz, and at high frequency side equal to 0.45 Hz, passband edge frequency at low frequency side equal to 0.15 Hz, and at high frequency side equal to 0.40 Hz.


11. The analysis system according to claim 10, characterized in that block for the analysis of the heart rhythm variable part SNS and PNS regulation criteria (400) evaluation of the heart rhythm variability (450) is performed by calculation of the dispersion ratio for every time frame within low frequency and high frequency bands presenting phase balance of SNS and PNS changes.

* * * * *

专利名称(译)	用于分析每日心律自主神经系统平衡的系统		
公开(公告)号	US20170311867A1	公开(公告)日	2017-11-02
申请号	US15/521279	申请日	2015-04-13
[标]申请(专利权)人(译)	UAB METAPRO HLDG		
申请(专利权)人(译)	UAB METAPRO HOLDING		
当前申请(专利权)人(译)	UAB METAPRO HOLDING		
[标]发明人	STANKUS ALBINAS		
发明人	STANKUS, ALBINAS		
IPC分类号	A61B5/00 A61B5/0456 A61B5/024 G06F19/00		
CPC分类号	A61B5/4035 A61B5/4857 A61B5/0456 A61B5/02405 G06F19/322 A61B5/743 G06F19/345 G06F19/3487 A61B5/7203 A61B5/0452 G16H10/60 G16H15/00 G16H50/20		
优先权	2014000125 2014-10-27 LT		
其他公开文献	US10342474		
外部链接	Espacenet USPTO		

摘要(译)

用于分析昼夜心律自主神经系统平衡的分析系统，该分析系统具有设计用于在从RR间隔系列去除伪影和心律失常之后执行以下步骤的工具：识别RR间期系列的混乱部分和分析混沌部分；将混沌部分与RR间期序列分离，获得清洁的昼夜节律RR系列；使用插值，重采样和归一化来获取归一化的RR区间序列；分析心率双峰分布和归一化RR区间序列的模式；识别归一化RR数据系列中的心率昼夜周期；分析标准化RR数据系列中的心律变量部分SNS和PNS调节指标；以图表和表格形式生成获得结果的报告。

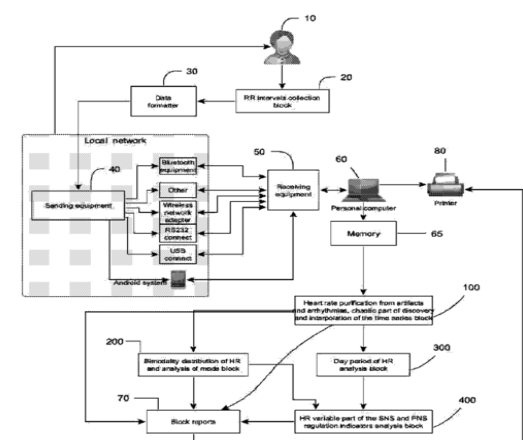

System for the analysis of the circadian heart rhythm autonomic nervous system balance