



(11)

EP 3 518 304 A1

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
31.07.2019 Bulletin 2019/31

(21) Application number: **19153702.6**

(22) Date of filing: **25.01.2019**

(51) Int Cl.:
H01L 51/50 (2006.01) **C09K 11/06** (2006.01)
B32B 9/00 (2006.01) **C07C 211/54** (2006.01)
C07D 307/91 (2006.01) **C07D 333/76** (2006.01)
C07D 407/12 (2006.01) **C07D 409/12** (2006.01)
C07D 311/96 (2006.01)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
KH MA MD TN

(30) Priority: **26.01.2018 KR 20180009993**
20.11.2018 KR 20180143745

(71) Applicant: **Samsung Display Co., Ltd.**
Gyeonggi-Do (KR)

(72) Inventors:
• **MIYAKE, Hideo**
Yokohama (JP)

- **UENO, Masatsugu**
Yokohama (JP)
- **JIN, Xiulan**
Yokohama (JP)
- **TAKADA, Ichinori**
Yokohama (JP)
- **UNO, Takuya**
Yokohama (JP)
- **ITOI, Hiroaki**
Yokohama (JP)


(74) Representative: **Shearman, James Ward**
Marks & Clerk LLP
15 Fetter Lane
London EC4A 1BW (GB)

(54) **N-(((PHENYL)NAPHTHALEN-2-YL)PHENYL)-N-(PHENYL)-DIBENZOTHIOPHENAMINE, -DIBENZOFURANAMINE AND -9H-FLUORENYLAMINE DERIVATIVES AND RELATED COMPOUNDS FOR USE IN ORGANIC ELECTROLUMINESCENCE DEVICES**

(57) Provided is an organic electroluminescence device including a first electrode, a hole transport region disposed on the first electrode, an emission layer disposed on the hole transport region, an electron transport region disposed on the emission layer, and a second electrode disposed on the electron transport region, in which the hole transport region includes a monoamine compound represented by Formula 1, such as e.g. a N-(((phenyl)naphthalen-2-yl)phenyl)-N-(phenyl)-dibenzothiophenamine, a N-(((phenyl)naphthalen-2-yl)phenyl)-N-(phenyl)-dibenzofuranamine, a N-(((phenyl)naphthalen-2-yl)phenyl)-N-(phenyl)-9H-fluorenylamine derivative or a structurally related compound, thereby attaining high emission efficiency.

Fig. 1

FIG. 1

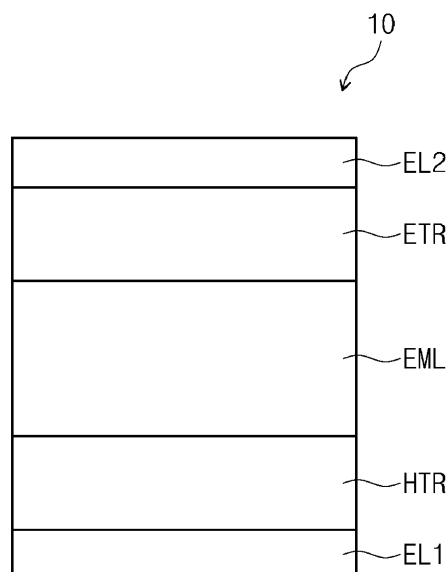

Description

BACKGROUND

5 [0001] The present disclosure herein relates to an organic electroluminescence device and a monoamine compound for an organic electroluminescence device.

[0002] Development on an organic electroluminescence display as an image display is being actively conducted. An organic electroluminescence display is different from a liquid crystal display and is so called a self-luminescent display which accomplishes display by recombining holes and electrons injected from a first electrode and a second electrode in an emission layer and emitting light from a luminescent material which includes an organic compound in the emission layer.


10 [0003] In an application of an organic electroluminescence device to a display, decrease of a driving voltage, increase of emission efficiency and extension of life for the organic electroluminescence device are required, and development of a material which may stably implement these requirements in the organic electroluminescence device is also continuously required.

SUMMARY

20 [0004] The present disclosure provides an organic electroluminescence device and a monoamine compound for an organic electroluminescence device. More specifically, the present disclosure provides an organic electroluminescence device with high efficiency and a monoamine compound included in a hole transport region of an organic electroluminescence device.

25 [0005] An embodiment of the inventive concept provides an organic electroluminescence device including a first electrode, a hole transport region disposed on the first electrode, an emission layer disposed on the hole transport region, an electron transport region disposed on the emission layer and a second electrode disposed on the electron transport region, in which the hole transport region includes a monoamine compound represented by the following Formula 1.


[Formula 1]

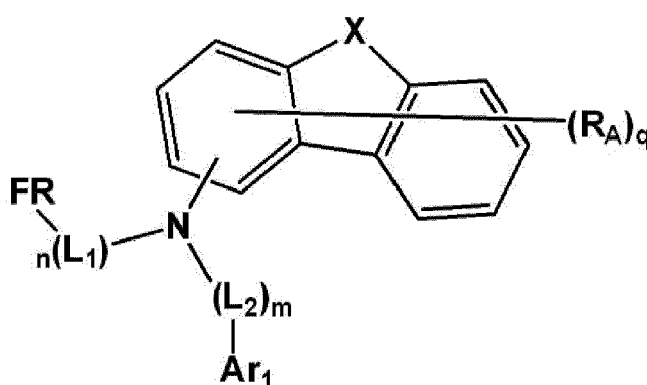

45 [0006] In Formula 1, X is S, O or CRR', R and R' are each independently a substituted or unsubstituted alkyl group having 1 to 10 carbon atoms, a substituted or unsubstituted aryl group having 6 to 20 carbon atoms for forming a ring, or a substituted or unsubstituted heteroaryl group having 2 to 10 carbon atoms for forming a ring, or form a ring by combining adjacent groups with each other, L₁ and L₂ are each independently a direct linkage, a substituted or unsubstituted arylene group having 6 to 12 carbon atoms for forming a ring, or a substituted or unsubstituted heteroarylene group having 2 to 12 carbon atoms for forming a ring, n and m are each independently an integer of 0 to 2, R_A is a hydrogen atom, a substituted or unsubstituted alkyl group having 1 to 10 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms for forming a ring, or a substituted or unsubstituted heteroaryl group having 2 to 30 carbon atoms for forming a ring, q is an integer of 0 to 7, Ar₁ is a substituted or unsubstituted aryl group having 6 to 12 carbon atoms for forming a ring, or a substituted or unsubstituted heteroaryl group having 2 to 12 carbon atoms for forming a ring, in case X is CRR', Ar₁ does not include a heteroaryl group, and FR is represented by the following Formula 2.

55

[Formula 2]

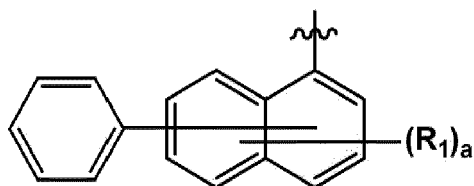

[0007] In an embodiment, the hole transport region may have a multilayer structure having a plurality of layers, and a layer of the plurality of layers contacting with the emission layer may include the monoamine compound according to an embodiment of the inventive concept.


15 [0008] In an embodiment, the hole transport region may include a hole injection layer disposed on the first electrode, a hole transport layer disposed on the hole injection layer, and an electron blocking layer disposed on the hole transport layer, and the electron blocking layer may include the monoamine compound according to an embodiment of the inventive concept.

20 [0009] In an embodiment, the electron transport region may include a hole blocking layer disposed on the emission layer, an electron transport layer disposed on the hole blocking layer, and an electron injection layer disposed on the electron transport layer.

[0010] In Formula 2, R_1 is a hydrogen atom, a deuterium atom, or a halogen atom, and a is an integer of 0 to 6.

[0011] In an embodiment, FR may be represented by the following Formula 2-1.

[Formula 2-1]

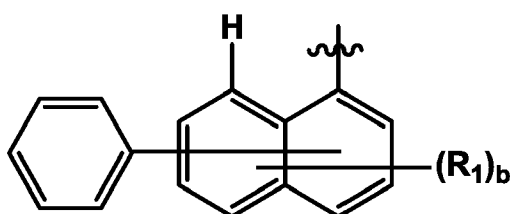

35 [0012] In Formula 2-1, b is an integer of 0 to 5, and R_1 is the same as defined above.

[0013] In an embodiment, n may be 1, and L_1 may be a substituted or unsubstituted arylene group having 6 to 12 carbon atoms for forming a ring.

[0014] In an embodiment, L_1 may be a substituted or unsubstituted phenylene group.

[0015] In an embodiment, FR may be substituted at a para position against the nitrogen atom.

40 [0016] In an embodiment, m may be 1, L_2 may be a substituted or unsubstituted arylene group having 6 to 12 carbon atoms for forming a ring, and Ar_1 may be a substituted or unsubstituted aryl group having 6 to 12 carbon atoms for forming a ring.

[0017] In an embodiment, L_2 may be a substituted or unsubstituted phenylene group, and Ar_1 may be a substituted or unsubstituted phenyl group, a substituted or unsubstituted biphenyl group, or a substituted or unsubstituted naphthyl group.

45 [0018] In an embodiment, m may be 0, and Ar_1 may be a substituted or unsubstituted heteroaryl group having 5 to 12 carbon atoms for forming a ring.

[0019] In an embodiment, Ar_1 may be a substituted or unsubstituted dibenzofuran group, or a substituted or unsubstituted dibenzothiophene group.

50 [0020] An embodiment of the inventive concept provides a monoamine compound represented by the above Formula 1.

[0021] At least some of the above and other features of the invention are set out in the claims.

BRIEF DESCRIPTION OF THE FIGURES

55 [0022] The accompanying drawings are included to provide a further understanding of the inventive concept, and are incorporated in and constitute a part of this specification. The drawings illustrate embodiments of the inventive concept and, together with the description, serve to explain principles of the inventive concept. In the drawings:

FIG. 1 is a schematic cross-sectional view of an organic electroluminescence device according to an embodiment of the inventive concept;

FIG. 2 is a schematic cross-sectional view of an organic electroluminescence device according to an embodiment of the inventive concept; and

FIG. 3 is a schematic cross-sectional view of an organic electroluminescence device according to an embodiment of the inventive concept.

DETAILED DESCRIPTION

[0023] The above objects, other objects, features and advantages of the inventive concept will be easily understood from preferred embodiments with reference to the accompanying drawings. The inventive concept may, however, be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the inventive concept to those skilled in the art.

[0024] Like reference numerals refer to like elements for explaining each drawing. In the drawings, the sizes of elements may be enlarged for clarity of the inventive concept. It will be understood that, although the terms first, second, etc. may be used herein to describe various elements, these elements should not be limited by these terms. These terms are only used to distinguish one element from another element. For example, a first element discussed below could be termed a second element, and similarly, a second element could be termed a first element. As used herein, the singular forms are intended to include the plural forms as well, unless the context clearly indicates otherwise.


[0025] It will be further understood that the terms "comprise" or "have," when used in this specification, specify the presence of stated features, numerals, steps, operations, elements, parts, or a combination thereof, but do not preclude the presence or addition of one or more other features, numerals, steps, operations, elements, parts, or a combination thereof. It will also be understood that when a layer, a film, a region, a plate, etc. is referred to as being "on" another part, it can be "directly on" the other part, or intervening layers may also be present. On the contrary, when a layer, a film, a region, a plate, etc. is referred to as being "under" another part, it can be "directly under" the other part, or intervening layers may also be present.

[0026] First of all, an organic electroluminescence device according to an embodiment of the inventive step will be explained referring to FIGS. 1 to 3.

[0027] FIG. 1 is a schematic cross-sectional view illustrating an organic electroluminescence device according to an embodiment of the inventive concept. FIG. 2 is a schematic cross-sectional view illustrating an organic electroluminescence device according to an embodiment of the inventive concept. FIG. 3 is a schematic cross-sectional view illustrating an organic electroluminescence device according to an embodiment of the inventive concept.

[0028] Referring to FIGS. 1 to 3, an organic electroluminescence device 10 according to an embodiment of the inventive concept includes a first electrode EL1, a hole transport region HTR, an emission layer EML, an electron transport region ETR, and a second electrode EL2.

[0029] The hole transport region HTR includes the monoamine compound according to an embodiment of the inventive concept. Hereinafter, the monoamine compound according to an embodiment of the inventive concept will be specifically explained, and then each layer of the organic electroluminescence device 10 will be explained.

[0030] In the present disclosure,  means a position to be connected.

[0031] In the present disclosure, "substituted or unsubstituted" may mean unsubstituted or substituted with at least one substituent selected from the group consisting of deuterium, halogen, cyano, nitro, silyl, boron, phosphine, alkyl, alkenyl, aryl and heterocyclic group. In addition, each of the substituents illustrated above may be substituted or unsubstituted. For example, biphenyl may be interpreted as aryl, or phenyl substituted with phenyl.

[0032] In the present disclosure, the term "form a ring by combining adjacent groups with each other" may mean forming a substituted or unsubstituted hydrocarbon ring, or a substituted or unsubstituted heterocycle by combining adjacent groups with each other. The hydrocarbon ring includes an aliphatic hydrocarbon ring and an aromatic hydrocarbon ring. The heterocycle includes an aliphatic heterocycle and an aromatic heterocycle. The hydrocarbon ring and heterocycle may be a monocycle or a polycycle. In addition, the ring formed by combining adjacent groups may be connected with another ring to form a spiro structure.


[0033] In the present disclosure, the term "an adjacent group" may mean a substituent at an atom which is directly connected with another atom at which a corresponding substituent is substituted, another substituent at an atom at which a corresponding substituent is substituted, or a substituent stereoscopically disposed at the nearest position to a corresponding substituent. For example, two methyl groups in 1,2-dimethylbenzene may be interpreted as "adjacent groups", and two ethyl groups in 1,1-diethylcyclopentene may be interpreted as "adjacent groups".

[0034] In the present disclosure, examples of a halogen atom are a fluorine atom, a chlorine atom, a bromine atom, or an iodine atom.

[0035] In the present disclosure, the alkyl group may have a linear, branched or cyclic form. The carbon number of the alkyl group may be 1 to 30, 1 to 20, 1 to 10, or 1 to 4. Examples of the alkyl group may include methyl, ethyl, n-propyl, isopropyl, n-butyl, s-butyl, t-butyl, i-butyl, 2-ethylbutyl, 3,3-dimethylbutyl, n-pentyl, i-pentyl, neopentyl, t-pentyl, cyclopentyl, 1-methylpentyl, 3-methylpentyl, 2-ethylpentyl, 4-methyl-2-pentyl, n-hexyl, 1-methylhexyl, 2-ethylhexyl, 2-butylhexyl, cyclohexyl, 4-methylcyclohexyl, 4-t-butylcyclohexyl, n-heptyl, 1-methylheptyl, 2,2-dimethylheptyl, 2-ethylheptyl, 2-butylheptyl, n-octyl, t-octyl, 2-ethyloctyl, 2-butyloctyl, 2-hexyloctyl, 3,7-dimethyloctyl, cyclooctyl, n-nonyl, n-decyl, adamantyl, 2-ethyldecyl, 2-butyldecyl, 2-hexyldecyl, 2-octyldecyl, n-undecyl, n-dodecyl, 2-ethyldodecyl, 2-butyldecyl, 2-hexyldodecyl, 2-octyldodecyl, n-tridecyl, n-tetradecyl, n-pentadecyl, n-hexadecyl, 2-ethylhexadecyl, 2-butylhexadecyl, 2-hexylhexadecyl, 2-octylhexadecyl, n-heptadecyl, n-octadecyl, n-nonadecyl, n-eicosyl, 2-ethyl eicosyl, 2-butyl eicosyl, 2-hexyl eicosyl, 2-octyl eicosyl, n-heneicosyl, n-docosyl, n-tricosyl, n-tetracosyl, n-pentacosyl, n-hexacosyl, n-heptacosyl, n-octacosyl, n-nonacosyl, n-triacontyl, etc., without limitation.

[0036] In the present disclosure, the aryl group means any functional group or substituent derived from an aromatic hydrocarbon ring. The aryl group may be monocyclic aryl or polycyclic aryl. The carbon number of the aryl group for forming a ring may be 6 to 36, 6 to 30, 6 to 20, or 6 to 12. Examples of the aryl group may include phenyl, naphthyl, fluorenyl, anthracenyl, phenanthryl, biphenyl, terphenyl, quaterphenyl, quinqphenyl, sexiphenyl, biphenylene, triphenylene, pyrenyl, benzofluoranthenyl, chrysenyl, etc., without limitation.

[0037] In the present disclosure, the fluorenyl group may be substituted, and two substituents may be combined with each other to form a spiro structure. Examples of the substituted fluorenyl group may include the following groups, without limitation.

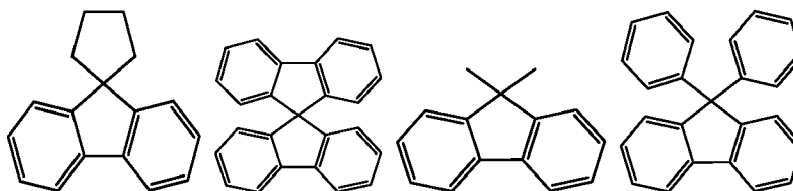

[0038] In the present disclosure, the heteroaryl group may be heteroaryl including at least one of O, N, P, Si, or S as a heteroatom. When the heteroaryl group includes two heteroatoms, the two heteroatoms may be the same or different from each other. The carbon number of the heteroaryl group for forming a ring may be 2 to 30, or 5 to 12. The heteroaryl group may be monocyclic heteroaryl or polycyclic heteroaryl. Polycyclic heteroaryl may have bicyclic or tricyclic structure, for example. Examples of the heteroaryl group may include thiophene, furan, pyrrole, imidazole, thiazole, oxazole, oxadiazole, triazole, pyridine, bipyridine, pyrimidine, triazine, triazole, acridyl, pyridazine, pyrazinyl, quinoline, quinazoline, quinoxaline, phenoxazine, phthalazine, pyrido pyrimidine, pyrido pyrazine, pyrazino pyrazine, isoquinoline, indole, carbazole, N-aryl carbazole, N-heteroaryl carbazole, N-alkyl carbazole, benzoxazole, benzoimidazole, benzothiazole, benzocarbazole, benzothiophene, dibenzothiophene, thienothiophene, benzofuran, phenanthroline, thiazole, isoxazole, oxadiazole, thiadiazole, phenothiazine, dibenzosilole, dibenzofuran, etc., without limitation.

[0039] In the present disclosure, the silyl group may include alkyl silyl and aryl silyl. Examples of the silyl group may include trimethylsilyl, triethylsilyl, t-butyl dimethylsilyl, vinyl dimethylsilyl, propyl dimethylsilyl, triphenylsilyl, diphenylsilyl, phenylsilyl, etc., without limitation.

[0040] In the present disclosure, the boron group may include alkyl boron and aryl boron. Examples of the boron group may include trimethyl boron, triethyl boron, t-butyl dimethyl boron, triphenyl boron, diphenyl boron, phenyl boron, etc., without limitation.

[0041] In the present disclosure, the alkenyl group may be linear or branched. The carbon number is not specifically limited, and may be 2 to 30, 2 to 20, or 2 to 10. Examples of the alkenyl group may include vinyl, 1-butenyl, 1-pentenyl, 1,3-butadienyl aryl, styrenyl, styrylvinyl, etc., without limitation.

[0042] The above explanation on the aryl group may be applied to the arylene group, except that the arylene group is divalent.

[0043] The above explanation on the heteroaryl group may be applied to the heteroarylene group, except that the heteroarylene group is divalent.


[0044] The monoamine compound according to an embodiment of the inventive concept is represented by the following Formula 1.

[Formula 1]

5

10

15

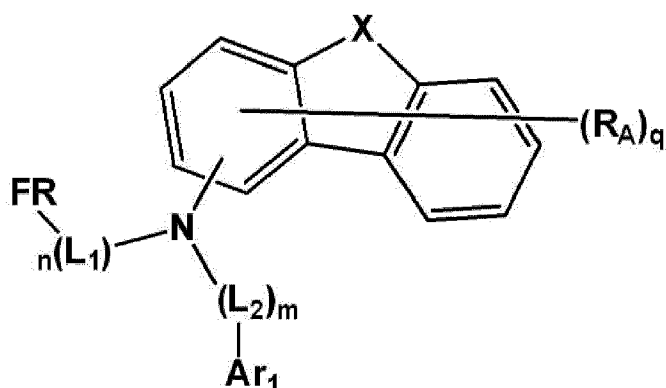

20

25

[0045] In Formula 1, X is S, O or CRR', R and R' are each independently a substituted or unsubstituted alkyl group having 1 to 10 carbon atoms, a substituted or unsubstituted aryl group having 6 to 20 carbon atoms for forming a ring, or a substituted or unsubstituted heteroaryl group having 2 to 10 carbon atoms for forming a ring, or form a ring by combining adjacent groups with each other, L₁ and L₂ are each independently a direct linkage, a substituted or unsubstituted arylene group having 6 to 12 carbon atoms for forming a ring, or a substituted or unsubstituted heteroarylene group having 2 to 12 carbon atoms for forming a ring, n and m are each independently an integer of 0 to 2, R_A is a hydrogen atom, a substituted or unsubstituted alkyl group having 1 to 10 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms for forming a ring, or a substituted or unsubstituted heteroaryl group having 2 to 30 carbon atoms for forming a ring, q is an integer of 0 to 7, Ar₁ is a substituted or unsubstituted aryl group having 6 to 12 carbon atoms for forming a ring, or a substituted or unsubstituted heteroaryl group having 2 to 12 carbon atoms for forming a ring, and in case X is CRR', Ar₁ does not include a heteroaryl group.

30

[0046] When Ar₁ is referred to as not including a heteroaryl group, it may include both of the case where Ar₁ is not a heteroaryl group and the case where Ar₁ is not substituted with a heteroaryl group.

[0047] In Formula 1, when n is 2, two L₁'s may be the same or different from each other, and when m is 2, two L₂'s may be the same or different from each other.

[0048] In Formula 1, when q is an integer of 2 or more, a plurality of R_A may be the same or different from each other, and when q is 1, R_A may not be a hydrogen atom.


35

[0049] In Formula 1, FR is a naphthylene group substituted with one phenyl group. Although FR may be additionally substituted, the additional substituents do not include a phenyl group. Specifically, FR is represented by the following Formula 2.

[Formula 2]

40

45

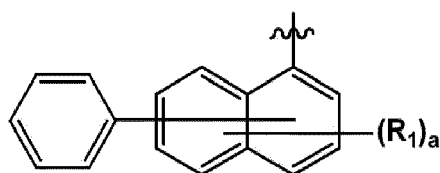

[0050] In Formula 2, R₁ is a hydrogen atom, a deuterium atom, or a halogen atom, and a is an integer of 0 to 6. When a is an integer of 2 or more, a plurality of R₁ may be the same or different from each other. When a is 1, R₁ may not be a hydrogen atom.

50

[0051] The compound of Formula 1, where FR is represented by Formula 2, may be advantageously applied to an organic electroluminescence device to improve efficiency of the device.


[0052] For example, FR may be represented by the following Formula 2-1.

55

[Formula 2-1]

5

10

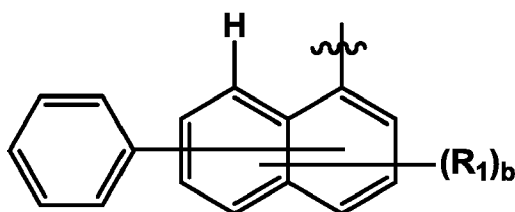


[0053] In Formula 2-1, b is an integer of 0 to 5, and R_1 is the same as defined above.

[0054] R_1 may be represented by any one of the following formulae, for example.


15

20

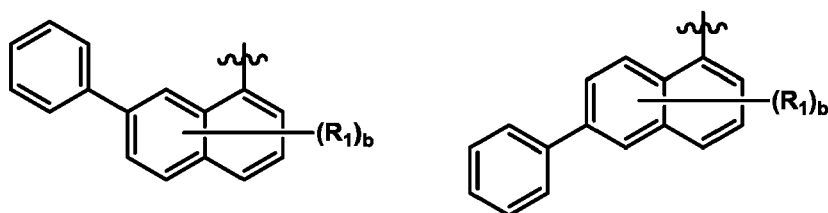


25

30

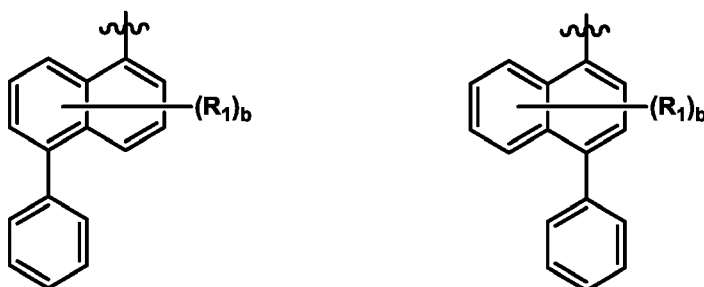

35

40

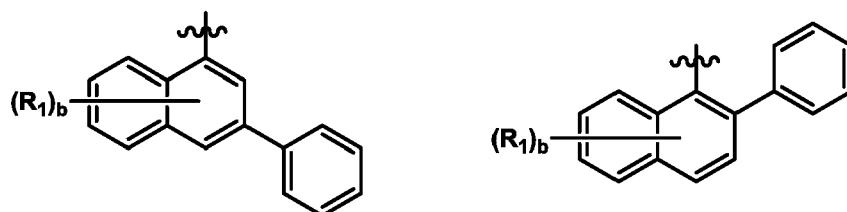

[0055] In Formula 2-1, R_1 may be a hydrogen atom or a deuterium atom. However, an embodiment of the inventive concept is not limited thereto.

45

[0056] In Formula 2, a may be 0. However, an embodiment of the inventive concept is not limited thereto. For example, a may be 1, and R_1 may be a fluorine atom. In another example, a may be an integer of 2 or more, and a plurality of R_1 may be each independently a deuterium atom.

50

[0057] In Formula 1, R and R' may each independently be a substituted or unsubstituted alkyl group having 1 to 5 carbon atoms, a substituted or unsubstituted aryl group having 6 to 12 carbon atoms for forming a ring, or a substituted or unsubstituted heteroaryl group having 2 to 10 carbon atoms for forming a ring, or form a ring by combining adjacent groups with each other. For example, in Formula 1, R and R' may each independently be a substituted or unsubstituted alkyl group having 1 to 5 carbon atoms, a substituted or unsubstituted aryl group having 6 to 12 carbon atoms for forming a ring, or form a ring by combining adjacent groups with each other. For example, in Formula 1, R and R' may each independently be a substituted or unsubstituted alkyl group having 1 to 5 carbon atoms, or a substituted or unsubstituted aryl group having 6 to 12 carbon atoms for forming a ring.

55

[0058] In Formula 1, L_1 and L_2 may be a substituted or unsubstituted arylene group having 6 to 12 carbon atoms for forming a ring.

[0059] In Formula 1, n may be 1 or 2. For example, in Formula 1, n may be 1. In Formula 1, n may be 1, and L_1 may be a substituted or unsubstituted arylene group having 6 to 12 carbon atoms for forming a ring. For example, L_1 may


be a substituted or unsubstituted phenylene group. However, an embodiment of the inventive concept is not limited thereto.

[0060] In Formula 1, when L_1 is a substituted or unsubstituted phenylene group, FR may be substituted at a para position against the nitrogen atom.

[0061] In Formula 1, R_A may be a hydrogen atom, a substituted or unsubstituted alkyl group having 1 to 5 carbon atoms, a substituted or unsubstituted aryl group having 6 to 15 carbon atoms for forming a ring, or a substituted or unsubstituted heteroaryl group having 2 to 15 carbon atoms for forming a ring. For example, in Formula 1, R_A may be a substituted or unsubstituted aryl group having 6 to 15 carbon atoms for forming a ring. For example, in Formula 1, R_A may be a substituted or unsubstituted phenyl group.

[0062] Formula 1 may be represented by the following Formula 1-1.

[Formula 1-1]

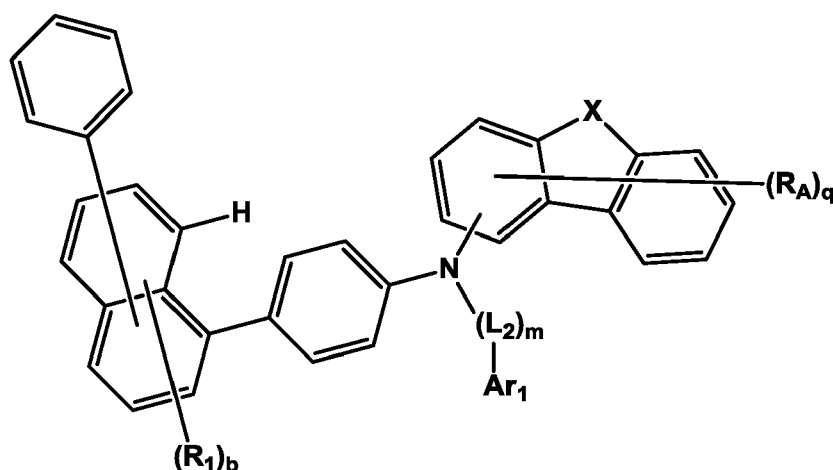

[0063] In Formula 1-1, X, L_2 , Ar_1 , R_A , R_1 , q, m, and b are the same as defined above.

[0064] In Formula 1, Ar_1 may be a substituted or unsubstituted aryl group having 6 to 12 carbon atoms for forming a ring, or a substituted or unsubstituted heteroaryl group having 5 to 12 carbon atoms for forming a ring.

[0065] In Formula 1, Ar_1 may be a substituted or unsubstituted phenyl group, a substituted or unsubstituted biphenyl group, or a substituted or unsubstituted naphthyl group.

[0066] In Formula 1, when Ar_1 is a substituted or unsubstituted aryl group having 6 to 12 carbon atoms for forming a ring, m may be 1, and L_2 may be a substituted or unsubstituted arylene group having 6 to 12 carbon atoms for forming a ring. For example, Ar_1 may be a substituted or unsubstituted phenyl group, a substituted or unsubstituted biphenyl group, or a substituted or unsubstituted naphthyl group, and L_2 may be a substituted or unsubstituted phenylene group.

However, an embodiment of the inventive concept is not limited thereto.

[0067] In Formula 1, when Ar_1 is a substituted or unsubstituted heteroaryl group having 5 to 12 carbon atoms for forming a ring, m may be 0. That is, when Ar_1 is a heteroaryl group, Ar_1 may be directly connected to the nitrogen atom in Formula 1. For example, m may be 0, and Ar_1 may be a substituted or unsubstituted dibenzofuran group, or a substituted or unsubstituted dibenzothiophene group. However, an embodiment of the inventive concept is not limited thereto.


[0068] In Formula 1, q may be 0. However, an embodiment of the inventive concept is not limited thereto. For example, q may be 1, and R_A may be a substituted or unsubstituted aryl group having 6 to 15 carbon atoms for forming a ring. In another example, q may be 1, and R_A may be a substituted or unsubstituted phenyl group.

[0069] In Formula 1, when X is CRR', R and R' may be each independently a substituted or unsubstituted phenyl group, or a substituted or unsubstituted alkyl group having 1 to 5 carbon atoms. For example, R and R' may be each independently a substituted or unsubstituted phenyl group, or a substituted or unsubstituted methyl group. Furthermore, R and R' may be the same each other. However, an embodiment of the inventive concept is not limited thereto.

[0070] The monoamine compound represented by Formula 1 according to an embodiment of the inventive concept may be any one selected from the group consisting of compounds represented in the following Compound Group 1. However, an embodiment of the inventive concept is not limited thereto.

[Compound Group 1]

5

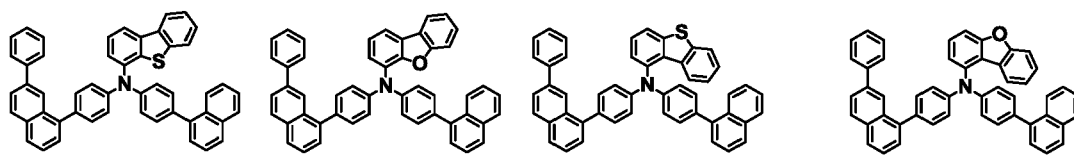


1

2

3

4

10

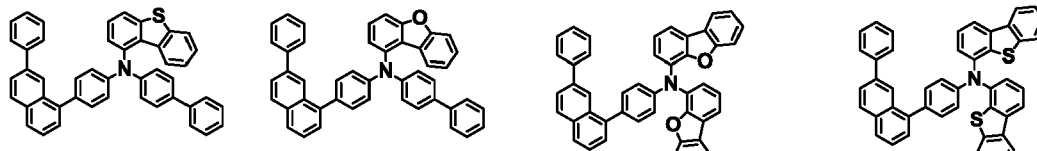

5


6

7

8

15

20

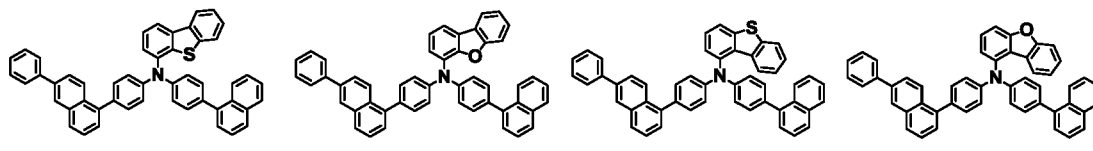

9


10

11

12

25

30

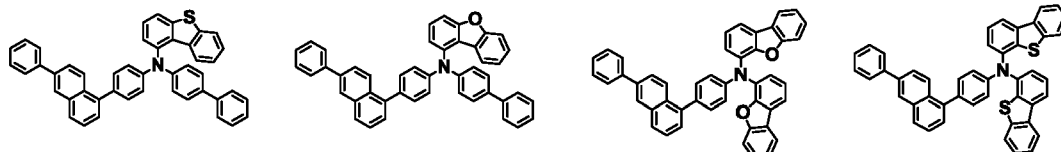

13


14

15

16

35

40

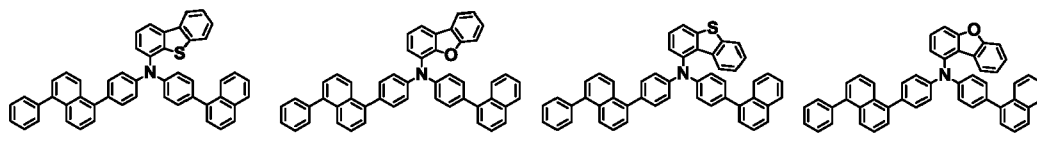

17


18

19

20

45

50

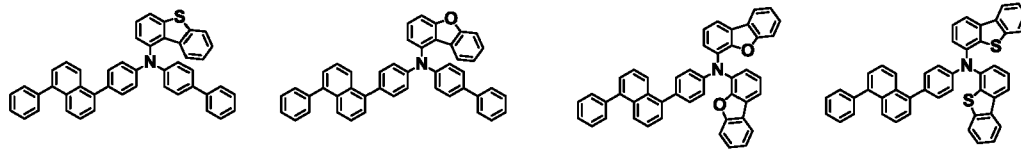

21





22

23





24

55





5







10



15







25







30

35



40


45




50

55


5




49



50




51




52


10




53



54




55




56

15


20




57



58




59




60

25


30




61



62




63




64

35


40




65



66




67




68

45


50




69



70




71




72


55

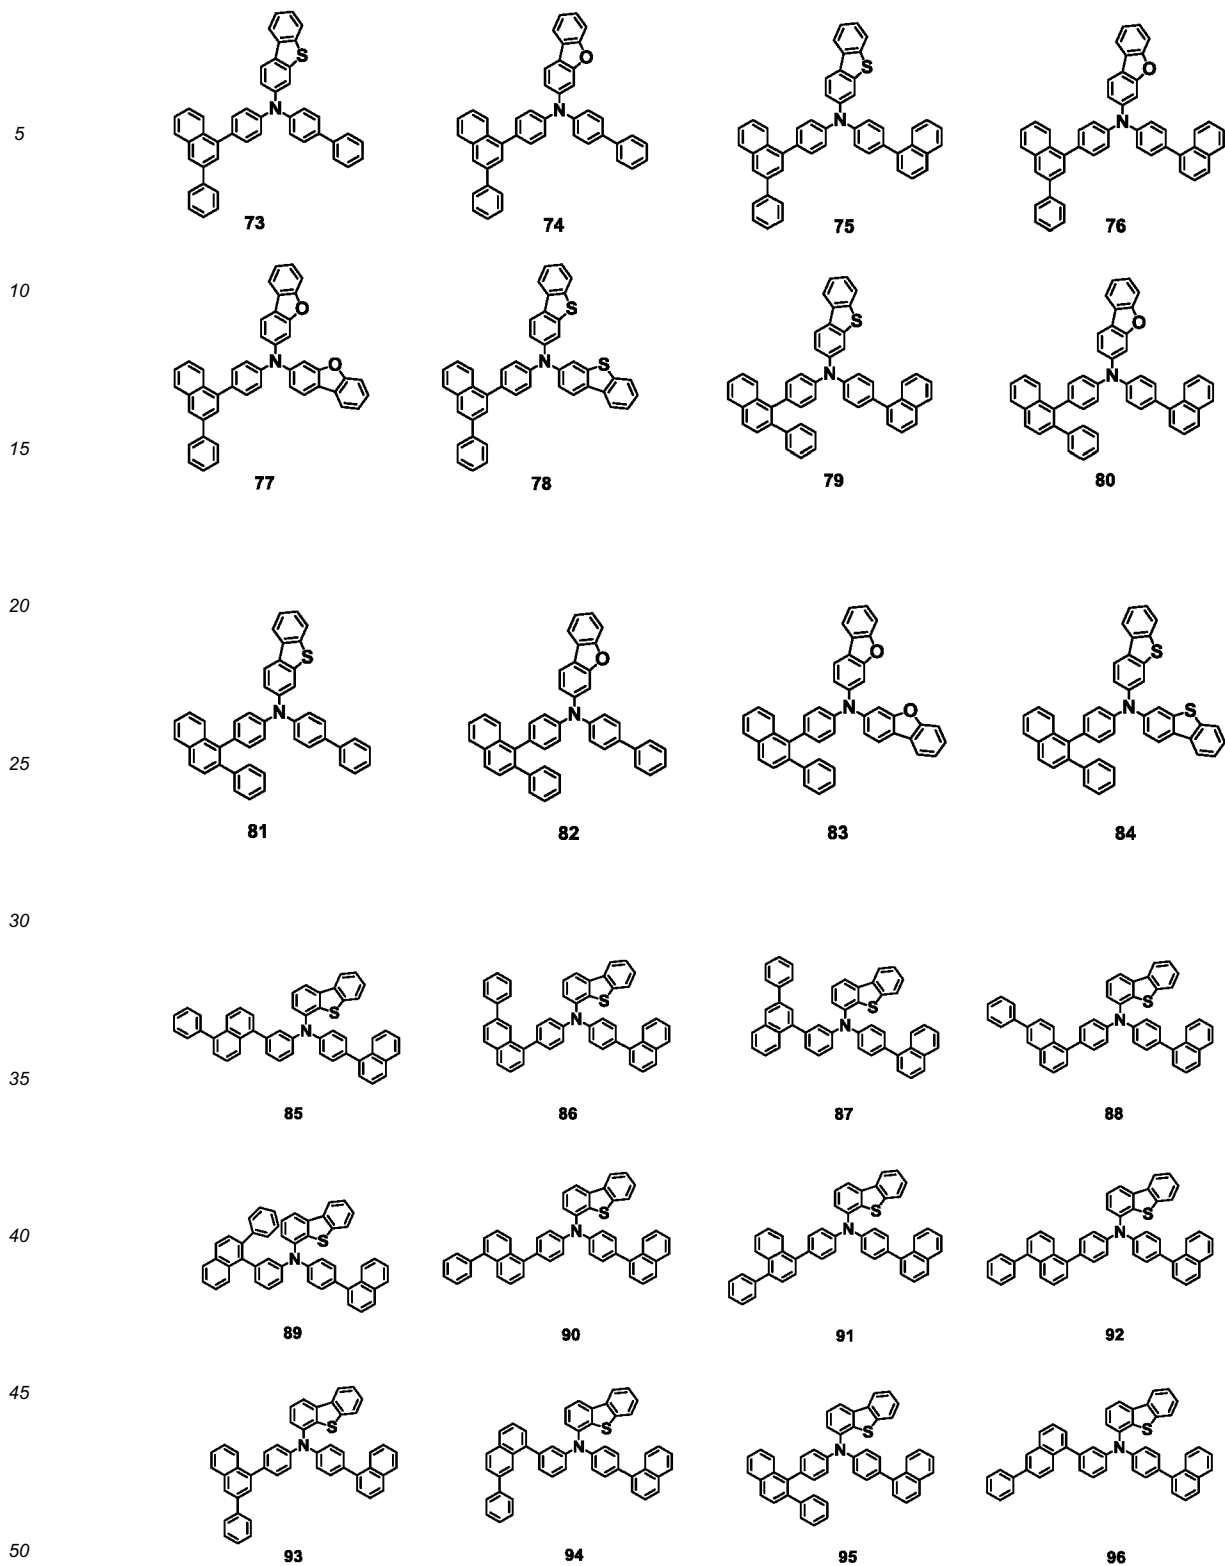


5




97



98




99




100


10




101



102




103




104


15




105



106

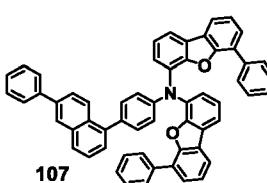


107

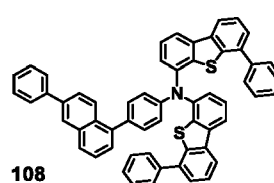


108


25




109



110




111




112


35

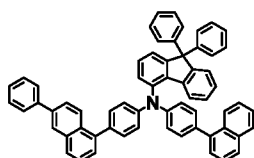


113

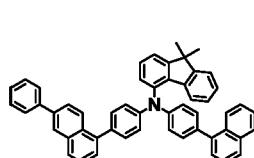

114




115




116


45

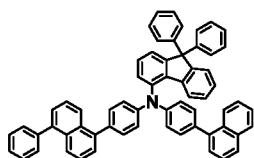


117

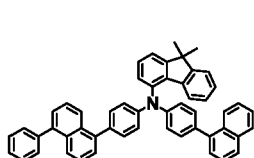

118




119




120

55


5




121

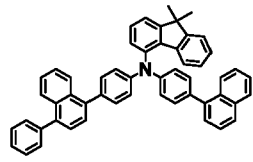

122




123




124


10




125



126




127




128


20




129



130




131




132


35




133



134



135




136

45


50

55


5




137



138




139




140


10




141



142




143




144

15


20




145



146




147




148

25


30




149



150




151




152

35


40




153



154




155




156

45


50




157



158




159




160

55


5




161



162




163




164


10




165



166




167




168

15


20




169



170




171




172


25




173



174




175




176

35


40




177



178




179




180

45


50




181



182




183



184

55

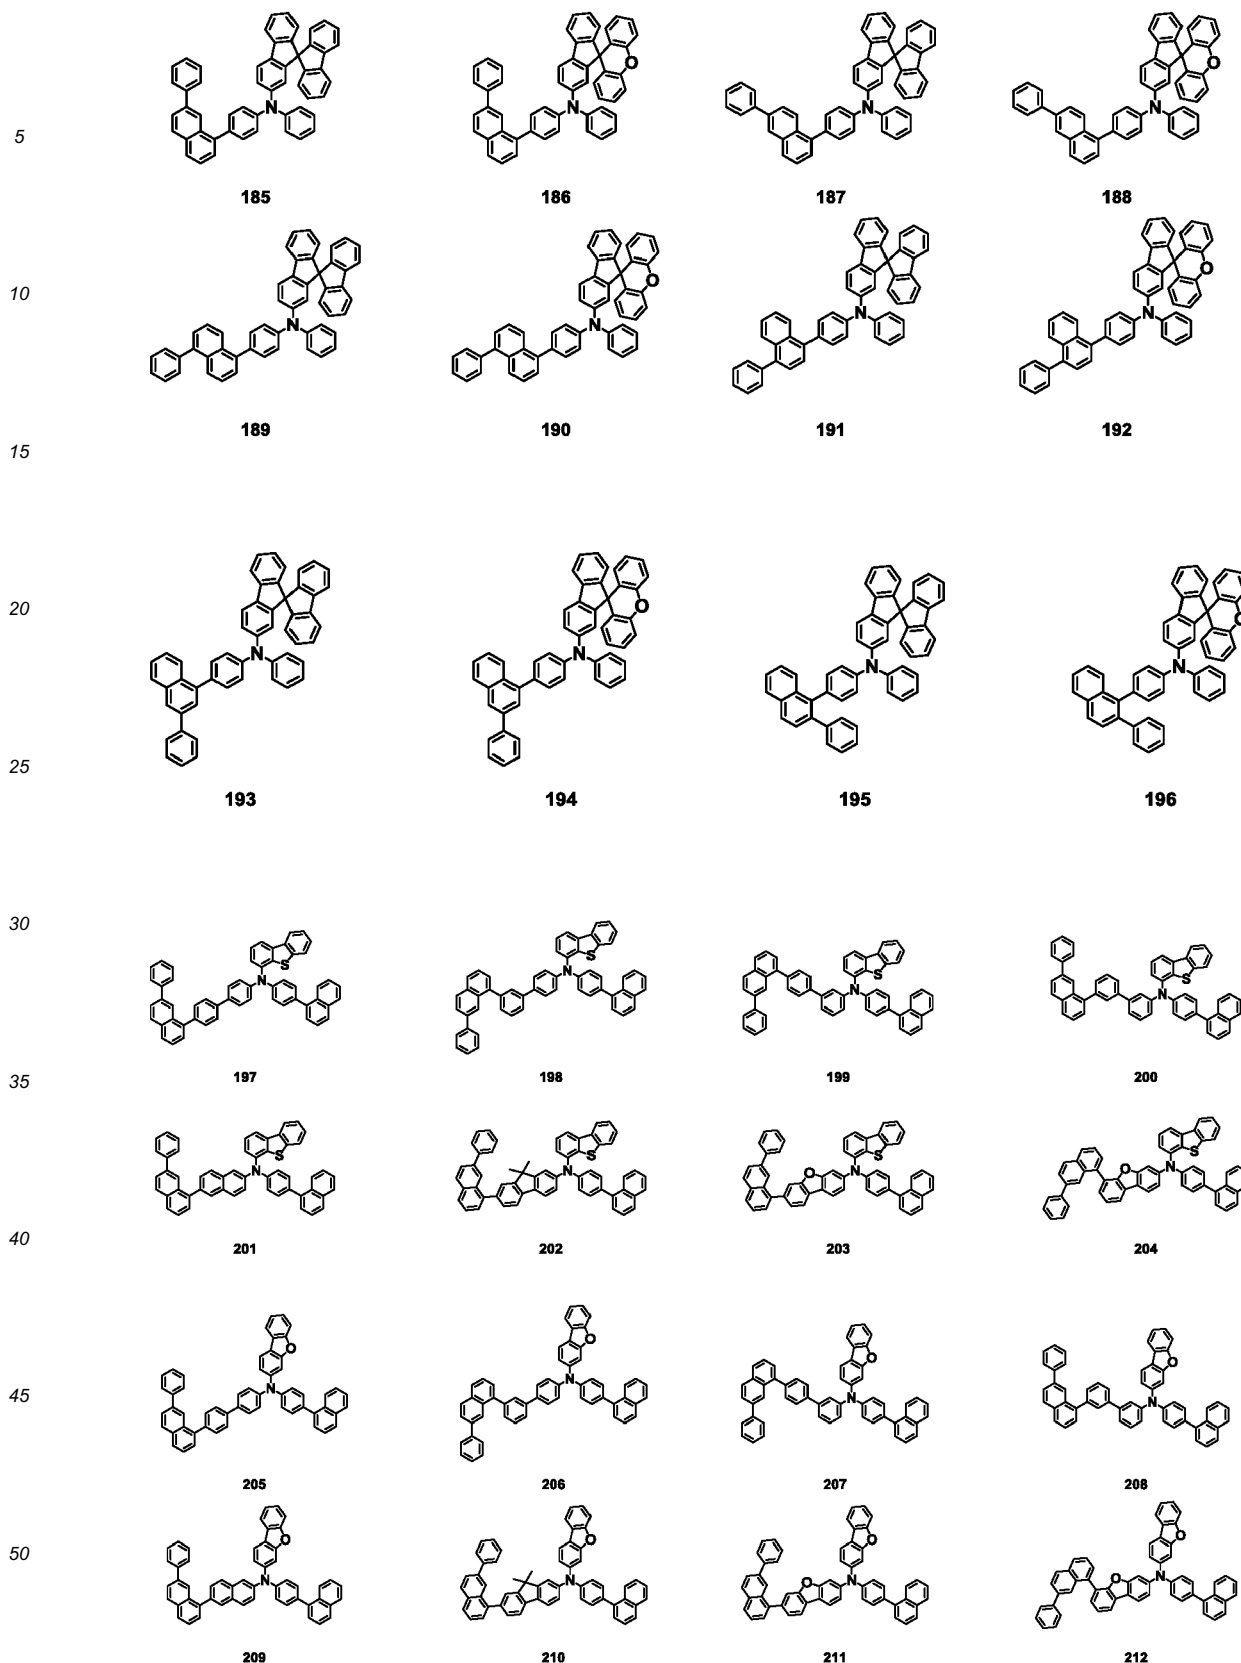

55 **[0071]** The monoamine compound according to an embodiment of the inventive concept includes a fused ring and a phenyl-naphthyl group with a high thermal resistance and electric charge resistance, and therefore, it may be used as a material for an organic electroluminescence device to contribute to extending a device life. When used as a material for an organic electroluminescence device, the monoamine compound may also enhance the quality of layers due to the

bulky phenyl-naphthyl group which decreases symmetry of molecule and inhibits crystallization, thereby contributing to securing high efficiency.

[0072] Hereinafter, an organic electroluminescence device according to an embodiment of the invention will be explained again, referring to FIGS. 1 to 3. The organic electroluminescence device according to an embodiment of the inventive concept includes the monoamine compound according to an embodiment of the inventive concept. More specifically, the hole transport region HTR includes the monoamine compound represented by Formula 1.

[0073] The following explanation will be mainly given with features different from the monoamine compound according to an embodiment of the inventive concept, and unexplained parts will follow the above description on the monoamine compound according to an embodiment of the inventive concept.

[0074] The first electrode EL1 has conductivity. The first electrode EL1 may be a pixel electrode or an anode. The first electrode EL1 may be a transmissive electrode, a transfective electrode, or a reflective electrode. In case the first electrode EL1 is the transmissive electrode, the first electrode EL1 may include a transparent metal oxide such as indium tin oxide (ITO), indium zinc oxide (IZO), zinc oxide (ZnO), or indium tin zinc oxide (ITZO). In case the first electrode EL1 is the transfective electrode or reflective electrode, the first electrode EL1 may include Ag, Mg, Cu, Al, Pt, Pd, Au, Ni, Nd, Ir, Cr, Li, Ca, LiF/Ca, LiF/Al, Mo, Ti, a compound thereof, or a mixture thereof (for example, a mixture of Ag and Mg). Also, the first electrode EL1 may have a structure including a plurality of layers including a reflective layer or transfective layer formed using the above materials, and a transparent conductive layer formed using ITO, IZO, ZnO, or ITZO. For example, the first electrode EL1 may have a triple-layer structure of ITO/Ag/ITO. However, an embodiment of the inventive concept is not limited thereto.

[0075] The thickness of the first electrode EL1 may be from about 1,000 Å to about 10,000 Å, for example, from about 1,000 Å to about 3,000 Å.

[0076] The hole transport region HTR is disposed on the first electrode EL1. The hole transport region HTR may include at least one of a hole injection layer HIL, a hole transport layer HTL, a hole buffer layer, or an electron blocking layer EBL.

[0077] The hole transport region HTR includes the monoamine compound according to an embodiment of the inventive concept, as described above.

[0078] The hole transport region HTR may have a single layer formed using a single material, a single layer formed using a plurality of different materials, or a multilayer structure including a plurality of layers formed using a plurality of different materials.

[0079] For example, the hole transport region HTR may have a single layer structure of a hole injection layer HIL or a hole transport layer HTL, or may have a single layer structure formed using a hole injection material and a hole transport material. In addition, the hole transport region HTR may have a single layer structure formed using a plurality of different materials, or a laminated structure of hole injection layer HIL/hole transport layer HTL, hole injection layer HIL/hole transport layer HTL/hole buffer layer, hole injection layer HIL/hole buffer layer, hole transport layer HTL/hole buffer layer, or hole injection layer HIL/hole transport layer HTL/electron blocking layer EBL, laminated in order from the first electrode EL1, without limitation.

[0080] As described above, the hole transport region HTR may have a multilayer structure having a plurality of layers, and a layer of the plurality of layers contacting with the emission layer EML may include the monoamine compound represented by Formula 1. For example, the hole transport region HTR may include a hole injection layer HIL disposed on the first electrode EL1, a hole transport layer HTL disposed on the hole injection layer HIL, and an electron blocking layer EBL disposed on the hole transport layer HTL, and the electron blocking layer EBL may include the monoamine compound represented by Formula 1. However, an embodiment of the inventive concept is not limited thereto. In another example, the hole transport region HTR may include a hole injection layer HIL and a hole transport layer HTL, and the hole transport layer HTL may include the monoamine compound represented by Formula 1.

[0081] The hole transport region HTR may include one or more of the monoamine compound represented by Formula 1. For example, the hole transport region HTR may include at least one selected from the group consisting of compounds represented in the above-described Compound Group 1.

[0082] The hole transport region HTR may be formed using various methods such as a vacuum deposition method, a spin coating method, a cast method, a Langmuir-Blodgett (LB) method, an inkjet printing method, a laser printing method, and a laser induced thermal imaging (LITI) method.

[0083] The hole injection layer HIL may include, for example, a phthalocyanine compound such as copper phthalocyanine; N,N'-diphenyl-N,N'-bis-[4-(phenyl-m-tolyl-amino)-phenyl]-biphenyl-4,4'-diamine (DNTPD), 4,4',4"-tris(3-methylphenylphenylamino)triphenylamine (m-MTDATA), 4,4',4"-tris(N,N-diphenylamino)triphenylamine (TDATA), 4,4',4"-tris{N-(2-naphthyl)-N-phenylamino}-triphenylamine (2-TNATA), poly(3,4-ethylenedioxythiophene)/poly(4-styrenesulfonate) (PEDOT/PSS), polyaniline/dodecylbenzenesulfonic acid (PANI/DBSA), polyaniline/camphor sulfonic acid (PANI/CSA), polyaniline/poly(4-styrenesulfonate) (PANI/PSS), N,N'-di(naphthalen-1-yl)-N,N'-diphenyl-benzidine (NPD), triphenylamine-containing polyether ketone (TPAPEK), 4-isopropyl-4'-methyl-diphenyliodonium tetrakis(pentafluorophenyl)borate, dipyrzino[2,3-f:2',3'-h] quinoxaline-2,3,6,7,10,11-hexacarbonitrile (HAT-CN), etc.

5 **[0084]** The hole transport layer HTL may include, for example, carbazole derivatives such as N-phenyl carbazole, polyvinyl carbazole, fluorene-based derivatives, N,N'-bis(3-methylphenyl)-N,N'-diphenyl-[1,1-biphenyl]-4,4'-diamine (TPD), triphenylamine-based derivatives such as 4,4',4''-tris(N-carbazolyl)triphenylamine (TCTA), N,N'-di(naphthalen-1-yl)-N,N'-diphenyl-benzidine (NPD), 4,4'-cyclohexylidene bis[N,N-bis(4-methylphenyl)benzenamine] (TAPC), 4,4'-bis[N,N'-(3-tolyl)amino]-3,3'-dimethylbiphenyl (HMTPD), etc.

10 **[0085]** The electron blocking layer EBL may include the monoamine compound represented by Formula 1, as described above. However, an embodiment of the inventive concept is not limited thereto. The electron blocking layer EBL may include a known material in the art. The electron blocking layer EBL may include, for example, carbazole derivatives such as N-phenyl carbazole, polyvinyl carbazole, fluorene-based derivatives, N,N'-bis(3-methylphenyl)-N,N'-diphenyl-[1,1-biphenyl]-4,4'-diamine (TPD), triphenylamine-based derivatives such as 4,4',4''-tris(N-carbazolyl)triphenylamine (TCTA), N,N'-di(naphthalen-1-yl)-N,N'-diphenyl-benzidine (NPD), 4,4'-cyclohexylidene bis[N,N-bis(4-methylphenyl)benzenamine] (TAPC), 4,4'-bis[N,N'-(3-tolyl)amino]-3,3'-dimethylbiphenyl (HMTPD) or mCP, etc.

15 **[0086]** The thickness of the hole transport region HTR may be from about 100 Å to about 10,000 Å, for example, from about 100 Å to about 5,000 Å, about 100 Å to about 3000 Å, or about 100 Å to about 2,000 Å. The thickness of the hole injection layer HIL may be, for example, from about 30 Å to about 1,000 Å, about 30 Å to about 500 Å or about 30 Å to about 200 Å, and the thickness of the hole transport layer HTL may be from about 30 Å to about 1,500 Å or about 30 Å to about 1,000 Å. For example, the thickness of the electron blocking layer EBL may be from about 10 Å to about 1,000 Å, about 10 Å to about 500 Å or about 10 Å to about 200 Å. In case the thicknesses of the hole transport region HTR, the hole injection layer HIL, the hole transport layer HTL and the electron blocking layer EBL satisfy the above-described ranges, satisfactory hole transport properties may be obtained without substantial increase of a driving voltage.


20 **[0087]** The hole transport region HTR may further include a charge generating material in addition to the above-described materials to improve conductivity. The charge generating material may be dispersed in the hole transport region HTR uniformly or non-uniformly. The charge generating material may be, for example, a p-dopant. The p-dopant may be one of quinone derivatives, metal oxides, or cyano group-containing compounds, without limitation. For example, non-limiting examples of the p-dopant may include quinone derivatives such as tetracyanoquinodimethane (TCNQ), and 2,3,5,6-tetrafluoro-tetracyanoquinodimethane (F4-TCNQ), metal oxides such as tungsten oxide and molybdenum oxide, without limitation.

25 **[0088]** As described above, the hole transport region HTR may further include at least one of a hole buffer layer or an electron blocking layer EBL. The hole buffer layer may compensate an optical resonance distance according to the wavelength of light emitted from the emission layer EML and increase light emission efficiency. Materials included in the hole transport region HTR may be used as materials included in the hole buffer layer. The electron blocking layer EBL is a layer preventing electron injection from the electron transport region ETR into the hole transport region HTR.

30 **[0089]** The emission layer EML is disposed on the hole transport region HTR. The thickness of the emission layer EML may be, for example, from about 100 Å to about 1,000 Å, about 100 Å to about 800 Å, about 100 Å to about 600 Å or about 200 Å to about 400 Å. The emission layer EML may have a single layer formed using a single material, a single layer formed using a plurality of different materials, or a multilayer structure having a plurality of layers formed using a plurality of different materials.

35 **[0090]** A known emission material in the art may be used as a material for the emission layer EML. The material for the emission layer EML is not specifically limited, and may be selected from fluoranthene derivatives, pyrene derivatives, arylacetylene derivatives, anthracene derivatives, fluorene derivatives, perylene derivatives, chrysene derivatives, or the like, and preferably, from pyrene derivatives, perylene derivatives, or anthracene derivatives. For example, as the host material of the emission layer EML, anthracene derivatives represented by the following Formula 3 may be used.

45 [Formula 3]

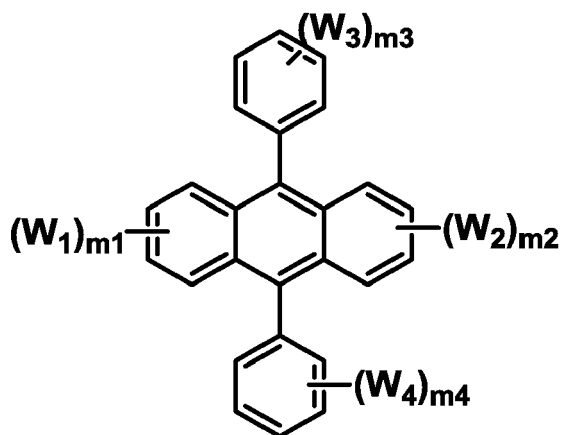


20 [0091] In Formula 3, W_1 to W_4 are each independently a hydrogen atom, a deuterium atom, a halogen atom, a substituted or unsubstituted silyl group, a substituted or unsubstituted alkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms for forming a ring, or a substituted or unsubstituted heteroaryl group having 2 to 30 carbon atoms for forming a ring, or may form a ring by combining adjacent groups with each other, m_1 and m_2 are each independently an integer of 0 to 4, and m_3 and m_4 are each independently an integer of 0 to 5.

25 [0092] When m_1 is 1, W_1 may not be a hydrogen atom. When m_2 is 1, W_2 may not be a hydrogen atom. When m_3 is 1, W_3 may not be a hydrogen atom. When m_4 is 1, W_4 may not be a hydrogen atom.

30 [0093] When m_1 is an integer of 2 or more, a plurality of W_1 may be the same or different from each other. When m_2 is an integer of 2 or more, a plurality of W_2 may be the same or different from each other. When m_3 is an integer of 2 or more, a plurality of W_3 may be the same or different from each other. When m_4 is an integer of 2 or more, a plurality of W_4 may be the same or different from each other.

35 [0094] The compound represented by Formula 3 may include the compounds represented by the following structures. However, examples of the compound represented by Formula 3 are not limited thereto.

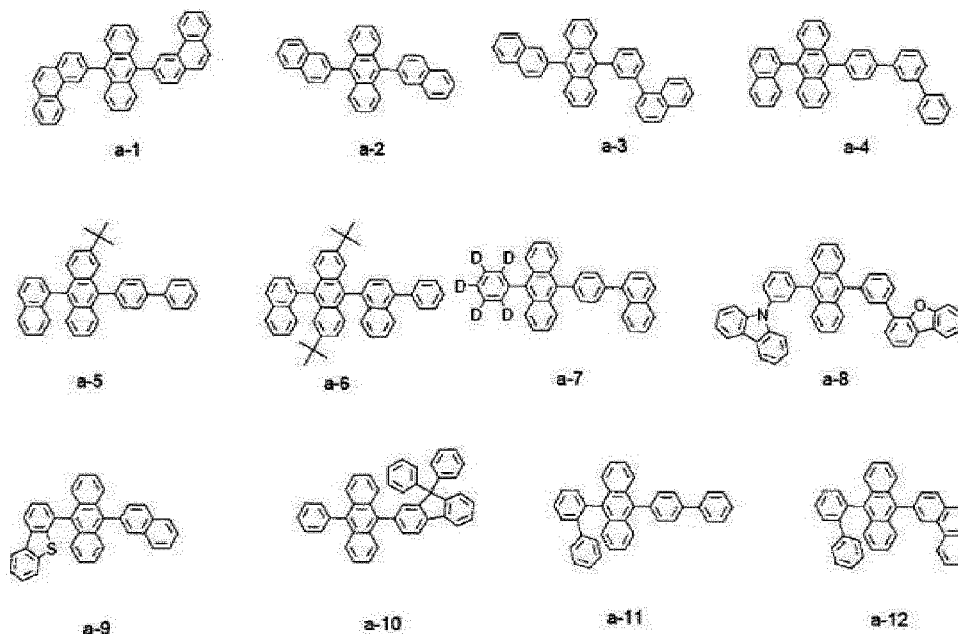

55 [0095] The emission layer EML may include a fluorescent material including any one selected from the group consisting of spiro-DPVBi, 2,2',7,7'-tetrakis(biphenyl-4-yl)-9,9'-spirobifluorene (spiro-sexiphenyl) (spiro-6P), distyryl-benzene (DSB), distyryl-arylene (DSA), polyfluorene (PFO)-based polymer and poly(p-phenylene vinylene) (PPV)-based polymer, for example.

[0096] The emission layer EML may further include a dopant, and the dopant may be a known material in the art. For example, styryl derivatives (for example, 1,4-bis[2-(3-N-ethylcarbazolyl)vinyl]benzene (BCzVB), 4-(di-p-tolylamino)-

4'-[(dip-tolylamino)styryl]stilbene (DPAVB), N-(4-((E)-2-(6-((E)-4-(diphenylamino)styryl)naphthalen-2-yl)vinyl)phenyl)-N-phenylbenzenamine (N-BDAVBi)), perylene and the derivatives thereof (for example, 2,5,8,11-tetra-*t*-butylperylene (TBPe)), pyrene and the derivatives thereof (for example, 1,1-dipyrene, 1,4-dipyrenylbenzene, 1,4-bis(N,N-diphenylamino)pyrene, 1,6-bis(N,N-diphenylamino)pyrene), 2,5,8,11-tetra-*t*-butylperylene (TBP), 1,3,5-tris(N-phenylbenzimidazole-2-yl)benzene (TPBi), etc. may be used as a dopant.

[0097] The emission layer EML may include, for example, tris(8-hydroxyquinolino)aluminium (Alq₃), 4,4'-bis(N-carbazolyl)-1,1'-biphenyl (CBP), poly(N-vinylcarbazole) (PVK), 9,10-di(naphthalen-2-yl)anthracene (ADN), 4,4',4"-tris(carbazol-9-yl)-triphenylamine (TCTA), 1,3,5-tris(N-phenylbenzimidazol-2-yl)benzene (TPBi), 3-*tert*-butyl-9,10-di(naphthalen-2-yl)anthracene (TBADN), distyrylarylene (DSA), 4,4'-bis(9-carbazolyl)-2,2'-dimethyl-biphenyl (CDBP), 2-methyl-9,10-bis(naphthalen-2-yl)anthracene (MADN), bis[2-(diphenylphosphino)phenyl] ether oxide (DPEPO), hexaphenyl cyclotriphosphazene (CP1), 1,4-bis(triphenylsilyl)benzene (UGH2), hexaphenylcyclotrisiloxane (DPSiO₃), octaphenylcyclotetrasiloxane (DPSiO₄), 2,8-bis(diphenylphosphoryl)dibenzofuran (PPF), etc.

[0098] The electron transport region ETR is provided on the emission layer EML. The electron transport region ETR may include at least one of a hole blocking layer HBL, an electron transport layer ETL or an electron injection layer EIL, without limitation.

[0099] The electron transport region ETR may have a single layer formed using a single material, a single layer formed using a plurality of different materials, or a multilayer structure having a plurality of layers formed using a plurality of different materials.

[0100] For example, the electron transport region ETR may have a single layer structure of an electron injection layer EIL or an electron transport layer ETL, or a single layer structure formed using an electron injection material and an electron transport material. In addition, the electron transport region ETR may have a single layer structure having a plurality of different materials, or a laminated structure of electron transport layer ETL/electron injection layer EIL, or hole blocking layer HBL/electron transport layer ETL/electron injection layer EIL, laminated in order from the emission layer EML, without limitation. The thickness of the electron transport region ETR may be, for example, from about 100 Å to about 1,500 Å.

[0101] The electron transport region ETR may be formed using various methods such as a vacuum deposition method, a spin coating method, a cast method, a Langmuir-Blodgett (LB) method, an inkjet printing method, a laser printing method, and a laser induced thermal imaging (LITI) method.

[0102] In case the electron transport region ETR includes the electron transport layer ETL, the electron transport region ETR may include tris(8-hydroxyquinolinato)aluminium (Alq₃), 1,3,5-tri[(3-pyridyl)-phen-3-yl]benzene, 2,4,6-tris(3'-(pyridin-3-yl)biphenyl-3-yl)-1,3,5-triazine, bis[2-(diphenylphosphino)phenyl] ether oxide (DPEPO), 2-(4-(N-phenylbenzoimidazolyl-1-yl)phenyl)-9,10-dinaphthylanthracene, 1,3,5-tri(1-phenyl-1H-benzo[d]imidazol-2-yl)phenyl (TPBi), 2,9-dimethyl-4,7-diphenyl-1,10-phenanthroline (BCP), 4,7-diphenyl-1,10-phenanthroline (Bphen), 3-(4-biphenyl)-4-phenyl-5-*tert*-butylphenyl-1,2,4-triazole (TAZ), 4-(naphthalen-1-yl)-3,5-diphenyl-4H-1,2,4-triazole (NTAZ), 2-(4-biphenyl)-5-(4-*tert*-butylphenyl)-1,3,4-oxadiazole (tBu-PBD), bis(2-methyl-8-quinolinolato-N1,O8)-(1,1'-Biphenyl-4-olato)aluminium (BALq), berylliumbis (benzoquinolin-10-olate) (Bebq₂), 9,10-di(naphthalen-2-yl)anthracene (ADN) and a mixture thereof, without limitation. The thickness of the electron transport layer ETL may be from about 100 Å to about 1,000 Å, for example, from about 150 Å to about 500 Å or about 150 Å to about 250 Å. If the thickness of the electron transport layer ETL satisfies the above-described range, satisfactory electron transport properties may be obtained without substantial increase of a driving voltage.

[0103] When the electron transport region ETR includes the electron injection layer EIL, the electron transport region ETR may use LiF, lithium quinolate (LIQ), Li₂O, BaO, NaCl, CsF, a lanthanide metal such as Yb, or a metal halide such as RbCl and RbI, without limitation. The electron injection layer EIL also may be formed using a mixture material of an electron transport material and an insulating organometallic salt. The organometallic salt may be a material having an energy band gap of about 4 eV or more. Particularly, the organometallic salt may include, for example, a metal acetate, a metal benzoate, a metal acetoacetate, a metal acetylacetonate, or a metal stearate. The thickness of the electron injection layer EIL may be from about 1 Å to about 100 Å, for example, from about 3 Å to about 90 Å or about 3 Å to about 20 Å. In case the thickness of the electron injection layer EIL satisfies the above described range, satisfactory electron injection properties may be obtained without inducing the substantial increase of a driving voltage.

[0104] The electron transport region ETR may include a hole blocking layer HBL, as described above. The hole blocking layer HBL may include, for example, 2,9-dimethyl-4,7-diphenyl-1,10-phenanthroline (BCP), 4,7-diphenyl-1,10-phenanthroline (Bphen), or bis[2-(diphenylphosphino)phenyl]ether oxide (DPEPO), without limitation.

[0105] The second electrode EL2 is disposed on the electron transport region ETR. The second electrode EL2 may be a common electrode or a cathode. The second electrode EL2 may be a transmissive electrode, a transfective electrode or a reflective electrode. In case the second electrode EL2 is the transmissive electrode, the second electrode EL2 may be formed using transparent metal oxides, for example, ITO, IZO, ZnO, ITZO, etc.

[0106] In case the second electrode EL2 is the transfective electrode or the reflective electrode, the second electrode EL2 may include Ag, Mg, Cu, Al, Pt, Pd, Au, Ni, Nd, Ir, Cr, Li, Ca, LiF/Ca, LiF/Al, Mo, Ti, a compound thereof, or a mixture

thereof (for example, a mixture of Ag and Mg). The second electrode EL2 may have a multilayer structure including a reflective layer or a transfective layer formed using the above-described materials and a transparent conductive layer formed using ITO, IZO, ZnO, ITZO, etc.

[0107] Even though not shown, the second electrode EL2 may be connected with an auxiliary electrode. In case the second electrode EL2 is connected with the auxiliary electrode, the resistance of the second electrode EL2 may decrease.

[0108] In the organic electroluminescence device 10, according to the application of a voltage to each of the first electrode EL1 and the second electrode EL2, holes injected from the first electrode EL1 may move via the hole transport region HTR to the emission layer EML, and electrons injected from the second electrode EL2 may move via the electron transport region ETR to the emission layer EML. The electrons and the holes are recombined in the emission layer EML to generate excitons, and light may be emitted via the transition of the excitons from an excited state to a ground state.

[0109] In case the organic electroluminescence device 10 is a top emission type, the first electrode EL1 may be a reflective electrode, and the second electrode EL2 may be a transmissive electrode or a transfective electrode. In case the organic electroluminescence device 10 is a bottom emission type, the first electrode EL1 may be a transmissive electrode or a transfective electrode, and the second electrode EL2 may be a reflective electrode.

[0110] The organic electroluminescence device 10 according to an embodiment of the inventive concept includes the monoamine compound represented by Formula 1, thereby securing high efficiency and a long device life, as well as a decreased driving voltage.

[0111] Hereinafter, the inventive concept will be explained in more detail with reference to specific embodiments and comparative embodiments. The following embodiments are illustrated only for assisting the understanding of the inventive concept, and the scope of the inventive concept is not limited thereto.

(Synthesis Examples)


[0112] The monoamine compound according to an embodiment of the inventive concept may be synthesized, for example, as follows. However, the synthetic method of the monoamine compound according to an embodiment of the inventive concept is not limited thereto.

[0113] 1. Synthesis of Compound 1

[0114] Compound 1, a monoamine compound according to an embodiment of the inventive concept, may be synthesized, for example, as follows.

(Synthesis of Intermediate A)

[0115]

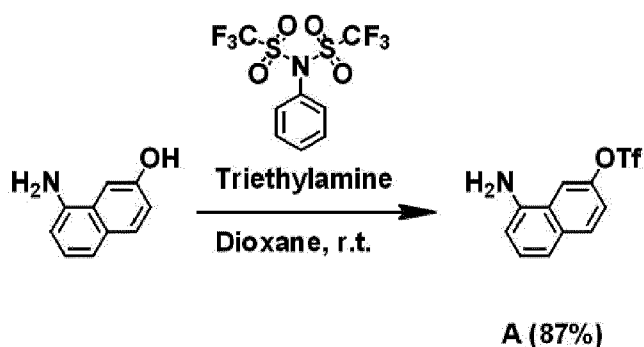


[0116] Under an argon (Ar) atmosphere, N-phenyltrifluoromethanesulfonamide (25.1 g) dissolved in dioxane (80 mL) was added dropwisely to a solution of 8-amino-2-naphthol (10.0 g) and triethylamine (12 mL) dissolved in dioxane (200 mL) in a 1 L three-neck flask, at about 0°C for about 30 minutes, and the mixture was heated and stirred at room temperature for about 4 hours. Hexane was added to the reaction solution, and the precipitated solid was filtered by using a suction system to obtain 15.9 g (yield 87%) of Intermediate A as a brown solid.

[0117] The molecular weight of Intermediate A measured by FAB-MS was 291.

(Synthesis of Intermediate B)

[0118]

EP 3 518 304 A1

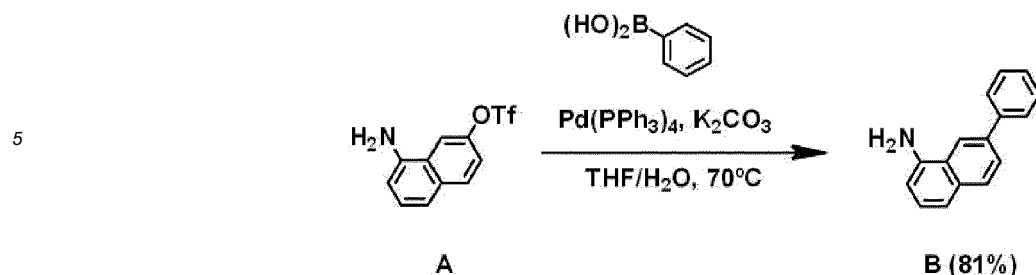


[0119] Under an argon (Ar) atmosphere, Intermediate A (3.00 g), Pd(PPh₃)₄ (0.361 g), K₂CO₃ (2.85 g), and phenylboronic acid (1.67 g) were dissolved in a mixture solution of THF/water (8:2) (110 mL) in a 300 mL three neck flask, and the resultant was heated and stirred at about 70°C for about 5 hours. After cooling in the air, dichloromethane was added, an organic layer was separated and taken, and solvents were evaporated. The crude product thus obtained was purified by silica gel column chromatography (hexane/toluene) to obtain 1.83 g (yield 81%) of Intermediate B as a pale yellow solid.

[0120] The molecular weight of Intermediate B measured by FAB-MS was 219.

(Synthesis of Intermediate C)

20 [0121]

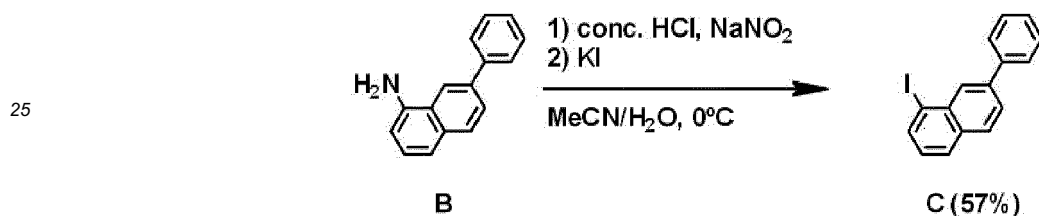


30 [0122] Under an atmospheric condition, Intermediate B (1.50 g), conc. HCl (5.20 mL), and NaNO₂ (0.78 g) were dissolved in a mixture solution of MeCN/water (1:1) (13 mL) in a 100 mL three neck flask, and the resultant was stirred at about 0°C for about 15 minutes. After that, KI (9.38 g) dissolved in water (26 mL) was added slowly, followed by stirring at about 0°C for about 2 hours. After that, dichloromethane was added, an organic layer was separated and taken, and solvents were evaporated. The crude product thus obtained was purified by silica gel column chromatography (hexane) to obtain 1.73 g (yield 57%) of Intermediate C as brown oil.

[0123] The molecular weight of Intermediate C measured by GC-MS was 330.

(Synthesis of Intermediate D)

40 [0124]

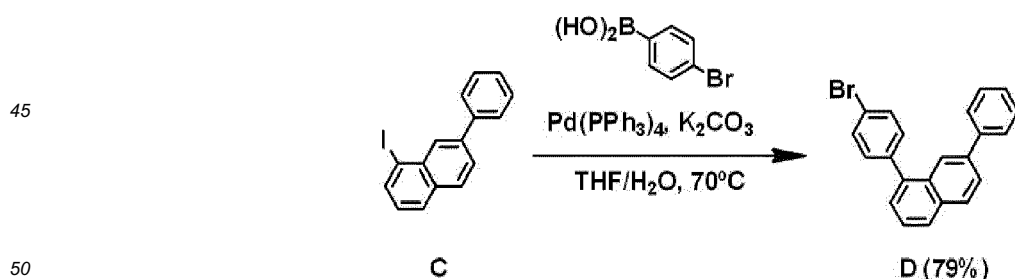

[0125] Under an argon (Ar) atmosphere, Intermediate C (2.86 g), Pd(PPh₃)₄ (0.30 g), K₂CO₃ (2.39 g), and 4-bromophenylboronic acid (1.74 g) were dissolved in a mixture solution of THF/water (8:2) (90 mL) in a 300 mL three neck flask, and the resultant was heated and stirred at about 70°C for about 5 hours. After cooling in the air, dichloromethane was added, an organic layer was separated and taken, and solvents were evaporated. The crude product thus obtained was purified by silica gel column chromatography (hexane/toluene) to obtain 2.46 g (yield 79%) of Intermediate D as a white solid.


[0126] The molecular weight of Intermediate D measured by GC-MS was 358.

(Synthesis of Compound 1)

[0127]

5

10

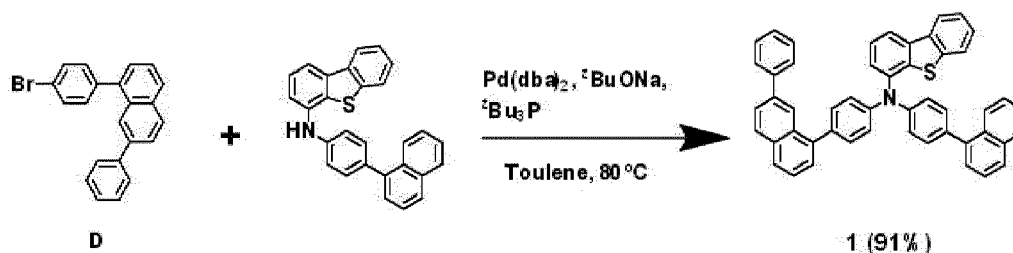

15 **[0128]** Under an argon (Ar) atmosphere, N-[4-(1-naphthalenyl)phenyl]-4-dibenzothiophenamine (2.80 g), Intermediate D (2.51 g), Pd(dba)₂ (0.14g), tBu₃P (0.11 g) and tBuONa (1.34 g) were dissolved in dehydrated toluene (93 mL) in a 200 mL three neck flask, and the resultant was heated and stirred at about 80°C for about 5 hours. After cooling in the air, dichloromethane was added, an organic layer was separated and taken, and solvents were evaporated. The crude product thus obtained was purified by silica gel column chromatography (hexane) to obtain 4.31 g (yield 91%) of Compound 1 as a white solid.

20 **[0129]** The molecular weight of Compound 1 measured by FAB-MS was 679.
 [1H NMR (CDCl₃, 25°C, 300 Hz) δ= 8.92-8.36 (m, 12H), 8.33 (d, J=8.5 Hz, 2H), 7.96 (d, J=8.5 Hz, 2H), 7.86-7.70 (m, 6H), 7.55 (d, J=8.5 Hz, 4H), 7.51-7.32 (m, 4H), 7.27-7.14 (m, 3H)]

25 2. Synthesis of Compound 17


[0130] Compound 17, a monoamine compound according to an embodiment of the inventive concept, may be synthesized, for example, as follows.

30 (Synthesis of Intermediate E)

[0131]

35

40

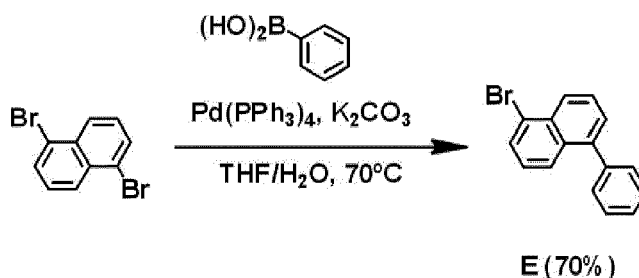

45 **[0132]** Under an argon (Ar) atmosphere, 1,5-dibromonaphthalene (18.7 g), phenylboronic acid (2.86 g), Pd(PPh₃)₄ (0.813 g), and K₂CO₃ (5.15 g) were dissolved in a mixture solution of THF/water (8:2) (360 mL) in an 1 L three neck flask, and the resultant was heated and stirred at about 70°C for about 5 hours. After cooling in the air, dichloromethane was added, an organic layer was separated and taken, and solvents were evaporated. The crude product thus obtained was purified by silica gel column chromatography (hexane) to obtain 4.65 g (yield 70%) of Intermediate E as a pale yellow solid.


50 **[0133]** The molecular weight of Intermediate E measured by GC-MS was 282.

(Synthesis of Intermediate F)

[0134]

55

EP 3 518 304 A1

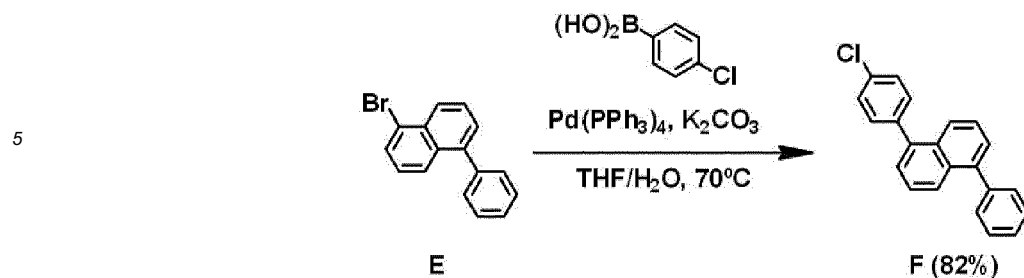

[0135] Under an argon (Ar) atmosphere, Intermediate E (2.02 g), 4-chlorophenylboronic acid (1.12 g), Pd(PPh₃)₄ (0.213 g), and K₂CO₃ (1.98 g) were dissolved in a mixture solution of THF/water (8:2) (110 mL) in an 1 L three neck flask, and the resultant was heated and stirred at about 70°C for about 7 hours. After cooling in the air, dichloromethane was added, an organic layer was separated and taken, and solvents were evaporated. The crude product thus obtained

15


was purified by silica gel column chromatography (hexane/AcOEt) to obtain 2.25 g (yield 82%) of Intermediate F as a pale yellow solid.

[0136] The molecular weight of Intermediate F measured by GC-MS was 314.

(Synthesis of Compound 17)

20

[0137]

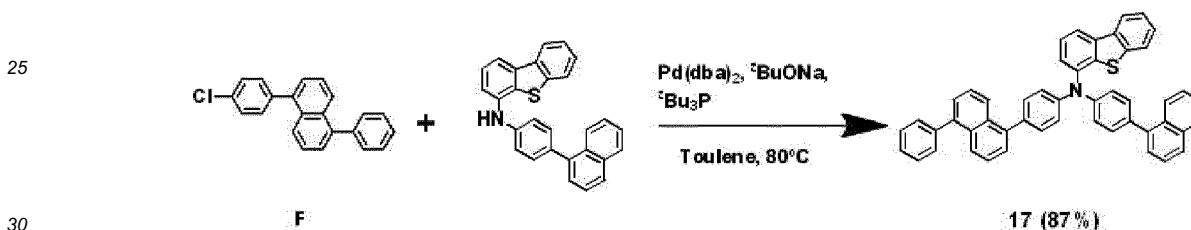

[0138] Under an argon (Ar) atmosphere, N-[4-(1-naphthalenyl)phenyl]-4-dibenzothiophenamine (3.19 g), Intermediate F (2.50 g), Pd(dba)₂ (0.14g), tBu₃P (0.14 g) and tBuONa (1.54 g) were dissolved in dehydrated toluene (53 mL) in a 200 mL three neck flask, and the resultant was heated and stirred at about 80°C for about 8 hours. After cooling in the air, dichloromethane was added, an organic layer was separated and taken, and solvents were evaporated. The crude product thus obtained was purified by silica gel column chromatography (hexane/AcOEt) to obtain 4.70 g (yield 87%)

35

of Compound 17 as a white solid.

[0139] The molecular weight of Compound 17 measured by FAB-MS was 679.

[0140] [¹H NMR (CDCl₃, 25°C, 300 Hz) δ= 9.00 (d, J=7.5 Hz, 2H), 8.82-8.41 (m, 12H), 7.96 (d, J=8.2 Hz, 2H), 7.86-7.71 (m, 6H), 7.55 (d, J=8.8 Hz, 4H), 7.51-7.30 (m, 3H), 7.26-7.14 (m, 4H)]

40

3. Synthesis of Compound 71


[0141] Compound 71, a monoamine compound according to an embodiment of the inventive concept, may be synthesized, for example, as follows.

45

(Synthesis of Intermediate G)

50

[0142]

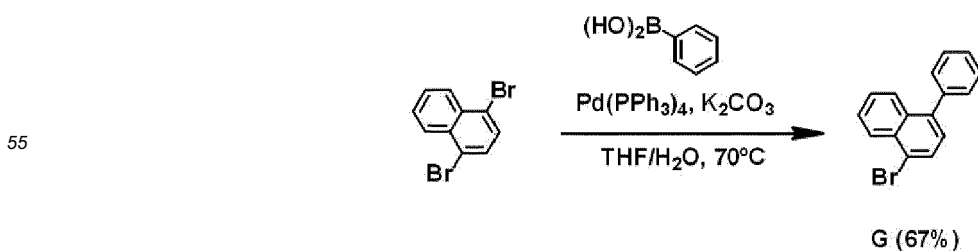


[0143] Intermediate G was synthesized by conducting the same synthetic method of Intermediate E except for using 1,4-dibromonaphthalene instead of 1,5-dibromonaphthalene in the synthetic method of Intermediate E.

[0144] The molecular weight of Intermediate G measured by FAB-MS was 283.

5 (Synthesis of Intermediate H)

[0145]

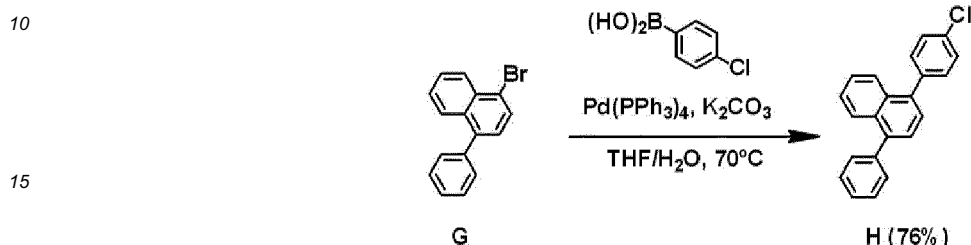


[0146] Intermediate H was synthesized by conducting the same synthetic method of Intermediate F except for using Intermediate G instead of Intermediate E in the synthetic method of Intermediate F.

[0147] The molecular weight of Intermediate H measured by GC-MS was 314.

(Synthesis of Compound 71)

25 [0148]

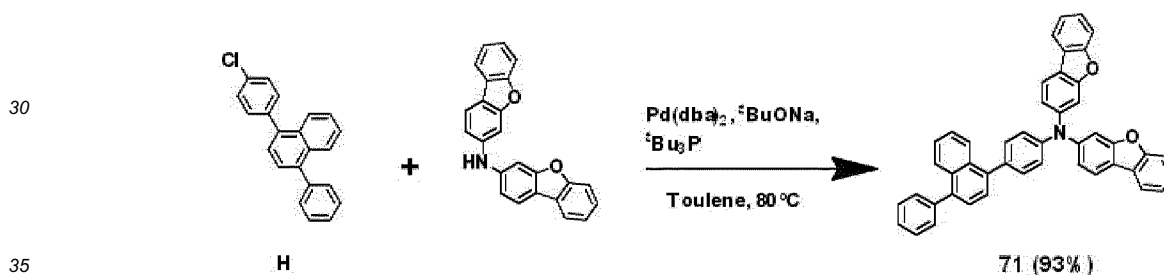

[0149] Compound 71 was synthesized by conducting the same synthetic method of Compound 17 except for using Intermediate H instead of Intermediate F and using N-3-dibenzofuranyl-3-dibenzofuranamine instead of N-[4-(1-naphthalenyl)phenyl]-4-dibenzothiophenamine in the synthetic method of Compound 17.

[0150] The molecular weight of Compound 71 measured by FAB-MS was 627.

[¹H NMR (CDCl₃, 25°C, 300 Hz) δ= 8.22 (d, J=8.5 Hz, 2H), 8.01-7.88 (m, 12H), 7.86 (d, J=8.2 Hz, 2H), 7.77-7.73 (m, 6H), 7.51-7.30 (m, 3H), 7.16-7.07 (m, 4H)]

4. Synthesis of Compound 94

45

[0151] Compound 94, a monoamine compound according to an embodiment of the inventive concept, may be synthesized, for example, as follows.


(Synthesis of Intermediate L)

50

[0152]

55

5

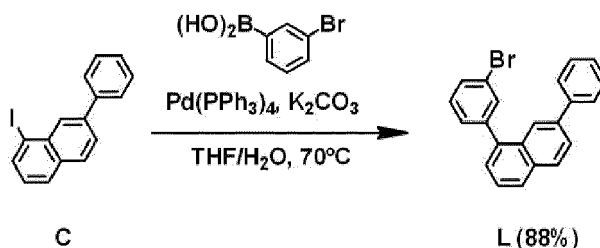

10 **[0153]** Intermediate L was synthesized by conducting the same synthetic method of Intermediate D except for using 3-bromophenylboronic acid instead of 4-bromophenylboronic acid in the synthetic method of Intermediate D.


[0154] The molecular weight of Intermediate L measured by GC-MS was 358.

(Synthesis of Compound 94)

15

[0155]

20

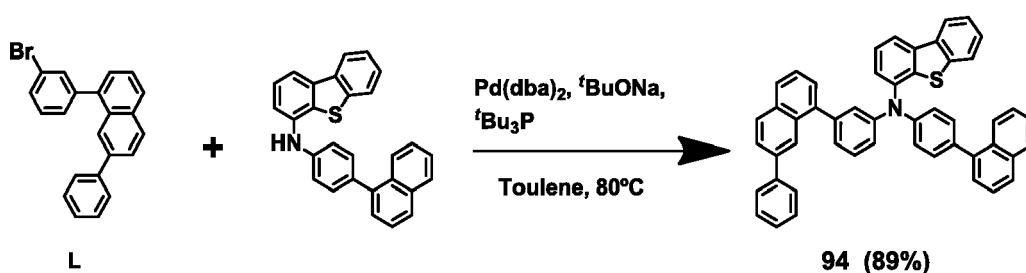

25

[0156] Compound 94 was synthesized by conducting the same synthetic method of Compound 17 except for using Intermediate L instead of Intermediate F in the synthetic method of Compound 17.

30 **[0157]** The molecular weight of Compound 94 measured by FAB-MS was 679.

[0158] [^1H NMR (CDCl_3 , 25°C , 300 Hz) δ = 8.77-8.36 (m, 12H), 8.33 (d, J =8.5 Hz, 2H), 8.00 (d, J =8.3 Hz, 2H), 7.85-7.70 (m, 6H), 7.58 (d, J =8.5 Hz, 4H), 7.51-7.42 (m, 4H), 7.34-7.24 (m, 3H)]

5. Synthesis of Compound 80

35


[0159] Compound 80, a monoamine compound according to an embodiment of the inventive concept, may be synthesized, for example, as follows.

(Synthesis of Intermediate N)

40

[0160]

45

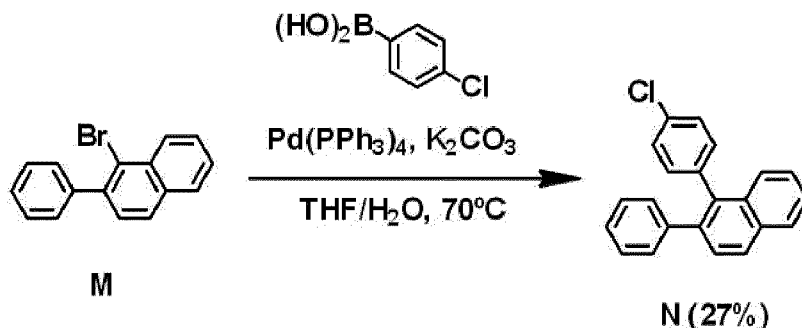

50

55 **[0161]** Intermediate N was synthesized by conducting the same synthetic method of Intermediate F except for using Intermediate M instead of Intermediate E in the synthetic method of Intermediate F.

[0162] The molecular weight of Intermediate N measured by GC-MS was 314.


(Synthesis of Compound 80)

[0163]

5

10

15

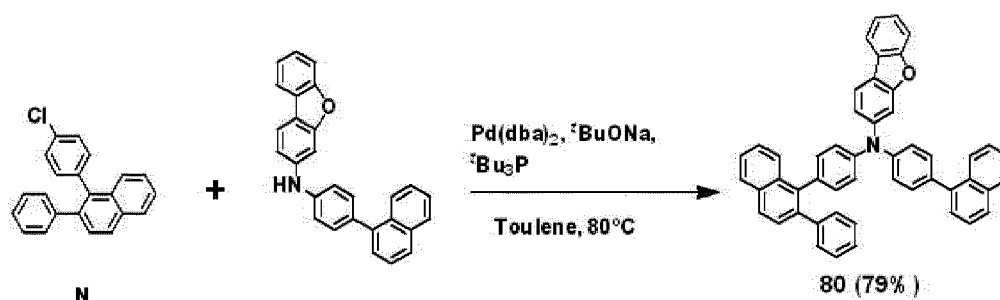

[0164] Compound 80 was synthesized by conducting the same synthetic method of Compound 17 except for using Intermediate N instead of Intermediate F and using N-(4-(naphthalen-1-yl)phenyl)-3-dibenzofuranamine instead of N-[4-(1-naphthalenyl)phenyl]-3-dibenzothiophenamine in the synthetic method of Compound 17 (yield 79%).

[0165] The molecular weight of Compound 80 measured by FAB-MS was 663.

20 [1H NMR (CDCl₃, 25°C, 300 Hz) δ = 8.97-8.94 (m, 2H), 8.55 (d, J=8.2 Hz, 1H), 8.33-8.00 (m, 6H), 7.73-7.60 (m, 5H), 7.55-7.51 (m, 6H), 7.49-7.46 (m, 6H), 7.44-7.28 (m, 6H), 6.97 (d, J=8.3 Hz, 1H)]


6. Synthesis of Compound 105

(Synthesis of Intermediate O)

[0166]

30

35

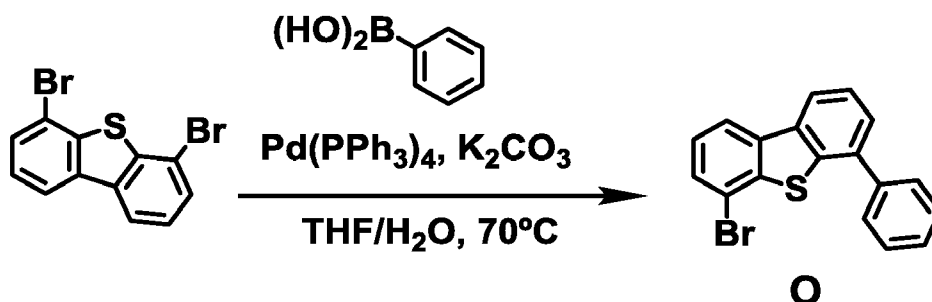

40 [0167] Intermediate O synthesized by conducting the same synthetic method of Intermediate E except for using 4,6-dibromodibenzothiophene (22.4g) instead of 1,5-dibromonaphthalene in the synthetic method of Intermediate E (yield 66%).


(Synthesis of Intermediate P)

45

[0168]

50

55

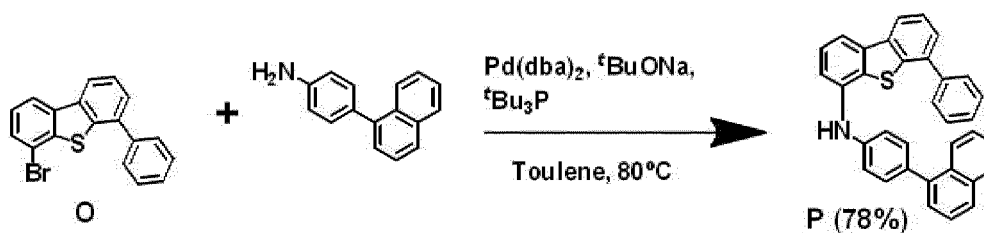


[0169] Intermediate P was synthesized by conducting the same synthetic method of Compound 1 except for using Intermediate O instead of Intermediate D and using N-[4-(1-naphthalenyl)phenyl]amine instead of N-[4-(1-naphthalenyl)phenyl]-3-dibenzothiophenamine in the synthetic method of Compound 1 (yield 78%).

nyl)phenyl]-4-dibenzothiophenamine in the synthetic method of Compound 1.

[0170] The molecular weight of Intermediate P measured by FAB-MS was 477.

(Synthesis of Compound 105)

[0171]

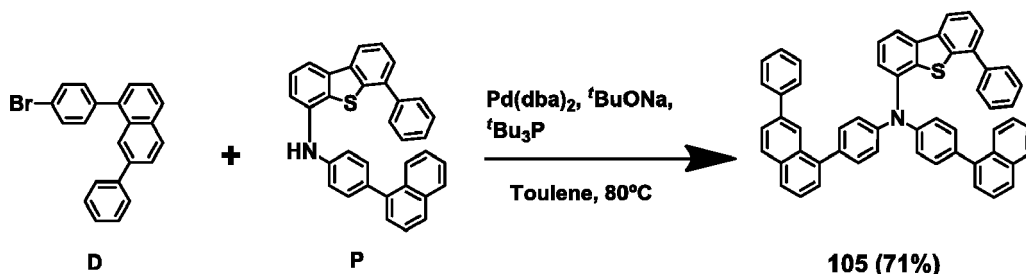

[0172] Compound 105 was synthesized by conducting the same synthetic method of Compound 1 except for using Intermediate P instead of N-[4-(1-naphthalenyl)phenyl]-4-dibenzothiophenamine in the synthetic method of Compound 1 (yield 71%).


[0173] The molecular weight of Compound 105 measured by FAB-MS was 755.

[¹H NMR (CDCl₃, 25°C, 300 Hz) δ = 8.85 (d, J=8.2 Hz, 1H), 8.55-8.52 (m, 3H), 8.44 (d, J=8.1Hz, 1H), 8.35 (d, J=7.9Hz, 1H), 8.21-8.08 (m, 4H), 8.01 (s, 1H), 7.80-7.69 (m, 5H), 7.64-7.54 (m, 6H), 7.50-7.40 (m, 6H), 7.38-7.33 (m, 7H)]

25 7. Synthesis of Compound 117

(Synthesis of Intermediate R)

[0174]

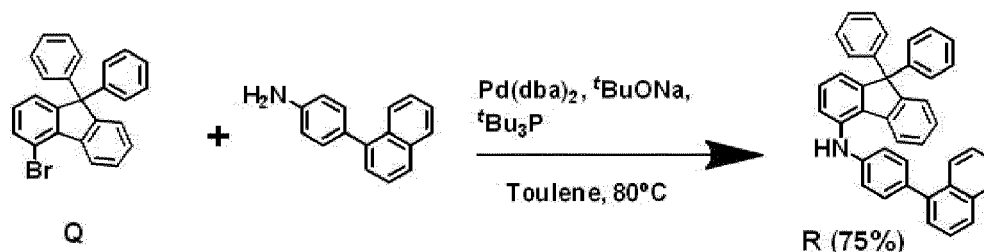


[0175] Intermediate R was synthesized by conducting the same synthetic method of Compound 1 except for using Intermediate Q instead of Intermediate D and using N-[4-(1-naphthalenyl)phenyl]amine instead of N-[4-(1-naphthalenyl)phenyl]-4-dibenzothiophenamine in the synthetic method of Compound 1.

[0176] The molecular weight of Intermediate R measured by FAB-MS was 535.

(Synthesis of Compound 117)

[0177]

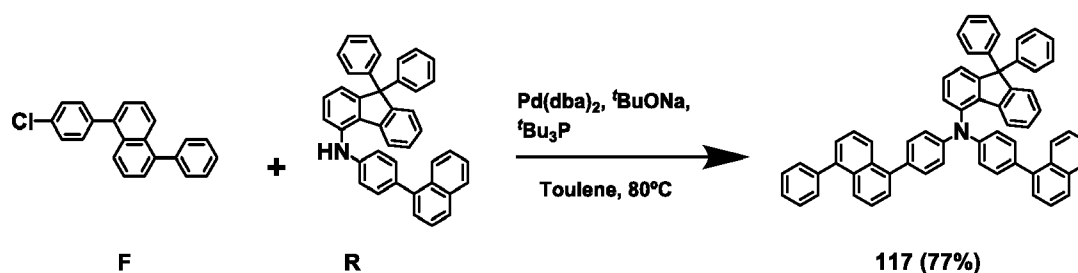

[0178] Compound 117 was synthesized by conducting the same synthetic method of Compound 17 except for using Intermediate R instead of N-[4-(1-naphthalenyl)phenyl]-4-dibenzothiophenamine in the synthetic method of Compound 17 (yield 77%).


[0179] The molecular weight of Compound 117 measured by FAB-MS was 813.

¹H NMR (CDCl₃, 25°C, 300 Hz) δ= 8.99 (d, J=8.1Hz, 1H), 8.90 (d, J=8.5Hz, 1H), 8.87 (d, J=8.4Hz, 1H), 8.54 (d, J=8.1Hz, 1H), 8.38-8.37 (m, 2H), 8.24 (d, J=7.9Hz, 1H), 8.11 (d, J=8.0Hz, 1H), 7.99 (d, J=8.6Hz, 1H), 7.81 (d, J=8.2Hz, 2H), 7.80-7.69 (m, 3H), 7.60-7.54 (m, 5H), 4.48-4.40 (m, 4H), 7.38-7.35 (m, 6H), 7.29-7.21 (7H), 7.18-7.09 (m, 7H)]

8. Synthesis of Compound 40

(Synthesis of Compound 40)

[0180]

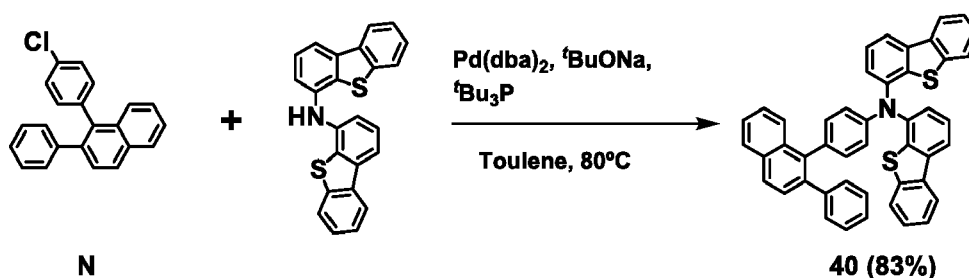


[0181] Compound 40 was synthesized by conducting the same synthetic method of Compound 17 except for using Intermediate N instead of Intermediate F and using N-4-dibenzofuranyl-4-dibenzofuranamine instead of N-[4-(1-naphthalenyl)phenyl]-4-dibenzothiophenamine in the synthetic method of Compound 17. The molecular weight of Compound 40 measured by FAB-MS was 659.

¹H NMR (CDCl₃, 25°C, 300 Hz) δ= 8.87 (d, J=7.5 Hz, 1H), 8.50 (d, J=7.7 Hz, 2H), 8.37-8.30 (m, 2H), 8.15 (m, 2H), 8.01 (d, J=7.5 Hz, 2H), 7.85 (d, J=8.2 Hz, 2H), 7.76 (d, J=8.1 Hz, 1H), 7.60 (m, 2H), 7.53-7.49 (m, 7H), 7.46 (d, J=8.3 Hz, 2H), 7.42-7.39 (m, 4H), 7.37 (d, J=8.3 Hz, 2H)]

9. Synthesis of Compound 189

(Synthesis of Compound 189)

[0182]

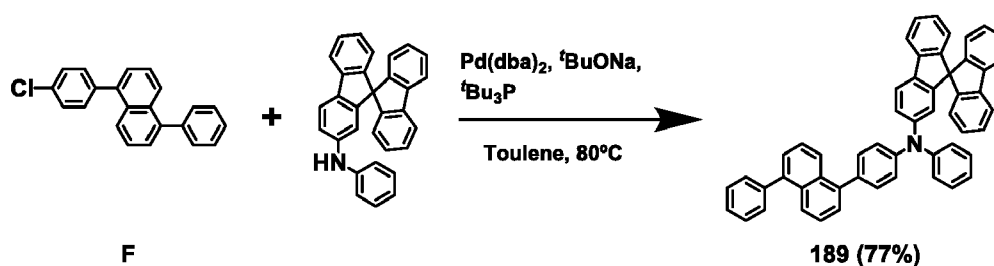


[0183] Compound 189 was synthesized by conducting the same synthetic method of Compound 17 except for using N-phenyl-9,9'-spirobisfluoren-2-amine instead of N-[4-(1-naphthalenyl)phenyl]-4-dibenzothiophenamine in the synthetic method of Compound 17. The molecular weight of Compound 189 measured by FAB-MS was 685.

¹H NMR (CDCl₃, 25°C, 300 Hz) δ= 8.79 (m, 2H), 8.44 (m, 2H), 7.92-7.82 (m, 4H), 7.79 (d, J=8.2 Hz, 2H), 7.68 (m, 2H), 7.60 (d, J=8.1 Hz, 2H), 7.50-7.41 (m, 7H), 7.39-7.33 (m, 4H), 7.29-7.23 (m, 9H), 7.12 (t, J=8.2 Hz, 1H)]

10. Synthesis of Compound 203

(Synthesis of Intermediate Q)


5 [0184]

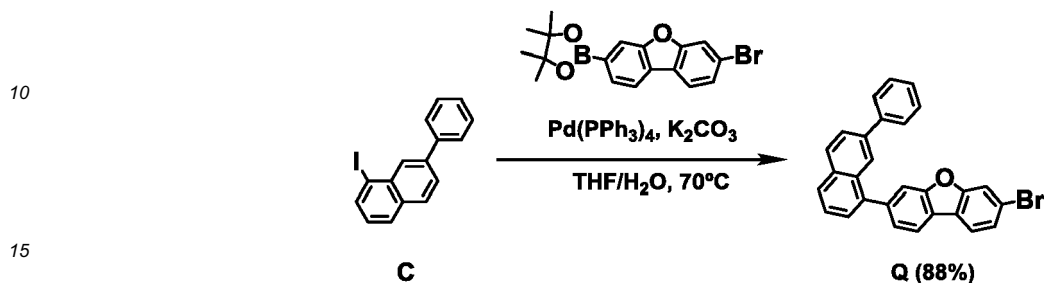

20 [0185] Intermediate Q was synthesized by conducting the same synthetic method of Intermediate L except for using 2-(7-bromodibenzofuran-3-yl)-4,4,5,5-tetramethyl-1,3,2-dioxaborolane instead of 3-bromophenylboronic acid in the synthetic method of Intermediate L. The molecular weight of Intermediate Q measured by FAB-MS was 449.

(Synthesis of Compound 203)

25 [0186]

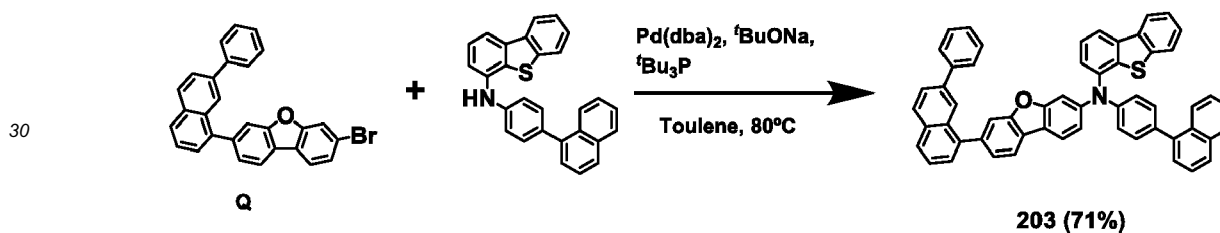

35 [0187] Compound 203 was synthesized by conducting the same synthetic method of Compound 1 except for using Intermediate Q instead of Intermediate D in the synthetic method of Compound 1. The molecular weight of Compound 203 measured by FAB-MS was 769.


40 [¹H NMR (CDCl₃, 25°C, 300 Hz) δ= 8.90 (d, J=7.9 Hz, 1H), 8.61 (d, J=8.2 Hz, 1H), 8.56 (d, J=8.1 Hz, 1H), 8.45-8.41 (m, 2H), 8.25-8.21 (m, 2H), 8.14-8.07 (m, 2H), 8.01-7.98 (m, 3H), 7.91-7.75 (m, 7H), 7.60-7.51 (m, 10H), 7.42-7.35 (m, 5H), 6.99 (d, J=7.9 Hz, 1H)]

11. Synthesis of Compound 206

(Synthesis of Intermediate R)

45

[0188]

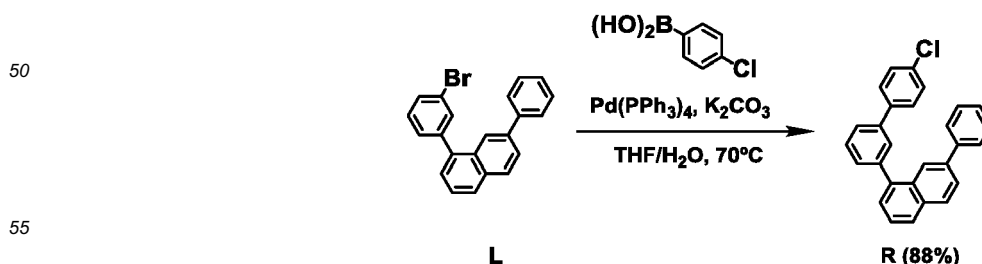


[0189] Intermediate R was synthesized by conducting the same synthetic method of Intermediate F except for using

Intermediate L instead of Intermediate E in the synthetic method of Intermediate F. The molecular weight of Intermediate R measured by FAB-MS was 390.

(Synthesis of Compound 206)

[0190]

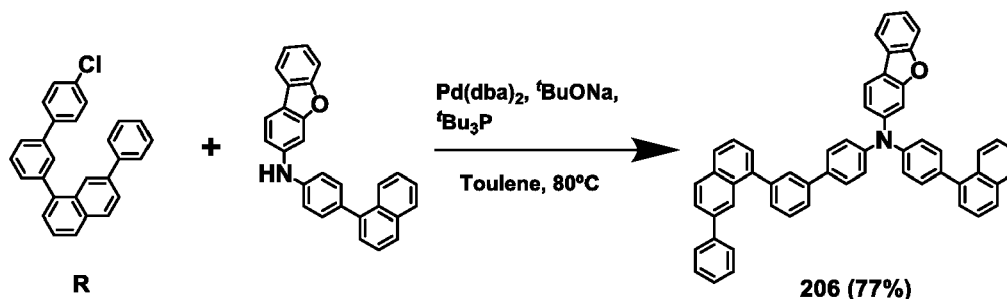

[0191] Compound 206 was synthesized by conducting the same synthetic method of Compound 80 except for using Intermediate R instead of Intermediate N in the synthetic method of Compound 80. The molecular weight of Compound 206 measured by FAB-MS was 739.

[¹H NMR (CDCl₃, 25°C, 300 Hz) δ = 8.81 (d, J=7.9 Hz, 1H), 8.66 (d, J=8.1 Hz, 1H), 8.54 (d, J=8.1 Hz, 1H), 8.46 (m, 1H), 8.31 (m, 1H), 8.21 (m, 1H), 8.10-8.01 (m, 3H), 7.98-7.95 (m, 2H), 7.84 (m, 1H), 7.79-7.74 (4H), 6.69-7.61 (m, 3H), 7.55-7.41 (m, 12H), 7.38-7.35 (m, 6H), 7.01 (d, J=8.0 Hz, 1H)]


[0192] The above-described synthesis examples are illustrated only for assisting the understanding of the inventive concept, and the reaction conditions may be modified if necessary. Furthermore, the compound according to an embodiment of the inventive concept may be synthesized to have a variety of substituents by using known methods and materials in the art. The compound may have features suitable for an organic electroluminescence device by introducing a variety of substituents to the core structure represented by Formula 1.

(Device manufacturing example)


[0193] Organic electroluminescence devices of Examples 1 to 11 were manufactured by using the above Compounds 1, 17, 71, 94, 80, 105, 117, 40, 189, 203 and 206 as an electron blocking material.

[Example Compounds]

[0194]

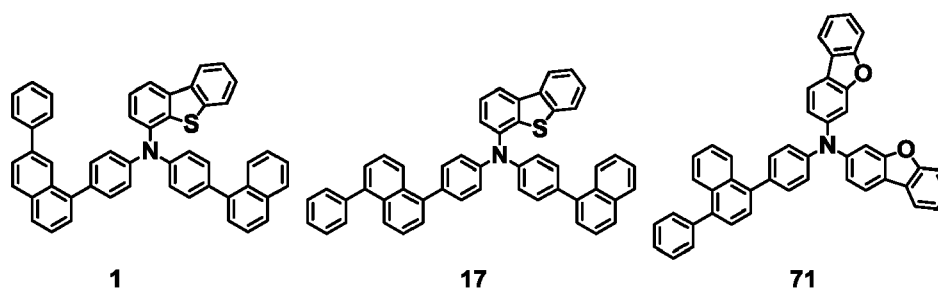

5

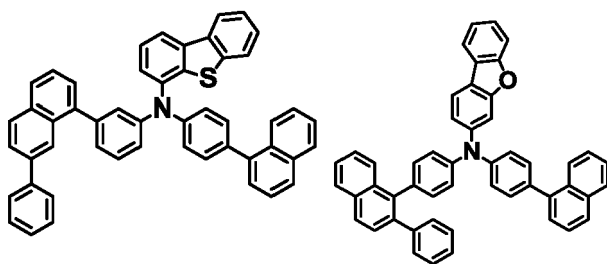


94

80

10

15

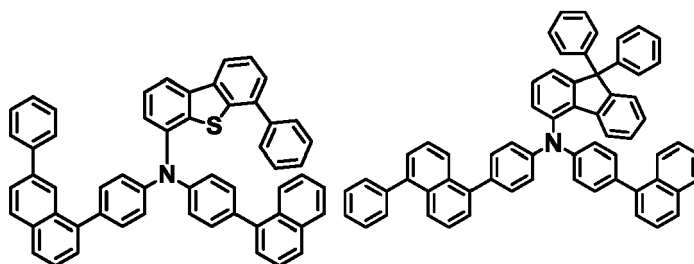


105


117

20


25




40



189

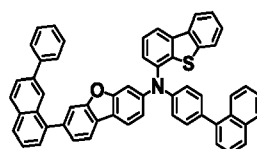

203

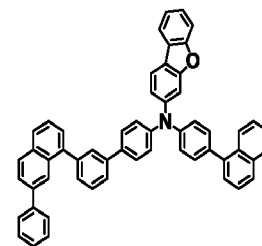

206

30


[0195] Organic electroluminescent devices of Comparative Examples 1 to 9 were manufactured by using the following Comparative Compounds A-1 to A-9.

35

[Comparative Compounds]

[0196]

40

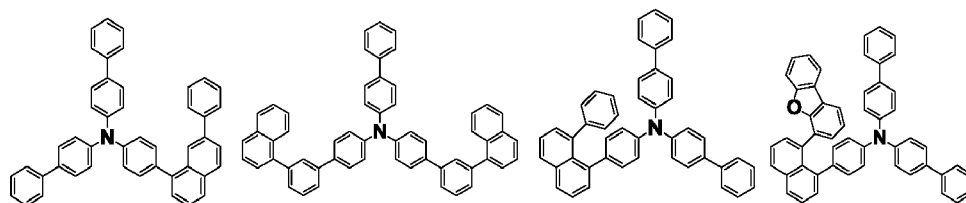

A-1


A-2

A-3

A-4

45

50

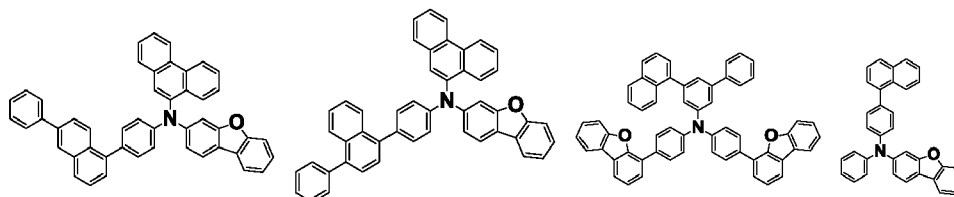

A-5


A-6

A-7

A-8

55


5




A-9

10 **[0197]** The organic electroluminescence devices according to Examples 1 to 11 and Comparative Examples 1 to 9 were manufactured by forming a first electrode using ITO to a thickness of about 150 nm, a hole injection layer using HT1 doped with 2% HIL to a thickness of about 10 nm, a hole transport layer using HT1 to a thickness of about 120 nm, an electron blocking layer using the example compounds or the comparative compounds to a thickness of about 10 nm, an emission layer using BH doped with 2% BD to a thickness of about 30 nm, a hole blocking layer using ET1 to a thickness of about 10 nm, an electron transport layer using ET2 to a thickness of about 20 nm, an electron injection layer using LiF to a thickness of about 1 nm, and a second electrode using a Mg/Ag alloy co-deposited at a volumetric ratio of 9:1 to a thickness of about 120 nm. Each layer was formed by a vacuum deposition method.


20



HIL

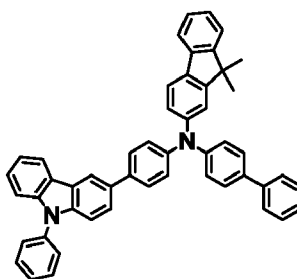


HT1

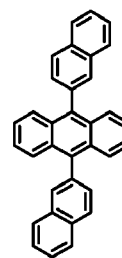


BH


30



BD



ET1

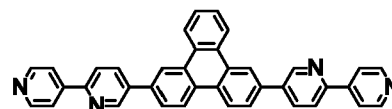

ET2

40

[0198] The voltage, half-life, emission efficiency, and color coordinate of the organic electroluminescence devices manufactured in Examples 1 to 11 and Comparative Examples 1 to 9 are shown in Table 1 below.

45

[Table 1]

	Electron blocking layer	Voltage (V)	Life LT50(h)	Emission efficiency (cd/A)	Color coordinate CIE (x,y)
Example 1	Example Compound 1	4.5	182	5.3	0.141, 0.052
Example 2	Example Compound 17	4.7	189	5.1	0.142, 0.052
Example 3	Example Compound 71	4.7	200	4.9	0.141, 0.051
Example 4	Example Compound 94	4.7	183	5.4	0.141, 0.051
Example 5	Example Compound 80	4.6	193	5.4	0.141, 0.052
Example 6	Example Compound 105	4.7	182	5.4	0.141, 0.052

55

(continued)

	Electron blocking layer	Voltage (V)	Life LT50(h)	Emission efficiency (cd/A)	Color coordinate CIE (x,y)
5	Example Compound 117	4.7	178	5.1	0.141, 0.051
	Example Compound 40	4.6	184	5.5	0.142, 0.052
10	Example Compound 189	4.5	188	5.2	0.142, 0.051
	Example Compound 203	4.7	187	5.0	0.141, 0.051
15	Example Compound 206	4.6	186	5.4	0.140, 0.052
	Comparative Compound A-1	4.8	167	4.1	0.141, 0.052
20	Comparative Compound A-2	4.9	160	3.8	0.140, 0.051
	Comparative Compound A-3	4.8	164	3.9	0.140, 0.052
25	Comparative Compound A-4	5.1	160	4.0	0.140, 0.051
	Comparative Compound A-5	4.8	163	4.1	0.141, 0.053
30	Comparative Compound A-6	5.1	160	4.1	0.141, 0.050
	Comparative Compound A-7	5.1	160	4.0	0.140, 0.051
35	Comparative Compound A-8	4.9	160	4.1	0.141, 0.052
	Comparative Compound A-9	5.0	163	4.1	0.141, 0.052

40 **[0199]** In the above table, the emission efficiency was a measured value at a current density of about 10 mA/cm², and the half-life was a value at about 1.0 mA/cm².

45 **[0200]** Referring to the results in Table 1, it may be found that the organic electroluminescence devices of Examples 1 to 11 have decreased driving voltage, extended life and enhanced efficiency when compared with those of Comparative Examples 1 to 9. The monoamine compound according to an embodiment of the inventive concept includes a phenyl-naphthyl group with a high thermal resistance and electric charge resistance, thereby attaining an extended device life. Furthermore, the monoamine compound has a bulky naphthyl group substituted with a phenyl group, which decreases symmetry of molecule and inhibits crystallization, thereby enhancing quality of layers and attaining high efficiency of the device.

50 **[0201]** Specifically, the organic electroluminescence devices of Examples 1 to 11 use the example compounds including a naphthyl group connected to the nitrogen atom at position 1 via a linker, which inhibits crystallization due to the bulky molecular structure, thereby enhancing quality of layers and attaining improved emission efficiency.

55 **[0202]** The organic electroluminescence device of Comparative Example 1 uses an amine compound including a phenyl-naphthyl group but not a condensed ring connected to the nitrogen atom, which results in low electric charge resistance, thereby decreasing device life. The organic electroluminescence device of Comparative Example 2 uses an amine compound including a naphthyl group but not a phenyl-naphthyl group, which results in low electric charge resistance, thereby decreasing device life and emission efficiency due to the insufficient quality of layers.

[0203] The organic electroluminescence devices of Comparative Examples 3 and 4 use Comparative Compounds A-3 and A-4 including a substituted naphthyl group but not a condensed ring connected directly to the nitrogen atom, which

results in low electric charge resistance, thereby decreasing device life. Furthermore, Comparative Compounds A-3 and A-4 have a bulky naphthyl group with substituents at both positions 1 and 8, which results in easy decomposition and long intermolecular distance, thereby delaying hole transport and decreasing device life and efficiency when compared with those of Examples.

[0204] The organic electroluminescence devices of Comparative Examples 5 and 6 use Comparative Compounds A-5 and A-6 including a phenanthrene ring having more than 12 carbon atoms for forming a ring, which causes a strong molecular stacking and increased deposition temperature, thereby resulting in easy thermal decomposition and decreasing efficiency and device life.

[0205] The organic electroluminescence device of Comparative Example 7 uses Comparative Compound A-7 including fused heterocycles connected to the nitrogen atom via p-phenylene group, which results in weak stabilizing effect of amine, thereby decreasing device life. The organic electroluminescence device of Comparative Example 8 uses Comparative Compound A-8 including a fused heterocycle connected directly to the nitrogen atom but not including a phenyl group, which results in weak stabilizing effect of amine, thereby decreasing device life.

[0206] The organic electroluminescence device of Comparative Example 9 uses Comparative Compound A-9 including a naphthyl group connected directly to the amine group, which results in easy decomposition due to the bulky amine group, thereby decreasing device life. Furthermore, Comparative Compound A-9 includes both a fluorenyl group and a fused heterocycle, which weakens the electric charge balance in the device due to excessive introduction of substituents with strong electric charge transport property, thereby decreasing device life and efficiency.

[0207] The monoamine compound according to an embodiment of the inventive concept may be used as a material for a hole transport region of an organic electroluminescence device, thereby contributing to decrease of a driving voltage, increase of emission efficiency and extension of life for the organic electroluminescence device.

[0208] The organic electroluminescence device according to an embodiment of the inventive concept has high efficiency.

[0209] The monoamine compound according to an embodiment of the inventive concept may be used as a material for a hole transport region of an organic electroluminescence device, thereby enhancing efficiency and life of the organic electroluminescence device.


[0210] The monoamine compound according to an embodiment of the inventive concept may be used as a material for a hole transport region of an organic electroluminescence device, thereby decreasing a driving voltage of the organic electroluminescence device.

[0211] Although the embodiments of the present invention have been described referring to the attached drawings, it is understood that the present invention should not be limited to these embodiments but various changes and modifications can be made by one ordinary skilled in the art within the scope of the present invention as hereinafter claimed. It is also understood that the embodiments described above are merely descriptive, rather than limiting.

Claims

1. A monoamine compound represented by the following Formula 1:

[Formula 1]

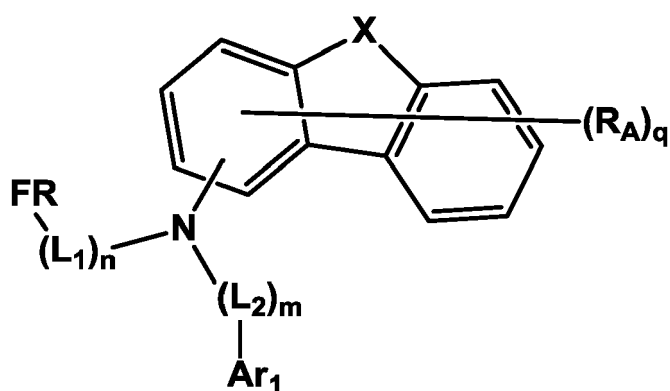

wherein in Formula 1,

X is S, O or CRR',

R and R' are each independently a substituted or unsubstituted alkyl group having 1 to 10 carbon atoms, a substituted or unsubstituted aryl group having 6 to 20 carbon atoms for forming a ring, or a substituted or unsubstituted heteroaryl group having 2 to 10 carbon atoms for forming a ring, or form a ring by combining adjacent groups with each other,

L₁ and L₂ are each independently a direct linkage, a substituted or unsubstituted arylene group having 6 to 12 carbon atoms for forming a ring, or a substituted or unsubstituted heteroarylene group having 2 to 12 carbon atoms for forming a ring,

n and m are each independently an integer of 0 to 2,

R_A is a hydrogen atom, a substituted or unsubstituted alkyl group having 1 to 10 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 carbon atoms for forming a ring, or a substituted or unsubstituted heteroaryl group having 2 to 30 carbon atoms for forming a ring,


q is an integer of 0 to 7,

Ar₁ is a substituted or unsubstituted aryl group having 6 to 12 carbon atoms for forming a ring, or a substituted or unsubstituted heteroaryl group having 2 to 12 carbon atoms for forming a ring,

in case X is CRR', Ar₁ does not comprise a heteroaryl group, and

FR is represented by the following Formula 2:

[Formula 2]

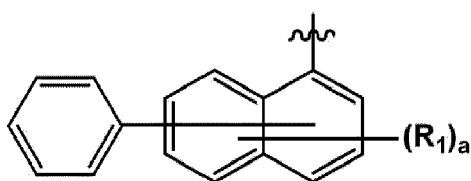


wherein in Formula 2,

R₁ is a hydrogen atom, a deuterium atom, or a halogen atom, and a is an integer of 0 to 6.

2. A monoamine compound according to claim 1, wherein FR is represented by the following Formula 2-1:

[Formula 2-1]

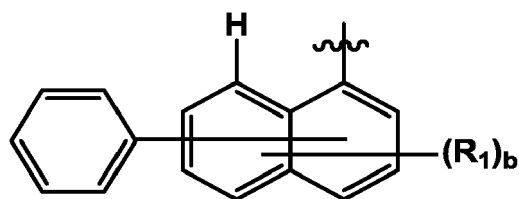


wherein in Formula 2-1,

b is an integer of 0 to 5, and R₁ is the same as defined in Formula 2.


3. A monoamine compound according to claim 1 or claim 2, wherein n is 1, and L₁ is a substituted or unsubstituted arylene group having 6 to 12 carbon atoms for forming a ring.
4. A monoamine compound according to claim 3, wherein L₁ is a substituted or unsubstituted phenylene group.
5. A monoamine compound according to claim 4, wherein FR is substituted at a para position against the nitrogen atom.
6. A monoamine compound according to any one of claims 1 to 5, wherein m is 1, L₂ is a substituted or unsubstituted arylene group having 6 to 12 carbon atoms for forming a ring, and Ar₁ is a substituted or unsubstituted aryl group having 6 to 12 carbon atoms for forming a ring.

7. A monoamine compound according to claim 6, wherein L_2 is a substituted or unsubstituted phenylene group, and Ar_1 is a substituted or unsubstituted phenyl group, a substituted or unsubstituted biphenyl group, or a substituted or unsubstituted naphthyl group.
8. A monoamine compound according to any one of claims 1 to 5, wherein m is 0, and Ar_1 is a substituted or unsubstituted heteroaryl group having 5 to 12 carbon atoms for forming a ring.
9. A monoamine compound according to claim 8, wherein Ar_1 is a substituted or unsubstituted dibenzofuran group, or a substituted or unsubstituted dibenzothiophene group.
10. A monoamine compound according to claim 1, wherein the monoamine compound represented by Formula 1 is any one selected from the group consisting of compounds represented in the following Compound Group 1:


[Compound Group 1]

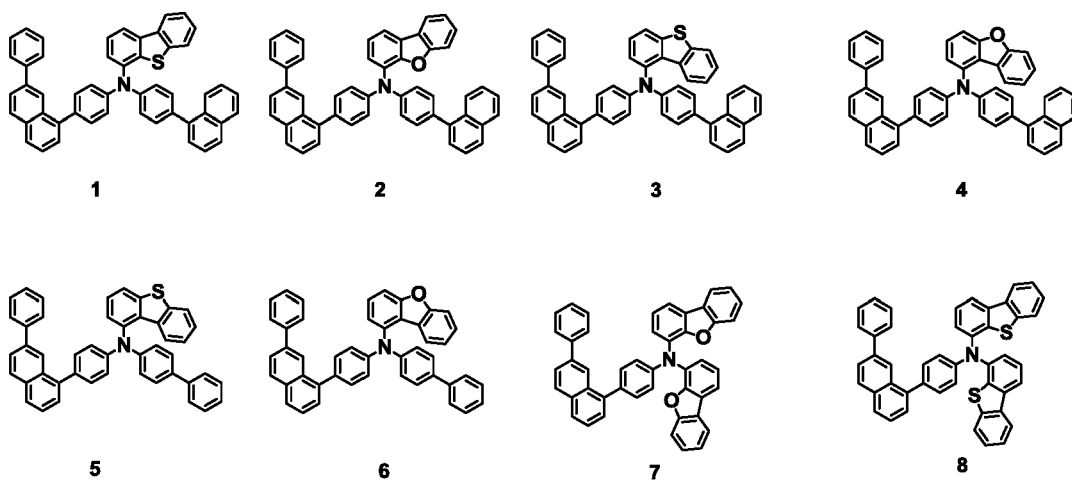


5

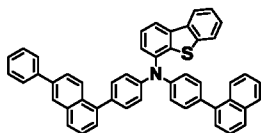


9

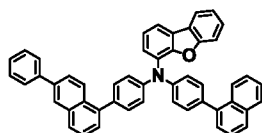

10

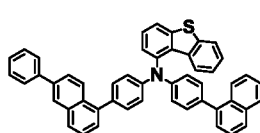


11

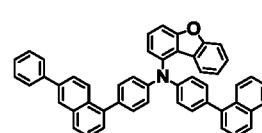


12


10




13



14




15




16

15


20




17



18




19




20

25


30




21



22




23




24

35


40




25



26




27




28

45


50




29



30




31




32

55


5




33



34




35




36


10




37



38




39




40

15


20




41



42




43




44

25


30




45



46




47




48

35


40




49



50




51




52

45


50




53



54

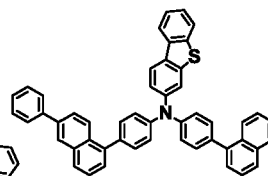


55

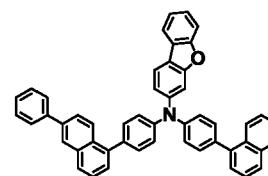


56

55


5




57



58




59




60


10




61



62




63




64


15




65



66




67




68

20


25




69



70




71




72

30


35




73



74




75




76

40


45




77



78



79




80


50

55


5




81



82




83




84


10




85



86




87




88

15


20




89



90




91




92

25


30




93



94




95




96

35


40




97



98




99




100

45


50




101



102







103







104

55

5

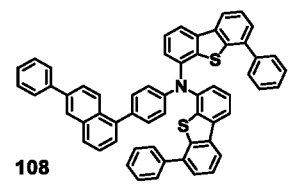
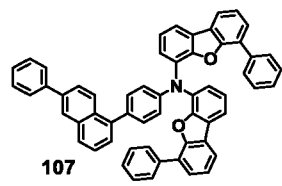




10

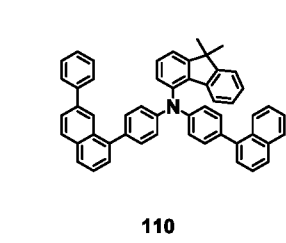





15

20

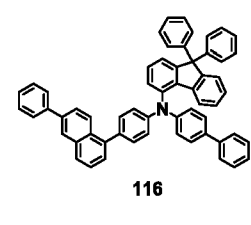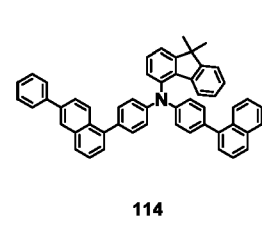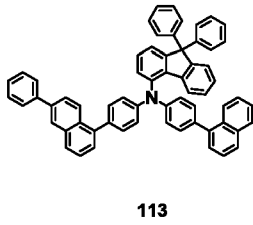





25

30

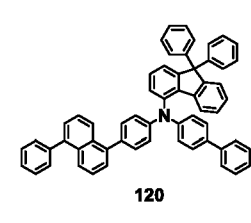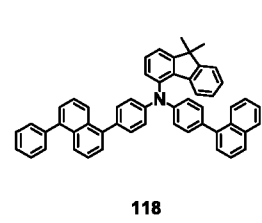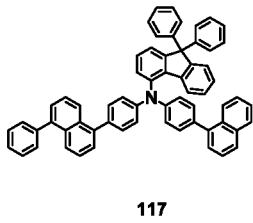

35

40

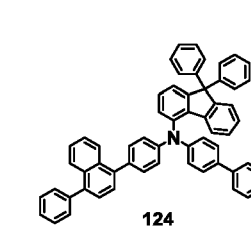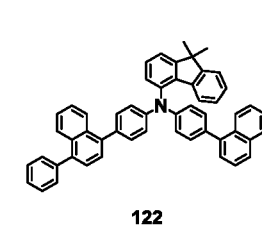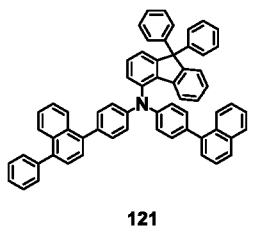


45


50

55


5




125



126




127




128


10




129



130




131




132

15


20




133



134




135




136

25


30




137



138




139

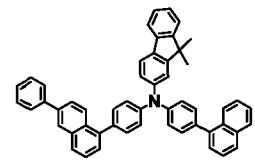


140

35


40




141



142



143




144

45


50

55


5
10
15
20
25
30
35
40
45
50
55




145




146




147




148

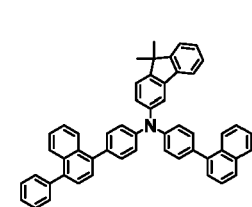


149




150




151




152




153




154




155




156




157




158




159




160




161




162




163




164




165



166




167




168


5




169



170




171




172


10




173



174




175




176

15


20




177



178




179




180

25


30




181



182




183




184

35


40




185



186




187




188

45


50




189



190




191



192

55

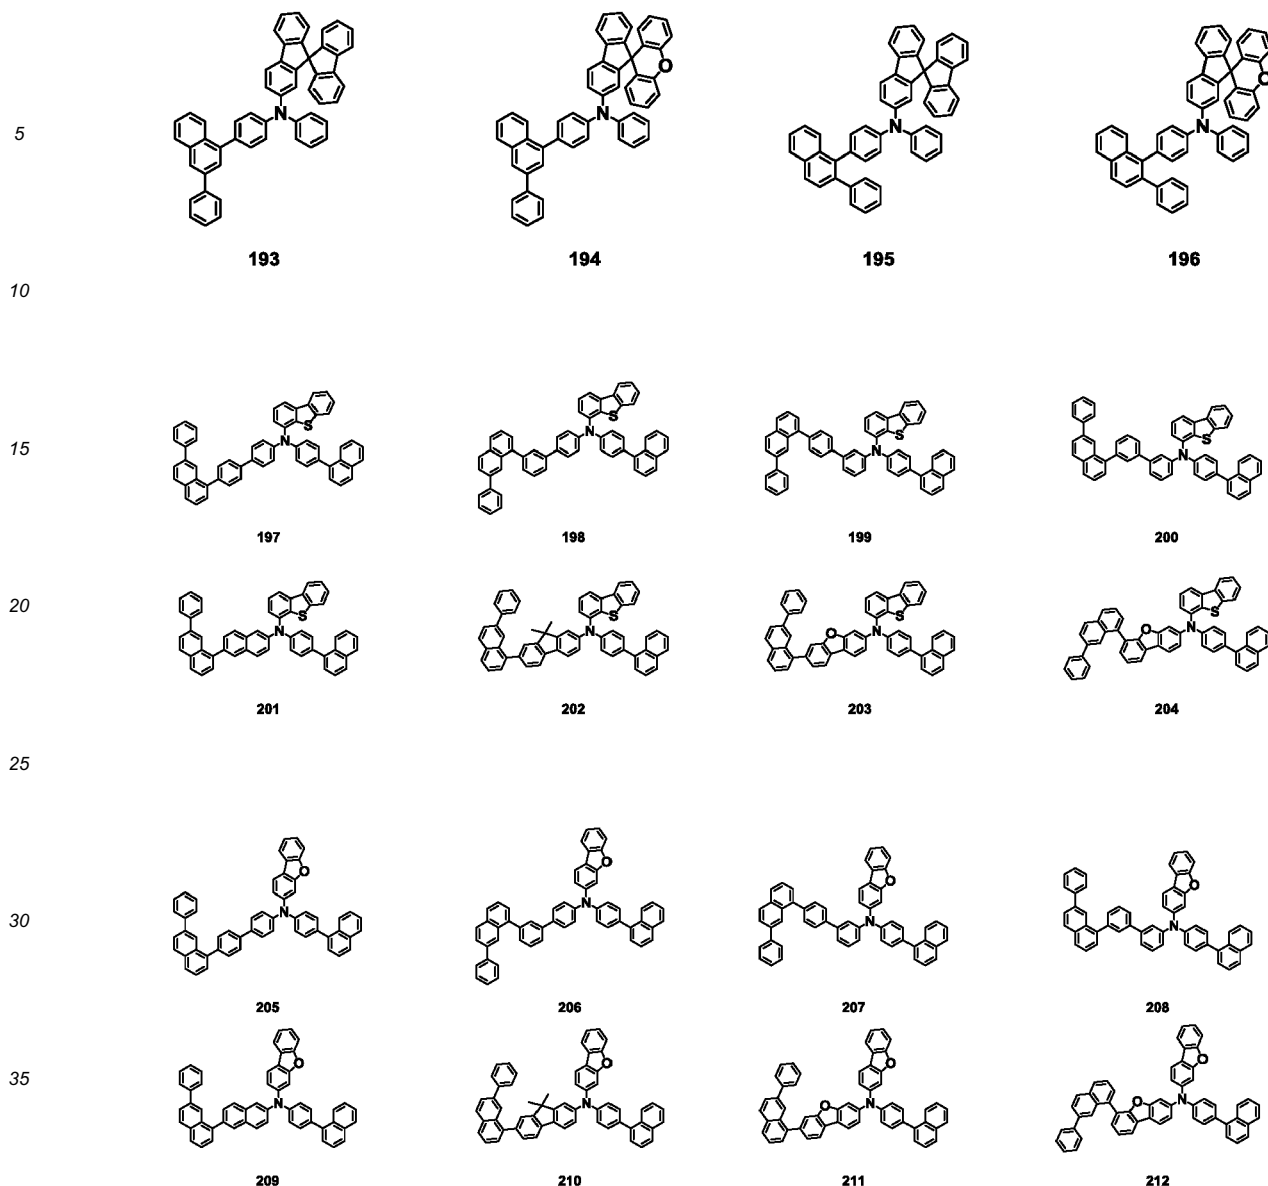

11. An organic electroluminescence device, comprising:

- a first electrode;
 - a hole transport region disposed on the first electrode;
 - an emission layer disposed on the hole transport region;
 - an electron transport region disposed on the emission layer; and
 - a second electrode disposed on the electron transport region,
- wherein the hole transport region comprises a monoamine compound according to any one of claims 1 to 10.

12. An organic electroluminescence device according to claim 11, wherein the hole transport region has a multilayer structure having a plurality of layers, and a layer of the plurality of layers contacting with the emission layer comprises the monoamine compound according to any one of claims 1 to 10.

13. An organic electroluminescence device according to claim 11 or claim 12, wherein the hole transport region comprises:

- a hole injection layer disposed on the first electrode;
- a hole transport layer disposed on the hole injection layer; and
- an electron blocking layer disposed on the hole transport layer; and

the electron blocking layer comprises the monoamine compound according to any one of claims 1 to 10.

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

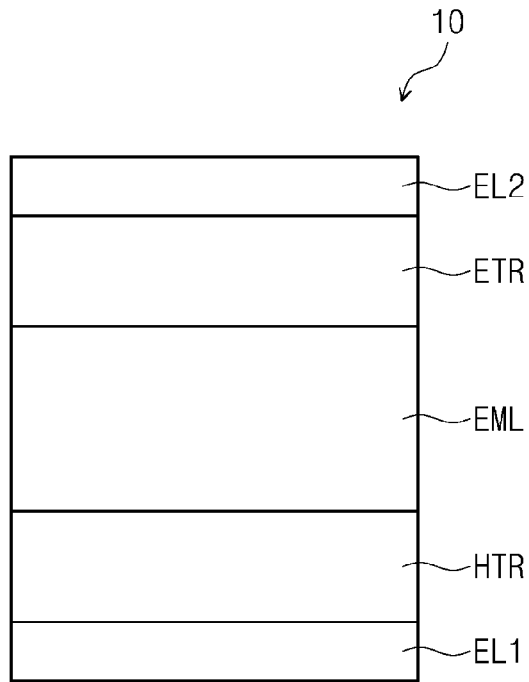


FIG. 2


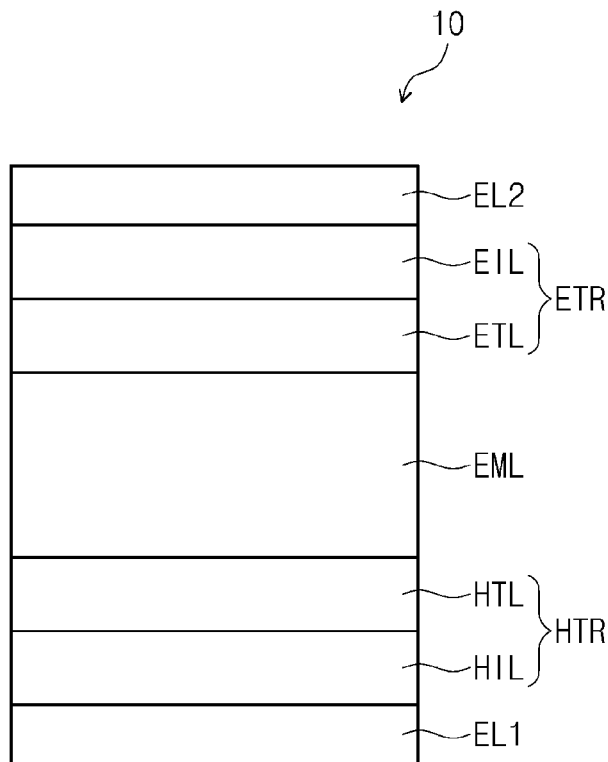


FIG. 3



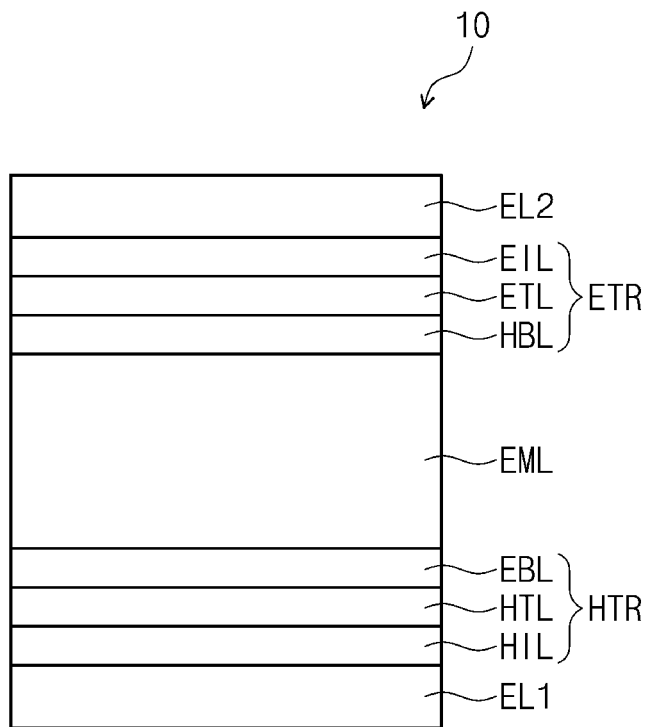

EUROPEAN SEARCH REPORT

Application Number
EP 19 15 3702

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	KR 2017 0127099 A (SAMSUNG DISPLAY CO LTD [KR]) 21 November 2017 (2017-11-21) * paragraph [0001] * * compounds 113, 159 * * claims 1, 17 *	1-13	INV. H01L51/50 C09K11/06 B32B9/00 C07C211/54 C07D307/91 C07D333/76 C07D407/12 C07D409/12 C07D311/96
X	----- KR 2017 0094665 A (LG CHEMICAL LTD [KR]) 21 August 2017 (2017-08-21) * paragraph [0001] * * page 6, last compound * * claims 1, 4, 5 *	1-13	
X	----- WO 2017/100967 A1 (WUHAN SUNSHINE OPTOELECTRONICS TECH CO LTD [CN]) 22 June 2017 (2017-06-22) * compounds 55-60 * * claims 1, 5, 6, 7 *	1-13	
X	----- US 2016/372665 A1 (TAKADA ICHINORI [JP]) 22 December 2016 (2016-12-22) * compounds 2, 10, 16 * * claims 1, 5, 10, 16 *	1-13	
	----- -/--		TECHNICAL FIELDS SEARCHED (IPC) H01L C09K B32B C07C C07D
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 26 April 2019	Examiner Cortés Suárez, José
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.02 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 19 15 3702

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	WO 2016/178544 A2 (DONGJIN SEMICHEM CO LTD [KR]) 10 November 2016 (2016-11-10) * page 63, 3rd compound in 5th row * * page 64, 3rd compound in 6th row * * page 65, 1st compound in 3rd row and 3rd compound in 6th row * * page 66, 2nd compound in 6th row * * page 67, 1st compound in 3rd row and 4th compound in 5th row * * page 68, 1st compound in 3rd row * * page 69, 1st compound in 1st row and 3rd compound in 4th row * * page 71, 3rd compound in 1st row * * page 75, 2nd compound in 4th row and 3rd compound in 7th row * * page 76 - page 100; compounds * * claims 1, 5, 6 * -----	1-13	
			TECHNICAL FIELDS SEARCHED (IPC)
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 26 April 2019	Examiner Cortés Suárez, José
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 15 3702

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-04-2019

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
KR 20170127099 A	21-11-2017	NONE	
KR 20170094665 A	21-08-2017	NONE	
WO 2017100967 A1	22-06-2017	NONE	
US 2016372665 A1	22-12-2016	JP 2017010969 A KR 20160149977 A US 2016372665 A1	12-01-2017 28-12-2016 22-12-2016
WO 2016178544 A2	10-11-2016	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

专利名称(译)	N - (((苯基) 萘-2-基) 苯基) -N- (苯基) - 二苯并噻吩胺 , 二苯并呋喃胺和-9h-苄基胺衍生物和用于有机电致发光器件的相关化合物		
公开(公告)号	EP3518304A1	公开(公告)日	2019-07-31
申请号	EP2019153702	申请日	2019-01-25
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	MIYAKE HIDEO UENO MASATSUGU JIN XIULAN TAKADA ICHINORI UNO TAKUYA ITOI HIROAKI		
发明人	MIYAKE, HIDEO UENO, MASATSUGU JIN, XIULAN TAKADA, ICHINORI UNO, TAKUYA ITOI, HIROAKI		
IPC分类号	H01L51/50 C09K11/06 B32B9/00 C07C211/54 C07D307/91 C07D333/76 C07D407/12 C07D409/12 C07D311/96		
CPC分类号	C07C211/61 C07C2603/18 C07C2603/94 C07D307/91 C07D311/96 C07D333/76 C07D409/12 C09K2211/1007 C09K2211/1011 C09K2211/1014 C09K2211/1088 C09K2211/1092 H01L51/0052 H01L51/0056 H01L51/0058 H01L51/006 H01L51/0073 H01L51/0074 H01L51/5096 C07C2603/97 C07D407/12 C09K11/06 C07C211/54 H01L51/0061 H01L51/0072 C09K2211/1018 H01L51/5012 H01L51/5056 H01L51/5072 H01L51/5088 H01L51/5092		
优先权	1020180009993 2018-01-26 KR 1020180143745 2018-11-20 KR		
外部链接	Espacenet		

摘要(译)

提供一种有机电致发光器件, 包括第一电极, 设置在第一电极上的空穴传输区域, 设置在空穴传输区域上的发光层, 设置在发光层上的电子传输区域, 和设置在电子传输上的第二电极其中, 空穴传输区域包括由式1表示的单胺化合物, 例如, N - (((苯基) 萘-2-基) 苯基) -N- (苯基) - 二苯并噻吩胺, N - (((苯基) 萘-2-基) 苯基) -N- (苯基) - 二苯并呋喃胺, N - (((苯基) 萘-2-基) 苯基) -N- (苯基) -9H-苄基胺衍生物或结构相关的化合物, 从而获得高发光效率。图。1

FIG. 1

