



US 20190366106A1

(19) **United States**

(12) **Patent Application Publication**
Ghosh et al.

(10) **Pub. No.: US 2019/0366106 A1**
(43) **Pub. Date: Dec. 5, 2019**

(54) **SYSTEMS, METHODS, AND INTERFACES FOR USE IN CARDIAC EVALUATION**

A61B 34/20 (2006.01)
A61N 1/02 (2006.01)
A61N 1/365 (2006.01)
A61N 1/368 (2006.01)
A61N 1/39 (2006.01)

(71) Applicant: **Medtronic, Inc.**, Minneapolis, MN (US)

(72) Inventors: **Subham Ghosh**, Blaine, MN (US); **Karen Kleckner**, Blaine, MN (US); **Melissa Rhodes**, Columbia Heights, MN (US); **D'Anne Kudlik**, Lino Lakes, MN (US); **Jordyn Reich**, Minneapolis, MN (US); **Keelia Doyle**, Minneapolis, MN (US); **Joshua Blauer**, White Bear Lake, MN (US)

(52) **U.S. Cl.**
CPC *A61N 1/37247* (2013.01); *A61B 2562/046* (2013.01); *A61B 5/7221* (2013.01); *A61B 5/044* (2013.01); *A61B 5/0452* (2013.01); *A61B 5/6823* (2013.01); *A61B 17/3468* (2013.01); *A61B 5/04085* (2013.01); *A61B 34/20* (2016.02); *A61B 5/6843* (2013.01); *A61N 1/025* (2013.01); *A61N 1/36507* (2013.01); *A61N 1/3688* (2013.01); *A61N 1/39622* (2017.08); *A61B 5/0006* (2013.01); *A61B 2034/2051* (2016.02); *A61B 2562/0209* (2013.01); *A61B 2562/043* (2013.01); *A61B 5/7475* (2013.01)

(21) Appl. No.: **15/995,406**


(22) Filed: **Jun. 1, 2018**

Publication Classification

(51) **Int. Cl.**
A61N 1/372 (2006.01)
A61B 5/00 (2006.01)
A61B 5/044 (2006.01)
A61B 5/0452 (2006.01)
A61B 17/34 (2006.01)
A61B 5/0408 (2006.01)

(57) **ABSTRACT**

Systems, interfaces, and methods are described herein for evaluation and adjustment cardiac therapy. The systems, interfaces, and methods may utilize, or include, a graphical user interface to display various information with respect to a plurality of external electrodes and electrical activity monitored using such external electrodes and to allow a user to adjust what information to display.

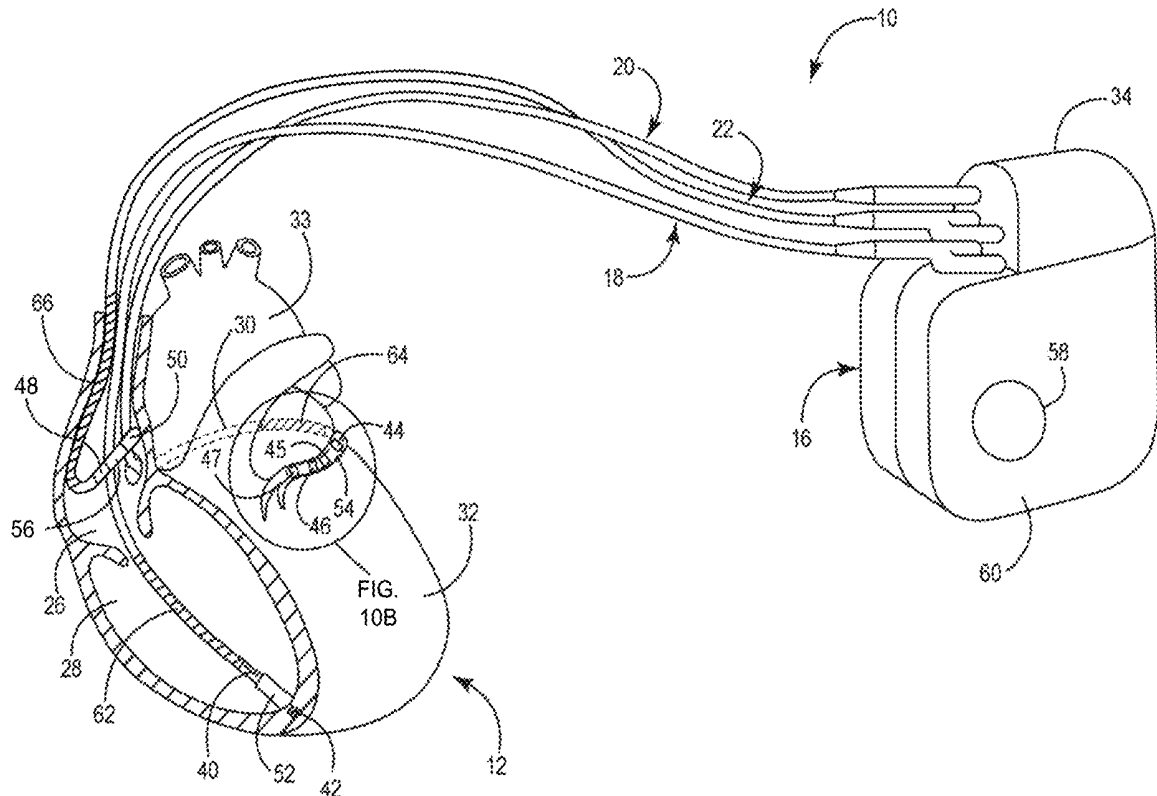

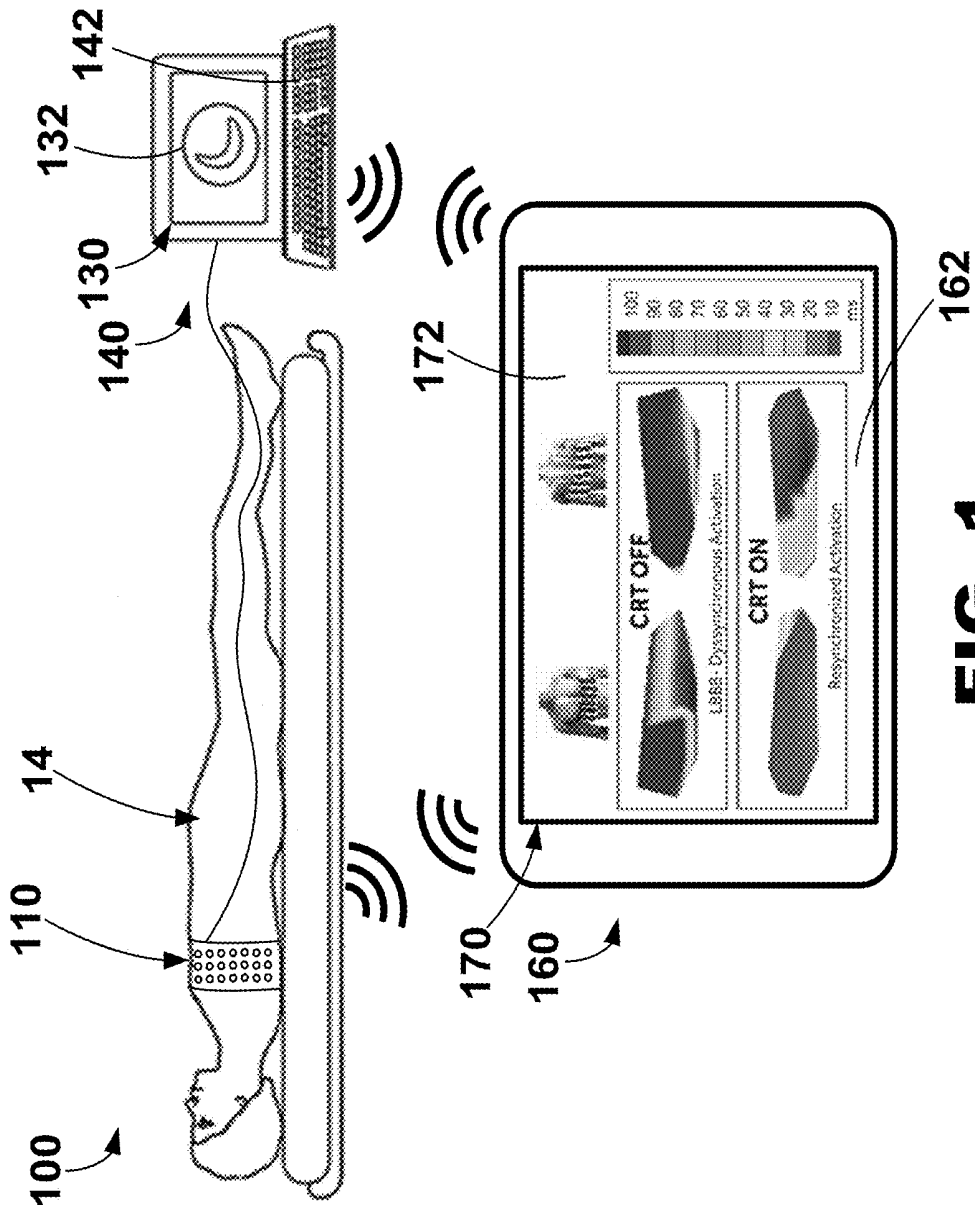


FIG. 1

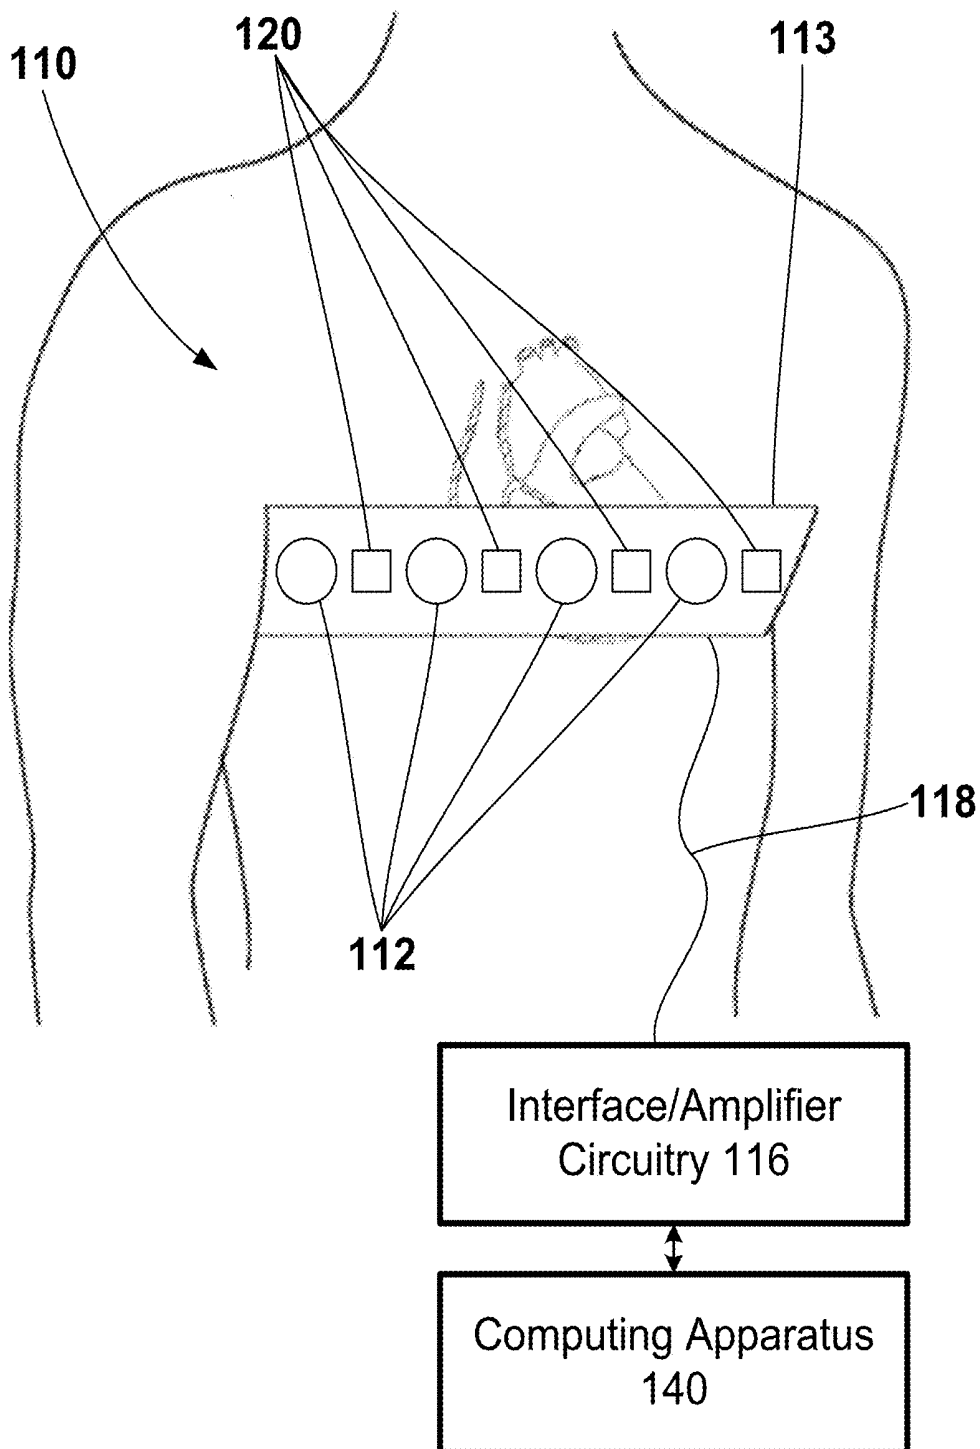


FIG. 2

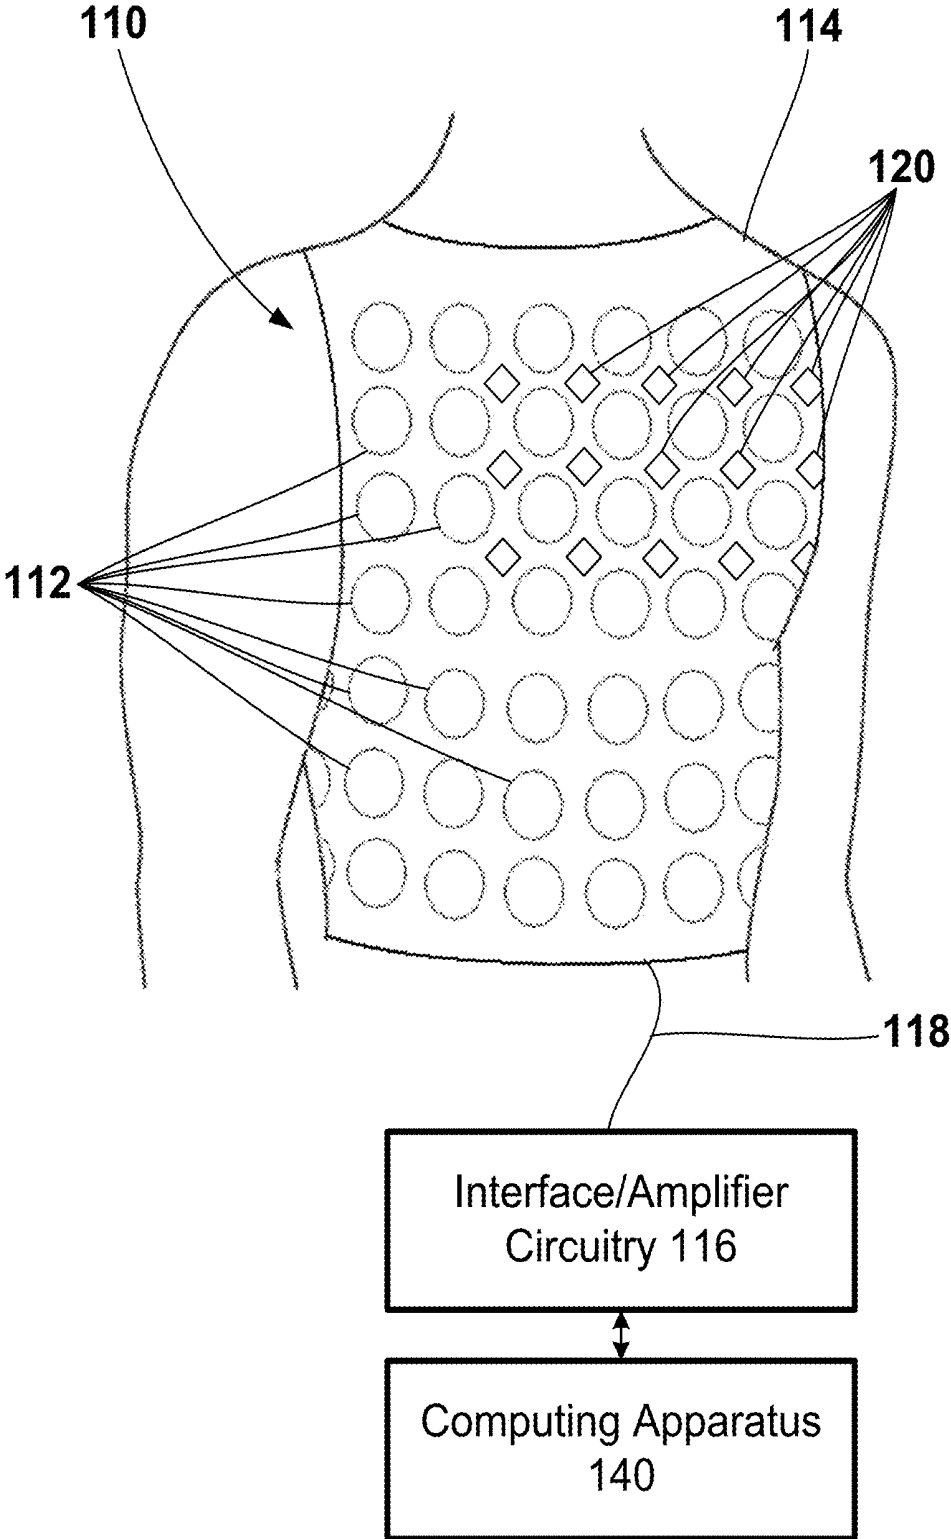


FIG. 3

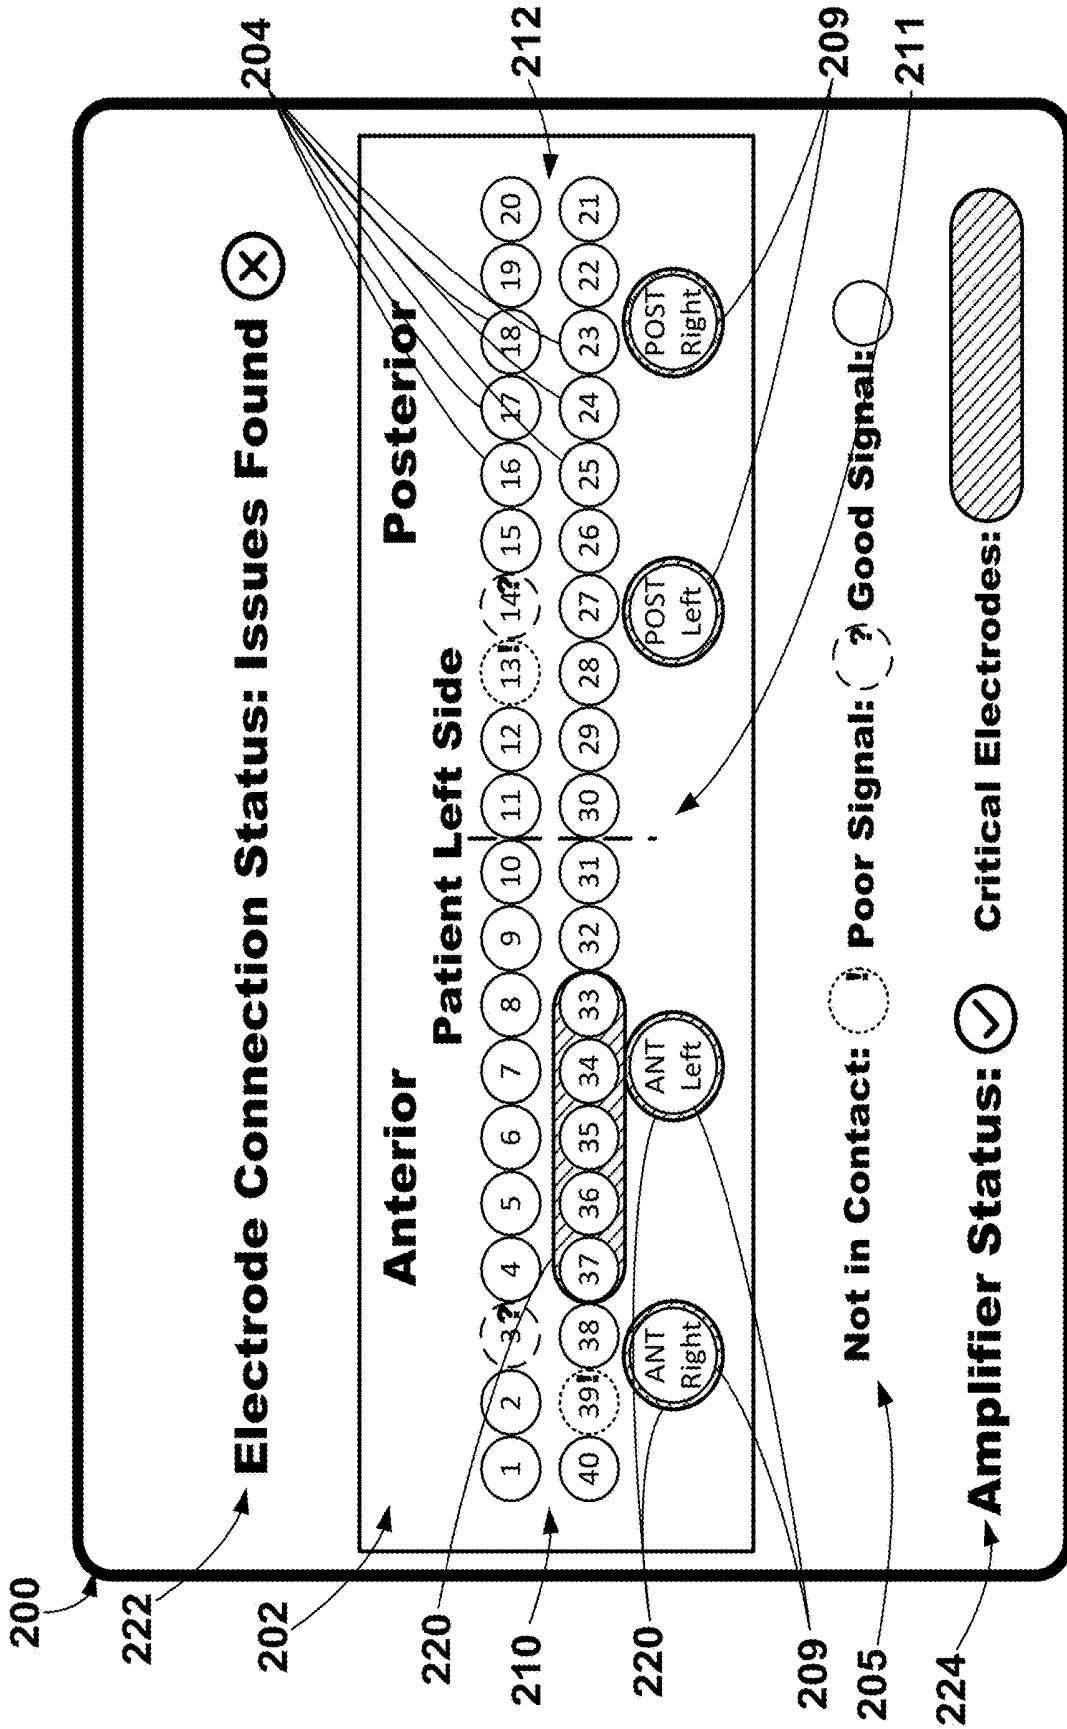


FIG. 4

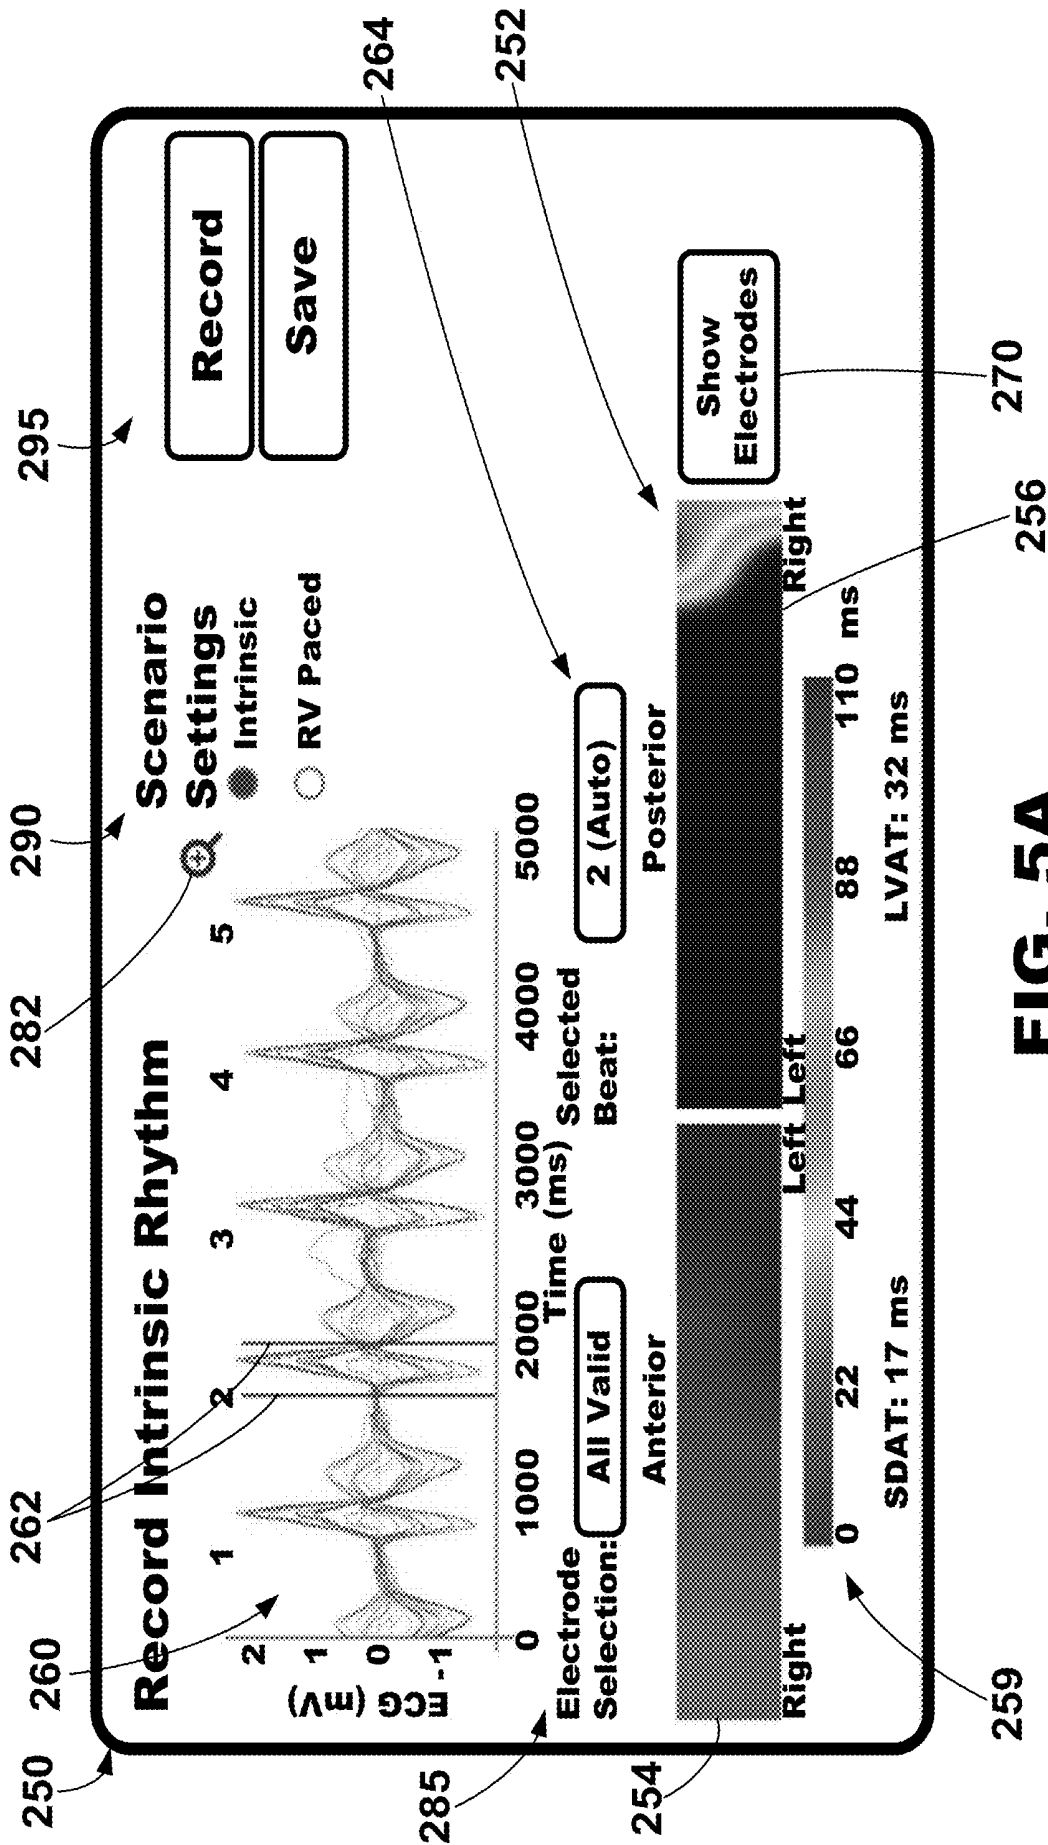


FIG. 5A

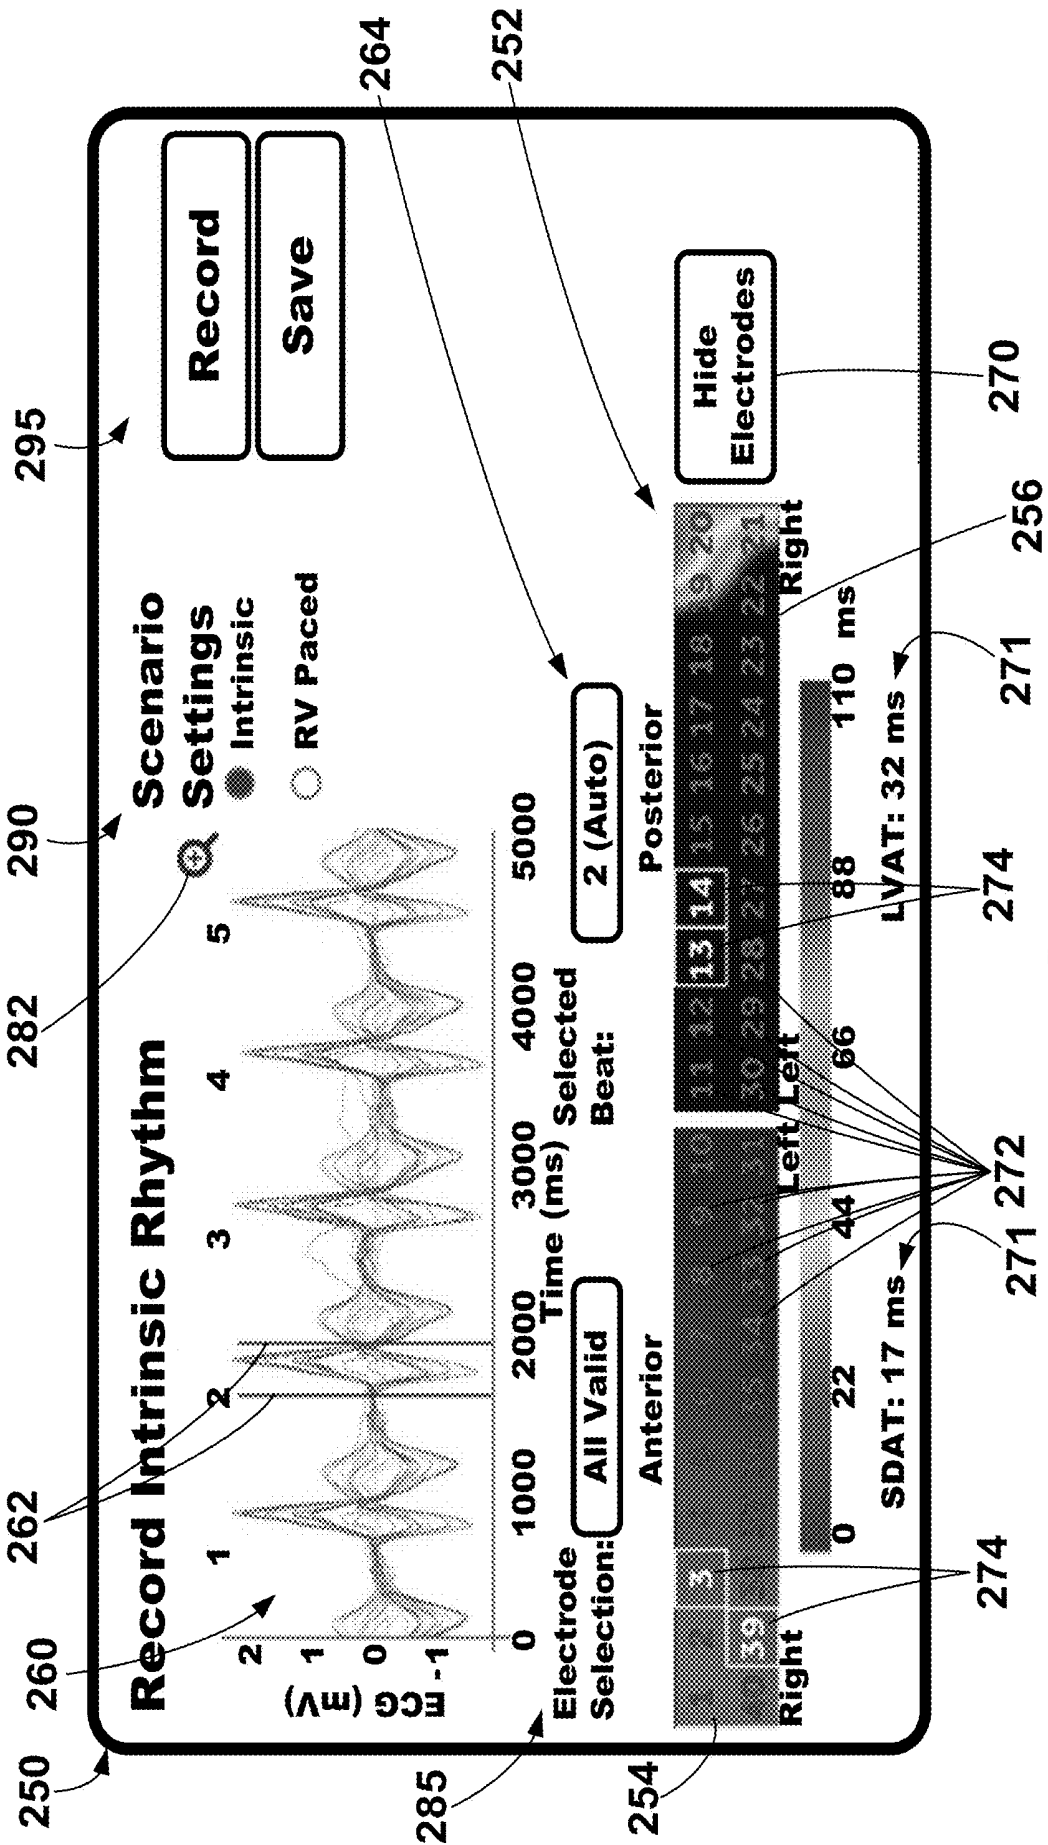


FIG. 5B

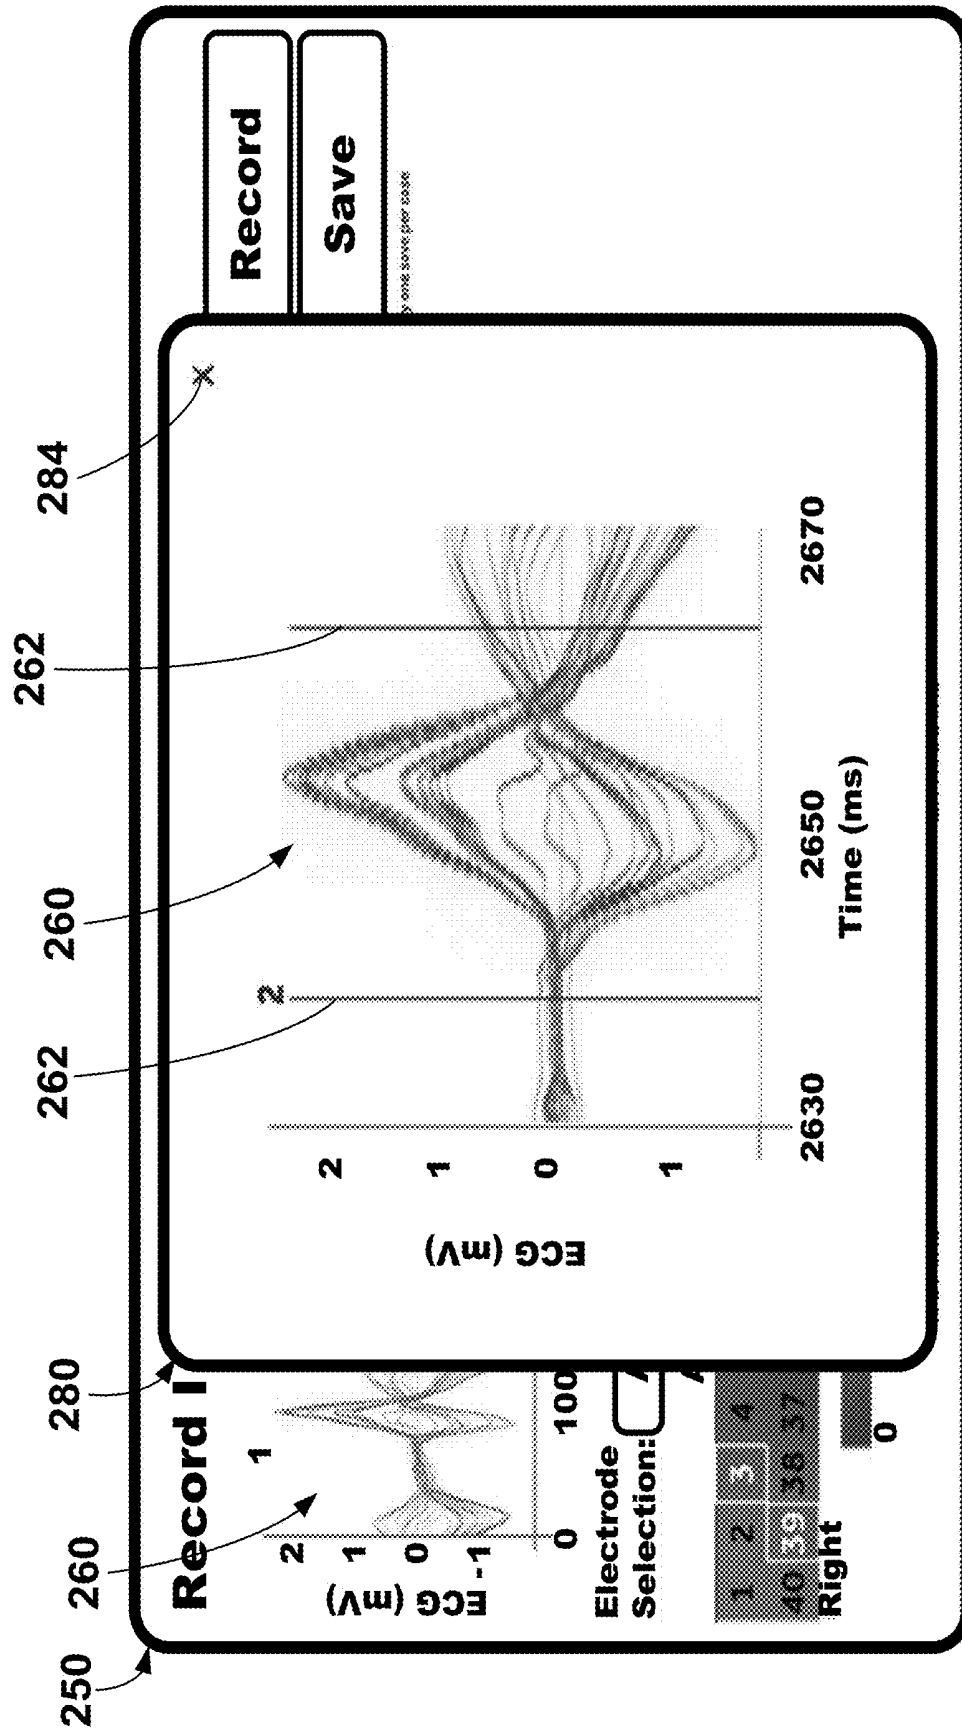


FIG. 5C

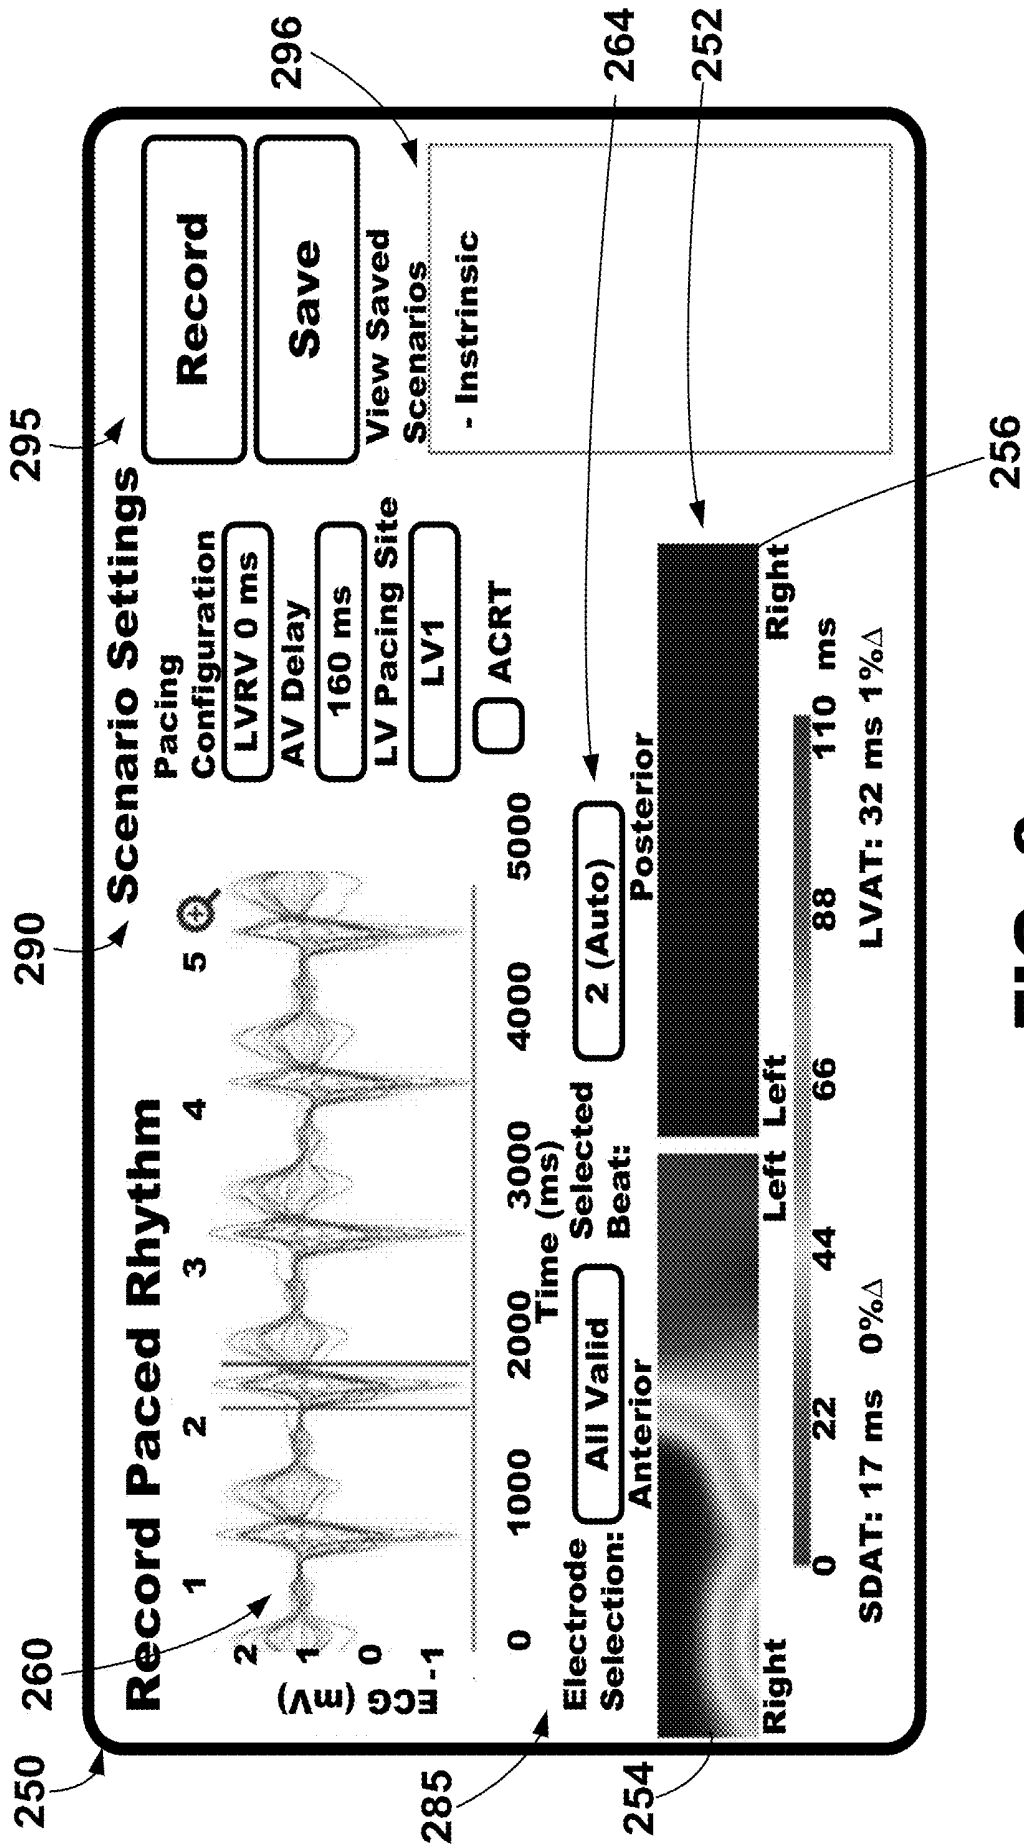


FIG. 6

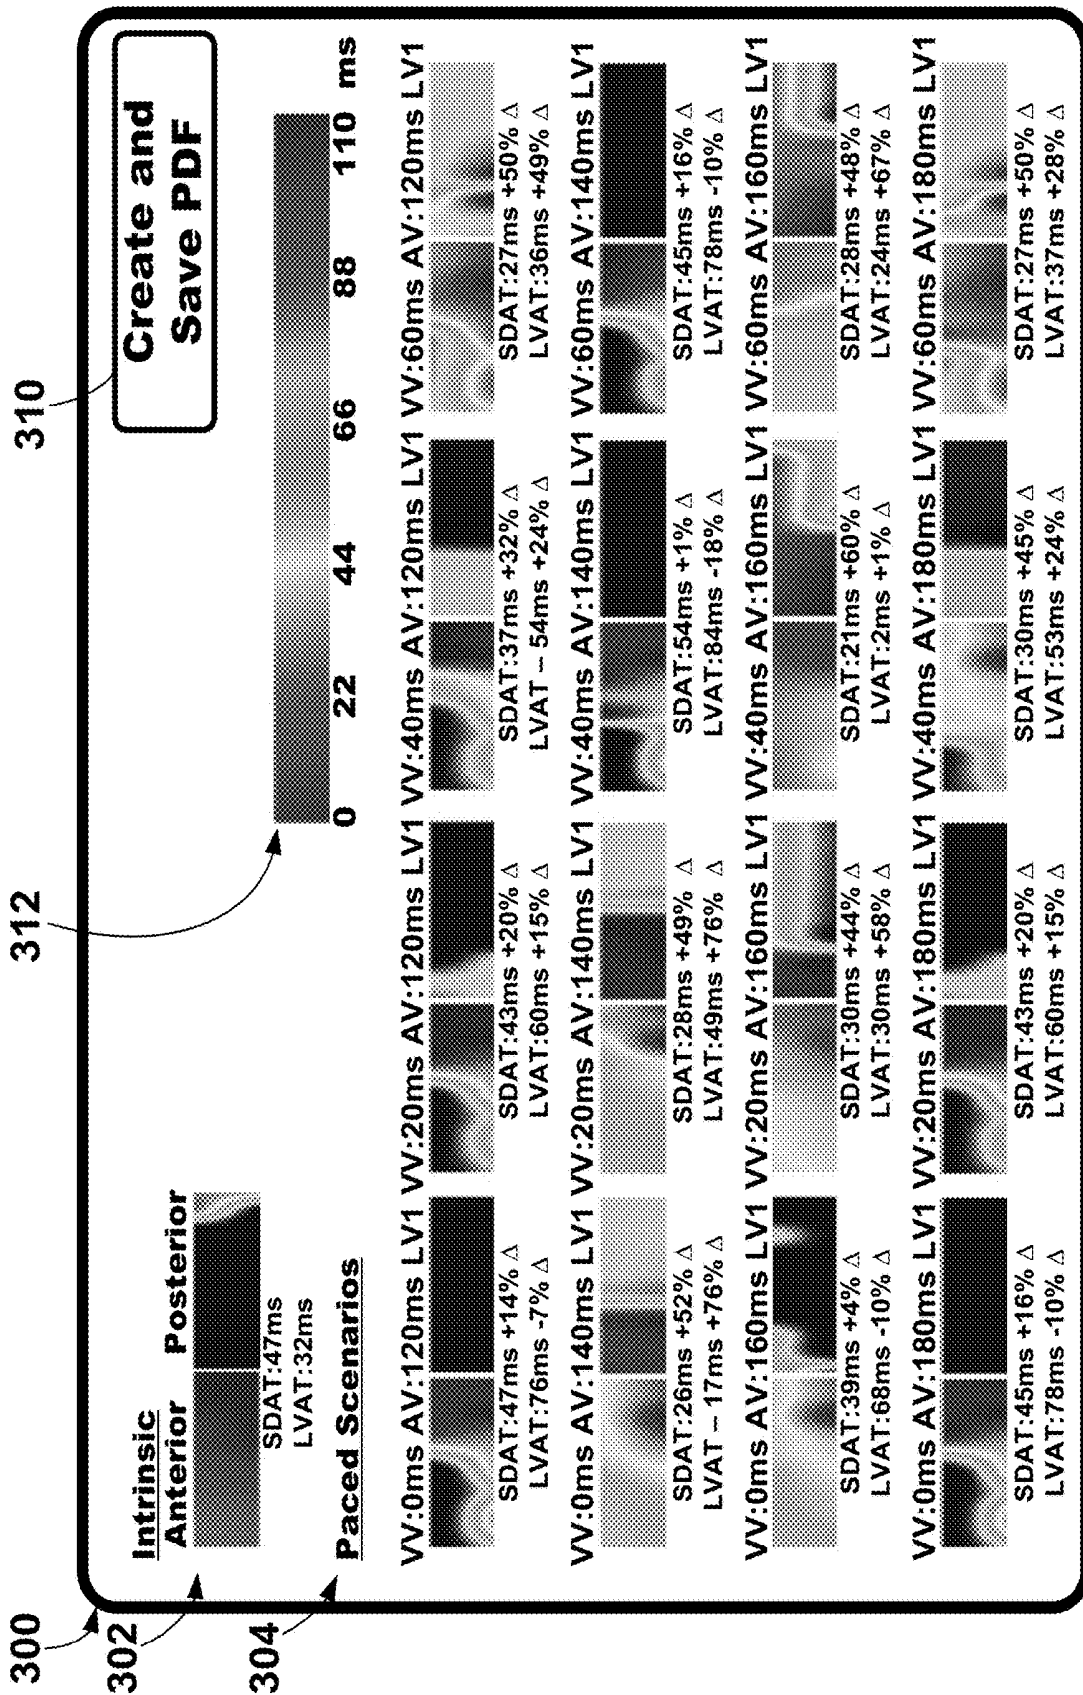


FIG. 7

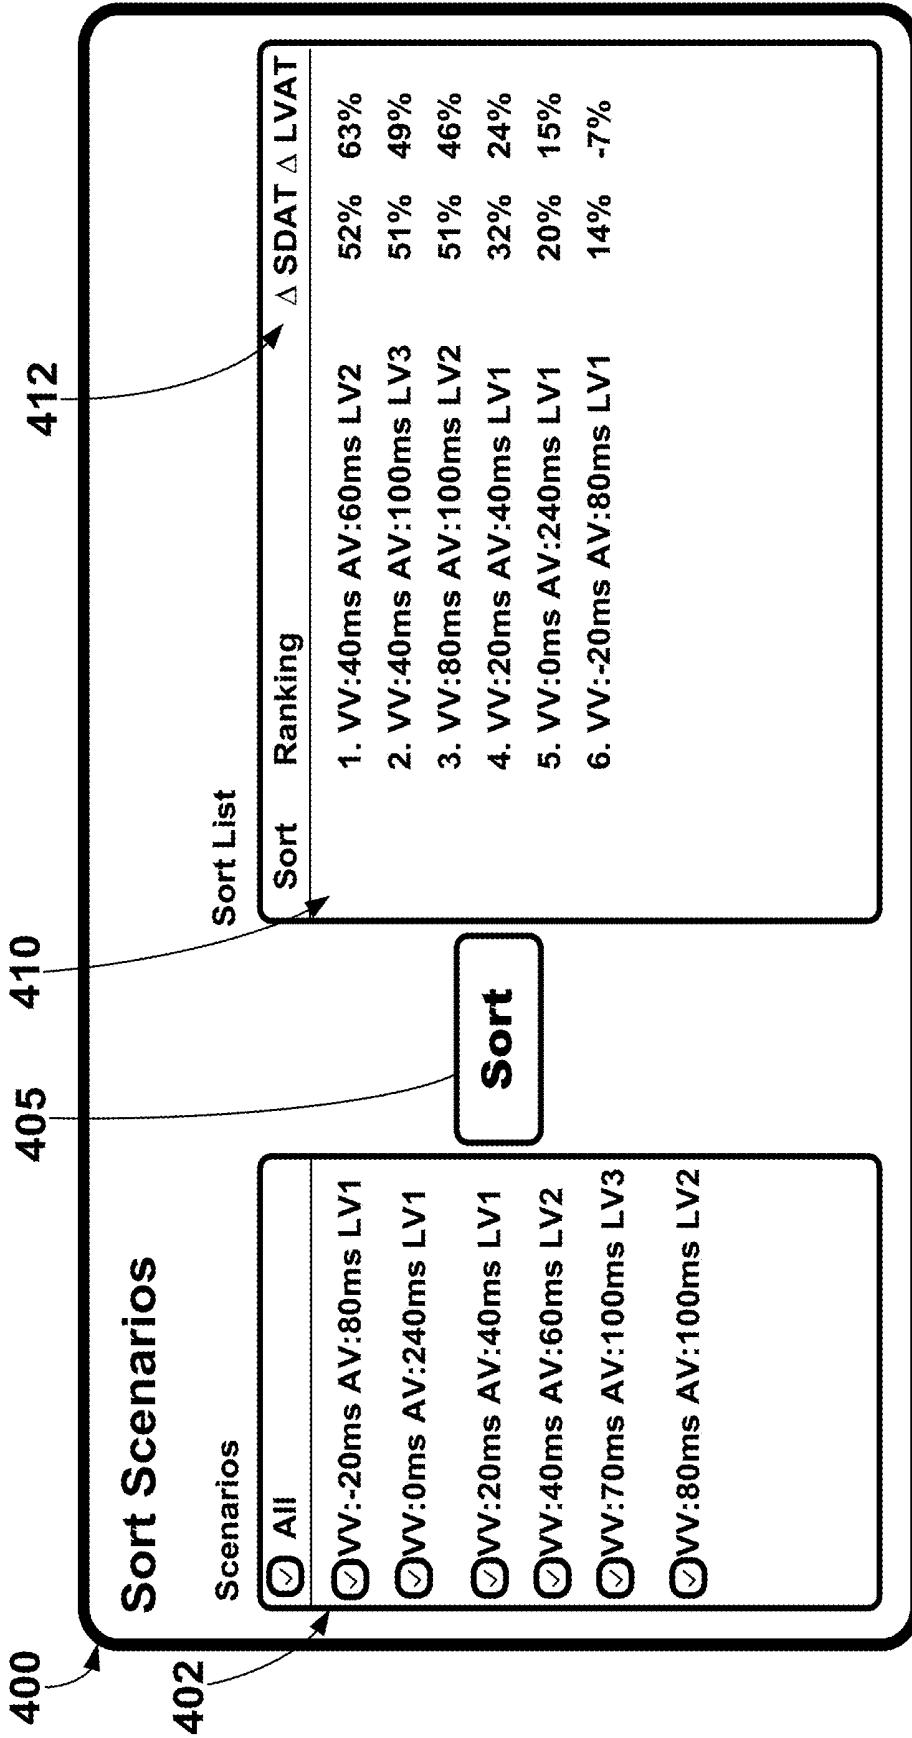


FIG. 8B

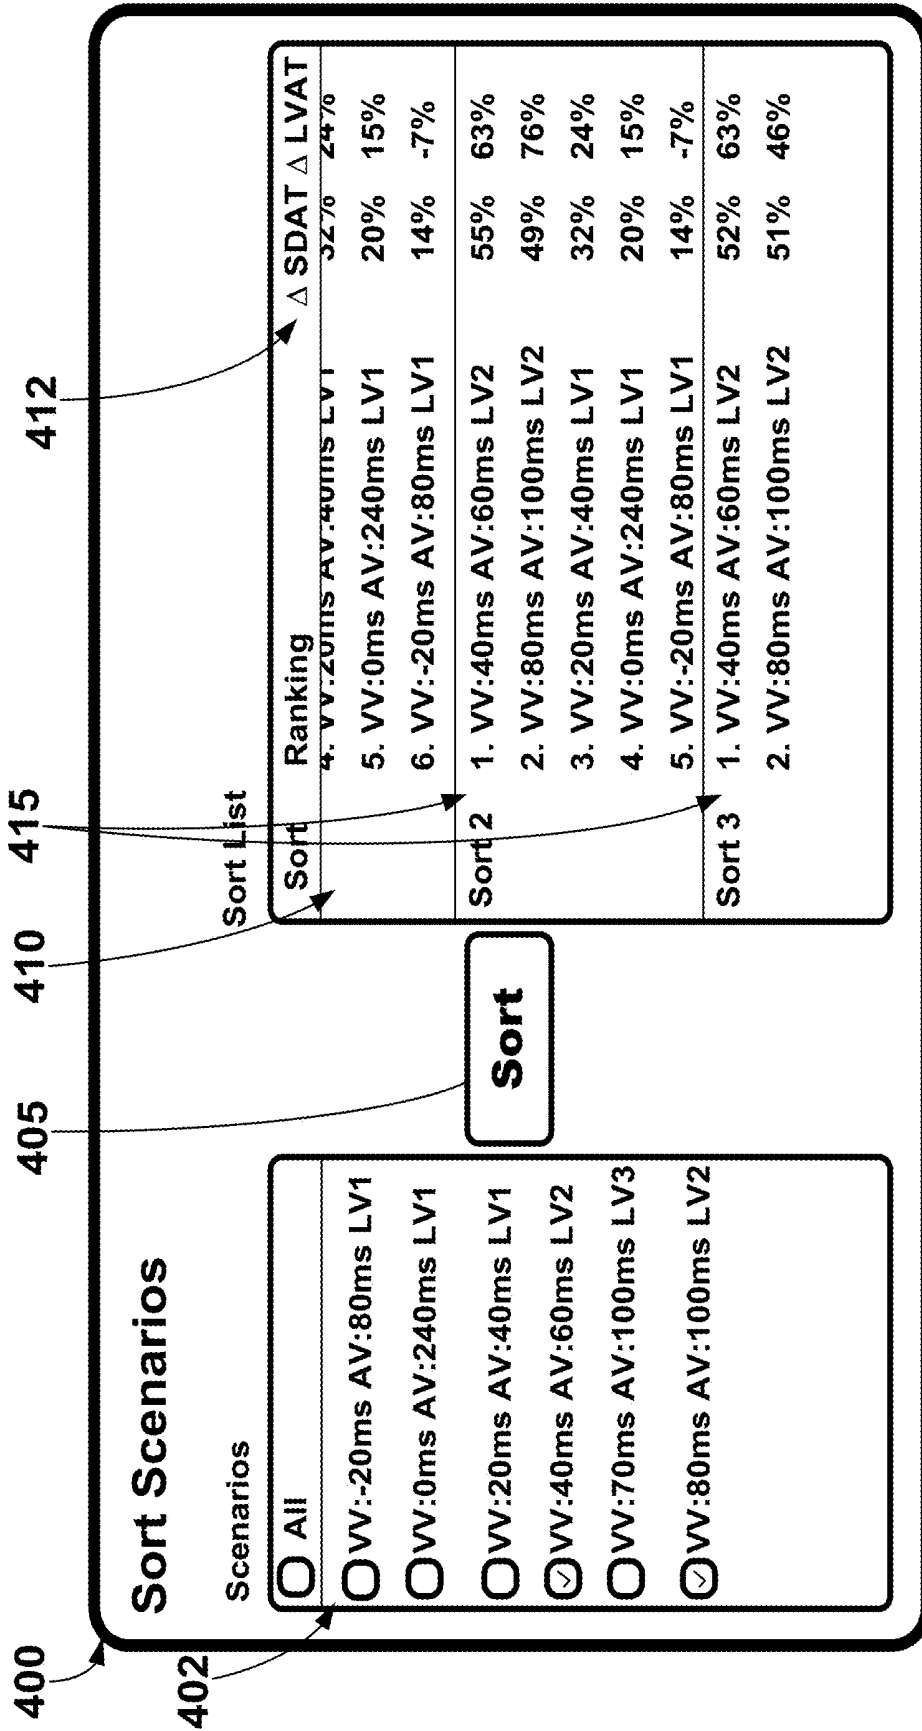


FIG. 8C

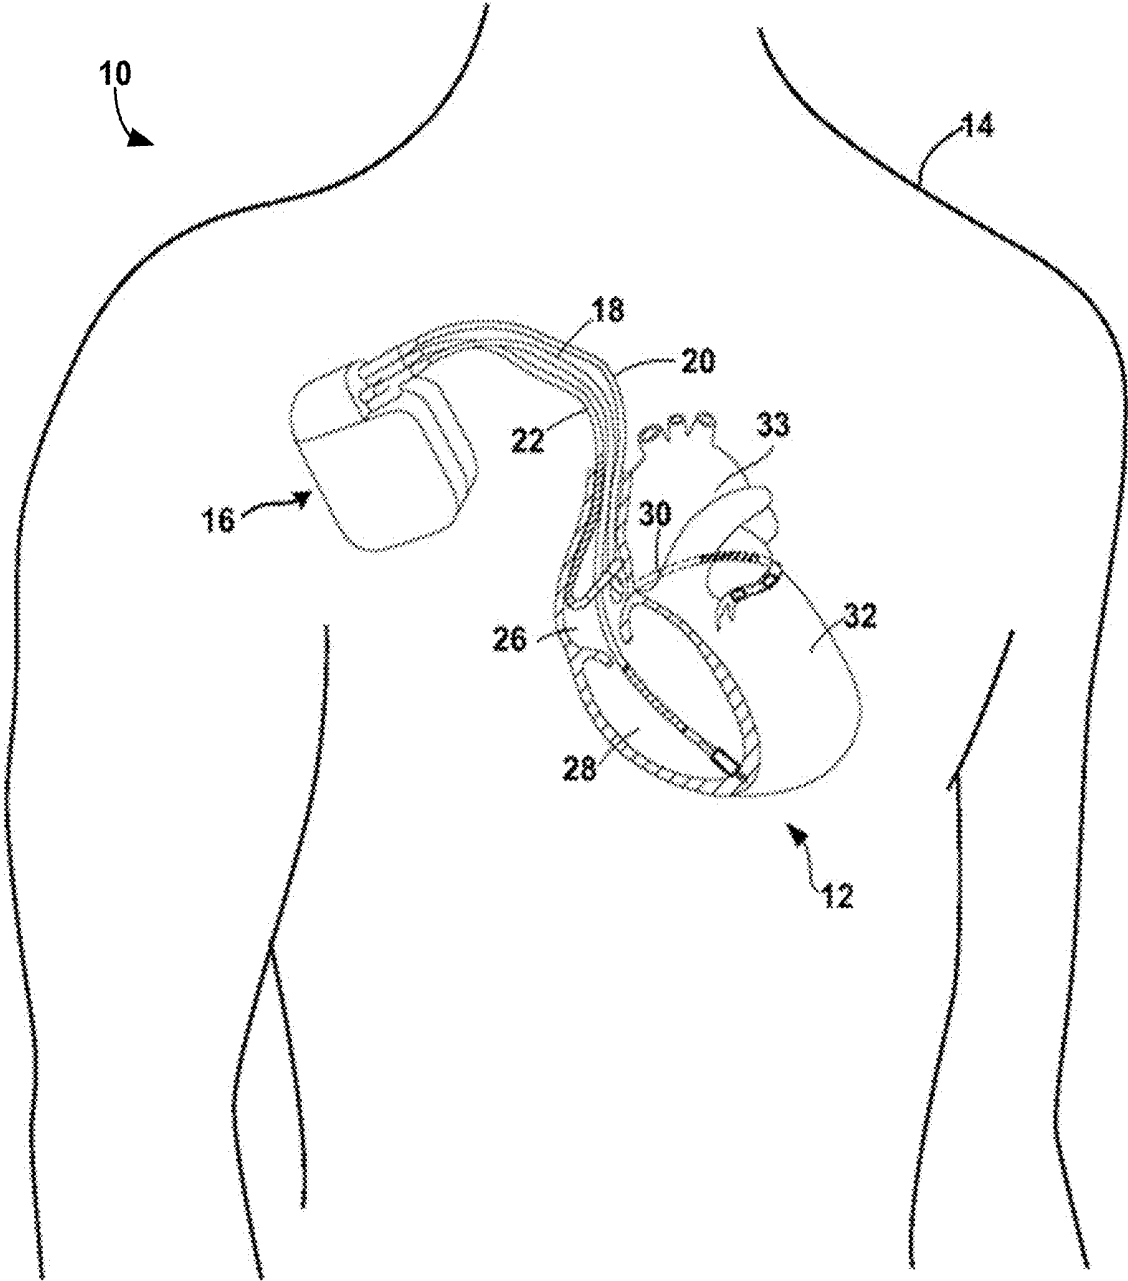


FIG. 9

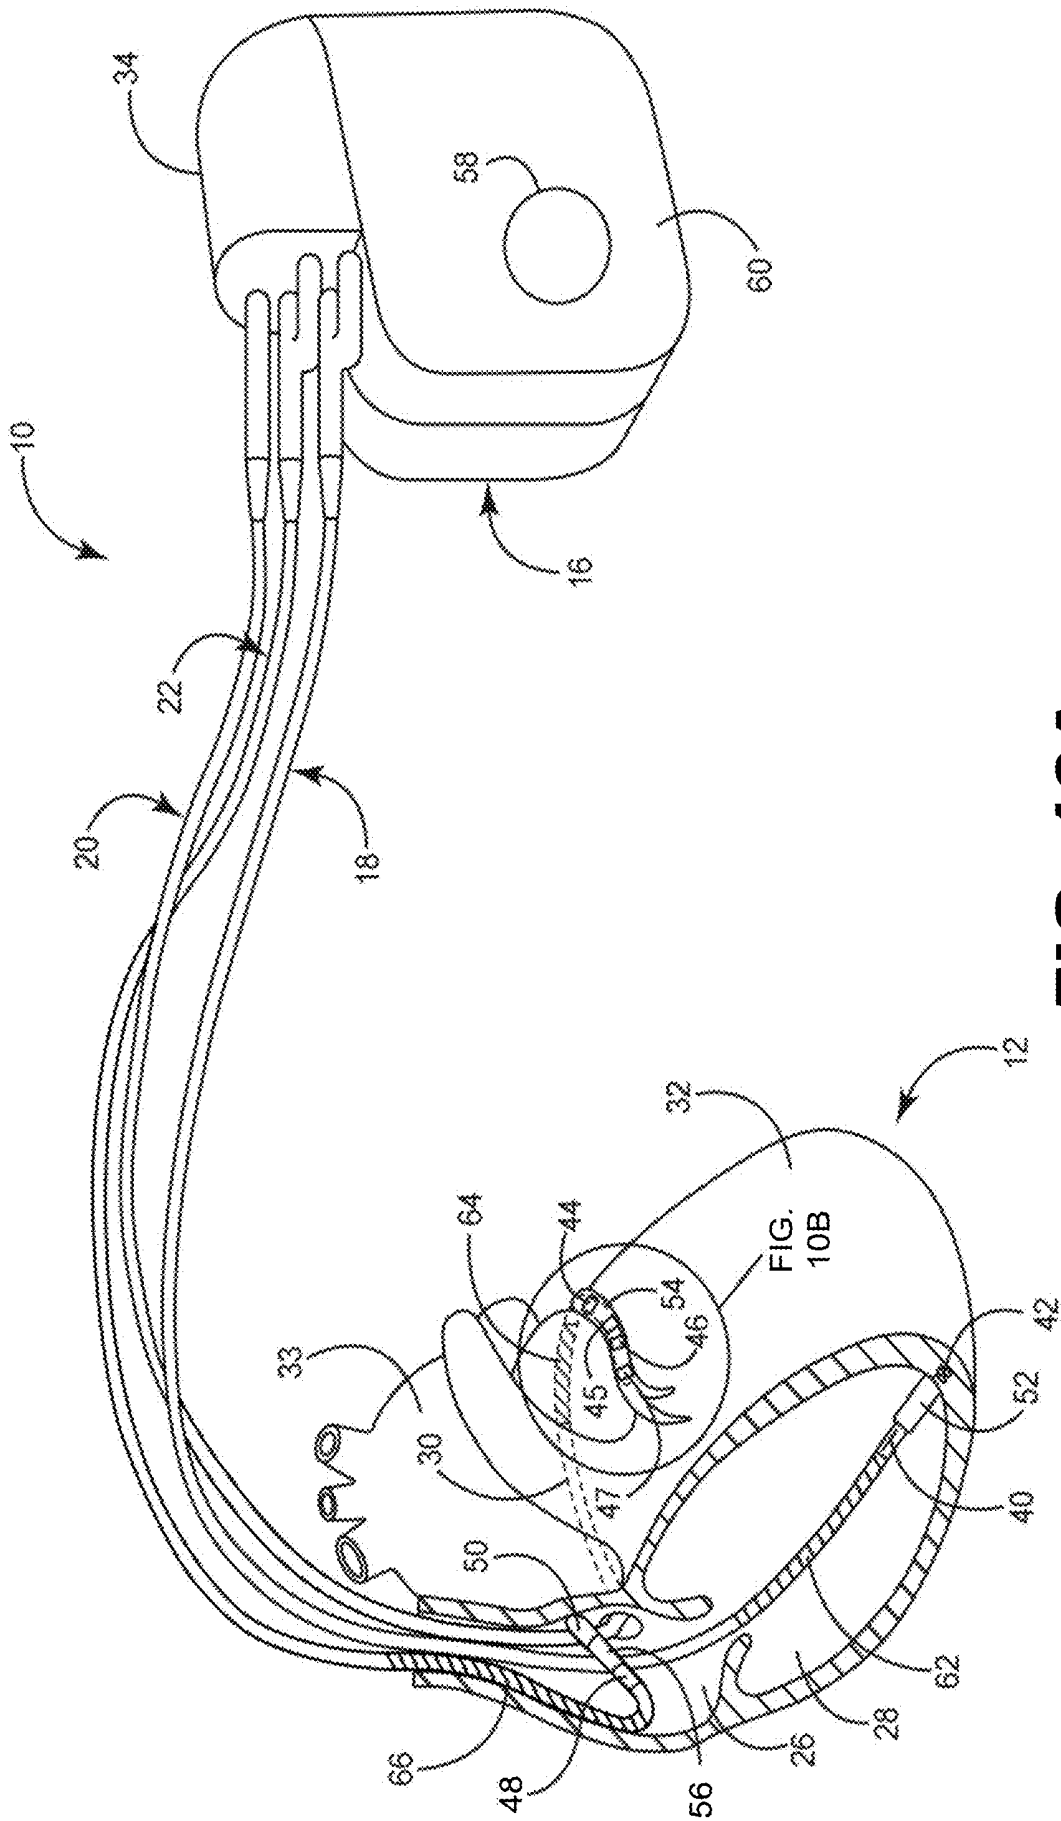


FIG. 10A

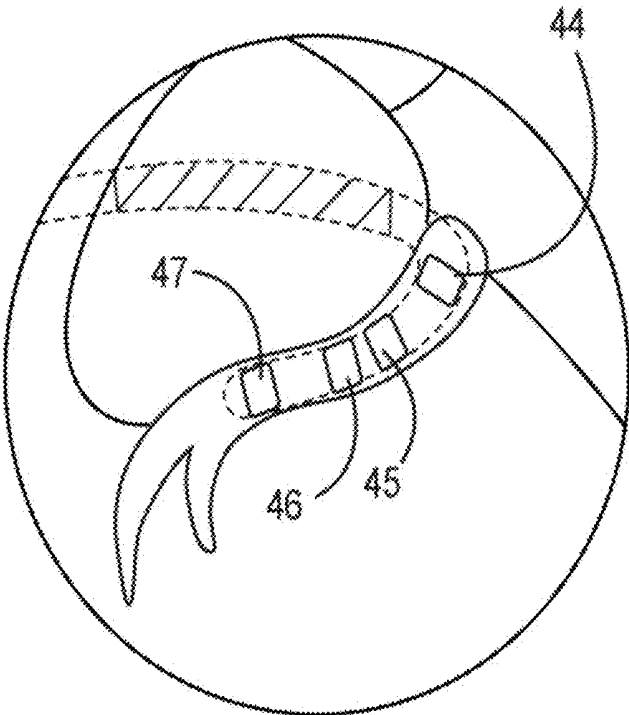


FIG. 10B

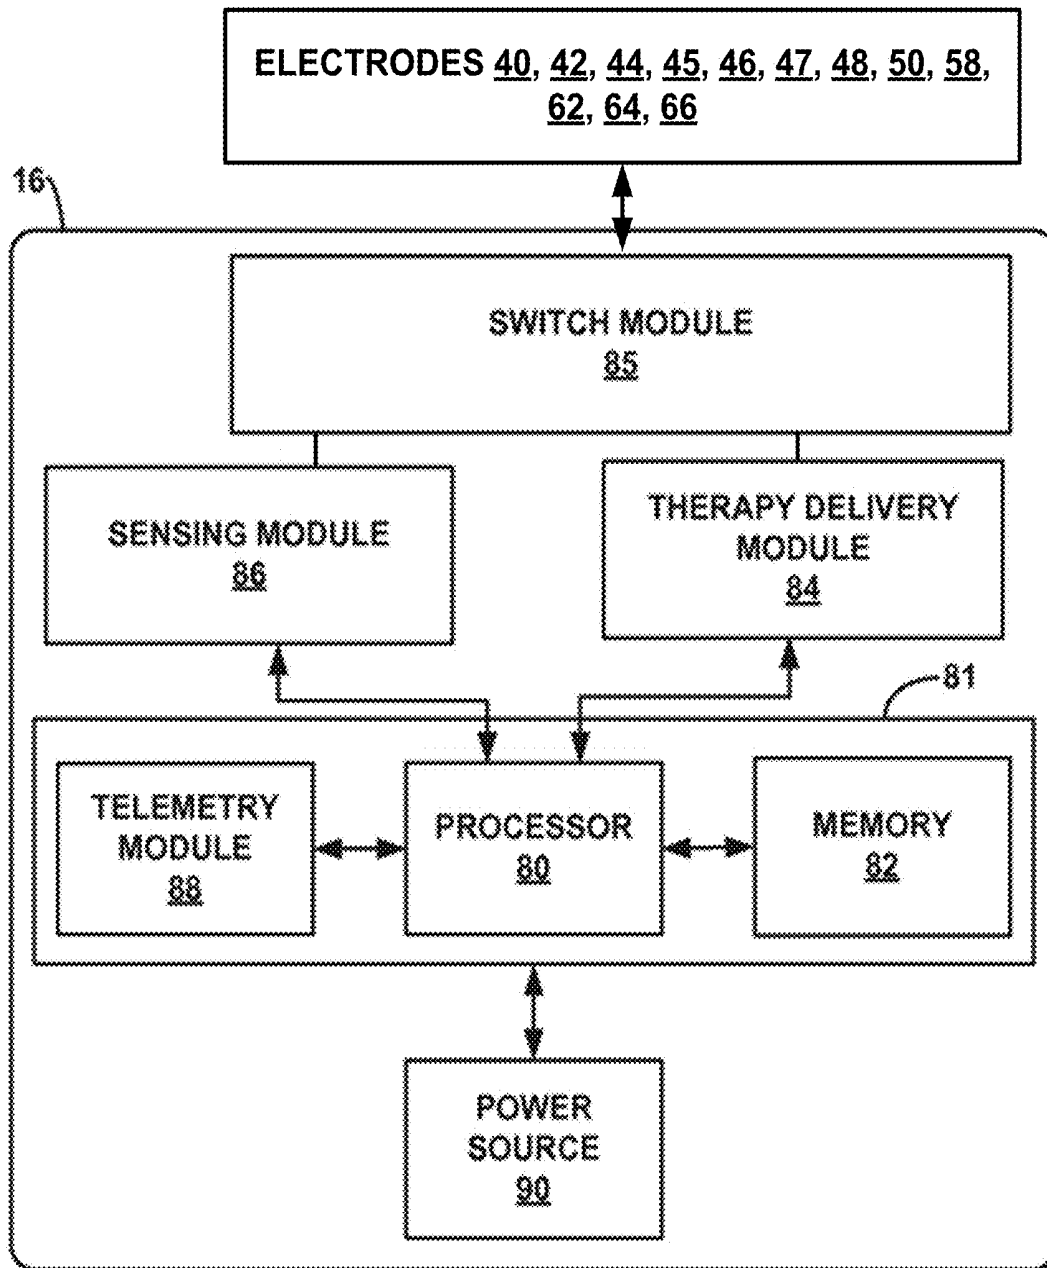


FIG. 11A

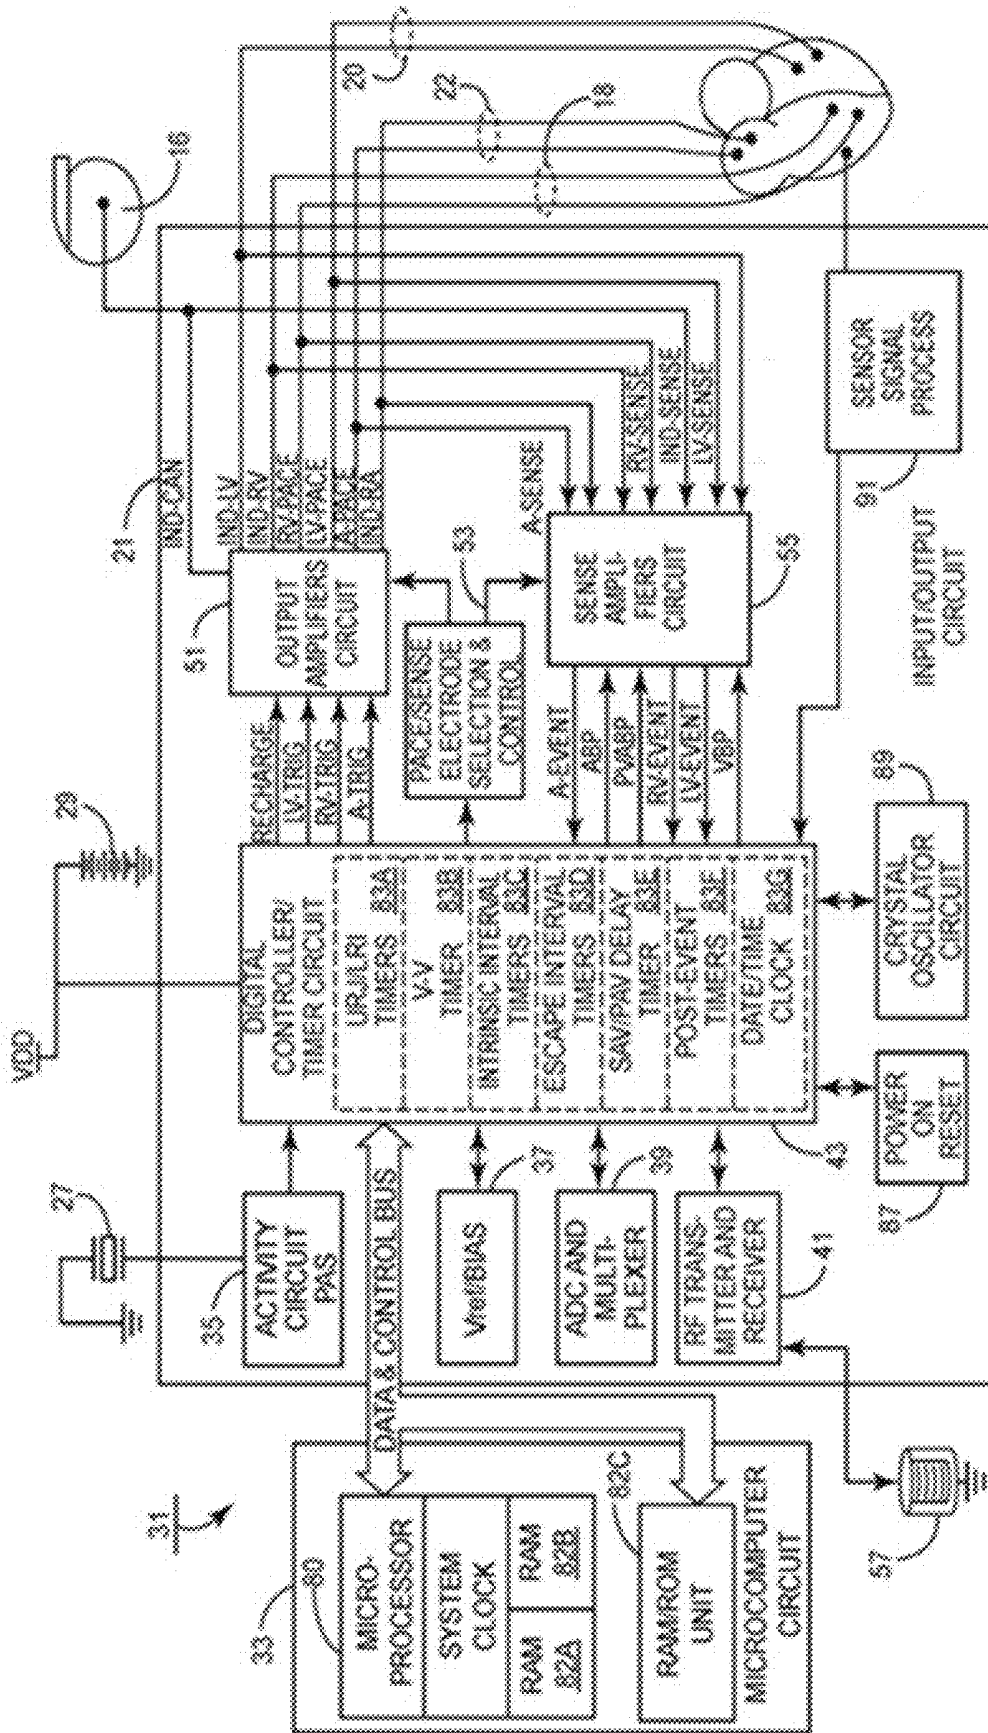


FIG. 11B

SYSTEMS, METHODS, AND INTERFACES FOR USE IN CARDIAC EVALUATION

[0001] The disclosure herein relates to systems, methods, and interfaces for use in cardiac evaluation using external electrode apparatus.

[0002] Implantable medical devices (IMDs), such as implantable pacemakers, cardioverters, defibrillators, or pacemaker-cardioverter-defibrillators, provide therapeutic electrical stimulation to the heart. IMDs may provide pacing to address bradycardia, or pacing or shocks in order to terminate tachyarrhythmia, such as tachycardia or fibrillation. In some cases, the medical device may sense intrinsic depolarizations of the heart, detect arrhythmia based on the intrinsic depolarizations (or absence thereof), and control delivery of electrical stimulation to the heart if arrhythmia is detected based on the intrinsic depolarizations.

[0003] IMDs may also provide cardiac resynchronization therapy (CRT), which is a form of pacing. CRT involves the delivery of pacing to the left ventricle, or both the left and right ventricles. The timing and location of the delivery of pacing pulses to the ventricle(s) may be selected to improve the coordination and efficiency of ventricular contraction.

[0004] Systems for implanting medical devices may include workstations or other equipment in addition to the implantable medical device itself. In some cases, these other pieces of equipment assist the physician or other technician with placing the intracardiac leads at particular locations on or in the heart. In some cases, the equipment provides information to the physician about the electrical activity of the heart and the location of the intracardiac lead.

SUMMARY

[0005] The exemplary systems, methods, and interfaces described herein may be configured to assist a user (e.g., a physician) in evaluating a patient and evaluating cardiac therapy (e.g., cardiac therapy being performed on a patient during and/or after implantation of cardiac therapy apparatus). In one or more embodiments, the systems, methods, and interfaces may be described as being noninvasive. For example, in some embodiments, the systems, methods, and interfaces may not need, or include, implantable devices such as leads, probes, sensors, catheters, implantable electrodes, etc. to monitor, or acquire, a plurality of cardiac signals from tissue of the patient for use in evaluating the patient and/or cardiac therapy being delivered to the patient. Instead, the systems, methods, and interfaces may use electrical measurements taken noninvasively using, e.g., a plurality of external electrodes attached to the skin of a patient about the patient's torso.

[0006] It may be described that the illustrative systems, methods, and interfaces may be able to, or are configured to, display a live, or interactive, feedback on electrode connectivity with a three-state status. The three-state statuses may include not in contact, poor signal, or good signal. In at least one embodiment, one or more processes, or algorithms, may involve monitoring signal characteristics of each of the electrodes to determine the three-status state of the electrode. An illustrative graphical user interface may depict, or display, a graphical map of a plurality of electrode graphical elements, each corresponding to a physical, external electrode attached, or coupled, to the patient. An effectiveness value such as a three-state status value or indicator may be displayed proximate (e.g., within, next to, as part of, etc.)

each of the electrode graphical elements such that, e.g., a user may quickly ascertain the effectiveness or status of each external electrode by viewing, or glancing upon, the illustrative graphical user interface.

[0007] Further, the illustrative systems, methods, and interfaces may include or may utilize one or more sorting processes, or algorithms, based on two or more metrics of electrical heterogeneity, or dyssynchrony, based on a plurality of external electrodes attached or coupled to the torso of a patient. For example, the processes may sort, or rank, cardiac resynchronization therapy settings based on improvements in the standard deviation of activation times (SDAT) and/or a statistic (e.g., average, media, etc.) of left ventricular activation times (LVAT) measured using the plurality of external electrodes. In at least one embodiment, SDAT may be used as the primary variable for sorting but, in case of two or more settings within a selected range (e.g., such as 3%) of SDAT improvement, LVAT may be further used to sort the two or more settings (e.g. to break the tie).

[0008] Still further, the illustrative systems, methods, and interfaces may include displaying electrode numbers on graphical maps of activation times and further indicating the electrodes where map data may have been interpolated due to missing signals. In one or more embodiments, activation times between two neighboring electrodes may be different due to lines of block, and an indication may be displayed on the graphical maps indicating the location of the block within the map. For example, adjacently-measured activation times may indicate a block if the activation times are different by a selected period of time (e.g., more than 50 milliseconds (ms)) (further, e.g., such adjacently-measured activation times may not be interpolated). The graphical map including lines of block may be used for implant guidance on where to place a lead.

[0009] The illustrative graphical user interfaces may be described as include a variety of different types of data displayed in a plurality of different ways. Some of the types of data may be indicative of the system status of the illustrative systems and methods described herein. For example, the illustrative graphical user interfaces may, or may be configured to, provide interactive feedback on status of electrode connection based on quality check of electrode signals, display the electrode layout on a torso model using different sizes of torso models fitting with different sized electrode apparatus (e.g., different sizes electrode belts or vest based on inputs of weight, height, gender, age, etc. to automatically select/recommend the appropriate size), adjust the location of the external electrodes on the model to match locations as applied to the torso, e.g., based on user input of patient measurements such as, e.g., chest circumference measurements, and determine which external electrodes are not in good contact, based on low amplitude or baseline wander (e.g., processes, or algorithms, may be utilized to find the baseline used for the analysis).

[0010] The illustrative graphical user interfaces may, or may be configured to, display color-coded activation maps (e.g., two-dimensional maps, torso model maps, etc.) with external electrodes with invalid signals marked, which include areas on the map that are interpolated due to missing electrodes/invalid signals. The illustrative graphical user interfaces may, or may be configured to, provide interpolation of electrical activation time data that is missing in areas based on activation times from neighboring electrodes or nearest neighbors with valid signals/activation times.

Further, various criteria for invalid electrodes may be used to determine missing electrodes or electrodes with invalid signals. Electrode (ECG) signals from at least one or multitude of channels may be selectable either automatically or through user interaction. Further, the beat on which the data was processed and displayed may be indicated on the graphical user interface, and a user may have the ability to override automatic selection and pick a different beat.

[0011] The illustrative graphical user interfaces may, or may be configured to, include two planar views of the activation maps such as an anterior planar view and a posterior planar view. Further, three-dimensional (3D) views may also be provided or displayed such as a left-lateral 3D view and a right-lateral 3D view. Further, such 3D view may be rotatable either automatically or through user interaction with the interface.

[0012] The illustrative graphical user interfaces may, or may be configured to, include a summary screen that displays, or depicts, activation maps of multiple different cardiac therapy settings with one or more options to rank selected cardiac therapy settings in order of improvement of electrical synchrony. Further, the summary screen could also include an activation map along with a physical map of lead pacing location. A user could select or input where the lead was placed or the electrode is pacing from (e.g., apical/mid-basal location in a posterior/posterior lateral/coronary sinus vein). The electrode apparatus and associated equipment may be wireless (e.g., Bluetooth communication) or wired communication with an implantable device, a programmer, and a tablet computer.

[0013] The illustrative systems, methods, and interfaces may further include an automated routine using a baseline (e.g., intrinsic or right ventricular pacing) rhythm of the patient and a left ventricle-only pacing and/or biventricular pacing at various atrioventricular and interventricular delays for different pacing vectors and sort settings (which, for example, may include a combination of timing and pacing vector). Processing and sensing circuitry including an amplifier may be described as collecting cardiac cycles simultaneously from the external electrodes and sending a chosen cardiac cycle for each setting to an implantable device or programmer for processing of activation times and determination of cardiac electrical dyssynchrony. In one example, the device may overdrive pace by a predetermined rate above the baseline rhythm for this evaluation.

[0014] The illustrative systems, methods, and interfaces may, or be configured to, sort selected settings according to improvements in metrics of electrical dyssynchrony such as, e.g., a standard deviation of activation times from all electrodes (SDAT) and average left ventricular activation time (LVAT). Further, certain settings may be automatically excluded in response to determination of high pacing thresholds and/or phrenic nerve stimulation.

[0015] In one or more embodiments, the cardiac therapy settings having, or with, a maximum reduction in SDAT and filters settings with SDAT reduction within 3% percentage points of the maximum reduction may be selected. Then, a maximum improvement in LVAT from the selected, or filtered, settings may be determined and the difference between LVAT improvements for each of the selected settings may be evaluated. Any setting that has an LVAT improvement that is less than about 30% points or more (or another designated amount) may be excluded/demoted. All the remaining settings may then be considered as options

for final programming of the cardiac therapy. Additionally, the sort settings may be further configured to optimize both device longevity and improvement from baseline, e.g., if two pacing sites are similarly beneficial hemodynamically, the pacing site with better device longevity may be selected. Conversely, if two pacing sites have similar device longevity, the one with better hemodynamics may be chosen.

[0016] It may be further described that the illustrative systems, methods, and interfaces may provide user with the means to record and save a five second ECG, SDAT, LVAT, and activation maps for intrinsic or RV paced rhythms. Further, the illustrative systems, methods, and interfaces may provide users with the means to record and save a 5 second ECG, % Δ in SDAT and LVAT from intrinsic or RV paced, and activation maps for various combinations of CRT settings (paced scenarios). Still further, the illustrative systems, methods, and interfaces may allow users to sort paced scenarios by % Δ in SDAT and LVAT from Intrinsic for each paced scenario, and may provide users with information to program the best CRT settings.

[0017] The above summary is not intended to describe each embodiment or every implementation of the present disclosure. A more complete understanding will become apparent and appreciated by referring to the following detailed description and claims taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIG. 1 is a diagram of an exemplary system including electrode apparatus, display apparatus, and computing apparatus.

[0019] FIGS. 2-3 are diagrams of exemplary external electrode apparatus for measuring torso-surface potentials.

[0020] FIG. 4 is an illustrative graphical user interface depicting electrode status information, e.g., for use with the systems and external electrode apparatus of FIGS. 1-3.

[0021] FIGS. 5A-5B are illustrative graphical user interfaces depicting, among other things, a graphical map of electrical activation, e.g., for use with the systems and external electrode apparatus of FIGS. 1-3.

[0022] FIG. 5C is the graphical user interface of FIG. 5B including an enlarged graphical region depicting a single cardiac cycle.

[0023] FIG. 6 is an illustrative graphical user interface depicting, among other things, a graphical map of electrical activation and cardiac therapy scenario graphical, e.g., for use with the systems and external electrode apparatus of FIGS. 1-3.

[0024] FIG. 7 is an illustrative graphical user interface depicting, among other things, a plurality of graphical maps of electrical activation corresponding to different cardiac therapy scenarios, e.g., for use with the systems and external electrode apparatus of FIGS. 1-3.

[0025] FIG. 8A is an illustrative graphical user interface for evaluation and sorting of cardiac therapy scenarios including a cardiac therapy scenario selection region, e.g., for use with the systems and external electrode apparatus of FIGS. 1-3.

[0026] FIG. 8B is an illustrative graphical user interface depicting a ranking of selected cardiac therapy scenarios from the cardiac therapy scenario selection region of FIG. 8A, e.g., for use with the systems and external electrode apparatus of FIGS. 1-3.

[0027] FIG. 8C is another illustrative graphical user interface depicting more rankings of selected cardiac therapy scenarios, e.g., for use with the systems and external electrode apparatus of FIGS. 1-3.

[0028] FIG. 9 is a diagram of an exemplary system including an exemplary implantable medical device (IMD).

[0029] FIG. 10A is a diagram of the exemplary IMD of FIG. 9.

[0030] FIG. 10B is a diagram of an enlarged view of a distal end of the electrical lead disposed in the left ventricle of FIG. 10A.

[0031] FIG. 11A is a block diagram of an exemplary IMD, e.g., of the systems of FIGS. 9-10.

[0032] FIG. 11B is another block diagram of an exemplary IMD (e.g., an implantable pulse generator) circuitry and associated leads employed in the systems of FIGS. 9-10.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

[0033] In the following detailed description of illustrative embodiments, reference is made to the accompanying figures of the drawing which form a part hereof, and in which are shown, by way of illustration, specific embodiments which may be practiced. It is to be understood that other embodiments may be utilized and structural changes may be made without departing from (e.g., still falling within) the scope of the disclosure presented hereby.

[0034] Exemplary systems, methods, and interfaces shall be described with reference to FIGS. 1-11. It will be apparent to one skilled in the art that elements or processes from one embodiment may be used in combination with elements or processes of the other embodiments, and that the possible embodiments of such systems, methods, and interfaces using combinations of features set forth herein is not limited to the specific embodiments shown in the Figures and/or described herein. Further, it will be recognized that the embodiments described herein may include many elements that are not necessarily shown to scale. Still further, it will be recognized that timing of the processes and the size and shape of various elements herein may be modified but still fall within the scope of the present disclosure, although certain timings, one or more shapes and/or sizes, or types of elements, may be advantageous over others.

[0035] A plurality of electrocardiogram (ECG) signals (e.g., torso-surface potentials) may be measured, or monitored, using a plurality of external electrodes positioned about the surface, or skin, of a patient. The ECG signals may be used to evaluate and configure cardiac therapy such as, e.g., cardiac therapy provide by an implantable medical device performing cardiac resynchronization therapy (CRT). As described herein, the ECG signals may be gathered or obtained noninvasively since, e.g., implantable electrodes may not be used to measure the ECG signals. Further, the ECG signals may be used to determine cardiac electrical activation times, which may be used to generate various metrics (e.g., electrical heterogeneity information) that may be used by a user (e.g., physician) to optimize one or more settings, or parameters, of cardiac therapy (e.g., pacing therapy) such as CRT.

[0036] Various exemplary systems, methods, and graphical user interfaces may be configured to use electrode apparatus including external electrodes, display apparatus, and computing apparatus to noninvasively assist a user (e.g., a physician) in the evaluation of cardiac health and/or the

configuration (e.g., optimization) of cardiac therapy. An exemplary system 100 including electrode apparatus 110, computing apparatus 140, and a remote computing device 160 is depicted in FIG. 1.

[0037] The electrode apparatus 110 as shown includes a plurality of electrodes incorporated, or included, within a band wrapped around the chest, or torso, of a patient 14. The electrode apparatus 110 is operatively coupled to the computing apparatus 140 (e.g., through one or wired electrical connections, wirelessly, etc.) to provide electrical signals from each of the electrodes to the computing apparatus 140 for analysis, evaluation, etc. Exemplary electrode apparatus may be described in U.S. Pat. No. 9,320,446 entitled "Bio-electric Sensor Device and Methods" filed Mar. 27, 2014 and issued on Mar. 26, 2016, which is incorporated herein by reference in its entirety. Further, exemplary electrode apparatus 110 will be described in more detail in reference to FIGS. 2-3.

[0038] Although not described herein, the exemplary system 100 may further include imaging apparatus. The imaging apparatus may be any type of imaging apparatus configured to image, or provide images of, at least a portion of the patient in a noninvasive manner. For example, the imaging apparatus may not use any components or parts that may be located within the patient to provide images of the patient except noninvasive tools such as contrast solution. It is to be understood that the exemplary systems, methods, and interfaces described herein may further use imaging apparatus to provide noninvasive assistance to a user (e.g., a physician) to locate, or place, one or more pacing electrodes proximate the patient's heart in conjunction with the configuration of cardiac therapy.

[0039] For example, the exemplary systems and methods may provide image guided navigation that may be used to navigate leads including electrodes, leadless electrodes, wireless electrodes, catheters, etc., within the patient's body while also providing noninvasive cardiac therapy configuration including determining an effective, or optimal, LVAD parameters A-V interval, etc. Exemplary systems and methods that use imaging apparatus and/or electrode apparatus may be described in U.S. Pat. App. Pub. No. 2014/0371832 to Ghosh published on Dec. 18, 2014, U.S. Pat. App. Pub. No. 2014/0371833 to Ghosh et al. published on Dec. 18, 2014, U.S. Pat. App. Pub. No. 2014/0323892 to Ghosh et al. published on Oct. 30, 2014, U.S. Pat. App. Pub. No. 2014/0323882 to Ghosh et al. published on Oct. 20, 2014, each of which is incorporated herein by reference in its entirety.

[0040] Exemplary imaging apparatus may be configured to capture x-ray images and/or any other alternative imaging modality. For example, the imaging apparatus may be configured to capture images, or image data, using isocentric fluoroscopy, bi-plane fluoroscopy, ultrasound, computed tomography (CT), multi-slice computed tomography (MSCT), magnetic resonance imaging (MRI), high frequency ultrasound (HIFU), optical coherence tomography (OCT), intra-vascular ultrasound (IVUS), two dimensional (2D) ultrasound, three dimensional (3D) ultrasound, four dimensional (4D) ultrasound, intraoperative CT, intraoperative MRI, etc. Further, it is to be understood that the imaging apparatus may be configured to capture a plurality of consecutive images (e.g., continuously) to provide video frame data. In other words, a plurality of images taken over time using the imaging apparatus may provide video frame, or motion picture, data. Additionally, the images may also be

obtained and displayed in two, three, or four dimensions. In more advanced forms, four-dimensional surface rendering of the heart or other regions of the body may also be achieved by incorporating heart data or other soft tissue data from a map or from pre-operative image data captured by MRI, CT, or echocardiography modalities. Image datasets from hybrid modalities, such as positron emission tomography (PET) combined with CT, or single photon emission computer tomography (SPECT) combined with CT, could also provide functional image data superimposed onto anatomical data, e.g., to be used to navigate implantable apparatus to target locations within the heart or other areas of interest.

[0041] Systems and/or imaging apparatus that may be used in conjunction with the exemplary systems and method described herein are described in U.S. Pat. App. Pub. No. 2005/0008210 to Evron et al. published on Jan. 13, 2005, U.S. Pat. App. Pub. No. 2006/0074285 to Zarkh et al. published on Apr. 6, 2006, U.S. Pat. No. 8,731,642 to Zarkh et al. issued on May 20, 2014, U.S. Pat. No. 8,861,830 to Brada et al. issued on Oct. 14, 2014, U.S. Pat. No. 6,980,675 to Evron et al. issued on Dec. 27, 2005, U.S. Pat. No. 7,286,866 to Okerlund et al. issued on Oct. 23, 2007, U.S. Pat. No. 7,308,297 to Reddy et al. issued on Dec. 11, 2011, U.S. Pat. No. 7,308,299 to Burrell et al. issued on Dec. 11, 2011, U.S. Pat. No. 7,321,677 to Evron et al. issued on Jan. 22, 2008, U.S. Pat. No. 7,346,381 to Okerlund et al. issued on Mar. 18, 2008, U.S. Pat. No. 7,454,248 to Burrell et al. issued on Nov. 18, 2008, U.S. Pat. No. 7,499,743 to Vass et al. issued on Mar. 3, 2009, U.S. Pat. No. 7,565,190 to Okerlund et al. issued on Jul. 21, 2009, U.S. Pat. No. 7,587,074 to Zarkh et al. issued on Sep. 8, 2009, U.S. Pat. No. 7,599,730 to Hunter et al. issued on Oct. 6, 2009, U.S. Pat. No. 7,613,500 to Vass et al. issued on Nov. 3, 2009, U.S. Pat. No. 7,742,629 to Zarkh et al. issued on Jun. 22, 2010, U.S. Pat. No. 7,747,047 to Okerlund et al. issued on Jun. 29, 2010, U.S. Pat. No. 7,778,685 to Evron et al. issued on Aug. 17, 2010, U.S. Pat. No. 7,778,686 to Vass et al. issued on Aug. 17, 2010, U.S. Pat. No. 7,813,785 to Okerlund et al. issued on Oct. 12, 2010, U.S. Pat. No. 7,996,063 to Vass et al. issued on Aug. 9, 2011, U.S. Pat. No. 8,060,185 to Hunter et al. issued on Nov. 15, 2011, and U.S. Pat. No. 8,401,616 to Verard et al. issued on Mar. 19, 2013, each of which is incorporated herein by reference in its entirety.

[0042] The computing apparatus 140 and the remote computing device 160 may each include display apparatus 130, 160, respectively, that may be configured to display and analyze data such as, e.g., electrical signals (e.g., electrocardiogram data), electrical activation times, electrical heterogeneity information, etc. For example, one cardiac cycle, or one heartbeat, of a plurality of cardiac cycles, or heartbeats, represented by the electrical signals collected or monitored by the electrode apparatus 110 may be analyzed and evaluated for one or more metrics including activation times and electrical heterogeneity information that may be pertinent to the therapeutic nature of one or more parameters related to cardiac therapy such as, e.g., pacing parameters, lead location, etc. More specifically, for example, the QRS complex of a single cardiac cycle may be evaluated for one or more metrics such as, e.g., QRS onset, QRS offset, QRS peak, electrical heterogeneity information, electrical activation times, left ventricular or thoracic standard deviation of electrical activation times (LVED), standard deviation of activation-times (SDAT), average left ventricular or thoracic

surrogate electrical activation times (LVAT), referenced to earliest activation time, QRS duration (e.g., interval between QRS onset to QRS offset), difference between average left surrogate and average right surrogate activation times, relative or absolute QRS morphology, difference between a higher percentile and a lower percentile of activation times (higher percentile may be 90%, 80%, 75%, 70%, etc. and lower percentile may be 10%, 15%, 20%, 25% and 30%, etc.), other statistical measures of central tendency (e.g., median or mode), dispersion (e.g., mean deviation, standard deviation, variance, interquartile deviations, range), etc. Further, each of the one or more metrics may be location specific. For example, some metrics may be computed from signals recorded, or monitored, from electrodes positioned about a selected area of the patient such as, e.g., the left side of the patient, the right side of the patient, etc.

[0043] In at least one embodiment, one or both of the computing apparatus 140 and the remote computing device 160 may be a server, a personal computer, or a tablet computer. The computing apparatus 140 may be configured to receive input from input apparatus 142 (e.g., a keyboard) and transmit output to the display apparatus 130, and the remote computing device 160 may be configured to receive input from input apparatus 162 (e.g., a touchscreen) and transmit output to the display apparatus 170. One or both of the computing apparatus 140 and the remote computing device 160 may include data storage that may allow for access to processing programs or routines and/or one or more other types of data, e.g., for analyzing a plurality of electrical signals captured by the electrode apparatus 110, for determining QRS onsets, QRS offsets, medians, modes, averages, peaks or maximum values, valleys or minimum values, for determining electrical activation times, for driving a graphical user interface configured to noninvasively assist a user in configuring one or more pacing parameters, or settings, such as, e.g., pacing rate, ventricular pacing rate, A-V interval, V-V interval, pacing pulse width, pacing vector, multipoint pacing vector (e.g., left ventricular vector quad lead), pacing voltage, pacing configuration (e.g., biventricular pacing, right ventricle only pacing, left ventricle only pacing, etc.), and arrhythmia detection and treatment, rate adaptive settings and performance, etc. Further, in at least one embodiment, one or both of the computing apparatus 140 and the remote computing device 160 may include data storage that may allow for access to processing programs or routines and/or one or more other types of data, e.g., for driving a graphical user interface configured to noninvasively assist a user in configuring one or more cardiac therapy parameters, or settings, such as LVAD pump speed, LVAD pump throughput, LVAD pump power, LVAD pump current, pump inflow gimbal angle, automatic algorithmic responses to events such as pump suction, patient activity level changes, and physiologic parameter inputs, enabling/disabling periodic pump speed modulation features such as the Lavare cycle.

[0044] The computing apparatus 140 may be operatively coupled to the input apparatus 142 and the display apparatus 130 to, e.g., transmit data to and from each of the input apparatus 142 and the display apparatus 130, and the remote computing device 160 may be operatively coupled to the input apparatus 162 and the display apparatus 170 to, e.g., transmit data to and from each of the input apparatus 162 and the display apparatus 170. For example, the computing apparatus 140 and the remote computing device 160 may be

electrically coupled to the input apparatus **142**, **162** and the display apparatus **130**, **170** using, e.g., analog electrical connections, digital electrical connections, wireless connections, bus-based connections, network-based connections, internet-based connections, etc. As described further herein, a user may provide input to the input apparatus **142**, **162** to view and/or select one or more pieces of configuration information related to the cardiac therapy delivered by cardiac therapy apparatus such as, e.g., an implantable medical device.

[0045] Although as depicted the input apparatus **142** is a keyboard and the input apparatus **162** is a touchscreen, it is to be understood that the input apparatus **142**, **162** may include any apparatus capable of providing input to the computing apparatus **140** and the computing device **160** to perform the functionality, methods, and/or logic described herein. For example, the input apparatus **142**, **162** may include a keyboard, a mouse, a trackball, a touchscreen (e.g., capacitive touchscreen, a resistive touchscreen, a multi-touch touchscreen, etc.), etc. Likewise, the display apparatus **130**, **170** may include any apparatus capable of displaying information to a user, such as a graphical user interface **132**, **172** including electrode status information, graphical maps of electrical activation, a plurality of signals for the external electrodes over one or more heartbeats, QRS complexes, various cardiac therapy scenario selection regions, various rankings of cardiac therapy scenarios, various pacing parameters, electrical heterogeneity information, textual instructions, graphical depictions of anatomy of a human heart, images or graphical depictions of the patient's heart, graphical depictions of locations of one or more electrodes, graphical depictions of a human torso, images or graphical depictions of the patient's torso, graphical depictions or actual images of implanted electrodes and/or leads, etc. Further, the display apparatus **130**, **170** may include a liquid crystal display, an organic light-emitting diode screen, a touchscreen, a cathode ray tube display, etc.

[0046] The processing programs or routines stored and/or executed by the computing apparatus **140** and the remote computing device **160** may include programs or routines for computational mathematics, matrix mathematics, decomposition algorithms, compression algorithms (e.g., data compression algorithms), calibration algorithms, image construction algorithms, signal processing algorithms (e.g., various filtering algorithms, Fourier transforms, fast Fourier transforms, etc.), standardization algorithms, comparison algorithms, vector mathematics, or any other processing used to implement one or more exemplary methods and/or processes described herein. Data stored and/or used by the computing apparatus **140** and the remote computing device **160** may include, for example, electrical signal/waveform data from the electrode apparatus **110** (e.g., a plurality of QRS complexes), electrical activation times from the electrode apparatus **110**, cardiac sound/signal/waveform data from acoustic sensors, graphics (e.g., graphical elements, icons, buttons, windows, dialogs, pull-down menus, graphic areas, graphic regions, 3D graphics, etc.), graphical user interfaces, results from one or more processing programs or routines employed according to the disclosure herein (e.g., electrical signals, electrical heterogeneity information, etc.), or any other data that may be used for carrying out the one and/or more processes or methods described herein.

[0047] In one or more embodiments, the exemplary systems, methods, and interfaces may be implemented using

one or more computer programs executed on programmable computers, such as computers that include, for example, processing capabilities, data storage (e.g., volatile or non-volatile memory and/or storage elements), input devices, and output devices. Program code and/or logic described herein may be applied to input data to perform functionality described herein and generate desired output information. The output information may be applied as input to one or more other devices and/or methods as described herein or as would be applied in a known fashion.

[0048] The one or more programs used to implement the systems, methods, and/or interfaces described herein may be provided using any programmable language, e.g., a high-level procedural and/or object orientated programming language that is suitable for communicating with a computer system. Any such programs may, for example, be stored on any suitable device, e.g., a storage media, that is readable by a general or special purpose program running on a computer system (e.g., including processing apparatus) for configuring and operating the computer system when the suitable device is read for performing the procedures described herein. In other words, at least in one embodiment, the exemplary systems, methods, and interfaces may be implemented using a computer readable storage medium, configured with a computer program, where the storage medium so configured causes the computer to operate in a specific and predefined manner to perform functions described herein. Further, in at least one embodiment, the exemplary systems, methods, and interfaces may be described as being implemented by logic (e.g., object code) encoded in one or more non-transitory media that includes code for execution and, when executed by a processor or processing circuitry, is operable to perform operations such as the methods, processes, and/or functionality described herein.

[0049] The computing apparatus **140** and the remote computing device **160** may be, for example, any fixed or mobile computer system (e.g., a controller, a microcontroller, a personal computer, minicomputer, tablet computer, etc.). The exact configurations of the computing apparatus **140** and the remote computing device **160** are not limiting, and essentially any device capable of providing suitable computing capabilities and control capabilities (e.g., signal analysis, mathematical functions such as medians, modes, averages, maximum value determination, minimum value determination, slope determination, minimum slope determination, maximum slope determination, graphics processing, etc.) may be used. As described herein, a digital file may be any medium (e.g., volatile or non-volatile memory, a CD-ROM, a punch card, magnetic recordable tape, etc.) containing digital bits (e.g., encoded in binary, trinary, etc.) that may be readable and/or writeable by the computing apparatus **140** and the remote computing device **160** described herein. Also, as described herein, a file in user-readable format may be any representation of data (e.g., ASCII text, binary numbers, hexadecimal numbers, decimal numbers, graphically, etc.) presentable on any medium (e.g., paper, a display, etc.) readable and/or understandable by a user.

[0050] In view of the above, it will be readily apparent that the functionality as described in one or more embodiments according to the present disclosure may be implemented in any manner as would be known to one skilled in the art. As such, the computer language, the computer system, or any other software/hardware which is to be used to implement

the processes described herein shall not be limiting on the scope of the systems, processes, or programs (e.g., the functionality provided by such systems, processes, or programs) described herein.

[0051] The exemplary electrode apparatus 110 may be configured to measure body-surface potentials of a patient 14 and, more particularly, torso-surface potentials of a patient 14. As shown in FIG. 2, the exemplary electrode apparatus 110 may include a set, or array, of external electrodes 112, a strap 113, and interface/amplifier circuitry 116. The electrodes 112 may be attached, or coupled, to the strap 113 and the strap 113 may be configured to be wrapped around the torso of a patient 14 such that the electrodes 112 surround the patient's heart. As further illustrated, the electrodes 112 may be positioned around the circumference of a patient 14, including the posterior, lateral, posterolateral, anterolateral, and anterior locations of the torso of a patient 14.

[0052] The exemplary electrode apparatus 110 may be further configured to measure, or monitor, sounds from at least one or both the patient 14. As shown in FIG. 2, the exemplary electrode apparatus 110 may include a set, or array, of acoustic sensors 120 attached, or coupled, to the strap 113. The strap 113 may be configured to be wrapped around the torso of a patient 14 such that the acoustic sensors 120 surround the patient's heart. As further illustrated, the acoustic sensors 120 may be positioned around the circumference of a patient 14, including the posterior, lateral, posterolateral, anterolateral, and anterior locations of the torso of a patient 14.

[0053] Further, the electrodes 112 and the acoustic sensors 120 may be electrically connected to interface/amplifier circuitry 116 via wired connection 118. The interface/amplifier circuitry 116 may be configured to amplify the signals from the electrodes 112 and the acoustic sensors 120 and provide the signals to one or both of the computing apparatus 140 and the remote computing device 160. Other exemplary systems may use a wireless connection to transmit the signals sensed by electrodes 112 and the acoustic sensors 120 to the interface/amplifier circuitry 116 and, in turn, to one or both of the computing apparatus 140 and the remote computing device 160, e.g., as channels of data. In one or more embodiments, the interface/amplifier circuitry 116 may be electrically coupled to the computing apparatus 140 using, e.g., analog electrical connections, digital electrical connections, wireless connections, bus-based connections, network-based connections, internet-based connections, etc.

[0054] Although in the example of FIG. 2 the electrode apparatus 110 includes a strap 113, in other examples any of a variety of mechanisms, e.g., tape or adhesives, may be employed to aid in the spacing and placement of electrodes 112 and the acoustic sensors 120. In some examples, the strap 113 may include an elastic band, strip of tape, or cloth. Further, in some examples, the strap 113 may be part of, or integrated with, a piece of clothing such as, e.g., a t-shirt. In other examples, the electrodes 112 and the acoustic sensors 120 may be placed individually on the torso of a patient 14. Further, in other examples, one or both of the electrodes 112 (e.g., arranged in an array) and the acoustic sensors 120 (e.g., also arranged in an array) may be part of, or located within, patches, vests, and/or other manners of securing the electrodes 112 and the acoustic sensors 120 to the torso of the patient 14. Still further, in other examples, one or both

of the electrodes 112 and the acoustic sensors 120 may be part of, or located within, two sections of material or two patches. One of the two patches may be located on the anterior side of the torso of the patient 14 (to, e.g., monitor electrical signals representative of the anterior side of the patient's heart, measure surrogate cardiac electrical activation times representative of the anterior side of the patient's heart, monitor or measure sounds of the anterior side of the patient, etc.) and the other patch may be located on the posterior side of the torso of the patient 14 (to, e.g., monitor electrical signals representative of the posterior side of the patient's heart, measure surrogate cardiac electrical activation times representative of the posterior side of the patient's heart, monitor or measure sounds of the posterior side of the patient, etc.). And still further, in other examples, one or both of the electrodes 112 and the acoustic sensors 120 may be arranged in a top row and bottom row that extend from the anterior side of the patient 14 across the left side of the patient 14 to the anterior side of the patient 14. Yet still further, in other examples, one or both of the electrodes 112 and the acoustic sensors 120 may be arranged in a curve around the armpit area and may have an electrode/sensor-density that less dense on the right thorax than the other remaining areas.

[0055] The electrodes 112 may be configured to surround the heart of the patient 14 and record, or monitor, the electrical signals associated with the depolarization and repolarization of the heart after the signals have propagated through the torso of a patient 14. Each of the electrodes 112 may be used in a unipolar configuration to sense the torso-surface potentials that reflect the cardiac signals. The interface/amplifier circuitry 116 may also be coupled to a return or indifferent electrode (not shown) that may be used in combination with each electrode 112 for unipolar sensing.

[0056] In some examples, there may be about 12 to about 50 electrodes 112 and about 12 to about 50 acoustic sensors 120 spatially distributed around the torso of a patient. Other configurations may have more or fewer electrodes 112 and more or fewer acoustic sensors 120. It is to be understood that the electrodes 112 and acoustic sensors 120 may not be arranged or distributed in an array extending all the way around or completely around the patient 14. Instead, the electrodes 112 and acoustic sensors 120 may be arranged in an array that extends only part of the way or partially around the patient 14. For example, the electrodes 112 and acoustic sensors 120 may be distributed on the anterior, posterior, and left sides of the patient with less or no electrodes and acoustic sensors proximate the right side (including posterior and anterior regions of the right side of the patient).

[0057] The computing apparatus 140 may record and analyze the torso-surface potential signals sensed by electrodes 112 and the sound signals sensed by the acoustic sensors 120, which are amplified/conditioned by the interface/amplifier circuitry 116. The computing apparatus 140 may be configured to analyze the electrical signals from the electrodes 112 to provide electrocardiogram (ECG) signals, information, or data from the patient's heart as will be further described herein. The computing apparatus 140 may be configured to analyze the electrical signals from the acoustic sensors 120 to provide sound signals, information, or data from the patient's body and/or devices implanted therein (such as a left ventricular assist device).

[0058] Additionally, the computing apparatus 140 and the remote computing device 160 may be configured to provide

graphical user interfaces **132**, **172** depicting various information related to the electrode apparatus **110** and the data gathered, or sensed, using the electrode apparatus **110**. For example, the graphical user interfaces **132**, **172** may depict ECGs including QRS complexes obtained using the electrode apparatus **110** and sound data including sound waves obtained using the acoustic sensors **120** as well as other information related thereto. Exemplary systems and methods may noninvasively use the electrical information collected using the electrode apparatus **110** and the sound information collected using the acoustic sensors **120** to evaluate a patient's cardiac health and to evaluate and configure cardiac therapy being delivered to the patient.

[0059] Further, the electrode apparatus **110** may further include reference electrodes and/or drive electrodes to be, e.g. positioned about the lower torso of the patient **14**, that may be further used by the system **100**. For example, the electrode apparatus **110** may include three reference electrodes, and the signals from the three reference electrodes may be combined to provide a reference signal. Further, the electrode apparatus **110** may use of three caudal reference electrodes (e.g., instead of standard references used in a Wilson Central Terminal) to get a "true" unipolar signal with lesser noise from averaging three caudally located reference signals.

[0060] FIG. 3 illustrates another exemplary electrode apparatus **110** that includes a plurality of electrodes **112** configured to surround the heart of the patient **14** and record, or monitor, the electrical signals associated with the depolarization and repolarization of the heart after the signals have propagated through the torso of the patient **14** and a plurality of acoustic sensors **120** configured to surround the heart of the patient **14** and record, or monitor, the sound signals associated with the heart and/or an implanted device such as the LVAD after the signals have propagated through the torso of the patient **14**. The electrode apparatus **110** may include a vest **114** upon which the plurality of electrodes **112** and the plurality of acoustic sensors **120** may be attached, or to which the electrodes **112** and the acoustic sensors **120** may be coupled. In at least one embodiment, the plurality, or array, of electrodes **112** may be used to collect electrical information such as, e.g., surrogate electrical activation times. Similar to the electrode apparatus **110** of FIG. 2, the electrode apparatus **110** of FIG. 3 may include interface/amplifier circuitry **116** electrically coupled to each of the electrodes **112** and the acoustic sensors **120** through a wired connection **118** and be configured to transmit signals from the electrodes **112** and the acoustic sensors **120** to computing apparatus **140**. As illustrated, the electrodes **112** and the acoustic sensors **120** may be distributed over the torso of a patient **14**, including, for example, the posterior, lateral, posterolateral, anterolateral, and anterior locations of the torso of a patient **14**.

[0061] The vest **114** may be formed of fabric with the electrodes **112** and the acoustic sensors **120** attached to the fabric. The vest **114** may be configured to maintain the position and spacing of electrodes **112** and the acoustic sensors **120** on the torso of the patient **14**. Further, the vest **114** may be marked to assist in determining the location of the electrodes **112** and the acoustic sensors **120** on the surface of the torso of the patient **14**. In some examples, there may be about 25 to about 256 electrodes **112** and about 25 to about 256 acoustic sensors **120** distributed around the

torso of the patient **14**, though other configurations may have more or fewer electrodes **112** and more or fewer acoustic sensors **120**.

[0062] The exemplary systems and methods may be used to provide noninvasive assistance to a user in the evaluation of a patient's cardiac health and/or evaluation and configuration of cardiac therapy being presently-delivered to the patient (e.g., by an implantable medical device, by a LVAD, etc.). For example, the exemplary systems and methods may be used to assist a user in the configuration and/or adjustment of one or more cardiac therapy settings such as, e.g., optimization of the A-V interval, or delay, of pacing therapy (e.g., left univentricular pacing therapy). Further, for example, the exemplary systems and methods may be used to assist a user in the configuration and/or adjustment of one or more cardiac therapy settings for LVAD-delivered cardiac therapy.

[0063] Further, it is to be understood that the computing apparatus **140** and the remote computing device **160** may be operatively coupled to each other in a plurality of different ways so as to perform, or execute, the functionality described herein. For example, in the embodiment depicted, the computing device **140** may be wireless operably coupled to the remote computing device **160** as depicted by the wireless signal lines emanating therebetween. Additionally, as opposed to wireless connections, one or more of the computing apparatus **140** and the remote computing device **160** may be operably coupled through one or wired electrical connections.

[0064] Illustrative graphical user interfaces that may be used to monitor information related to or gathered using the electrode apparatus (e.g., external electrodes about a patient's torso) described herein are depicted in FIGS. 4-8. For example, each of the graphical user interfaces of FIGS. 4-8 may be displayed, or depicted, on the graphical user interfaces **132**, **172** of the displays **130**, **170** of the computing apparatus **140** and the remote computing device **150**.

[0065] An illustrative graphical user interface **200** depicting electrode status information is depicted in FIG. 4. The graphical user interface **200** may include, among other things, a graphical electrode map **202** depicting information related to each of the physical electrodes of the electrode apparatus described herein with respect to FIGS. 1-3. More specifically, in this embodiment, the graphical electrode map **202** includes a plurality of electrode graphical elements **204** (some which are labeled in FIG. 4) corresponding to and positioned on the graphical map **202** in relation to the physical location of the physical electrodes located proximate the patient's skin. Although, in this embodiment, each electrode graphical element **204** is generally represented by a circle, it is to be understood that different graphics, or graphical representations, may be used to represent each physical electrode.

[0066] Each electrode graphical **204** may include a number within a circle, which may correspond to a number printed on each of the physical electrodes. As shown, the graphical electrode elements **204** are numbered one through forty. Further, the graphical electrode map **204** may further include one or more graphical reference electrode elements **209** that correspond to physical reference electrodes. As shown, four graphical reference electrode elements **209** are depicted on the graphical electrode map **202**: more specifically, an anterior right side graphical reference electrode element, an anterior left side graphical reference electrode

element, a posterior right side graphical reference electrode element, and a posterior right side graphical reference electrode element.

[0067] In this embodiment, the graphical electrode map 202 may extend from a left portion 210 to a right portion 212. A middle portion 211 may be located between the left portion 210 and the right portion 212. The left portion 210 may correspond to the anterior side of the patient, the right portion 212 may correspond to the posterior side of the patient, and the middle portion 211 may correspond to the left side of the patient. In other words, the graphical map 202 visually represent the physical electrodes wrapping around the patient from the anterior to the patient's left side to the patient's posterior.

[0068] Each electrode graphical element 204 may correspond to a physical electrode of the electrode apparatus described herein with respect to FIGS. 1-3. Due to various reasons (e.g., malfunction, poor contact, etc.), the physical electrodes may not provide an adequate, or acceptable, signal to be effectively used to derive electrical activity from the patient to be used in cardiac evaluation and cardiac therapy evaluation and adjustment. Each electrode graphical element 204 as well as the reference electrode graphical elements 209 may provide an effectiveness value proximate thereto, for example, indicate or represent the effectiveness of the corresponding physical electrode in providing a valid sensing signal from the tissue of the patient.

[0069] In this embodiment, each electrode graphical element 204 may have one of three different effectiveness values. In other words, each of the electrode graphical elements may have one of three states to indicate the effectiveness of the corresponding physical electrode in providing a valid sensing signal from the tissue of the patient. A physical electrode that is not in contact with tissue so as to not provide a valid sensing signal may be represented by a dotted-line circle and an exclamation mark positioned within the dotted-line circle. A physical electrode that is in contact with tissue but provides a poor signal so has to not provide a valid sensing signal may be represented by a dashed-line circle and a question mark positioned within the dashed-line circle. A physical electrode that is in contact with tissue so as to provide a valid sensing signal may be represented by a solid-line circle. As shown, electrodes 3 and 14 have poor signal, and thus, the corresponding electrode graphical elements 204 are dashed-line circles with a question mark positioned within the dashed-line circles. Further, electrodes 13 and 39 are not in contact (e.g., no signal), and thus, the corresponding electrode graphical elements 204 are dotted-line circles with an exclamation mark positioned within the dotted-line circles.

[0070] In other embodiments, the effectiveness values may be represented using different graphics, or graphical representations, or using different colors or animations. For example, a physical electrode that is not in contact with tissue so as to not provide a valid sensing signal may be represented by a red circle, a physical electrode that is in contact with tissue but provides a poor signal so as to not provide a valid sensing signal may be represented by a yellow circle, and a physical electrode that is in contact with tissue so as to provide a valid sensing signal may be represented by a green circle.

[0071] In one example, more specifically, determination of the ECG signals that should be flagged as "red" or "yellow" on the system status screen may be accomplished by creat-

ing a series of 1-second windows and removing any signals that are "lead off" per the amplifier at any measured point during a 1-second window. If they are "lead off" in at least 2 of 3 consecutive windows, then such signals may be flagged as "red." Next, the remaining signals may be de-trended using various processes. Then, within each 1-second window, any signals with peak-to-peak amplitude <0.12 millivolts (mV) may be removed and flagged as "potential yellow." Further, the standard deviation across all remaining signals at each time point may be calculated, and the standard deviation slope at each time point=absolute value difference between successive standard deviations may also be calculated. Using a 200 ms rolling window, the area under the curve of the standard deviation slopes may be determined, and 200 ms window with the minimum area under the curve may be identified or found. Within the 200 ms window, a rolling 100 ms window may be used to calculate the area under the curve of the standard deviation slopes, and the 100 ms window with the minimum area under the curve may be identified or found. Still further, the peak-to-peak amplitude of each signal in the 100 ms window may be calculated, and any remaining signals with peak-to-peak amplitude >2.5*median peak-to-peak amplitude may be flagged as "potential yellow." For each series of 3 consecutive windows, the remaining signals flagged as "potential yellow" may be identified in at least 2 windows and flagged as "yellow."

[0072] Further, determination of whether the electrode status is acceptable for recording and calculating metrics/activation maps may be accomplished through the following processes. First, exclude any electrode that is indicated as "lead off" or poor signal. Second, exclude any electrode where both neighbors were excluded in the first step. Third, if any of the following conditions are true, electrode contact is "unacceptable": any reference electrode or the drive electrode is indicated as "lead-off" per the amplifier; more than two of electrodes 1-4 and 37-40 are excluded; more than two of electrodes 5-8 and 33-36 are excluded; more than two of electrodes 9-12 and 29-32 are excluded; more than two of electrodes 13-16 and 25-28 are excluded; more than two of electrodes 17-24 are excluded; more than one of electrodes 33-37 are excluded. If none of those conditions are true the electrode contact for the system may be considered "acceptable."

[0073] A key 205 may be provided on the graphical user interface 200 proximate the graphical electrode map 202 to provide examples of the various effectiveness values, or states, of the electrode graphical elements 204. As shown, the key 205 includes one of each of different effectiveness values in this example: not in contact, poor signal, and good signal.

[0074] The graphical electrode map 202 may further include, or define, one or more principle electrodes graphical regions 220 to indicate which of the electrode graphical elements 204 correspond to physical electrodes that are considered to be the most principle electrodes (e.g., important electrodes, critical electrodes, etc.). In this example, the principle electrodes graphical regions 220 may include a cross-hatched, or shaded, background about the electrode graphical elements 204 corresponding to the most significant electrodes. In other words, the principal electrodes graphical regions 220 may be referred to as critical electrodes regions to indicate which of the physical electrodes may be critical to obtaining electrical activity signals, or data, from the

patient to evaluate the patient's cardiac health and cardiac therapy being delivered to the patient.

[0075] As shown, the principle electrodes graphical region 220 has identified five electrode graphical elements 204 corresponding to physical electrodes positioned proximate the patient's left-central anterior. These physical electrodes may be determined to be significant because they provide the most significant electrical signals from the patient for use in evaluating the patient's cardiac health and cardiac therapy being delivered to the patient. The key 205, as shown, may further provide an example of the principle electrode regions. In this example, the principle electrode regions may be referred to as "Critical Electrodes." In one or more embodiments, one or more (e.g., all) of the plurality of reference electrodes may be considered to be principle electrodes, and thus, a principle electrodes graphical region 220 may be positioned about the reference electrode graphical elements 209.

[0076] Additionally, the illustrative graphical user interface 200 may include a global electrode connection status message 222 indicative of the state of the plurality of physical electrodes providing valid sensing signal from the tissue of the patient. The global electrode connection status message 222 may be generated by determining how many of the physical electrodes are providing a good signal versus how many of the physical electrodes are providing a poor signal or are not in contact. If a selected number of the physical electrodes are determined as providing a good signal, the global electrode connection status message 222 may provide a message such as, e.g., "Good Contact" and a checkmark within a circle. As shown, if a selected number of the physical electrodes are determined as not providing a good signal, the global electrode connection status message 222 may provide a message such as, e.g., "Issues Found" and a "X" within a circle. Still further, the illustrative graphical user interface 200 may include an amplifier status indicator 224. As shown, the amplifier status indicator 224 has a checkmark within a circle to indicate that the amplifier is connected and working properly.

[0077] Illustrative graphical user interfaces 250 depicting, among other things, a graphical map of electrical activation 252 are shown in FIGS. 5A-5C. In one or more embodiments, the graphical map of electrical activation 252 may be a color-coded, or gray-scaled, two-dimensional map representing the electrical activation about a portion of the surface of a patient's torso. In the example depict in FIGS. 5A-5C, the graphical map of electrical activation 252 includes an anterior area 254 depicting the activation times measured about the anterior torso of the patient and a posterior area 256 depicting the activation times measured about the posterior torso of the patient.

[0078] The electrical activation data depicted on the graphical map of electrical activation 252 may be referred to as surrogate electrical activation data (e.g., surrogate electrical activation times, surrogate electrical activation time maps, etc.) and may be defined as data representative of actual, or local, electrical activation data of one or more regions of the patient's heart. For example, electrical signals measured at the left anterior surface location of a patient's torso may be representative, or surrogates, of electrical signals of the left anterior left ventricle region of the patient's heart, electrical signals measured at the left lateral surface location of a patient's torso may be representative, or surrogates, of electrical signals of the left lateral left

ventricle region of the patient's heart, electrical signals measured at the left posterolateral surface location of a patient's torso may be representative, or surrogates, of electrical signals of the posterolateral left ventricle region of the patient's heart, and electrical signals measured at the posterior surface location of a patient's torso may be representative, or surrogates, of electrical signals of the posterior left ventricle region of the patient's heart.

[0079] The graphical map of electrical activation 252 may be further described as extending from a left portion corresponding to anterior side of the patient to a middle portion corresponding to the left side of the patient to a right portion corresponding to the posterior side of the patient. The right side of the anterior area 254 may correspond to the left anterior region of the torso of the patient, and the left side of the anterior area 254 may correspond to the right anterior region of the torso of the patient. Thus, the electrical signal data such as electrical activation measured from the right anterior region of the torso of the patient (e.g., using electrodes positioned on the right anterior region of the torso of the patient) may be depicted on left side of the anterior area 254, and the electrical signal data such as electrical activation measured from the left anterior region of the torso of the patient (e.g., using electrodes positioned on the left anterior region of the torso of the patient) may be depicted on right side of the anterior area 254.

[0080] The right side of the posterior area 256 may correspond to the right posterior region of the torso of the patient, and the left side of the posterior area 256 may correspond to the left posterior region of the torso of the patient. Thus, the electrical signal data such as electrical activation measured from the right posterior region of the torso of the patient (e.g., using electrodes positioned on the right posterior region of the torso of the patient) may be depicted on right side of the posterior area 256, and the electrical signal data such as electrical activation measured from the left posterior region of the torso of the patient (e.g., using electrodes positioned on the left posterior region of the torso of the patient) may be depicted on left side of the posterior area 256.

[0081] The graphical map of electrical activation 252 may further include an electrical activation key 259 for use in interpreting, or decoding, the anterior and posterior areas 254, 256 of electrical activation. As shown, the electrical activation key 259 may be a color-coded, or gray-scaled, in the same way as the anterior and posterior areas 254, 256.

[0082] Further, the graphical user interfaces 250 may include, or depict, a plurality of electrode signals 260 over a plurality of cardiac cycles. More specifically, as shown, the plurality of electrode signals 260 may be described as being graphed, or plotted, over time where the y-axis represents voltage of the electrode signals 260 and the x-axis represents time in milliseconds. The electrode signals 260 may be plotted for a plurality of cardiac cycles (e.g., continuous cardiac cycles), each of which may be numerically labeled. As shown, five cardiac cycles number one through 5 are depicted. Additionally, the cardiac cycles may be plotted over a selected time period regardless of how many cardiac cycles occur within the selected time period. In one embodiment, the selected time period may be five seconds.

[0083] A cardiac cycle, or beat, may be selected, and the selected cardiac cycle may be indicated as being selected within the plurality of electrodes signals 260 over the plurality of cardiac cycles. In this example, the selected

cardiac cycle is indicated by being bounded by a pair of solid vertical lines 262 (e.g., shown between red calipers). In one or more embodiments the solid vertical lines 262 may represent or correspond to the onset and offset of the selected cardiac cycle (e.g., QRS onset/offset). The cardiac cycle may be automatically selected by the illustrative systems and process described herein, e.g., selected to be the best representation of useful data. As shown, cardiac cycle “2” has been automatically selected as indicated by the word “Auto” in the cardiac cycle selection region 264. In one or more embodiments, the cardiac cycle that is determined to be most typical, or more representative, of the patient’s cardiac health or status may be selected. Automatic cardiac cycle selection may be described in U.S. Provisional Patent Application, Ser. No. 62/538,337 filed on Jul. 28, 2017, and entitled “Cardiac Cycle Selection,” which is herein incorporated by reference in its entirety.

[0084] The cardiac cycle selection region 264 may be further used by a user to select one of the cardiac cycles of plurality of electrode signals 260. For example, a user may select (e.g., click, touch, etc.) the cardiac cycle selection region 264, which may then display a dialog include the remaining cardiac cycles that may be selectable by a user. If a new cardiac cycle is selected, the new cardiac cycle may be indicated as being selected within the cardiac cycle selection region 264 in the same way as the previously selected cardiac cycle (e.g., bounded by a pair of solid vertical lines). It is to be understood that this embodiment is one example of cardiac cycle selection and indication and that other graphical dialogs, regions, and areas may be used to select a cardiac cycle. For example, in one embodiment, a user may select a cardiac cycle by selecting (e.g., click, touch, etc.) the cardiac cycle, or the numerical identifier corresponding thereto, on the graphical representation of the plurality of electrode signals 260 on the graphical user interface 250. In other words, a user may directly select cardiac cycle on the graph depicting the cardiac cycles.

[0085] The graphical map of electrical activation 252 corresponds to the electrical activation of the selected cardiac cycle. Thus, in this example, the graphical map of electrical activation 252 corresponds to the electrical activation of cardiac cycle “2.” If another cardiac cycle were selected by a user using the cardiac cycle selection region 264 or automatically by the systems and methods described herein, the graphical map of electrical activation 252 depicted on the graphical user interface 250 will change so as to correspond to the electrical activation of the newly selected cardiac cycle. In other words, the graphical map of electrical activation 252 may be displayed based on the monitored electrical activity for the selected cardiac cycle.

[0086] As shown in FIG. 5B, the graphical user interface 250 may be further configured to display a plurality of electrode elements 272 corresponding to and positioned on the graphical map of electrical activation 252 in relation to the physical location of the plurality of electrodes located proximate the patient’s skin (which, e.g., are used to capture electrical activation data displayed on the graphical map 252). As shown in this example, the plurality of electrode elements 272 are alphanumeric characters (e.g., numbers) identifying the electrodes. The electrodes attached, or coupled, to the patient may also be numbered, which may correspond to the electrode elements 272.

[0087] The electrode elements 272 may be displayed by a user selecting an electrode element display region 270 of the

graphical user interface 250 as shown in FIG. 5A. When the electrode elements 272 are displayed as shown in FIG. 5B, the electrode element display region 270 may be selected to hide the electrode elements 272 (e.g., return to the interface 250 of FIG. 5A). In other words, the exemplary systems, methods, and interfaces may allow a user to hide or display the plurality of electrode elements 272 using, e.g., the electrode element display region 270.

[0088] Additionally, which of the plurality of electrode elements 272 corresponds to electrodes that are ineffective in providing a valid sensing signal from the tissue of the patient may be graphically indicated within the graphical map of electrical activation 252. In the example depicted in FIG. 5B, the ineffective electrode elements 274 that correspond to ineffective electrodes are a different color from the electrode elements 272 that are effective. Further, the electrode elements 274 that correspond to ineffective electrodes are encircled by a box. In this way, a user may be able to quickly identify which of the plurality of electrodes are ineffective and effective, and where within the graphical map of electrical activation 252 such electrode effective or ineffective electrode signals are derived from. As shown, electrodes 3, 13, 14, and 39 are indicated as being ineffective, which corresponds to the interface 200 of FIG. 4 where electrodes 13 and 39 were not in contact and electrodes 3 and 14 had poor signal.

[0089] Further, when electrodes, and therefore, the electrode signals derived therefrom are determined to be ineffective, the exemplary systems, methods, and interfaces described herein may be configured to interpolate the electrical activation of each area of the graphical map 252 of electrical activation corresponding to such ineffective external electrodes. Thus, when used in conjunction with the depiction of ineffective electrode elements 274, a user may ascertain that the electrical activation depiction on the graphical map 252 corresponding to ineffective electrode elements 274 may not be based on actual, measured electrical activation at that location, and instead, may be based on interpolated data from effective electrode signals proximate to the ineffective electrodes.

[0090] More specifically, the activation maps may be created by interpolating a 2-by-20 matrix of activation times by first using an inverse distance-weighted interpolation step followed by a two-dimensional bi-cubic interpolation method. Further, for each electrode (e.g., iterated over all electrodes), (a) if an electrode is marked as valid, the activation time is directly used in the bi-cubic interpolation step or (b) if an electrode is marked as invalid, find all valid electrodes within the same belt plane (anterior or posterior). The contribution of each valid electrode to the interpolation is its activation time value may be weighted by the inverse of the distance squared from the invalid electrode using the following:

$$AT_{invalid} = \sum_{k=1}^N \frac{\left(\frac{1}{dist_k}\right)^2 \times AT_{k,valid}}{\left(\frac{1}{dist_k}\right)^2}$$

Where

$$dist_k = \sqrt{(x_{invalid} - x_{k,valid})^2 + (y_{invalid} - y_{k,valid})^2}$$

[0091] Next, using the 2×20 array of activation times, for each set of 2×2 neighboring points that form a ‘unit square’, a system of 16 equations may be solved to find 16 coefficients of a two-dimensional polynomial function that can find the interpolated value at any fractional part within the unit square. Then, such processes may be repeated for all possible neighboring 2×2 point sets.

[0092] In one or more embodiments, one or more areas of conduction block may be depicted on the graphical map of electrical activation 252 based on the monitored electrical activity for the selected cardiac cycle. For example, the conduction block may be indicated by a thick colored line on the graphical map of electrical activation 252. In other embodiments, the conduction block may be represented by a “break” in the graphical map of electrical activation 252. For example, different portions or areas of the graphical map of electrical activation 252 may be split off from one another such that a space or gap exists between the split off portions or areas.

[0093] The graphical user interface 250 may further display at least one metric of electrical heterogeneity 271 based on the monitored electrical activity for the selected cardiac cycle. As shown, the metrics of electrical heterogeneity 271 depicted are SDAT and LVAT. The SDAT may be defined as the global standard deviation of surrogate electrical activation times monitored by a plurality of external electrodes. The LVAT may be defined as an average of electrical activation times monitored by two or more left external electrodes (e.g., two or more left external electrodes configured to be located proximate the left side of the patient).

[0094] A user may desire to more closely view the selected cardiac cycle of the plurality of electrode signals 262. Thus, the interface 250 may be further configured to depict an enlarged graphical region 280 depicting a single cardiac cycle. Similar to as shown in FIGS. 5A-5B the enlarged graphical region 280 depicts the plurality of electrode signals 260 and a pair of solid vertical lines 262 bounding, or identifying, the selected cardiac cycle, which in this example is cardiac cycle “2.” Further, in one or more embodiments the solid vertical lines 262 may represent or correspond to the onset and offset of the selected cardiac cycle (e.g., QRS onset/offset). To display the enlarged graphical region 280, a user may select the magnifying glass graphical element 282 as depicted in FIGS. 5A-5B. To minimize, or close, the enlarged graphical region 280, a user may select the close graphical element 284 of the enlarged graphical region 280 depicted in FIG. 5C, which will return the user to the interface as provided in FIGS. 5A-5B.

[0095] The graphical user interface 250 may be further configured to depict measured electrical activity for a plurality of different cardiac therapy scenarios including no cardiac therapy delivered or intrinsic activation. For example, as shown in FIGS. 5A-5B, the graphical user interface 250 is depicting intrinsic cardiac electrical activation of the patient. In other words, no cardiac therapy was delivered to the patient when the electrical signal data that is currently being displayed was monitored or measured from the patient. The graphical user interface 250 may include a cardiac therapy scenario graphical region 290, which may be useable by a user to select none or one or more various cardiac therapy scenarios. For each different selected cardiac therapy scenario, the graphical user interface 250 may display the plurality of electrode signals 260 over a plurality of cardiac cycles corresponding to the

selected cardiac therapy scenario, and the graphical map of electrical activation 252 will correspond to the selected cardiac cycle of the plurality of electrode signals 260 of, or corresponding to, the selected cardiac therapy scenario.

[0096] For example, in FIGS. 5A-5B, the selected cardiac therapy scenario is “intrinsic” where no cardiac therapy (e.g., no cardiac resynchronization therapy) is being delivered to the patient, and thus, the plurality of electrode signals 260 and the graphical map of electrical activation 252 are based on electrical activity measured, or monitored, without the delivery of cardiac therapy (e.g., based on intrinsic activation). However, a user may select a different cardiac therapy scenario using the cardiac therapy scenario graphical region 290. For example, as shown in FIGS. 5A-5B, a user may select a RV-paced cardiac therapy scenario (e.g., also where no cardiac resynchronization therapy is being delivered).

[0097] An illustrative graphical user interface 250 depicting, among other things, a plurality of electrode signals 260, a graphical map of electrical activation 252, and a cardiac therapy scenario selection region 290 where cardiac therapy has been selected is depicted in FIG. 6. As shown, a cardiac therapy scenario has been selected in this embodiment, and more specifically, cardiac therapy has been selected where the LV-RV, or V-V, delay is 0 milliseconds (ms), the A-V delay is 160 ms, and the pacing site is LV1 (e.g., a particular electrode of a lead). Thus, the plurality of electrode signals 260 and the graphical map of electrical activation 252 correspond to the electrical data measured, or monitored, from a patient during the selected cardiac therapy scenario, which as described in this example is cardiac therapy that utilizes a V-V delay of 0 ms, an A-V delay of 120 ms, and the LV1 pacing site.

[0098] As shown in FIG. 6, the cardiac therapy scenario selection region 290 may include a plurality of various cardiac therapy settings. In this example, the plurality of various cardiac therapy settings include at least one of pacing configuration (e.g., RV-LV, LV-RV, LV only, RV only, etc.), V-V delay, A-V delay, LV pacing site, and adaptive cardiac resynchronization therapy (ACRT). In other examples, the plurality of various cardiac therapy settings may include one or more of multipoint pacing, LV-LV delay, etc.

[0099] In some embodiments, when a cardiac therapy scenario is changed or modified by a user, the delivered cardiac therapy may be changed in real time, and the monitored electrical activity upon which the electrical data depicted in the graphical user interface 250 may be updated in real time. In other words, the systems, methods, and interfaces described herein may provide adjustment of cardiac therapy and real-time feedback from such adjustment of cardiac therapy.

[0100] In other embodiments, the electrical data may be measured and recorded for each of the plurality of different cardiac therapy scenarios, and when a user selects a cardiac therapy scenario, the electrical data depicted in the graphical user interface 250 may be updated based on the data measured and recorded previously using the selected cardiac therapy scenario. In other words, the systems, methods, and interfaces described herein may provide evaluation of a plurality of different cardiac therapy scenarios after such data for such different cardiac therapy scenarios has been monitored and recorded.

[0101] Additionally, the illustrative systems, methods, and interfaces may be a hybrid of both systems where the data for a cardiac therapy scenario may be monitored and displayed in real time while the cardiac therapy is being adjusted, and then optionally recorded and saved for later viewing. For example, the graphical user interface 250 may include a record and save graphical elements 295 that may be used to record and save monitored electrical activity for a particular cardiac therapy scenario and a view saved scenario graphical region 296 that may be used to select previously recorded and saved electrical activation data for a particular cardiac therapy scenario. In particular, the record graphical element may initiate the recording of a patient's electrical activation using the external electrode apparatus over a selected time period such as five seconds, and the save graphical element may allow such recorded data to be saved for use in further analysis. As shown, the view saved scenario graphical region 296 includes one cardiac therapy scenario: namely, intrinsic. Selection of the intrinsic cardiac therapy scenario may depict, or display, the electrical activation data of FIGS. 5A-5B.

[0102] As noted herein, the cardiac cycle (e.g., from which the graphical map of electrical activation 252 and metrics of electrical heterogeneity 271 are derived from) may be automatically selected by the illustrative systems and methods. In one embodiment, selecting one cardiac cycle of the plurality of cardiac cycles may include selecting the cardiac cycle of the plurality of cardiac cycles having characteristics (e.g., median, minimum, maximum, and/or summed signal amplitude characteristics) that represent the patient's typical or representative cardiac cycle.

[0103] Additionally, the illustrative graphical user interface 250 may include an electrode selection graphical region 285 that may be used by a user to select an electrode set of a plurality of different electrode sets of the plurality of external electrodes to be used for the measurement of electrical data for display on the graphical user interface 250. For example, the plurality of electrode signals 260 over the plurality of cardiac cycles that is displayed may only include electrode signals of the selected electrode set, and the displayed graphical map of electrical activation 252 may be based on the monitored electrical activity from only electrode signals of the selected electrode set. The electrode sets may include all valid signals, which as shown in FIGS. 5A-B & 6 is presently selected, and thus, all electrode signals were used to generate the maps of electrical activation and calculate the metrics of electrical heterogeneity. In other embodiments, the electrode sets may include only anterior signals, only posterior signals, only left anterior signals, only left posterior signals, only a subset of the signals most proximate to the patient's heart, the signal most proximate to the V1 location of a standard 12-lead ECG, the signals covering the same area but not the same pattern, etc.

[0104] An illustrative graphical user interface 300 depicting, among other things, a plurality of graphical maps of electrical activation from external electrodes corresponding to different cardiac therapy scenarios is depicted in FIG. 7. Each of the plurality of graphical maps of electrical activation may correspond to a different cardiac therapy scenario of the plurality of different cardiac therapy scenarios than each other. Each of the graphical maps of the electrical activation of graphical user interface 300 may be similar to the graphical maps of electrical activation as described herein with respect to FIGS. 5A-5B & 6. For example, each

of the graphical maps of the electrical activation of the graphical user interface 300 may include an anterior area depicting the activation times measured about the anterior torso of the patient and a posterior area depicting the activation times measured about the posterior torso of the patient, and may extend from the right anterior to the left anterior to the left side to the left posterior to the right posterior. Further, the graphical user interface 300 may include a plurality of metrics of electrical heterogeneity corresponding to the plurality of graphical maps of electrical activation. In this example, two metrics of electrical heterogeneity are displayed proximate and corresponding to each of the plurality of graphical maps of electrical activation. More specifically, SDAT and LVAT are displayed proximate and corresponding to each of the plurality of graphical maps of electrical activation. Additionally, a percentage change of each of the metrics of electrical heterogeneity are displayed, or depicted, proximate the metrics. The percentage change may be the percentage change from the metrics of electrical heterogeneity computed, or determined, from an intrinsic cardiac therapy scenario (where no cardiac resynchronization therapy is delivered). In other embodiments, the percentage change may be the percentage change from the metrics of electrical heterogeneity computed, or determined, from a baseline cardiac therapy scenario (e.g., the cardiac therapy that may be delivered to a patient prior to the present evaluation).

[0105] As shown, the graphical user interface 300 may include a graphical map of intrinsic electrical activation 302 and a plurality of graphical maps of paced electrical activation 304, each having a different cardiac therapy scenario associated therewith. Additionally, each of the plurality of graphical maps of paced electrical activation 304 may be arranged in accordance with the adjustment of the cardiac therapy settings. For example, when moving from left to right (e.g., from column to column) and when moving from top to bottom (e.g., from row to row) one or more cardiac therapy settings may be adjusted or changed. In this way, a user may be able to view the graphical user interface 300 and ascertain which of the plurality of different cardiac therapy scenarios may be beneficial (e.g., most beneficial) or effective for the patient.

[0106] In this illustrative embodiment, the first column may represent cardiac therapy scenarios having a V-V delay of 0 ms, the second column may represent cardiac therapy scenarios having a V-V delay of 20 ms, the third column may represent cardiac therapy scenarios having a V-V delay of 40 ms, and the fourth column may represent cardiac therapy scenarios having a V-V delay of 60 ms. Further, the first row may represent cardiac therapy scenarios having a A-V delay of 120 ms, the second row may represent cardiac therapy scenarios having a A-V delay of 140 ms, the third row may represent cardiac therapy scenarios having a A-V delay of 160 ms, and the fourth row may represent cardiac therapy scenarios having a A-V delay of 180 ms. It is to be understood that the A-V and V-V delays used and shown in the column and rows of FIG. 7 is one example, and the disclosure herein contemplates other A-V and V-V delays. For example, A-V delays ranging from about 80 ms to about 240 ms at steps of 20 ms and V-V delays ranging from about 0 ms to about 80 ms at steps of 20 ms may be utilized. Additionally, the plurality of graphical maps of paced elec-

trical activation **304** could be organized, or arranged, by LV pacing site or LV pacing vector (in the example depicted, the pacing site is always LV1).

[0107] Further, it may be described that the organization could be primarily dictated by V-V delay, secondarily by A-V delay, and tertiarily by LV pacing site or in a any other different order of priority. Also, a clinician could be provided a choice of different filtering options.

[0108] Still further, the graphical user interface **300** may include an electrical activation key **312** for use in interpreting, or decoding, the graphical maps of electrical activation. As shown, the electrical activation key **312** may be a color-coded, or gray-scaled, in the same way as the anterior and posterior areas of the graphical maps of electrical activation. Still further, the graphical user interface **300** may include a create and save graphical region **310** configured for selection by a user to create and save a digital file of the data depicted, or shown, on the graphical user interface **300**. In one example, the create and save graphical region **310** may be used to generate a portable, printable digital file that may be viewed consistently on many different types of computers and printed consistently on many different types of printers.

[0109] The illustrative systems, methods, and interface described herein may be configured to evaluate and sort a plurality of different cardiac therapy scenarios based on the monitored electrical activation which was obtained for each of different cardiac therapy scenarios. One or more metrics of electrical heterogeneity, or electrical dyssynchrony, may be used by the evaluation and sorting of the cardiac therapy scenarios.

[0110] One illustrative evaluation and sorting graphical user interface **400** is depicted in FIGS. **8A-8C**. The graphical user interface **400** of FIG. **8A** depicts a cardiac therapy scenario selection region **402**. The cardiac therapy scenario selection region **402** may be configured to allow a user to select one or more cardiac therapy scenarios that the illustrative systems, methods, and interfaces may evaluate and sort. As shown, all of the available cardiac therapy scenarios (where electrical activation data have been monitored, or collected, for use in cardiac therapy evaluation) are presently selected as indicated by the checkmarks besides each of the cardiac therapy scenarios. A user may select or deselect (e.g., clicking, touching, etc.) each of the cardiac therapy scenarios using the cardiac therapy scenario selection region **402**, and after a user has selected the cardiac therapy scenarios, the user may select the sort initiation region **405**.

[0111] Selection of the sort initiation region **405** may initiate, or execute, the initial sorting of the cardiac therapy scenarios as shown in FIG. **8B**. The illustrative graphical user interface **400** of FIG. **8B** depicts a ranking of selected cardiac therapy scenarios that have been sorted, or ranked, based on generated electrical heterogeneity information generated for each of the selected cardiac therapy scenarios within a sort graphical region **410**. In one or more embodiments, the selected cardiac therapy scenarios are ranked based on a primary metric of electrical heterogeneity. In this example, the primary metric of electrical heterogeneity may be SDAT. In another embodiment, the primary metric of electrical heterogeneity may be LVAT. These metrics, or other metrics of electrical heterogeneity, **412** for each of the selected cardiac therapy scenarios may also be depicted in the sort graphical region **410** as well as the percentage change from baseline therapy or intrinsic activation.

[0112] In the event of a “tie,” the selected cardiac therapy scenarios may be further ranked, or sorted, based on a secondary metric of electrical heterogeneity such as, e.g., SDAT or LVAT. In this embodiment, the secondary metric of electrical heterogeneity may be LVAT. In other words, two or more of the selected cardiac therapy scenarios may be further ranked based on a secondary metric of electrical heterogeneity if the primary metric of electrical heterogeneity of the two more selected cardiac therapy scenarios are within a selected threshold, or range, (e.g., 5%) from each other. In other words, for example, the ranked order may be accomplished through the following steps using the SDAT and LVAT values for the selected pacing scenarios: rank the pacing scenarios in order of smallest to largest SDAT percent change values, assign a rank of 1 to all pacing scenarios within 3% of the smallest SDAT, and for all pacing scenarios with a ranking of 1, demote any pacing scenario with an LVAT percent change more than 30 percent greater than the minimum LVAT percentage change of the pacing scenarios ranked 1.

[0113] Further, the graphical user interface **400** may be further configured to depict multiple sorts, or rankings, within the sort graphical region **410** as shown in FIG. **8C**. In particular, a plurality of rankings **415** of the different groups of selected cardiac therapy scenarios may be depicted, or shown, in the sort graphical region **410**. The plurality of rankings **415** of the different groups of selected cardiac therapy scenarios may be generated, and then displayed, by a user selecting different cardiac therapy scenarios using the cardiac therapy scenario selection region **402**, and then initiating another sort, or ranking, by selecting the sort initiation region **405**.

[0114] For example, as shown, the “Sort 3” has been generated by a user selecting two different cardiac therapy scenarios, namely, a first cardiac therapy scenario having a V-V timing of 40 ms, A-V timing of 60 ms, and a LV2 left ventricular pacing location and a second cardiac therapy scenario having a V-V timing of 80 ms, A-V timing of 100 ms, and a LV2 left ventricular pacing location. After selecting the sort initiation region **405**, such two cardiac therapy scenarios may be sorted according to a primary metric of electrical heterogeneity (e.g., SDAT), and in this example, the primary metric of electrical heterogeneity of each of the two cardiac therapy scenarios is within 1% of each other, and thus, the secondary metric of electrical heterogeneity (e.g., LVAT) of each of the two cardiac therapy scenarios may be used to completed the sorting or ranking.

[0115] Exemplary cardiac therapy may be further described herein with reference to FIGS. **9-11**. Additionally, the exemplary systems and methods described herein may further use or incorporate the systems and methods described in U.S. Pat. App. Pub. No. 2016/0045737 to Ghosh et al. published on Feb. 18, 2016, U.S. Pat. App. Pub. No. 2016/0045738 to Ghosh et al. published on Feb. 18, 2016, U.S. Pat. App. Pub. No. 2016/0045744 to Gillberg et al. published on Feb. 18, 2016, all of which are incorporated herein by reference in their entireties.

[0116] The exemplary systems, methods, and graphical user interfaces described herein may be used with respect to the implantation and configuration of an implantable medical device (IMD) and/or one or more leads configured to be located proximate one or more portions of a patient’s heart. For example, the exemplary systems, methods, and inter-

faces may be used in conjunction with an exemplary therapy system **10** described herein with reference to FIGS. **9-11**.

[0117] FIG. **9** is a conceptual diagram illustrating an exemplary therapy system **10** that may be used to deliver pacing therapy to a patient **14**. Patient **14** may, but not necessarily, be a human. The therapy system **10** may include an implantable medical device **16** (IMD), which may be coupled to leads **18, 20, 22**. The IMD **16** may be, e.g., an implantable pacemaker, cardioverter, and/or defibrillator, that delivers, or provides, electrical signals (e.g., paces, etc.) to and/or senses electrical signals from the heart **12** of the patient **14** via electrodes coupled to one or more of the leads **18, 20, 22**.

[0118] The leads **18, 20, 22** extend into the heart **12** of the patient **14** to sense electrical activity of the heart **12** and/or to deliver electrical stimulation to the heart **12**. In the example shown in FIG. **9**, the right ventricular (RV) lead **18** extends through one or more veins (not shown), the superior vena cava (not shown), and the right atrium **26**, and into the right ventricle **28**. The left ventricular (LV) coronary sinus lead **20** extends through one or more veins, the vena cava, the right atrium **26**, and into the coronary sinus **30** to a region adjacent to the free wall of the left ventricle **32** of the heart **12**. The right atrial (RA) lead **22** extends through one or more veins and the vena cava, and into the right atrium **26** of the heart **12**.

[0119] The IMD **16** may sense, among other things, electrical signals attendant to the depolarization and repolarization of the heart **12** via electrodes coupled to at least one of the leads **18, 20, 22**. In some examples, the IMD **16** provides pacing therapy (e.g., pacing pulses) to the heart **12** based on the electrical signals sensed within the heart **12**. The IMD **16** may be operable to adjust one or more parameters associated with the pacing therapy such as, e.g., AV delay and other various timings, pulse wide, amplitude, voltage, burst length, etc. Further, the IMD **16** may be operable to use various electrode configurations to deliver pacing therapy, which may be unipolar, bipolar, quadripolar, or further multipolar. For example, a multipolar lead may include several electrodes that can be used for delivering pacing therapy. Hence, a multipolar lead system may provide, or offer, multiple electrical vectors to pace from. A pacing vector may include at least one cathode, which may be at least one electrode located on at least one lead, and at least one anode, which may be at least one electrode located on at least one lead (e.g., the same lead, or a different lead) and/or on the casing, or can, of the IMD. While improvement in cardiac function as a result of the pacing therapy may primarily depend on the cathode, the electrical parameters like impedance, pacing threshold voltage, current drain, longevity, etc. may be more dependent on the pacing vector, which includes both the cathode and the anode. The IMD **16** may also provide defibrillation therapy and/or cardioversion therapy via electrodes located on at least one of the leads **18, 20, 22**. Further, the IMD **16** may detect arrhythmia of the heart **12**, such as fibrillation of the ventricles **28, 32**, and deliver defibrillation therapy to the heart **12** in the form of electrical pulses. In some examples, IMD **16** may be programmed to deliver a progression of therapies, e.g., pulses with increasing energy levels, until a fibrillation of heart **12** is stopped.

[0120] FIGS. **10A-10B** are conceptual diagrams illustrating the IMD **16** and the leads **18, 20, 22** of therapy system **10** of FIG. **9** in more detail. The leads **18, 20, 22** may be

electrically coupled to a therapy delivery module (e.g., for delivery of pacing therapy), a sensing module (e.g., for sensing one or more signals from one or more electrodes), and/or any other modules of the IMD **16** via a connector block **34**. In some examples, the proximal ends of the leads **18, 20, 22** may include electrical contacts that electrically couple to respective electrical contacts within the connector block **34** of the IMD **16**. In addition, in some examples, the leads **18, 20, 22** may be mechanically coupled to the connector block **34** with the aid of set screws, connection pins, or another suitable mechanical coupling mechanism.

[0121] Each of the leads **18, 20, 22** includes an elongated insulative lead body, which may carry a number of conductors (e.g., concentric coiled conductors, straight conductors, etc.) separated from one another by insulation (e.g., tubular insulative sheaths). In the illustrated example, bipolar electrodes **40, 42** are located proximate to a distal end of the lead **18**. In addition, bipolar electrodes **44, 45, 46, 47** are located proximate to a distal end of the lead **20** and bipolar electrodes **48, 50** are located proximate to a distal end of the lead **22**.

[0122] The electrodes **40, 44, 45, 46, 47, 48** may take the form of ring electrodes, and the electrodes **42, 50** may take the form of extendable helix tip electrodes mounted retractably within the insulative electrode heads **52, 54, 56**, respectively. Each of the electrodes **40, 42, 44, 45, 46, 47, 48, 50** may be electrically coupled to a respective one of the conductors (e.g., coiled and/or straight) within the lead body of its associated lead **18, 20, 22**, and thereby coupled to a respective one of the electrical contacts on the proximal end of the leads **18, 20, 22**.

[0123] Additionally, electrodes **44, 45, 46** and **47** may have an electrode surface area of about 5.3 mm² to about 5.8 mm². Electrodes **44, 45, 46**, and **47** may also be referred to as LV1, LV2, LV3, and LV4, respectively. The LV electrodes (i.e., left ventricle electrode **1** (LV1) **44**, left ventricle electrode **2** (LV2) **45**, left ventricle electrode **3** (LV3) **46**, and left ventricle **4** (LV4) **47** etc.) on the lead **20** can be spaced apart at variable distances. For example, electrode **44** may be a distance of, e.g., about 21 millimeters (mm), away from electrode **45**, electrodes **45** and **46** may be spaced a distance of, e.g. about 1.3 mm to about 1.5 mm, away from each other, and electrodes **46** and **47** may be spaced a distance of, e.g. 20 mm to about 21 mm, away from each other.

[0124] The electrodes **40, 42, 44, 45, 46, 47, 48, 50** may further be used to sense electrical signals (e.g., morphological waveforms within electrograms (EGM)) attendant to the depolarization and repolarization of the heart **12**. The electrical signals are conducted to the IMD **16** via the respective leads **18, 20, 22**. In some examples, the IMD **16** may also deliver pacing pulses via the electrodes **40, 42, 44, 45, 46, 47, 48, 50** to cause depolarization of cardiac tissue of the patient's heart **12**. In some examples, as illustrated in FIG. **10A**, the IMD **16** includes one or more housing electrodes, such as housing electrode **58**, which may be formed integrally with an outer surface of a housing **60** (e.g., hermetically-sealed housing) of the IMD **16** or otherwise coupled to the housing **60**. Any of the electrodes **40, 42, 44, 45, 46, 47, 48, 50** may be used for unipolar sensing or pacing in combination with the housing electrode **58**. It is generally understood by those skilled in the art that other electrodes can also be selected to define, or be used for, pacing and sensing vectors. Further, any of electrodes **40, 42, 44, 45, 46,**

47, 48, 50, 58, when not being used to deliver pacing therapy, may be used to sense electrical activity during pacing therapy.

[0125] As described in further detail with reference to FIG. 10A, the housing 60 may enclose a therapy delivery module that may include a stimulation generator for generating cardiac pacing pulses and defibrillation or cardioversion shocks, as well as a sensing module for monitoring the electrical signals of the patient's heart (e.g., the patient's heart rhythm). The leads 18, 20, 22 may also include elongated electrodes 62, 64, 66, respectively, which may take the form of a coil. The IMD 16 may deliver defibrillation shocks to the heart 12 via any combination of the elongated electrodes 62, 64, 66 and the housing electrode 58. The electrodes 58, 62, 64, 66 may also be used to deliver cardioversion pulses to the heart 12. Further, the electrodes 62, 64, 66 may be fabricated from any suitable electrically conductive material, such as, but not limited to, platinum, platinum alloy, and/or other materials known to be usable in implantable defibrillation electrodes. Since electrodes 62, 64, 66 are not generally configured to deliver pacing therapy, any of electrodes 62, 64, 66 may be used to sense electrical activity and may be used in combination with any of electrodes 40, 42, 44, 45, 46, 47, 48, 50, 58. In at least one embodiment, the RV elongated electrode 62 may be used to sense electrical activity of a patient's heart during the delivery of pacing therapy (e.g., in combination with the housing electrode 58, or defibrillation electrode-to-housing electrode vector).

[0126] The configuration of the exemplary therapy system 10 illustrated in FIGS. 9-11 is merely one example. In other examples, the therapy system may include epicardial leads and/or patch electrodes instead of or in addition to the transvenous leads 18, 20, 22 illustrated in FIG. 9. Additionally, in other examples, the therapy system 10 may be implanted in/around the cardiac space without transvenous leads (e.g., leadless/wireless pacing systems) or with leads implanted (e.g., implanted transvenously or using approaches) into the left chambers of the heart (in addition to or replacing the transvenous leads placed into the right chambers of the heart as illustrated in FIG. 9). Further, in one or more embodiments, the IMD 16 need not be implanted within the patient 14. For example, the IMD 16 may deliver various cardiac therapies to the heart 12 via percutaneous leads that extend through the skin of the patient 14 to a variety of positions within or outside of the heart 12. In one or more embodiments, the system 10 may utilize wireless pacing (e.g., using energy transmission to the intracardiac pacing component(s) via ultrasound, inductive coupling, RF, etc.) and sensing cardiac activation using electrodes on the can/housing and/or on subcutaneous leads.

[0127] In other examples of therapy systems that provide electrical stimulation therapy to the heart 12, such therapy systems may include any suitable number of leads coupled to the IMD 16, and each of the leads may extend to any location within or proximate to the heart 12. For example, other examples of therapy systems may include three transvenous leads located as illustrated in FIGS. 9-11. Still further, other therapy systems may include a single lead that extends from the IMD 16 into the right atrium 26 or the right ventricle 28, or two leads that extend into a respective one of the right atrium 26 and the right ventricle 28.

[0128] FIG. 11A is a functional block diagram of one exemplary configuration of the IMD 16. As shown, the IMD

16 may include a control module 81, a therapy delivery module 84 (e.g., which may include a stimulation generator), a sensing module 86, and a power source 90.

[0129] The control module 81 may include a processor 80, memory 82, and a telemetry module 88. The memory 82 may include computer-readable instructions that, when executed, e.g., by the processor 80, cause the IMD 16 and/or the control module 81 to perform various functions attributed to the IMD 16 and/or the control module 81 described herein. Further, the memory 82 may include any volatile, non-volatile, magnetic, optical, and/or electrical media, such as a random-access memory (RAM), read-only memory (ROM), non-volatile RAM (NVRAM), electrically-erasable programmable ROM (EEPROM), flash memory, and/or any other digital media. An exemplary capture management module may be the left ventricular capture management (LVCM) module described in U.S. Pat. No. 7,684,863 entitled "LV THRESHOLD MEASUREMENT AND CAPTURE MANAGEMENT" and issued Mar. 23, 2010, which is incorporated herein by reference in its entirety.

[0130] The processor 80 of the control module 81 may include any one or more of a microprocessor, a controller, a digital signal processor (DSP), an application specific integrated circuit (ASIC), a field-programmable gate array (FPGA), and/or equivalent discrete or integrated logic circuitry. In some examples, the processor 80 may include multiple components, such as any combination of one or more microprocessors, one or more controllers, one or more DSPs, one or more ASICs, and/or one or more FPGAs, as well as other discrete or integrated logic circuitry. The functions attributed to the processor 80 herein may be embodied as software, firmware, hardware, or any combination thereof.

[0131] The control module 81 may control the therapy delivery module 84 to deliver therapy (e.g., electrical stimulation therapy such as pacing) to the heart 12 according to a selected one or more therapy programs, which may be stored in the memory 82. More, specifically, the control module 81 (e.g., the processor 80) may control various parameters of the electrical stimulus delivered by the therapy delivery module 84 such as, e.g., AV delays, VV delays, pacing pulses with the amplitudes, pulse widths, frequency, or electrode polarities, etc., which may be specified by one or more selected therapy programs (e.g., AV and/or VV delay adjustment programs, pacing therapy programs, pacing recovery programs, capture management programs, etc.). As shown, the therapy delivery module 84 is electrically coupled to electrodes 40, 42, 44, 45, 46, 47, 48, 50, 58, 62, 64, 66, e.g., via conductors of the respective lead 18, 20, 22, or, in the case of housing electrode 58, via an electrical conductor disposed within housing 60 of IMD 16. Therapy delivery module 84 may be configured to generate and deliver electrical stimulation therapy such as pacing therapy to the heart 12 using one or more of the electrodes 40, 42, 44, 45, 46, 47, 48, 50, 58, 62, 64, 66.

[0132] For example, therapy delivery module 84 may deliver pacing stimulus (e.g., pacing pulses) via ring electrodes 40, 44, 45, 46, 47, 48 coupled to leads 18, 20, 22 and/or helical tip electrodes 42, 50 of leads 18, 22. Further, for example, therapy delivery module 84 may deliver defibrillation shocks to heart 12 via at least two of electrodes 58, 62, 64, 66. In some examples, therapy delivery module 84 may be configured to deliver pacing, cardioversion, or defibrillation stimulation in the form of electrical pulses. In

other examples, therapy delivery module **84** may be configured deliver one or more of these types of stimulation in the form of other signals, such as sine waves, square waves, and/or other substantially continuous time signals.

[0133] The IMD **16** may further include a switch module **85** and the control module **81** (e.g., the processor **80**) may use the switch module **85** to select, e.g., via a data/address bus, which of the available electrodes are used to deliver therapy such as pacing pulses for pacing therapy, or which of the available electrodes are used for sensing. The switch module **85** may include a switch array, switch matrix, multiplexer, or any other type of switching device suitable to selectively couple the sensing module **86** and/or the therapy delivery module **84** to one or more selected electrodes. More specifically, the therapy delivery module **84** may include a plurality of pacing output circuits. Each pacing output circuit of the plurality of pacing output circuits may be selectively coupled, e.g., using the switch module **85**, to one or more of the electrodes **40, 42, 44, 45, 46, 47, 48, 50, 58, 62, 64, 66** (e.g., a pair of electrodes for delivery of therapy to a bipolar or multipolar pacing vector). In other words, each electrode can be selectively coupled to one of the pacing output circuits of the therapy delivery module using the switching module **85**.

[0134] The sensing module **86** is coupled (e.g., electrically coupled) to sensing apparatus, which may include, among additional sensing apparatus, the electrodes **40, 42, 44, 45, 46, 47, 48, 50, 58, 62, 64, 66** to monitor electrical activity of the heart **12**, e.g., electrocardiogram (ECG)/electrogram (EGM) signals, etc. The ECG/EGM signals may be used to measure or monitor activation times (e.g., ventricular activations times, etc.), heart rate (HR), heart rate variability (HRV), heart rate turbulence (HRT), deceleration/acceleration capacity, deceleration sequence incidence, T-wave alternans (TWA), P-wave to P-wave intervals (also referred to as the P-P intervals or A-A intervals), R-wave to R-wave intervals (also referred to as the R-R intervals or V-V intervals), P-wave to QRS complex intervals (also referred to as the P-R intervals, A-V intervals, or P-Q intervals), QRS-complex morphology, ST segment (i.e., the segment that connects the QRS complex and the T-wave), T-wave changes, QT intervals, electrical vectors, etc.

[0135] The switch module **85** may also be used with the sensing module **86** to select which of the available electrodes are used, or enabled, to, e.g., sense electrical activity of the patient's heart (e.g., one or more electrical vectors of the patient's heart using any combination of the electrodes **40, 42, 44, 45, 46, 47, 48, 50, 58, 62, 64, 66**). Likewise, the switch module **85** may also be used with the sensing module **86** to select which of the available electrodes are not to be used (e.g., disabled) to, e.g., sense electrical activity of the patient's heart (e.g., one or more electrical vectors of the patient's heart using any combination of the electrodes **40, 42, 44, 45, 46, 47, 48, 50, 58, 62, 64, 66**), etc. In some examples, the control module **81** may select the electrodes that function as sensing electrodes via the switch module within the sensing module **86**, e.g., by providing signals via a data/address bus.

[0136] In some examples, sensing module **86** includes a channel that includes an amplifier with a relatively wider pass band than the R-wave or P-wave amplifiers. Signals from the selected sensing electrodes may be provided to a multiplexer, and thereafter converted to multi-bit digital signals by an analog-to-digital converter for storage in

memory **82**, e.g., as an electrogram (EGM). In some examples, the storage of such EGMs in memory **82** may be under the control of a direct memory access circuit.

[0137] In some examples, the control module **81** may operate as an interrupt driven device, and may be responsive to interrupts from pacer timing and control module, where the interrupts may correspond to the occurrences of sensed P-waves and R-waves and the generation of cardiac pacing pulses. Any necessary mathematical calculations may be performed by the processor **80** and any updating of the values or intervals controlled by the pacer timing and control module may take place following such interrupts. A portion of memory **82** may be configured as a plurality of recirculating buffers, capable of holding one or more series of measured intervals, which may be analyzed by, e.g., the processor **80** in response to the occurrence of a pace or sense interrupt to determine whether the patient's heart **12** is presently exhibiting atrial or ventricular tachyarrhythmia.

[0138] The telemetry module **88** of the control module **81** may include any suitable hardware, firmware, software, or any combination thereof for communicating with another device, such as a programmer. For example, under the control of the processor **80**, the telemetry module **88** may receive downlink telemetry from and send uplink telemetry to a programmer with the aid of an antenna, which may be internal and/or external. The processor **80** may provide the data to be uplinked to a programmer and the control signals for the telemetry circuit within the telemetry module **88**, e.g., via an address/data bus. In some examples, the telemetry module **88** may provide received data to the processor **80** via a multiplexer.

[0139] The various components of the IMD **16** are further coupled to a power source **90**, which may include a rechargeable or non-rechargeable battery. A non-rechargeable battery may be selected to last for several years, while a rechargeable battery may be inductively charged from an external device, e.g., on a daily or weekly basis.

[0140] FIG. 11B is another embodiment of a functional block diagram for IMD **16** that depicts bipolar RA lead **22**, bipolar RV lead **18**, and bipolar LV CS lead **20** without the LA CS pace/sense electrodes and coupled with an implantable pulse generator (IPG) circuit **31** having programmable modes and parameters of a bi-ventricular DDD/R type known in the pacing art. In turn, the sensor signal processing circuit **91** indirectly couples to the timing circuit **43** and via data and control bus to microcomputer circuitry **33**. The IPG circuit **31** is illustrated in a functional block diagram divided generally into a microcomputer circuit **33** and a pacing circuit **21**. The pacing circuit **21** includes the digital controller/timer circuit **43**, the output amplifiers circuit **51**, the sense amplifiers circuit **55**, the RF telemetry transceiver **41**, the activity sensor circuit **35** as well as a number of other circuits and components described below.

[0141] Crystal oscillator circuit **89** provides the basic timing clock for the pacing circuit **21** while battery **29** provides power. Power-on-reset circuit **87** responds to initial connection of the circuit to the battery for defining an initial operating condition and similarly, resets the operative state of the device in response to detection of a low battery condition. Reference mode circuit **37** generates stable voltage reference and currents for the analog circuits within the pacing circuit **21**. Analog-to-digital converter (ADC) and multiplexer circuit **39** digitize analog signals and voltage to provide, e.g., real time telemetry of cardiac signals from

sense amplifiers **55** for uplink transmission via RF transmitter and receiver circuit **41**. Voltage reference and bias circuit **37**, ADC and multiplexer **39**, power-on-reset circuit **87**, and crystal oscillator circuit **89** may correspond to any of those used in exemplary implantable cardiac pacemakers.

[0142] If the IPG is programmed to a rate responsive mode, the signals output by one or more physiologic sensors are employed as a rate control parameter (RCP) to derive a physiologic escape interval. For example, the escape interval is adjusted proportionally to the patient's activity level developed in the patient activity sensor (PAS) circuit **35** in the depicted, exemplary IPG circuit **31**. The patient activity sensor **27** is coupled to the IPG housing and may take the form of a piezoelectric crystal transducer. The output signal of the patient activity sensor **27** may be processed and used as a RCP. Sensor **27** generates electrical signals in response to sensed physical activity that are processed by activity circuit **35** and provided to digital controller/timer circuit **43**. Activity circuit **35** and associated sensor **27** may correspond to the circuitry disclosed in U.S. Pat. No. 5,052,388 entitled "METHOD AND APPARATUS FOR IMPLEMENTING ACTIVITY SENSING IN A PULSE GENERATOR" and issued on Oct. 1, 1991 and U.S. Pat. No. 4,428,378 entitled "RATE ADAPTIVE PACER" and issued on Jan. 31, 1984, each of which is incorporated herein by reference in its entirety. Similarly, the exemplary systems, apparatus, and methods described herein may be practiced in conjunction with alternate types of sensors such as oxygenation sensors, pressure sensors, pH sensors, and respiration sensors, for use in providing rate responsive pacing capabilities. Alternately, QT time may be used as a rate indicating parameter, in which case no extra sensor is required. Similarly, the exemplary embodiments described herein may also be practiced in non-rate responsive pacemakers.

[0143] Data transmission to and from the external programmer is accomplished by way of the telemetry antenna **57** and an associated RF transceiver **41**, which serves both to demodulate received downlink telemetry and to transmit uplink telemetry. Uplink telemetry capabilities may include the ability to transmit stored digital information, e.g., operating modes and parameters, EGM histograms, and other events, as well as real time EGMs of atrial and/or ventricular electrical activity and marker channel pulses indicating the occurrence of sensed and paced depolarizations in the atrium and ventricle.

[0144] Microcomputer **33** contains a microprocessor **80** and associated system clock and on-processor RAM and ROM chips **82A** and **82B**, respectively. In addition, microcomputer circuit **33** includes a separate RAM/ROM chip **82C** to provide additional memory capacity. Microprocessor **80** normally operates in a reduced power consumption mode and is interrupt driven. Microprocessor **80** is awakened in response to defined interrupt events, which may include A-TRIG, RV-TRIG, LV-TRIG signals generated by timers in digital timer/controller circuit **43** and A-EVENT, RV-EVENT, and LV-EVENT signals generated by sense amplifiers circuit **55**, among others. The specific values of the intervals and delays timed out by digital controller/timer circuit **43** are controlled by the microcomputer circuit **33** by way of data and control bus from programmed-in parameter values and operating modes. In addition, if programmed to operate as a rate responsive pacemaker, a timed interrupt, e.g., every cycle or every two seconds, may be provided in order to allow the microprocessor to analyze the activity

sensor data and update the basic A-A, V-A, or V-V escape interval, as applicable. In addition, the microprocessor **80** may also serve to define variable, operative AV delay intervals, V-V delay intervals, and the energy delivered to each ventricle and/or atrium.

[0145] In one embodiment, microprocessor **80** is a custom microprocessor adapted to fetch and execute instructions stored in RAM/ROM unit **82** in a conventional manner. It is contemplated, however, that other implementations may be suitable to practice the present invention. For example, an off-the-shelf, commercially available microprocessor or microcontroller, or custom application-specific, hardwired logic, or state-machine type circuit may perform the functions of microprocessor **80**.

[0146] Digital controller/timer circuit **43** operates under the general control of the microcomputer **33** to control timing and other functions within the pacing circuit **21** and includes a set of timing and associated logic circuits of which certain ones pertinent to the present invention are depicted. The depicted timing circuits include URI/LRI timers **83A**, V-V delay timer **83B**, intrinsic interval timers **83C** for timing elapsed V-EVENT to V-EVENT intervals or V-EVENT to A-EVENT intervals or the V-V conduction interval, escape interval timers **83D** for timing A-A, V-A, and/or V-V pacing escape intervals, an AV delay interval timer **83E** for timing the A-LVp delay (or A-RVp delay) from a preceding A-EVENT or A-TRIG, a post-ventricular timer **83F** for timing post-ventricular time periods, and a date/time clock **83G**.

[0147] The AV delay interval timer **83E** is loaded with an appropriate delay interval for one ventricular chamber (e.g., either an A-RVp delay or an A-LVp) to time-out starting from a preceding A-PACE or A-EVENT. The interval timer **83E** triggers pacing stimulus delivery, and can be based on one or more prior cardiac cycles (or from a data set empirically derived for a given patient).

[0148] The post-event timer **83F** times out the post-ventricular time period following an RV-EVENT or LV-EVENT or a RV-TRIG or LV-TRIG and post-atrial time periods following an A-EVENT or A-TRIG. The durations of the post-event time periods may also be selected as programmable parameters stored in the microcomputer **33**. The post-ventricular time periods include the PVARP, a post-atrial ventricular blanking period (PAVBP), a ventricular blanking period (VBP), a post-ventricular atrial blanking period (PVARP) and a ventricular refractory period (VRP) although other periods can be suitably defined depending, at least in part, on the operative circuitry employed in the pacing engine. The post-atrial time periods include an atrial refractory period (ARP) during which an A-EVENT is ignored for the purpose of resetting any AV delay, and an atrial blanking period (ABP) during which atrial sensing is disabled. It should be noted that the starting of the post-atrial time periods and the AV delays can be commenced substantially simultaneously with the start or end of each A-EVENT or A-TRIG or, in the latter case, upon the end of the A-PACE which may follow the A-TRIG. Similarly, the starting of the post-ventricular time periods and the V-A escape interval can be commenced substantially simultaneously with the start or end of the V-EVENT or V-TRIG or, in the latter case, upon the end of the V-PACE which may follow the V-TRIG. The microprocessor **80** also optionally calculates AV delays, VV delays, post-ventricular time periods, and post-atrial time periods that vary with the sensor based escape interval

established in response to the RCP(s) and/or with the intrinsic atrial and/or ventricular rate.

[0149] The output amplifiers circuit **51** contains a RA pace pulse generator (and a LA pace pulse generator if LA pacing is provided), a RV pace pulse generator, a LV pace pulse generator, and/or any other pulse generator configured to provide atrial and ventricular pacing. In order to trigger generation of an RV-PACE or LV-PACE pulse, digital controller/timer circuit **43** generates the RV-TRIG signal at the time-out of the A-RV_p delay (in the case of RV pre-excitation) or the LV-TRIG at the time-out of the A-LV_p delay (in the case of LV pre-excitation) provided by AV delay interval timer **83E** (or the V-V delay timer **83B**). Similarly, digital controller/timer circuit **43** generates an RA-TRIG signal that triggers output of an RA-PACE pulse (or an LA-TRIG signal that triggers output of an LA-PACE pulse, if provided) at the end of the V-A escape interval timed by escape interval timers **83D**.

[0150] The output amplifiers circuit **51** includes switching circuits for coupling selected pace electrode pairs from among the lead conductors and the IND-CAN electrode **20** to the RA pace pulse generator (and LA pace pulse generator if provided), RV pace pulse generator and LV pace pulse generator. Pace/sense electrode pair selection and control circuit **53** selects lead conductors and associated pace electrode pairs to be coupled with the atrial and ventricular output amplifiers within output amplifiers circuit **51** for accomplishing RA, LA, RV and LV pacing.

[0151] The sense amplifiers circuit **55** contains sense amplifiers for atrial and ventricular pacing and sensing. High impedance P-wave and R-wave sense amplifiers may be used to amplify a voltage difference signal that is generated across the sense electrode pairs by the passage of cardiac depolarization wavefronts. The high impedance sense amplifiers use high gain to amplify the low amplitude signals and rely on pass band filters, time domain filtering and amplitude threshold comparison to discriminate a P-wave or R-wave from background electrical noise. Digital controller/timer circuit **43** controls sensitivity settings of the atrial and ventricular sense amplifiers **55**.

[0152] The sense amplifiers may be uncoupled from the sense electrodes during the blanking periods before, during, and after delivery of a pace pulse to any of the pace electrodes of the pacing system to avoid saturation of the sense amplifiers. The sense amplifiers circuit **55** includes blanking circuits for uncoupling the selected pairs of the lead conductors and the IND-CAN electrode **20** from the inputs of the RA sense amplifier (and LA sense amplifier if provided), RV sense amplifier and LV sense amplifier during the ABP, PVABP and VBP. The sense amplifiers circuit **55** also includes switching circuits for coupling selected sense electrode lead conductors and the IND-CAN electrode **20** to the RA sense amplifier (and LA sense amplifier if provided), RV sense amplifier and LV sense amplifier. Again, sense electrode selection and control circuit **53** selects conductors and associated sense electrode pairs to be coupled with the atrial and ventricular sense amplifiers within the output amplifiers circuit **51** and sense amplifiers circuit **55** for accomplishing RA, LA, RV, and LV sensing along desired unipolar and bipolar sensing vectors.

[0153] Right atrial depolarizations or P-waves in the RA-SENSE signal that are sensed by the RA sense amplifier result in a RA-EVENT signal that is communicated to the digital controller/timer circuit **43**. Similarly, left atrial depo-

larizations or P-waves in the LA-SENSE signal that are sensed by the LA sense amplifier, if provided, result in a LA-EVENT signal that is communicated to the digital controller/timer circuit **43**. Ventricular depolarizations or R-waves in the RV-SENSE signal are sensed by a ventricular sense amplifier result in an RV-EVENT signal that is communicated to the digital controller/timer circuit **43**. Similarly, ventricular depolarizations or R-waves in the LV-SENSE signal are sensed by a ventricular sense amplifier result in an LV-EVENT signal that is communicated to the digital controller/timer circuit **43**. The RV-EVENT, LV-EVENT, and RA-EVENT, LA-SENSE signals may be refractory or non-refractory, and can inadvertently be triggered by electrical noise signals or aberrantly conducted depolarization waves rather than true R-waves or P-waves.

[0154] The techniques described in this disclosure, including those attributed to the IMD **16**, the computing apparatus **140**, and/or various constituent components, may be implemented, at least in part, in hardware, software, firmware, or any combination thereof. For example, various aspects of the techniques may be implemented within one or more processors, including one or more microprocessors, DSPs, ASICs, FPGAs, or any other equivalent integrated or discrete logic circuitry, as well as any combinations of such components, embodied in programmers, such as physician or patient programmers, stimulators, image processing devices, or other devices. The term “module,” “processor,” or “processing circuitry” may generally refer to any of the foregoing logic circuitry, alone or in combination with other logic circuitry, or any other equivalent circuitry.

[0155] Such hardware, software, and/or firmware may be implemented within the same device or within separate devices to support the various operations and functions described in this disclosure. In addition, any of the described units, modules, or components may be implemented together or separately as discrete but interoperable logic devices. Depiction of different features as modules or units is intended to highlight different functional aspects and does not necessarily imply that such modules or units must be realized by separate hardware or software components. Rather, functionality associated with one or more modules or units may be performed by separate hardware or software components, or integrated within common or separate hardware or software components.

[0156] When implemented in software, the functionality ascribed to the systems, devices and techniques described in this disclosure may be embodied as instructions on a computer-readable medium such as RAM, ROM, NVRAM, EEPROM, FLASH memory, magnetic data storage media, optical data storage media, or the like. The instructions may be executed by processing circuitry and/or one or more processors to support one or more aspects of the functionality described in this disclosure.

ILLUSTRATIVE EMBODIMENTS

Embodiment 1

[0157] A system for use in cardiac evaluation comprising:

[0158] electrode apparatus comprising a plurality of external electrodes to be located proximate a patient's skin;

[0159] display comprising a graphical user interface to present information for use in assisting a user in at least one of assessing a patient's cardiac health, evaluating and adjust-

ing cardiac therapy delivered to a patient, and navigating at least one implantable electrode to a region of the patient's heart; and

[0160] computing apparatus comprising processing circuitry, the computing apparatus operably coupled to the electrode apparatus and the display, the computing apparatus configured to:

[0161] monitor electrical activity from the patient's skin using the plurality of external electrodes,

[0162] display, on the graphical user interface, a graphical map comprising a plurality of electrode graphical elements corresponding to and positioned on the graphical map in relation to the physical location of the plurality of electrodes located proximate the patient's skin, wherein the graphical map extends from a left portion corresponding to anterior side of the patient to a middle portion corresponding to the left side of the patient to a right side corresponding to the posterior side of the patient, and

[0163] display, on the graphical user interface, an effectiveness value proximate each of the plurality of electrode graphical elements representative of the effectiveness of the corresponding electrode in providing a valid sensing signal from the tissue of the patient.

Embodiment 2

[0164] A method comprising:

[0165] providing a plurality of external electrodes to be located proximate a patient's skin;

[0166] monitoring electrical activity from the patient's skin using the plurality of external electrodes;

[0167] displaying, on the graphical user interface, a graphical map comprising a plurality of electrode graphical elements corresponding to and positioned on the graphical map in relation to the physical location of the plurality of electrodes located proximate the patient's skin, wherein the graphical map extends from a left portion corresponding to anterior side of the patient to a middle portion corresponding to the left side of the patient to a right side corresponding to the posterior side of the patient; and

[0168] displaying, on the graphical user interface, an effectiveness value proximate each of the plurality of electrode graphical elements representative of the effectiveness of the corresponding electrode in providing a valid sensing signal from the tissue of the patient.

Embodiment 3

[0169] The embodiment as set forth in any one of embodiments 1-2, wherein the computing apparatus is further configured to execute or the method further comprises displaying, on the graphical user interface, a principal electrodes graphical region proximate one or more electrode graphical elements to indicate which of the plurality of electrodes most significant.

Embodiment 4

[0170] The embodiment as set forth in any one of embodiments 1-3, wherein the effectiveness value comprises one of the following three values: good signal (or good contact), poor signal, and not in contact.

Embodiment 5

[0171] The embodiment as set forth in any one of embodiments 1-4, wherein the computing apparatus is further

configured to execute or the method further comprises displaying, on the graphical user interface, a global electrode connection status message indicative of the state of the plurality of electrodes providing valid sensing signals from the tissue of the patient.

Embodiment 6

[0172] A system for use in cardiac evaluation comprising:

[0173] electrode apparatus comprising a plurality of external electrodes to be located proximate a patient's skin;

[0174] display comprising a graphical user interface to present information for use in assisting a user in at least one of assessing a patient's cardiac health, evaluating and adjusting cardiac therapy delivered to a patient, and navigating at least one implantable electrode to a region of the patient's heart; and

[0175] computing apparatus comprising processing circuitry, the computing apparatus operably coupled to the electrode apparatus and the display, the computing apparatus configured to:

[0176] monitor electrical activity from the patient's skin using the plurality of external electrodes resulting in a plurality of electrode signals,

[0177] display, on the graphical user interface, the plurality of electrode signals over a plurality of cardiac cycles,

[0178] select or allow a user to select one cardiac cycle of the plurality of cardiac cycles, and

[0179] display, on the graphical user interface, a graphical map of electrical activation based on the monitored electrical activity for the selected cardiac cycle.

Embodiment 7

[0180] A method comprising:

[0181] providing a plurality of external electrodes to be located proximate a patient's skin;

[0182] monitoring electrical activity from the patient's skin using the plurality of external electrodes resulting in a plurality of electrode signals;

[0183] displaying, on the graphical user interface, the plurality of electrode signals over a plurality of cardiac cycles;

[0184] selecting or allowing a user to select one cardiac cycle of the plurality of cardiac cycles; and

[0185] displaying, on the graphical user interface, a graphical map of electrical activation based on the monitored electrical activity for the selected cardiac cycle.

Embodiment 8

[0186] The embodiment as set forth in any one of embodiments 6-7, wherein the computing apparatus is further configured to execute or the method further comprises displaying, on the graphical user interface, a plurality of electrode elements corresponding to and positioned on the graphical map of electrical activation in relation to the physical location of the plurality of electrodes located proximate the patient's skin, wherein the graphical map extends from a left portion corresponding to anterior side of the patient to a middle portion corresponding to the left side of the patient to a right side corresponding to the posterior side of the patient.

Embodiment 9

[0187] The embodiment as set forth embodiment 8, wherein the computing apparatus is further configured to execute or the method further comprises allowing a user to hide or display the plurality of electrode elements.

Embodiment 10

[0188] The embodiment as set forth in any one of embodiments 8-9, wherein the computing apparatus is further configured to execute or the method further comprises graphically indicating, on graphical map of electrical activation, one or more areas of conduction block based on the monitored electrical activity for the selected cardiac cycle.

Embodiment 11

[0189] The embodiment as set forth in any one of embodiments 8-10, wherein the computing apparatus is further configured to execute or the method further comprises graphically indicating, on the graphical user interface, which of the plurality of electrode elements corresponds to electrodes that are ineffective in providing a valid sensing signal from the tissue of the patient.

Embodiment 12

[0190] The embodiment as set forth in any one of embodiments 6-11, wherein the computing apparatus is further configured to execute or the method further comprises interpolating the electrical activation of each area of the graphical map of electrical activation corresponding corresponds to external electrodes that are ineffective in providing a valid sensing signal from the tissue of the patient.

Embodiment 13

[0191] The embodiment as set forth in any one of embodiments 6-12, wherein the computing apparatus is further configured to execute or the method further comprises displaying at least one metric of electrical heterogeneity based on the monitored electrical activity for the selected cardiac cycle.

Embodiment 14

[0192] The embodiment as set forth in any one of embodiments 6-13, wherein the computing apparatus is further configured to execute or the method further comprises:

[0193] allowing a user to select a cardiac therapy scenario of a plurality of different cardiac therapy scenarios; and

[0194] displaying, on the graphical user interface, the plurality of electrode signals over a plurality of cardiac cycles corresponding to the selected cardiac therapy scenario.

Embodiment 15

[0195] The embodiment of embodiment 14, wherein each of the plurality of different cardiac therapy scenarios comprise at least one different pacing configuration, AV delay, and LV pacing site.

Embodiment 16

[0196] The embodiment as set forth in any one of embodiments 6-15, wherein the computing apparatus is further configured to execute or the method further comprises

selecting one cardiac cycle of the plurality of cardiac cycles comprises selecting the cardiac cycle of the plurality of cardiac based on at least one metric for each cardiac cycle based on a single-cycle submetric and a cycle-series submetric, wherein the single-cycle submetric is based on at least two of the plurality of electrical signals during the cardiac cycle and the cycle-series submetric is based on at least two of the plurality of electrical signals during at least two cardiac cycles.

Embodiment 17

[0197] The embodiment as set forth in any one of embodiments 6-16, wherein the computing apparatus is further configured to execute or the method further comprises allowing a user to select an electrode set of a plurality of different electrode sets of the plurality of external electrodes, wherein the displayed plurality of electrode signals over the plurality of cardiac cycles comprises only electrode signals of the selected electrode set, and the displayed graphical map of electrical activation is based on the monitored electrical activity from only electrode signals of the selected electrode set.

Embodiment 18

[0198] A system for use in cardiac evaluation comprising:

[0199] electrode apparatus comprising a plurality of external electrodes to be located proximate a patient's skin;

[0200] display comprising a graphical user interface to present information for use in assisting a user in at least one of assessing a patient's cardiac health, evaluating and adjusting cardiac therapy delivered to a patient, and navigating at least one implantable electrode to a region of the patient's heart; and

[0201] computing apparatus comprising processing circuitry, the computing apparatus operably coupled to the electrode apparatus and the display, the computing apparatus configured to:

[0202] monitor electrical activity from the patient's skin using the plurality of external electrodes for each of a plurality of different cardiac therapy scenarios,

[0203] generate electrical heterogeneity information for each of the plurality of different cardiac therapy scenarios based on the monitored electrical activity,

[0204] display, on the graphical user interface, a cardiac therapy scenario selection region to allow a user to select one or more of the plurality of different cardiac therapy scenarios, and

[0205] displaying a ranking of the selected cardiac therapy scenarios based on the generated electrical heterogeneity information.

Embodiment 19

[0206] A method comprising:

[0207] providing a plurality of external electrodes to be located proximate a patient's skin;

[0208] monitoring electrical activity from the patient's skin using the plurality of external electrodes for each of a plurality of different cardiac therapy scenarios;

[0209] generating electrical heterogeneity information for each of the plurality of different cardiac therapy scenarios based on the monitored electrical activity;

[0210] displaying, on a graphical user interface, a cardiac therapy scenario selection region to allow a user to select one or more of the plurality of different cardiac therapy scenarios; and

[0211] displaying a ranking of the selected cardiac therapy scenarios based on the generated electrical heterogeneity information.

Embodiment 20

[0212] The embodiment as set forth in any one of embodiments 18-19, wherein the electrical heterogeneity information comprises a global standard deviation of surrogate electrical activation times monitored by the plurality of external electrodes.

Embodiment 21

[0213] The embodiment as set forth in any one of embodiments 18-20, wherein the plurality of electrodes comprises two or more left external electrodes configured to be located proximate the left side of the patient, wherein the electrical heterogeneity information comprises an average of electrical activation times monitored by the two or more left external electrodes.

Embodiment 22

[0214] The embodiment as set forth in any one of embodiments 18-21, wherein the selected cardiac therapy scenarios are ranked based on a primary metric of electrical heterogeneity.

Embodiment 23

[0215] The embodiment as set forth in embodiment 22, wherein two or more of the selected cardiac therapy scenarios are further ranked based on a secondary metric of electrical heterogeneity if the primary metric of electrical heterogeneity of the two more selected cardiac therapy scenarios are within a selected threshold from each other.

Embodiment 24

[0216] The embodiment as set forth in any one of embodiments 18-24, wherein displaying a ranking of the selected cardiac therapy scenarios based on the generated cardiac heterogeneity information comprises displaying a plurality of rankings of the different groups of selected cardiac therapy scenarios.

Embodiment 25

[0217] A system for use in cardiac evaluation comprising:

[0218] electrode apparatus comprising a plurality of external electrodes to be located proximate a patient's skin;

[0219] display comprising a graphical user interface to present information for use in assisting a user in at least one of assessing a patient's cardiac health, evaluating and adjusting cardiac therapy delivered to a patient, and navigating at least one implantable electrode to a region of the patient's heart; and

[0220] computing apparatus comprising processing circuitry, the computing apparatus operably coupled to the electrode apparatus and the display, the computing apparatus configured to:

[0221] monitor electrical activity from the patient's skin using the plurality of external electrodes for each of a plurality of different cardiac therapy scenarios, and

[0222] display, on the graphical user interface, a plurality of graphical maps of electrical activation based on the monitored electrical activity, each of the plurality of graphical maps of electrical activation corresponding to a different cardiac therapy scenario of the plurality of different cardiac therapy scenarios than each other.

Embodiment 26

[0223] A method comprising:

[0224] providing a plurality of external electrodes to be located proximate a patient's skin;

[0225] monitoring electrical activity from the patient's skin using the plurality of external electrodes for each of a plurality of different cardiac therapy scenarios, and

[0226] displaying, on a graphical user interface, a plurality of graphical maps of electrical activation based on the monitored electrical activity, each of the plurality of graphical maps of electrical activation corresponding to a different cardiac therapy scenario of the plurality of different cardiac therapy scenarios than each other.

Embodiment 27

[0227] The embodiment as set forth in any one of embodiments 25-26, wherein each of the plurality of different cardiac therapy scenarios comprise at least one different pacing configuration, AV delay, and LV pacing site.

Embodiment 28

[0228] The embodiment as set forth in any one of embodiments 25-27, wherein the computing apparatus is further configured to execute or the method further comprises:

[0229] generating electrical heterogeneity information for each of the plurality of different cardiac therapy scenarios based on the monitored electrical activity; and

[0230] displaying the electrical heterogeneity information proximate to each of the plurality of graphical maps of electrical activation corresponding to the same cardiac therapy scenario as the graphical map of electrical activation.

Embodiment 29

[0231] The embodiment as set forth in embodiment 28, wherein the plurality of electrodes comprises two or more left external electrodes configured to be located proximate the left side of the patient, wherein the electrical heterogeneity information comprises at least one of:

[0232] a global standard deviation of surrogate electrical activation times monitored by the plurality of external electrodes; and

[0233] a left metric of electrical activation times monitored by the two or more left external electrodes.

Embodiment 30

[0234] The embodiment as set forth in any one of embodiments 28-29, wherein the electrical heterogeneity information comprises a percentage change in the electrical heterogeneity information determined from electrical activity monitored during the corresponding cardiac therapy sce-

nario and electrical heterogeneity information determined from electrical activity monitored during intrinsic cardiac activation.

Embodiment 31

[0235] The embodiment as set forth in any one of embodiments 25-30, wherein the computing apparatus is further configured to execute or the method further comprises displaying, on the graphical user interface, a graphical map of intrinsic electrical activation based on electrical activity monitored during intrinsic cardiac activation.

[0236] This disclosure has been provided with reference to illustrative embodiments and is not meant to be construed in a limiting sense. As described previously, one skilled in the art will recognize that other various illustrative applications may use the techniques as described herein to take advantage of the beneficial characteristics of the apparatus and methods described herein. Various modifications of the illustrative embodiments, as well as additional embodiments of the disclosure, will be apparent upon reference to this description.

What is claimed:

1. A system for use in cardiac evaluation comprising:
 - electrode apparatus comprising a plurality of external electrodes to be located proximate a patient's skin;
 - display comprising a graphical user interface to present information for use in assisting a user in at least one of assessing a patient's cardiac health, evaluating and adjusting cardiac therapy delivered to a patient, and navigating at least one implantable electrode to a region of the patient's heart; and
 - computing apparatus comprising processing circuitry, the computing apparatus operably coupled to the electrode apparatus and the display, the computing apparatus configured to:
 - monitor electrical activity from the patient's skin using the plurality of external electrodes,
 - display, on the graphical user interface, a graphical map comprising a plurality of electrode graphical elements corresponding to and positioned on the graphical map in relation to the physical location of the plurality of electrodes located proximate the patient's skin, wherein the graphical map extends from a left portion corresponding to anterior side of the patient to a middle portion corresponding to the left side of the patient to a right side corresponding to the posterior side of the patient, and
 - display, on the graphical user interface, an effectiveness value proximate each of the plurality of electrode graphical elements representative of the effectiveness of the corresponding electrode in providing a valid sensing signal from the tissue of the patient.
2. The system of claim 1, wherein the computing apparatus is further configured to display, on the graphical user interface, a principal electrodes graphical region proximate one or more electrode graphical elements to indicate which of the plurality of electrodes most significant.
3. The system of claim 1, wherein the effectiveness value comprises one of the following three values: good signal, poor signal, and not in contact.
4. The system of claim 1, wherein the computing apparatus is further configured to display, on the graphical user interface, a global electrode connection status message

indicative of the state of the plurality of electrodes providing valid sensing signals from the tissue of the patient.

5. A method comprising:
 - providing a plurality of external electrodes to be located proximate a patient's skin;
 - monitoring electrical activity from the patient's skin using the plurality of external electrodes;
 - displaying, on the graphical user interface, a graphical map comprising a plurality of electrode graphical elements corresponding to and positioned on the graphical map in relation to the physical location of the plurality of electrodes located proximate the patient's skin, wherein the graphical map extends from a left portion corresponding to anterior side of the patient to a middle portion corresponding to the left side of the patient to a right side corresponding to the posterior side of the patient; and
 - displaying, on the graphical user interface, an effectiveness value proximate each of the plurality of electrode graphical elements representative of the effectiveness of the corresponding electrode in providing a valid sensing signal from the tissue of the patient.
6. The method of claim 5, further comprising displaying, on the graphical user interface, a principal electrodes graphical region proximate one or more electrode graphical elements to indicate which of the plurality of electrodes most significant.
7. The method of claim 5, wherein the effectiveness value comprises one of the following three values: good signal, poor signal, and not in contact.
8. The method of claim 5, further comprising displaying, on the graphical user interface, a global electrode connection status message indicative of the state of the plurality of electrodes providing valid sensing signals from the tissue of the patient.
9. A system for use in cardiac evaluation comprising:
 - electrode apparatus comprising a plurality of external electrodes to be located proximate a patient's skin;
 - display comprising a graphical user interface to present information for use in assisting a user in at least one of assessing a patient's cardiac health, evaluating and adjusting cardiac therapy delivered to a patient, and navigating at least one implantable electrode to a region of the patient's heart; and
 - computing apparatus comprising processing circuitry, the computing apparatus operably coupled to the electrode apparatus and the display, the computing apparatus configured to:
 - monitor electrical activity from the patient's skin using the plurality of external electrodes resulting in a plurality of electrode signals,
 - display, on the graphical user interface, the plurality of electrode signals over a plurality of cardiac cycles,
 - select or allow a user to select one cardiac cycle of the plurality of cardiac cycles, and
 - display, on the graphical user interface, a graphical map of electrical activation based on the monitored electrical activity for the selected cardiac cycle.
10. The system of claim 9, wherein the computing apparatus is further configured to display, on the graphical user interface, a plurality of electrode elements corresponding to and positioned on the graphical map of electrical activation in relation to the physical location of the plurality of electrodes located proximate the patient's skin, wherein the

graphical map extends from a left portion corresponding to anterior side of the patient to a middle portion corresponding to the left side of the patient to a right side corresponding to the posterior side of the patient.

11. The system of claim 10, wherein the computing apparatus is further configured to allow a user to hide or display the plurality of electrode elements.

12. The system of claim 10, wherein the computing apparatus is further configured to graphically indicate, on graphical map of electrical activation, one or more areas of conduction block based on the monitored electrical activity for the selected cardiac cycle.

13. The system of claim 10, wherein the computing apparatus is further configured to graphically indicate, on the graphical user interface, which of the plurality of electrode elements corresponds to electrodes that are ineffective in providing a valid sensing signal from the tissue of the patient.

14. The system of claim 9, wherein the computing apparatus is further configured to interpolate the electrical activation of each area of the graphical map of electrical activation corresponding corresponds to external electrodes that are ineffective in providing a valid sensing signal from the tissue of the patient.

11. The system of claim 9, wherein the computing apparatus is further configured to display at least one metric of electrical heterogeneity based on the monitored electrical activity for the selected cardiac cycle.

16. The system of claim 9, wherein the computing apparatus is further configured to:

allow a user to select a cardiac therapy scenario of a plurality of different cardiac therapy scenarios; and display, on the graphical user interface, the plurality of electrode signals over a plurality of cardiac cycles corresponding to the selected cardiac therapy scenario.

17. The system of claim 16, wherein each of the plurality of different cardiac therapy scenarios comprise at least one different pacing configuration, AV delay, and LV pacing site.

18. The system of claim 9, wherein the computing apparatus is further configured to allow a user to select an electrode set of a plurality of different electrode sets of the plurality of external electrodes,

wherein the displayed plurality of electrode signals over the plurality of cardiac cycles comprises only electrode signals of the selected electrode set, and the displayed graphical map of electrical activation is based on the monitored electrical activity from only electrode signals of the selected electrode set.

19. A method comprising:

providing a plurality of external electrodes to be located proximate a patient's skin;
monitoring electrical activity from the patient's skin using the plurality of external electrodes resulting in a plurality of electrode signals;
displaying, on the graphical user interface, the plurality of electrode signals over a plurality of cardiac cycles;

selecting or allowing a user to select one cardiac cycle of the plurality of cardiac cycles; and

displaying, on the graphical user interface, a graphical map of electrical activation based on the monitored electrical activity for the selected cardiac cycle.

20. The method of claim 19, the method further comprising displaying, on the graphical user interface, a plurality of electrode elements corresponding to and positioned on the graphical map of electrical activation in relation to the physical location of the plurality of electrodes located proximate the patient's skin, wherein the graphical map extends from a left portion corresponding to anterior side of the patient to a middle portion corresponding to the left side of the patient to a right side corresponding to the posterior side of the patient.

21. The method of claim 20, the method further comprising allowing a user to hide or display the plurality of electrode elements.

22. The method of claim 20, the method further comprising graphically indicating, on graphical map of electrical activation, one or more areas of conduction block based on the monitored electrical activity for the selected cardiac cycle.

23. The method of claim 20, the method further comprising graphically indicating, on the graphical user interface, which of the plurality of electrode elements corresponds to electrodes that are ineffective in providing a valid sensing signal from the tissue of the patient.

24. The method of claim 19, the method further comprising interpolating the electrical activation of each area of the graphical map of electrical activation corresponding corresponds to external electrodes that are ineffective in providing a valid sensing signal from the tissue of the patient.

25. The method of claim 19, the method further comprising displaying at least one metric of electrical heterogeneity based on the monitored electrical activity for the selected cardiac cycle.

26. The method of claim 19, the method further comprising:

allowing a user to select a cardiac therapy scenario of a plurality of different cardiac therapy scenarios; and displaying, on the graphical user interface, the plurality of electrode signals over a plurality of cardiac cycles corresponding to the selected cardiac therapy scenario.

27. The method of claim 26, wherein each of the plurality of different cardiac therapy scenarios comprise at least one different pacing configuration, AV delay, and LV pacing site.

28. The method of claim 19, the method further comprising allowing a user to select an electrode set of a plurality of different electrode sets of the plurality of external electrodes, wherein the displayed plurality of electrode signals over the plurality of cardiac cycles comprises only electrode signals of the selected electrode set, and the displayed graphical map of electrical activation is based on the monitored electrical activity from only electrode signals of the selected electrode set.

* * * * *

| | | | |
|----------------|---|---------|------------|
| 专利名称(译) | 用于心脏评估的系统，方法和界面 | | |
| 公开(公告)号 | US20190366106A1 | 公开(公告)日 | 2019-12-05 |
| 申请号 | US15/995406 | 申请日 | 2018-06-01 |
| [标]申请(专利权)人(译) | 美敦力公司 | | |
| 申请(专利权)人(译) | 美敦力公司，INC. | | |
| 当前申请(专利权)人(译) | 美敦力公司，INC. | | |
| [标]发明人 | GHOSH SUBHAM KLECKNER KAREN RHODES MELISSA KUDLIK DANNE DOYLE KEELIA BLAUER JOSHUA | | |
| 发明人 | GHOSH, SUBHAM KLECKNER, KAREN RHODES, MELISSA KUDLIK, D'ANNE REICH, JORDYN DOYLE, KEELIA BLAUER, JOSHUA | | |
| IPC分类号 | A61N1/372 A61B5/00 A61B5/044 A61B5/0452 A61B17/34 A61B5/0408 A61B34/20 A61N1/02 A61N1/365 A61N1/368 A61N1/39 | | |
| CPC分类号 | A61N1/3688 A61B2562/0209 A61B5/0452 A61B34/20 A61N1/025 A61B2034/2051 A61B5/0006 A61B5/7221 A61N1/36507 A61B5/7475 A61B17/3468 A61B2562/043 A61B5/04085 A61N1/37247 A61B2562/046 A61N1/39622 A61B5/6843 A61B5/6823 A61B5/044 A61B5/04012 A61B5/6805 A61B5/743 A61N1/362 A61N1/368 | | |
| 外部链接 | Espacenet USPTO | | |

摘要(译)

本文描述了用于评估和调整心脏疗法的系统，界面和方法。该系统，界面和方法可以利用或包括图形用户界面来显示关于多个外部电极的各种信息以及使用这种外部电极监视的电活动，并允许用户调整要显示的信息。

