



(51) International Patent Classification:

H01L 51/52 (2006.01) **H05B 33/22** (2006.01)
G09F 9/00 (2006.0 1) **G02B 5/30** (2006.0 1)
H01L 27/32 (2006.01)

(21) International Application Number:

PCT/US20 13/071297

(22) International Filing Date:

21 November 2013 (21.11.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/73 1,659 30 November 2012 (30.11.2012) US

(71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55 133-3427 (US).

(72) Inventors: **HAAG, Adam, D.**; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55 133-3427 (US). **AREFE, Ghidewon**; 111 East Kellogg Boulevard, Saint Paul, Minnesota 55 101 (US). **EPSTEIN, Kenneth, A.**; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55 133-3427 (US). **NAISMITH, Nathaniel, K.**; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55 133-3427 (US). **LEE, Seong Taek**; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55 133-3427 (US). **LAMANSKY, Sergey**; 6601 229th Avenue NE, Redmond, Washington 98053 (US). **TOLBERT, William, A.**; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55 133-3427 (US).

(74) Agents: **FULTON, Lisa, P.** et al; 3M Center Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, Minnesota 55 133-3427 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.1 7(H))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.1 7(in))

Published:

- with international search report (Art. 21(3))

(54) Title: EMISSIVE DISPLAY WITH REFLECTIVE POLARIZER

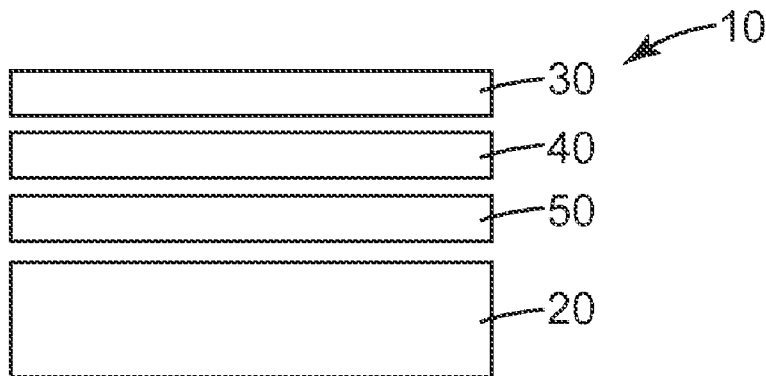

(57) Abstract: An emissive display includes an OLED, a linear polarizer, a reflective polarizer optically between the OLED and the linear polarizer, and a structured optical film optically between the OLED and the reflective polarizer.



EMISSIVE DISPLAY WITH REFLECTIVE POLARIZER**FIELD**

The disclosure relates to emissive displays and, in particular, to emissive displays that includes a polarization selective antireflection film component.

BACKGROUND

Organic Light Emitting Diode (OLED) devices include a thin film of electroluminescent organic material sandwiched between a cathode and an anode, with one or both of these electrodes being a transparent conductor. When a voltage is applied across the device, electrons and holes are injected from their respective electrodes and recombine in the electroluminescent organic material through the intermediate formation of emissive excitons.

Emissive displays such as OLEDs commonly use anti-reflection films such as circular polarizers to reduce reflection from ambient light caused by the metallic layers of the OLED. A circular polarizer comprised of a linear absorbing polarizer and a $\frac{1}{4}$ wave film extinguishes a large amount of ambient light incident on the display. This circular polarizer has the disadvantages of absorbing 50% or more of the emitted light from the OLED and also is expensive to produce due the difficulty of applying the $\frac{1}{4}$ wave film to the linear polarizer since the pass axis of the linear polarizer and the fast or slow axis of the $\frac{1}{4}$ wave (QW) film must be aligned 45 degrees relative to each other.

The display contrast is defined as the ratio (White -Black)/Black, where White is the brightest on-state and Black is the darkest off-state. In a darkened room, the contrast is limited by the intrinsic Black and White luminance values of the display device. In normal use the ambient light level and the display reflectance add to the intrinsic luminance levels. An ideal circular polarizer (CP) cuts the White state luminance by 50% and it reduces the ambient reflectance to that of the first surface of the polarizer. Because a practical QW element is exact at only one wavelength and only one view angle, hence there is a baseline reflectance.

In a bright ambient environment, such as daylight, the best commercial CP may be insufficient to maintain the required contrast, whereas, in a typical home or office environment the required contrast may be achieved without a high performance CP. The cost of the CP film stack must adjust with the performance value demanded in the intended use.

The display brightness is a key attribute that bears a cost in the expense of electronic drive capacity and its associated bulk as well as the emitter lifetime. In addition, the display power efficiency is an important consumer regulatory counterbalance to display brightness. The CP antireflection stack cuts the brightness and power efficiency by more than half. An anti-reflection component that also enhances brightness adds value.

The CP implementation is complicated by the prescribed 45-degree alignment of the QW and linear polarizer films, which often requires piece to piece lamination rather than roll to roll lamination. An anti-reflection component that enables roll to roll assembly reduces cost.

5 BRIEF SUMMARY

The disclosure relates to emissive displays and, in particular, to emissive displays that include polarization selective antireflection film components. The disclosure also relates to issues arising from these antireflection film components, such as brightness efficiency loss and assembly cost.

10 In many embodiments an emissive display includes an OLED, a linear polarizer, a reflective polarizer optically between the OLED and the linear polarizer, and a structured optical film optically between the OLED and the reflective polarizer. A $\frac{1}{4}$ wave film can be optionally disposed between the reflective polarizer and the structured optical film.

15 In further embodiments an emissive display includes an OLED, a linear polarizer and a reflective polarizer optically between the OLED and the linear polarizer. The emissive display does not include a quarter wave element.

In further embodiments an emissive display includes an OLED, a linear polarizer, a reflective polarizer optically between the OLED and the linear polarizer, and a non-polarization preserving element between the OLED and the reflective polarizer.

20 The details of one or more embodiments of the disclosure are set forth in the accompanying drawings and the description below. Other features, objects, and advantages of the disclosure will be apparent from the description and drawings, and from the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

25 The disclosure may be more completely understood in consideration of the following detailed description of various embodiments of the disclosure in connection with the accompanying drawings, in which:

FIG. 1 is a schematic cross-sectional view of an emissive display;

FIG. 2 is a schematic cross-sectional view of another emissive display;

30 FIG. 3 is a schematic cross-sectional view of another emissive display; and FIG. 4 is a schematic cross-sectional view of another emissive display.

DETAILED DESCRIPTION

35 In the following detailed description, reference is made to the accompanying drawings that form a part hereof, and in which are shown by way of illustration several specific embodiments. It is to be understood that other embodiments are contemplated and may be made without departing from the scope or spirit of the present disclosure. The following detailed description, therefore, is not to be taken in a limiting sense.

All scientific and technical terms used herein have meanings commonly used in the art unless otherwise specified. The definitions provided herein are to facilitate understanding of certain terms used frequently herein and are not meant to limit the scope of the present disclosure.

Unless otherwise indicated, all numbers expressing feature sizes, amounts, and physical
5 properties used in the specification and claims are to be understood as being modified in all instances by the term "about." Accordingly, unless indicated to the contrary, the numerical parameters set forth in the foregoing specification and attached claims are approximations that can vary depending upon the desired properties sought to be obtained by those skilled in the art utilizing the teachings disclosed herein.

As used in this specification and the appended claims, the singular forms "a," "an," and "the"
10 encompass embodiments having plural referents, unless the content clearly dictates otherwise. As used in this specification and the appended claims, the term "or" is generally employed in its sense including "and/or" unless the content clearly dictates otherwise.

Spatially related terms, including but not limited to, "lower," "upper," "beneath," "below,"
15 "above," and "on top," if used herein, are utilized for ease of description to describe spatial relationships of an element(s) to another. Such spatially related terms encompass different orientations of the device in use or operation in addition to the particular orientations depicted in the figures and described herein. For example, if an object depicted in the figures is turned over or flipped over, portions previously described as below or beneath other elements would then be above those other elements.

As used herein, when an element, component or layer for example is described as forming a
20 "coincident interface" with, or being "on" "connected to," "coupled with" or "in contact with" another element, component or layer, it can be directly on, directly connected to, directly coupled with, in direct contact with, or intervening elements, components or layers may be on, connected, coupled or in contact with the particular element, component or layer, for example. When an element, component or layer for example is referred to as being "directly on," "directly connected to," "directly coupled with," or "directly
25 in contact with" another element, there are no intervening elements, components or layers for example.

As used herein, "have", "having", "include", "including", "comprise", "comprising" or the like
are used in their open ended sense, and generally mean "including, but not limited to." It will be understood that the terms "consisting of" and "consisting essentially of" are subsumed in the term "comprising," and the like.

30 The term "OLED" refers to an organic light emitting device. OLED devices include a thin film of electroluminescent organic material sandwiched between a cathode and an anode, with one or both of these electrodes being a transparent conductor. When a voltage is applied across the device, electrons and holes are injected from their respective electrodes and recombine in the electroluminescent organic material through the intermediate formation of emissive excitons.

35 The phrase "non-polarization preserving element", defined here, is a bulk optic, coating, or film that depolarize, convert or alter the polarization of a portion of an incident polarized beam of light. The portion may be selected spatially, angularly, or by wavelength and may be part or the entire incident

beam. Non-polarization preserving elements may include bulk optics such as Cornu or Lyot depolarizers, optical retarder films or coatings, volume scattering films or coatings, heterogeneous coatings containing form birefringent or molecularly birefringent domains such as liquid crystals, polymer liquid crystals, or other polarizable polymers, and metamaterials containing mixed orientation domains of birefringent media.

A "structured optical film" refers to a film or layer that improves light outcoupling from an OLED device and/or improves angular luminance or/and color uniformity of the OLED. The light extraction function and angular luminance/color improvement function can also be combined in one structured film. A structured optical film can include periodic, quasi-periodic or random engineered nanostructures (e.g., light extraction film, described below), and/or it can include periodic, quasi-periodic or random engineered microstructures with structured feature size of equal or higher than lum.

A "light extraction film" refers to a substantially transparent substrate, low index nanostructures, and a high index backfill layer forming a substantially planar surface over the nanostructures. The term "substantially planar surface" means that the backfill layer planarizes the underlying layer, although slight surface variations may be present in the substantially planar surface. When the planar surface of the backfill layer is placed against the light output surface of the OLED device the nanostructures at least partially enhance light output from the OLED device. The backfill planar surface can be placed directly against the OLED light output surface or through another layer between the planar surface and light output surface.

The terms "nanostructure" or "nanostructures" refers to structures having at least one dimension (e.g., height, length, width, or diameter) of less than 2 micrometers and more preferably less than one micrometer. Nanostructure includes, but is not necessarily limited to, particles and engineered features. The particles and engineered features can have, for example, a regular or irregular shape. Such particles are also referred to as nanoparticles. The term "nanostructured" refers to a material or layer having nanostructures.

The disclosure relates to emissive displays and, in particular, to emissive displays that include a polarization selective antireflection film component, among other aspects. The emissive display can include a reflective polarizer. The emissive display can include a linear and reflective polarizer and a non-polarization preserving element. The emissive display can include a linear and reflective polarizer and a structured optical film. The reflective polarizer in combination with the structured optical film allows for the removal of a quarter wave element or retarder from the emissive display, which makes the device easier to manufacture while maintaining the optical properties of the emissive display. While the present disclosure is not so limited, an appreciation of various aspects of the disclosure will be gained through a discussion of the examples provided below.

FIG.s 1-4 is a schematic cross-sectional views of an emissive displays **10**. The emissive display **10** illustrated in **FIG. 1** includes an organic light emitting diode **20** (i.e., OLED), a linear polarizer **30**, a reflective polarizer **40** optically between the OLED **20** and the linear polarizer **30**, and a structured optical

film **50** or a non-polarization preserving element **50** optically between the OLED **20** and the reflective polarizer **40**.

The emissive display **10** illustrated in **FIG. 2** includes an organic light emitting diode **20** (i.e., OLED), a linear polarizer **30**, and a reflective polarizer **40** optically between the OLED **20** and the linear polarizer **30**. **FIG. 2** does not include a quarter wave element (see element **60** in **FIG. 3**) and exemplified in Example 3 below.

The emissive display **10** illustrated in **FIG. 3** includes an organic light emitting diode **20** (i.e., OLED), a linear polarizer **30**, a reflective polarizer **40** optically between the OLED **20** and the linear polarizer **30**, and a structured optical film **50** or a non-polarization preserving element **50** is optically between the OLED **20** and the reflective polarizer **40** and a quarter wave element **60** optically between the reflective polarizer **40** and the structured optical film **50** or a non-polarization preserving element **50**.

The emissive display **10** illustrated in **FIG. 4** includes an organic light emitting diode **20** (i.e., OLED), a linear polarizer **30**, a reflective polarizer **40** optically between the OLED **20** and the linear polarizer **30**, and a structured optical film **50** or a non-polarization preserving element **50** is optically between the OLED **20** and the reflective polarizer **40** where the linear polarizer **30**, reflective polarizer **40** and structured optical film **50** or a non-polarization preserving element **50** form a single composite film.

The OLED **20** can be any useful light emissive device. Considering the microcavity effect, OLEDs can be roughly categorized into two types, i.e., weak microcavity OLEDs and strong microcavity OLEDs. Conventional bottom emitting OLEDs are weak microcavity devices, while OLEDs with distributed Bragg reflectors or two metallic electrodes are considered as strong microcavity devices. Light emission properties, including the internal quantum efficiency (nint), external quantum efficiency, exciton lifetime, and angular dependence, are distinct in the two types of OLEDs due to Fabri-Perot resonant cavity effect and the Purcell effect. In many embodiments the OLED **20** is strong microcavity OLED. In other embodiments the OLED **20** is a weak microcavity OLED.

The linear polarizer **30** can be any useful linear polarizer element. A linear polarizer transmits light with a single polarization state. The linear polarizer **30** can be a wire grid polarizer or an absorptive polarizer. One useful type of absorptive polarizer is a dichroic polarizer. Dichroic polarizers are made, for example, by incorporating a dye into a polymer sheet that is then stretched in one direction. Dichroic polarizers can also be made by uniaxially stretching a semicrystalline polymer such as polyvinyl alcohol, then staining the polymer with an iodine complex or dichroic dye, or by coating a polymer with an oriented dichroic dye. These polarizers often use polyvinyl alcohol as the polymer matrix for the dye. Dichroic polarizers generally have a large amount of absorption of light.

The reflective polarizer **40** can be any useful reflective polarizer element. A reflective polarizer transmits light with a single polarization state and reflects the remaining light. In many embodiments the reflective polarizer **40** is a birefringent reflective polarizers. A birefringent reflective polarizer includes a multilayer optical film having a first layer of a first material disposed (e.g., by coextrusion) on a second layer of a second material. One or both of the first and second materials may be birefringent. The total

number of layers may be hundreds or thousands or more. In some exemplary embodiments, adjacent first and second layers may be referred to as an optical repeating unit. Reflective polarizers suitable for use in exemplary embodiments of the present disclosure are described in, for example, U.S. Pat. Nos. 5,882,774, 6,498,683 and 5,808,794, which are incorporated herein by reference.

5 Any suitable type of reflective polarizer may be used for the reflective polarizer, e.g., multilayer optical film (MOF) reflective polarizers; diffusely reflective polarizing film (DRPF), such as continuous/disperse phase polarizers; wire grid reflective polarizers; or cholesteric reflective polarizers.

Both the MOF and continuous/disperse phase reflective polarizers rely on the difference in refractive index between at least two materials, usually polymeric materials, to selectively reflect light of one polarization state while transmitting light in an orthogonal polarization state. Some examples of MOF reflective polarizers are described in co-owned U.S. Pat. No. 5,882,774 (Jonza et al.). Commercially available examples of MOF reflective polarizers include Vikuiti™ DBEF-D2-400 and DBEF-D4-400 multilayer reflective polarizers that include diffusive surfaces, available from 3M Company.

15 Examples of DRPF useful in connection with the present disclosure include continuous/disperse phase reflective polarizers as described, e.g., in co-owned U.S. Pat. No. 5,825,543 (Ouder Kirk et al.), and diffusely reflecting multilayer polarizers as described, e.g., in co-owned U.S. Pat. No. 5,867,316 (Carlson et al.). Other suitable types of DRPF are described in U.S. Pat. No. 5,751,388 (Larson).

Some examples of wire grid polarizers useful in connection with the present disclosure include those described, e.g., in U.S. Pat. No. 6,122,103 (Perkins et al.). Wire grid polarizers are commercially available, inter alia, from Moxtek Inc., Orem, Utah. Some examples of cholesteric polarizers useful in connection with the present disclosure include those described, e.g., in U.S. Pat. No. 5,793,456 (Broer et al.), and U.S. Patent Publication No. 2002/0159019 (Pokorny et al.). Cholesteric polarizers are often provided along with a quarter wave retarding layer on the output side so that the light transmitted through the cholesteric polarizer is converted to linearly polarized light.

25 In a birefringent reflective polarizer, the refractive indices of the first layers (n_{ix} , n_{iy} , n_{iz}) and those of the second layers (n_{2x} , n_{2y} , n_{2z}) are substantially matched along one in-plane axis (y-axis) and are substantially mismatched along another in-plane axis (x-axis). The matched direction (y) forms a transmission (pass) axis or state of the polarizer, such that light polarized along that direction is preferentially transmitted, and the mismatched direction (x) forms a reflection (block) axis or state of the polarizer, such that light polarized along that direction is preferentially reflected. Generally, the larger the mismatch in refractive indices along the reflection direction and the closer the match in the transmission direction, the better the performance of the polarizer.

35 A multilayer optical film typically includes individual microlayers having different refractive index characteristics so that some light is reflected at interfaces between adjacent microlayers. The microlayers are sufficiently thin so that light reflected at a plurality of the interfaces undergoes constructive or destructive interference to give the multilayer optical film the desired reflective or

transmissive properties. For multilayer optical films designed to reflect light at ultraviolet, visible, or near-infrared wavelengths, each microlayer generally has an optical thickness (a physical thickness multiplied by refractive index) of less than about 1 μm . However, thicker layers can also be included, such as skin layers at the outer surfaces of the multilayer optical film, or protective boundary layers (PBLs) disposed between the multilayer optical films, that separate the coherent groupings of microlayers. Such a multilayer optical film body can also include one or more thick adhesive layers to bond two or more sheets of multilayer optical film in a laminate.

In some cases, to function well for wide angle viewing of an emissive display device, a birefringent reflective polarizer maintains a high block state contrast for all angles of incidence and also maintains a high pass transmission over all angles of incidence. As it has been shown in the commonly owned U.S. Pat. No. 5,882,774, pass state transmission increases when the refractive indices of the alternating first and second layers and are matched for light polarized along the z-axis and for light polarized along the y-axis. The z-index matching also ensures that the block state transmission does not degrade at high angles of incidence. One specific useful birefringent reflective polarizer is a birefringent polymeric multi-layer polarizing film known under the trade designation "3M Advanced Polarizing Film" or "APF". U.S. Pat. No. 6,486,997, mentions the use of such a film as a PBS.

In some cases to function well for wide angle viewing of an emissive display device, the reflective polarizer has a reflectivity that generally increases with angle of incidence, and a transmission that generally decreases with angle of incidence. Such reflectivity and transmission may be for unpolarized visible light in any plane of incidence, or for light of a useable polarization state incident in a plane for which oblique light of the useable polarization state is p-polarized, or an orthogonal plane for which oblique light of the useable polarization state is s-polarized. This behavior can be desirable for some displays in order to emit more light at viewing angles more important to the display industry. This effect is called collimation. Examples of these types of films are described in U.S. Pat. No. 8,469,575.

The structured optical film **50** or a non-polarization preserving element **50** described herein can be a separate film applied to an OLED device. For example, an optical coupling layer can be used to optically couple the structured optical film or a non-polarization preserving element to a light output surface of an OLED device. The optical coupling layer can be applied to the structured optical film or a non-polarization preserving element, the OLED device, or both, and it can be implemented with an adhesive to facilitate application of the structured optical film or a non-polarization preserving element to the OLED device. As an alternative to a separate optical coupling layer, the high index backfill layer itself may be comprised of a high index adhesive, so that the optical and planarizing functions of the backfill, and the adhering function of the adhesive optical coupling layer, are performed by the same layer. Examples of optical coupling layers and processes for using them to laminate light extraction films to OLED devices are described in U.S. Patent Publication No. 2012/0234460, which is incorporated herein by reference as if fully set forth. In other embodiments, the structured optical film **50** or a non-

polarization preserving element **50** described herein can be a separate film applied to an OLED device and is not optically coupled to the OLED.

The nanostructures for the structured optical film or a non-polarization preserving element (e.g., light extraction film) can be formed integrally with the substrate or in a layer applied to the substrate. For example, the nanostructures can be formed on the substrate by applying to the substrate a low-index material and subsequently patterning the material. Nanostructures are structures having at least one dimension, such as width, less than 1 micron.

Nanostructure includes, but is not necessarily limited to, particles and engineered features. The particles and engineered features can have, for example, a regular or irregular shape. Such particles are also referred to as nanoparticles. Engineered nanostructures are not individual particles but may be composed of nanoparticles forming the engineered nanostructures where the nanoparticles are significantly smaller than the overall size of the engineered structures.

The nanostructures for a structured optical film or a non-polarization preserving element (e.g., light extraction film) can be one-dimensional (1D), meaning they are periodic in only one dimension, that is, nearest-neighbor features are spaced equally in one direction along the surface, but not along the orthogonal direction. In the case of 1D periodic nanostructures, the spacing between adjacent periodic features is less than 1 micron. One-dimensional structures include, for example, continuous or elongated prisms or ridges, or linear gratings.

The nanostructures for a structured optical film or a non-polarization preserving element (e.g., light extraction film) can also be two-dimensional (2D), meaning they are periodic in two dimensions, that is, nearest neighbor features are spaced equally in two different directions along the surface. In the case of 2D nanostructures, the spacing in both directions is less than 1 micron. Note that the spacing in the two different directions may be different. Two-dimensional structures include, for example, lenslets, pyramids, trapezoids, round or square shaped posts, or photonic crystal structures. Other examples of two-dimensional structures include curved sided cone structures as described in U.S. Pat. Application Publication No. 2010/0128351, which is incorporated herein by reference as if fully set forth.

Materials for the substrates, low index multi-periodic structures, and high index backfill layers for light extraction film are provided in the published patent applications identified above. For example, the substrate can be implemented with glass, PET, polyimides, TAC, PC, polyurethane, PVC, or flexible glass. Processes for making light extraction film are also provided in the published patent applications identified above. Optionally, the substrate can be implemented with a barrier film to protect a device incorporating the light extraction film from moisture or oxygen. Examples of barrier films are disclosed in U.S. Pat. Application Publication No. 2007/0020451 and U.S. Pat. No. 7,468,211, both of which are incorporated herein by reference as if fully set forth.

The quarter wave element **30** can be any useful linear polarizer element. A quarter wave element **30** or retarder can convert the polarization direction of linearly polarized light into circularly polarized light and vice versa. In some embodiments, the quarter wave element **30** can form a single composite

film with the linear polarizer **30**, and reflective polarizer **40**. In some embodiments, the quarter wave element **30** can form a single composite film with the linear polarizer **30**, reflective polarizer **40**, and structured optical film **50** or non-polarization preserving element **50**.

In some embodiments the emissive displays **10** does not include a quarter wave element **30**. It is surprising that when utilizing the structured optical film **50**, the quarter wave element **30** can be eliminated without degrading optical properties of the emissive display **10**, as illustrated in the Examples below. Eliminating the quarter wave element **30** can simplify the manufacture and reduce the cost of the emissive display **10**.

Conventional circular polarizers are used on emissive displays to reduce glare from ambient light. One disadvantage of this circular polarizer is that emitted light is reduced by 50% or more. There are some display applications where higher emitted luminance efficiency is very desirable for enabling longer lifetime of the emissive display or improving displayed visual quality. In some display applications, ambient light is lower, such as TVs in the home, and requirements for reducing ambient light glare are lessened. In some embodiments of the present disclosure, the luminance efficiency increase of the emissive display relative to one with a conventional circular polarizer may be up to 1.3, in other embodiments, the luminance efficiency increase of the emissive display relative to one with a conventional circular polarizer may be up to 2.0. In other embodiments of the present disclosure, the luminance efficiency increase of the emissive display relative to one with a conventional circular polarizer may be up to 4.0. These gains in luminance efficiency are achieved while still reducing glare caused by ambient light compared to an emissive display with no anti-reflection film.

The combination of conventional circular polarizers and certain emissive displays, such as strong microcavity OLEDs, often have a large color shift as a function of viewing angle. In some cases, this is a compromise made in order to improve axial luminance efficiency. This color shift may also be caused by the lack of achromaticity of the quarter wave element due to birefringence dispersion in a conventional circular polarizer. Some embodiments of the present disclosure provide increased luminance efficiency which can allow for emissive displays without compromised color shift with angle.

Some of the advantages of the disclosed emissive displays are further illustrated by the following examples. The particular materials, amounts and dimensions recited in this example, as well as other conditions and details, should not be construed to unduly limit the present disclosure.

EXAMPLES

All parts, percentages, ratios, etc. in the examples are by weight, unless noted otherwise. Solvents and other reagents used were obtained from Sigma-Aldrich Chemical Company; Milwaukee, WI unless specified differently.

5

Materials

Abbreviation/Product Name	Description	Available From
3-mercaptopropyl trimethoxysilane	Chain Transfer Agent, 95%	Alfa Aesar, Ward Hill, MA
IRGACURE 184	Photoinitiator	Ciba Specialty Chemicals, Tarrytown, NY
MoO ₃	PURATRONIC MoO ₃ , 99.9995% metals basis	Alfa Aesar, Ward Hill, MA
Nagase XNR5516Z-B1	UV curable epoxy resin	Nagase chemteX Corp., Japan
PHOTOMER 6210	Aliphatic urethane diacrylate	Cognis Corporation, Cincinnati, OH
SOLPLUS D510	Polyester-polyamine copolymer	Lubrizol, Cleveland, OH
SR238	1,6 hexanediol diacrylate	Sartomer Company, Exton, PA
SR833S	Difunctional acrylate monomer	Sartomer Company, Exton, PA
APF	Advanced Polarizer Film	3M Company, St Paul, MN
QWP	Quarter wave retarder film available under the trade name APQW92-004-MT	American Polarizers, Inc., Reading, PA
Sanritz-5618	Linear absorbing polarizer available under the trade name HLC2-5618	Sanritz Corporation, Tokyo, Japan.

Preparative Examples

Preparation of D510 Stabilized 50 nm TiO₂ Nanoparticle Dispersions

10 A TiO₂ nanoparticle dispersion with an approximately 52% wt of TiO₂ was prepared using a milling process in the presence of SOLPLUS D510 and 1-methoxy-2-propanol. The SOLPLUS D510 was added in an amount of 25% wt based on TiO₂ weight. The mixture was premixed using a DISPERMAT mixer (Paul N. Gardner Company, Inc., Pompano Beach, FL) for 10 minutes and then a NETZSCH MiniCer Mill (NETZSCH Premier Technologies, LLC, Exton, PA) was used with the
15 following conditions: 4300 rpm, 0.2 mm YTZ milling media, and 250 ml/min flow rate. After 1 hour of

milling, a white paste-like TiO_2 dispersion in 1-methoxy-2-propanol was obtained. The particle size was determined to be 50 nm (Z-average size) using a Malvern Instruments ZETASIZER Nano ZS (Malvern Instruments Inc, Westborough, MA).

5 Preparation of High Index Backfill Solution (HI-BF)

20 g of D510 stabilized 50 nm TiO_2 solution, 2.6 g of SR833S, 0.06 g of IRGACURE 184, 25.6 g of 1-methoxy-2-propanol, 38.4 g of 2-butanone were mixed together to form a homogenous high index backfill solution.

10 Fabrication of Nanostructured Film with 400nm Pitch

A 400 nm "sawtooth" grating film was fabricated by first making a multi-tipped diamond tool as described in U.S. Patent No. 7,140,812 (using a synthetic single crystal diamond, Sumitomo Diamond, Japan).

15 The diamond tool was then used to make a copper micro-replication roll which was then used to make 400 nm ID structures on a PET film in a continuous cast and cure process utilizing a polymerizable resin made by mixing 0.5% (2,4,6 trimethyl benzoyl) diphenyl phosphine oxide into a 75:25 blend of PHOTOMER 6210 and SR238.

20 HI-BF solution was coated onto the 400 nm pitch ID structured film using a roll to roll coating process with a web speed of 4.5 m/min (15 ft/min) and a dispersion delivery rate of 5.1 cc/min. The coating was dried in air at room temperature, then subsequently further dried at 82 °C (180 °F) and then cured using a Fusion UV-Systems Inc. Light-Hammer 6 UV (Gaithersburg, Maryland) processor equipped with an H-bulb, operating under nitrogen atmosphere at 75% lamp power at a line speed of 4.5 m/min (15 ft/min).

25 **Examples 1 and 2 and Comparative Examples C-1 and C-2**

30 Top Emissive (TE) OLED test coupons were built using standard thermal deposition in a vacuum system at base pressure of about 10^{-6} Torr. A substrate was fabricated on polished float glass with a 0.5 μm thick photoresist coating and with 80 nm ITO coatings patterned to produce four 5x5 mm pixels in a square arrangement. A pixel defining layer (PDL) was applied to reduce the square size to 4x4mm and provide clearly defined pixel edges. The following structure was built:

35 Substrate with PDL / 1nm Cr / 100nm Ag / 10nm ITO bottom electrode (cathode) / 20nm EIL / 25 nm ETL / 30nm EML / 10nm HTL2 / 165nm HTL1 / 100nm HIL / 80nm ITO top electrode (anode) / 200nm MoO_3 capping layer (CPL): where HIL, HTL, EML and ETL stand, respectively, for hole-injection, hole-transport, emissive and electron-transport layers. The top electrode was 80 nm ITO patterned via shadow masks to align with the substrate layer.

Following device fabrication and prior to encapsulation, 400nm pitch ID-symmetric extractor backfilled with a high refractive index described under "Fabrication of Nanostructured Film with 400nm

Pitch" was applied onto two pixels out of four on each test coupon, using an optical coupling layer prepared as described in Example 7 of US Provisional application Serial No. 61/604169, except that in the synthesis of Polymer-II, 2.0 g of 3-mercaptopropyl trimethoxysilane was used instead of 3.7 g. The optical coupling layer had a refractive index of about 1.7. The extractor lamination was conducted under inert (N₂) atmosphere and was followed by protecting under a glass lid attached by applying Nagase XNR5516Z-B1 UV-curable epoxy around the perimeter of the lid and cured with a UV-A light source at 16 Joules/cm² for 400 seconds.

The structures indicated in the table below were made and tested. The polarizer stacks were made by laminating the indicated layers together with an optically clear adhesive, which was included with the Sanritz 5618 polarizer. For samples with a linear polarizer and a reflective polarizer, the pass axes of the linear and reflective polarizers were aligned. The conventional circular polarizer was a linear absorbing polarizer and a quarter wave retarder with the optical axes of the quarter wave retarder and linear absorbing polarizer at 45 degrees relative to each other.

Luminance was measured as part of luminance-current-voltage (LIV) measurements using a PR650 camera (Photo Research, Inc., Chatsworth, CA). Reflectivity was measured using an AUTRONIC Conoscope (AUTRONIC-MELCHERS GmbH, Karlsruhe, Germany) in the diffuse light reflectance mode. The reflectivity and luminance reported in the table below are normalized to a value of unity for Comparative Example C-2.

Example	Extractor	Polarizer Stack	Reflectivity	Luminance
C-1	None	None	20.35	2.21
C-2	None	Conventional circular polarizer	1.00	1.00
1	None	QWP + APF + Sanritz-5618	6.92	1.55
2	1-D structure with 400 nm pitch	QWP + APF + Sanritz-5618	5.41	3.02

Examples 3-6 and Comparative Examples C-3 and C-4

Top Emissive (TE) strong cavity OLED test coupons were built using standard thermal deposition in a vacuum system at base pressure of about 10⁻⁶ Torr. An Ag substrate with 10nm ITO was fabricated on polished float glass with a 0.5 μm thick photoresist coating and 100nm Ag / 10 nm ITO coatings patterned to produce four 5x5 mm pixels in a square arrangement. A pixel defining layer (PDL) was applied to reduce the square size to 4x4mm and provide clearly defined pixel edges. The following layered structure was built:

Ag substrate with 10nm ITO and PDL / 155nm HIL / 10 nm HTL / 40nm Green EML / 35nm ETL / Cathode / CPL: where HIL, HTL, EML and ETL were, respectively, the hole-injection, hole-

transport, emissive and electron-transport layers. The cathode was a 1nm LiF/ 2nm Al / 20nm Ag stack patterned via shadow masks to align with the substrate layer. 60nm thick ZnSe was used as the capping layer.

The OLED device was encapsulated with nanostructured film on two out of four pixels as described for Examples 1-2.

The structures indicated in the table below were made and reflectivity and luminance were determined as in Examples 1-2. The polarizer stacks were made by laminating the indicated layers together using the adhesive from the Sanritz-5618 linear polarizer.

Example	Extractor	Polarizer Stack	Reflectivity	Luminance
C-3	None	None	15.22	2.46
C-4	None	Conventional circular polarizer	1.00	1.00
3	None	APF + Sanritz-5618	6.55	1.02
4	None	QWP + APF + Sanritz-5618	4.84	1.22
5	Nanostructured Film with 400 nm Pitch	QWP + APF + Sanritz-5618	4.00	1.50
6	Nanostructured Film with 400 nm Pitch	APF + Sanritz-5618	4.88	1.59

Thus, embodiments of EMISSIVE DISPLAY WITH REFLECTIVE POLARIZER are disclosed. One skilled in the art will appreciate that the compositions described herein can be practiced with embodiments other than those disclosed. The disclosed embodiments are presented for purposes of illustration and not limitation.

What is claimed is:

1. An emissive display comprising:

an OLED;

5

a linear polarizer;

a reflective polarizer optically between the OLED and the linear polarizer; and

a structured optical film optically between the OLED and the reflective polarizer.

2. The emissive display of claim 1, wherein the reflective polarizer is a birefringent

10

reflective polarizer.

3. The emissive display of claims 1 to 2, wherein the structured optical film is a light

extraction film.

4. The emissive display of claims 1 to 3, wherein the structured optical film is not optically

15

coupled to the OLED.

5. The emissive display of claims 1 to 3, wherein the structured optical film is optically

coupled to the OLED via an optical coupling material.

20

6. The emissive display of claims 1 to 5, wherein the structured optical film comprises

nanostructures.

7. The emissive display of claims 1 to 6, wherein the structured optical film comprises one

25

dimensional nanostructures.

8. The emissive display of claims 1 to 6, wherein the structured optical film comprises two

dimensional nanostructures.

9. The emissive display of claims 1 to 8, further comprising a quarter wave element

30

optically between the structured optical film and the reflective polarizer.

10. The emissive display of claim 1 to 9, wherein the linear polarizer, reflective polarizer and

structured optical film form a composite film.

35

11. The emissive display of claim 9, wherein the linear polarizer, reflective polarizer and

quarter wave element form a composite film.

12. The emissive display of claim 9, wherein the linear polarizer, reflective polarizer, quarter wave element and structured optical film form a composite film.

5 13. An emissive display comprising:
an OLED;
a linear polarizer; and
a reflective polarizer optically between the OLED and the linear polarizer;
wherein the emissive display does not include a quarter wave element.

10 14. The emissive display of claim 13, further comprising a structured optical film optically between the OLED and the reflective polarizer.

15 15. The emissive display of claims 13 to 14, wherein the reflective polarizer is a birefringent reflective polarizer.

16. The emissive display of claims 14 to 15, wherein the structured optical film is not optically coupled to the OLED.

20 17. The emissive display of claims 14 to 15, wherein the structured optical film is optically coupled to the OLED via an optical coupling material.

25 18. The emissive display of claim 14, wherein the structured optical film comprises nanostructures.

19. The emissive display of claims 14 to 18, wherein the structured optical film comprises one dimensional nanostructures.

30 20. The emissive display of claims 14 to 18, wherein the structured optical film comprises two dimensional nanostructures.

21. The emissive display of claim 14, wherein the linear polarizer, reflective polarizer and structured optical film form a composite film.

35 22. An emissive display comprising:
an OLED;
a linear polarizer;

a reflective polarizer optically between the OLED and the linear polarizer; and
a non-polarization preserving element between the OLED and the reflective polarizer.

5 23. The emissive display of claim 22, wherein the non-polarization preserving element has
retardation greater than one wavelength of light.

24. The emissive display of claim 22, wherein the non-polarization preserving element is a
structured optical element.

10

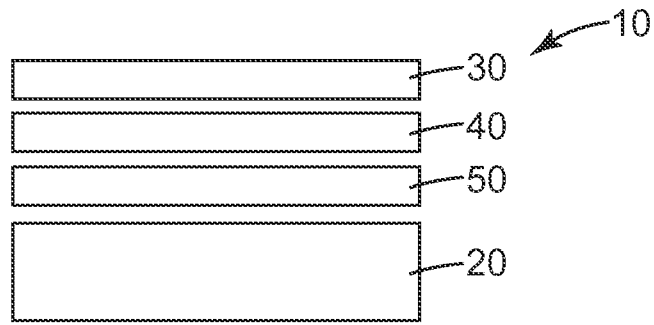


Fig. 1

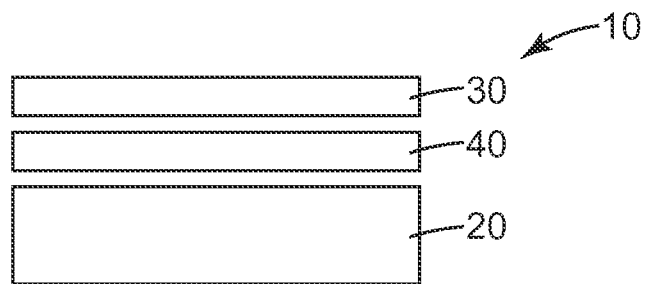


Fig. 2

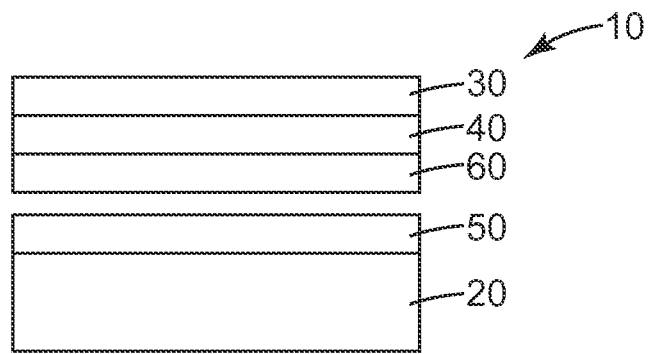


Fig. 3

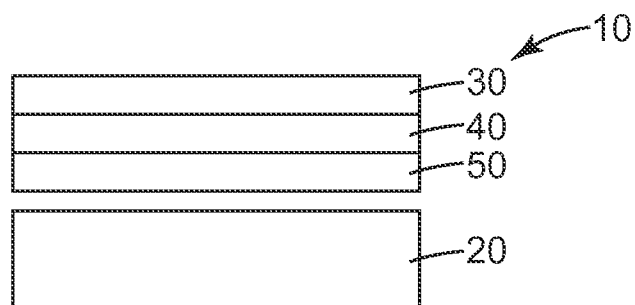


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2013/071297**A. CLASSIFICATION OF SUBJECT MATTER****HOIL 51/52(2006.01)i, G09F 9/00(2006.01)i, HOIL 27/32(2006.01)i, H05B 33/22(2006.01)i, G02B 5/30(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

HOIL 51/52; B05D 5/12; C09K 11/00; B32B 7/02; F21V 1/00; G02B 5/30; H01L 33/44; G02B 5/02; H05B 33/10; B32B 7/08; G09F 9/00; H01L 27/32; H05B 33/22

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: OLED, reflective polarizer, linear polarizer, light extraction film

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	kR 10-2009-0122138 A (LG CHEM. LTD.) 26 November 2009 See paragraphs [0020]- [0034] ; and figure 3.	13
Y		1-12, 14-24
Y	US 2011-0229992 AI (JOHN E. POTTS et al.) 22 September 2011 See paragraphs [0019H0028] , [0044] - [0047] ; and figure 2.	1-12, 14-24
A	US 2012-0234460 AI (JUN-YING ZHANG et al.) 20 September 2012 See paragraphs [0031]- [0034] ; and figures 5-6.	1-24
A	US 2010-0061093 AI (JEFFREY R. JANSSEN et al.) 11 March 2010 See paragraphs [0045]- [0072] ; and figures 3-4.	1-24
A	US 5882774 A (JAMES M. JONZA et al.) 16 March 1999 See column 9, line 6 - column 11, line 15; and figure 10.	1-24

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

10 March 2014 (10.03.2014)

Date of mailing of the international search report

11 March 2014 (11.03.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

LEE, Dong Yun

Telephone No. +82-42-481-8734



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/071297

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
KR 10-2009-0122138 A	26/11/2009	CN 101946195 A	12/01/2011
		CN 101946195 B	12/06/2013
		JP 2011-512558 A	21/04/2011
		TW 201000971 A	01/01/2010
		us 2010-0320494 A1	23/12/2010
		us 2013-0099219 A1	25/04/2013
		us 2013-0112959 A1	09/05/2013
		us 8338823 B2	25/12/2012
		wo 2009-142450 A1	26/11/2009
us 2011-0229992 A1	22/09/2011	us 2009-015757 A1	15/01/2009
		us 8179034 B2	15/05/2012
		us 8298032 B2	30/10/2012
us 2012-0234460 A1	20/09/2012	TW 201304231 A	16/01/2013
		wo 2012-125321 A2	20/09/2012
		wo 2012-125321 A3	22/11/2012
us 2010-0061093 A1	11/03/2010	AU 2006-339489 A1	25/10/2007
		AU 2006-339489 A8	02/10/2008
		CA 2603382 A1	21/09/2006
		CA 2617529 A1	13/09/2007
		CN 101138091 A	05/03/2008
		CN 101138091 B	19/05/2010
		CN 101171452 A	30/04/2008
		CN 101171452 B	08/12/2010
		CN 101287504 A	15/10/2008
		CN 101845670 A	29/09/2010
		EP 1858559 A2	28/11/2007
		EP 1869707 A2	26/12/2007
		EP 1877696 A1	16/01/2008
		EP 2315253 A1	27/04/2011
		JP 2008-526466 A	24/07/2008
		JP 2008-533723 A	21/08/2008
		JP 2008-537804 A	25/09/2008
		JP 2013-092787 A	16/05/2013
		KR 10-1145753 B1	16/05/2012
		KR 10-1145755 B1	16/05/2012
		KR 10-2007-0114810 A	04/12/2007
		KR 10-2007-0115885 A	06/12/2007
		KR 10-2013-0064140 A	17/06/2013
		US 2006-0205199 A1	14/09/2006
		us 2007-0111531 A1	17/05/2007
		us 2010-0133663 A1	03/06/2010
		us 7220324 B2	22/05/2007
		us 7704331 B2	27/04/2010
		us 8128756 B2	06/03/2012
		wo 2006-098799 A2	21/09/2006
		wo 2006-098799 A3	11/10/2007

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/071297

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		wo 2006-098799 A9	13/09/2007
		wo 2006-099138 A2	21/09/2006
		wo 2006-099138 A3	23/11/2006
		wo 2007-102798 A1	13/09/2007
us 05882774 A	16/03/1999	AU 1996-45242 B2	18/11/1999
		AU 1996-58042 B2	10/06/1999
		AU 1999-18184 A1	02/08/1999
		AU 1999-18184 B2	09/08/2001
		AU 1999-20315 A1	02/08/1999
		AU 1999-20315 B2	09/01/2003
		AU 1999-24724 A1	09/08/1999
		AU 1999-33599 A1	21/02/2000
		AU 1999-48735 A1	11/11/1999
		AU 1999-48735 B2	12/07/2001
		AU 2000-41651 A1	04/06/2001
		AU 2001-89074 A1	22/03/2002
		AU 2002-29096 A1	01/07/2002
		CA 2177711 C	04/10/2005
		CA 2177714 A1	29/06/1995
		CA 2177714 C	09/08/2005
		CA 2179625 A1	29/06/1995
		CA 2179625 C	26/10/2004
		CA 2265935 A1	26/03/1998
		CA 2265935 C	05/09/2006
		CA 2312049 A1	17/06/1999
		CA 2316163 A1	22/07/1999
		CA 2317551 A1	22/07/1999
		CA 2317551 C	11/09/2007
		CA 2319318 A1	29/07/1999
		CA 2338348 A1	10/02/2000
		CA 2387982 A1	23/11/2000
		CN 1046664 C	24/11/1999
		CN 1052795 C	24/05/2000
		CN 1084483 C	08/05/2002
		CN 1137772 A	11/12/1996
		CN 1138379 A	18/12/1996
		CN 1142869 A	12/02/1997
		CN 1170382 A	14/01/1998
		CN 1192255 C	09/03/2005
		CN 1272645 C	30/08/2006
		CN 1293613 A	02/05/2001
		CN 1301853 C	28/02/2007
		CN 1320219 A	31/10/2001
		CN 1576890 A	09/02/2005
		EP 0735952 A1	27/10/1999
		EP 0735952 B1	22/03/2000
		EP 0736187 A1	04/07/2001
		EP 0736187 B1	03/04/2002
		EP 0736188 A1	15/01/1997

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/071297

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		EP 0736188 BI	18/09/2002
		EP 0736196 AI	18/06/1997
		EP 0736196 BI	17/07/2002
		EP 0799129 A2	02/12/1998
		EP 0871923 AI	02/01/2003
		EP 0950061 AI	11/06/2003
		EP 0962806 A2	08/12/1999
		EP 0962806 A3	19/01/2000
		EP 0962806 BI	03/12/2008
		EP 0962807 A2	08/12/1999
		EP 0962807 A3	19/01/2000
		EP 0962807 BI	03/12/2008
		EP 1035780 AI	20/09/2000
		EP 1035780 A4	20/06/2001
		EP 1035780 BI	14/02/2007
		EP 1047549 AI	02/11/2000
		EP 1047549 BI	26/03/2003
		EP 1047550 AI	02/11/2000
		EP 1052983 A2	22/11/2000
		EP 1099129 AI	16/05/2001
		EP 1099129 BI	26/09/2007
		EP 1126292 A2	22/08/2001
		EP 1126292 A3	22/03/2006
		EP 1181617 AI	27/02/2002
		EP 1181617 BI	10/12/2003
		EP 1232405 AI	21/08/2002
		EP 1232405 BI	27/08/2008
		EP 1250816 A2	23/10/2002
		EP 1491920 A2	29/12/2004
		EP 1491920 A3	19/01/2005
		EP 1491920 BI	09/06/2010
		EP 2149801 AI	03/02/2010
		EP 2292422 AI	09/03/2011
		EP 2292423 AI	09/03/2011
		JP 03448626 B2	22/09/2003
		JP 03621415 B2	16/02/2005
		JP 03704523 B2	12/10/2005
		JP 03709402 B2	26/10/2005
		JP 03927215 B2	06/06/2007
		JP 03935936 B2	27/06/2007
		JP 03971455 B2	05/09/2007
		JP 04091978 B2	28/05/2008
		JP 04130836 B2	06/08/2008
		JP 04177398 B2	05/11/2008
		JP 04638056 B2	23/02/2011
		JP 04708649 B2	22/06/2011
		JP 04786792 B2	05/10/2011
		JP 04860729 B2	25/01/2012
		JP 05054222 B2	24/10/2012
		JP 05357304 B2	04/12/2013

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/071297

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP 05365839 B2	11/12/2013
		JP 09-506837 A	08/07/1997
		JP 09-506984 A	08/07/1997
		JP 09-506985 A	08/07/1997
		JP 09-507308 A	22/07/1997
		JP 10-511322 A	04/11/1998
		JP 11-509331 A	17/08/1999
		JP 2001-525347 A	11/12/2001
		JP 2002-509041 A	26/03/2002
		JP 2002-509271 A	26/03/2002
		JP 2002-521730 A	16/07/2002
		JP 2002-544561 A	24/12/2002
		JP 2003-515754 A	07/05/2003
		JP 2003-530584 A	14/10/2003
		JP 2004-004699 A	08/01/2004
		JP 2004-004700 A	08/01/2004
		JP 2004-046216 A	12/02/2004
		JP 2006-011389 A	12/01/2006
		JP 2006-205729 A	10/08/2006
		JP 2006-343757 A	21/12/2006
		JP 2007-072477 A	22/03/2007
		JP 2008-052294 A	06/03/2008
		JP 2009-143236 A	02/07/2009
		JP 2010-009051 A	14/01/2010
		JP 2010-020336 A	28/01/2010
		JP 2010-186189 A	26/08/2010
		JP 2011-085959 A	28/04/2011
		JP 2011-248386 A	08/12/2011
		JP 2012-212148 A	01/11/2012
		KR 10-0344364 B1	30/11/2002
		KR 10-0349284 B1	31/12/2002
		KR 10-0364029 B1	04/10/2003
		KR 10-0407210 B1	31/05/2004
		KR 10-0430351 B1	04/05/2004
		KR 10-0432457 B1	22/05/2004
		KR 10-0560342 B1	14/03/2006
		KR 10-0597925 B1	13/07/2006
		KR 10-0648552 B1	24/11/2006
		KR 10-0653287 B1	05/12/2006
		KR 10-0663772 B1	03/01/2007
		KR 10-0663797 B1	03/01/2007
		KR 10-0702420 B1	04/04/2007
		KR 10-1998-0700173 A	30/03/1998
		US 04989729 A	05/02/1991
		us 05747332 A	05/05/1998
		us 05828488 A	27/10/1998
		us 05962114 A	05/10/1999
		us 05965247 A	12/10/1999
		us 05981706 A	09/11/1999
		us 06025897 A	15/02/2000

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/071297

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 06045894 A	04/04/2000
		us 06066716 A	23/05/2000
		us 06096375 A	01/08/2000
		us 06117530 A	12/09/2000
		us 06124971 A	26/09/2000
		us 2001-008464 AI	19/07/2001
		us 2002-031676 AI	14/03/2002
		us 2002-032591 AI	14/03/2002
		us 2002-039235 AI	04/04/2002
		us 2002-061393 AI	23/05/2002
		us 2002-087413 AI	04/07/2002
		us 2002-109795 AI	15/08/2002
		us 2002-128299 AI	12/09/2002
		us 2002-154406 AI	24/10/2002
		us 2002-156250 AI	24/10/2002
		us 2003-018531 AI	23/01/2003
		us 2003-035972 AI	20/02/2003
		us 2003-053215 AI	20/03/2003
		us 2003-164914 AI	04/09/2003
		us 2003-184864 AI	02/10/2003
		us 2004-043205 AI	04/03/2004
		us 2004-085642 AI	06/05/2004
		us 2004-143105 AI	22/07/2004
		us 2004-176469 AI	09/09/2004
		us 2005-009835 AI	13/01/2005
		us 2005-019530 AI	27/01/2005
		us 2005-024726 AI	03/02/2005
		us 2005-079333 AI	14/04/2005
		us 2005-122587 AI	09/06/2005
		us 2005-186408 AI	25/08/2005
		us 2005-270439 AI	08/12/2005
		us 2006-098284 AI	11/05/2006
		us 2006-262400 AI	23/11/2006
		us 2006-286396 AI	21/12/2006
		us 2007-091230 AI	26/04/2007
		us 2007-121034 AI	31/05/2007
		us 2009-079909 AI	26/03/2009
		us 2009-155540 AI	18/06/2009
		us 2009-323180 AI	31/12/2009
		us 2010-267735 AI	21/10/2010
		us 2010-267736 AI	21/10/2010
		us 6262842 BI	17/07/2001
		us 6296927 BI	02/10/2001
		us 6432991 BI	13/08/2002
		us 6433141 BI	13/08/2002
		us 6455493 BI	24/09/2002
		us 6486997 BI	26/11/2002
		us 6498683 B2	24/12/2002
		us 6531230 BI	11/03/2003
		us 6543153 BI	08/04/2003

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/071297

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		US 6613421 B2	02/09/2003
		US 6635337 B2	21/10/2003
		us 6635667 B2	21/10/2003
		us 6713608 B2	30/03/2004
		us 6721096 B2	13/04/2004
		us 6744561 B2	01/06/2004
		us 6788463 B2	07/09/2004
		us 6797366 B2	28/09/2004
		us 6804058 B1	12/10/2004
		us 6888675 B2	03/05/2005
		us 6888677 B2	03/05/2005
		us 7023602 B2	04/04/2006
		us 7038745 B2	02/05/2006
		us 7083847 B2	01/08/2006
		us 7138173 B2	21/11/2006
		us 7141297 B2	28/11/2006
		us 7297393 B2	20/11/2007
		us 7321464 B2	22/01/2008
		us 7423708 B2	09/09/2008
		us 7652820 B2	26/01/2010
		us 7737147 B2	15/06/2010
		us 7851054 B2	14/12/2010
		us 7852560 B2	14/12/2010
		us 8519005 B2	27/08/2013

专利名称(译)	具有反射偏振器的发光显示器		
公开(公告)号	EP2926389A4	公开(公告)日	2016-08-10
申请号	EP2013859405	申请日	2013-11-21
[标]申请(专利权)人(译)	明尼苏达州采矿制造公司		
申请(专利权)人(译)	3M创新有限公司		
当前申请(专利权)人(译)	3M创新有限公司		
[标]发明人	HAAG ADAM D AREFE GHIDEWON EPSTEIN KENNETH A NAISMITH NATHANIEL K LEE SEONG TAEK LAMANSKY SERGEY TOLBERT WILLIAM A		
发明人	HAAG, ADAM, D. AREFE, GHIDEWON EPSTEIN, KENNETH, A. NAISMITH, NATHANIEL, K. LEE, SEONG TAEK LAMANSKY, SERGEY TOLBERT, WILLIAM, A.		
IPC分类号	H01L51/52 G09F9/00 H01L27/32 H05B33/22 G02B5/30		
CPC分类号	H01L51/5293 G02B5/3041 G02B5/3083 G02B27/281 G02B27/286 H01L51/5268 H01L51/5271 H01L51/5275 H01L51/5281 H05B33/22		
优先权	61/731659 2012-11-30 US		
其他公开文献	EP2926389A1		
外部链接	Espacenet		

摘要(译)

发光显示器包括OLED，线性偏振器，光学地在OLED和线性偏振器之间的反射偏振器，以及光学地在OLED和反射偏振器之间的结构化光学膜。