



US 20180317771A1

(19) **United States**

(12) **Patent Application Publication**
Puryear et al.

(10) **Pub. No.: US 2018/0317771 A1**
(43) **Pub. Date: Nov. 8, 2018**

(54) **SYSTEMS, DEVICES AND METHODS THAT AFFECT NEURAL TISSUE THROUGH THE DELIVERY OF A PULSED RADIO FREQUENCY SIGNAL GENERATED BY AN IMPLANTABLE MEDICAL DEVICE**

Publication Classification

(51) **Int. Cl.**
A61B 5/00 (2006.01)
A61N 1/40 (2006.01)
A61N 1/06 (2006.01)
(52) **U.S. Cl.**
CPC *A61B 5/0031* (2013.01); *A61N 1/0551* (2013.01); *A61N 1/06* (2013.01); *A61N 1/40* (2013.01)

(71) Applicant: **SynerFuse, Inc.**, Minneapolis, MN (US)

(72) Inventors: **Harry Puryear**, Shoreview, MN (US);
Timothy J. Cox, Leonard, TX (US);
Serafin Y. Samson, Maple Grove, MN (US); **Nazmi Peyman**, Glen Allen, VA (US); **Omid Souresrafil**, Maple Grove, MN (US); **Gregory F. Molnar**, Blaine, MN (US)

(21) Appl. No.: **15/727,554**


(22) Filed: **Oct. 6, 2017**


Related U.S. Application Data


(60) Provisional application No. 62/502,604, filed on May 6, 2017, provisional application No. 62/531,129, filed on Jul. 11, 2017.

(57) **ABSTRACT**

Radio frequency (RF) energy is transmitted through the application of a RF signal to an external RF energy interface, where the RF signal oscillates at a frequency in an energy transmission band. The transmitted RF energy is received at an implanted medical device, and energy derived from the received RF energy is stored in a direct current (DC) energy storage component of the device. A therapeutic output signal is generated from the stored energy and delivered by the implantable medical device to a patient through one or more electrodes. The therapeutic output signal is configurable to provide either one of RF stimulation therapy and RF ablation therapy, and comprises pulses of an RF signal oscillating at a frequency in a therapy band that is greater than the energy transmission band.

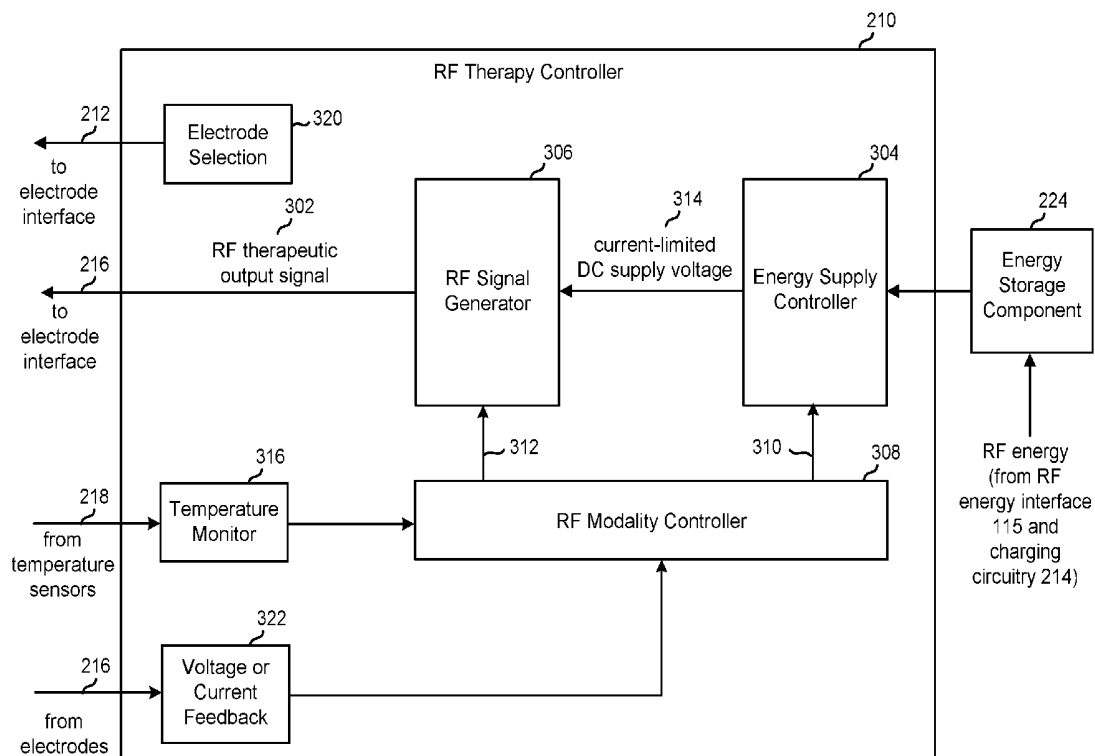



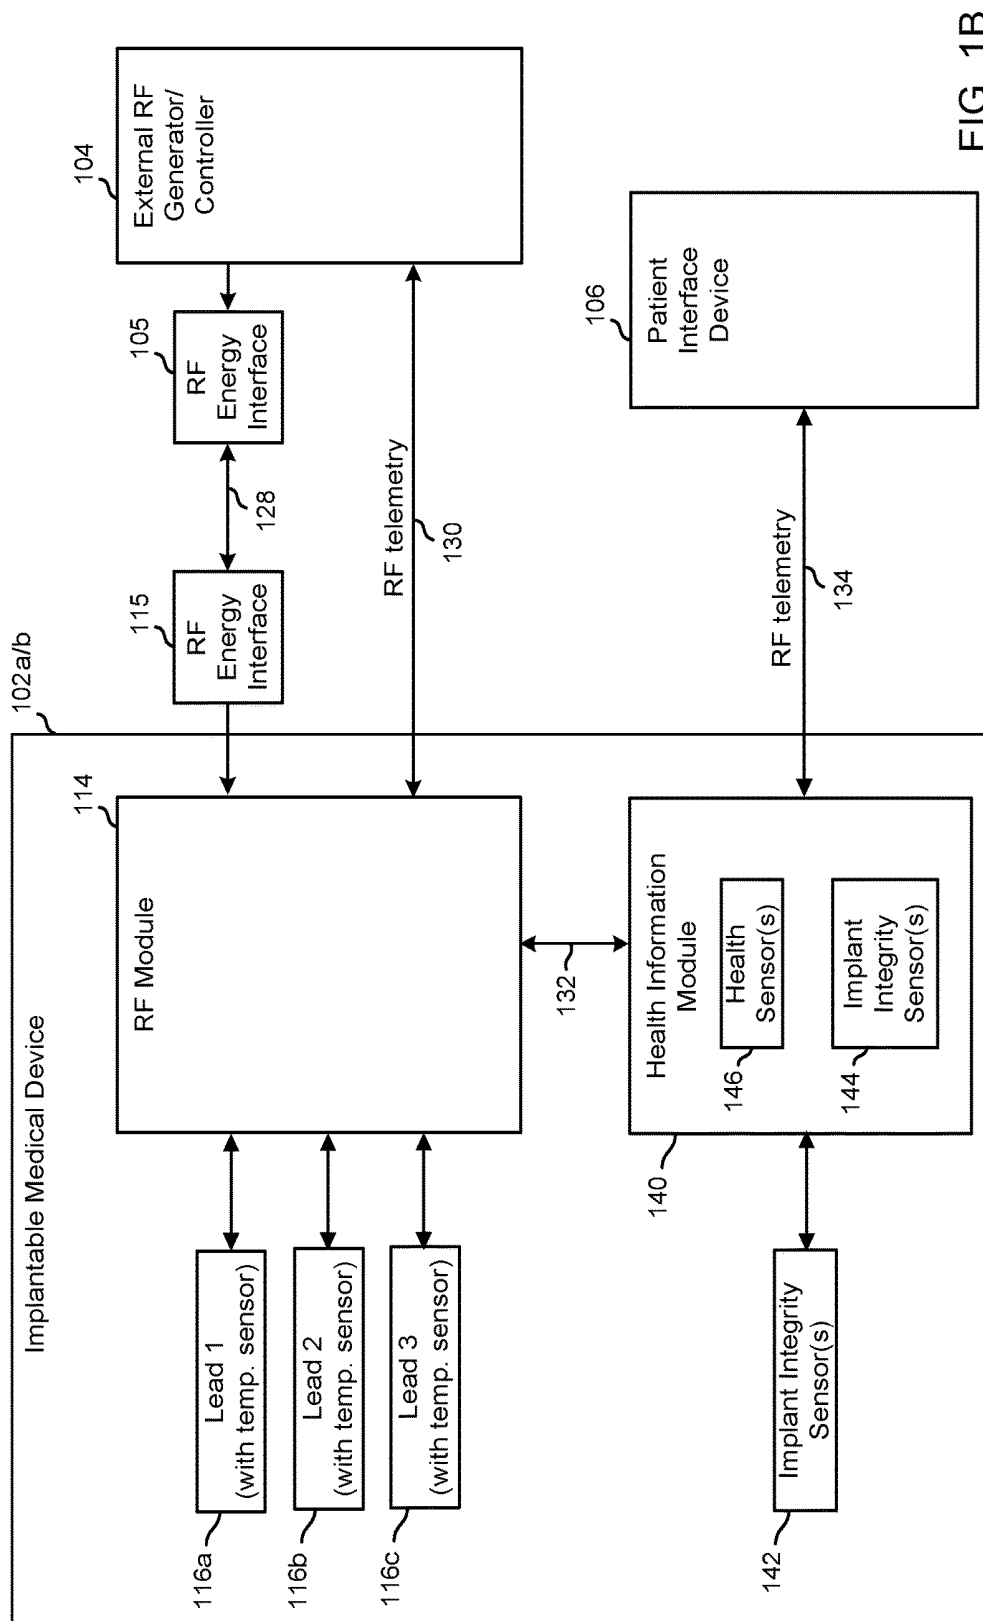

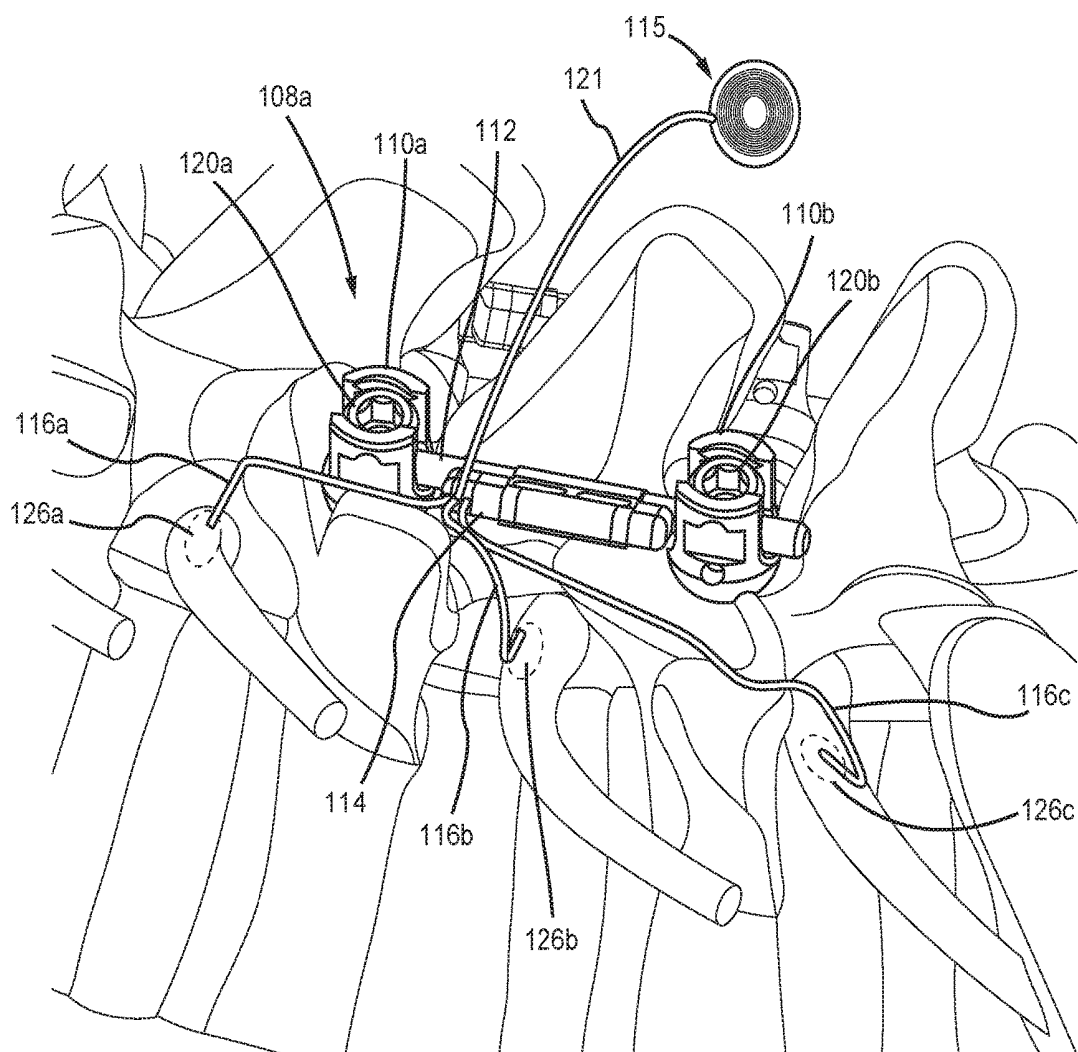


FIG. 1C

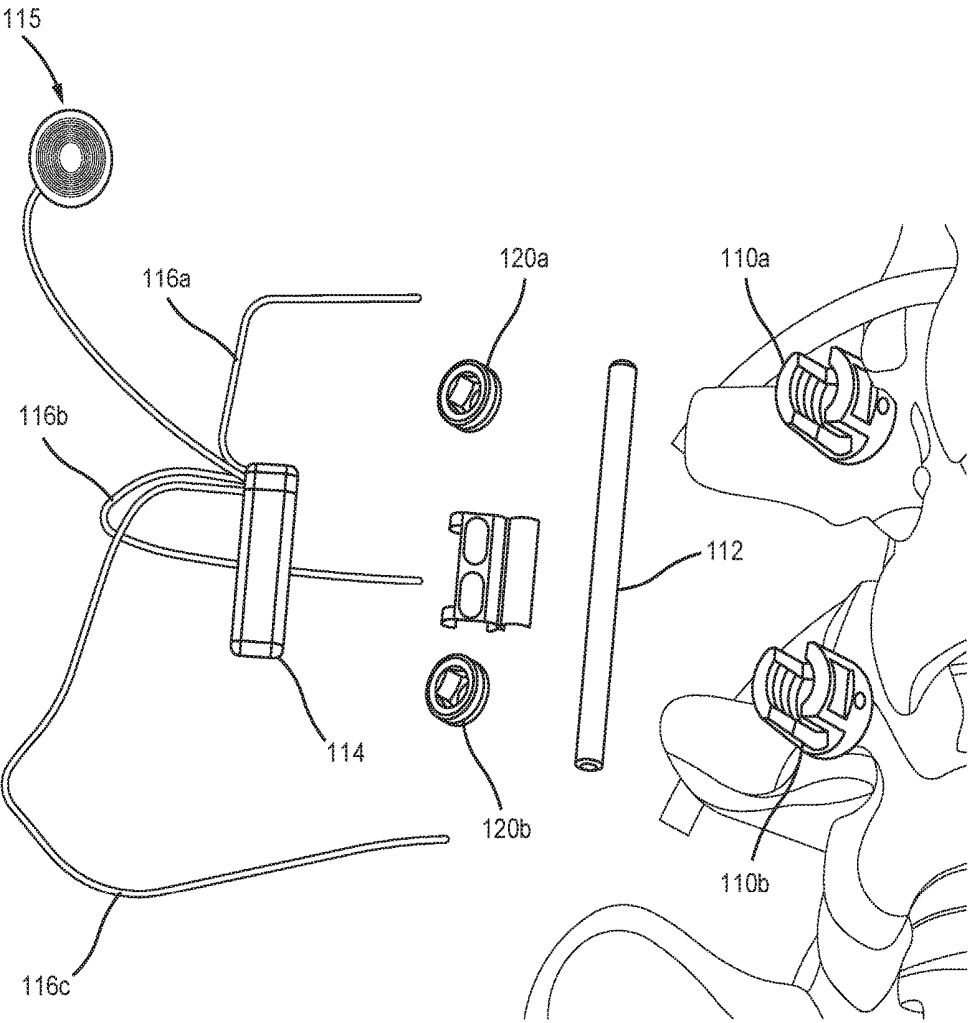


FIG. 1D

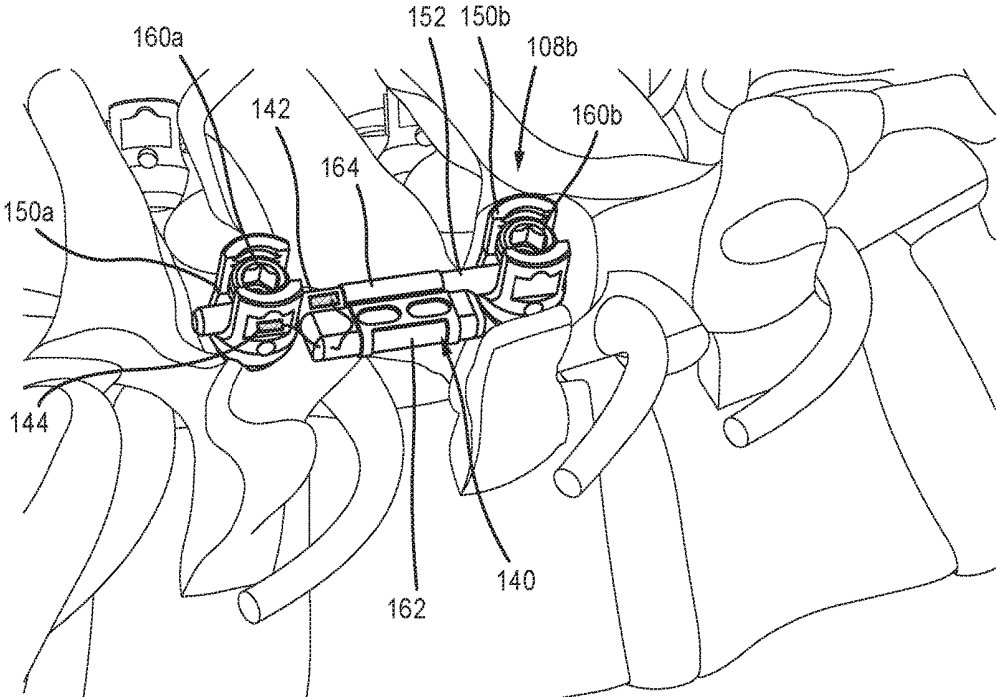


FIG. 1E

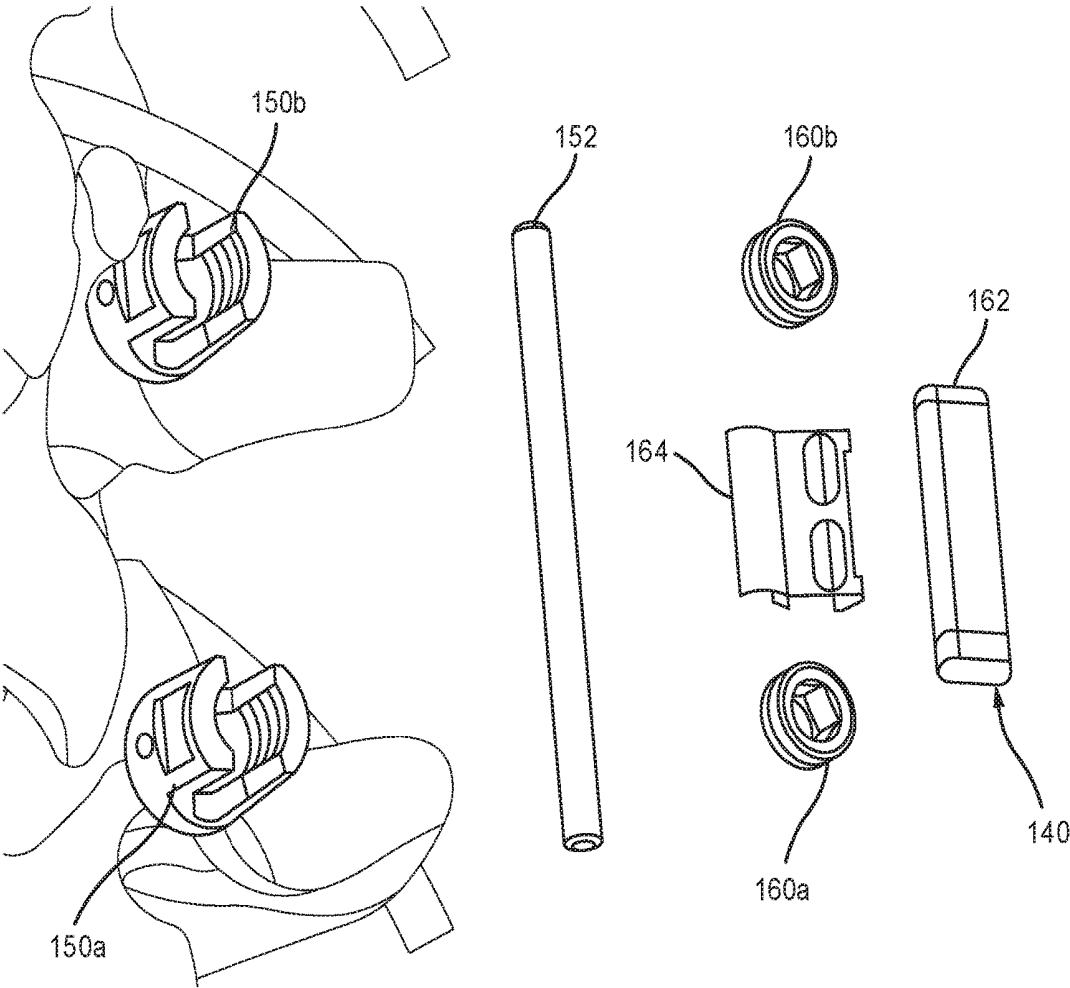


FIG. 1F

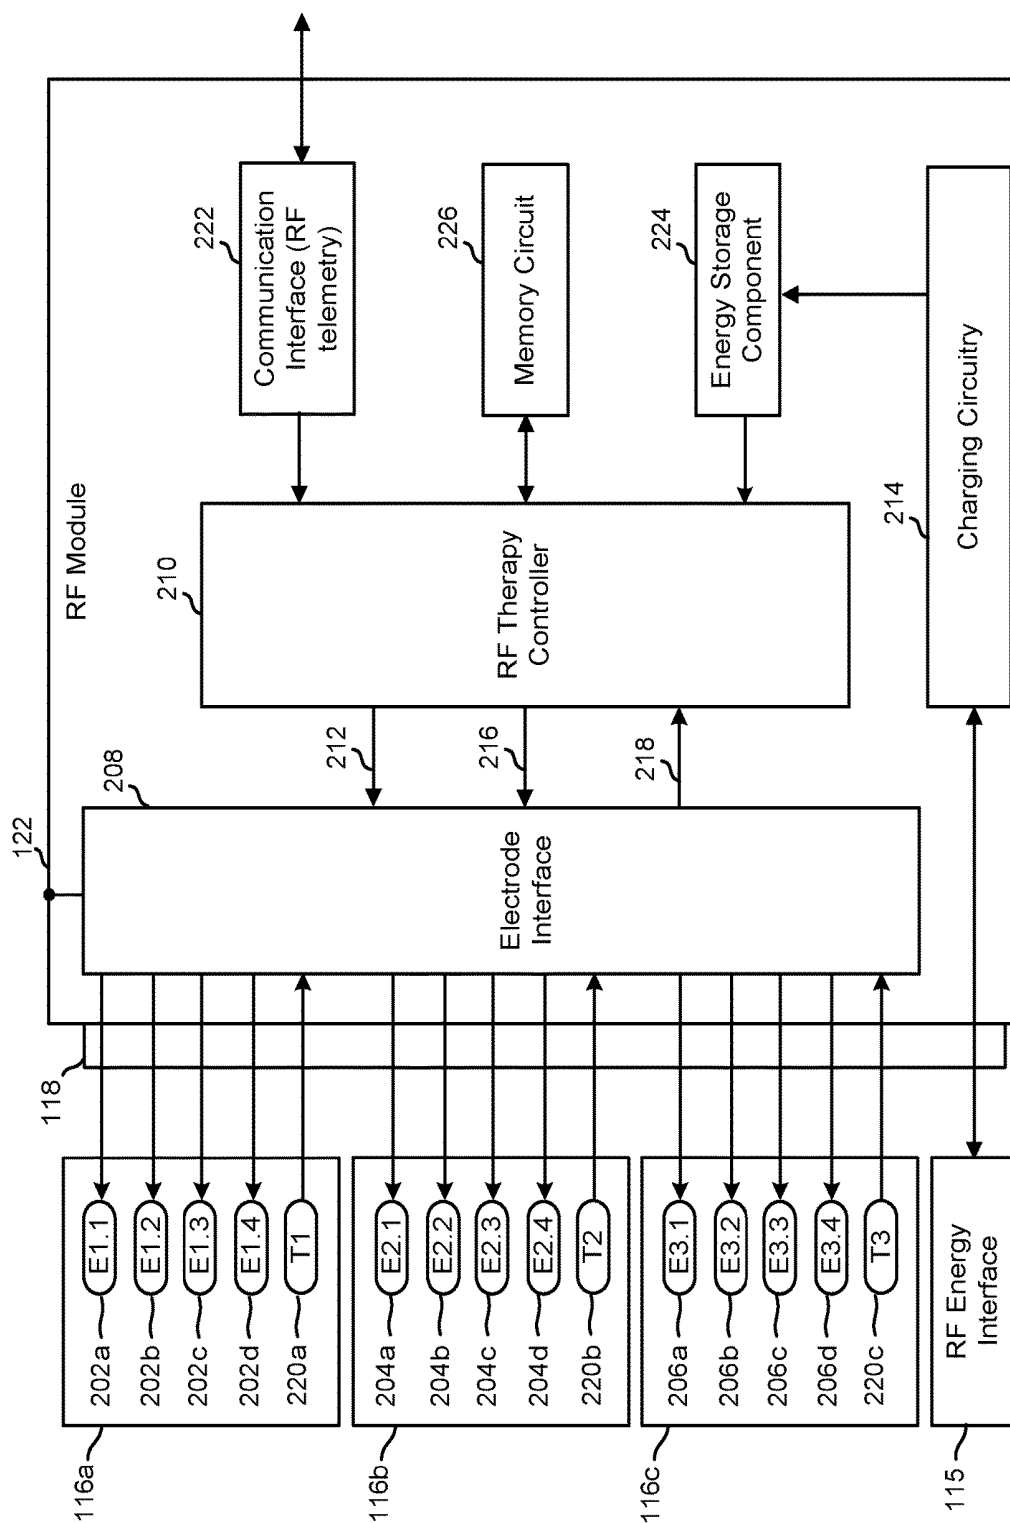


FIG. 2

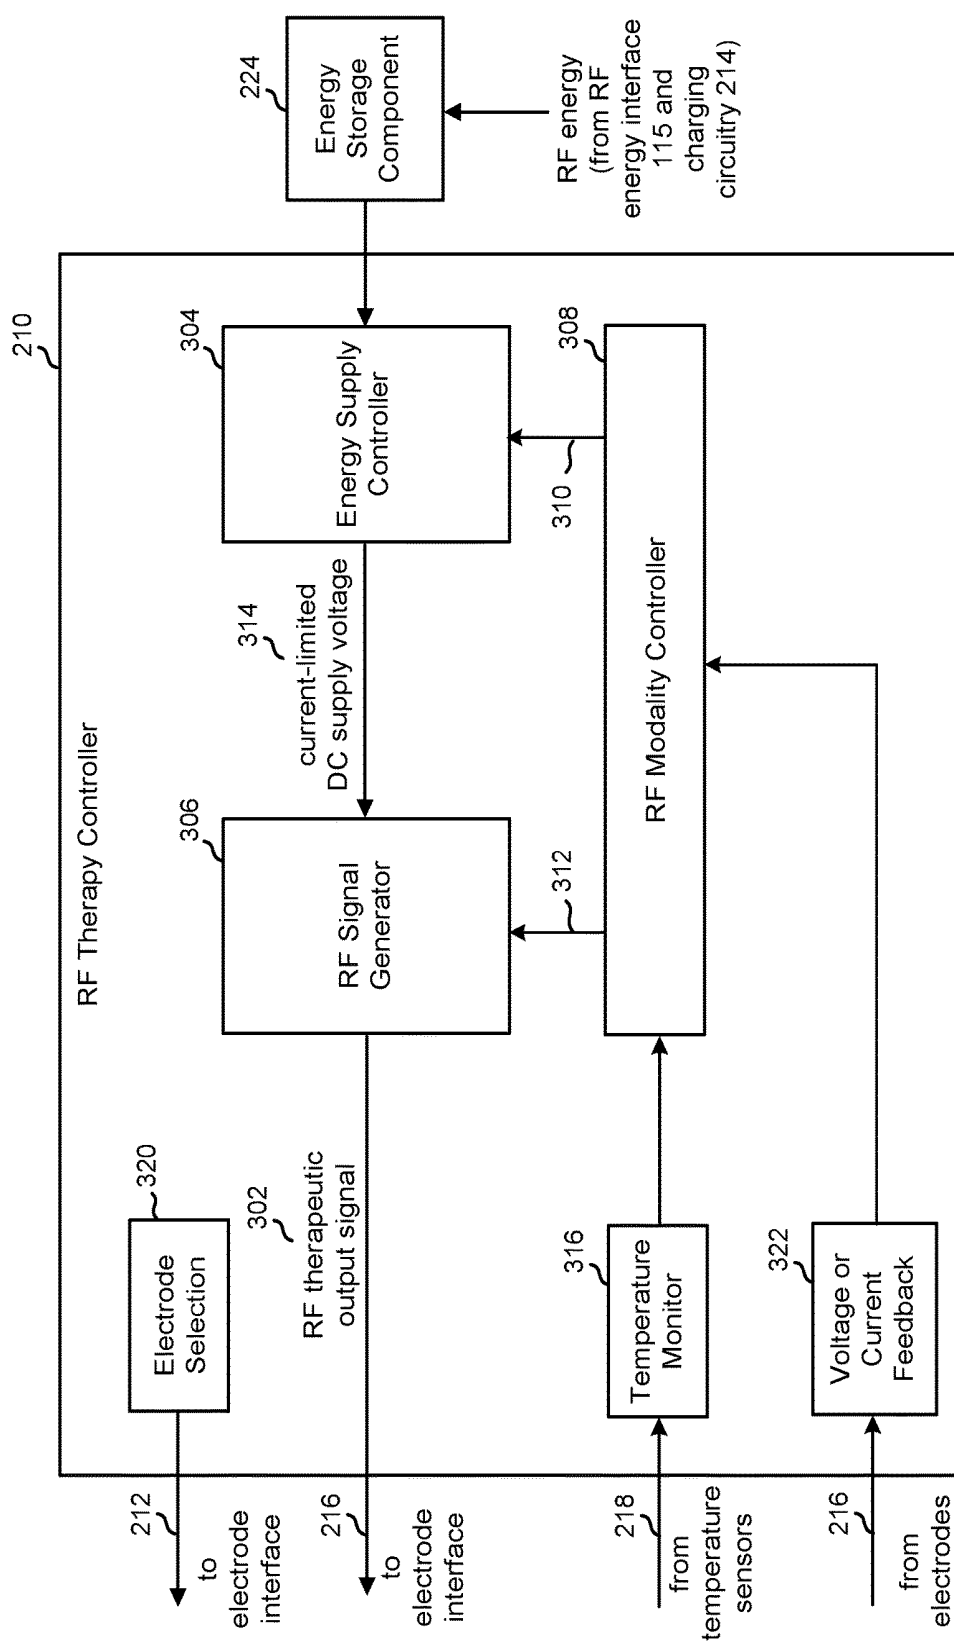


FIG. 3A

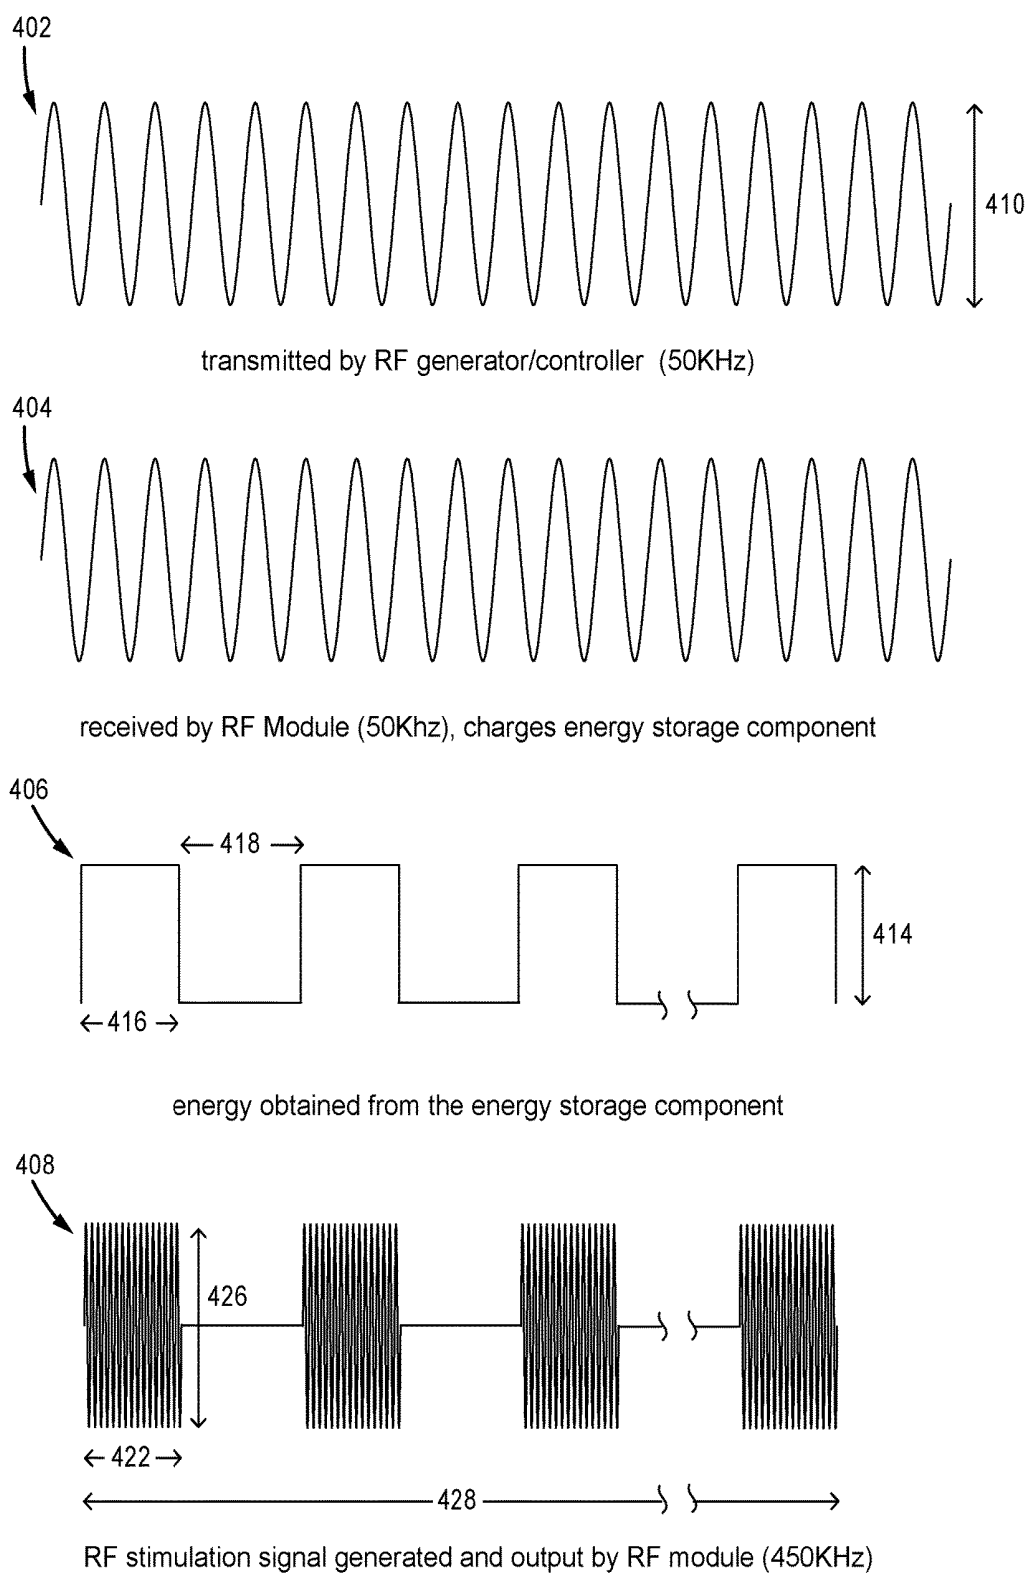


FIG. 4

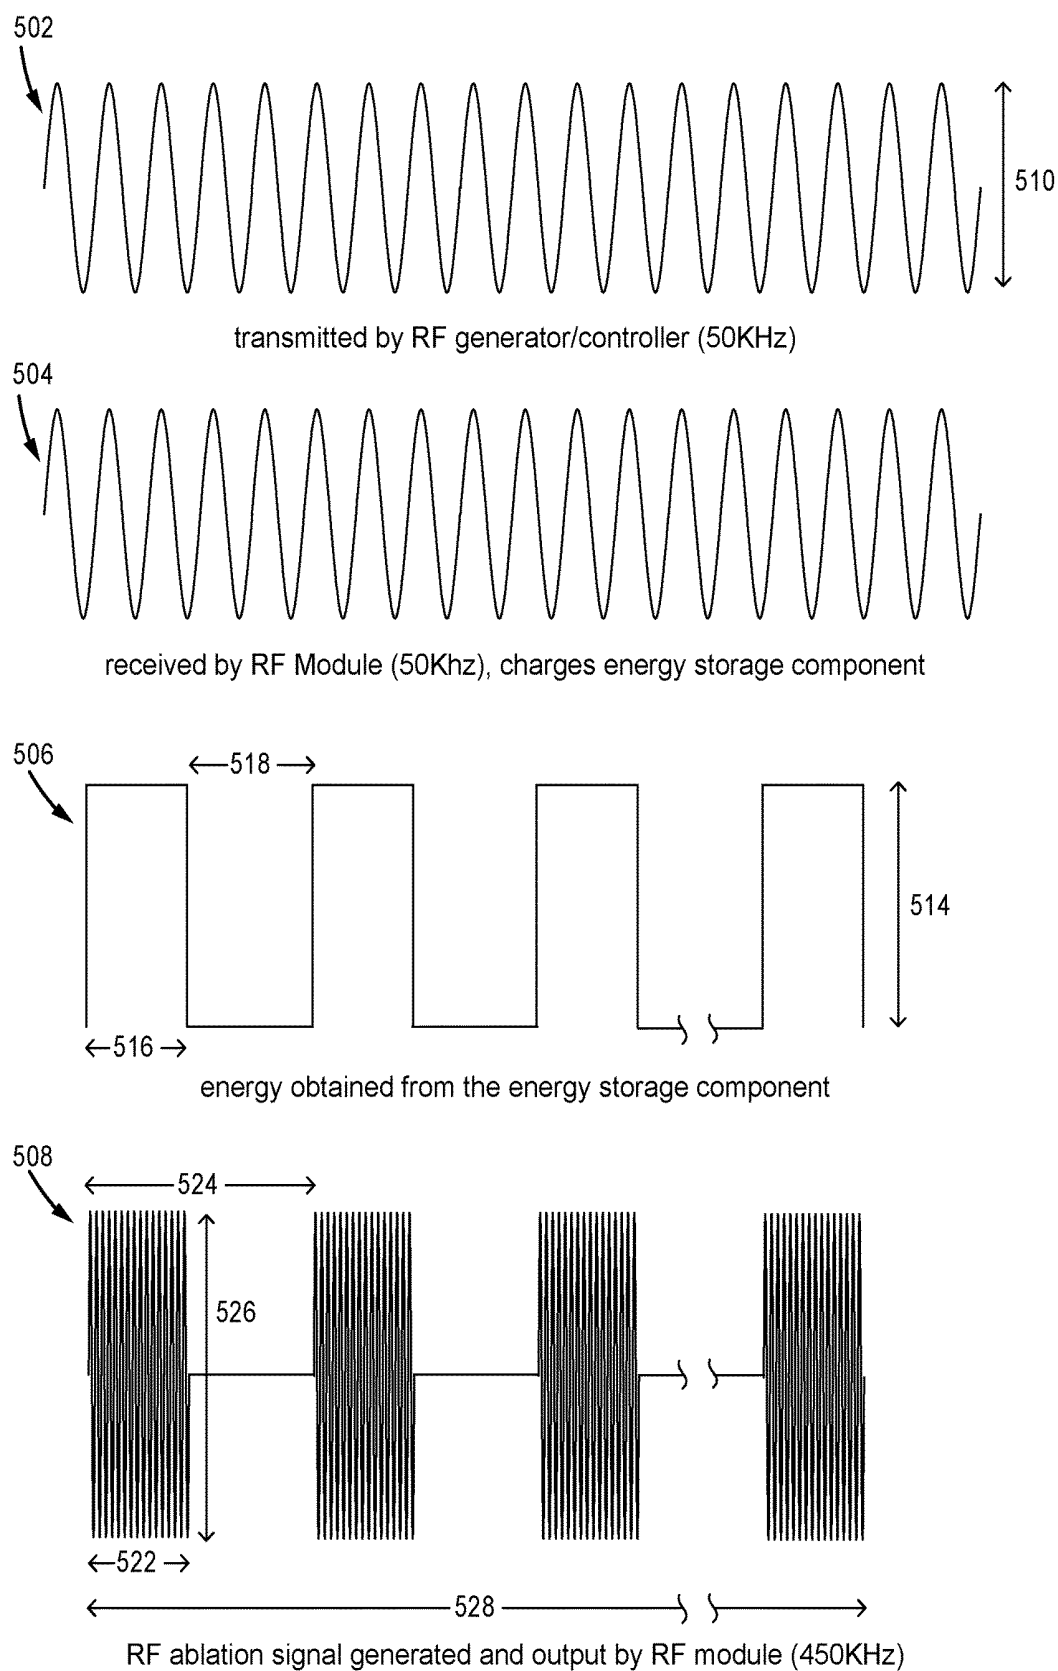


FIG. 5

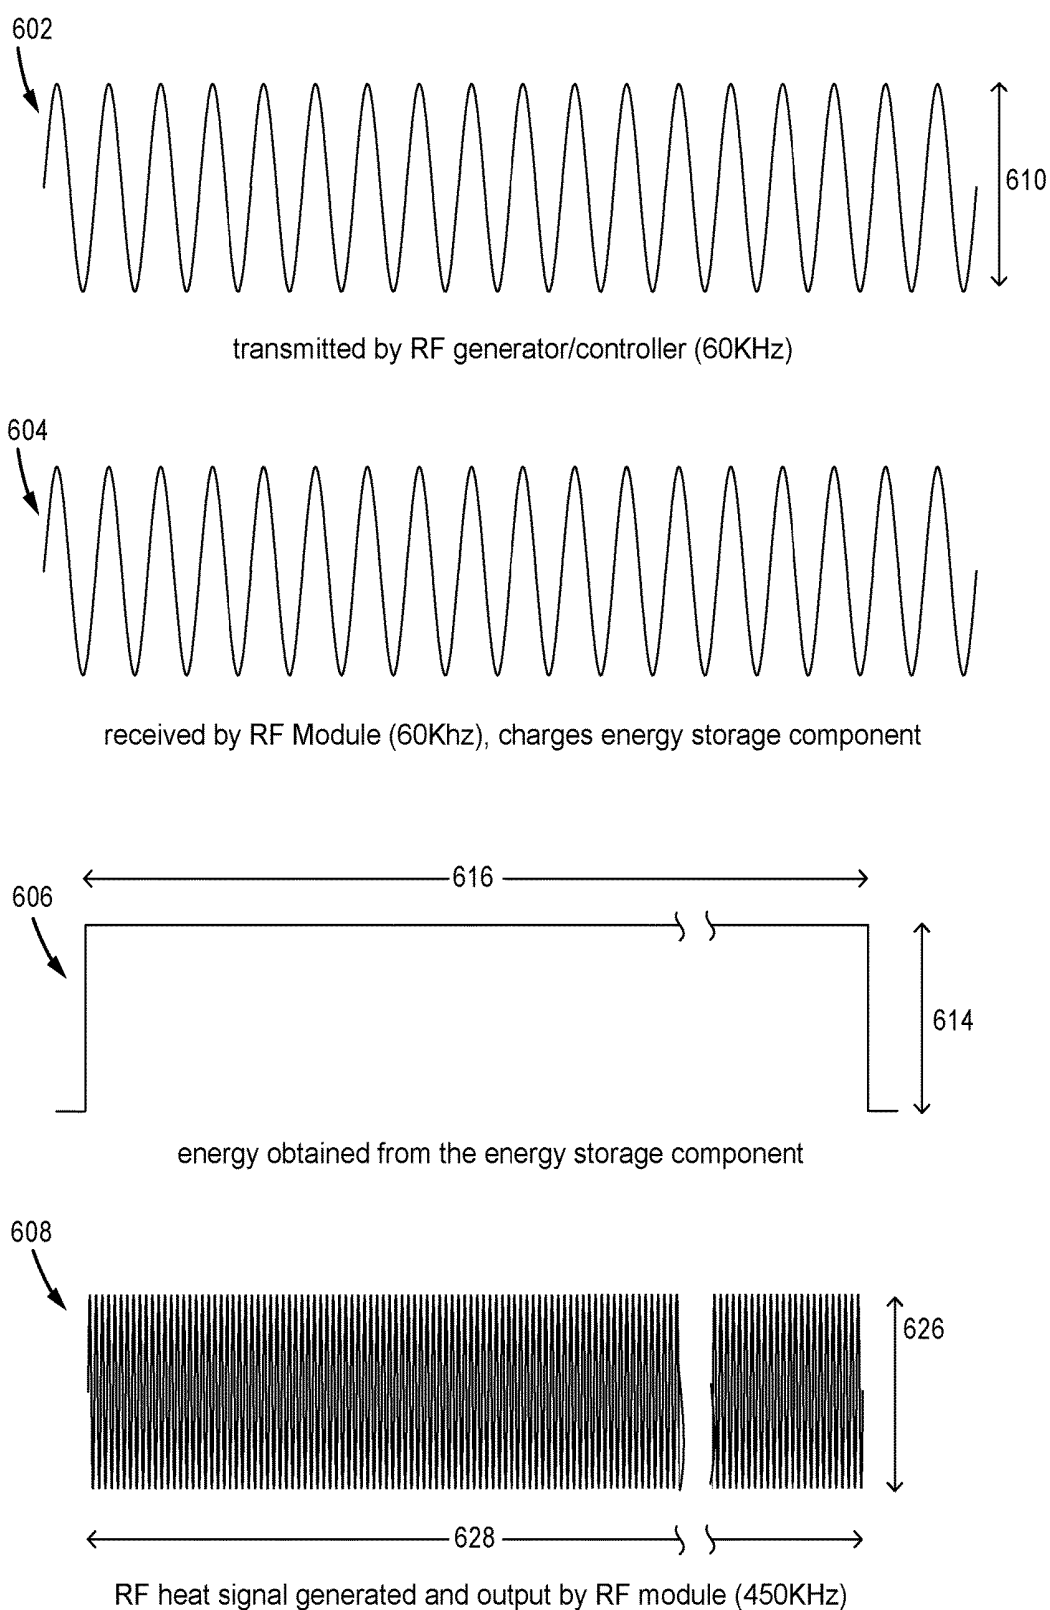


FIG. 6

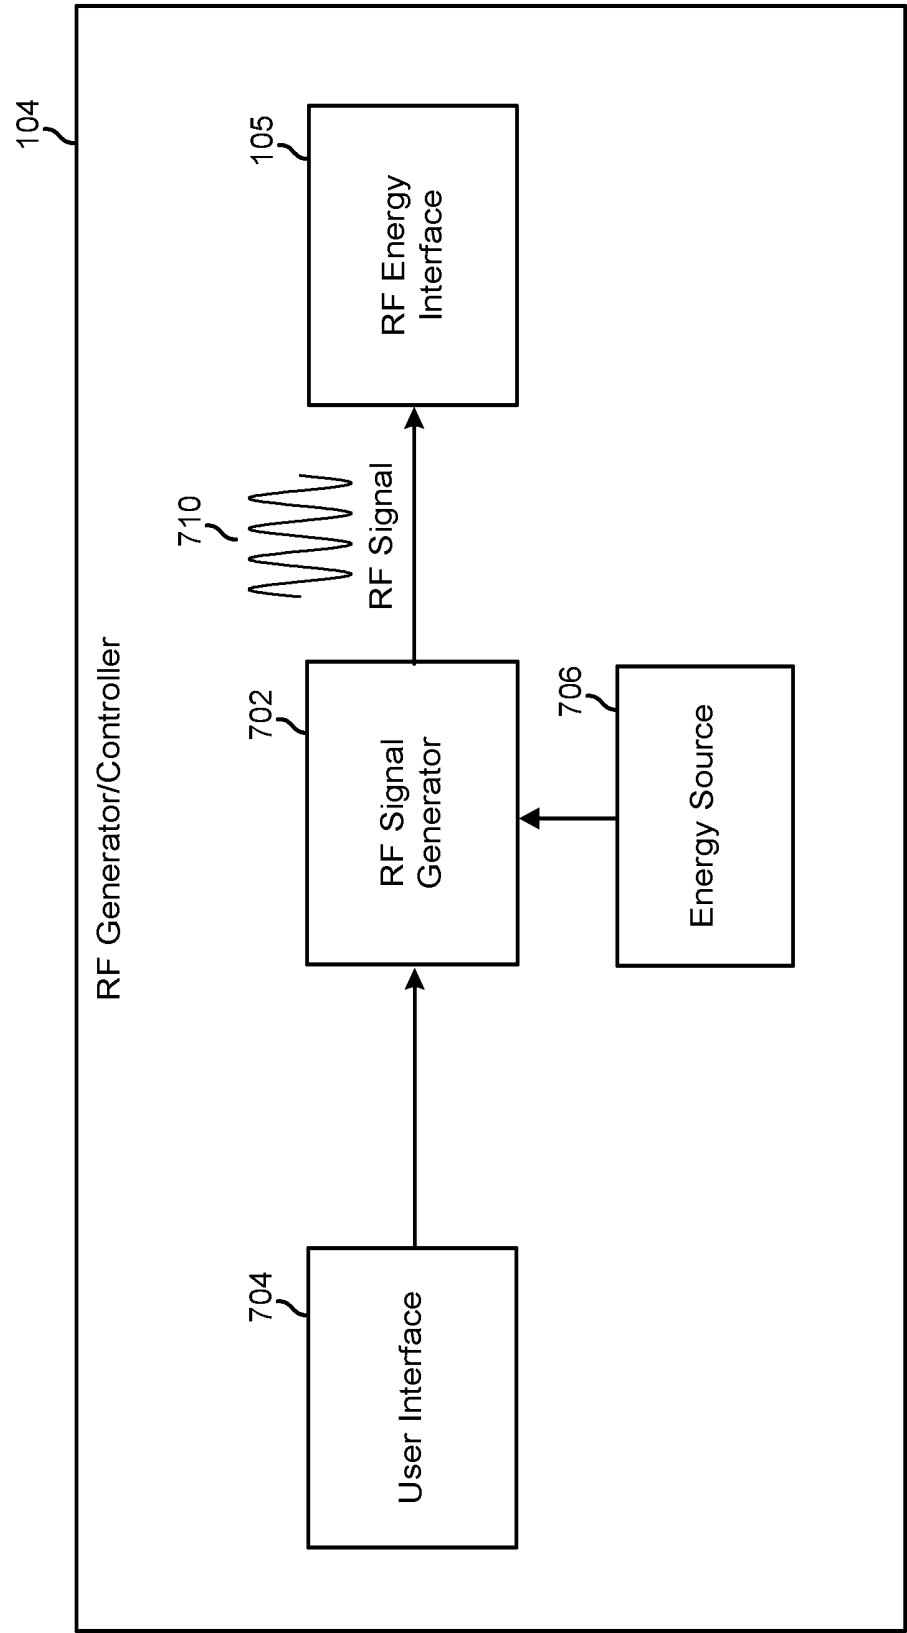


FIG. 7A

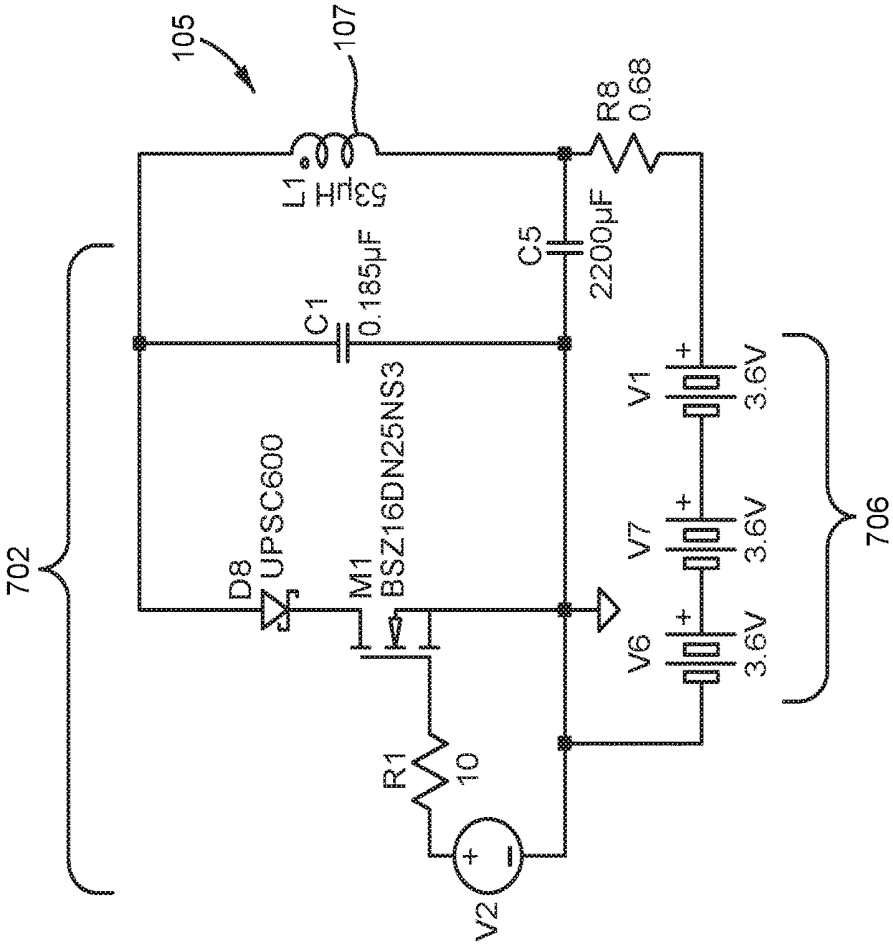


FIG. 7B

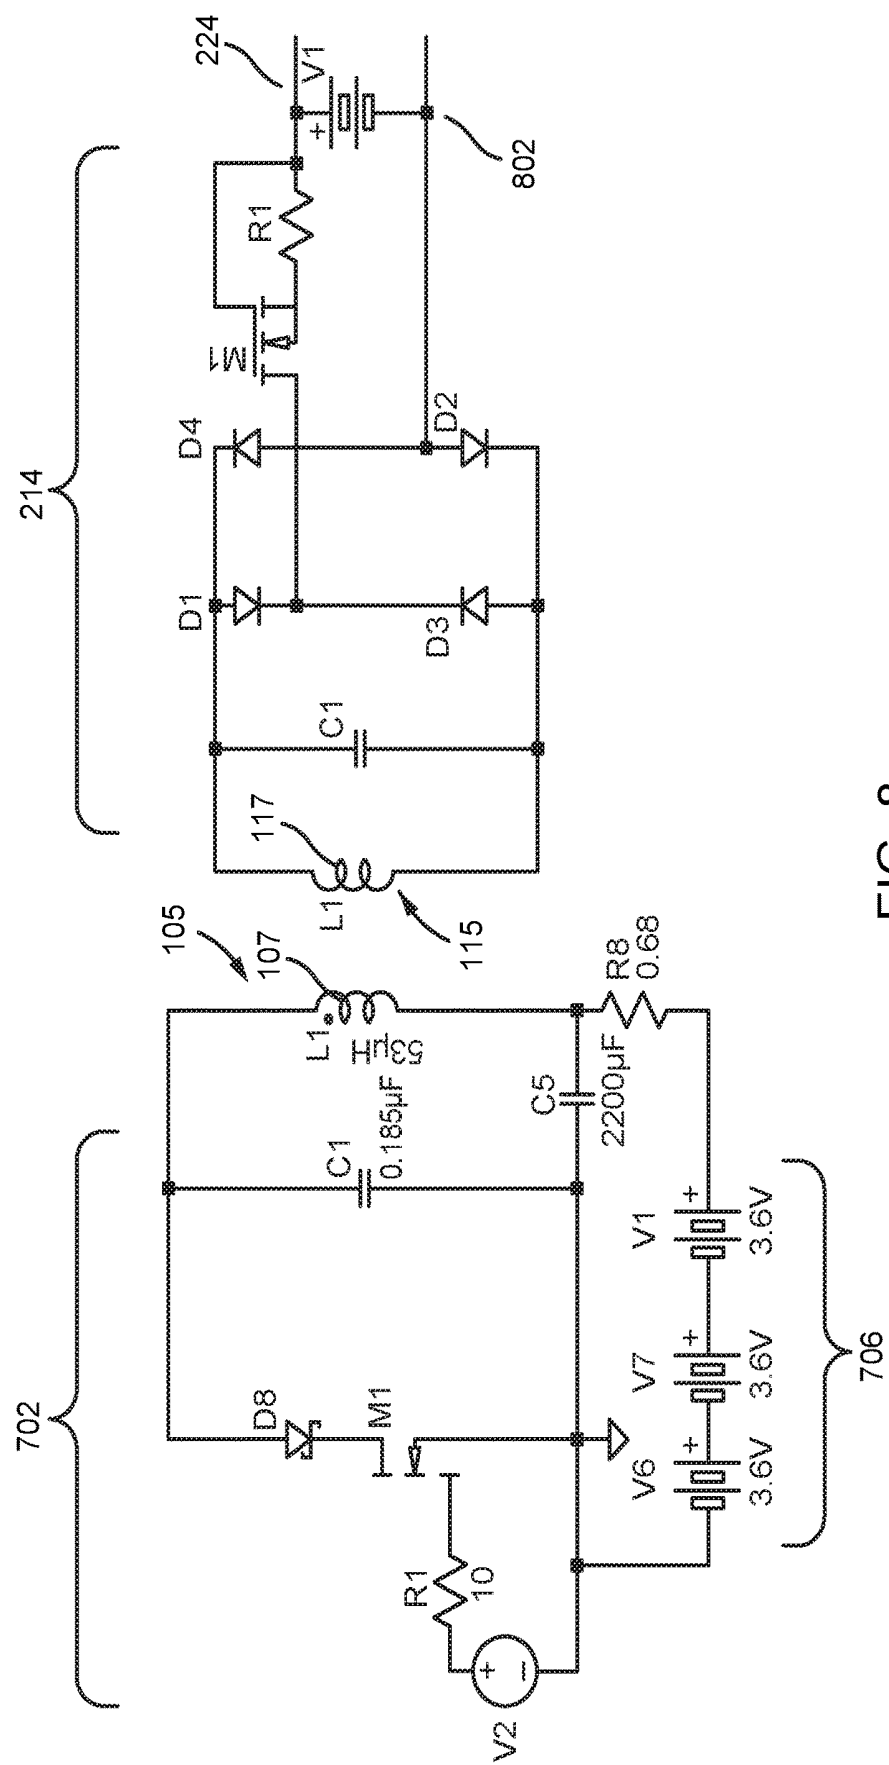


FIG. 8

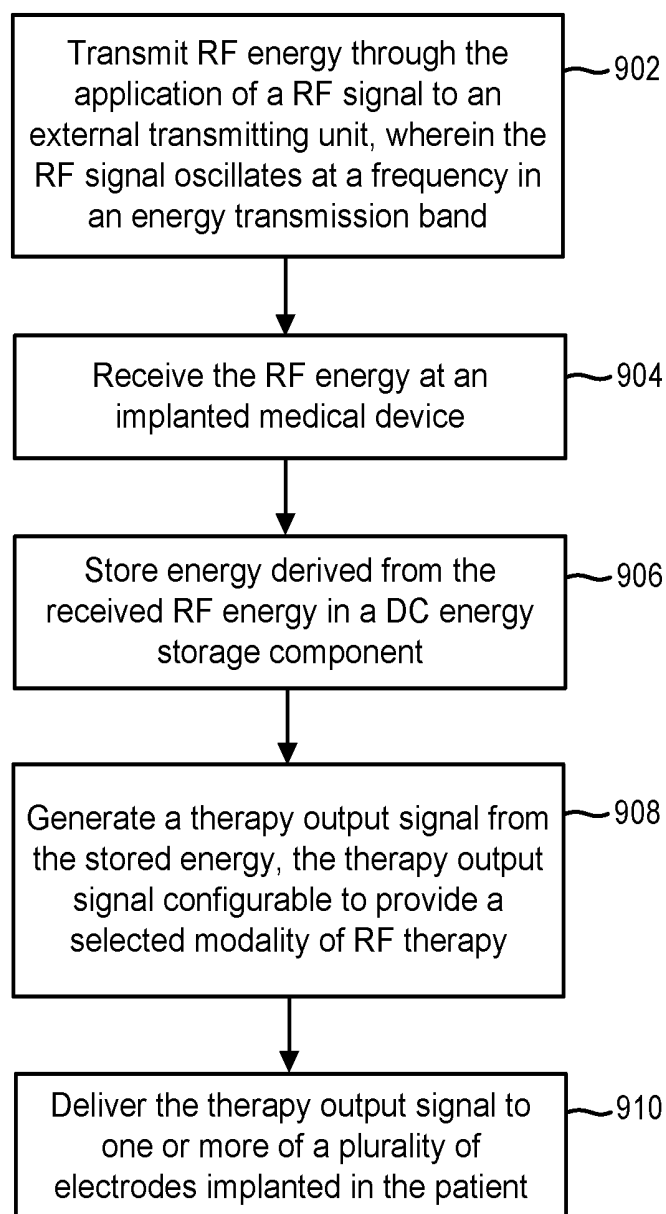


FIG. 9

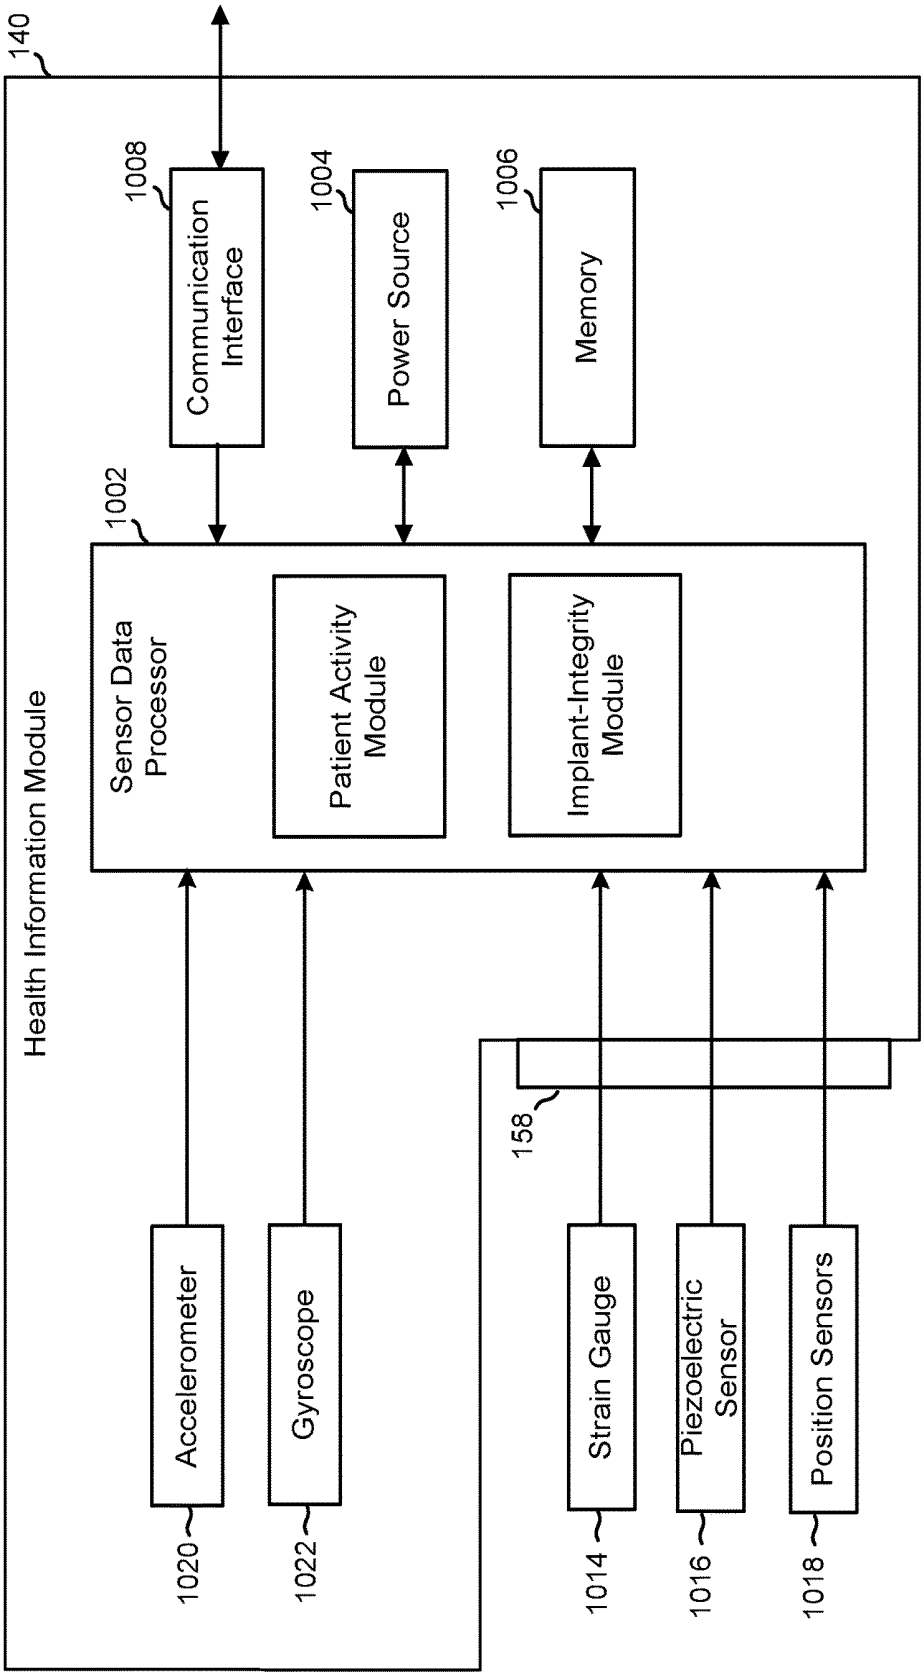


FIG. 10

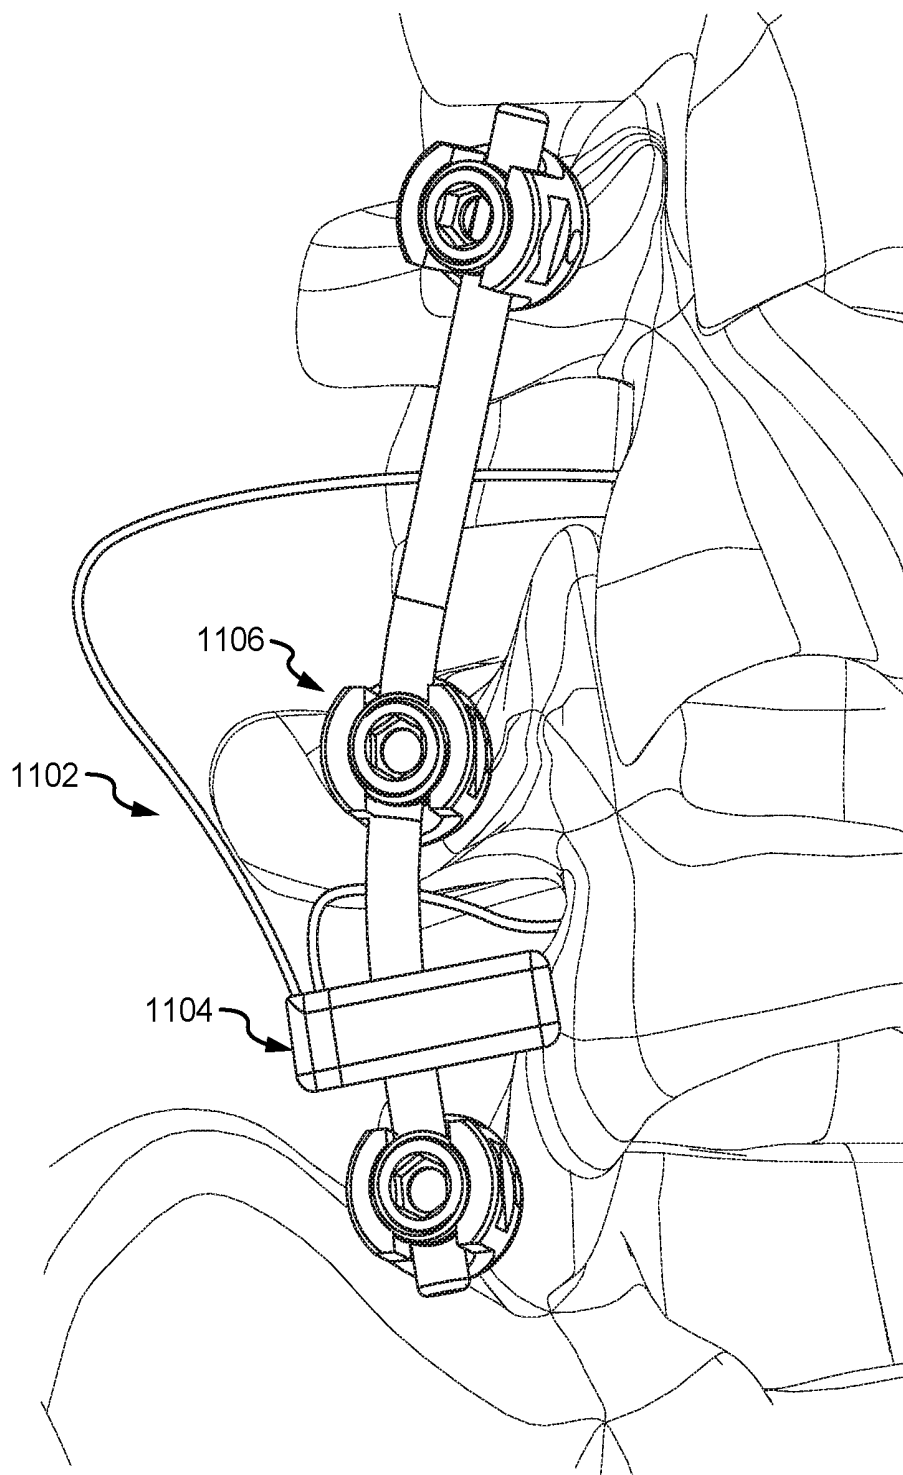


FIG. 11

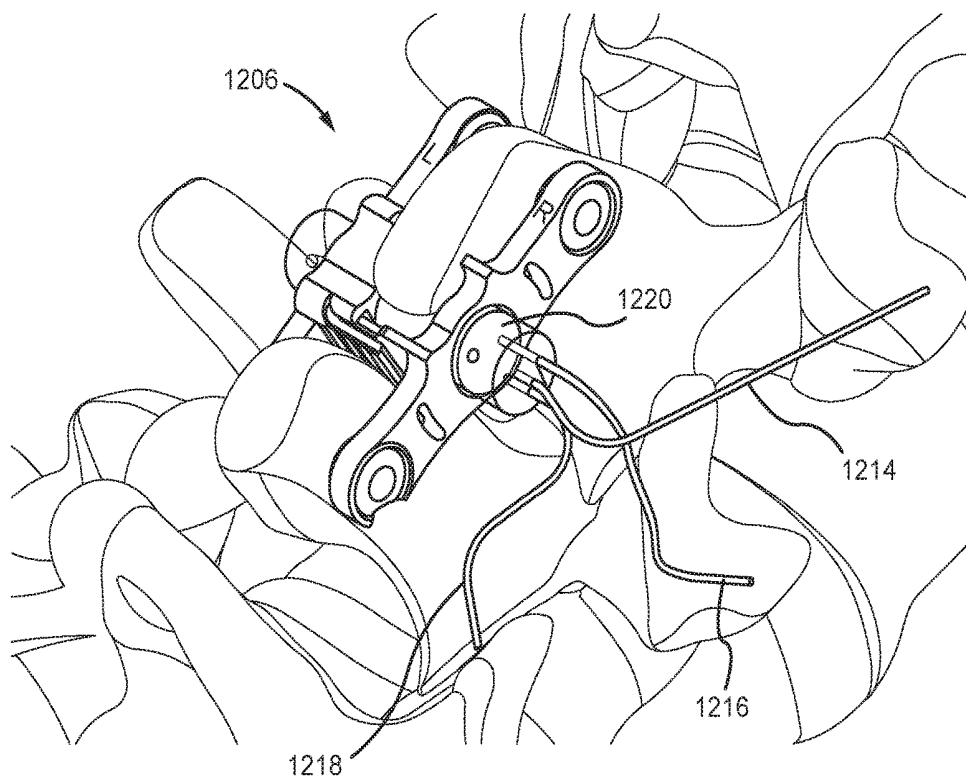


FIG. 12A

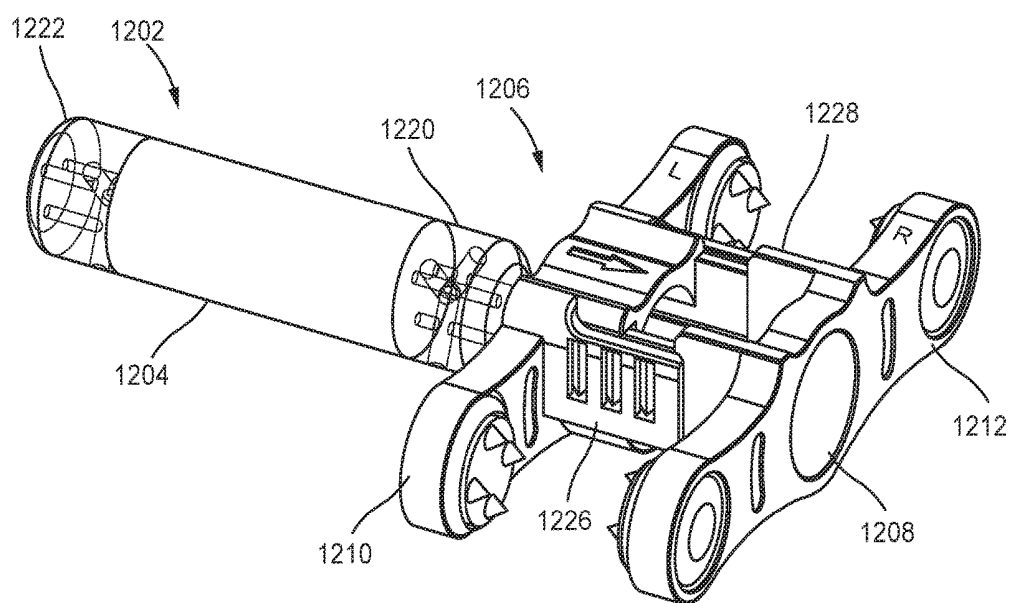


FIG. 12B

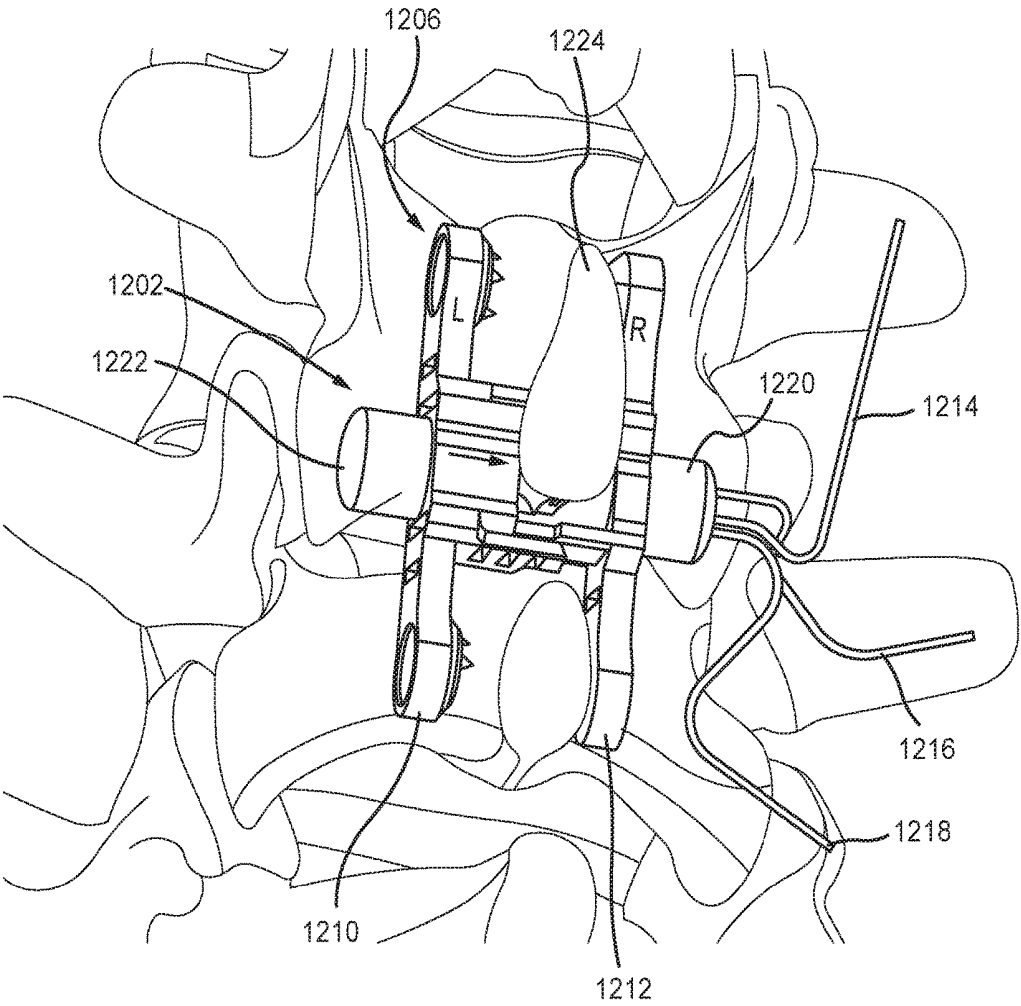


FIG. 12C



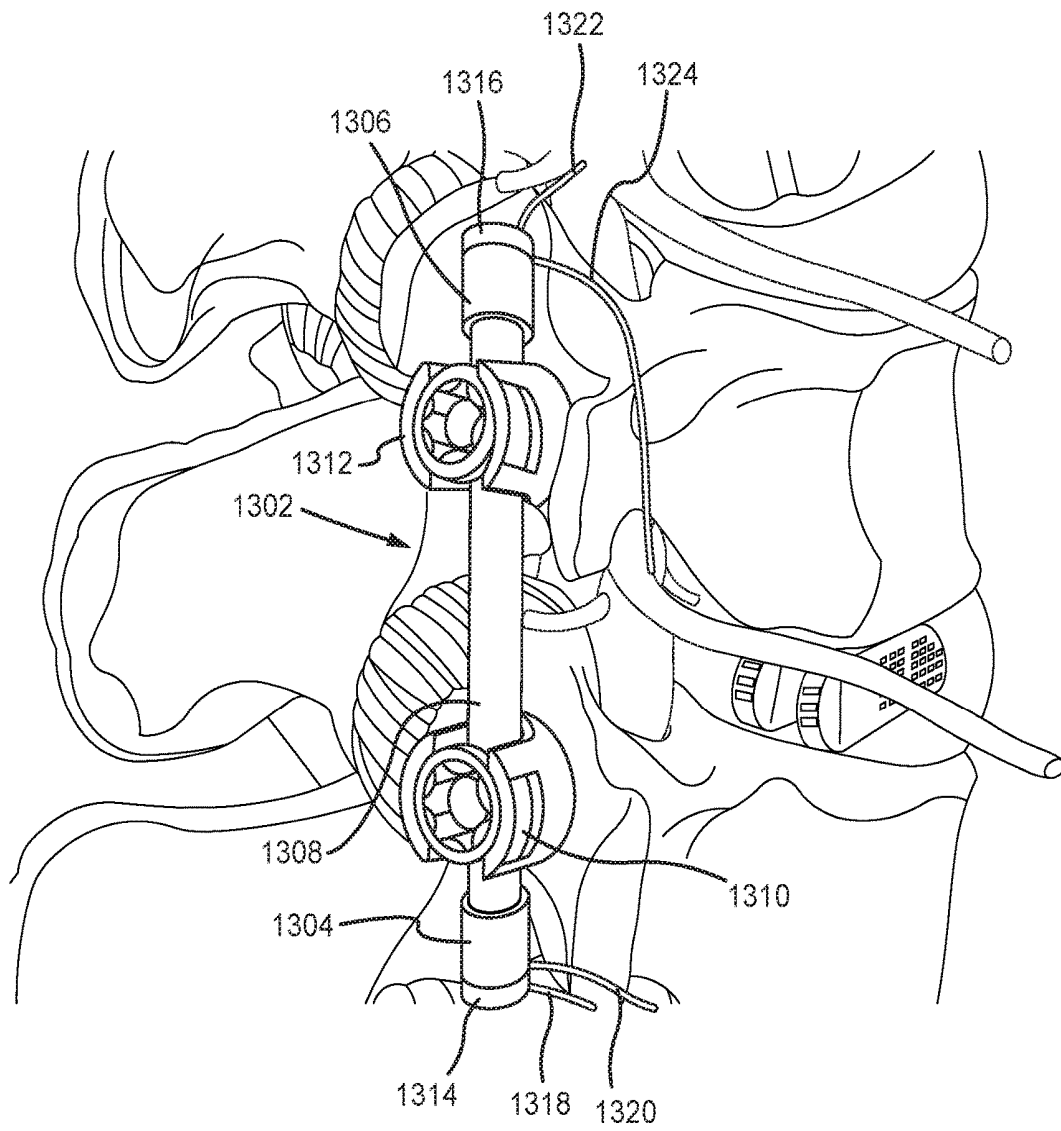


FIG. 13

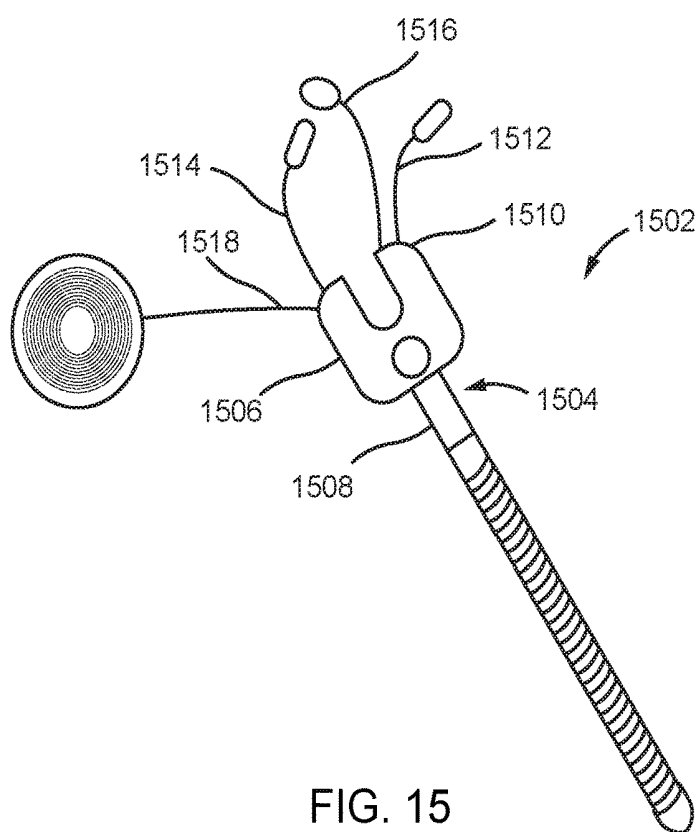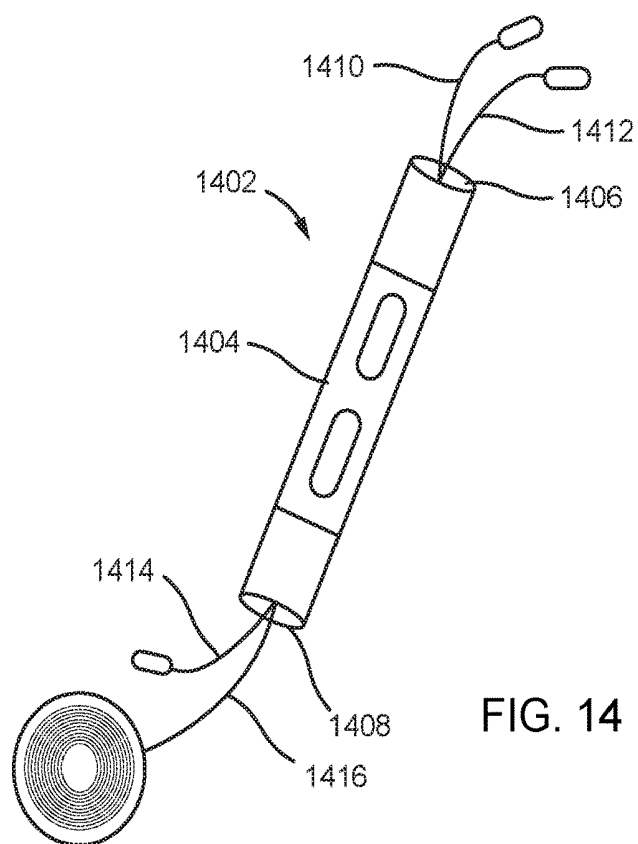

**SYSTEMS, DEVICES AND METHODS THAT
AFFECT NEURAL TISSUE THROUGH THE
DELIVERY OF A PULSED RADIO
FREQUENCY SIGNAL GENERATED BY AN
IMPLANTABLE MEDICAL DEVICE**

**CROSS-REFERENCE TO RELATED
APPLICATION(S)**

[0001] This application claims the benefit of U.S. Provisional Application Ser. No. 62/502,604, entitled “Systems and Methods for Generating Therapeutic Modes of Energy at Targeted Areas of a Patient’s Body” and filed on May 6, 2017, and U.S. Provisional Application Ser. No. 62/531,129 entitled “Smart Implantable Spinal Stabilization/Cage System Capable of Delivering Radiofrequency Energy to the Spine Via Implantable Transcutaneous Rechargeable Pulse Generator and Spinal Stimulation Lead System” and filed on Jul. 11, 2017, each of which is expressly incorporated by reference herein in its entirety.

BACKGROUND

Field

[0002] The present disclosure relates generally to systems, devices, and methods related to delivery of therapy for treatment of pain, and more particularly, to systems, devices, and methods that affect neural tissue through the delivery of a pulsed radio frequency (RF) signal generated by an implantable medical device. The present disclosure also relates generally to systems, devices, and methods related to monitoring the condition of a patient having an orthopedic implant device, and more particularly, to systems, devices, and methods that collect and assess information directed to the mechanical integrity of an orthopedic implant device and the activity of the patient as may be affected by the implant device.

Background

[0003] The number of people having spinal conditions that result in discomfort and pain is increasing rapidly, mainly due to sedentary lifestyle and other postural and physical habits. Some spinal conditions of this nature may be treated by non-surgical procedures, including for example, exercise regimens to strengthen core abdominal muscles. Sometimes, however, a surgical procedure is necessary. Conditions requiring surgery include, for example, disc slip, degenerated disc, spinal tumor, degenerated spine, spinal stenosis, fracture of the vertebrae, posterior rami syndrome and spinal instability such as scoliosis (sideways curvature of the spine) and kyphosis (an abnormally excessive convex curvature of the spine in the cervical, thoracic and sacral regions).

[0004] These surgical procedures may involve fusion, where one or more vertebrae are surgically fused together using bone grafting, to prevent relative motion among the fused vertebrae. Implant devices utilizing specially designed spinal instrumentation are also often used in these surgical procedures to facilitate fusion, correct deformities, and stabilize and strengthen the spine.

[0005] Example implant devices include rod and screw sets, interspinous process devices, and interbody fusion devices. A rod and screw set includes a pair of pedicle screws that are fixed in the pedicles of the spinal vertebra to provide anchorage points for a rod that spans between the

screws. The rods, which are typically formed of titanium or stainless steel, attach to the screws and make the affected segments of the spine immobile, for the purpose of accurately aligning the spine, which promotes fusion and removes deformities. While the rods are strong, they have some flexibility so that the surgeon can shape the rod to match the contours of the spine.

[0006] Interspinous process devices are used to treat lumbar spinal degenerative disease that reduces the lumen of the spinal canal for the passage of the nerves, leading to compression of nerve roots. Indications for the implantation of an interspinous process device are spinal stenosis and neurogenic claudication. The primary aim of interspinous process devices is to limit lumbar extension in the area of stenosis and to enlarge the spinal canal and open the intervertebral foramina to thereby achieve indirect decompression of the nerve roots in their passage through the foramina. More recent interspinous process devices have been designed to provide non-pedicle supplemental spine fixation to achieve supplemental fusion. These more recent designs for supplemental fusion are referred to as interspinous process fusion devices.

[0007] Interbody fusion devices are used to restore lost disc height resulting from a collapsed disc and to relieve pressure on nerve roots. One type of interbody fusion device, referred to as a “cage” is a small hollow device with perforated walls that is configured to be placed between two vertebrae, in place of a disc. A bone graft may be packed into the cage to promote bone growth between the adjacent vertebrae. Another type of interbody fusion device is configured to be placed within the annulus of a disc. This type of interbody fusion device comprises a set of modules that are individually placed within the annulus adjacent each other in an arrangement that substantially fills the interior of the annulus.

[0008] Pain is a distressing sensation conveyed from the affected part of the body to the spinal column and then to the brain by specialized nerves termed sensory or efferent nerves. The body possesses receptors or free nerve endings that detect sensations that can range from pleasant to annoying to distressing and are termed stimuli. Stimuli are transmitted through the nerve axon in the form of action potentials, a form of electrical energy created by the transfer of ions across the axon membrane. The sensory nerves are a branching network that radiate from nerves branching from the spinal cord through the vertebral foramen and thence on to parts of the body associated with that particular level of the spinal column. In the region of the vertebral foramen is a specialized mass of nervous tissue called the dorsal root ganglion (DRG). The cells of the DRG convert the action potentials transmitting sensation into a different mechanism for transmission along the spinal column to the brain. Nerve cells are thus classified as pre-ganglionic or post-ganglionic. Also, the action potential of sensory nerves can be as short as 1 millisecond, which translates to a frequency at 1 KHz.

[0009] The spinal conditions cited above generate pain by several modes. The first is that damaged discs and vertebral structures generate pain via sensory nerves. Another mode is termed spinal stenosis where the nerves passing through the vertebral foramen are compressed, generating pain that appears to come from another part of the body. Finally, the spine stabilization methods and means can generate pain.

[0010] The use of electrical energy to stimulate or modulate nerves is based on modulating the action potentials of

the nerve axon. Several medical devices have been created to apply electrical energy to the nerves of the body in attempts to provide pain relief by interrupting the transmission of sensation through the nerve. The electrical energy can be applied as direct current (DC) or alternating current (AC). DC applications have limitations such as causing pain and even burns. AC applications have used frequencies from less than 1 Hz up to 50 KHz to disrupt or modulate nerve transmission. There are various claims for the selection of one frequency over another. Historically, nerve stimulation can be achieved at 10 Hz and blocked at 100 Hz. Higher frequencies up to 50 KHz have been investigated and found to have some effect.

[0011] AC energy in the radiofrequency band has been used to destroy nerve cells. Historically the frequency band utilized has been limited to 100-500 KHz. AC current is continuously applied to the targeted tissue and the oscillating current generates heat resulting in elevated temperature that cause nerve cell necrosis. This mode of therapy has been used to destroy many types of body cells, notably cardiac and cancer. Another mode of RF tissue destruction is pulsed RF (PRF). PRF may be applied to the targeted tissues, for example, in pulses of 20-50 μ sec at the rate of 2-8 Hz with an amplitude of 50-100V. This mode of application, however, does not generate sufficient heat to cause cell necrosis but the PRF interferes with the cellular mechanisms for transporting ions across cell membranes.

[0012] In current medical practice, pain management in the anatomical region of the spinal column is conducted with chronic implanted spinal stimulators that deliver neurostimulation, typically in the form of charge-balanced, biphasic direct current (DC) pulses delivered at a frequency in the range of 10 Hz-10 KHz. Spinal stimulation therapy is applied to the spinal column and more recently to the DRG. Implanted spinal stimulators are battery powered and limited to neuromodulation stimulation in the form of DC pulses that preserves battery life.

[0013] Pain management in the region of the spinal column may also involve acute procedures such as RF and PRF ablation. RF and PRF therapies have been limited to means whereby a direct electrical connection is made between an external RF generator and a probe within the body in contact with the targeted tissue. The probe is inserted percutaneously to the targeted tissue and withdrawn after treatment. This method is necessitated by the energy requirements of the therapy.

[0014] It is desirable to provide means and methods to disrupt pain signals in the region local to the spinal column with an implanted device that can deliver both neuromodulation therapies and neuro-necrotic therapies. The therapies would be applied selectively. Furthermore, the device would be powered by an external source using wireless power transfer. Included in the device function would be sensors for monitoring the health of the spinal area and telemetry for reporting the status of one or more of patient activity, therapy delivery, and mechanical integrity of the spinal area, to an external module. The concepts disclosed below address these needs and others.

SUMMARY

[0015] The various embodiments herein provide systems, device, and methods directed to the delivery of RF therapy by an implantable medical device to relieve back pain associated with orthopedic implant devices and/or to the

monitoring of the mechanical integrity of such implant devices. The various embodiments herein also provide for structural association or integration of the implantable medical device with orthopedic implant devices.

[0016] In one embodiment, a pain management system includes an external device and an implantable medical device. The external device is configured to transmit radio frequency (RF) energy through the application of a RF signal to an external RF energy interface, where the RF signal oscillates at a frequency in an energy transmission band. The implantable medical device includes one or more electrodes configured to be implanted in, on, or adjacent a target area of nerves, an implantable RF energy interface configured to receive energy from the external RF energy interface over a wireless energy link, and an energy storage component configured to store the energy. The implantable medical device also includes a RF therapy controller coupled to the energy storage component and the one or more electrodes. The RF therapy controller is configured to: 1) generate a therapeutic output signal from the stored energy, the therapeutic output signal configurable to provide either one of RF stimulation therapy and RF ablation therapy, and comprising pulses of an RF signal oscillating at a frequency in a therapy band that is greater than the energy transmission band, and 2) deliver the therapeutic output signal to one or more of the plurality of electrodes.

[0017] In another embodiment, an implantable medical device configured for chronic implant includes one or more electrodes configured to be implanted in, on, or adjacent a target area of nerves, an RF energy interface configured to receive energy from an external RF energy interface over a wireless energy link, and an energy storage component coupled to the RF energy interface through charging circuitry and configured to store the energy. The implantable medical device further includes a RF therapy controller coupled to the energy storage component and the one or more electrodes. The RF therapy controller is configured to: 1) generate a therapeutic output signal from the stored energy, the therapeutic output signal comprising pulses of an RF signal oscillating at a frequency in a therapy band, and 2) deliver the therapeutic output signal to one or more of the plurality of electrodes.

[0018] In another embodiment, a method of delivering RF therapy to a patient includes transmitting radio frequency (RF) energy through the application of a RF signal to an external RF energy interface, where the RF signal oscillates at a frequency in an energy transmission band. The method also includes receiving the RF energy at an implanted medical device, and storing energy derived from the received RF energy in a direct current (DC) energy storage component. The method further includes generating a therapeutic output signal from the stored energy and delivering the therapeutic output signal to one or more of the electrodes. The therapeutic output signal is configurable to provide either one of RF stimulation therapy and RF ablation therapy, and comprises pulses of an RF signal oscillating at a frequency in a therapy band that is greater than the energy transmission band.

[0019] In yet another embodiment, an implantable medical device configured for chronic implant includes one or more electrodes configured to be implanted in, on, or adjacent a target area of nerves, and an RF energy interface configured to receive energy from an external RF energy interface over a wireless energy link. The device also includes a housing

having therein, an energy storage component coupled to the RF energy interface through charging circuitry and configured to store the energy. A RF therapy controller also within the housing is coupled to the energy storage component and the one or more electrodes. The RF therapy controller is configured to: 1) generate a therapeutic output signal from the stored energy, the therapeutic output signal comprising pulses of an RF signal oscillating at a frequency in a therapy band, and 2) deliver the therapeutic output signal to one or more of the plurality of electrodes. The housing is configured to be associated with an orthopedic implanted device comprising a piece of implant hardware.

[0020] In another embodiment, an orthopedic implant device configured for chronic implant in a patient includes at least one implant structure, e.g., a rod or a pedicle screw, configured to be associated with a boney structure. One or more components of an implantable medical device are integrated with the implant structure. The implantable medical device may be configured to generate a therapeutic output signal in a form of a pulsed a radio frequency (RF) signal, and deliver the signal to neural tissue. Alternatively, the implantable medical device may be configured to collect information related to the mechanical integrity of the orthopedic implant device.

[0021] In yet another embodiment, an implantable medical device configured for chronic implant in a patient includes a housing. At least one of a radio frequency (RF) module configured to generate a therapeutic output signal in a form of a pulsed a RF signal, and deliver the signal to neural tissue of the patient, and a health information module configured to collect information directed to a mechanical integrity of an orthopedic implant device and an activity of the patient, is located within the housing. The housing is configured to be associated with an orthopedic implanted device comprising a piece of implant hardware.

[0022] It is understood that other aspects of apparatuses and methods will become readily apparent to those skilled in the art from the following detailed description, wherein various aspects of apparatuses and methods are shown and described by way of illustration. As will be realized, these aspects may be implemented in other and different forms and its several details are capable of modification in various other respects. Accordingly, the drawings and detailed description are to be regarded as illustrative in nature and not as restrictive.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] Various aspects of systems, devices, and methods will now be presented in the detailed description by way of example, and not by way of limitation, with reference to the accompanying drawings, wherein:

[0024] FIG. 1A is a perspective illustration of a system for delivering one or more modalities of radio frequency (RF) therapy to neural tissue in the area of an orthopedic implant device, and/or for monitoring health information related to one or more of the mechanical integrity of an orthopedic implant device and patient health.

[0025] FIG. 1B is a block diagram of the system of FIG. 1A, including an implantable medical device comprising an RF module associated with one or more leads, a health information module associated with one or more sensors, and one or more external devices including an RF generator/controller and a patient interface device.

[0026] FIGS. 1C and 1D are illustrations of the implantable medical device of FIG. 1A comprising a RF module coupled to an orthopedic implant device in the form of a spinal fixation device.

[0027] FIGS. 1E and 1F are illustrations of the implantable medical device of FIG. 1A comprising a health information module coupled to an orthopedic implant device in the form of a spinal fixation device.

[0028] FIG. 2 is a block diagram of the RF module and leads of FIG. 1B.

[0029] FIG. 3A is a block diagram of an RF therapy controller included in the RF module of FIG. 2.

[0030] FIG. 3B is a schematic diagram of some of the components of the RF therapy controller of FIG. 3A.

[0031] FIG. 4 includes schematic diagrams of signals involved in the generation and delivery of RF therapy in the form of neuromodulation (e.g., the RF stimulation modality) by the system and devices of FIG. 1B.

[0032] FIG. 5 includes schematic diagrams of signals involved in the generation and delivery of RF therapy in the form of ablation (e.g., the RF ablation modality) by the system and devices of FIG. 1B.

[0033] FIG. 6 includes schematic diagrams of signals involved in the generation and delivery of RF therapy in the form of heat (e.g., the RF heat modality) by the system and devices of FIG. 1B.

[0034] FIG. 7A is a block diagram of the external RF generator/controller of FIG. 1B.

[0035] FIG. 7B is a schematic diagram of some of the components of the external RF generator/controller of FIG. 7A.

[0036] FIG. 8 is a block diagram of an RF energy link between the RF module and the external RF generator/controller of FIG. 1B that allows for wireless, transcutaneous transmission of RF energy between the external RF generator and the RF module.

[0037] FIG. 9 is a flow chart of a method of delivering RF therapy to a patient.

[0038] FIG. 10 is a block diagram of the health information module and associated sensors of FIG. 1B.

[0039] FIG. 11 is an illustration of an alternate arrangement of the implantable medical device of FIG. 1A comprising a RF module coupled to an orthopedic implant device in the form of a spinal fixation device.

[0040] FIG. 12A, 12B and 12C are illustrations of an embodiment of the implantable medical device of FIG. 1B comprising an RF module configured to fit within a portion of an interspinous process device.

[0041] FIG. 13 is an illustration of a spinal fixation device with an integrated RF module.

[0042] FIG. 14 is a schematic illustration of a rod component of a spinal fixation device with an integrated RF module.

[0043] FIG. 15 is a schematic illustration of a pedicle screw component of a spinal fixation device with an integrated RF module.

DETAILED DESCRIPTION

[0044] Various systems for alleviating pain, including for example back pain or limb pain due to disease or defects of the vertebra, intervertebral disc or neural structures, are disclosed. The basic system includes: (1) an external instrument which broadcasts a radiofrequency (RF) energy field, (2) an implanted device that interacts with the energy field

to convert the energy directly to heat or to electric current, and (3) probes or leads which distribute the converted energy to the anatomical target of interest. Targets of interest include neural structure, such as the dorsal root ganglion, in the area of the orthopedic implant devices.

[0045] In one embodiment, the system includes an implanted receiver that converts the RF energy field broadcast by the external instrument to electric current, and probes in the form of electrode-bearing leads, connected to the implanted receiver that are routed to the sites of therapy. The receiver may be implanted at sites in the spinal column local to the site of the pain. An example implant site is between and alongside of the interspinous processes.

[0046] In another embodiment, the system includes an implanted receiver that contains a circuit that converts the RF energy broadcast by the external instrument to a programmable pulsed RF current, and probes in the form of electrode-bearing leads, connected to the implanted receiver and routed to the sites of therapy. The receiver may be implanted at sites in the spinal column local to the site of the pain. An example implant site is between and alongside of the interspinous processes.

[0047] In another embodiment, the system includes an implanted receiver that contains a circuit that converts the RF energy broadcast by the external instrument to a programmable continuous or pulsed stimulation current in the 10 Hz to 1000 Hz range, and a probe in the form of electrode-bearing leads, connected to the implanted receiver and routed to the sites of therapy. The receiver may be implanted at sites in the spinal column local to the site of the pain. An example implant site is between and alongside of the interspinous processes.

[0048] In yet another embodiment, the system includes an implantable structure that contains an inductive circuit configured to convert the RF energy broadcast by the external instrument into heat, and a probe that delivers the heat to the sites of therapy. In this case the implantable structure may itself be a probe. For example, the implantable structure may include a heat dissipation mechanism coupled to the inductive circuit for distributing the heat to the sites of therapy. Alternatively, the system may include a probe in the form of a heat dissipating lead that is routed to the sites of therapy.

[0049] In either case, the combination implantable structure and probe, or the probes themselves, are implanted in spinal location in or adjacent to the nerves responsible for pain generation. Examples are the superior articular process of the vertebra, the annulus of the intervertebral disc, or other such location. The probe implant procedure may be an interventional method utilizing a trocar structure for inserting the probe through the tissue and releasing it at the desired location. This embodiment is based on the systems disclosed in U.S. Pat. Nos. 8,986,296 and 9,295,517, each entitled "System and Method for Generating Heat at Target Area of Patient's Body," and incorporated herein by reference.

[0050] In another aspect, the system allows for communication with smart devices, such as a smart cell phone or smart tablet, and enables the transfer, download, and capture of data information from the implanted device. This transferred and captured data may include data related to the delivery of energy and RF current, such as the time, frequency, amount and level of energy and RF current delivered. The system may also include an accelerometer or gyroscope that allows data related to movement to be

transferred and captured with a smart device. The data transferred and captured from the implanted device may also be aggregated with data from peripheral devices and software applications that are independent of the implanted device. Examples of independent peripheral devices could include the GPS location that is built within a smart device and activity wearable smart device, such as a Fitbit or smart athletic shoes. Examples of independent software applications could include health apps that capture drug adherence and drug use, or health apps that capture patient surveys and health questionnaires. The data transferred and captured onto a smart device may then be aggregated and displayed on the smart device and further transferred to health information technology systems, such as electronic health records.

[0051] The features and structures of the foregoing systems and implantable structures may be combined to form embodiments configured to generate and deliver several of the various forms of therapy, e.g., stimulation current, pulsed RF current, heat, etc. Furthermore, the implantable device may be incorporated into one or more spinal fixation devices to locate the probes in the area of the target neural structure.

[0052] Accordingly, a system, may be configured to deliver one or more modalities of radio frequency (RF) therapy to neural tissue in the area of an orthopedic implant device to alleviate pain. For example, the system may deliver RF therapy in the form of RF stimulation, RF heat, or RF ablation to the dorsal root ganglion in the region of a spinal fixation device. The system may also be configured to collect and analyze health information related to implant integrity and patient health. For example, the system may analyze information indicative of the integrity or strength of an attachment between the orthopedic implant device and the patient's body, and the integrity or strength of an interconnection between component parts of the implant device to determine if corrective action is warranted, e.g., surgical procedure to strengthen attachment of implant device. The system may also collect and analyze information indicative of the range of motion and the activity level of the patient as may be affected by the implant device to determine if a change in RF therapy is warranted.

System Overview

[0053] With reference to FIGS. 1A and 1B, the system **100** includes an implantable medical device **102a** having an RF module **114** coupled with an implantable RF energy interface **115** that receives or admits RF energy through an inductive coil **117**, and one or more electrode-bearing leads **116a**, **116b**, **116c** for delivering RF therapy to the patient. The system **100** may also include an implantable medical device **102b** having a health information module **140** associated with one or more implant-integrity sensors **142**, **144** and one or more patient health sensors **146** for collecting and analyzing data, and indicating the condition of an orthopedic implant device and patient status. The implant-integrity sensors **142**, **144** and patient health sensors **146** are typically included in the health information module. Some implant-integrity sensors, however, may be directly associated with the orthopedic implant device and coupled to the health information module **140** by a cable. For clarity of illustration the RF module **114** and health information module **140** are shown in FIG. 1A as separate implantable medical devices **102a**, **102b**. These modules, however, may be embodied in a single implantable medical device.

[0054] An external RF generator/controller 104 generates and transmits or emits RF energy through an external RF energy interface 105 that includes an inductive coil 107. The external RF energy interface 105 and the implantable RF energy interface 115, when appropriately positioned relative to each other, form a parallel-tuned resonator circuit comprising the inductive coil 107 of the external RF energy interface 105 and the inductive coil 117 of the implantable RF energy interface 115. The parallel-tuned resonator circuit provides an inductive coupling interface 128 between the external RF generator/controller 104 and the implanted RF module. The RF module 114 receives the RF energy transmitted by the RF generator/controller 104 over the inductive coupling interface 128, stores the energy, and eventually uses the energy to generate and deliver a form of RF therapy to the patient through the leads 116a, 116b, 116c.

[0055] The inductive coupling interface 128 may also facilitate data communication between the external RF generator/controller 104 and the RF module 114 for the downloading of programming information from the RF generator/controller to the RF module, and the uploading of operational information, e.g., RF therapy delivery records, from the RF module to the RF generator/controller. Alternatively, programming and data collection between the RF module 114 and the external RF generator/controller 104 may be implemented through a wireless RF telemetry interface 130. In either of the inductive coupling or the RF telemetry implementations, health information collected by the health information module 140 may also be uploaded to the external RF generator/controller 104 through a communications bus 132 that interconnects the RF module 114 and the health information module.

[0056] An external patient interface device 106 may upload health information collected by the health information module 140 through a wireless RF telemetry interface 134. Operational information, e.g., RF therapy delivery records, may also be uploaded to the external patient interface device 106 from the RF module 114 through the communications bus 132 that interconnects the RF module and the health information module 140. The external patient interface device 106 may also provide for limited operation control of the RF module 114. To this end, command signals may be sent from the patient interface device to the RF module 114 over the RF telemetry interface 134 and through the communication bus 132 to initiate the delivery of an RF therapy by the RF module, or to program the RF module to deliver an RF therapy in accordance with a therapy regimen.

RF Module and RF Therapies

[0057] Continuing with FIGS. 1A and 1B, and with additional reference to FIGS. 1C and 1D, as just mentioned, the system 100 may include an implantable medical device 102a having an RF module 114, and an external RF generator/controller 104. In the example embodiment shown in FIGS. 1A and 1C, an implantable medical device 102 including an RF module 114, is associated with an orthopedic implant 108a in the form of a spinal fixation device implanted in the lumbar region of the spine. The spinal fixation device 108a is a rod-and-screw device that includes a pair of pedicle screws 110a, 110b and a rod 112 secured to the screws by a pair of hex nuts 120a, 120b.

[0058] The implantable medical device 102 includes the RF module 114, three electrode-bearing leads 116a, 116b,

116c, and an implantable RF energy interface 115. The RF module 114 includes a housing 122 fabricated from a biocompatible material, such as titanium, that encloses components of the RF module. The RF module 114 is secured to the rod 112 by an optional attachment mechanism 124 to prevent device migration after implant. Alternatively, the RF module 114 may be secured in place by suturing the device to the patient's anatomy. The RF module 114 may also be secured in place by anatomy itself, through appropriate positioning of the RF module in surrounding anatomy.

[0059] The leads 116a, 116b, 116c are configured to be implanted to locate one or more electrodes at their distal ends in, on, or adjacent to a target area of nerves, and to electrically couple to the RF module 114 through a connector at their proximal ends. In the example shown in FIG. 1C, the leads 116a, 116b, 116c are implanted to locate one or more electrodes in, on, or adjacent to a target area 126a, 126b, 126c corresponding to the dorsal root ganglion.

[0060] The implantable RF energy interface 115 is configured to be implanted at a subcutaneous location in the patient that is remote from the RF module 114 and the metal structures of the spinal fixation device 108a. This avoids adverse interaction between the electromagnetic field produced during the transmission and reception of RF energy over the inductive coupling interface 128, and those metal structures, which would otherwise reduce the efficiency of charging. The implantable RF energy interface 115 includes an inductive coil 117 coated or encased in polymer 119 to form a patch, and a cable 121 that connects to the RF module 114. The inductive coil 117 is formed by coiling a magnetic wire a number of turns, e.g., between 40-60 turns. In one configuration, as shown in FIG. 1A, the magnetic wire is coiled to define a circular, spiral geometry having a diameter in the range of 1-2 inches. Other coil geometries, such as rectangular, may be formed. The patch formed by the encased inductive coil 117 is flexible to allow for conformance with anatomy of a patient's back. The magnetic wire is formed by two wires tightly twisted together. The two wires emerge from the inductive coil 117 where they diverge to extend through the cable 121, and respectively connect to a separate terminal at a connector end of the cable 121.

[0061] FIG. 2 is a block diagram of the RF module 114, implantable RF energy interface 115, and leads 116a, 116b, 116c of FIG. 1B. The RF module 114 includes a connector 118 or header adapted to receive a connector end of each leads 116a, 116b, 116c and a connector end of the implantable RF energy interface 115. The header 118 physically secures the leads 116a, 116b, 116c to the RF module 114 and physically and electrically couples each lead and its associated, spaced-apart electrodes 202a-d, 204a-d, 206a-d to an electrode interface 208 within the RF module 114. Although twelve electrodes 202a-d, 204a-d, 206a-d are shown in FIG. 2, more electrodes may be available depending on the number of implanted leads and the number of electrodes per lead. The housing 120 is also physically coupled to the electrode interface 208 and may serve as a ground or return electrode.

[0062] The electrode interface 208 includes switch circuitry for selecting one or more lead electrodes 202a-d, 204a-d, 206a-d and housing 120 as needed for delivery of a RF therapy. The electrode interface 208 may also include circuitry that provides other features, or capabilities, includ-

ing but not limited to isolation, and charge-balancing functions, that are required for a proper interface with neurological tissue.

[0063] The header 118 also physically secures the implantable RF energy interface 115 to the RF module 114 and physically and electrically couples the inductive coil 117 to charging circuitry 214 within the RF module 114. The charging circuitry 214 receives RF energy from the external RF generator/controller 104 over the inductive coupling interface 128, and provides the energy to an energy storage component 224 of the RF module. The energy storage component 224 may be a supercapacitor or one or more rechargeable batteries. The charging circuitry 214 may include a rectification circuit that causes current or voltage alternations to become monopolar with respect to a reference voltage node that connects with the parallel-tuned resonator circuit formed in part by the inductive coil 117. The charging circuitry may also include an overcharging controller, that is either automatically or externally controlled to prevent disruption or damage to the energy storage component.

[0064] An RF therapy controller 210 is coupled to the electrode interface 208 and controls the selection of electrodes by the electrode interface through control signals 212. Electrode selection by the RF therapy controller 210 may result in delivery of a modality of RF therapy through a pair of electrodes on the same lead, e.g., a bipolar electrode configuration, through one electrode on a first lead and another electrode on a second lead, e.g., a combi-polar electrode configuration, or through an electrode on a lead and the housing, e.g., a unipolar electrode configuration.

[0065] The RF module 114 also provides the form of RF signal needed to deliver a modality of RF therapy through the selected electrodes. The RF therapy controller 210 is coupled to the energy storage component 224 and configured to draw energy from the energy storage component and generate a form of RF signal commensurate with the modality of RF therapy being delivered. The RF signal 216, also referred to herein as the RF therapeutic output, is output to one or more electrodes 202a-d, 204a-d, 206a-d through the electrode interface 208. (Further description of the RF therapy controller 210 and the different modalities of RF therapy are provided below with reference to FIGS. 3-6B. Further description of the functionality of the implantable RF energy interface 115 and the charging circuitry 214 as it relates to the reception of RF energy from the external RF generator/controller is provided later below with reference to FIGS. 7A, 7B and 8.)

[0066] Continuing with FIG. 2, each of the leads 116a, 116b, 116c may also include a temperature sensor 220a, 220b, 220c configured to provide signal indicative of the temperature at the implant location of the lead. The temperature sensors 220a, 220b, 220c are physically coupled to the electrode interface 208 through the connector 118. In one configuration, the temperature sensors 220a, 220b, 220c are located on the lead, at the distal end near the electrodes and provide a temperature feedback signal 218 to the RF therapy controller 210 to ensure that the temperature at the target area meets a specified criterion. For example, during delivery of pulsed RF stimulation therapy, the temperature at the target area should be below 42° C.; during delivery of RF heat therapy, the temperature at the target area should be within the range of 42-45° C.; and during pulsed RF ablation therapy, the temperature at the target area should be within

the range of 42-45° C. If the temperature is outside of the specified range, the RF therapy controller 210 may respond by either increasing the energy of the RF therapy to increase the temperature as needed, decreasing the energy to decrease the temperature as needed, or stopping therapy delivery. Temperature feedback signals 218 may also be provided to the external RF generator/controller 104 through an RF telemetry interface 130, in which case, the RF generator/controller may output a command to the RF module 114, which causes the RF therapy controller 210 to either increase or decrease the energy of the RF therapy.

[0067] In addition to supplying energy for the generation of RF therapy signals, the energy storage component 224 supplies the voltages and currents necessary for operation of electronic components of the RF module 114, including for example, components of the electrode interface 208, the RF therapy controller 210, and the charging circuitry 214. The RF module 114 also includes a memory circuit 226. The memory circuit 226 may store information corresponding to a history of delivered RF therapies by modality type, energy storage component recharge sessions, and temperature measurements.

[0068] The RF module 114 may include a communications interface 222 that enables RF telemetry communication between the RF module and the external RF generator/controller 104 through a wireless communication link. The external RF generator/controller 104 allows a physician to program the RF therapy controller 210 with a therapy regimen. For example, the RF therapy controller 210 may be programmed to deliver periodic doses of a selected modality of RF therapy during a treatment session. The communications interface 222 also allows for the downloading of information from the memory circuit 226. Information may also be downloaded from the memory circuit 226 through the RF energy interface 115 when the interface is not receiving RF energy from the external RF generator/controller 104.

[0069] With reference to FIG. 3A and 3B, the RF therapy controller 210 includes components configured to generate a RF therapeutic output signal 302 corresponding to a selected modality of operation. The core components of the RF therapy controller 210 include an energy supply controller 304, a RF signal generator 306 and a RF modality controller 308, which provides control signals 310, 312 to the energy supply controller and the RF signal generator. Each of these control signals 310, 312 sets one or more characteristics of what will ultimately be the RF therapeutic output signal 302 of the RF therapy controller. These characteristics or parameters may include, for example, the pulse width, on/off duty cycle, therapeutic output duration, and strength, e.g., voltage output, current output, or power level, as characterized by a pulse amplitude of the RF therapeutic output signal 302.

[0070] At the input side of the RF therapy controller 210, the energy supply controller 304 is coupled to the energy storage component 224 of the RF module 114. Based on one or more control signals 310 from the RF modality controller 308, the energy supply controller 304 draws direct current or applies a voltage from the energy storage component 224 in a manner that defines one or more characteristics of the RF therapeutic output. For example, with reference to FIG. 3B, the energy supply controller 304 may include switch sets (M1/M4, M2/M5 and M3/M6) that operate in accordance with respective control signals 310 to draw direct current or apply a DC voltage from the energy storage component 224

(V1, V2 and V3) to a storage capacitor C2. For example, M1 and R1 limit current for neurostimulation to 20 mA when selected by switch M4 and control signal “Neurostim”, and a DC voltage of 3.6V is applied to the storage capacitor C2. M2 and R2 limit current for analgesia to 50 mA when selected by switch M5 and control signal “Analgesia”, and a DC voltage of 7.2V is applied to the storage capacitor C2. M3 and R3 limit current for ablation to 1A when selected by switch M6 and a control signal “Ablation”, and a DC voltage of 14.4V is applied to the storage capacitor C2. The control signals 310 thus determine parameters of the RF signal, including current or voltage amplitude that defines the energy per pulse or pulse strength of the RF therapeutic output signal 302. Furthermore, the on/off switching operation of the control signals 310 cause the switches M4, M5, M6 to operate in an on/off manner that ultimately defines one or more characteristics, e.g., the pulse width, duty cycle and duration, of the RF therapeutic output signal 302.

[0071] The energy stored in the storage capacitor C2 represents a current-limited DC supply voltage 314 that is applied to the RF signal generator 306. Based on control signals 312 from the RF modality controller 308, the RF signal generator 306 generates pulses of RF energy using the current-limited DC supply voltage 314 in a manner that defines one or more characteristics of the RF therapeutic output signal 302. For example, with reference to FIG. 3B, in one configuration the RF signal generator 306 may include a generic “half-bridge” switching control integrated circuit (IR2101), which applies on-off digital voltages to switches M7 and M8 to resonant excitation of L2 and C3 at the required radio frequency. The signals “450 KHz” and “450 KHz_inv” correspond to the control signals 312 that control the application of on-off digital voltages to switches M7 and M8 to thereby define the frequency of the RF signal. In this example, the control signals 312 define a frequency of 450 KHz. Through manipulation of the application of on-off digital voltages to switches M7 and M8, the control signals 312 may define other frequency values within a therapy band of 300-500 KHz. In another configuration, the RF signal generator 306 may include a voltage-controlled RF amplifier with an RF oscillator that operates in accordance with the control signals 312 to generate an RF signal within the therapy band from the current-limited DC supply voltage 314.

[0072] The combination of control signals 310, 312 provided by the RF modality controller 308 thus determines the form of the RF therapeutic output signal 302. The form of the RF therapeutic output signal 302 may correspond to one of three different modalities of RF therapy.

[0073] A first modality, referred to herein as “RF stimulation,” is configured to modulate neural signals, i.e., alter or interrupt transmission of action potentials by one or more nerves, at a target area through delivery of RF signals in a pulse train form. The pulse train is defined by parameters, including RF signal frequency, pulse width, pulse amplitude, and duty cycle, which are selected to deliver pulses of alternating current (AC) to the target area, at a low current level sufficient to modulate neural signals. This RF stimulation modality of RF therapy is distinct from conventional neuromodulation systems, which modulate neural signals through delivery of electrical stimulation in the form of direct current (DC) pulses, and is advantageous over DC pulse stimulation in that the application of an RF signal

avoids the accumulation of positive ions and negative ions at the interface of the membrane that may result from DC pulse stimulation.

[0074] FIG. 4 includes schematic diagrams of idealized signals involved in the generation and delivery of RF therapy in the form of neuromodulation, e.g., the RF stimulation modality. With reference to FIGS. 1B, 3A and 4, the external RF generator/controller 104 generates and outputs RF energy in the form of a continuous RF signal 402. Alternatively, the RF signal 402 may be pulsed. In one embodiment, the frequency of the RF signal 402 is in a RF energy transmission band, which may be between 40-60 KHz. The RF signal 402 has a power level 410 (as represented by the amplitude) between 0.1 Watt and 10 Watts.

[0075] The RF signal 402 is transmitted to an implanted RF module 114 through transcutaneous inductive coupling. The RF signal 404 received by the RF module 114 generally maintains the same signal characteristics in terms of RF signal frequency. Although not illustrated as being attenuated, the amplitude of the received RF signal 404 may be less than the transmitted RF signal 402. For example, the amplitude of the received RF signal 404 may be attenuated by between 5% and 95%. Circuitry within the RF module 114 uses the received RF signal 404 to charge the energy storage component 224.

[0076] As described above, the RF therapy controller 210 draws current from the energy storage component 224 to charge a storage capacitor C2 to a DC voltage. The current and DC voltage are sufficient to generate at least one pulse of a RF stimulation signal. The drawn current or stored DC voltage is represented in FIG. 4 as a signal 406 alternating between on durations 416 having an amplitude 414 representing current drawn or DC voltage across the storage capacitor C2, and off durations 418 during which current is not drawn. In the example circuitry of FIG. 3B, the current is up to 20 mA and the DC voltage is 3.6V.

[0077] Using the energy present in the storage capacitor C2 during the on durations 416, the RF therapy controller 210 generates an RF therapeutic output signal 302 in the form of a RF stimulation signal 408 comprising an RF signal oscillating at a frequency in a therapy band, which may be between 400-600 KHz, and delivers the signal to the patient through one or more electrodes. The RF stimulation signal 408 is characterized by a pulse width 422 generally corresponding to the on duration 416 of the signal 406, a pulse frequency corresponding to the frequency of the on durations 416 of the current signal, a pulse amplitude 426, and a pulse-train duration 428. For example, the RF stimulation signal 408 may have a pulse frequency between 1 Hz and 10 KHz, a pulse amplitude 426 between 0.3 mA and 20 mA, a pulse width 422 of between 250 μ sec and 5 μ sec, and a pulse-train duration 428 between 20-30 minutes. The pulse amplitude 426 of the RF stimulation signal is selected to generate an alternating current field at or near a target area sufficient to modulate neural signals, i.e., alter or interrupt transmission of action potentials by one or more nerves, to provide pain relief, without generating too much heat to cause cell necrosis.

[0078] A second modality, referred to herein as “RF ablation,” is configured to induce necrosis in cells at a target area through delivery of RF signals. This provides for a more sustained, albeit not necessarily permanent, interruption of transmission of action potentials by nerves in the target area. Like the RF stimulation modality, the RF ablation modality

is provided through delivery of RF signals in a pulse train form. Alternatively, RF ablation may be provided through delivery of RF signals in a continuous form. The parameters of this pulse train form are selected to deliver enough energy to the target area to induce necrosis in cells of the nerve tissue. This necrosis-inducing level of energy may be provided, for example, through selection of parameters, e.g., pulse amplitude and pulse rate, that effect the amount of current delivered to the target area.

[0079] FIG. 5 includes schematic diagrams of idealized signals involved in the generation and delivery of RF therapy in the form of ablation, e.g., the RF ablation modality. With reference to FIGS. 1B, 3A and 5, the external RF generator/controller 104 generates and outputs RF energy in the form of a continuous RF signal 502. The frequency of the continuous RF signal 502 is in a RF energy transmission band, which may be between 40-60 KHz. The power level 510 (as represented by the amplitude) of the continuous RF signal 502 may be in the range of 0.1 Watt to 10 Watts.

[0080] The continuous RF signal 502 is transmitted to an implanted RF module 114 through transcutaneous inductive coupling. The RF signal 504 received by the RF module 114 generally maintains the same signal characteristics in terms of RF signal frequency. Although not illustrated as being attenuated, the amplitude of the received RF signal 504 may be less than the amplitude 510 transmitted continuous RF signal 502. For example, the amplitude of the received RF signal 504 may be attenuated by between 5% and 95%. Circuitry within the RF module 114 uses the received RF signal 504 to charge the energy storage component 224.

[0081] As described above, the RF therapy controller 210 draws current from the energy storage component 224 to charge a storage capacitor C2 to a DC voltage. The current and DC voltage are sufficient to generate at least one pulse of a RF ablation signal. The drawn current or stored DC voltage is represented in FIG. 5 as a signal 506 alternating between on durations 516 having an amplitude 514 representing current drawn or DC voltage across the storage capacitor C2, and off durations 518 during which current is not drawn. In the example circuitry of FIG. 3B, the current is up to 1A and the DC voltage is 14.4V.

[0082] Using the energy present in the storage capacitor C2 during the on durations 516, the RF therapy controller 210 generates an RF therapeutic output signal 302 in the form of a RF ablation signal 508 comprising an RF signal oscillating at a frequency in a therapy band, which may be between 400-600 KHz, and delivers the signal to the patient through one or more electrodes. The RF ablation signal 508 is characterized by a pulse width 522 generally corresponding to the on duration 516 of the signal 506, a duty cycle 524 defined by the on duration 516 and the off duration 518 of the current signal, a pulse amplitude 526, and a pulse-train duration 528. For example, the RF ablation signal 508 may have a duty cycle 524 up to 50%, a pulse amplitude 526 between 45V and 100V, a pulse width 522 of 0.050 μ sec on and 0.050 μ sec off, a pulse frequency of up to 10 Hz, and a pulse-train duration 528 of 180 seconds. The pulse amplitude 526 of the RF ablation signal is selected to generate a voltage field at or near a target area through the delivery of alternating current that generates heat resulting in elevated temperature that cause nerve cell necrosis.

[0083] A third modality, referred to herein as "RF heat," is configured to increase the temperature at a target area of neural tissue to provide analgesic heat to alleviate pain. This

modality is provided through delivery of a continuous RF signal. The parameters of this signal are selected to deliver enough energy to the target area to heat the nerve tissue. This heat-inducing level of energy may be provided, for example, through selection of an amplitude or energy level that effects the amount of current delivered to the target area.

[0084] FIG. 6 includes schematic diagrams of idealized signals involved in the generation and delivery of RF therapy in the form of heat, e.g., the RF heat modality. With reference to FIGS. 1B, 3A and 6, the external RF generator/controller 104 generates and outputs RF energy in the form of a continuous RF signal 602. The frequency of the continuous RF signal 602 is in a RF energy transmission band, which may be between 40-60 KHz. The power level 610 (as represented by the amplitude) of the continuous RF signal 602 may be in the range of 0.1 Watt to 10 Watts.

[0085] The continuous RF signal 602 is transmitted to an implanted RF module 114 through transcutaneous inductive coupling. The RF signal 604 received by the RF module 114 generally maintains the same signal characteristics in terms of RF signal frequency. Although not illustrated as being attenuated, the amplitude of the received RF signal 604 may be less than the amplitude 610 of the transmitted RF signal 602. For example, the amplitude of the received RF signal 604 may be attenuated by between 6% and 96%. Circuitry within the RF module 114 uses the received RF signal 604 to charge the energy storage component 224.

[0086] As described above, the RF therapy controller 210 draws current from the energy storage component 224 to charge a storage capacitor C2 to a DC voltage. The current and DC voltage are sufficient to generate a continuous RF heat signal. The drawn current or stored DC voltage is represented in FIG. 6 as a signal 606 having a continuous on duration 616 and an amplitude 614 representing current drawn or DC voltage across the storage capacitor C2. In the example circuitry of FIG. 3B, the current is up to 50 mA and the DC voltage is 7.2V.

[0087] Using the energy present in the storage capacitor C2 during the on duration 616, the

[0088] RF therapy controller 210 generates an RF therapeutic output signal 302 in the form of a continuous RF heat signal 608 comprising an RF signal oscillating at a frequency in a therapy band, which may be between 400-600 KHz, and delivers the signal to the patient through one or more electrodes. The RF heat signal 608 is characterized by an amplitude 626 and a duration 628. For example, the RF heat signal 608 may have an amplitude 626 between 1 mA and 50 mA and a duration 628 of 20-30 minutes. The pulse amplitude 626 of the RF heat signal is selected to generate a current field at or near a target area through the delivery of alternating current that generates heat, without causing nerve cell necrosis.

[0089] Returning to FIG. 3A, the RF therapy controller 210 includes a temperature module 316 that functions as a safety module that triggers an adjustment in the output of the RF therapy controller 210 based on temperature feedback provided by the temperature sensors on the leads. To this end, if a temperature feedback signal 218 received by the temperature module 316 indicates a temperature that exceeds a maximum acceptable temperature, the temperature module 316 may respond by sending an alert signal to the RF modality controller 308 that causes the RF modality controller to manipulate the control signals 310, 312 in a way that either stops the RF therapeutic output signal 302

from being provided to the electrode interface, or that adjusts one or more parameters, e.g., pulse width, duty cycle, amplitude, etc., of the RF therapeutic output signal to reduce the energy being delivered, which should in turn, reduce the temperature.

[0090] The electrode selection module **320** controls the selection of electrodes by the electrode interface **208** through control signals **212**. The electrode selection module **320** may be set, through programming by the external RF generator/controller **104**, to select one or more of: 1) a pair of electrodes on the same lead to form a bipolar electrode configuration for delivery of a modality of RF therapy through, 2) one electrode on a first lead and another electrode on a second lead to form a combi-polar electrode configuration for delivery of a modality of RF therapy, or 3) an electrode on a lead and the housing to form a unipolar electrode configuration for delivery of a modality of RF therapy. Depending on the RF therapy being delivered, more than two electrodes may be selected. For example, when delivering RF heat therapy or RF ablation in a bipolar electrode configuration, multiple pairs of electrodes may be selected to spread the thermal power deposition over a larger volume of nerve tissue. Similarly, when delivering RF heat therapy or RF ablation in a unipolar electrode configuration, multiple electrodes on one or more lead may be selected.

[0091] The voltage or current feedback module **322** monitors either of voltage or current at the one or more electrode through which RF therapy is being delivered depending on whether the RF module is functioning as a current controlled device or a voltage controlled device. In the case of a current controlled device, the voltage potential between a pair of electrodes delivering the therapy is monitored and varied as needed to deliver the prescribed amount of current to the target area. For example, during RF stimulation the amount of current deposited through the electrodes should be maintained within a low-level range, such as between 0.3 mA and 20 mA, sufficient to modulate neural signals without heating tissue. In the case of a voltage controlled device, the voltage potential between a pair of electrodes delivering the therapy is monitored and the amount of current being delivered is varied as needed to maintain a prescribed voltage field in the target area. For example, during RF ablation the amount of current deposited through the electrodes will be varied as needed to maintain a voltage field in the target area, in the range of 45V and 60V, sufficient to heat tissue and cause nerve cell necrosis.

[0092] With reference to FIG. 7A and 7B, the external RF generator/controller **104** includes a RF signal generator **702** that generates an RF signal **710** by drawing current from an energy source **706**. The RF signal **710** is generated by the RF signal generator **702** in accordance with parameters specified through a user interface **704**. The user interface **704** allows for a user to specify RF signal parameters, including RF signal frequency and amplitude. Additional parameters, which may be specified include pulse width, pulse frequency, duty cycle, and pulse-train duration. Alternatively, the user interface may allow a user to select a modality of RF therapy to be delivered, in which case the RF signal generator **702** will automatically determine the RF signal **710** parameters.

[0093] With reference to FIG. 7B, the RF signal generator **702** includes electronic circuitry, e.g., amplifiers, oscillator, resonators, that generate the RF signal **710**. The energy source **706** includes one or more batteries, which may be

recharged through an external AC power supply (not shown). A pulse generator **V2** provides a pulse output that controls the on/off state of a switch **M1**. When the output of **V2** is high, a pulse of current is drawn through the inductor **L1** from the DC batteries **V1**, **V6**, **V7**. When the output of **V2** goes low, the switch **M1** switches off and the energy stored in the inductor **L1** resonates with the capacitor **C1** resulting in a sine wave current that goes back and forth between the inductor **L1** and capacitor **C1**. The frequency of the sine wave is determined by the values of inductor **L1** and capacitor **C1**, which may be chosen to provide a sine wave having a frequency in the RF energy band, e.g., 40-60 KHz. The amplitude of the sine wave current is determined by the variable pulse width and duty cycle of the pulse generator **V2** output. The output of the RF signal generator **702** is provided to the RF energy interface **105**. The RF energy interface **105** functions as an energy transmitter that applies the RF signal to an inductive coil **107** to emit or transmit RF energy.

[0094] FIG. 8 is a schematic diagram of an RF energy link between the RF module **114** of FIG. 2 and the external RF generator/controller **104** of FIGS. 7A and 7B that allows for wireless, transcutaneous transmission of RF energy between the external RF generator/controller and the RF module. The RF energy link is provided by the external RF energy interface **105** that may be in the form of a wand connected to the external RF generator/controller **104**, and an implanted RF energy interface **115** that is connected to the RF module **114**. Each of the interfaces includes an inductive coil **107**, **117**. During energy exchange, the inductive coil **107** of the external RF energy interface **105** is orientated to be plane-parallel to the inductive coil **117** of the implantable RF energy interface **115** and center-to-center aligned, with separation as small as possible for optimum efficiency of power transfer. The inductive coil **107** of the external RF energy interface **105** may be referred to as a primary coil, external coil, or transmit coil, while the inductive coil **117** of the implanted RF energy interface **115** may be referred to as a secondary coil, interior coil, or receive coil. The external RF energy interface **105** receives the RF signal generated by the RF signal generator **702** and includes circuitry that couples to the terminals of the external transmit coil **107**. The implanted receive coil **117** of the implantable RF energy interface **115** couples to the charging circuitry **214** of the RF module **114**.

[0095] As previously described, the charging circuitry **214** includes a rectification circuit (formed by diodes **D1**, **D2**, **D3**, **D4**) that causes current or voltage alternations to become monopolar with respect to a reference voltage node **802** that connects with the parallel-tuned resonator circuit formed in part by the inductive coil **117**. The charging circuitry **214** may also include an overcharging controller (formed by **M1** and **R1**), that is either automatically or externally controlled to prevent disruption or damage to the energy storage component **224**.

[0096] Energizing the transmit coil **107** in the external RF energy interface **105** means drawing an alternating current through that coil. The alternating current creates a magnetic field around the external RF energy interface **105**, which induces an alternating voltage across the terminals of the receive coil **117** of the implanted RF energy interface **115**. When the receive coil **117** terminals connect with an electrical load included in the charging circuitry **214**, power may be extracted from the receive coil **117**. The power may be

used to power internal electronics or to charge an implanted energy storage component **224**. This process of energy transfer is called: “inductive coupling.”

[0097] The external RF generator/controller **104** may be configured to operate in conjunction with an implanted RF module **114** to provide the energy needed by the RF module to deliver a modality of RF therapy. It may also be configured to provide RF therapy in the form of diathermy independent of the RF module. Thus, the external RF generator/controller **104** is configurable to operate in two modes: 1) a charging mode during which it provides energy to the RF module, and 2) a diathermy mode during which it delivers energy directly to the patient.

[0098] Regarding the charging mode, as described above with reference to FIGS. **4**, **5** and **6**, the external RF generator/controller **104** may transmit RF energy through inductive coupling through the application of a RF signal to an inductor. The energy is captured by the RF module **114** and may be used to deliver either one of RF stimulation, RF ablation, or RF heat to the patient through electrodes coupled to the RF module. The application of the RF signal to the inductor is typically continuous thus resulting in continuous charging of the energy storage component of the RF module, even while RF therapeutic output signals are being generated and delivered by the RF module. Alternatively, the RF signal generated by the external RF generator/controller **104** may be transmitted in pulses over the course of a therapy session.

[0099] Regarding the diathermy mode, the external RF generator/controller **104** may be configured to delivery diathermy directly to the patient— independent of the RF module. In this mode of therapy delivery, the external RF energy interface is placed on the surface of the patient to position the coil of the external RF energy interface at a location remote from the implanted receiving coil. An RF diathermy signal is generated by the RF generator/controller **104** and applied to the external coil. The RF diathermy signal may be transmitted continuously and have a frequency in the energy transmission band, e.g., 40-60 KHz, and with a voltage and current characteristics that result in a power deposition into tissue up to 0.5 Watts/cm³.

[0100] FIG. **9** is a flowchart of a method of delivering RF therapy to a patient, which may be implemented using the system and devices described above. The RF therapy may be selected from among different modalities including RF stimulation, RF ablation and RF heat.

[0101] At block **902**, RF energy is transmitted by an external device, such an external RF generator/controller **104** through the application of a RF signal to an external RF energy interface. The RF signal oscillates at a frequency in an energy transmission band, which may be between 40 KHz and 60 KHz. The RF signal is transmitted continuously. Alternatively, the RF signal may be transmitted in pulses.

[0102] At block **904**, the transmitted RF energy is received at an implanted medical device through transcutaneous inductive coupling. At block **906**, energy derived from the received RF energy is stored in an energy storage component of the implanted medical device. The energy storage component may be a supercapacitor or a DC battery.

[0103] At block **908**, a therapeutic output signal is generated from the energy stored in the energy storage component. The therapeutic output signal is configurable to provide the selected modality of RF therapy. For example, if RF stimulation therapy is the selected modality, the implanted

medical device generates a RF therapeutic output signal **302** in the form of a RF stimulation signal **408** such as shown in FIG. **4**. If RF ablation therapy is the selected modality, the implanted medical device generates a RF therapeutic output signal **302** in the form of a RF ablation signal **508** such as shown in FIG. **5**. If RF heat therapy is the selected modality, the implanted medical device generates a RF therapeutic output signal **302** in the form of a RF heat signal **608** such as shown in FIG. **6**. In all cases the generated signals are characterized by an RF signal oscillating at a frequency in a therapy band, which may be between 400 KHz and 600 KHz.

[0104] At block **910**, the therapy output is delivered to one or more of a plurality of electrodes implanted in the patient. To this end, the RF therapy controller **210** selects one or more electrodes through which to deliver the therapy signal. As mentioned previously, the electrode selection by the RF therapy controller **210** may result in delivery of a modality of RF therapy through a pair of electrodes on the same lead, e.g., a bipolar electrode configuration, through one electrode on a first lead and another electrode on a second lead, e.g., a combi-polar electrode configuration, or through an electrode on a lead and the housing, e.g., a unipolar electrode configuration. In any case, one of the electrodes is coupled to ground, and the RF therapeutic output signal **302** in the form of a RF signal **408**, **508**, **608** is applied to the other electrode to create an alternating current field or voltage field between the electrodes.

[0105] In some implementations, more than one modality of RF therapy may be delivered to a patient, either one after another, or simultaneously. In one application, therapies may be delivered in series, with the most benign therapy being applied first. For example, RF stimulation may be applied before either of RF heat or RF ablation. If RF stimulation does not provide the intended relief, then one of RF heat or RF ablation may be applied next. In the case of delivering different therapies simultaneously, for example, RF stimulation together with RF heat, the RF therapy controller may select one pair of electrodes for delivery of RF stimulation and another set of electrodes for delivery of RF heat. Additional circuitry and components may be needed to provide simultaneous delivery of therapies. For example, parallel circuitry may be included in the RF therapy controller **210** to generate two different types of RF therapeutic outputs **302**. In the case of simultaneous RF stimulation and diathermy, two external RF energy interfaces **115** may be needed, one to output RF energy for diathermy and the other to output RF energy in the energy transmission band for delivery to the RF module.

Implant Integrity and Patient Health Monitoring

[0106] Returning to FIGS. **1A** and **1B**, and with additional reference to FIGS. **1E** and **1F**, as generally described above, the system **100** may include a health information module **140** associated with one or more implant-integrity sensors **142**, **144** and one or more patient health sensors **146** for collecting and analyzing data, and indicating the condition or mechanical integrity of the orthopedic implant device and patient status. In the example embodiment shown in FIGS. **1A**, **1E** and **1F**, an implantable medical device **102** including a health information module **140** is associated with an orthopedic implant **148** in the form of a spinal fixation device implanted in the lumbar region of the spine. The spinal fixation device **148** is in the form of a rod-and-screw

device and includes a pair of pedicle screws **150a**, **150b** and a rod **152** secured to the screws by a pair of hex nuts **160a**, **160b**.

[0107] The implantable medical device **102** includes a health information module **140** having one or more implant-integrity sensors **142**, **144** and one or more patient health sensors **146**. The health information module **140** includes a housing **162** fabricated from a biocompatible material, such as titanium, that encloses components of the health information module. The health information module **140** is secured to the rod **152** by an optional attachment mechanism **164** to prevent device migration after implant. Alternatively, the health information module **140** may be secured in place by suturing the device to the patient's anatomy. The health information module **140** may also be secured in place by anatomy itself, through appropriate positioning of the RF module in surrounding anatomy. In the example shown in FIG. 1A, implant-integrity sensor **142**, **144** are associated with components of the implant device and are coupled to the housing of the health information module **140** by cables. Other implant-integrity sensors may be included within or on the housing **162**. Patient health sensors may be included within or on the housing **162**.

[0108] FIG. 10 is a block diagram of the health information module **140** and various sensors **1014**, **1016**, **1018**, **1020**, **1022** that may function as one or both of an implant-integrity sensor and patient health sensors. The sensors include one or more strain gauges **1014**, piezoelectric sensors **1016**, position sensors **1018**, each located remote from the health information module **140**, and one or more accelerometers **1020** and gyroscopes **1022**, each located within the information module. Sensors remote from the health information module **140** connect to a cable connector **158** or header of the module by cables. The cable connector **158** physically secures the cables to the health information module **140** and physically and electrically couples each sensor to a sensor data processor **1002** within the health information module **140**.

[0109] The sensor data processor **1002** may obtain and process signals from the sensors **1014**, **1016**, **1018**, **1020**, **1022** to determine metrics indicative of the mechanical integrity of the implant device and/or patient health. Alternatively, or in addition to, the external patient interface device **106** may obtain information from the health information module **140** and process the information to determine metrics. Several device-integrity metrics and patient-health metrics are envisioned, and the system **100** may be configured to determine one or more of these metrics.

[0110] A first device-integrity metric, referred to as a "load-bearing" metric, provides an indication of the load distribution among different hardware components of an orthopedic implant device. Most implant devices are configured so that after implant and after sufficient healing, the weight or force of the bone structure (herein referred to as "the load" of the bone structure) being applied to the implant device is distributed among hardware components of the device so that some components bear more of the load than other components. For example, in the spinal fixation device **108b** shown in FIG. 1E, the pedicle screws **150a**, **150b** implanted in bone are intended to carry more load than the rod **152**. A load distribution among hardware components that does not comport with the intended distribution may indicate that healing is not complete or that the implant device is not stable relative to the bone. Continuing with the

spinal fixation device **108b** shown in FIG. 1E, the device may become unstable or loose due to insufficient regrowth or fusion of boney material surrounding the pedicle screws **150a**, **150b**. In this case, some of the load that would otherwise be carried by the pedicle screws would be redistributed to the rod **152**.

[0111] A load-bearing metric may be obtained, for example, through a strain gauge **1014** or piezoelectric sensor **1016** associated with a hardware component of the orthopedic implant device. The output of either of these sensors **1014**, **1016** may serve as a measure of load carried by the component to which it is attached. Monitoring the output overtime allows for detection of changes in load that may correlate to reduced device integrity. For example, an increase in strain gauge **1014** output from a component that is not intended to carry as much load as another component indicates that the other component is loose. Again, continuing with the spinal fixation device **108b** shown in FIG. 1E, an increase in output of a strain gauge **1014** attached to the rod **152** indicates that the pedicle screws **150a**, **150b** are loose.

[0112] A second device-integrity metric, referred to as a "relative-position" metric, provides an indication of the relative positions of different hardware components of an orthopedic implant device. Most implant devices are configured so that after implant and after sufficient healing, the positions of different hardware components of the device relative to each other are fixed. For example, in the spinal fixation device **108b** shown in FIG. 1E, the relative positions of pedicle screws **150a**, **150b** and the rod **152** should be fixed. A relative position finding or metric among hardware components that does not comport with a fixed positioning may indicate that one or both of the hardware components is not stable. Continuing with the spinal fixation device **108b** shown in FIG. 1E, the device may become unstable or loose due to insufficient regrowth or fusion of boney material surrounding the pedicle screws **150a**, **150b**. In this case, the relative position between the pedicle screws **150a**, **150b** and rod **152** would change from a baseline value.

[0113] A relative position metric may be obtained, for example, through position sensors **1018**, such as GPS sensors, that are associated with hardware components of the orthopedic implant device. The output of the position sensors **1018** may serve as a measure of distance between the two components. Monitoring the output overtime allows for detection of changes in distance that may correlate to reduced device integrity. For example, an increase in distance indicates that the hardware components have moved relative to each other. Again, continuing with the spinal fixation device **108b** shown in FIG. 1E, an increase in the distance between the rod **152** and either of the pedicle screws **110a**, **110b** indicates that one of the hardware components has moved and may be loose.

[0114] A third device-integrity metric, referred to as a "stability" metric, provides an indication of the stability of one or more hardware components of an orthopedic implant device. Implant devices are configured so that after implant and after sufficient healing, the different hardware components of the device are fixed in place. For example, in the spinal fixation device **108b** shown in FIG. 1E, the pedicle screws **150a**, **150b** and the rod **152** should be fixed. A stability metric for a hardware component that does not comport with that of stable and fixed position may indicate that one or both of the hardware components is loose.

Continuing with the spinal fixation device **108b** shown in FIG. 1E, the device may become unstable or loose due to insufficient regrowth or fusion of boney material surrounding the pedicle screws **150a**, **150b**.

[0115] A stability metric may be obtained, for example, through an accelerometer **1020** within the health information module **140**. The accelerometer **1020** senses motion and vibration and outputs signals representing such movements. Some movements may be due to patient activity, while other movements may be due to movement of a hardware component. For example, a loose pedicle screw **150a**, **150b** may lead to vibration of the rod **152** which in turn would result in vibration of the health information module **140** secured to the rod. The sensor data processor **1002** within the health information module **140** may process the signals to distinguish between movement due to the patient from movement due to the implant device. This may be done through filtering and spectral analysis of the accelerometer signal, wherein movement resulting from vibration of the rod **152** is at a different spectral frequency component than that caused by patient movement.

[0116] A first patient-health metric, referred to herein as an “activity” metric provides an indication of the movement of the patient. An activity metric may be obtained, for example, through the accelerometer **1020** in the health information module **140**. As just noted, the accelerometer **1020** senses motion and vibration and outputs signals representing such movements. Some movements may be due to patient activity, while other movements may be due to movement of a hardware component. The sensor data processor **1002** within the health information module **140** may process the signals to distinguish between movement due to the patient from movement due to the implant device. This may be done through filtering and spectral analysis of the accelerometer signal, wherein movement resulting from vibration of the rod **152** is at a different spectral frequency component than that caused by patient movement.

[0117] A second patient-health metric, referred to herein as a “motion” metric provides an indication of the range of motion of the patient. For example, this metric may indicate a patient’s ability to bend over, or turn in a certain direction. A motion metric may be obtained, for example, through a gyroscope **1022** in the health information module **140**.

[0118] In addition to the various sensors, the health information module **140** includes a power source **1004**, a memory circuit **1006** and a communication interface **1008**. The power source **1004** supplies the voltages and currents necessary for operation of electronic components of the module, including for example, components of the sensor data processor **1002**, the sensors and the communication interface **1008**. The power source **1004** may be configured to be recharged through an inductive coupling link like the one described above with reference to the RF module **114**. In this case, an RF energy interface (like RF energy interface **115**) may be coupled to the health information module **140** and the health information module may include charging circuitry (like charging circuitry **214**). The memory circuit **1006** may store information corresponding to a history of sensor outputs and metrics determined by the sensor data processor **1002**.

[0119] The communications interface **1008** enables RF telemetry communication between the health information module and the external patient interface device **106** through a wireless communication link. The external patient inter-

face device **106** allows for the downloading of information from the memory circuit **1006**. Information may also be downloaded from the memory circuit **1006** through the inductive coupling link by inductive telemetry when the interface is not being used for charging purposes.

Physical Configurations of Implantable Medical Devices

[0120] Disclosed below, are other embodiments of implantable medical devices having different implant arrangements or different physical configurations than the device of FIG. 1A-1F. In some embodiments, the implantable medical device has a form factor that allows it to be integrated with the overall structure of a spinal fixation device. In another embodiment, components of the implantable medical device are incorporated and integrated into one or more components of the spinal fusion device, e.g. pedicle screw or a rod

[0121] FIG. 11 is an illustration of an alternate arrangement of an implantable medical device **1102** like that in FIG. 1A comprising a RF module **1104** coupled to an orthopedic implant device **1106** in the form of spinal fixation device. In this arrangement, the RF module **1104** is arranged perpendicular to the rods of the spinal fixation device **1106**.

[0122] FIGS. 12A, 12B and 12C are illustrations of an RF module **1202** of FIG. 1B, integrated with an orthopedic device in the form of an interspinous process device **1206**. The RF module **1202** includes a housing **1204** configured to fit within a portion of the interspinous process device **1206**. The housing **1204** is in the form of a tube and has a geometric cross-section, e.g., circular cross-section, sized to fit through a circular opening **1208** or passageway extending through one or more components **1210**, **1212**, of the interspinous process device **1206**. The RF module **1202** may be secured in place through a friction fit between the outer wall of the housing **1204** and the inner wall of the interspinous process device **1206A** first set of leads **1214**, **1216**, **1218** may be coupled to the RF module **1202** through a first header **1220** located at an end of the housing, while a second set of leads (not shown) may be coupled to a second header **1222** at the opposite end of the housing. This configuration of the RF module **1202** provides for the implant of lead in, on or adjacent target nerve tissue, e.g., the DRG, on both sides of the spine.

[0123] With reference to FIG. 12C, during an implant procedure, a left-side component **1210** and a right-side component **1212** of the interspinous process device **1206** are placed on their respective sides of a spinous process **1224**, with respective ratchet portion **1226**, **1228** of the components positioned beneath the process. The components **1210**, **1212** are then assembled together by aligning the ratchet portion **1226**, **1228** and sliding the components together to engage the ratchets. Upon assembly of the components **1210**, **1212**, a tubular passageway through the interspinous process device **1206** is formed. The RF module **1202** is then placed in the passageway such that a header **1220**, **1222** is located at each end of the interspinous process device **1206**. The RF module **1202** may be secured in place within the passageway through a friction fit between the outer wall of the housing **1204** and the inner wall of the interspinous process device **1206**. Once the RF module is secured in place, the connector ends of the leads **1214**, **1216**, **1218** are connected to the header **1220**. In some implant procedures, the distal ends of leads **1214**, **1216**, **1218** may have been

surgically implanted prior to implant of the interspinous process device **1206**. In other implant procedures, the distal ends of leads **1214**, **1216**, **1218** may be surgically implanted after the interspinous process device **1206** is implanted.

[0124] FIG. **13** is an illustration of a spinal fixation device **1302** with an integrated RF module formed of a pair of electrically interconnected RF module parts **1304**, **1306**. Integrated in this context means the RF module parts **1304**, **1306** are included in the spinal fixation device **1302**, and are not separate parts that are attached to the spinal fixation device. In this example embodiment, the spinal fixation device **1302** includes a rod **1308** and a pair of pedicle screws **1310**, **1312**. Each opposed end of the rod **1308** extending beyond the pedicle screws, includes one of the RF module parts **1304**, **1306**. Components of the respective RF module parts **1304**, **1306** may be electrically coupled by one or more conductors extending through the rod **1308**. Configured as such, the RF module parts **1304**, **1306** are not included in the load-bearing portion of the rod that extends between the pedicle screws, only the one or more conductors are. As a result, the RF module parts **1304**, **1306** will not be subjected to load distribution that may impact the integrity of the components, e.g., energy storage component, RF controller, etc., of the RF module parts. Each RF module part **1304**, **1306** includes a header **1314**, **1316** that couples with the connector ends of one or more lead **1318**, **1320**, **1322**, **1324**.

[0125] FIG. **14** is a schematic illustration of a component **1402** of a spinal fixation device with an integrated RF module **1404**. Integrated in this context means the RF module **1404** is included in the component, and is not a separate part that is attached to the spinal fixation device. The component, in this embodiment, is a rod **1402** of a rod-and-screw spinal fixation device, like the device illustrated in FIG. **1C**. The RF module **1404** is housed within the rod **1402**. For example, the rod **1402** may be formed as a hollow tube with components of the RF module **1404** placed therein. A header **1406**, **1408** is located at each end of the rod **1402** and electrically connects to the RF module **1404** through conductors extending through the rod. The headers **1406**, **1408** are located at the ends of the rod **1402** so that after implant of the rod-and-screw spinal fixation device, the headers are positioned on the outer side of the pedicle screws, like described with respect to FIG. **13**. The headers **1406**, **1408** are configured to connect with one or more leads **1410**, **1412**, **1414**, and an RF energy interface **1416**. The RF energy interface **1416** may be configured similar to The RF energy interface **115** shown in FIG. **1A**.

[0126] FIG. **15** is a schematic illustration of a component **1502** of a spinal fixation device with an integrated RF module **1504**. Integrated in this context means the RF module **1504** is included in the component, and is not a separate part that is attached to the spinal fixation device. The component, in this embodiment, is a pedicle screw **1502** of a rod-and-screw spinal fixation device, like the device illustrated in FIG. **1C**. The RF module **1504** is housed within the screw **1502**, with some components of the RF module located in the screw head **1506** and some components located near the top **1508** of the threaded portion of the screw. To this end, the top **1508** of the threaded portion of the screw may be hollowed out with some components of the RF module **1504** placed therein. Likewise, the screw head **1506** may be hollowed out to accommodate other components of the RF module **1504**. Components of the RF module

1504 located in the screw head **1506** electrically connect with components in the threaded portion through electrical conductors extending through the screw **1502**. A header **1510** is located at the top of the screw head **1506** and electrically connects to the RF module **1504** through conductors extending through the head. The header **1510** is configured to connect with one or more leads **1512**, **1514**, **1516** and an RF energy interface **1518**. The RF energy interface **1518** may be configured similar to The RF energy interface **115** shown in FIG. **1A**.

[0127] The various aspects of this disclosure are provided to enable one of ordinary skill in the art to practice the present invention. Various modifications to exemplary embodiments presented throughout this disclosure will be readily apparent to those skilled in the art, and the concepts disclosed herein may be extended to other magnetic storage devices. Thus, the claims are not intended to be limited to the various aspects of this disclosure, but are to be accorded the full scope consistent with the language of the claims. All structural and functional equivalents to the various components of the exemplary embodiments described throughout this disclosure that are known or later come to be known to those of ordinary skill in the art are expressly incorporated herein by reference and are intended to be encompassed by the claims. Moreover, nothing disclosed herein is intended to be dedicated to the public regardless of whether such disclosure is explicitly recited in the claims. No claim element is to be construed under the provisions of 35 U.S.C. § 112, sixth paragraph, unless the element is expressly recited using the phrase “means for” or, in the case of a method claim, the element is recited using the phrase “step for.”

1. A pain management system, comprising:

an external device configured to transmit radio frequency (RF) energy through the application of a RF signal to an external RF energy interface, wherein the RF signal oscillates at a frequency in an energy transmission band; and

an implantable medical device comprising:

one or more electrodes configured to be implanted in, on, or adjacent a target area of nerves,

an implantable RF energy interface configured to receive energy from the external RF energy interface over a wireless energy link,

an energy storage component configured to store the energy, and a RF therapy controller coupled to the energy storage component and the one or more electrodes, the RF therapy controller programmatically configured to:

1) selectively generate each of three different types of a therapeutic output signal from the stored energy, the three different types of the therapeutic output signal comprising an RF stimulation therapy output signal, an RF heat therapy output signal, and an RF ablation therapy output signal, wherein each of the three different types of the therapeutic output signal comprises an RF signal oscillating at a frequency in a therapy band that is greater than the energy transmission band, and

2) deliver the therapeutic output signal to the one or more electrodes;

wherein the RF stimulation therapy output signal comprises pulses of the RF signal configured to generate an alternating current field at or near the target area at a

current level sufficient to modulate neural signals by altering or interrupting transmission of action potentials by one or more nerves while maintaining the target area below a first temperature;

wherein the RF heat therapy output signal comprises pulses of the RF signal or a continuous RF signal configured to generate an alternating current field at or near the target area sufficient to increase the temperature of the target area to a value within a temperature range that is above the first temperature in order to provide analgesic heat to alleviate pain without causing nerve cell necrosis; and

wherein the RF ablation therapy output signal comprises pulses of the RF signal configured to generate a voltage field at or near the target area sufficient to elevate the temperature at the target area to a value within a temperature range that is above the first temperature to induce necrosis in cells at the target area.

2. The system of claim 1, wherein the energy transmission band is in a range of 40-60 KHz and the therapy band is in a range of 100-600 KHz.

3. The system of claim 1, wherein the external device is configured to transmit continuous RF energy through the application of a continuous RF signal to the external RF energy interface.

4. The system of claim 1, wherein the external device is further configured to transmit RF energy through the application of a RF signal that oscillates at a frequency in a diathermy band less than the therapy band.

5. The system of claim 4, wherein the diathermy band is in a range of 40-60 KHz.

6. (canceled)

7. The system of claim 1, wherein the therapy band is in a range of 100-600 KHz, and the RF stimulation therapy output signal comprises a pulse train having a pulse frequency between 1 Hz and 10 KHz, a pulse amplitude between 0.3 mA and 20 mA, a pulse width of between 5 μ sec and 250 μ sec.

8. The system of claim 7, wherein a duration of the RF stimulation therapy output signal is in a range of 20-30 minutes.

9. (canceled)

10. The system of claim 1, wherein the therapy band is in a range of 100-600 KHz, and the RF ablation therapy output signal comprises a pulse train, having a duty cycle up to 50%, a pulse amplitude between 45V and 60V, and a pulse width of 0.050 msec.

11. The system of claim 10, wherein a duration of the RF ablation therapy output signal is in a range of 140-220 seconds.

12. (canceled)

13. The system of claim 1, wherein the therapy band is in a range of 100-600 KHz, and the RF heat therapy output signal comprises a pulse train has a duty cycle between 50 and 95%, a single electrode pulse amplitude between 1 mA and 50 mA, a pulse train duration of between continuous and 50% of time.

14. The system of claim 13, wherein the duration of the RF heat therapy output signal is in a range of 20-30 minutes.

15. The system of claim 1, wherein the RF therapy controller comprises:

- an RF modality controller;
- an RF signal generator; and

an energy supply controller configured to receive a control signal from the RF modality controller and to, based on the control signal, output energy to the RF signal generator at an energy level and in an on/off cycle pattern than defines one or more parameters of a selected one of the three different types of the therapeutic output signal.

16. An implantable medical device configured for chronic implant, the device comprising:

one or more electrodes configured to be implanted in, on, or adjacent a target area of nerves;

an RF energy interface configured to receive energy from an external RF energy interface over a wireless energy link;

an energy storage component coupled to the RF energy interface through charging circuitry and configured to store the energy; and

a RF therapy controller coupled to the energy storage component and the one or more electrodes, the RF therapy controller programmatically configured to:

- 1) selectively generate each of three different types of a therapeutic output signal from the stored energy, the three different types of the therapeutic output signal comprising an RF stimulation therapy output signal, an RF heat therapy output signal, and an RF ablation therapy output signal, wherein each of the three different types of the therapeutic output signal comprises an RF signal oscillating at a frequency in a therapy band, and
- 2) deliver the therapeutic output signal to the one or more electrodes;

wherein the RF stimulation therapy output signal comprises pulses of the RF signal configured to generate an alternating current field at or near the target area at a current level sufficient to modulate neural signals by altering or interrupting transmission of action potentials by one or more nerves while maintaining the target area below a first temperature;

wherein the RF heat therapy output signal comprises pulses of the RF signal or a continuous RF signal configured to generate an alternating current field at or near the target area sufficient to increase the temperature of the target area to a value within a temperature range that is above the first temperature in order to provide analgesic heat to alleviate pain without causing nerve cell necrosis; and wherein the RF ablation therapy output signal comprises pulses of the RF signal configured to generate a voltage field at or near the target area sufficient to elevate the temperature at the target area to a value within a temperature range that is above the first temperature to induce necrosis in cells at the target area .

17. The device of claim 16, wherein the therapy band is in a range of 100-600 KHz.

18. (canceled)

19. The device of claim 16, wherein the RF stimulation output comprises a pulse train having a pulse frequency between 1 Hz and 10 KHz, a pulse amplitude between 0.3 mA and 20 mA, a pulse width of between 5 μ sec and 250 μ sec.

20. The device of claim 16, wherein the RF heat output comprises a pulse train has a duty cycle between 50 and

95%, a single electrode pulse amplitude between 1 mA and 50 mA, a pulse train duration of between continuous and 50% of time.

21. The device of claim 16, wherein the RF ablation output comprises a pulse train, having a duty cycle up to 50%, a pulse amplitude between 45V and 60V, and a pulse width of 0.050 msec.

22. (canceled)

23. (canceled)

24. A method of delivering radio frequency (RF) therapy to a patient, comprising:

transmitting RF energy through the application of a RF signal to an external RF energy interface, wherein the RF signal oscillates at a frequency in an energy transmission band;

receiving the RF energy at an RF energy interface of an implanted medical device;

storing energy derived from the received RF energy in a direct current (DC) energy storage component of the implanted medical device;

generating, at an RF therapy controller of the implanted medical device, a selected one of three different types of a therapeutic output signal from the stored energy, the three different types of the therapeutic output signal comprising an RF stimulation therapy output signal, an RF heat therapy output signal, and an RF ablation therapy output signal, wherein each of the three different types of the therapeutic output signal comprises an RF signal oscillating at a frequency in a therapy band that is greater than the energy transmission band; and delivering the therapeutic output signal to one or more electrodes implanted in, on, or adjacent a target area of nerves;

wherein the RF therapy controller is programmatically configured to:

selectively generate each of the RF stimulation therapy output signal, the RF heat therapy output signal, and the RF ablation therapy output signal;

wherein the RF stimulation therapy output signal comprises pulses of the RF signal configured to generate an alternating current field at or near the target area at a current level sufficient to modulate neural signals by altering or interrupting transmission of action potentials by one or more nerves while maintaining the target area below a first temperature;

wherein the RF heat therapy output signal comprises pulses of the RF signal or a continuous RF signal configured to generate an alternating current field at or near the target area sufficient to increase the temperature of the target area to a value within a

temperature range that is above the first temperature in order to provide analgesic heat to alleviate pain without causing nerve cell necrosis; and

wherein the RF ablation therapy output signal comprises pulses of the RF signal configured to generate a voltage field at or near the target area sufficient to elevate the temperature at the target area to a value within a temperature range that is above the first temperature to induce necrosis in cells at the target area.

25. The method of claim 24, wherein the RF energy interface and the DC energy storage component are configured to continue to receive RF energy from the external RF energy interface and store the RF energy while the RF therapy controller generates a selected one of the three different types of a therapeutic output signal.

26. The method of claim 24, wherein the energy transmission band is in a range of 40-60 KHz and the therapy band is in a range of 100-600 KHz.

27. The method of claim 24, wherein the energy is transmitted through the application of a continuous RF signal to the external RF energy interface.

28. The method of claim 24, further comprising selecting RF stimulation therapy output for generation and delivery, and subsequent to the delivery of RF stimulation therapy output, selecting RF ablation therapy output for generation and delivery.

29. The method of claim 24, wherein the one or more of the electrodes are located in, on or adjacent a target area of nerves.

30. The method of claim 29, wherein the target area of nerves comprises a dorsal root ganglion (DRG).

31. The pain management system of claim 1, wherein the implantable medical device comprises a housing configured to enclose the RF therapy controller, and to be mechanically coupled to a hardware component of an orthopedic implant device.

32. The pain management system of claim 1, wherein the controller is configured to selectively generate the three different types of a therapeutic output signal in series in the following order: RF stimulation therapy output signal, followed by either of RF heat therapy output signal and RF ablation therapy output signal.

33. The pain management system of claim 1, wherein the controller is configured to simultaneously generate at least two different types of therapeutic output signals, and deliver a first of the different types therapeutic output signals to a first pair of electrodes and a second of the different types therapeutic output signals to a second pair of electrodes.

* * * * *

专利名称(译)	通过递送由可植入医疗设备产生的脉冲射频信号影响神经组织的系统，设备和方法		
公开(公告)号	US20180317771A1	公开(公告)日	2018-11-08
申请号	US15/727554	申请日	2017-10-06
[标]发明人	PURYEAR HARRY COX TIMOTHY J SAMSON SERAFIN Y PEYMAN NAZMI SOURESRAFIL OMID MOLNAR GREGORY F		
发明人	PURYEAR, HARRY COX, TIMOTHY J. SAMSON, SERAFIN Y. PEYMAN, NAZMI SOURESRAFIL, OMID MOLNAR, GREGORY F.		
IPC分类号	A61B5/00 A61N1/40 A61N1/06		
CPC分类号	A61B5/0031 A61N1/0551 A61N1/06 A61N1/40 A61B5/06 A61B5/076 A61B5/4851 A61B5/686 A61B17/7001 A61B17/7061 A61B17/7062 A61B18/12 A61B2017/00022 A61B2017/00075 A61B2017/00084 A61B2017/00734 A61B2018/00339 A61B2018/0044 A61B2018/00577 A61B2090/064 A61F2/44 A61F2/4405 A61N1/36062 A61N1/36071 A61N1/36135 A61N1/36171 A61N1/37223 A61N1/3787 A61N1/403 A61N1/0452 A61N1/08 A61N1/3605 A61N1/36057		
优先权	62/502604 2017-05-06 US 62/531129 2017-07-11 US		
其他公开文献	US10117580		
外部链接	Espacenet USPTO		

摘要(译)

射频 (RF) 能量通过将RF信号施加到外部RF能量接口来传输，其中RF信号以能量传输频带中的频率振荡。在植入的医疗设备处接收所发射的RF能量，并且从接收的RF能量获得的能量存储在设备的直流 (DC) 能量存储组件中。从存储的能量产生治疗输出信号，并由可植入医疗装置通过一个或多个电极传递给患者。治疗输出信号可配置为提供RF刺激治疗和RF消融治疗中的任一种，并且包括在治疗带中以大于能量传输带的频率振荡的RF信号的脉冲。

