




US 20170035323A1

(19) **United States**(12) **Patent Application Publication**
Elberse et al.(10) **Pub. No.: US 2017/0035323 A1**(43) **Pub. Date: Feb. 9, 2017**(54) **SYSTEMS AND METHODS FOR CATHETER
TIP PLACEMENT USING ECG***A61B 5/044* (2006.01)*A61B 5/04* (2006.01)*A61B 5/0452* (2006.01)*A61B 5/042* (2006.01)(71) Applicant: **AngioDynamics, Inc.**, Latham, NY
(US)(52) **U.S. Cl.**CPC *A61B 5/068* (2013.01); *A61B 5/04525*(2013.01); *A61B 5/0422* (2013.01); *A61B**5/044* (2013.01); *A61B 5/04012* (2013.01);*A61B 5/0006* (2013.01); *A61B 2505/05*(2013.01); *A61B 2562/0209* (2013.01); *A61M**2025/0166* (2013.01)(72) Inventors: **Lambertus Wilhelmus Johannes**
Elberse, Oss (NL); **Franciscus**
Ludovicus Maria Johannes
Veldhuijzen, Liessel (NL)(21) Appl. No.: **15/235,376**(22) Filed: **Aug. 12, 2016**

(57)

ABSTRACT**Related U.S. Application Data**(63) Continuation of application No. 14/211,801, filed on
Mar. 14, 2014, now Pat. No. 9,445,746.(60) Provisional application No. 61/782,913, filed on Mar.
14, 2013.**Publication Classification**(51) **Int. Cl.***A61B 5/06* (2006.01)*A61B 5/00* (2006.01)

A system and method for catheter placement using ECG is provided. In certain embodiments, the system and method can generate a patient specific window for tracking a characteristic of an ECG waveform, such as the amplitude of a P-wave. The patient specific window can be utilized in a system and method for assisting in the placement of a catheter within a patient. In other embodiments, a tip location algorithm can be used with an anti-thrombogenic catheter and an intravascular electrode assembly for maintaining a high resolution intravascular signal in an ECG based catheter tip placement system.

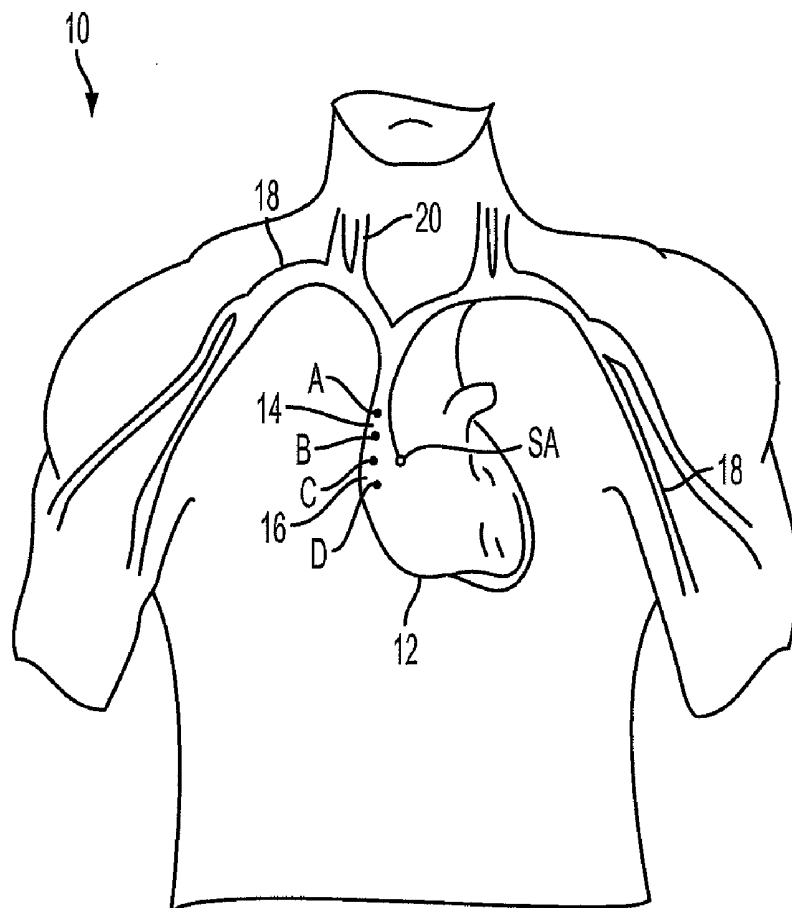

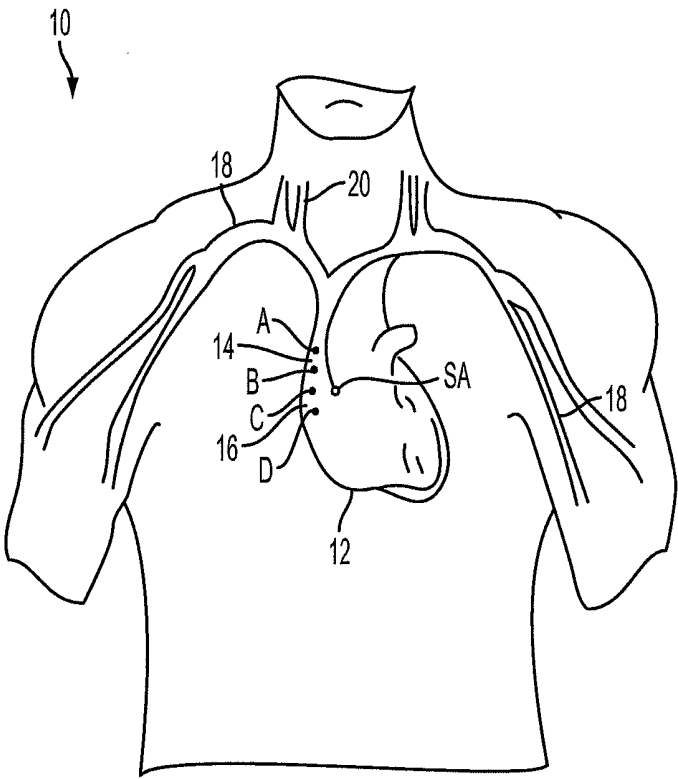


FIG. 1

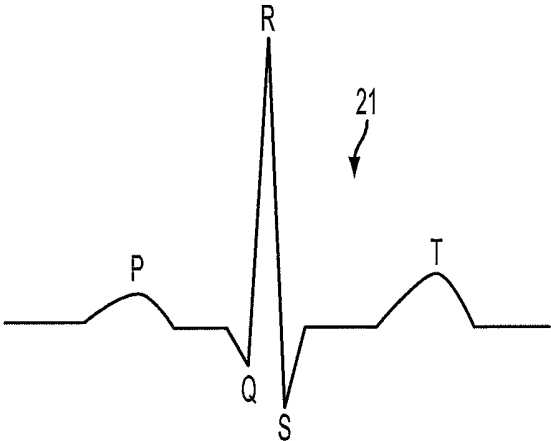


FIG. 2




FIG. 3A




FIG. 3B




FIG. 3C




FIG. 3D




FIG. 3E




FIG. 3F

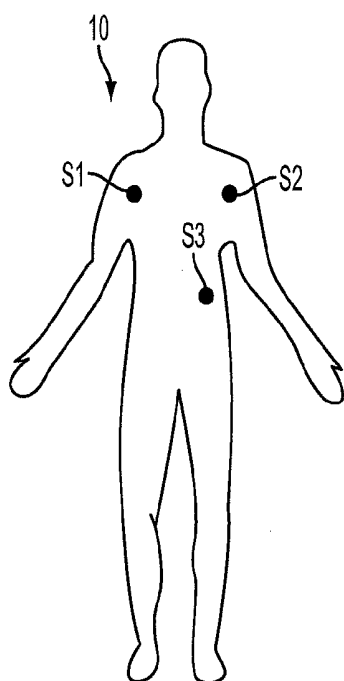


FIG. 4A

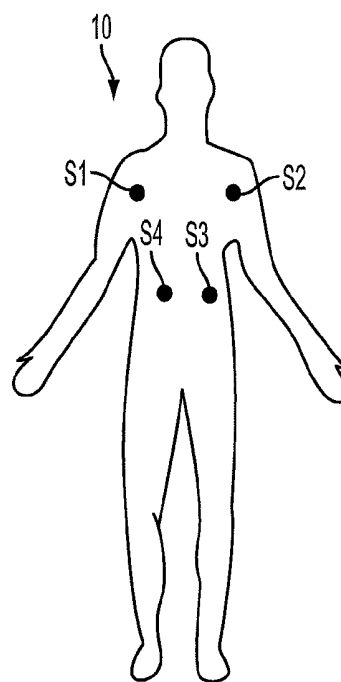


FIG. 4B

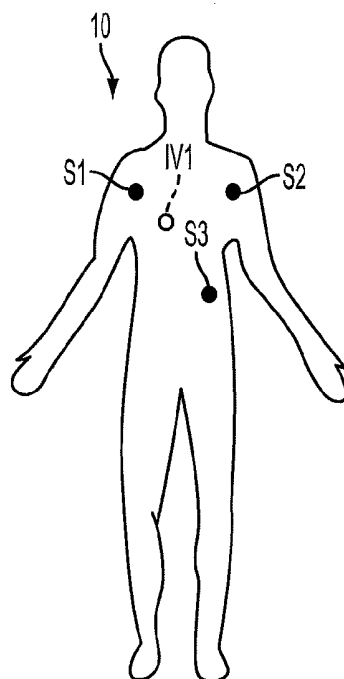


FIG. 4C

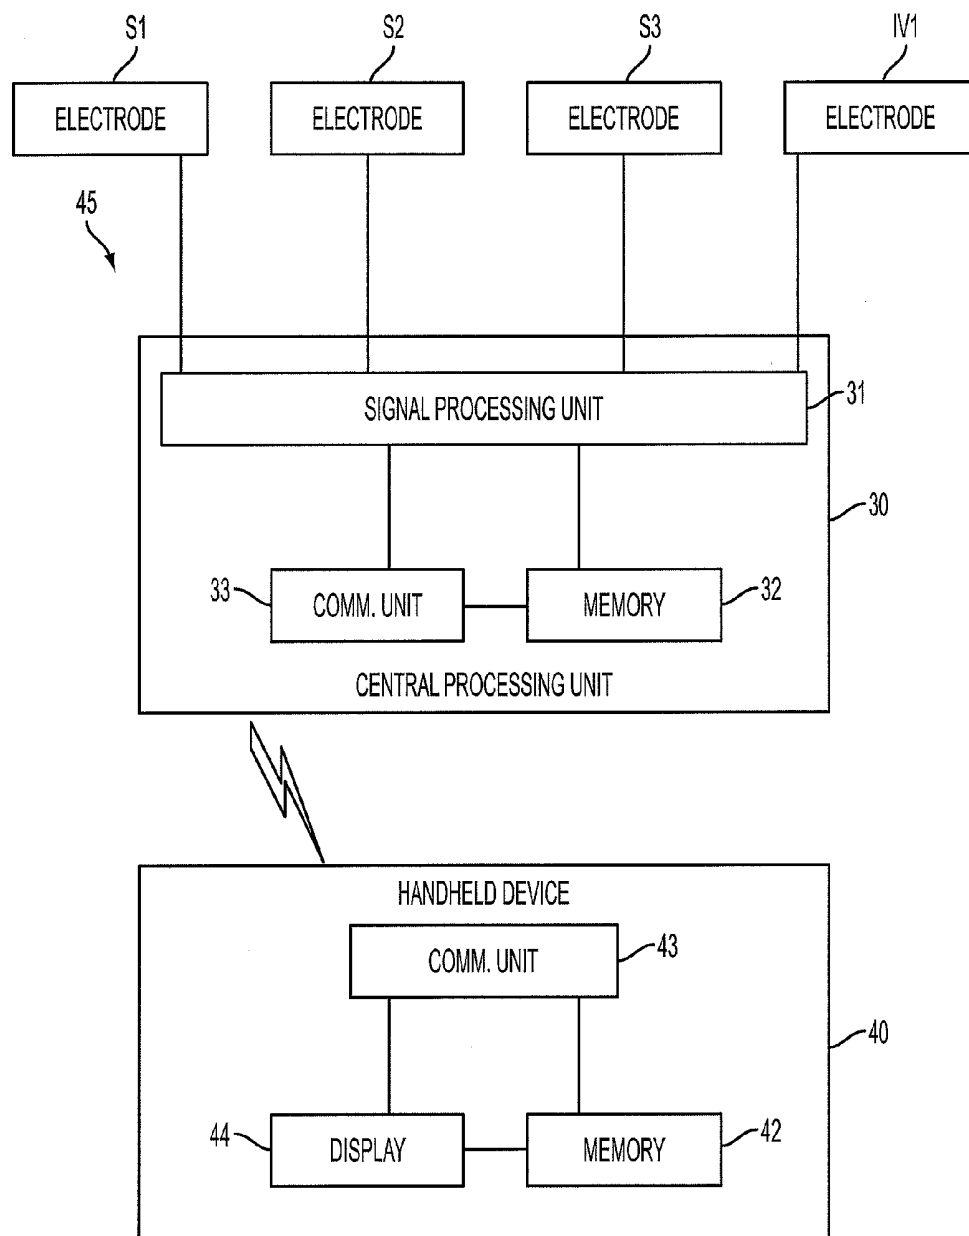


FIG. 5

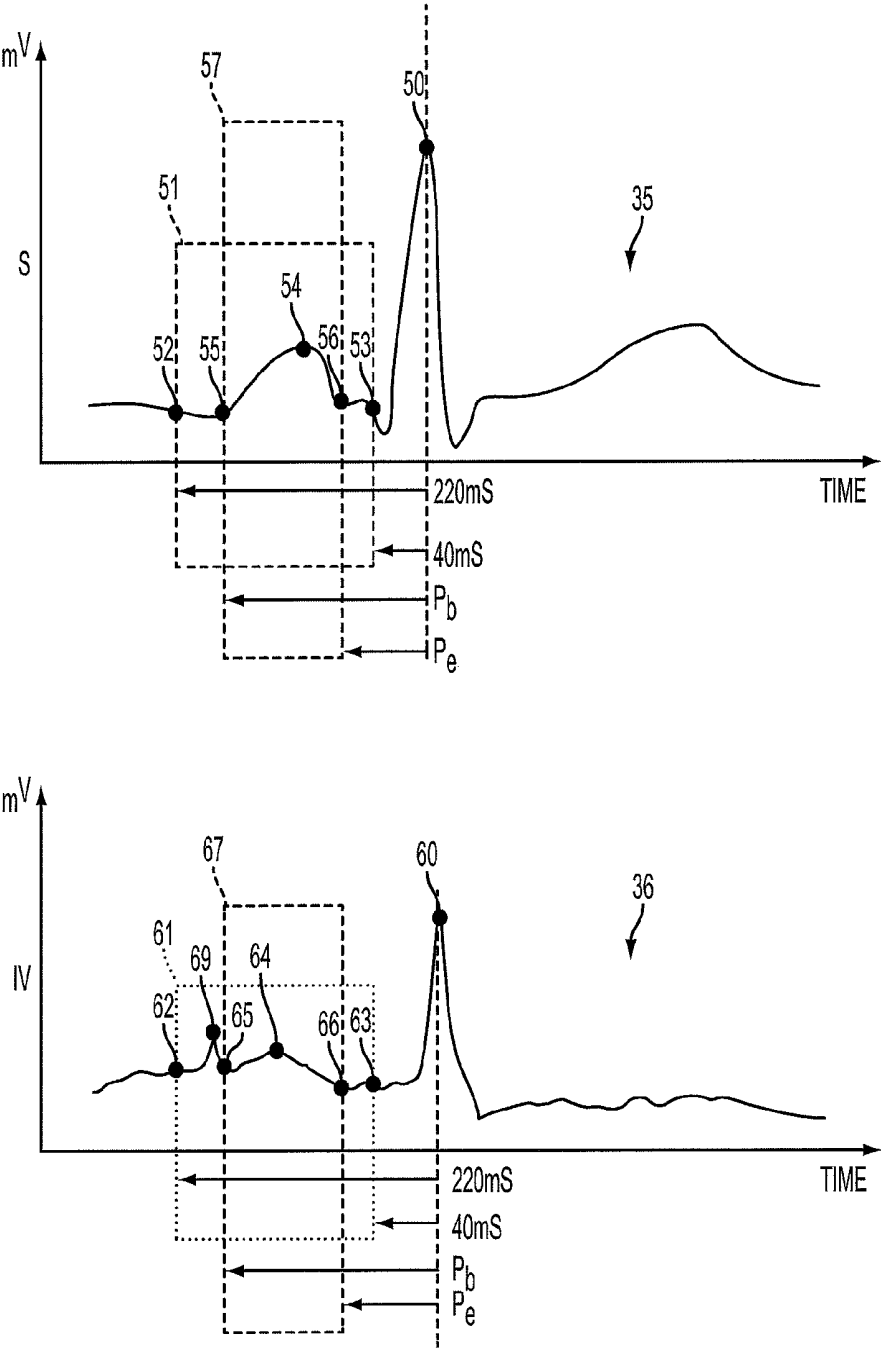


FIG. 6

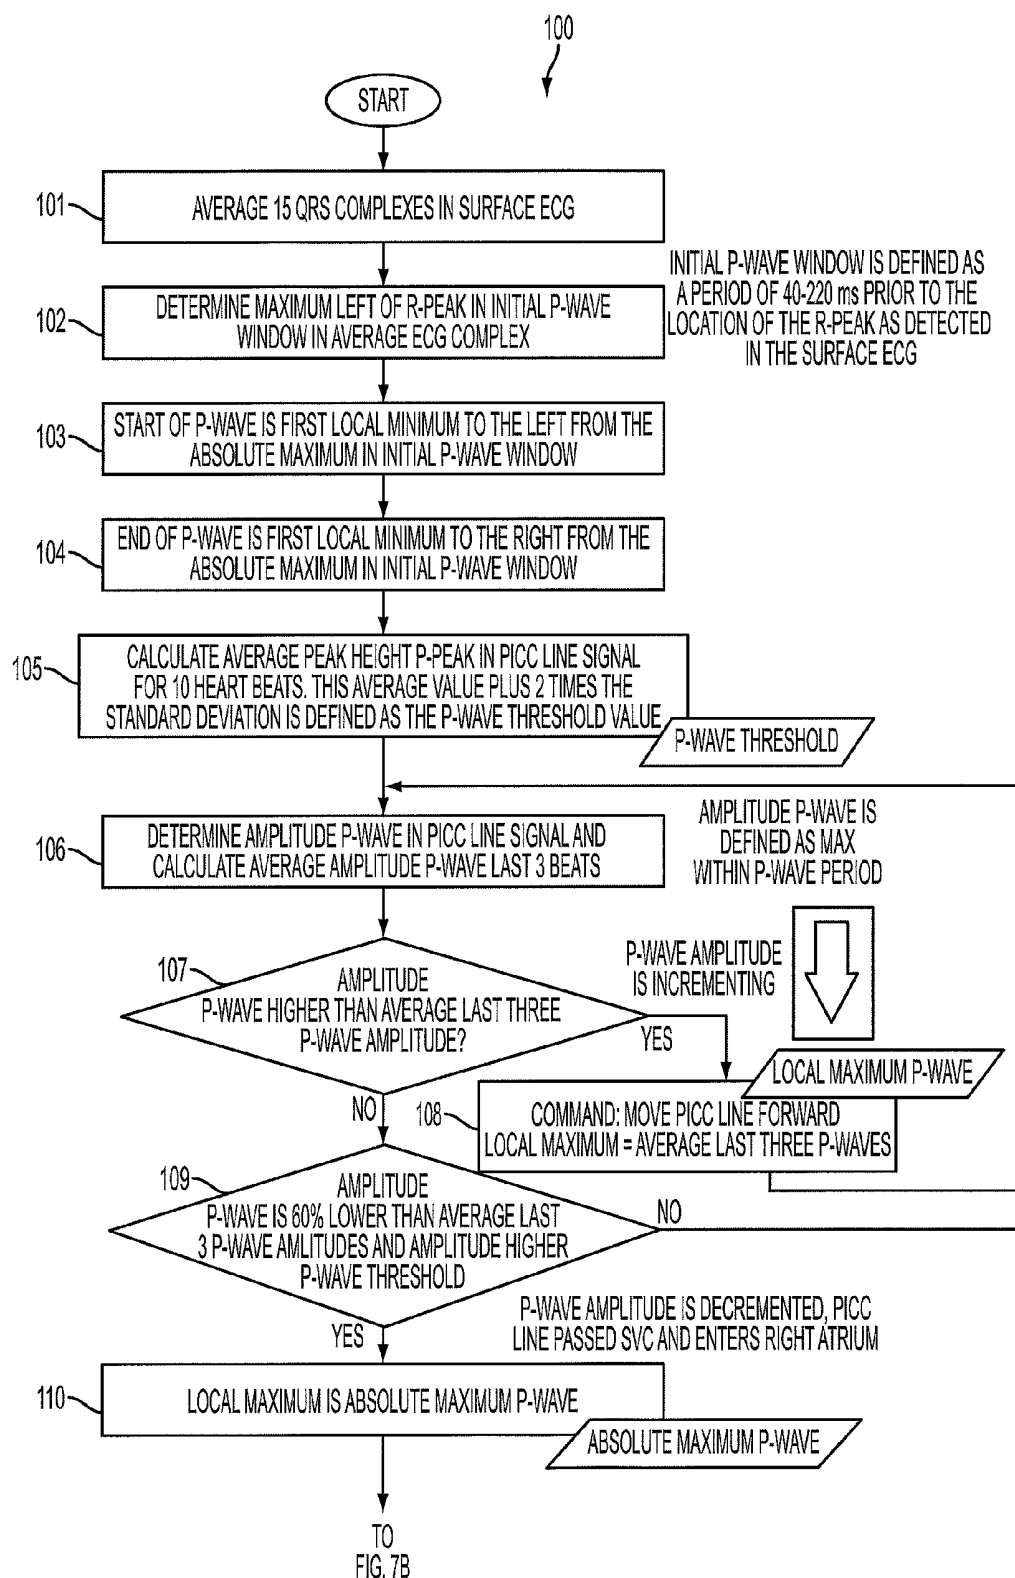


FIG. 7A

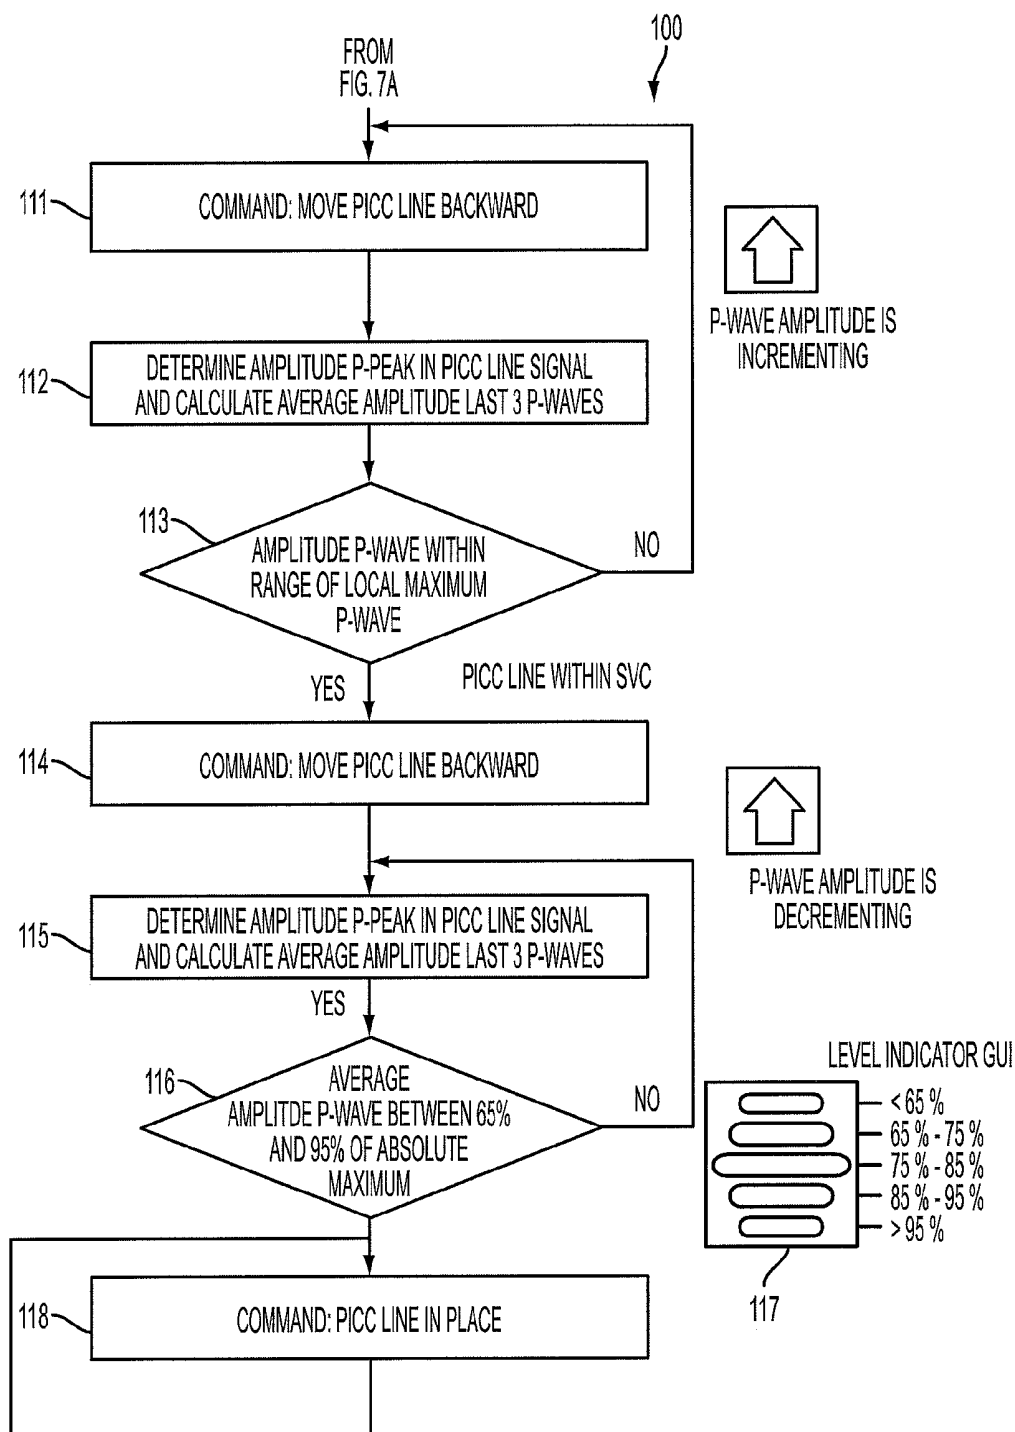


FIG. 7B

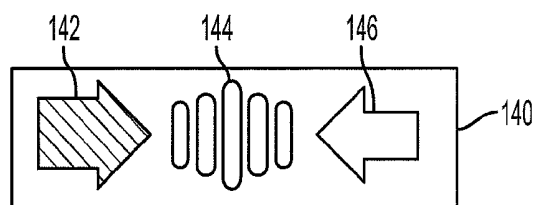


FIG. 8A

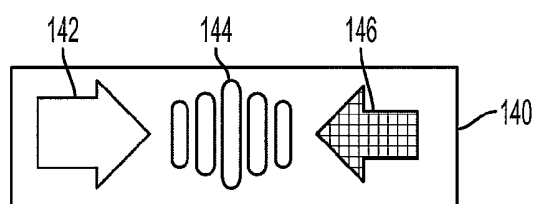


FIG. 8B

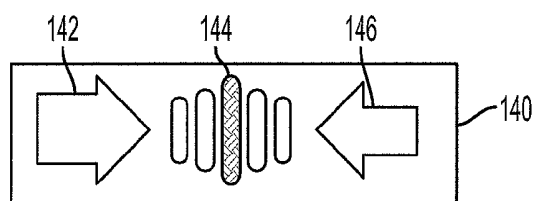


FIG. 8C

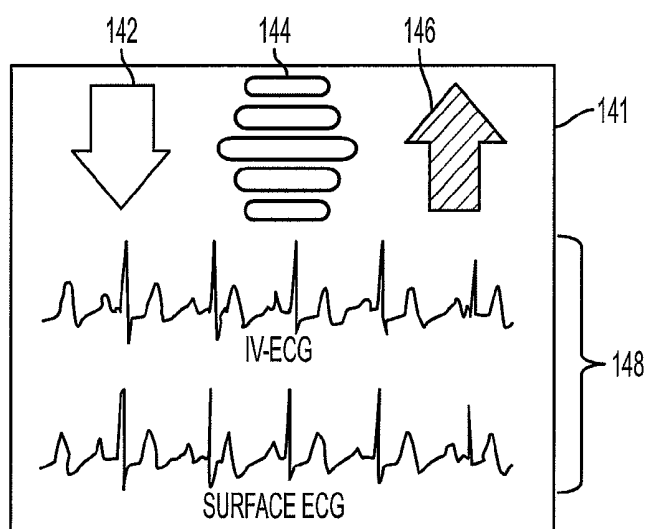


FIG. 8D

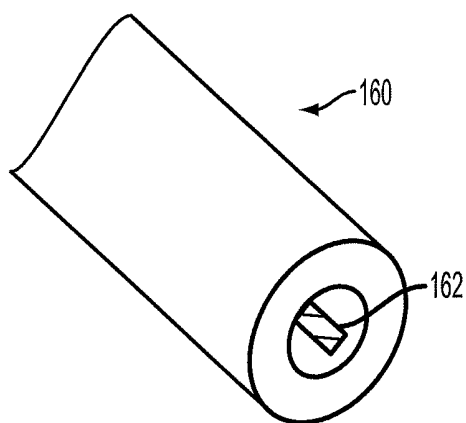


FIG. 9A
PRIOR ART

SYSTEMS AND METHODS FOR CATHETER TIP PLACEMENT USING ECG

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Provisional Application No. 61/782,913, filed on Mar. 14, 2013 and titled Method for Locating a Catheter Using Intracardiac ECG, incorporated herein by reference in their entireties.

FIELD OF THE INVENTION

[0002] The present invention relates generally to positioning a catheter tip within a human body. More specifically, the invention relates to systems and methods that utilize ECG for assisting with catheter tip placement procedures.

BACKGROUND OF THE INVENTION

[0003] Medical professionals commonly use catheters for gaining prolonged access to an area within the body. Once the catheter tip is positioned at the target location, treatments such as antibiotics, chemotherapy, pain medicine, and nutrition can be administered. If the catheter tip is improperly positioned during insertion, various risks to the patient arise, including a fluid infusion that causes pain or injury to the patient, complications due to increased thrombosis rates, delays in therapy, catheter malfunction and additional costs.

[0004] General standards for proper catheter insertion depend on the type of catheter and the treatment being provided. For example, peripherally inserted central catheters (or PICC lines) are commonly inserted into a brachial, cephalic or basilic vein in the arm and advanced through the venous system towards the superior vena cava (SVC). Current medical standards recommend that the distal tip of the catheter terminate in the lower $\frac{1}{3}$ of the SVC, close to the junction of the SVC and the right atrium (RA). However, since PICCs are commonly inserted into a vein in the arm and advanced through the venous system to reach the SVC, the PICC line tip may be inadvertently positioned in a non-target area, such as the internal jugular, the subclavian vein, or too far past the SVC-RA junction and into the heart.

[0005] Catheter tip location techniques have improved the ability of medical professionals to verify the location of the catheter tip. One technique uses fluoroscopy to confirm tip location. Fluoroscopy provides the operator with real-time images of the patient's anatomy using a fluoroscope. Another technique uses a combination of an electromagnetic beacon and an electromagnetic detection element to track the beacon positioned near the catheter tip. Many techniques have also been described for using electrocardiography (ECG) to assist with catheter tip placement by measuring an ECG signal from an intravascular (IV) electrode positioned at or near the catheter tip.

[0006] Tracking ECG waveform changes measured from an IV electrode as the catheter advances through the vasculature towards the SA node can provide valuable feedback to the medical professional placing the catheter, since the SA node is located near the SVC-RA junction. Specifically, tracking the P-wave morphology is known to be a valuable tool. For example, as the IV electrode advances down the SVC towards the SA node, the amplitude of the P-wave will start to rise. The amplitude of the P-wave will eventually peak when the IV electrode is closest to the SA node, and eventually start to decrease in amplitude as the IV electrode

moves away from the SA node and enters the RA. Observation of this phenomenon has been utilized by medical professionals for catheter placement procedures at least as early as the mid-20th century.

[0007] Automated systems that track P-wave morphology for catheter tip placement have also been previously described. For example, in U.S. Pat. No. 5,121,750 to Katims, incorporated herein by reference, a monitoring system detects changes in the P-wave as measured from an IV electrode for providing automated user instructions on catheter placement. The monitoring system (1) detects increases in the P-wave amplitude as the IV electrode approaches the SA node and signals the user to continue advancing the catheter, (2) detects a decrease in the P-wave amplitude as the IV electrode passes the SA node and signals the user to pull back the catheter, and (3) detects that the P-wave is within a certain range of the maximum and signals the user to stop once within that range.

[0008] For tip positioning systems that rely on tracking changes in P-wave amplitude for providing user feedback, several obstacles may arise. For instance, P-wave location and morphology can change from patient to patient based on a number of factors (explained in further detail below). It would be beneficial for an ECG and P-wave based tip location system to have a more patient specific analysis approach to account for patient-to-patient variability. Further, ECG signals from IV electrodes tend to have low resolution due to a number of factors, including electrode downsizing and design limitations, movement, and pickup of physiologic and extraphysiologic artifacts. A noise spike may cause the algorithm to misinterpret the acquired signal, possibly leading to erroneous user feedback. Systems that can accurately provide user feedback, manage lower resolution IV electrode signals, and minimize the influence of ECG artifacts on signal processing would be advantageous.

[0009] Further, problems such as thrombus buildup at the catheter tip and within the catheter lumen can affect IV ECG signal acquisition. Thrombus buildup can partially block electrode exposure which can result in a muted signal. Further, thrombus buildup in contact or near the electrode can cause the IV ECG signal to refract off of the thrombus formations, adding noise to the IV ECG waveform. To clear the catheter lumen and opening of thrombus, and to combat the formation of new thrombus, the catheter lumen can be flushed with saline. However, this can add time and cost to the procedure. Further, prolonged interruptions in catheter advancement may interfere with the normal execution of the tip location algorithm, and may prevent the algorithm from properly executing, or lead to erroneous user feedback.

[0010] Improved catheter tip placement systems and methods for overcoming these issues is desired.

SUMMARY OF THE INVENTION

[0011] The invention is directed to a system and method for catheter tip placement using ECG. In one aspect, the invention is a system and method for establishing an ECG search window for catheter tip placement. In another aspect, the invention is a system and method for assisting in the placement of a catheter within a patient. In yet another aspect, the invention is a system and method for high clarity signal acquisition in tip location systems utilizing an intravascular electrode. In certain aspects, a method for establishing an ECG search window for a catheter tip placement system includes the steps of acquiring multiple surface ECG

signals from at least one surface ECG electrode; generating a signal averaged surface ECG signal from the multiple surface ECG signals; determining a first fiducial point by identifying an extremum within the signal averaged surface ECG signal; establishing a first ECG search window between first and second predetermined values offset from the first fiducial point; determining a second fiducial point by identifying an extremum in the first ECG search window; determining a search window beginning value by identifying a local extremum on a first side of the second fiducial point, and determining a search window ending value by identifying a local extremum on a second side of the second fiducial point; and establishing a second ECG search window between the search window beginning value and the search window ending value so that the second ECG search window is narrower than the first ECG search window.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The foregoing purposes and features, as well as other purposes and features, will become apparent with reference to the description and accompanying figures below, which are included to provide an understanding of the invention and constitute a part of the specification, in which like numerals represent like elements, and in which:

[0013] FIG. 1 is a diagram of an upper portion of a human body illustrating various positions of the vasculature, including the SVC, RA and SA node;

[0014] FIG. 2 is an exemplary ECG waveform showing typical shapes and positions of common ECG waves;

[0015] FIGS. 3A-3F are exemplary P-wave morphologies; FIG. 3A shows a normal P-wave; FIG. 3B shows a P-wave with a higher initial positive deflection; FIG. 3C shows a P-wave with a notch near the peak; FIG. 3D shows a prolonged P-wave; FIG. 3E shows an offset P-wave; FIG. 3F shows a spike artifact followed by a normal P-wave;

[0016] FIGS. 4A-4C are diagrams of a human body illustrating various surface electrode configurations according to exemplary embodiments of the invention; FIG. 4A illustrates a 3 surface electrode configuration; FIG. 4B illustrates a 4 surface electrode configuration; FIG. 4C illustrates a 3 surface electrode configuration with an IV electrode;

[0017] FIG. 5 is a diagram of a catheter tip placement system according to an exemplary embodiment of the invention;

[0018] FIG. 6 is a set of waveforms diagram showing a search window generated according to a surface ECG waveform and overlaid onto an IV ECG waveform according to an exemplary embodiment of the invention;

[0019] FIGS. 7A and 7B show a flow chart for a tip location algorithm according to an exemplary embodiment of the invention;

[0020] FIGS. 8A-8D show a tip location user feedback graphical user interface (GUI) according to an exemplary embodiment of the invention; FIG. 8A is a graphical view of a GUI command to move forward; FIG. 8B is a graphical view of a GUI command to move backward; FIG. 8C is a graphical view of a level indicator GUI command to stop; and FIG. 8D is a graphical view of a GUI including user commands, IV ECG waveforms and surface ECG waveforms;

[0021] FIG. 9A is a perspective view of a conventional catheter coaxially surrounding a stylet.

DETAILED DESCRIPTION OF THE INVENTION

[0022] The present invention can be understood more readily by reference to the following detailed description, the examples included therein, and to the Figures and their following description. The drawings, which are not necessarily to scale, depict selected preferred embodiments and are not intended to limit the scope of the invention. The detailed description illustrates by way of example, not by way of limitation, the principles of the invention. The skilled artisan will readily appreciate that the devices and methods described herein are merely examples and that variations can be made without departing from the spirit and scope of the invention. It is also to be understood that the terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting. Systems and methods described below are compatible with ECG assisted placement for a variety of medical devices, including for example PICCs, central venous catheters, midline catheters, port catheters, and dialysis catheters.

[0023] Referring now in detail to the drawings, in which like reference numerals indicate like parts or elements throughout the several views, in various embodiments, presented herein are systems and methods for catheter tip placement using ECG.

[0024] As described above, catheters such as PICC lines are commonly inserted into a brachial, cephalic or basilic vein in the arm and advanced through the venous system towards the SVC-RA junction with the goal of having the catheter tip terminate in the lower $\frac{1}{3}$ of the SVC. As shown in FIG. 1, a human body 10 has a vasculature system 18 leading to the heart 12. Using P-waves as a guidance measure and the SA node (SA) as a reference point, an IV electrode located near a PICC tip can track changes in the P-wave generated from the SA node (SA) as the PICC tip and IV electrode advance towards the SVC 14 and the RA 16. As described in Katims, an algorithm can be employed to detect increases in P-wave amplitude as the IV electrode advances from positions A to B, and then B to C. When the IV electrode passes the SA node (SA) and moves from position C to D, the algorithm detects a decrease in P-wave amplitude and a user command can be given indicating that the PICC be pulled back until either the maximum P-wave is reached again, or until a percentage of the maximum P-wave is detected. If, for example, the algorithm detects a severe and premature drop in P-wave amplitude during insertion, or if the P-wave never meets an incrementing threshold, that could indicate that the PICC tip accidentally migrated up to the internal jugular 20 instead of down towards the SVC 14.

[0025] For tip location systems that rely on an algorithm to interpret changes in P-waves, the ability of the system to accurately identify the P-wave given patient-to-patient P-wave variability and noise are important to system reliability and accuracy. As shown in FIG. 2, the P-wave is not typically the most prominent wave in an ECG waveform. The QRS complex is typically the most prominent waveform and is therefore considered the simplest to detect, primarily because of the sharp delineation of the R-wave. Other waves, such as the T-wave or the U-wave (not shown) may also present as prominent or diminished depending on various factors.

[0026] Patient variability in P-wave morphology is not uncommon. FIGS. 3A-3F illustrate just a few common

examples of P-wave morphologies. A normal P-wave is illustrated in FIG. 3A. A normal P-wave **22** is formed in part by the combination of right and left atrial depolarization waves in sequence. The P-wave **23** illustrated in FIG. 3B shows a higher initial positive deflection, which could be caused by right atrial enlargement, leading to a more pronounced peak during right atrial depolarization. Right atrial enlargement is common in patients suffering from pulmonary hypertension. Left atrial enlargement could cause a P-wave **24** with a notch near the peak as shown in FIG. 3C, or a prolonged P-wave **25** as shown in FIG. 3D. P mitrale or a notched P-wave may also be due to mitral stenosis. An offset P-wave **26** as shown in FIG. 3E could result in patients having atrial fibrillation or extrasystoles. Numerous other factors including respiratory rate, heart rate, prior surgeries (e.g. a MAZE procedure), or patient conditions (e.g. ventricular tachycardia, Wolff-Parkinson-White syndrome or atrial disease) could impact P-wave morphology and patient variability.

[0027] Even if a patient presents a normal P-wave, an artifact such as the spike artifact shown in the P-wave **27** of FIG. 3F could appear near or on top of the P-wave, leading to a misinterpretation of the P-wave amplitude during signal processing. In general, artifacts can be generated from physiologic or extraphysiologic sources, such as patient movement, electrical noise from other parts of the body, and interference from medical equipment and other sources of electrical disturbance in the local environment. Systems and methods according to the present invention improve P-wave and ECG based tip location systems as described further below.

[0028] According to an embodiment of the invention, multiple surface electrodes and a single IV electrode are utilized for ECG signal acquisition. Alternative embodiments may utilize a single surface electrode or multiple IV electrodes. In this exemplary embodiment and as illustrated in FIG. 4A, three surface electrodes **S1**, **S2**, **S3** are placed on a surface on the skin of the patient **10** to acquire a surface ECG waveform. This configuration, utilizes an right arm (RA—white) lead **S1**, a left arm (LA—black) lead **S2**, and a left leg (LL—red) lead to form what is commonly referred to as Einthoven's Triangle. In an alternative embodiment, an additional neutral lead (N) **S4** can be positioned as a right leg lead **S4**, as shown in FIG. 4B. An IV electrode **IV1** will also be utilized by the system for acquiring an IV ECG signal as the IV electrode is advanced through the vasculature.

[0029] As shown in the system diagram of FIG. 5 (and using the example configuration shown in FIG. 4C), all of the electrodes **S1**, **S2**, **S3**, **IV1** are operably connected to a central processing unit **30** of the tip location system **45**. The three surface ECG electrodes **S1**, **S2**, **S3**, and the IV electrode **IV1** connect to a signal processing unit **31**, where the signals are acquired and processed by the tip location algorithm. A memory unit **32** can be used to store data including waveforms, algorithm variables and error messages. The communication unit **33** on the central processing unit **30** can transmit data via a hardwired or wireless connection to a communication unit **43** on a handheld device. The handheld device **40** can be for example a smart phone or a tablet. Alternatively, this device **40** can be a unit mounted on a pole or otherwise stationary in the medical suite. A display **44** such as a touch-screen display can be integral to the handheld device, which communicates with the communication unit **43** and a memory unit **42**. The

display can communicate user feedback to the medical professional performing the procedure, such as catheter advancement instructions, ECG waveforms and error messages. A touch-screen on the display can be used to communicate information between the medical professional and the tip location system **45**. In alternative embodiments, the central processing unit **30** and the handheld device **45** are a single integral unit forming the tip location system **45**.

[0030] A customized and patient specific IV ECG search window can be established under the following method according to an exemplary embodiment of the invention. For signal acquisition, the patient is prepped with an electrode configuration as illustrated in FIG. 4C. Now, with reference to FIG. 6, a surface ECG waveform **35** is acquired from surface ECG electrodes. The surface ECG waveform **35** can represent a single heartbeat cycle as measured directly from one ECG electrode, a waveform that has been averaged among measurements from multiple surface ECG electrodes (e.g. Wilson's central terminal), a signal averaged waveform from one or more surface ECG electrodes averaged over multiple heartbeats, a waveform run through a filter, or a combination of the above to increase the waveform resolution. In a preferred embodiment, the surface ECG waveform **35** is a signal averaged waveform, averaged from multiple surface ECG electrodes and further averaged over 10-20 heartbeats. Once the signal averaged surface ECG waveform **35** has been generated, it is analyzed to find the peak of the R-wave **50** as an initial fiducial point. A number of R-wave or QRS detection algorithms known in the art can be incorporated for this purpose, including Pan Tomkins, Hilbert transformation, wavelet coefficient estimation, linear filtering and model based approaches. Alternative fiducial points such as the onset or offset of the R-wave, the Q-wave or the S-wave can also be used.

[0031] After the peak of the R-wave **50** is identified, an initial P-wave search window **51** is established based on a generalized area of where the P-wave can be expected to appear in all patients, accounting for P-wave variability between patients. In this embodiment, two predetermined points, 220 ms (**52**) prior to the R-wave peak **50** and 40 ms (**53**) prior to the R-wave peak **50** form the beginning and ending of the initial P-wave search window **51**. Other predetermined points, which may range for example between 20-60 ms and 200-240 ms can be used. With the initial P-wave search window **51** now established, the peak of the P-wave **54** is identified as the absolute peak within the initial P-wave search window **51**. Isolated noise, interference, and aberrant spikes will be filtered out of the surface ECG waveform **35** during the signal averaging step, minimizing the possibility that they will falsely present as the absolute peak within the initial P-wave search window **51**.

[0032] Using the peak of the P-wave **54** as a second fiducial point, the first local minima to the left **55** and right **56** sides of the peak of the P-wave **54** are identified to form the bounds of a patient specific surface ECG P-wave window **57**. A first variable **Pb** represents the beginning of the surface ECG P-wave window **57** based on the distance between the minimum to the left side **55** of the peak of the P-wave **54** and the R-wave **50**. A second variable **Pe** represents the end of the surface ECG P-wave window **57** based on the distance between the minimum to the right side **56** of the peak of the P-wave **54** and the R-wave **50**. In alternative embodiments, it could be advantageous to expand one or more edges of the patient-specific P-wave

window to a subsequent second or third local minimum. For example, the system might initially identify a notch in the P-wave (see for example FIG. 3C) as the first local minimum (to the left or right of the P-wave peak). In this case, sensing that the first left or right local minimum is in too close in proximity (in amplitude or time) to the P-wave peak, the system may recognize a false edge of the P-wave and expand the window to a subsequent local minimum, generating a more relevant P-wave window for that particular patient. In yet another alternative embodiment, edges of the patient specific P-wave window can be established based on a predetermined distance surrounding the P-wave peak. Further, patient specific P-wave window edges can be further expanded or narrowed to deal with a number of factors, including P-wave morphology or noise in signal. Other windows described herein can be further modified in a similar fashion.

[0033] Once the patient specific surface ECG P-wave window **57** is established using the surface ECG waveform **35**, it can be overlaid onto the IV ECG waveform **36** to form a patient specific IV P-wave search window **67**. To generate the IV P-wave search window **67**, the R-wave **60** in the IV ECG waveform **36** is first identified using a QRS complex or R-wave detection technique. Then, Pb and Pe, determined from analysis of the surface ECG, are offset to the left of the R-wave **60**, establishing the beginning **65** and ending **66** of the IV P-wave search window **67**. This technique allows the system to establish a patient specific IV P-wave search window using the higher resolution surface ECG waveform, then transfer the surface ECG P-wave search window to the lower resolution IV ECG signal for more accurate signal processing during the catheter placement procedure. If, in this example, a generic non patient specific search window **61** was applied to the IV ECG waveform **36** with non patient specific beginning **62** and ending **63** points, an artifact spike **69** would have presented as the local maximum, throwing off the tip location algorithm which relies on tracking the P-wave amplitude **64**. Using this method, the only wave in the lower resolution IV ECG waveform **36** that needs to be specifically identified is the R-wave **60**, which is sharply delineated even in lower resolution ECG waveforms. This improved tip location ECG signal processing technique allows for consistent identification of the P-wave in the lower resolution IV ECG waveform, and provides a technique that is efficient enough to run in real time for live user feedback during the catheter placement procedure.

[0034] It is important to note that the ECG waveform may appear as inverted depending on a number of factors affecting waveform polarity, including for example ECG lead configuration, whether or not the signal acquisition equipment is set to invert acquired signals, and physical abnormalities changing normal electrophysiological conduction paths. Thus, for example, if the surface ECG waveform **36** shown in FIG. 6 was inverted, the R-wave peak **50** and the P-wave peak **54** would present as minimums instead of maximums. The method described above for customizing a patient specific IV ECG search window can be adjusted to detect waveforms presenting as either local minimums or local maximums since either type of extremum can just as easily be located and tracked. Adjustments for changing the type of extremum being tracked can happen automatically using a simple test algorithm such as a peak detection or baseline analysis algorithm. Alternatively, the system can measure absolute values of extrema so that the displacement

of the deflection, and not the positive or negative value of the deflection becomes the relevant measure.

[0035] An algorithm for placing a PICC line according to an exemplary embodiment of the invention is now explained with reference to the flow chart **100** shown in FIGS. 7A and 7B. First, with reference to FIG. 7A, a surface P-wave window is established in similar fashion to the method described above. ECG signals are acquired from surface ECG electrodes to create a signal averaged surface ECG signal **101**, and the QRS complex is identified. The initial window for finding the P-wave is determined by looking to the left of the R-peak at the period between 40-220 ms prior to the R-wave peak **102**. The peak of the P-wave is identified by finding the absolute maximum of the signal averaged surface ECG in the initial P-wave window. To find a beginning value for a patient specific P-wave window, the algorithm first looks at the surface ECG signal left of the P-wave peak and identifies the first local minimum **103**. Similarly, to find an ending value for the patient specific P-wave window, the first local minimum right of the P-wave peak is identified **104**. The identified left and right local minimums provide the beginning and ending values for a patient specific window that can now be applied to P-wave analysis in the IV ECG signal as explained above with reference to FIG. 6. A "P-wave threshold" value is also calculated and saved in memory for reference later on in the algorithm (explained in further detail below), and is calculated as the average P-wave amplitude over 10 heartbeats plus two times the standard deviation **105**.

[0036] Next, a series of steps for providing user instruction during the PICC placement procedure are executed based on P-waves acquired from the IV ECG electrode located at or near the tip of the PICC. The algorithm begins to track changes in the P-wave amplitude by looking at the amplitude of the waveform within the patient specific IV P-wave window **106**. A decision is made based on how the IV ECG P-wave amplitude changes **107**. If the P-wave amplitude is higher than the average of the most previous three P-wave amplitudes, then that indicates that the P-wave is incrementing, and the user is told to advance the PICC forward **108**. A "local maximum P-wave" value is calculated and saved in memory as the average of the last three P-waves, and the algorithm loops back to determine again whether or not the current P-wave amplitude is higher than the average of the most previous three P-wave amplitudes. The user command to advance will typically be repeated for multiple cycles, as the IV electrode approaches the SA node. Alternatively, if a current P-wave amplitude is lower than the average of the most previous three P-wave amplitudes, a further decision is made as to whether or not the amplitude of the P-wave is 60% lower than the average of the last three P-waves, and whether or not the amplitude of the P-wave is higher than the P-wave threshold **109**. The 60% threshold is for determining if the drop in the P-wave was significant, indicating that the SA node may have been passed. However, a second check against the P-wave threshold value is to ensure that the drop in the P-wave is at the very least above the P-wave threshold amplitude recorded when the IV electrode was positioned much further away from the SA node at the beginning of the procedure. A more dramatic drop in the P-wave amplitude may otherwise indicate an issue, such as a signal acquisition error or a problem with the patient's physiological activity. If both the amplitude of the P-wave is 60% lower than the average of the last three

P-waves and higher than the P-wave threshold, the algorithm determines that the absolute maximum P-wave has been reached. The most recent “local maximum P-wave” value becomes the “absolute maximum P-wave” value, and is saved in memory **110**. At this point, user feedback instructs the user to move the PICC line backwards **111**, and the amplitude of the P-wave is measured and the average amplitude of the three most recent P-waves are calculated **112**.

[0037] The next series of steps determines user feedback for moving the PICC line and IV electrode backwards to the target site. First, the algorithm instructs the user to pull back the PICC line until the averaged P-wave amplitude is within a particular range of the “local maximum P-wave” amplitude **113**. An incrementing P-wave is now being tracked. When the P-wave amplitude is within range, the user is instructed to continue to move the PICC line backwards **114**. The amplitude of the P-wave continues to be measured and the average amplitude of the three most recent P-waves is calculated **115**. A decreasing P-wave amplitude is now tracked, and a decision is made regarding whether or not the average amplitude enters the range of 75%-85% of the “absolute maximum P-wave” **116**. The current range is indicated by the center bar on a level indicator GUI **117**. If the average amplitude is within the 75%-85% range, the user is notified that the PICC tip is at the target location **118**. If not, the algorithm loops back to tracking the decrease in averaged P-wave amplitude. If the user pulls back too far, the algorithm can automatically loop back to an earlier advance state, or a restart feature can return the algorithm back to the beginning. In addition, the system can be modified so that the center bar reflects particular ranges that correspond with the type of procedure being performed or the type of catheter being placed. So for example, if the target location for the catheter tip is further up the SVC, the center bar may be set to a 65-75% range. Alternatively, if the target location for the catheter tip is further down into the RA, the algorithm can be modified so that the user is instructed to stop once the decrementing P-wave amplitude reaches a particular range after hitting the maximum P-wave.

[0038] Now with reference to FIGS. **8A-8D**, examples of GUIs **140**, **141** for user feedback are shown. Graphical instructions such as arrows, words, colors, or other symbols indicating advance PICC **142** or pull back PICC **146** could signal an instruction to the user. Alternatively or concurrently, audio commands can be utilized. The GUI **140**, **141** could be part of a touch screen handheld device, such as a smart phone or a tablet. A GUI showing level indicators **144** can also be included. Waveforms of the surface ECG and IV ECG signals can also run on the screen so that the user can monitor the resolution of the signal and the ECG status of the patient.

[0039] In certain embodiments, a tip location procedure record is generated after each procedure for the patient’s record. The tip location procedure record could record information including: (1) patient background information, including name, date of birth, a patient ID number, a catheter description, a user ID and miscellaneous notes; (2) a graphical display of ECG waveforms time stamped at various decision points, such as verification of an acceptable surface ECG waveforms, advance ECG waveforms, pull back ECG waveforms, and a stop at target ECG waveforms; and (3) a post procedure questionnaire assessing the procedure, the

patient, and any other relevant factors. The record could be saved electronically, printed out, or sent transmitted wirelessly to a local or remote server or database.

[0040] As mentioned above, tip location systems often use a stylet to track changes in the P-wave as the stylet advances towards the SA node. The stylet may be similar to a conventional guidewire, or it could be a specialty stylet with a plurality of electrodes, such as bipolar electrodes disposed at different locations along the stylet. As shown in prior art FIG. **9A**, the distal tip of a catheter **160** can have a stylet **162** positioned at or near the distal opening for acquiring an IV ECG signal. The stylet **162** acts as an electrode and transmits the physiological ECG signal propagated from the SA node from the catheter tip to a proximal connection element such as an alligator clip. The alligator clip is operably connected to the tip location system for signal processing and interpretation of the IV ECG signal.

1. A method for establishing an ECG search window for a catheter tip placement system, the method comprising:

- acquiring a plurality of ECG signals from at least one surface ECG electrode;
- generating a signal averaged ECG signal from the plurality of surface ECG signals;
- determining a first fiducial point by identifying an extremum within the signal averaged surface ECG signal;
- establishing a first ECG search window between first and second predetermined values offset from the first fiducial point;
- determining a second fiducial point by identifying an extremum in the first ECG search window;
- determining a search window beginning value by identifying a local extremum on a first side of the second fiducial point, and determining a search window ending value by identifying a local extremum on a second side of the second fiducial point; and
- establishing a second ECG search window between the search window beginning value and the search window ending value so that the second ECG search window is narrower than the first ECG search window;
- acquiring an intravascular ECG signal from an intravascular electrode near the catheter tip;
- applying the second ECG search window to the intravascular ECG signal to generate an intravascular ECG search window; and
- wherein the extremum in the signal averaged surface ECG signal is an extremum of an R-wave.

2. The method of claim 1, wherein the first predetermined value is 40 ms prior to the first fiducial point, and the second predetermined value is 220 ms prior to the first fiducial point.

3. The method of claim 1, wherein the plurality of ECG signals is measured over up to 15 heartbeats.

4. The method of claim 1, wherein the local extremum on the first side of the second fiducial point is a first occurrence of a local extremum left of the second fiducial point, and wherein the local extremum on the second side of the second fiducial point is a first occurrence of a local extremum right of the second fiducial point.

5. The method of claim 1, wherein the step of acquiring a plurality of ECG signals from at least one surface ECG electrode further comprises acquiring a plurality of ECG signals from a plurality of surface ECG electrodes.

6. The method of claim 5, wherein the plurality of ECG electrodes is three surface ECG electrodes and the ECG signal is a surface signal.

7. The method of claim 6, wherein the local extremum on the first side of the second fiducial point and the local extremum on the second side of the second fiducial point is determined using an algorithm test.

8. A method for establishing an ECG search window for a catheter tip placement system, the method comprising:

acquiring a plurality of ECG signals from at least one surface ECG electrode;

generating a signal averaged ECG signal from the plurality of ECG signals;

determining a first fiducial point by identifying an extremum within the signal averaged ECG signal;

establishing a first ECG search window between first and second predetermined values offset from the first fiducial point;

determining a second fiducial point by identifying an extremum in the first ECG search window;

determining a search window beginning value by identifying a local extremum on a first side of the second fiducial point, and determining a search window ending value by identifying a local extremum on a second side of the second fiducial point; and

establishing a second ECG search window between the search window beginning value and the search window ending value so that the second ECG search window is narrower than the first ECG search window;

acquiring an intravascular ECG signal from an intravascular electrode near the catheter tip;

applying the second ECG search window to the intravascular ECG signal to generate an intravascular ECG search window; and

wherein the extremum in the first ECG search window is an extremum of a P-wave.

9. The method of claim 8, wherein the extremum in the signal averaged ECG signal is an extremum of an R-wave.

10. The method of claim 8, wherein the first predetermined value is 40 ms prior to the first fiducial point, and the second predetermined value is 220 ms prior to the first fiducial point.

11. The method of claim 8, wherein the plurality of ECG signals is measured up to 15 heartbeats.

12. The method of claim 8, wherein the local extremum on the first side of the second fiducial point is a first occurrence of a local extremum left of the second fiducial point, and wherein the local extremum on the second side of the second fiducial point is a first occurrence of a local extremum right of the second fiducial point.

13. The method of claim 8, wherein the step of acquiring a plurality of ECG signals from at least one surface ECG electrode further comprises acquiring a plurality of ECG signals from a plurality of surface ECG electrodes.

14. The method of claim 13, wherein the plurality of surface ECG electrodes is three surface ECG electrodes and the plurality of ECG signals are surface signals.

15. The method of claim 8, wherein the local extremum on the first side of the second fiducial point and the local extremum on the second side of the second fiducial point is determined using an algorithm test.

* * * * *

专利名称(译)	使用ECG进行导管尖端放置的系统和方法		
公开(公告)号	US20170035323A1	公开(公告)日	2017-02-09
申请号	US15/235376	申请日	2016-08-12
申请(专利权)人(译)	ANGIODYNAMICS INC.		
当前申请(专利权)人(译)	ANGIODYNAMICS INC.		
[标]发明人	ELBERSE LAMBERTUS WILHELMUS JOHANNES VELDHUIJZEN FRANCISCUS LUDOVICUS MARIA JOHANNES		
发明人	ELBERSE, LAMBERTUS WILHELMUS JOHANNES VELDHUIJZEN, FRANCISCUS LUDOVICUS MARIA JOHANNES		
IPC分类号	A61B5/06 A61B5/00 A61B5/044 A61B5/04 A61B5/0452 A61B5/042		
CPC分类号	A61B5/068 A61B5/04525 A61B5/0422 A61B5/044 A61M2025/0166 A61B5/0006 A61B2505/05 A61B2562/0209 A61B5/04012 A61B5/0402 A61B5/042 A61B5/0452 A61B5/06 A61B5/061 A61B5/065		
优先权	61/782913 2013-03-14 US		
其他公开文献	US9877665		
外部链接	Espacenet USPTO		

摘要(译)

提供了一种用于使用ECG的导管放置的系统和方法。在某些实施例中，系统和方法可以生成用于跟踪ECG波形的特性（例如P波的振幅）的患者特定窗口。患者特定窗口可以用于帮助将导管放置在患者体内的系统和方法中。在其他实施例中，尖端定位算法可以与抗血栓形成导管和血管内电极组件一起使用，用于在基于ECG的导管尖端放置系统中维持高分辨率血管内信号。

