

(19)



(11)

EP 1 557 125 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
17.09.2014 Bulletin 2014/38

(51) Int Cl.:
A61B 8/08 ^(2006.01) **A61B 8/00** ^(2006.01)
G01S 15/89 ^(2006.01) **G01S 7/52** ^(2006.01)

(21) Application number: **03758988.4**

(86) International application number:
PCT/JP2003/013771

(22) Date of filing: **28.10.2003**

(87) International publication number:
WO 2004/041092 (21.05.2004 Gazette 2004/21)

(54) BIOLOGICAL TISSUE ELASTICITY MEASUREMENT METHOD AND ULTRASONOGRAPHIC DEVICE

BIOLOGISCHES GEWEBEEELASTIZITÄTS-MESSVERFAHREN UND ULTRASCHALLGERÄT
PROCEDE DE MESURE DE L'ELASTICITE DE TISSUS BIOLOGIQUES ET DISPOSITIF
ULTRASONOGRAPHIQUE

(84) Designated Contracting States:
DE FR GB IT NL

(30) Priority: **28.10.2002 JP 2002312023**

(43) Date of publication of application:
27.07.2005 Bulletin 2005/30

(73) Proprietor: **HITACHI MEDICAL CORPORATION**
Tokyo 100-0047 (JP)

(72) Inventors:
• **TAMANO, Satoshi**
Kashiwa-shi, Chiba 277-0054 (JP)
• **OSAKA, Takashi**
Abiko-shi, Chiba 270-1176 (JP)
• **OSHIKI, Mitsuhiro**
Kamagaya-shi, Chiba 273-0134 (JP)

• **MATSUMURA, Takeshi**
Kashiwa-shi, Chiba 277-0825 (JP)
• **SHIINA, Tsuyoshi**
Tsukuba-shi, Ibaraki 305-0032 (JP)

(74) Representative: **Strehl Schübel-Hopf & Partner**
Maximilianstrasse 54
80538 München (DE)

(56) References cited:
EP-A- 0 920 833 **JP-A- 7 303 644**
JP-A- 2000 060 853 **JP-A- 2001 070 303**
JP-A- 2003 111 759 **US-A- 5 233 993**
US-A- 5 462 058 **US-A1- 2002 040 187**
US-B1- 6 248 072

EP 1 557 125 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The present invention relates to a biological tissue elasticity measurement method and ultrasonographic apparatus, and, in particular, to a measurement method and ultrasonographic apparatus for acquiring a high quality elasticity image such as an elasticity ratio and an elasticity distortion of the biological tissue of a patient and a high quality form image of the biological tissue.

Background Art

[0002] An ultrasonographic apparatus irradiates an ultrasonic wave to the patient by using an ultrasonic probe, measures the acoustic characteristic of a biological tissue within the patient by using the reflection echo signal, re-constructs a form image (such as a B-mode image and an M-mode image) of the biological tissue, for example, based on a difference or change in acoustic characteristic of an arbitrary area of the patient and displays the form image on a screen for a diagnosis.

[0003] Recently, it has been proposed that the ultrasonographic apparatus is used to measure elasticity information including either elasticity ratio or elasticity distortion, for example, of a biological tissue of a part to be diagnosed and display it as an elasticity ratio image or elasticity distortion image (each of which will be generally called elasticity image, hereinafter) (in Japanese Unexamined Patent Application Publication No. JP/P2000-60853A, for example). According to this, the form image of the biological tissue of the patient and the elasticity image such as the elasticity ratio and elasticity distortion, for example, are acquired simultaneously or alternately, and the form image and the elasticity image are displayed in line or one over another on one screen.

[0004] However, the ultrasonographic apparatus disclosed in the publication is described in the preamble of claim 1 and does not consider a measurement method for acquiring both high quality form and elasticity images.

Disclosure of Invention

[0005] An ultrasonographic apparatus of the present invention is defined in claim 1

[0006] Both of high quality form and elasticity images can be acquired since, according to the present invention, the unit is provided for performing control so as to selectively acquire the form image and the elasticity image in the measurement period of the elasticity image mode switched by the mode switching unit, that is, in the measurement period of the elasticity diagnosis mode.

[0007] In this case, an ultrasonic transmission signal is applied which has an amplitude, wave number or frequency preferable for each of the form image measurement and the elasticity image measurement as the ultrasonic transmission signal for each of the measurement.

More specifically, there may be provided a first transmission signal generating unit for generating an ultrasonic transmission signal for the form image, and a second transmission signal generating unit for generating an ultrasonic transmission signal for the elasticity image having at least one ultrasonic wave among an ultrasonic wave having a larger amplitude, an ultrasonic wave having a larger wave number and an ultrasonic wave having a lower frequency than those of the ultrasonic transmission signal for the form image. As a result, the image quality of the form image such as a B-mode image and the quality of the elasticity image such as an elasticity ratio and an elasticity distortion can be improved, and images suitable for both of the diagnoses can be provided.

[0008] The control unit may switch between the form image reconstruction unit and the elasticity image reconstruction unit according to the selection of the form image or the elasticity image. Also, the control unit may switch between the first transmission signal generating unit and the second transmission signal generating unit.

[0009] The reception processing unit may have a first reception processing unit for the form image for performing processing with a dynamic filter having a filter characteristic dependent on the depth of the reflection echo signal, and a second reception processing unit for the elasticity image for performing processing with a filter having a constant filter characteristic independent of the depth of the reflection echo signal. In this case, the control unit may switch between the first reception processing unit and the second reception processing unit according to the selection of the form image or the elasticity image.

[0010] The control unit can perform the switching for each frame of each image or for each ultrasonic beam to be irradiated to a patient according to the selection of the form image or the elasticity image. For example, when a focus area of elasticity image measurement is defined, the control unit may switch the control for each ultrasonic beam to be irradiated to the patient and cause the ultrasonic beam to scan. In this case, the elasticity image reconstruction unit may re-construct the elasticity image of the focus area and display it over the form image on a display unit. The display unit can be configured to selectively display one image of a form image and an elasticity image, an image having both of them one over another, and an image having both of them in line.

[0011] A method for measuring an elasticity of a biological tissue of the present invention is defined in claim 11.

Brief Description of the Drawings

[0012]

Fig. 1 is a block construction diagram of an embodiment of an ultrasonographic apparatus of the present invention.

Fig. 2 is a diagram showing a relationship between

the ultrasonographic apparatus of the present invention and a patient.

Figs. 3 to 5 are diagrams showing an operation of a first embodiment of the present invention.

Figs. 6 to 9 are diagrams for explaining an operation of a second embodiment of the present invention.

Best Mode for Carrying Out the Invention

[0013] Embodiments of the present invention will be described below with reference to attached drawings. Fig. 1 is a block construction diagram of one embodiment of an ultrasonographic apparatus of the present invention. In Fig. 1, the thick line indicates a flow of an ultrasonic transmission/reception signal, and the thin line indicates a flow of a control signal. Fig. 2 is a diagram showing a relationship between the ultrasonographic apparatus according to this embodiment and a patient. As shown in Fig. 2, a patient 20 is laid on a bed 21, and measurement is performed thereon by using an ultrasonic probe 1 in contact with the body surface of the patient 20. In order to measure an elasticity image, an organ, for example, of the patient 20 can be pressed by the ultrasonic probe 1. The ultrasonic probe 1 and the ultrasonographic apparatus 10 are connected via a probe cable. A form image 7a and an elasticity image 7b, for example, are displayed simultaneously on an image display device 7 of the ultrasonographic apparatus 10.

[0014] The ultrasonographic apparatus 10 includes a transmission circuit system 2 and reception circuit system 3 connected to the ultrasonic probe 1 and a form image reconstruction section 4 and elasticity image reconstruction section 5, to which a reception signal output from the reception circuit system 3 is transmitted. Data of form and elasticity images re-constructed by the form image reconstruction section 4 and elasticity image reconstruction section 5 are input to a display superimposing section 6. Image data formed by the display superimposing section 6 is input to the image display device 7 and is displayed on the display screen. A measurement control section 9 is configured to control the transmission circuit system 2, reception circuit system 3, form image reconstruction section 4, elasticity image reconstruction section 5 and display superimposing section 6 based on a command input from a switch 8 provided in the ultrasonic probe 1.

[0015] The ultrasonic probe 1 transmits/receives an ultrasonic wave to/from a measurement target part of the patient 20. In other words, the ultrasonic probe 1 has multiple transducers, which are aligned one-dimensionally or two-dimensionally, and has functions of transmitting an ultrasonic wave to the inside of the patient 20 and receiving an ultrasonic reflection echo wave from the inside of the patient 20.

[0016] The transmission circuit system 2 is a transmission unit for transmitting an ultrasonic signal having undergone transmission focus processing for giving a different delay time to each channel in driving the multiple

transducers included in the ultrasonic probe 1 and transmitting ultrasonic waves to multiple channels. In the transmission circuit system 2, an optimum transmission focus processing for each of them according to a form image or an elasticity image can be switched in accordance with timing defined by the measurement control section 9, which will be described later. In particular, the transmission circuit system 2 has a transmission signal generating unit for generating an ultrasonic transmission signal for a form image and a transmission signal generating unit for generating an ultrasonic transmission signal for an elasticity image having at least one ultrasonic wave of ultrasonic waves having a larger amplitude, a higher wave number and a lower frequency than those of an ultrasonic transmission signal for a form image. The transmission signal generating units for form and elasticity images are switched for use based on a command from the measurement control section 9.

[0017] The reception circuit system 3 is a reception processing unit for performing processing for receiving a reflection echo signal output from the ultrasonic probe 1, and performs amplification processing and filtering processing and includes a phasing unit for performing reception focus processing. As well known, the reception focus processing captures reflection echo signals of multiple channels received by the multiple transducers of the ultrasonic probe 1 and gives a different delay time to each of the channels to perform the reception focus processing, that is, phasing processing. Especially, in the reception circuit system 3 according to this embodiment, switching to optimum reception focus processing for each of them according to a form image or an elasticity image can be performed in accordance with timing defined by the measurement control section 9, which will be described later. In particular, the reception circuit system 3 has a reception processing unit for a form image for performing processing by using a dynamic filter having a filter characteristic dependent on the depth of a reflection echo signal and a reception processing unit for an elasticity image for performing processing by using a filter having a constant filter characteristic independent of the depth of a reflection echo signal. The reception processing units for form and elasticity images are switched for use based on a command from the measurement control portion 9.

[0018] The form image re-construction section 4 performs various kinds of computing processing on a reception signal output from the reception circuit system 3 and creates and outputs a form image to the display superimposing section 6. In other words, the form image-reconstruction section 4 re-constructs a form image such as a B-mode image based on a reception signal output from the reception circuit system 3. According to this embodiment, a form image is re-constructed by using an output from the reception circuit system 3 within a form image acquirement period defined by the measurement control section 9, which will be described later.

[0019] The elasticity image re-construction section 5

performs various kinds of computing processing on a reception signal output from the reception circuit system 3 and creates and outputs an elasticity image to the display superimposing section 6. In other words, the elasticity image reconstruction section 5 stores a reception signal output from the reception circuit system 4 in a frame memory, for example, performs correlation processing on two reception signals received after a time interval and obtains an amount of displacement of a biological tissue. An elasticity ratio or elasticity distortion of each part is obtained by performing differentiation on the obtained amount of displacement, and an elasticity image thereof is re-constructed. The obtained elasticity image is displayed on the image display device 7 through the display superimposing section 6. In this embodiment, an elasticity image is re-constructed by using an output from the reception circuit system 3 within an elasticity image acquirement period defined by the measurement control section 9, which will be described later.

[0020] The display superimposing section 6 processes image such that outputs from the form image re-construction section 4 and the elasticity image re-construction section 5 can be displayed one over another or selectively or separately and be output to the image display device 7 to display. In particular, in this embodiment, the methods for displaying on the image display device 7 are switched based on a command from the measurement control section 9. The image display device 7 includes a general CRT monitor, for example.

[0021] The measurement control section 9 is configured to control each of the implementation of elasticity image measurement for acquiring an elasticity image and the implementation of form image measurement for acquiring a form image. In other words, the measurement control section 9 switches between the elasticity image measurement and the form image measurement based on start and end commands for the elasticity diagnosis mode, which are input from the switch 8 associated with the ultrasonic probe 1. The switching is performed by controlling operations of the transmission circuit system 2, reception circuit system 3, form image re-construction section 4, elasticity image reconstruction section 5 and display superimposing section 6. A human interface device such as a switch provided in the ultrasonographic apparatus 10 in Fig. 2, a foot switch, not shown, and a key board may be used instead of the switch 8, or together with the switch 8.

[0022] Here, the first embodiment relating to control of the elasticity diagnosis mode to be performed by the measurement control section 9 will be described with reference to Figs. 3 to 5. When an operator presses and turns on the switch 8 associated with the ultrasonic probe 1 in order to start an elasticity diagnosis, this is input to the measurement control section 9 as an elasticity diagnosis mode start command. When the switch 8 is released and turned off, this is input to the measurement control section 9 as an elasticity diagnosis mode end command. Based on this, the measurement control sec-

tion 9 controls the starting and ending of the elasticity diagnosis mode for performing a compound measurement of the elasticity image measurement and the form image measurement. On the other hand, in the elasticity diagnosis mode, the operator must perform an operation for pressing the ultrasonic probe 1 against the patient when the switch 8 associated with the ultrasonic probe 1 is turned on. Conversely, when the ultrasonic probe 1 is pressed against the patient in advance, the operator must perform an operation of lifting the ultrasonic probe 1 when the switch 8 is turned on. While the case that the operator directly performs the pressing of the ultrasonic probe 1 will be described here, the ultrasonic probe 1 may be mechanically pressed or lifted. In this case, the ultrasonic probe 1 may be pressed against the patient or the ultrasonic probe 1 pressed against the patient in advance may be lifted by using a machine for pressing down the ultrasonic probe 1 though the additionally prepared human interface device such as the switch 8. Furthermore, the starting and ending of the elasticity diagnosis mode may be controlled.

[0023] When the elasticity diagnosis mode start command is input, the measurement control section 9 controls the switching of the components to selectively measure the form image and the elasticity image until the end command is input, that is, in the period of the elasticity diagnosis mode. For example, as shown in Fig. 3, a sector measurement area (region of interest) of the elasticity image 33 is defined in a sector measurement area of the form image 32 here. In the figure, B-start and B-end indicate a scanning start position of the form image measurement and scanning end position of the form image measurement, respectively. The scanning with an ultrasonic beam is performed in the direction indicated by the shown arrow 31. S-start and S-end indicates a scanning start position of the elasticity image measurement and scanning end position of the elasticity image measurement, respectively. In the figure, B corresponds to the form image measurement, and S corresponds to the elasticity image measurement.

[0024] A timing chart for an operation of the measurement control section 9 for acquiring an image as shown in Fig. 3 is shown in Fig. 4. In the figure, changes in operational states of the "switch (8)", "ultrasonic scanning position", "transmission/reception sequence", "ultrasonic transmission wave number(s)" and "reception of ultrasonic waves" are shown in order from the top of the figure. The horizontal axis indicates the number of times of scanning; B corresponds to the form image measurement; S corresponds to the elasticity image measurement; and the subscripts s and e indicate the start and the end, respectively.

[0025] When the operator presses and turns on the switch 8 of the ultrasonic probe 1, the measurement control portion 9 starts measurement control of the elasticity diagnosis mode based on the timing chart in Fig. 4 and a flowchart shown in Fig. 5. In this embodiment, the transmission/reception sequence B of the form image meas-

urement and the transmission/reception sequence S of the elasticity image measurement are switched and implemented by following predefined steps for each image frame, for example, in the period of the elasticity diagnosis mode when the switch 8 is kept on. In other words, each of the scanning from B-start to B-end and the scanning from S-start to S-end is handled as a unit for switching and implementation. In the shown example, after the form image measurement B is performed for one frame, the elasticity image measurement S is implemented for one frame. Then, after the form image measurement B is implemented for two frames, the elasticity image measurement S is implemented for one frame. However, the present invention is not limited to the ratio of the repetition in Fig. 4.

[0026] The measurement control section 9 switches and controls the transmission circuit system 2, the reception circuit system 3, the form image re-construction section 4, the elasticity image re-construction section 5 and the display superimposing section 6 based on the timing chart. First of all, when the elasticity diagnosis mode is started, the position of a predefined focus area for measuring the elasticity image 33 is captured. Then, the starting position (S-start) and ending position (S-end) of the elasticity image measurement are defined for the focus area. Next, the scanning for the form image measurement is started based on the timing chart in Fig. 4. At that time, a command for switching to an ultrasonic transmission signal (one-wave transmission in the example in Fig. 4) suitable for the form image measurement is output to the transmission circuit system 2. Moreover, a command for switching to reception processing with the dynamic filter is output to the reception circuit system 3, and a command for re-constructing the form image based on an input reception signal is output to the form image re-construction section 4. Thus, when the scanning of the form image measurement completes once, the processing is switched to the elasticity image measurement. The switching outputs a command for switching to an ultrasonic transmission signal (two-wave transmission in the example in Fig. 4) suitable for the elasticity image measurement to the transmission circuit system 2. Furthermore, a command for switching to reception processing with the fixed filter is output to the reception circuit system 3, and a command for re-constructing an elasticity image based on an input reception signal is output to the elasticity image re-construction section 5. However, the actual scanning for the elasticity image measurement is performed during the period from the S-start to S-end in Fig. 3. Thus, as shown in Fig. 4, the transmission/reception sequence is selected and implemented in order of B-S-B-B-S-B-B.... The elasticity image reconstruction section 5 obtains an amount of displacement of a biological tissue by performing correlation processing on two reception signals having a time interval, which are obtained by the second and fifth scanning in Fig. 4, obtains an elasticity ratio or elasticity distortion based on the obtained amount of displacement and re-constructs the

elasticity image. In this way, since the scanning of the form image measurement is performed twice during two measurement scans required for the elasticity image measurement, the amount of displacement of a biological tissue increases during the period. Therefore, the precision of measurement of an elasticity ratio or the like can be enhanced.

[0027] On the other hand, the measurement control portion 9 controls the display super imposing circuit 6 to cause the image display device 7 to selectively display the form image and the elasticity image newly created by the form image reconstruction section 4 and the elasticity image reconstruction section 5. A frame memory for storing a re-constructed image is provided in each of the form image reconstruction section 4 and the elasticity image reconstruction section 5. In order to perform the display control over the form image and the elasticity image, the measurement control section 9 does not input a reception signal for the elasticity image, which has undergone phasing processing in the reception circuit system 3, to the form image re-construction section 4 during the period for acquiring the elasticity image data but controls outputs to cause the image display device 7 to display the form image using the form image data, which is previously acquired and stored in the frame memory, during the period. The elasticity image re-construction section 5 is commanded not to capture a reception signal for a form image, which has undergone phasing processing in the reception circuit system 3 during the period for acquiring the form image data, and outputs are controlled to cause the image display device 7 to display the elasticity image using the elasticity image data, which is previously obtained and stored in the frame memory, during the period. Thus, in the form image measurement and elasticity image measurement, optimum transmission and reception processing for each of them is performed. Then, when the switch 8 is turned off, the measurement for the elasticity diagnosis mode ends. Notably, until the switch 8 is turned on again, control can be performed to repeat the form image measurement and display the latest form image on the image display device 7 and to display a previously acquired elasticity image on the image display device 7 as the elasticity image.

[0028] The control operation by the measurement control section 9 for implementing measurement control shown in the timing chart in Fig. 4 will be described by using the flowchart shown in Fig. 5. First of all, in step S51, whether the ultrasonic scanning is to be ended or not is determined. If not (No), the processing moves to step S52. If so (yes), ultrasonic scanning processing ends immediately.

[0029] In step S52, whether the current period is the period for elasticity image measurement, that is, for the elasticity image measurement S or not is determined. If yes, the processing moves to step S58. If no, the processing moves to step S53. B-start is stored in the form image acquirement position register in step S53 in order to start the acquirement of the form image since it is determined

in previous step S52 that the current period is not the period for the elasticity image measurement S. In step S54, whether the value of the form image acquirement position register is B-end, that is, the final form image acquirement position or not is determined. If the determination results in yes, the processing moves to step S57 where the acquirement of the form image data ends. Then, the processing returns to step S51. If the determination results in no, the processing moves to step S55. In step S55, the value of the form image acquirement position register is incremented by 1. In other words, the ultrasonic beam line address is shifted by one in the direction of scanning. In step S56, one-wave transmission, for example, is performed thereon with an ultrasonic transmission signal for the form image measurement. Furthermore, reception signal processing by using a dynamic filter is performed thereon, and the form image measurement is implemented. Then, the processing returns to step S54. In this way, by performing reception signal processing by using a dynamic filter, the reception frequency can be adjusted according to the depth of reception so that ultrasonic transmission/reception suitable for the form image acquirement can be performed. The processing in steps S54 to S56 can scan the form image 32 in the scanning direction 31 from the position B-start, and the form image 32 to the position B-end can be acquired.

[0030] In step S58, S-start is stored in the elasticity image acquiring position register to start elasticity image measurement since it is determined in previous step S52 that the current time is in the period of the elastic image acquiring time (S). In step S59, whether the value of the elasticity image acquiring position register is S-end or not, that is, whether it indicates the last acquiring position of the elasticity image or not is determined. If the determination results in yes, the processing moves to step S5C where the acquirement of the elasticity image data ends. Then, the processing returns to step S51. If no, the processing moves to step S5A. In step S5A, the value of the elasticity image acquiring position register is incremented by 1. That is, the ultrasonic beam line address is shifted by one in the scanning direction. In step S5B, two-wave transmission and reception signal processing using a fixed filter are performed, for example, with an ultrasonic transmission signal for elasticity image measurement so that the elasticity image acquiring processing by elasticity image measurement can be implemented. Then, the processing returns to step S59. By performing the two-wave transmission, ultrasonic transmission suitable for elasticity image measurement is performed. By performing ultrasonic reception by using a fixed filter, ultrasonic transmission/reception suitable for elasticity image acquirement can be performed with a constant reception frequency. The processing in steps S59 to S5B scans the elasticity image 33 in the scanning direction 31 from the position S-start, and the elasticity image 33 to the position S-end can be acquired. In the example in Fig. 3, an affected part 34 is displayed in the elasticity

image 33. Upon completion of the acquirement of the elasticity image 33, the determination in step S51 is performed again, and the processing for acquiring the form image 32 or elasticity image 33 is performed according to the result. When an operator releases (switches off) the switch 8, the processing is shifted to a processing operation in an independent measurement mode for acquiring a form image until the switch 8 is pressed again.

[0031] The form image measurement and elasticity image measurement can be performed under each independent and proper ultrasonic transmission requirement since the transmission circuit system 2 includes, like the above-described embodiment, the transmission signal generating unit for generating an ultrasonic transmission signal for a form image and the transmission signal generating unit for generating an ultrasonic transmission signal for an elasticity image having a larger wave number than that of the ultrasonic transmission signal for a form image. As a result, ultrasonic images optimum for both form image and elasticity image can be re-constructed and displayed, and images suitable for a diagnosis can be provided to an operator. The image quality can be improved by selectively controlling the form image measurement and elasticity image measurement in the period of the elasticity diagnosis mode.

[0032] The quality of a form image can be further enhanced since the reception circuit system 3 includes and switches between a form image reception processing unit for processing with a dynamic filter having a filter characteristic (frequency characteristic) dependent on the depth of a reflection echo signal and an elasticity image reception processing unit for processing with a filter having a constant filter characteristic independent of the depth of a reflection echo signal.

[0033] While the case that the signal strength of a reception signal relating to an elasticity image is increased by using an ultrasonic transmission signal with a higher wave number in acquiring elasticity image data has been described in the above-described first embodiment, ultrasonic transmission with a large amplitude may be used instead. Alternatively, an ultrasonic transmission signal with a low frequency (10 MHz for form image measurement and 7.5 MHz for elasticity image measurement) may be used. Alternatively, a combination of an ultrasonic wave with a large wave number, an ultrasonic wave with a high amplitude and an ultrasonic wave having a low frequency may be used as required. That is, since the amount of displacement of a biological tissue is generally small, an ultrasonic wave with a larger amplitude or a larger wave number or an ultrasonic wave with a lower frequency than that of the ultrasonic wave for acquiring a form image is desirably used in order to increase the precision of the detection of a particularly hard part. Conversely, the measurement for acquiring a form image by an ultrasonic wave with a large amplitude results in an excessively large ultrasonic reception signal, or the measurement by an ultrasonic wave with a large wave number results in a decrease in distance resolution.

[0034] Next, a second embodiment relating to control of an elasticity diagnosis mode to be performed by the measurement control section 9 will be described with reference to Figs. 6 to 9. Fig. 6 is a timing chart of an operation. Figs. 7 to 9 are flowcharts illustrating details of the operation. Fig. 6 shows, like Fig. 4, changes in states of "switch (8)", "ultrasonic scanning position", "transmission/reception sequence", "ultrasonic transmission wave number(s)" and "reception of ultrasonic waves" in order from the top of the figure. The horizontal axis indicates the number of times of scanning, and DF and FF indicate a dynamic filter and a fixed filter, respectively. The meaning of the other symbols is identical to those of Fig. 4. This embodiment is different from Fig. 4 in that the form image measurement and elasticity image measurement are selectively switched not for each image frame but for each ultrasonic beam.

[0035] As shown in Fig. 6, during form image measurement B, an ultrasonic transmission signal with one wave number is output from the transmission circuit system 2, and reception processing is implemented by using a dynamic filter (DF) in the reception circuit system 3. On the other hand, during elasticity image measurement S, an ultrasonic transmission signal with two wave numbers is output from the transmission circuit system 2, and reception processing is implemented by using the fixed filter (FF) in the reception circuit system 3. Thus, for the form image measurement and elasticity image measurement, transmission and reception processing optimum for the image processing thereof can be implemented.

[0036] The measurement control section 9 repeatedly implements elasticity image measurement and form image measurement with different ultrasonic beam scanning positions in the elasticity image measurement S and form image measurement B. The elasticity image reconstruction section 5 obtains an amount of displacement of a biological tissue by performing correlation processing on two reception signals having a time interval, which are obtained by the first and nth scanning in Fig. 6, obtains an elasticity ratio or elasticity distortion based on the obtained amount of displacement and re-constructs an elasticity image. When the measurement in the elasticity diagnosis mode ends based on a command from the switch 8, the measurement control section 9 controls to acquire form image data and to display a previously obtained and displayed elasticity image and the latest form image on the image display device 7.

[0037] Furthermore, the details will be described by following the flowcharts shown in Figs. 7 to 9. When an operator presses and switches on the switch 8 of the ultrasonic probe 1, ultrasonic scanning start processing in Fig. 7 is started. Then, in step S71, whether ultrasonic scanning has ended or not is determined. If not (no), the processing moves to step S72. If so (yes), the ultrasonic scanning processing ends immediately.

[0038] In step S72, whether the value of the current scanning position register is the position equal to or higher than B-start and lower than S-start or not is determined.

If yes, the processing moves to step S73. If no, the processing moves to next step S74. In step S73, a form image acquirement routine in Fig. 8 is implemented. The form image acquirement routine performs one-wave transmission, for example, with an ultrasonic transmission signal suitable for the form image measurement mode, performs reception signal processing by using a dynamic filter, implements form image acquirement processing in the form image measurement mode, increments the value of the scanning position register by 1 only and returns to step S71 in Fig. 7. The form image acquirement routine in step S73 is implemented to acquire form image data until the value of the scanning position register reaches S-start from B-start thereafter.

[0039] In step S74, whether the value of the current scanning position register is the position equal to or higher than S-start and is equal to or lower than S-end or not is determined. If yes, the processing moves to step S75. If no, the processing moves to next step S76. In step S75, an elasticity image/form image acquirement routine in Fig. 9 is implemented. The elasticity image/form image acquirement routine repeatedly implements an operation including acquiring elasticity data, implementing acquirement of form image data after the acquirement, performs elasticity image scanning again after a predetermined interval. That is, compound measurement is implemented on the area of the form image 33 corresponding to a focus area by switching between the form image measurement mode and the elasticity image measurement mode for each ultrasonic beam line address. In the elasticity image/form image acquirement routine, two-wave transmission is performed, for example, with an ultrasonic transmission signal suitable for the elasticity image measurement, and processing of a reception signal uses a fixed filter. One-wave transmission is performed, for example, with an ultrasonic transmission signal suitable for the form image measurement, and processing of a reception signal implements processing using a dynamic filter. Next, the value of the scanning position register is incremented by 1 only, and the processing returns to step S71 in Fig. 7. The elasticity image/form image acquirement routine in step S75 is implemented, and the scanning of a form image and the scanning of an elasticity image are alternately repeated to acquire the image until the value of the scanning position register reaches S-end from S-start thereafter.

[0040] In step S76, whether the value of the current scanning position register is a position higher than S-end and equal to or lower than B-end or not is determined. If yes, the processing moves to step S77. If no, the processing returns to step S71. That is, after the elasticity image scanning to the position S-end ends, the form image data acquirement is repeated up to the position B-end. In step S77, a form image acquirement routine in Fig. 8 is implemented. The form image acquirement routine performs one-wave transmission, for example, with an ultrasonic transmission signal suitable for form image measurement, implements reception processing using a

dynamic filter, increments the value of the scanning position register by 1 only and returns to step S71 in Fig. 7. The form image acquirement routine in step S77 is implemented to acquire the form image 32 until the value of the scanning position register reaches S-start from S-end thereafter.

[0041] Then, the form image data acquirement is performed from B-start to B-end until an operator presses the switch 8 again. When the operator presses the switch 8 again, the processing returns to the beginning, and a series of operations from the form image scanning from the position B-start is repeated.

[0042] As described above, according to the second embodiment, the same advantages as those of the first embodiment can be obtained.

Claims

1. An ultrasonographic apparatus (10), comprising:

an ultrasonic probe (1) for transmitting/receiving an ultrasonic wave to/from a patient (20);
means for generating an ultrasonic transmission signal (2) and transmitting it to the ultrasonic probe (1);
means for performing reception processing (3) on a reflection echo signal received by the ultrasonic probe (1);
means for re-constructing a form image (4) according to the reception signal processed by the reception processing means (3);
means for re-constructing an elasticity image (5) according to the reception signal processed by the reception processing means (3);
means for displaying the form image (7) and the elasticity image;
means for switching between the form image mode and the elasticity image mode (8); and
means for performing control (9) so as to selectively acquire both, the form image (7a) and the elasticity image (7b) in the measurement period of the elasticity image mode;

characterised in that

the reception processing means (3) has first reception processing means for the form image (7a) including a dynamic filter having a filter characteristic dependent on the depth of the reflection echo signal; and second reception processing means for the elasticity image (7b) including a filter having a constant filter characteristic independent of the depth of the reflection echo signal, and

the control means (9) is adapted to switch between the first reception processing means and the second reception processing means according to the selection of the form image (7a) or the elasticity image (7b).

2. The ultrasonographic apparatus (10) according to Claim 1, wherein the control means (9) switches between the form image re-construction means (4) and the elasticity image reconstruction means (5) according to the selection of the form image (7a) or the elasticity image (7b).

3. The ultrasonographic apparatus (10) according to Claim 1, wherein the transmission means has first transmission signal generating means for generating an ultrasonic transmission signal for the form image (7a); and second transmission signal generating means for generating an ultrasonic transmission signal for the elasticity image (7b) having at least one ultrasonic wave among an ultrasonic wave having a larger amplitude, an ultrasonic wave having a larger wave number and an ultrasonic wave having a lower frequency than those of the ultrasonic transmission signal for the form image (7a).

4. The ultrasonographic apparatus (10) according to Claim 3, wherein the control means (9) switches between the first transmission signal generating means and the second transmission signal generating means according to the selection of the form image (7a) or the elasticity image (7b).

5. The ultrasonographic apparatus (10) according to Claim 1, wherein the control means (9) performs control, for each frame of each image, so as to selectively acquire the form image (7a) and the elasticity image (7b).

6. The ultrasonographic apparatus (10) according to Claim 1, wherein the control means (9) performs control, for each ultrasonic beam to be irradiated to the patient (20), so as to selectively acquire the form image (7a) and the elasticity image (7b).

7. The ultrasonographic apparatus (10) according to Claim 1, wherein the control means (9) switches, for each ultrasonic beam to be irradiated to the patient (20), control for selectively acquiring the form image (7a) and the elasticity image (7b) with respect to a defined focus area and causes the ultrasonic beam to scan; and
the elasticity image re-construction means (5) re-constructs the elasticity image (7b) of the focus area (33) and displays it over the form image (7a) on the display means (7).

8. The ultrasonographic apparatus (10) according to Claim 1, wherein the control means (9) switches, for each frame of each image or for each ultrasonic beam to be irradiated to the patient (20), control for selectively acquiring the form image (7a) and the elasticity image (7b) during the period from the time when a measurement start command of the elasticity

image mode is input from the mode switching means to the time when a measurement end command is input therefrom.

9. The ultrasonographic apparatus (10) according to Claim 1, wherein the display means (7) selectively displays one image of the form image (7a) and the elasticity image (7b), an image having both of them one over another and an image having both of the in line.
10. The ultrasonographic apparatus (10) according to Claim 1, wherein the mode switching means is at least one of human interface equipment such as a switch (8) provided in the ultrasonic probe (1), a switch provided in the apparatus body, a foot switch and a keyboard.
11. A method for measuring an elasticity of a biological tissue, comprising the steps of:

generating an ultrasonic transmission signal and transmitting it to an ultrasonic probe (S5B); performing reception processing on a reflection echo signal received by the ultrasonic probe (S5B); re-constructing at least one of a form image (S73, S77) and an elasticity image (S75) based on the reception signal having undergone the reception processing; displaying at least one of the form image and the elasticity image; switching between a form image mode and an elasticity image mode (S52); and controlling so as to selectively acquire the form image and the elasticity image in the measurement period of the elasticity image mode switched by the step, **characterised in that** the reception processing step switches between and performs first reception processing for the form image (S53-S57) for performing processing with a dynamic filter having a filter characteristic dependent on the depth of the reflection echo signal and second reception processing for the elasticity image (S58, S59, S5A-S5C) for performing processing with a filter having a constant filter characteristic independent of the depth of the reflection echo signal, and the control step switches, for each frame of each image, between the ultrasonic transmission signals for the form image measurement and the elasticity image measurement.

12. The biological tissue elasticity measurement method according to Claim 11, wherein the ultrasonic transmission signal for the elasticity image generated by the transmission step has at least one ultrasonic

wave among an ultrasonic wave having a larger amplitude, an ultrasonic wave having a larger wave number and an ultrasonic wave having a lower frequency than those of the ultrasonic transmission signal for the form image.

13. The biological tissue elasticity measurement method according to Claim 11, wherein the control step switches, for each ultrasonic beam to be irradiated to the patient, between the ultrasonic transmission signals for the form image measurement and the elasticity image measurement.
14. The biological tissue elasticity measurement method according to Claim 11, wherein the control step scans an ultrasonic beam by the ultrasonic transmission signal for the elasticity image measurement with respect to a defined focus area; and the image re-construction step re-constructs the elasticity image of the focus area and displays it over the form image on the display means.
15. The biological tissue elasticity measurement method according to Claim 11, wherein the control step switches, for each frame of each image or for each ultrasonic beam to be irradiated to the patient, control for selectively acquiring the form image and the elasticity image during the period from the time when a measurement start command of the elasticity image mode is input to the time when a measurement end command is input (S74).
16. The biological tissue elasticity measurement method according to Claim 11, wherein the measurement start and end commands of the elasticity image mode are input from at least one of human interface equipment such as a switch provided in the ultrasonic probe, a switch provided in the apparatus body, a foot switch and a keyboard.

Patentansprüche

1. Ultraschallgerät (10), umfassend:

einen Ultraschalltastkopf (1) zum Übertragen/Empfangen einer Ultraschallwelle an/von einem/m Patienten (20);
ein Mittel zum Erzeugen eines Ultraschall-Übertragungssignals (2) und zum Übertragen des Ultraschall-Übertragungssignals an den Ultraschalltastkopf (1);
ein Mittel zum Durchführen einer Empfangsverarbeitung (3) an einem durch den Ultraschalltastkopf (1) empfangenen Reflexionsechosignal;
ein Mittel zur Rekonstruktion eines Formbilds (4) gemäß dem Empfangssignal, das durch das

- Empfangsverarbeitungsmittel (3) verarbeitet wurde;
 ein Mittel zur Rekonstruktion eines Elastizitätsbilds gemäß dem Empfangssignal, das durch das Empfangsverarbeitungsmittel (3) verarbeitet wurde;
 ein Mittel zum Anzeigen des Formbilds (7) und des Elastizitätsbilds;
 ein Mittel zum Umschalten zwischen dem Formbildmodus und dem Elastizitätsbildmodus (8);
 und
 ein Mittel zum Durchführen einer Steuerung (9), um wahlweise sowohl das Formbild (7a) als auch das Elastizitätsbild (7b) in der Messperiode des Elastizitätsbildmodus zu erlangen;
dadurch gekennzeichnet, dass
 das Empfangsverarbeitungsmittel (3) ein erstes Empfangsverarbeitungsmittel für das Formbild (7a) mit einem dynamischen Filter, das eine von der Tiefe des Reflexionsechosignals abhängige Filtercharakteristik aufweist, und ein zweites Empfangsverarbeitungsmittel für das Elastizitätsbild (7b) mit einem Filter, das eine unabhängig von der Tiefe des Reflexionsechosignals konstante Filtercharakteristik aufweist, umfasst, und
 das Steuermittel (9) dazu ausgelegt ist, zwischen dem ersten Empfangsverarbeitungsmittel und dem zweiten Empfangsverarbeitungsmittel gemäß der Auswahl des Formbilds (7a) oder des Elastizitätsbilds (7b) umzuschalten.
2. Ultraschallgerät (10) nach Anspruch 1, wobei das Steuermittel (9) zwischen dem Formbild-Rekonstruktionsmittel (4) und dem Elastizitätsbild-Rekonstruktionsmittel (5) gemäß der Auswahl des Formbilds (7a) oder des Elastizitätsbilds (7b) umschaltet.
 3. Ultraschallgerät (10) nach Anspruch 1, wobei das Übertragungsmittel ein erstes Übertragungssignal-Erzeugungsmittel zum Erzeugen eines Ultraschallübertragungssignals für das Formbild (7a) und ein zweites Übertragungssignal-Erzeugungsmittel zum Erzeugen eines Ultraschallübertragungssignals für das Elastizitätsbild (7b) aufweist, das eine Ultraschallwelle mit einer größeren Amplitude, eine Ultraschallwelle mit einer größeren Wellenzahl und/oder eine Ultraschallwelle mit einer niedrigeren Frequenz als jene des Ultraschallübertragungssignals für das Formbild (7a) aufweist.
 4. Ultraschallgerät (10) nach Anspruch 3, wobei das Steuermittel (9) zwischen dem ersten Übertragungssignal-Erzeugungsmittel und dem zweiten Übertragungssignal-Erzeugungsmittel gemäß der Auswahl des Formbilds (7a) oder des Elastizitätsbilds (7b) umschaltet.
 5. Ultraschallgerät (10) nach Anspruch 1, wobei das Steuermittel (9) für jeden Frame jedes Bilds eine Steuerung durchführt, um wahlweise das Formbild (7a) und das Elastizitätsbild (7b) zu erlangen.
 6. Ultraschallgerät (10) nach Anspruch 1, wobei das Steuermittel (9) für jedes auf den Patienten (20) abzustrahlende Ultraschallbündel eine Steuerung durchführt, um wahlweise das Formbild (7a) und das Elastizitätsbild (7b) zu erlangen.
 7. Ultraschallgerät (10) nach Anspruch 1, wobei das Steuermittel (9) für jedes auf den Patienten (20) abzustrahlende Ultraschallbündel eine Steuerung umschaltet, um wahlweise das Formbild (7a) und das Elastizitätsbild (7b) bezüglich eines definierten Fokusbereichs zu erlangen und ein Rastern des Ultraschallbündels veranlasst; und
 das Elastizitätsbild-Rekonstruktionsmittel (5) das Elastizitätsbild (7b) des Fokusbereichs (33) rekonstruiert und es über dem Formbild (7a) auf dem Anzeigemittel (7) anzeigt.
 8. Ultraschallgerät (10) nach Anspruch 1, wobei das Steuermittel (9) für jeden Frame jedes Bilds oder für jedes auf den Patienten (20) abzustrahlende Ultraschallbündel eine Steuerung umschaltet, um wahlweise das Formbild (7a) und das Elastizitätsbild (7b), während der Zeitspanne von dem Zeitpunkt, an dem ein Messstartbefehl des Elastizitätsbildmodus von dem Modusumschaltmittel eingegeben wird, bis zu dem Zeitpunkt, an dem ein Messendbefehl hierdurch eingegeben wird, zu erlangen.
 9. Ultraschallgerät (10) nach Anspruch 1, wobei das Anzeigemittel (7) wahlweise ein Bild des Formbilds (7a) oder des Elastizitätsbilds (7b), ein Bild mit beiden von diesen übereinander und ein Bild mit beiden von diesen in Reihe anzeigt.
 10. Ultraschallgerät (10) nach Anspruch 1, wobei das Modusumschaltmittel ein Human-Interface-Gerät, wie ein in dem Ultraschalltastkopf (1) vorgesehener Schalter, ein in dem Gerätekörper vorgesehener Schalter, ein Fußschalter und/oder eine Tastatur ist.
 11. Verfahren zum Messen einer Elastizität eines biologischen Gewebes, mit den Schritten:
 Erzeugen eines Ultraschallübertragungssignals und Übertragen des Ultraschallübertragungssignals an einen Ultraschalltastkopf (S5B);
 Durchführen einer Empfangsverarbeitung an einem durch den Ultraschalltastkopf empfangenen Reflexionsechosignal (S5B);
 Rekonstruieren eines Formbilds (S73, S77) und/oder eines Elastizitätsbilds (S75) auf Grundlage des einer Empfangsverarbeitung un-

- terzogenen Empfangssignals;
Anzeigen von dem Formbild und/oder dem Elastizitätsbild;
Umschalten zwischen einem Formbildmodus und einem Elastizitätsbildmodus (S52); und
Steuern, um wahlweise das Formbild und das Elastizitätsbild in der Messperiode des Elastizitätsbildmodus, der durch den Schritt umgeschaltet wird, zu erlangen,
dadurch gekennzeichnet, dass
der Empfangsverarbeitungsschritt zwischen einer ersten Empfangsverarbeitung für das Formbild (S53-S57) zum Durchführen einer Verarbeitung mit einem dynamischen Filter, das eine von der Tiefe des Reflexionsechosignals abhängige Filtercharakteristik aufweist, und einer zweiten Empfangsverarbeitung für das Elastizitätsbild (S58, S59, S5A-S5C) zum Durchführen einer Verarbeitung mit einem Filter, das eine von der Tiefe des Reflexionsechosignals unabhängige konstante Filtercharakteristik aufweist, umschaltet und diese durchführt, und
der Steuerschritt für jeden Frame jedes Bilds zwischen den Ultraschallübertragungssignalen für die Formbildmessung und für die Elastizitätsbildmessung umschaltet.
12. Elastizitätsmessverfahren für biologisches Gewebe nach Anspruch 11, wobei das durch den Übertragungsschritt erzeugte Ultraschallübertragungssignal für das Elastizitätsbild eine Ultraschallwelle mit einer größeren Amplitude, eine Ultraschallwelle mit einer größeren Wellenzahl und/oder eine Ultraschallwelle mit einer niedrigeren Frequenz als jene des Ultraschallübertragungssignals für das Formbild aufweist.
13. Elastizitätsmessverfahren für biologisches Gewebe nach Anspruch 11, wobei der Steuerschritt für jedes auf den Patient abzustrahlende Ultraschallbündel zwischen den Ultraschallübertragungssignalen für die Formbildmessung und für die Elastizitätsbildmessung umschaltet.
14. Elastizitätsmessverfahren für biologisches Gewebe nach Anspruch 11, wobei der Steuerschritt ein Ultraschallbündel durch das Ultraschallübertragungssignal für die Elastizitätsbildmessung bezüglich eines definierten Fokusbereichs rastert; und der Bildrekonstruktionsschritt das Elastizitätsbild des Fokusbereichs rekonstruiert und es auf dem Anzeigemittel über dem Formbild anzeigt.
15. Elastizitätsmessverfahren für biologisches Gewebe nach Anspruch 11, wobei der Steuerschritt für jeden Frame jedes Bilds oder für jedes auf den Patienten abzustrahlende Ultraschallbündel eine Steuerung umschaltet, um wahlweise das Formbild und das

Elastizitätsbild während der Zeitspanne von dem Zeitpunkt, an dem ein Messstartbefehl von dem Elastizitätsbildmodus eingegeben wird, bis zu dem Zeitpunkt, an dem ein Messendbefehl eingegeben wird, zu erlangen (S74).

16. Elastizitätsmessverfahren für biologisches Gewebe nach Anspruch 11, wobei der Messstart- und -endbefehl des Elastizitätsbildmodus von einem Human-Interface-Gerät, wie ein in dem Ultraschalltastkopf vorgesehener Schalter, ein in dem Gerätekörper vorgesehener Schalter, ein Fußschalter und/oder eine Tastatur, eingegeben werden.

Revendications

1. Echographe (10), comportant :

une sonde d'échographie (1) pour émettre/recevoir une onde ultrasonore vers/depuis un patient (20) ;
un moyen (2) pour générer un signal échographique d'émission et émettre celui-ci vers la sonde d'échographie (1) ;
un moyen (3) pour réaliser un traitement en réception sur un signal d'écho réfléchi reçu par la sonde d'échographie (1) ;
un moyen (4) pour reconstruire une image de forme d'après le signal de réception traité par le moyen de traitement en réception (3) ;
un moyen (5) pour reconstruire une image d'élasticité d'après le signal de réception traité par le moyen de traitement en réception (3) ;
un moyen (7) pour afficher l'image de forme et l'image d'élasticité ;
un moyen (8) pour commuter entre le mode image de forme et le mode image d'élasticité ; et
un moyen (9) pour exécuter une commande de manière à acquérir sélectivement l'image de forme (7a) ainsi que l'image d'élasticité (7b) pendant la période de mesure de mode image d'élasticité ;

caractérisé en ce que :

le moyen de traitement en réception (3) a un premier moyen de traitement en réception pour l'image de forme (7a) comprenant un filtre dynamique à caractéristique de filtrage qui dépend de la profondeur du signal d'écho réfléchi ; et un second moyen de traitement en réception pour l'image d'élasticité (7b) comprenant un filtre à caractéristique de filtrage constante indépendante de la profondeur du signal d'écho réfléchi, et le moyen de commande (9) est conçu pour commuter entre le premier moyen de traitement en réception et le second moyen de

traitement en réception d'après le choix de l'image de forme (7a) ou de l'image d'élasticité (7b).

2. Echographe (10) selon la revendication 1, dans lequel le moyen de commande (9) bascule entre le moyen de reconstruction (4) d'image de forme et le moyen de reconstruction (5) d'image d'élasticité d'après la sélection de l'image de forme (7a) ou de l'image d'élasticité (7b). 5
3. Echographe (10) selon la revendication 1, dans lequel le moyen d'émission a un premier moyen de génération de signal d'émission pour générer un signal échographique d'émission pour l'image de forme (7a) ; et un second moyen de génération de signal d'émission pour générer un signal échographique d'émission pour l'image d'élasticité (7b) ayant au moins une onde ultrasonore parmi une onde ultrasonore à amplitude plus grande, une onde ultrasonore à nombre d'ondes plus grand et une onde ultrasonore à fréquence inférieure à ceux du signal échographique d'émission pour l'image de forme (7a). 10
4. Echographe (10) selon la revendication 3, dans lequel le moyen de commande (5) bascule entre le premier moyen de génération de signal d'émission et le second moyen de génération de signal d'émission en fonction de la sélection de l'image de forme (7a) ou de l'image d'élasticité (7b). 15
5. Echographe (10) selon la revendication 1, dans lequel le moyen de commande exécute, pour chaque trame de chaque image, une commande visant à acquérir sélectivement l'image de forme (7a) et l'image d'élasticité (7b). 20
6. Echographe (10) selon la revendication 1, dans lequel le moyen de commande (9) exécute, pour chaque faisceau d'ultrasons à diriger vers le patient, une commande visant à acquérir sélectivement l'image de forme (7a) et l'image d'élasticité (7b). 25
7. Echographe (10) selon la revendication 1, dans lequel le moyen de commande (9) passe, pour chaque faisceau d'ultrasons à diriger vers le patient (20), à une commande visant à acquérir sélectivement l'image de forme (7a) et l'image d'élasticité (7b) par rapport à une zone visée définie et amène le faisceau d'ultrasons à réaliser un balayage ; et le moyen de reconstruction (5) d'image d'élasticité reconstruit l'image d'élasticité (7b) de la zone visée (33) et l'affiche par-dessus l'image de forme (7a) sur le moyen d'affichage (7). 30
8. Echographe (10) selon la revendication 1, dans lequel le moyen de commande (9) passe, pour chaque 35

trame de chaque image ou pour chaque faisceau d'ultrasons à diriger vers le patient (20), à une commande visant à acquérir sélectivement l'image de forme (7a) et l'image d'élasticité (7b) pendant la période allant de l'instant où une instruction de commencement de mesure du mode image d'élasticité est délivrée par le moyen de commutation de mode à l'instant où une instruction d'achèvement de mesure est délivrée par celui-ci.

9. Echographe (10) selon la revendication 1, dans lequel le moyen d'affichage (7) affiche sélectivement une seule image parmi l'image de forme (7a) et l'image d'élasticité (7b), une image les ayant toutes les deux superposées l'une à l'autre et une image les ayant toutes les deux alignées l'une avec l'autre. 40
10. Echographe (10) selon la revendication 1, dans lequel le moyen de commutation de mode est au moins un moyen parmi un accessoire d'interfaçage humain tel qu'un commutateur (8) monté dans la sonde d'échographie (1), un commutateur monté dans le corps de l'échographe, un commutateur au pied et un clavier. 45
11. Procédé pour mesurer une élasticité de tissus biologiques, comportant les étapes de : 50

génération d'un signal échographique d'émission et émission de celui-ci vers une sonde d'échographie (S5B) ;
 réalisation d'un traitement en réception sur un signal d'écho réfléchi reçu par la sonde d'échographie (S5B) ;
 reconstruction d'une image de forme (S73, S77) et/ou d'une image d'élasticité (S75) d'après le signal de réception ayant subi le traitement en réception ;
 affichage de l'image de forme et/ou de l'image d'élasticité ;
 commutation entre un mode image de forme et un mode image d'élasticité (S52) ; et
 exécution d'une commande de manière à acquérir sélectivement l'image de forme et l'image d'élasticité pendant la période de mesure du mode image d'élasticité commuté par l'étape, **caractérisé en ce que**
 l'étape de traitement en réception bascule entre et réalise un premier traitement en réception pour l'image de forme (S53-S57) pour exécuter un traitement avec un filtre dynamique à caractéristique de filtrage qui dépend de la profondeur du signal d'écho réfléchi et un second de traitement en réception pour l'image d'élasticité (S58, S59, S5A-S5C) pour exécuter un traitement avec un filtre à caractéristique de filtrage constante indépendante de la profondeur du signal d'écho réfléchi, et 55

l'étape de commande commute, pour chaque trame de chaque image, entre les signaux échographiques d'émission pour la mesure de l'image de forme et la mesure de l'image d'élasticité.

5

12. Procédé de mesure de l'élasticité de tissus biologiques selon la revendication 11, dans lequel le signal échographique d'émission pour l'image d'élasticité généré par l'étape d'émission a au moins une onde ultrasonore parmi une onde ultrasonore à amplitude plus grande, une onde ultrasonore à nombre d'ondes plus grand et une onde ultrasonore à fréquence inférieure à ceux du signal échographique d'émission pour l'image de forme. 10
13. Procédé de mesure de l'élasticité de tissus biologiques selon la revendication 11, dans lequel l'étape de commande commute, pour chaque faisceau d'ultrasons à diriger vers le patient, entre les signaux échographiques d'émission pour la mesure de l'image de forme et la mesure de l'image d'élasticité 15 20
14. Procédé de mesure de l'élasticité de tissus biologiques selon la revendication 11, dans lequel l'étape de commande provoque un balayage par un faisceau d'ultrasons à l'aide d'un signal échographique d'émission pour la mesure d'image d'élasticité par rapport à une zone visée définie ; et 25 l'étape de reconstruction d'image reconstruit l'image d'élasticité de la zone visée et l'affiche par-dessus l'image de forme sur le moyen d'affichage. 30
15. Procédé de mesure de l'élasticité de tissus biologiques selon la revendication 11, dans lequel l'étape de commande passe, pour chaque trame de chaque image ou pour chaque faisceau d'ultrasons à diriger vers le patient, à une commande visant à acquérir sélectivement l'image de forme et l'image d'élasticité pendant la période allant de l'instant où une instruction de commencement de mesure du mode image d'élasticité est délivrée à l'instant où une instruction d'achèvement de mesure est délivrée (S74). 35 40
16. Procédé de mesure de l'élasticité de tissus biologiques selon la revendication 11, dans lequel les instructions de commencement et d'achèvement de mesure du mode image d'élasticité sont délivrées par au moins un moyen parmi un accessoire d'interface humaine tel qu'un commutateur monté dans la sonde d'échographie, un commutateur monté dans le corps de l'échographe, un commutateur au pied et un clavier. 45 50

55

FIG. 1

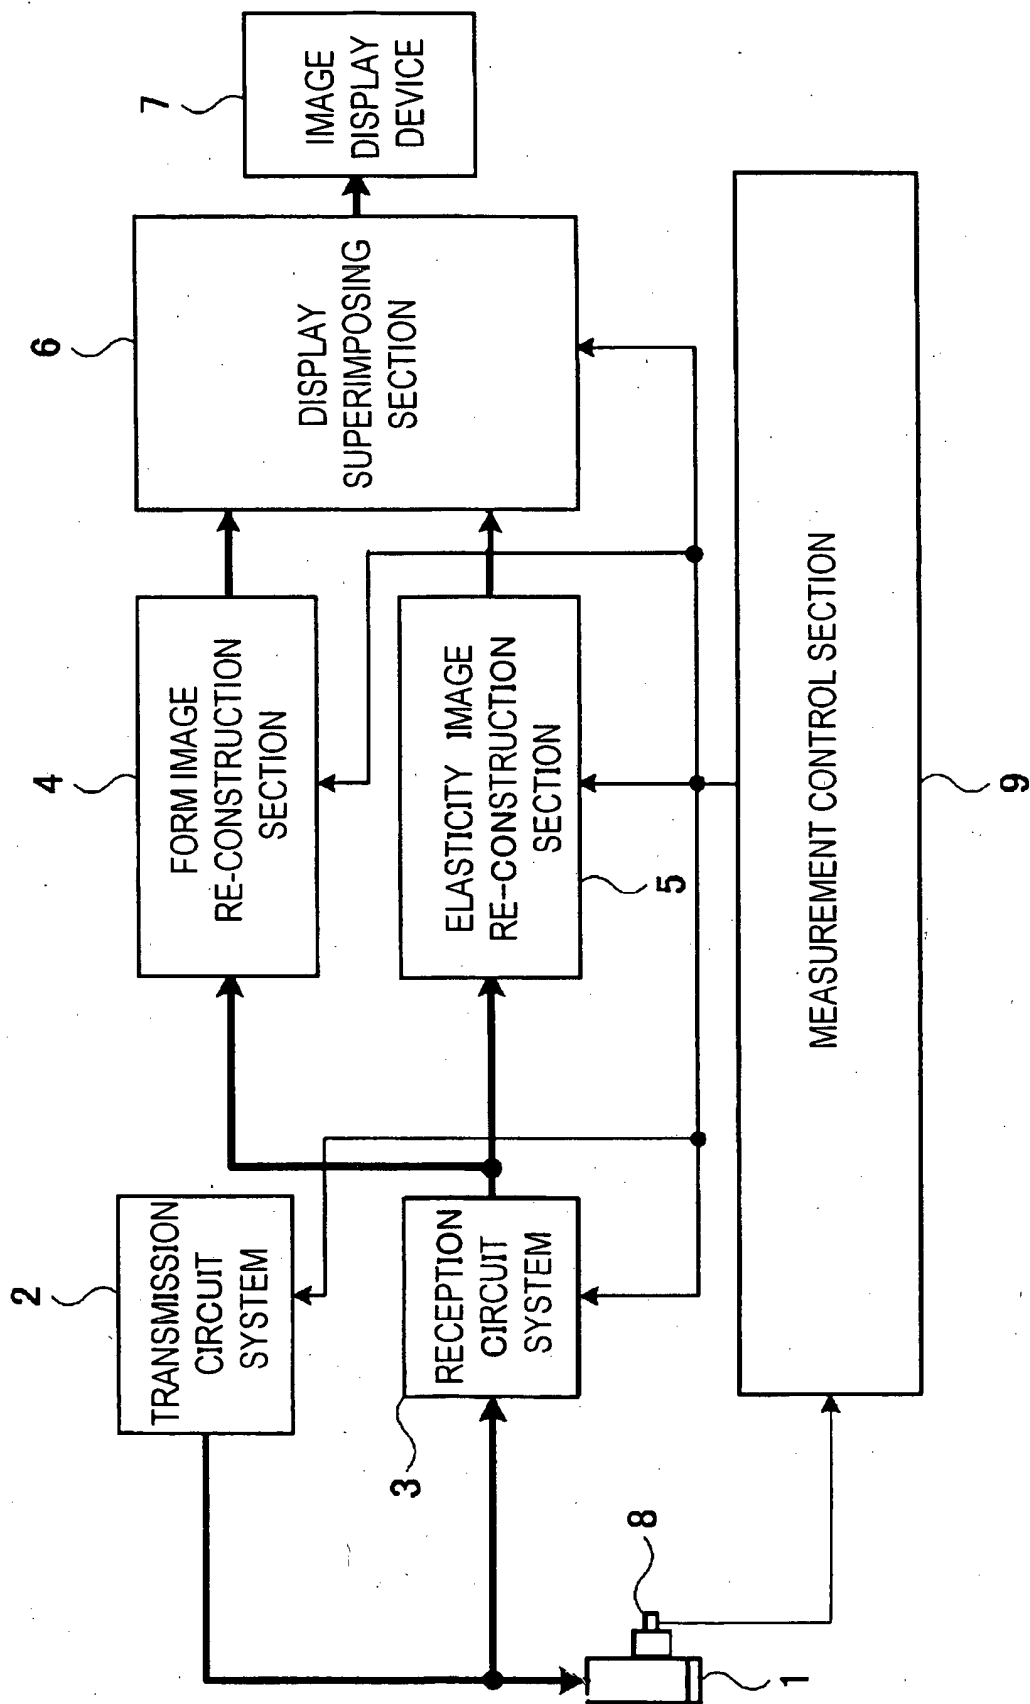


FIG. 2

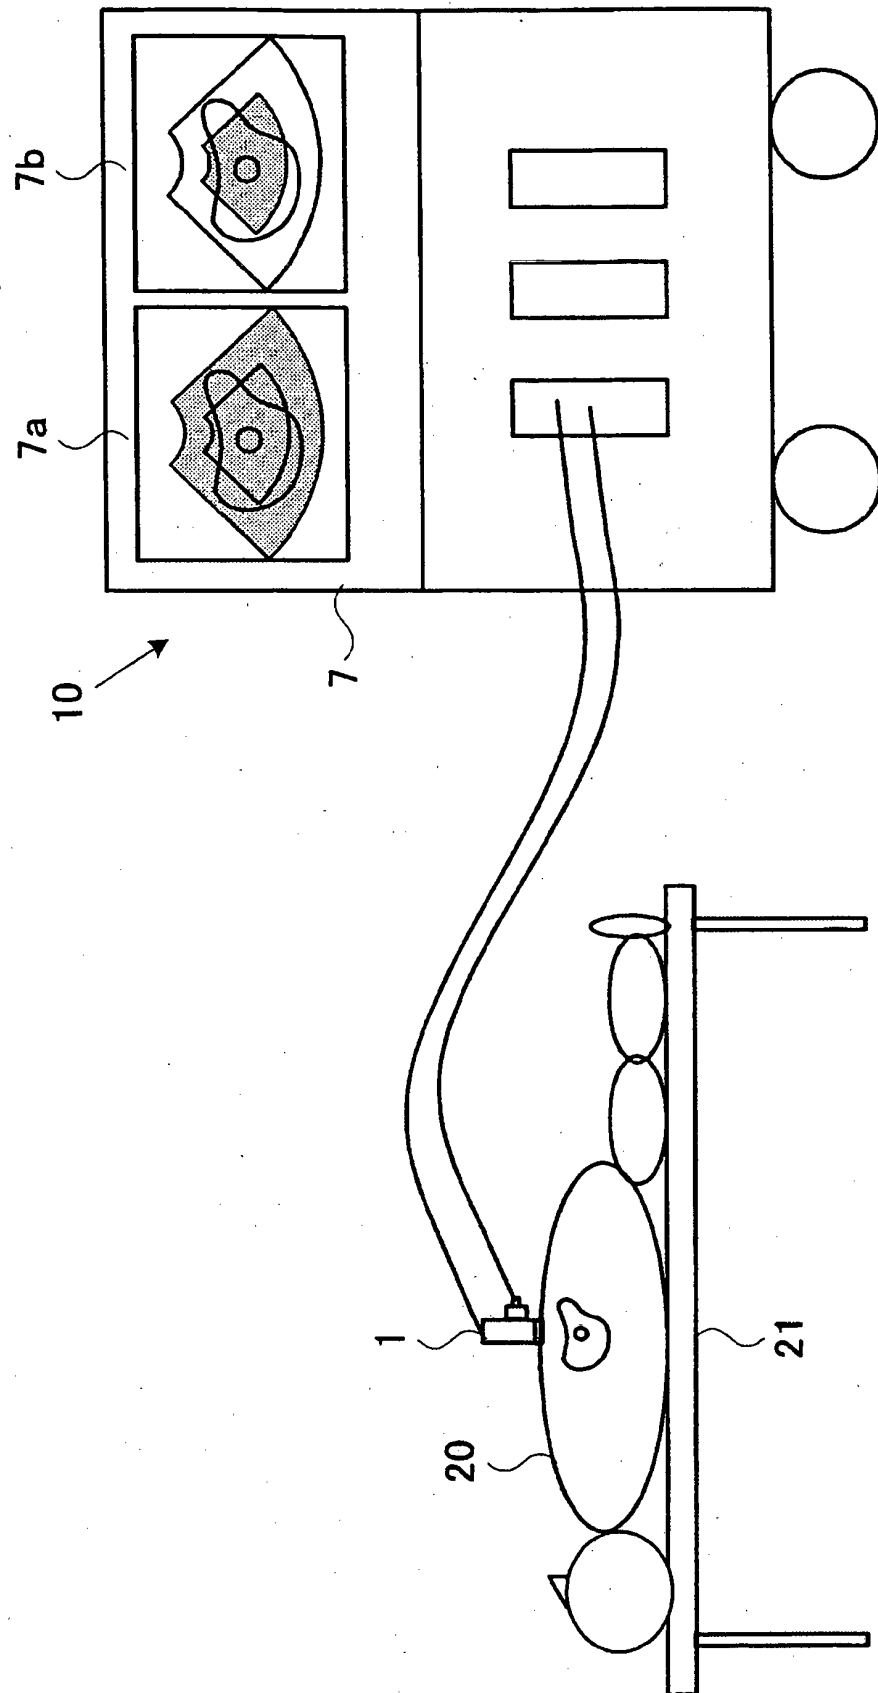


FIG. 3

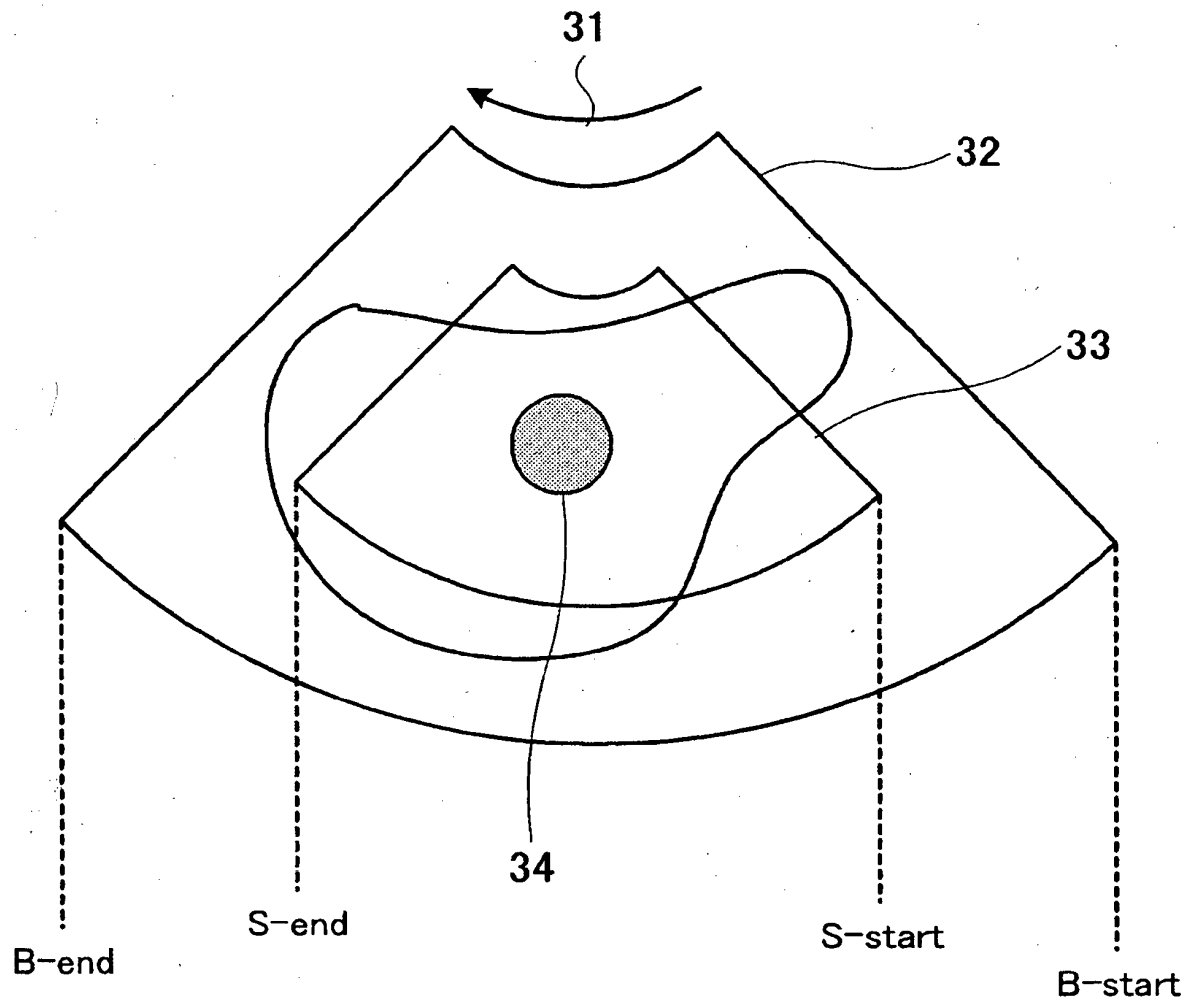


FIG. 4

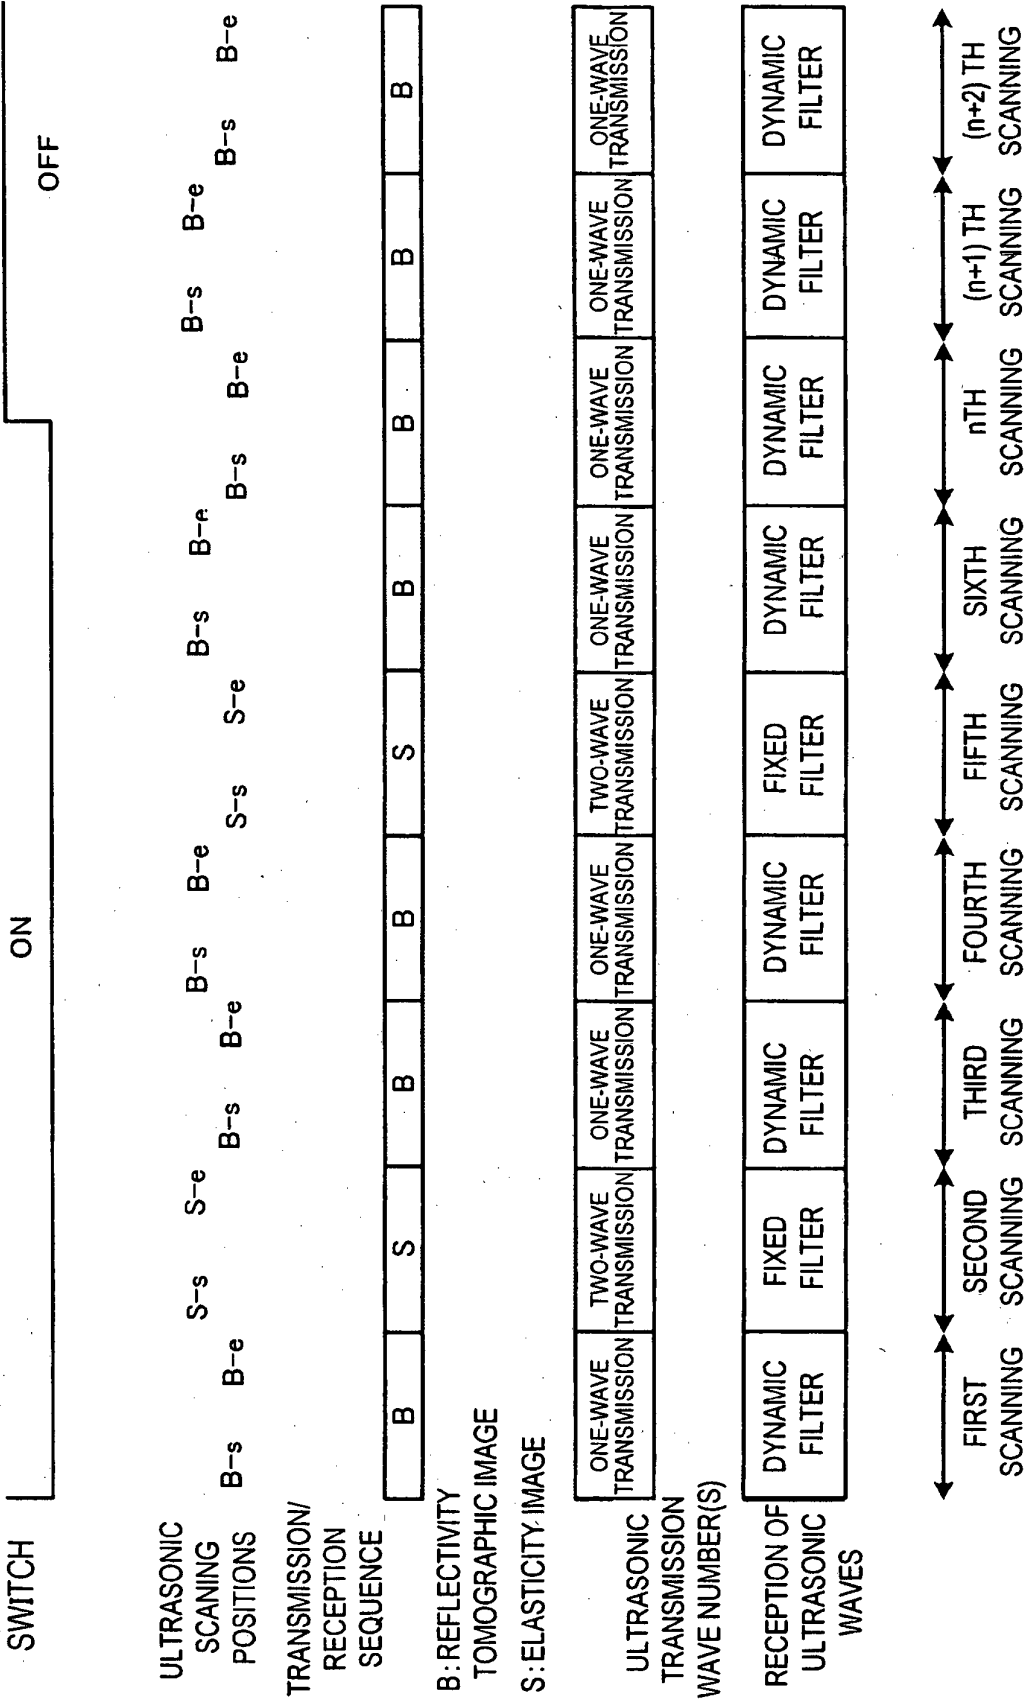


FIG. 5

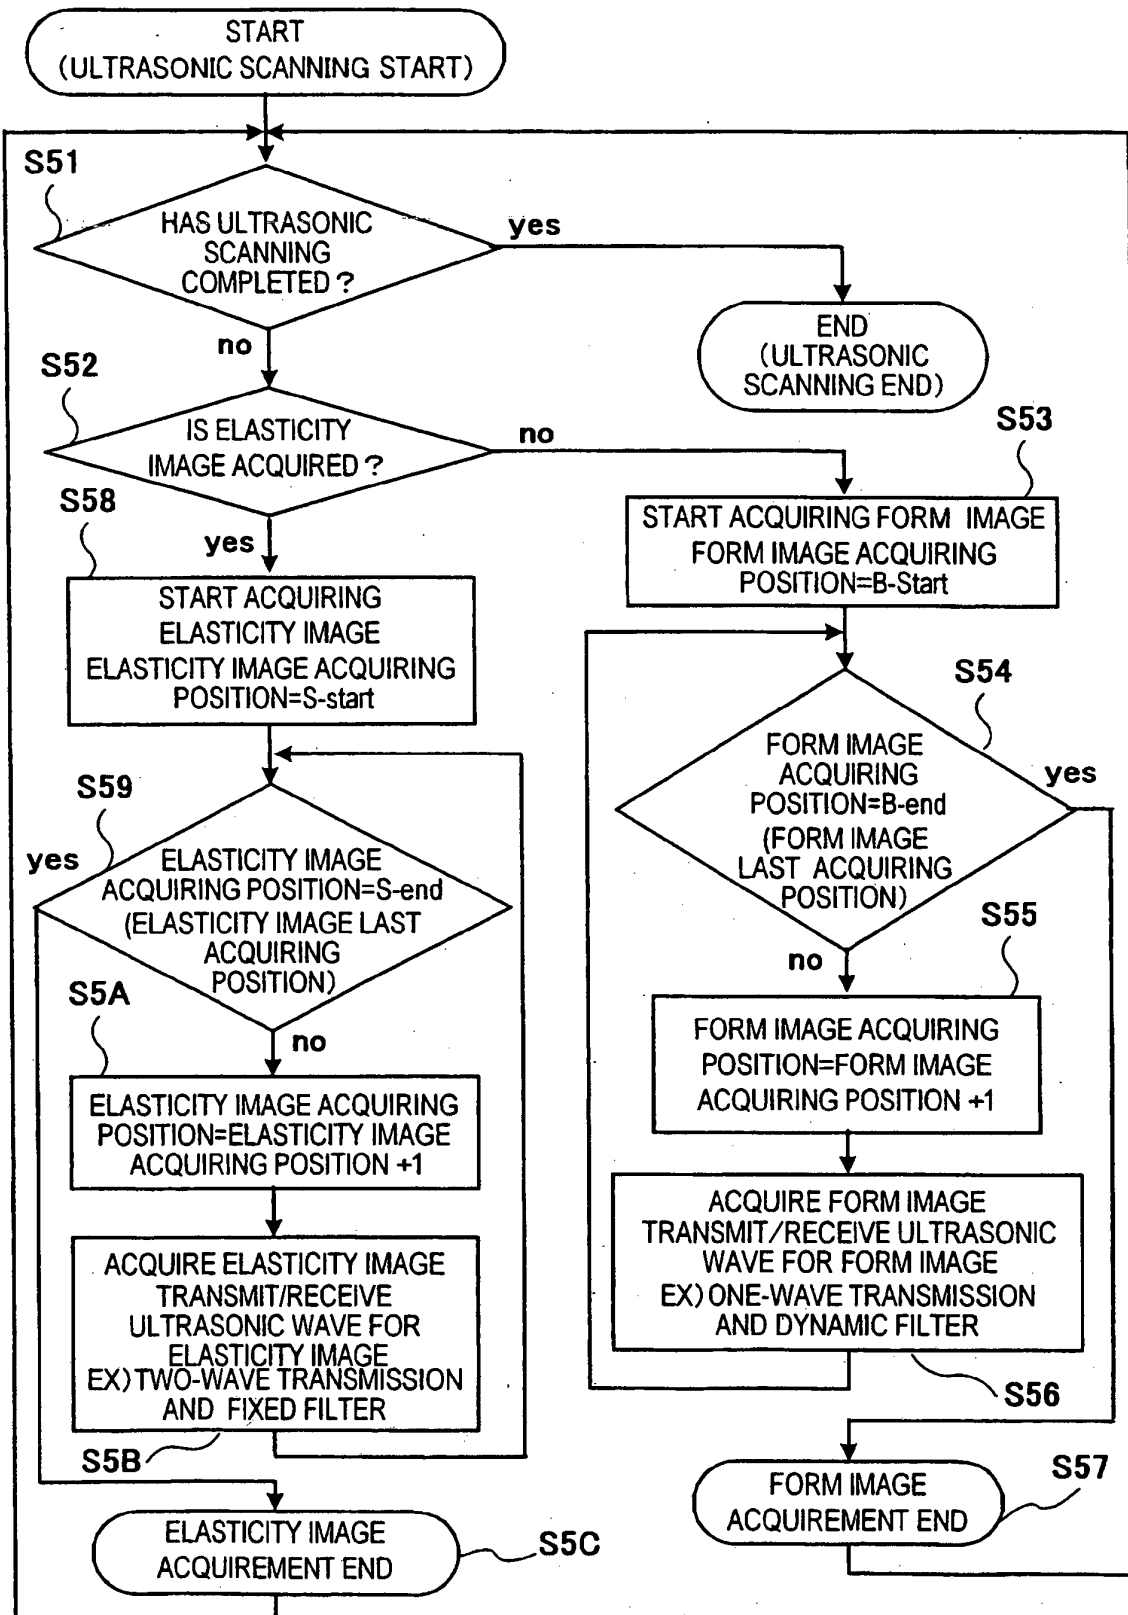


FIG. 7

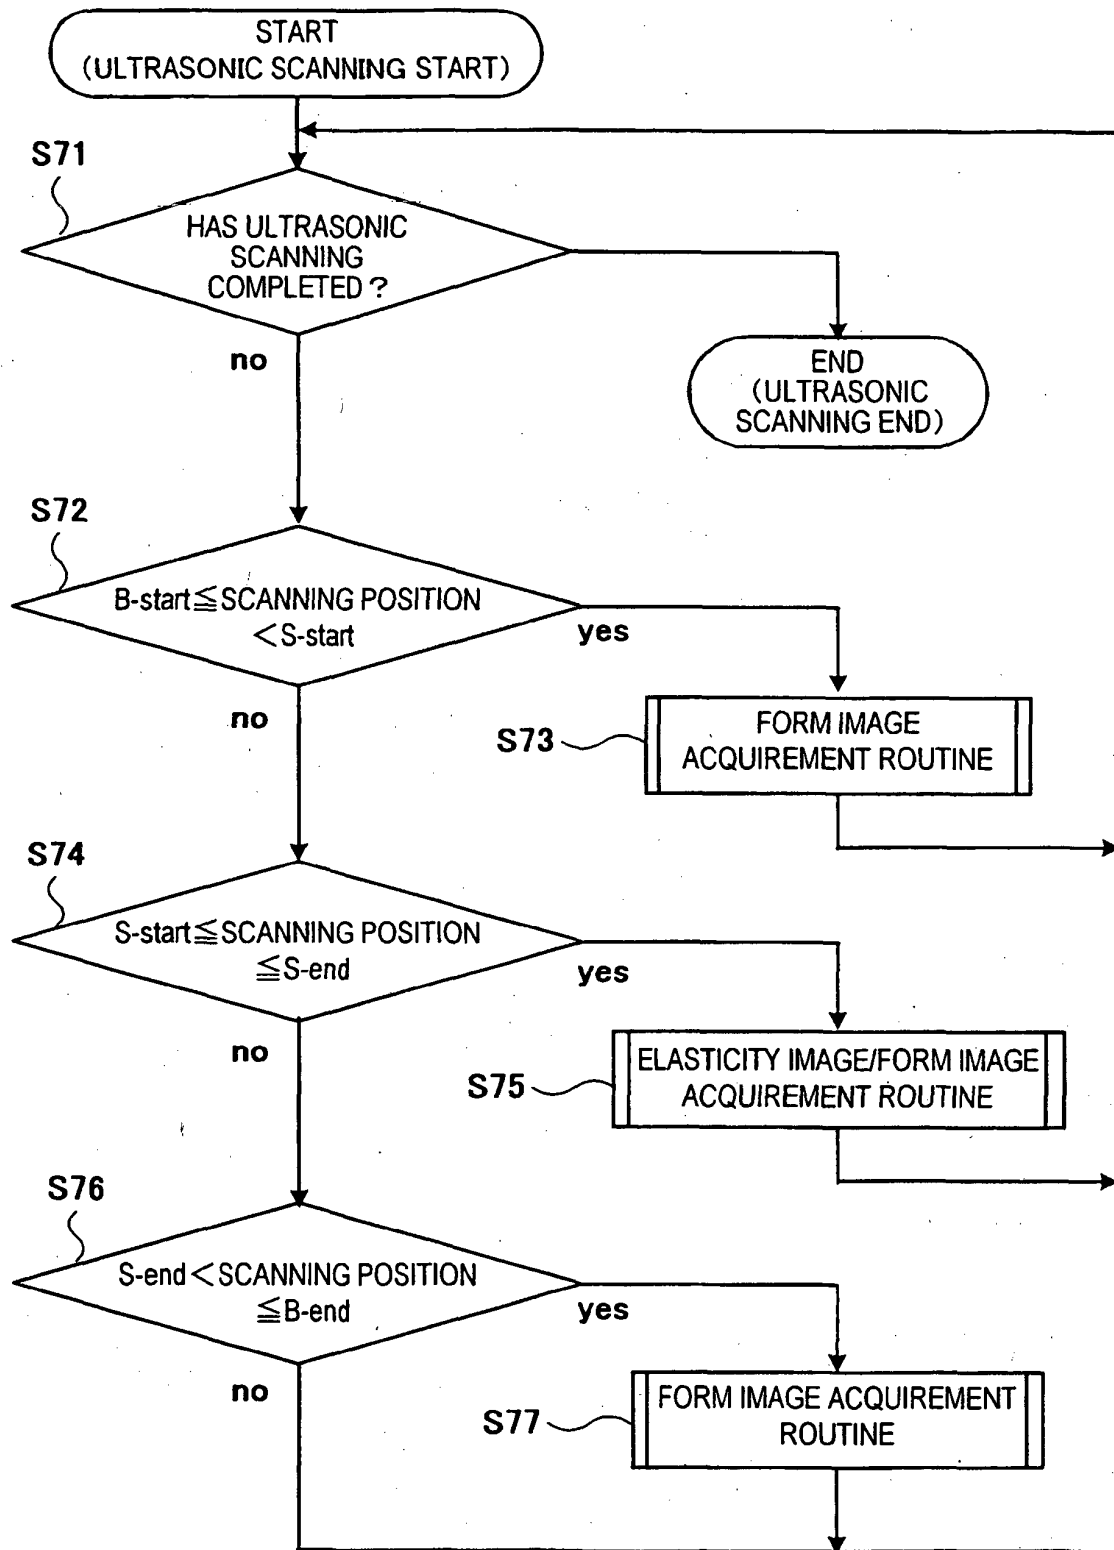


FIG. 8


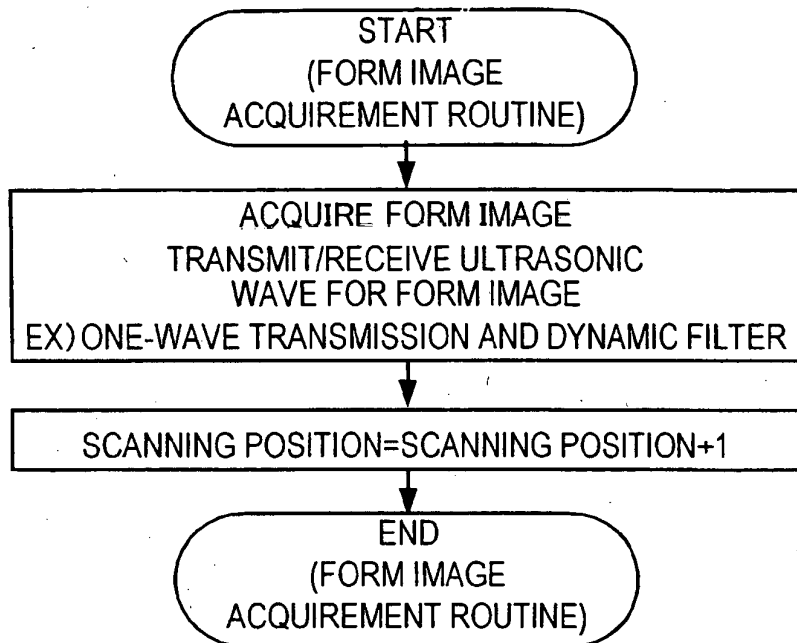


FIG. 9

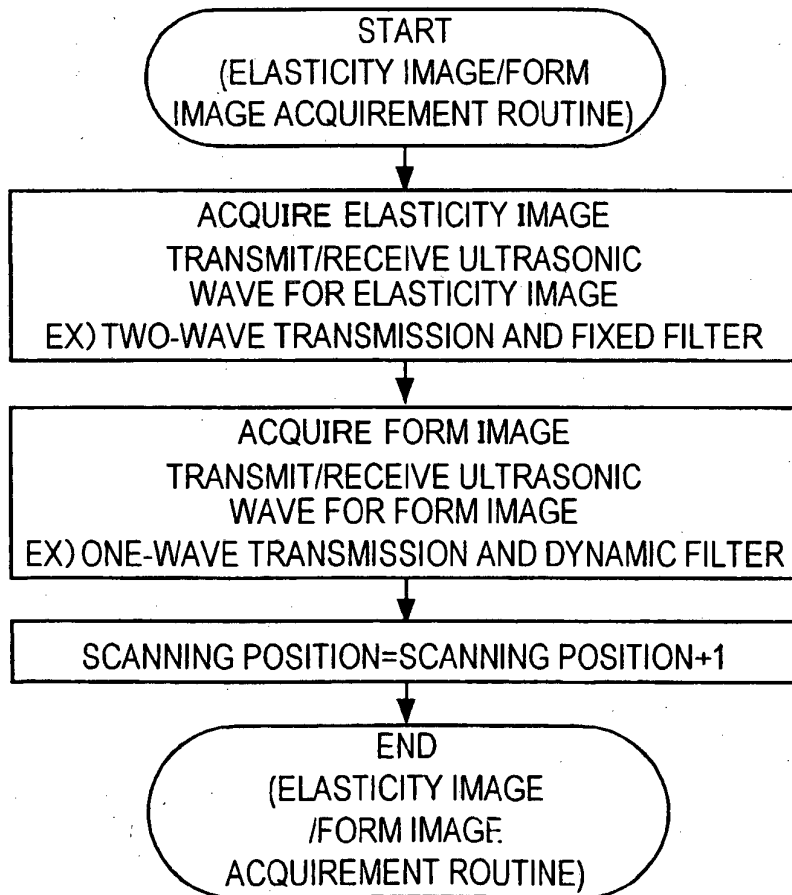

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- JP P200060853 A [0003]

专利名称(译)	生物组织弹性测量方法和超声波装置		
公开(公告)号	EP1557125B1	公开(公告)日	2014-09-17
申请号	EP2003758988	申请日	2003-10-28
[标]申请(专利权)人(译)	株式会社日立医药		
申请(专利权)人(译)	日立医疗器械股份有限公司		
当前申请(专利权)人(译)	日立医疗器械股份有限公司		
[标]发明人	TAMANO SATOSHI OSAKA TAKASHI OSHIKI MITSUHIRO MATSUMURA TAKESHI SHIINA TSUYOSHI		
发明人	TAMANO, SATOSHI OSAKA, TAKASHI OSHIKI, MITSUHIRO MATSUMURA, TAKESHI SHIINA, TSUYOSHI		
IPC分类号	A61B8/08 A61B8/00 G01S15/89 G01S7/52		
CPC分类号	G01S7/52074 A61B8/08 A61B8/485 G01S7/52042 G01S7/52071 G01S7/52085 G01S15/8952		
优先权	2002312023 2002-10-28 JP		
其他公开文献	EP1557125A4 EP1557125A1		
外部链接	Espacenet		

摘要(译)

超声波检查装置包括：超声波探头1，用于向患者发送超声波/从患者接收超声波；装置2，用于产生超声波发送信号并将其发送到超声波探头；装置3，用于接收由超声波接收的反射回波信号探测；装置4用于根据接收处理装置处理的接收信号重建表格图像；装置5用于根据接收处理装置处理的接收信号重构弹性图像；装置7用于显示表格图像和弹性图像；装置8用于在表格图像模式和弹性图像模式之间切换；和用于执行控制的装置9，以便在由模式切换装置切换的弹性图像模式的测量周期中选择性地获取表格图像和弹性图像。因此，可以执行与获取生物组织的表格图像和弹性图像相关联的测量，并且改善诸如B模式图像的表格图像的图像质量和诸如弹性的弹性图像的图像质量。比率和弹性变形。

