



US 20070200804A1

(19) United States

(12) Patent Application Publication

Kwon

(10) Pub. No.: US 2007/0200804 A1

(43) Pub. Date: Aug. 30, 2007

(54) ORGANIC LIGHT EMITTING DISPLAY DEVICE AND DRIVING METHOD OF THE SAME

(76) Inventor: Oh Kyong Kwon, Seoul (KR)

Correspondence Address:  
**CHRISTIE, PARKER & HALE, LLP**  
**PO BOX 7068**  
**PASADENA, CA 91109-7068**

(21) Appl. No.: 11/601,180

(22) Filed: Nov. 16, 2006

(30) Foreign Application Priority Data

Feb. 28, 2006 (KR) ..... 2006-0019354

## Publication Classification

(51) Int. Cl.  
G09G 3/30 (2006.01)

(52) U.S. Cl. ..... 345/76

## (57) ABSTRACT

An organic light emitting display device and a driving method for the same is provided. The device includes a data driver that can cause a display of an image having a uniform luminance. The data driver includes a ramp pulse generating part for generating a ramp pulse. The data driver also includes a current digital-to-analog converting part for generating a data current using data provided to the data driver. The data driver also includes a current control part for providing the ramp pulse to data lines coupled to a pixel and comparing a pixel current from the pixel with the data current to control providing of the ramp pulse to the data lines. The pixel current corresponds to the ramp pulse.

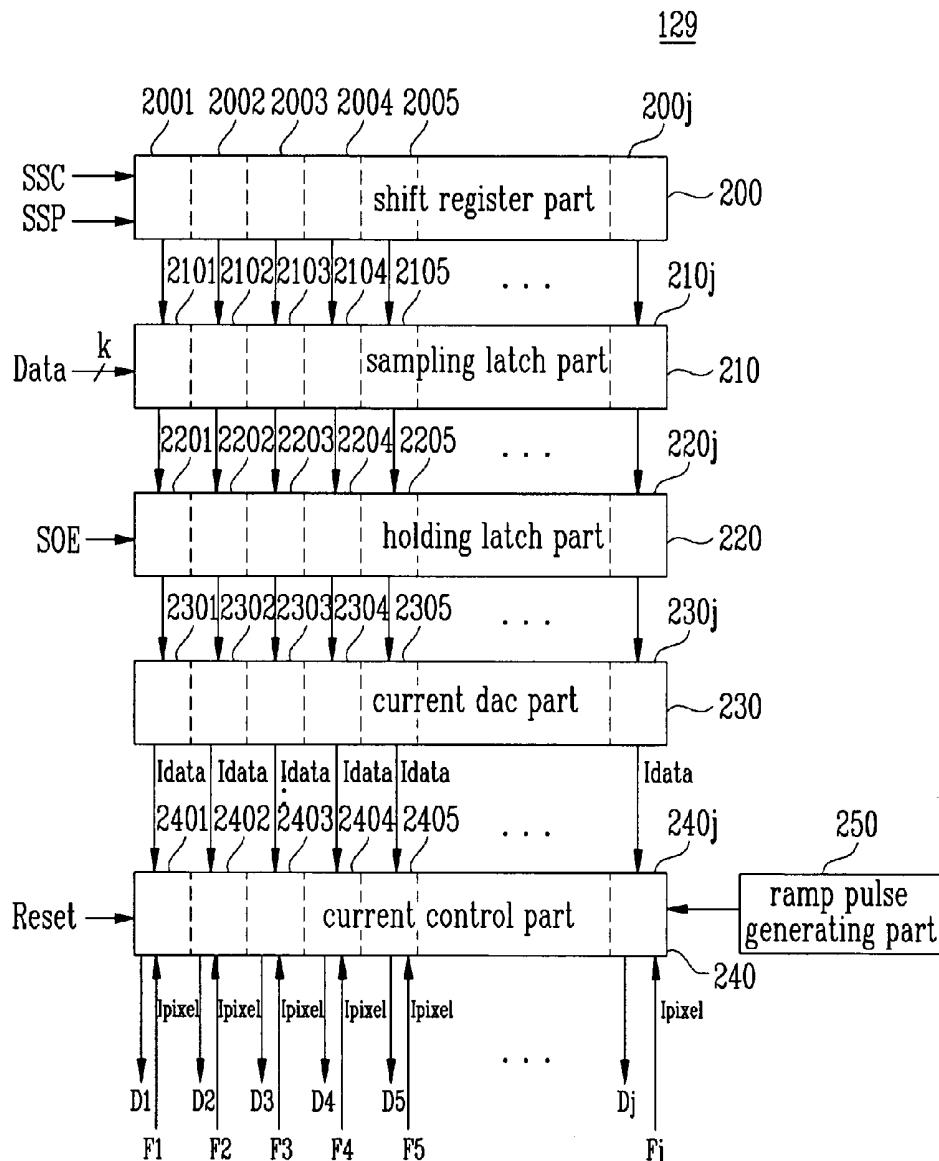


FIG. 1

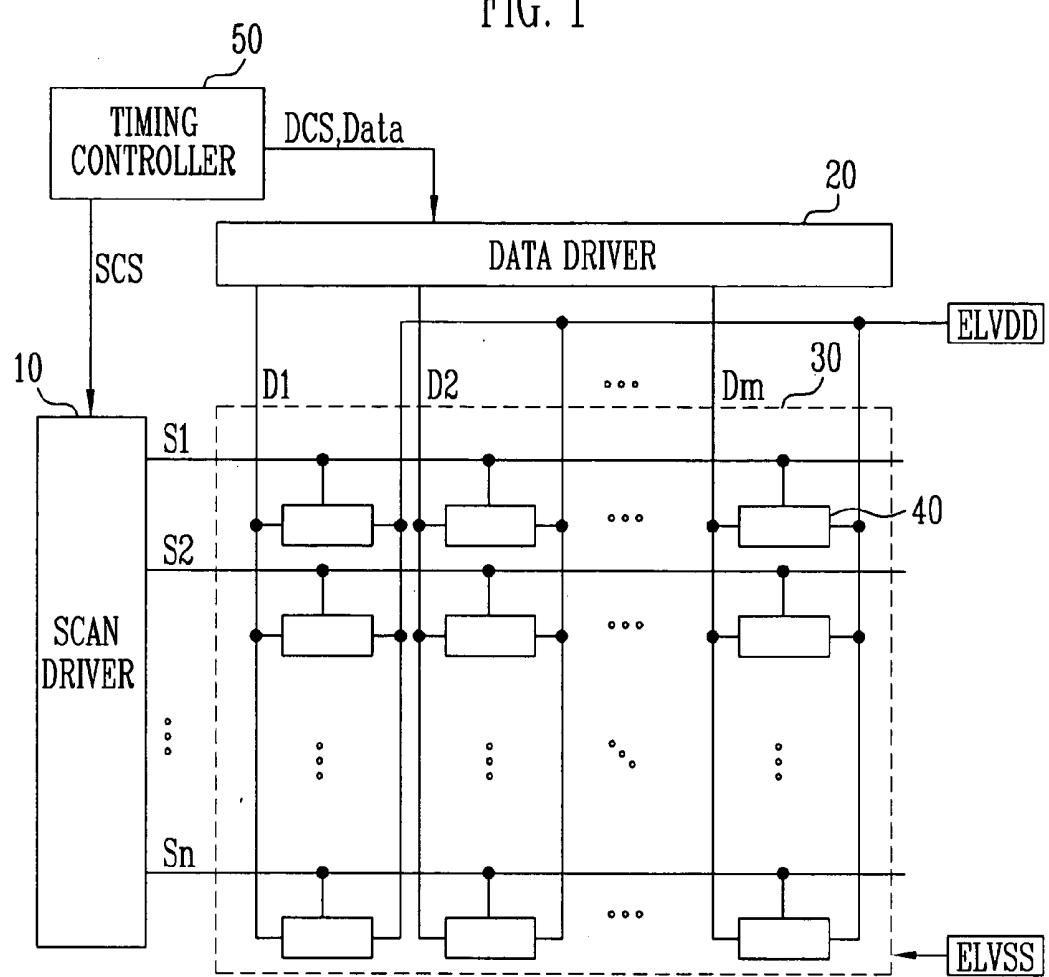


FIG. 2

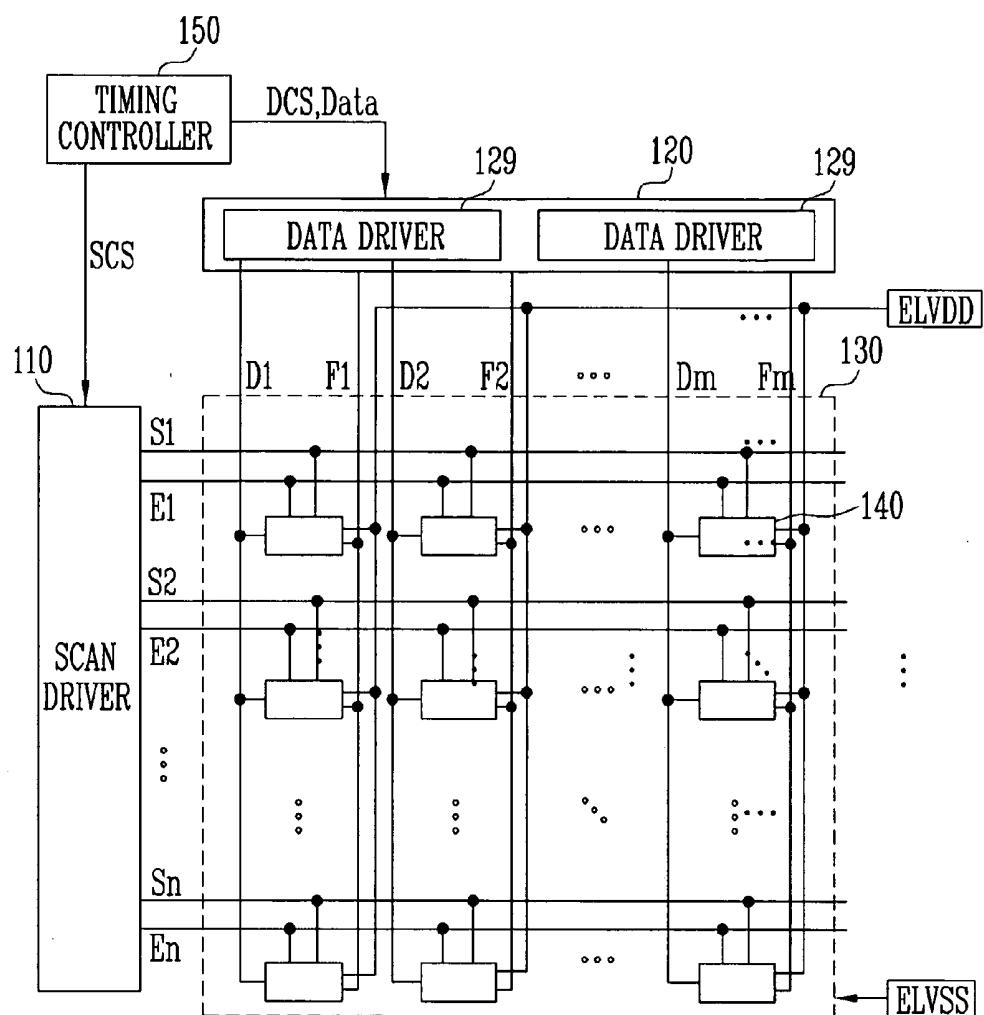


FIG. 3

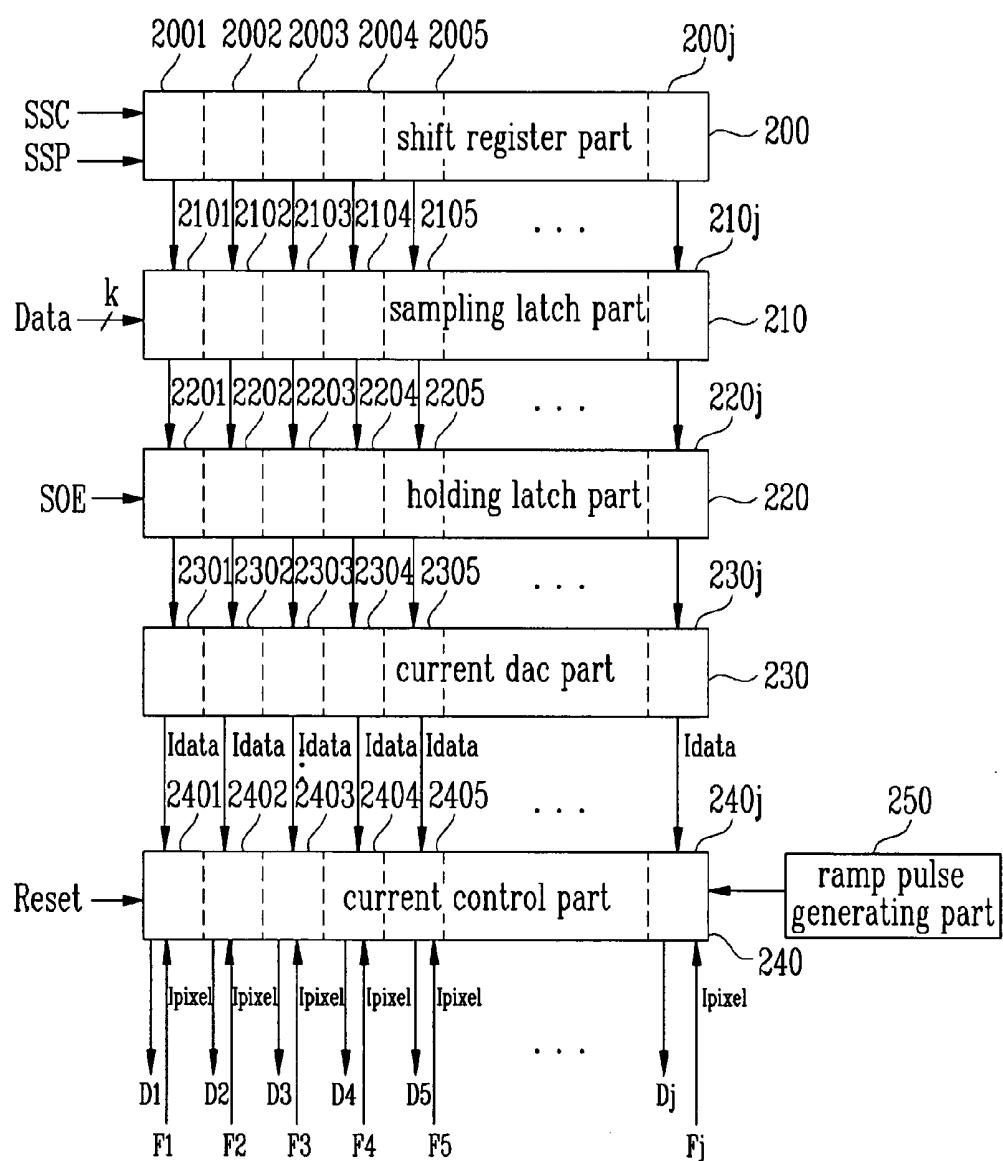
129

FIG. 4

129

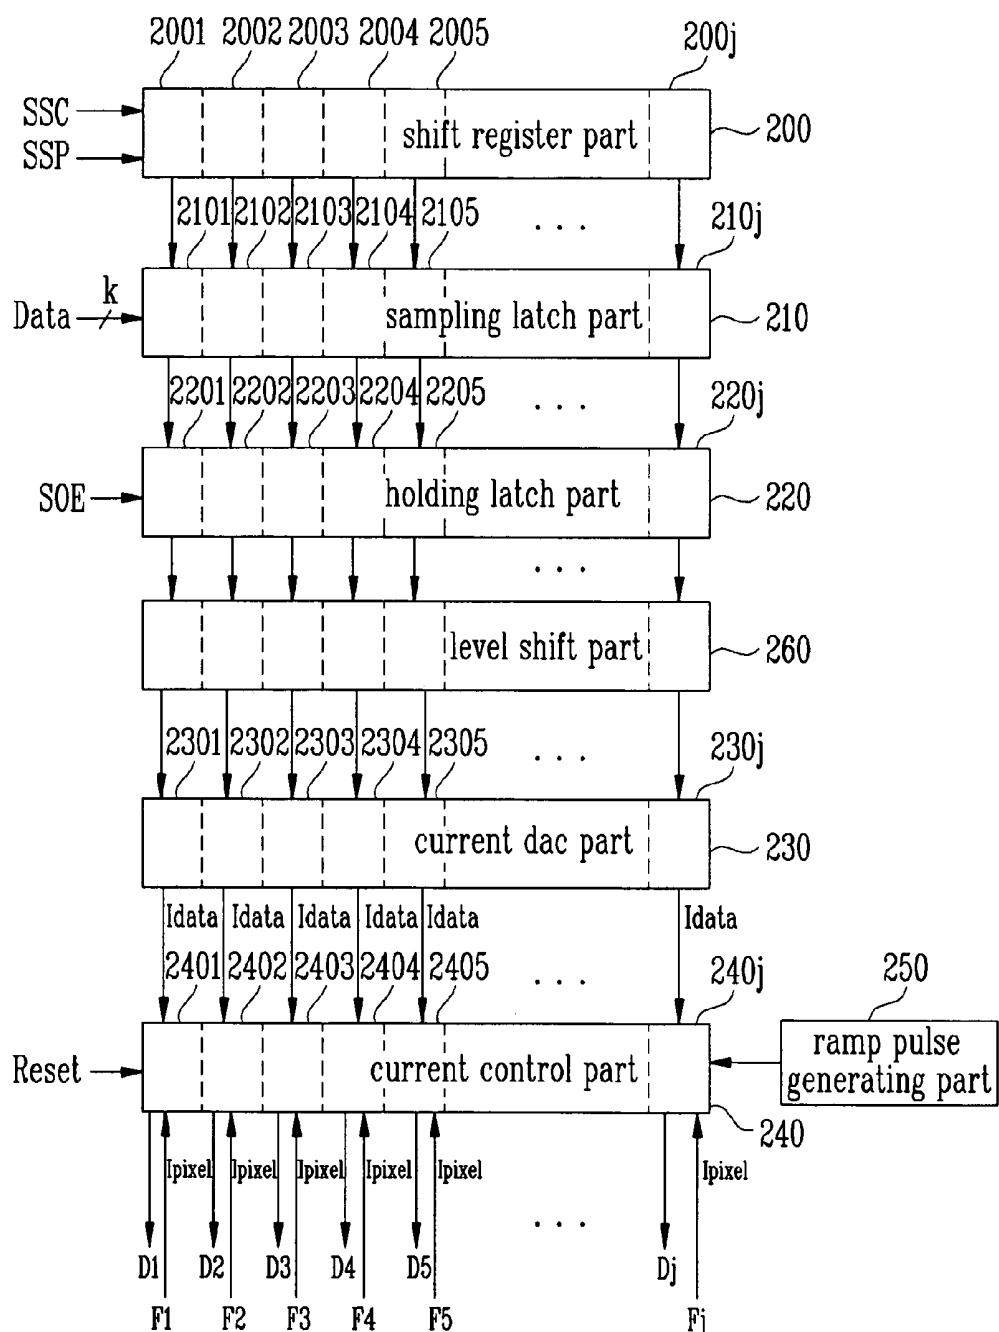


FIG. 5

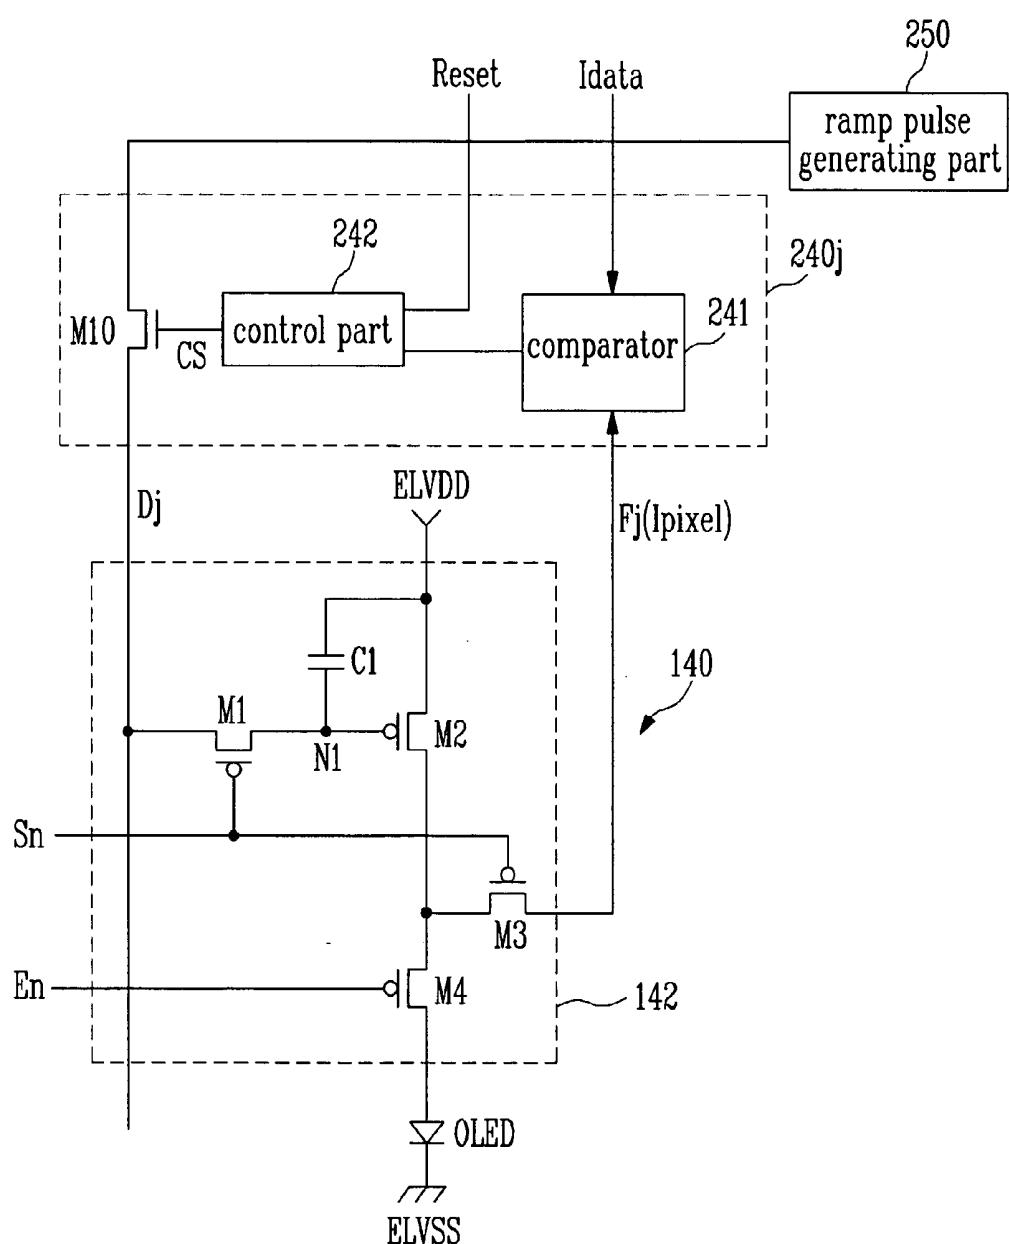


FIG. 6A

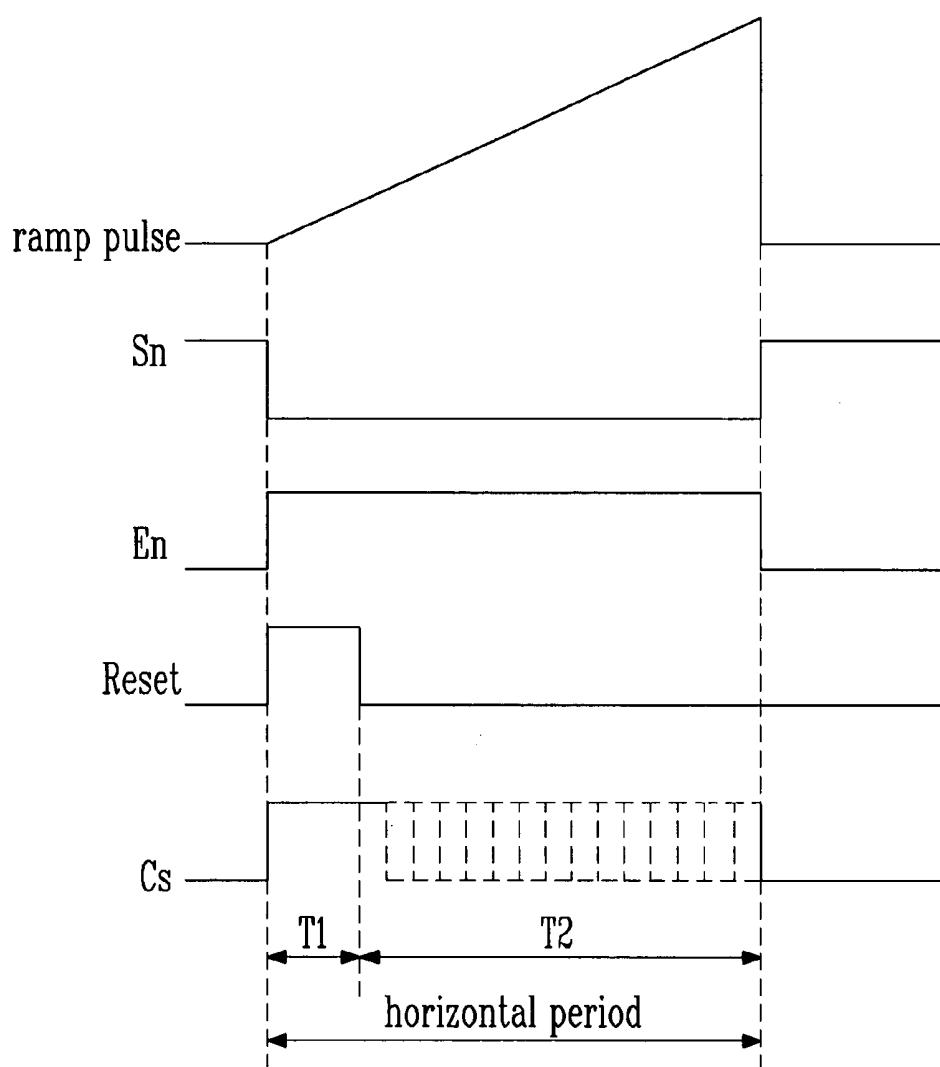


FIG. 6B

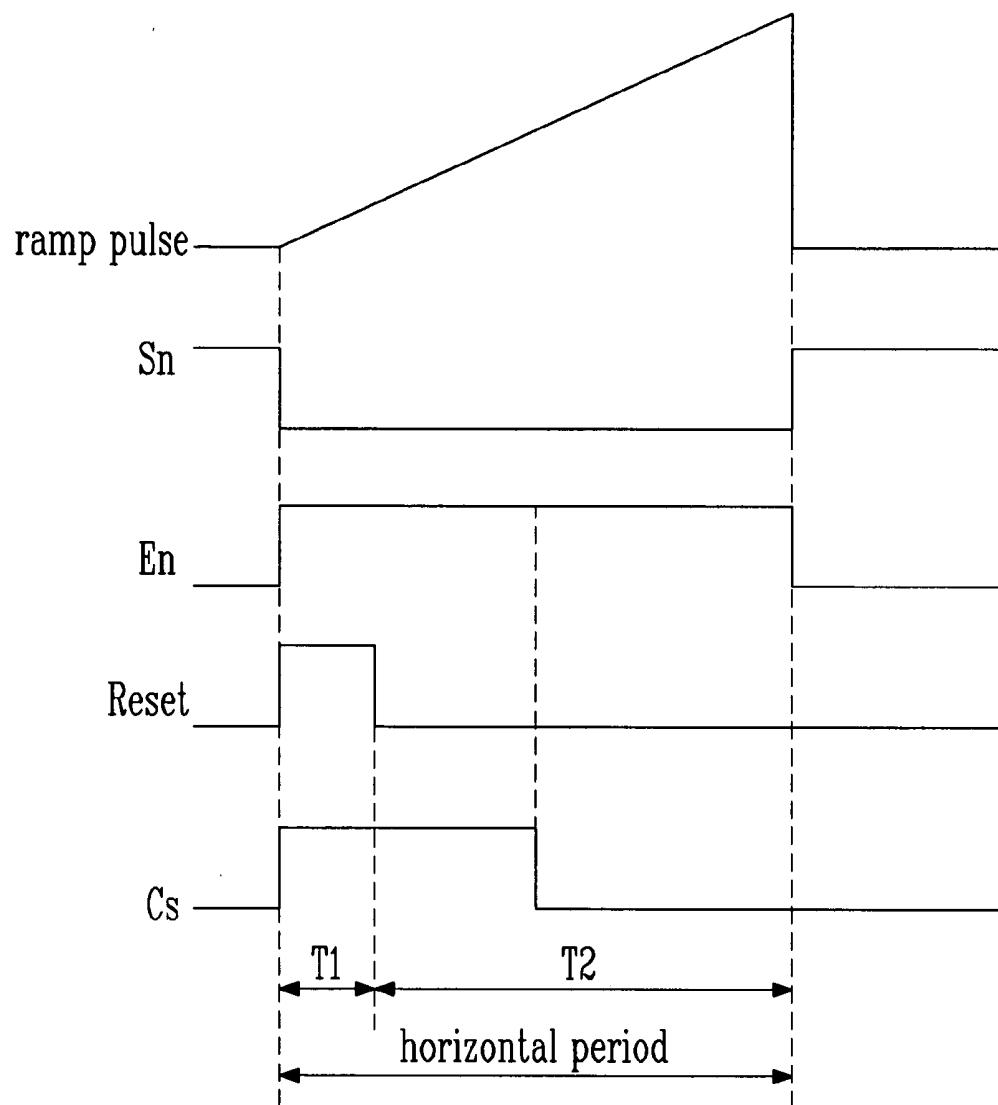
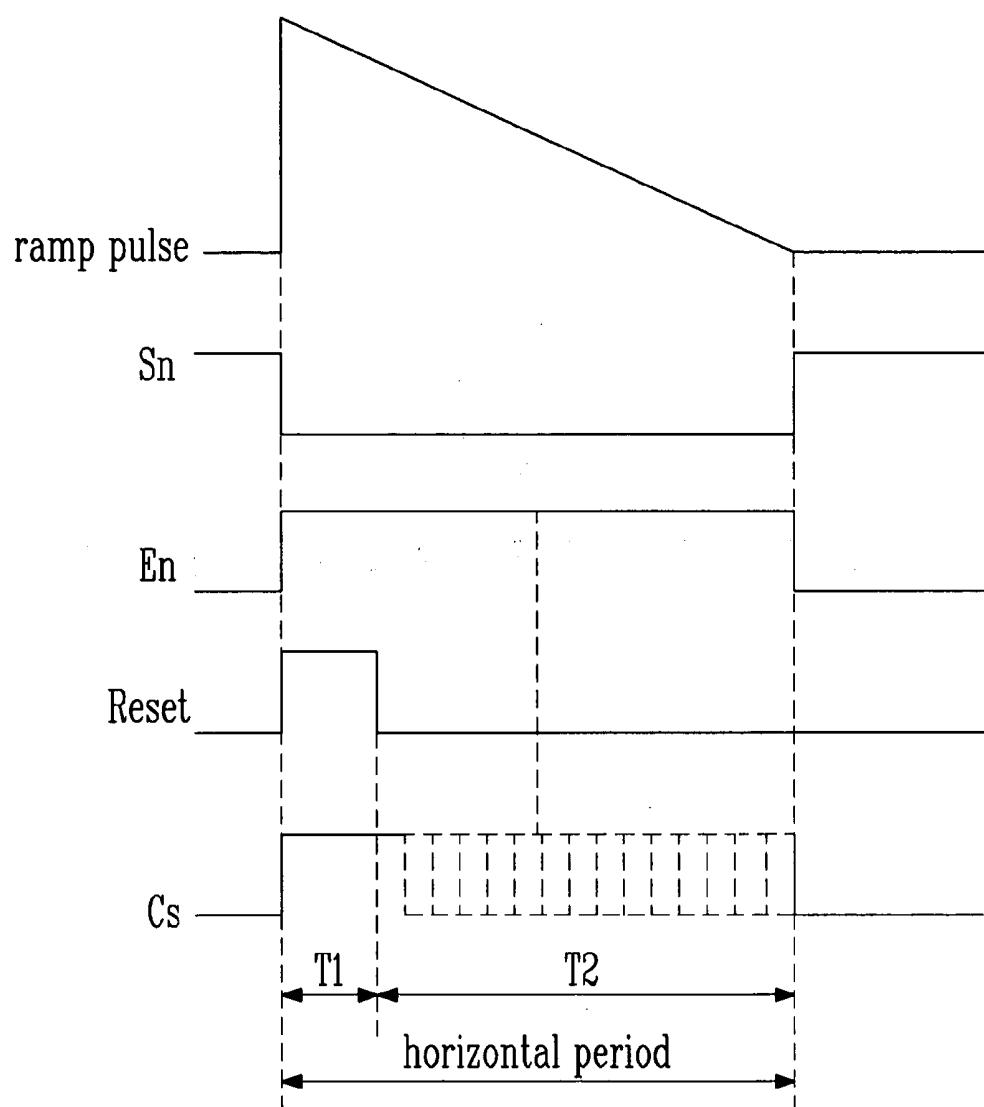


FIG. 7



## ORGANIC LIGHT EMITTING DISPLAY DEVICE AND DRIVING METHOD OF THE SAME

### CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to and the benefit of Korean Patent Application No. 10-2006-0019354, filed on Feb. 28, 2006, in the Korean Intellectual Property Office, the entire content of which is incorporated herein by reference.

### BACKGROUND

#### [0002] 1. Field of the Invention

[0003] The present invention relates to an organic light emitting display device and a driving method of the same. More particularly, the present invention relates to an organic light emitting display device and a driving method of the same for displaying an image of substantially uniform luminance.

#### [0004] 2. Discussion of Related Art

[0005] Recently, various flat panel display devices capable of having a reduced weight and volume as compared to display devices with cathode ray tubes (CRT) have been developed. Among the flat panel display devices, the organic light emitting display devices make use of organic light emitting diodes that emit light by re-combination of electrons and holes.

[0006] However, there has been a problem in that the differences of the threshold voltages of the transistors included in the pixels of the organic light emitting display devices and deviations in electron mobility have prevented the display of an image with substantially uniform luminance.

### SUMMARY OF THE INVENTION

[0007] In one embodiment of the present invention, a data driver of an organic light emitting display device having a plurality of feedback lines and a plurality of pixels, wherein each of the plurality of pixels coupled to a data line, is provided. The data driver includes a ramp pulse generating part for generating a ramp pulse to create a data signal in the data driver; and a current digital-to analog converting part for generating data currents using data received by the data driver. The data driver also includes a current control part for providing: the data signal to the data line of the organic light emitting display device; and comparing a pixel current generated in the plurality of pixels and output on a feedback line of the organic light emitting display device with the data current to control whether the data signal is further provided to the data line.

[0008] In one embodiment, the current control part includes a plurality of comparators, wherein each of the plurality of comparators is adapted to receive the pixel current generated in the plurality of pixels.

[0009] In some embodiments, the current control part includes a plurality of comparing parts. Each of the plurality of comparing parts includes a transistor coupled between the ramp pulse generating part and the data line. Each of the plurality of comparing parts also includes a comparator for comparing the pixel current with the data current; and a control part for controlling the transistor to be turned on or off corresponding to a comparison result of the comparator.

[0010] The control part allows the transistor to be turned on for a period while a reset signal is provided from a timing controller to the control part, wherein the first period is included in a horizontal period.

[0011] In some embodiments, the comparator provides a comparing signal when the data current and the pixel current are substantially different from each other, and ceases to provide the comparing signal when the data current is approximately equal to the pixel current.

[0012] In some embodiments, the control part allows the transistor to be turned off for a second period while the comparing signal ceases to be provided, wherein the second period is a period including a portion of the horizontal period that is not part of the first period. The data signal in the form of the ramp pulse is provided to the data line while the transistor is turned on, and ceases to be provided to the data line while the transistor is turned off.

[0013] In some embodiments, the ramp pulse has a voltage value that increases gradually, and in other embodiments, the ramp pulse has a voltage value that decreases gradually. In other embodiments, the data driver may also include a shift register part for generating a sampling signal; a sampling latch part for storing data provided to the sampling latch part in correspondence to the sampling signal; and a holding latch part for storing data stored in the sampling latch part. Further, in other embodiments, the data driver may also include a level shift part that is adapted to receive the data from the holding latch part and increase the voltage level of the received data.

[0014] In another embodiment of the present invention, an organic light emitting display device having a plurality of pixels coupled to data lines is provided. The device includes a plurality of pixels for receiving a data signal and outputting a pixel current to a feedback line of the organic light emitting display device; and a scan driver for providing: scanning signals to scan lines of the plurality of pixels and emission control signals to emission control lines of the plurality of pixels. The device also includes a data driver for: generating a data current in response to received data; applying the data signal to the data lines of the plurality of pixels; comparing the data current with the pixel current generated in the plurality of pixels to which the data signal is applied; and ceasing to apply the data signal to the data lines of the plurality of pixels when the pixel current is approximately equal to the data current.

[0015] In some embodiments, each of the plurality of pixels includes an organic light emitting diode; a first transistor for providing the data signal to a first node when the scanning signal is provided to the scan line; and a second transistor for providing the pixel current corresponding to a voltage value applied to the first node. In the embodiment, each of the plurality of pixels also includes a capacitor charged with a voltage corresponding to the voltage value applied to the first node; a third transistor for providing the pixel current to the feedback line when the scanning signal is provided to the scan line; and a fourth transistor that is turned on when the light emitting control signal is provided to the light emitting control line to provide the pixel current provided from the second transistor to the organic light emitting diode.

[0016] In some embodiments, the data driver of the device includes a ramp pulse generating part for generating a ramp pulse to create the data signal; and a current digital-to analog converting part for generating data currents using data

received by the data driver. The data driver also includes a current control part for: providing the data signal to the data line; and comparing the pixel current provided from the feedback line with the data current to control whether the data signal is further provided to the data line.

[0017] In some embodiments, the current control part includes a plurality of comparators, wherein each of the plurality of comparators is adapted to receive the pixel current generated in the plurality of pixels.

[0018] In some embodiments, the current control part includes a plurality of comparing parts wherein each of the plurality of comparing parts includes a tenth transistor which is coupled between the ramp pulse generating part and at least one of the data lines; and a comparator for comparing the pixel current with the data current. Each of the plurality of comparing parts may also include a control part for controlling the tenth transistor to be turned either on or off corresponding to a comparison result of the comparator.

[0019] In some embodiments, the control part controls the tenth transistor to be turned on for a first period when the control part receives a reset signal from a timing controller, wherein the first period is one part of a horizontal period.

[0020] In some embodiments, the comparator provides a comparing signal when the data current and the pixel current are substantially different from each other and ceases to provide the comparing signal when the data current is approximately equal to the pixel current. The control part controls the tenth transistor to be turned off when the providing of the comparing signal is ceased during a second period, wherein the second period including a portion of the horizontal period that is not part of the first period.

[0021] In some embodiments, the ramp pulse is provided to the data line while the tenth transistor is turned on the ramp pulse ceasing to be provided when the tenth transistor is turned off. In those embodiments, the capacitor is charged with a voltage corresponding to a voltage value of the ramp pulse when the tenth transistor is turned off. In some of these embodiments, the ramp pulse has a gradually increasing voltage value, and in other embodiments, the ramp pulse has a gradually decreasing voltage value. The data driver may also include a shift register part for generating a sampling signal; a sampling latch part for storing data provided from a timing controller corresponding to the sampling signal; and a holding latch part for temporarily storing data stored in the sampling latch part.

[0022] In another embodiment of the present invention, a method of driving an organic light emitting display device having a plurality of pixels and a data driver is provided. The method includes: applying a scanning signal to selected pixels of the plurality of pixels; applying a data signal to the selected pixels; and generating in the data driver data current corresponding to a data received by the data driver. The method also includes comparing the data current in the data driver with a pixel current generated in the selected pixels to which the data signal is applied; and ceasing to apply the data signal to the selected pixels when the pixel current is approximately equal to the data current.

[0023] In some embodiments, the data signal is a ramp pulse having a voltage value that gradually increases. In

other embodiments, the data signal is a ramp pulse having a voltage value that gradually decreases.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0024] FIG. 1 is a block diagram showing a conventional organic light emitting display device.

[0025] FIG. 2 is a block diagram showing an organic light emitting display device according to an embodiment of the present invention.

[0026] FIG. 3 is a block diagram showing the first embodiment of the data driving circuit depicted in FIG. 2.

[0027] FIG. 4 is a block diagram showing the second embodiment of the data driving circuit depicted in FIG. 2.

[0028] FIG. 5 is a block diagram showing embodiments of the comparing part and the pixel depicted in FIG. 3.

[0029] FIGS. 6a and 6b are illustrations of waveforms illustrating an operation of the comparing part and the pixel depicted in FIG. 5 according to a first embodiment.

[0030] FIG. 7 is an illustration of views of a waveform illustrating an operation of the comparing part and the pixel depicted in FIG. 5 according to a second embodiment.

#### DETAILED DESCRIPTION

[0031] FIG. 1 is a block diagram showing a conventional organic light emitting display device. The device includes a pixel portion 30, a scan driver 10, a data driver 20, and a timing controller 50. The pixel portion 30 includes a plurality of pixels 40 formed at a crossing area of scan lines S1 to Sn, emission control lines E1 to En (not shown), and data lines D1 to Dm. The scan driver 10 provides scan signals along scan lines S1 to Sn. The data driver 20 provides data signals along data lines D1 to Dm. The timing controller 50 controls the scan driver 10 and the data driver 20.

[0032] The timing controller 50 generates a data drive control signal DCS and a scan drive control signal SCS according to externally supplied synchronous signals. The data drive control signal DCS generated by the timing controller 50 is provided to the data driver 20, and the scan drive control signal SCS is provided to the scan driver 10. Furthermore, the timing controller 50 provides externally supplied data Data to the data driver 20.

[0033] The scan driver 10 generates a scan signal in response to the scan drive control signal SCS from the timing controller 50, and sequentially provides the generated scan signal to the scan lines S1 to Sn. The scan driver 10 generates an emission control signal in response to the scan drive control signal SCS from the timing controller 50, and sequentially provides the generated emission control signal to the emission control lines E1 to En.

[0034] The data driver 20 receives the data drive control signal DCS from the timing controller 50. Upon the receipt of the data drive control signal DCS, the data driver 20 generates data signals, and provides the generated data signals to the data lines D1 to Dm. In one embodiment, the data driver 20 provides the generated data signals to the data lines D1 to Dm every 1 horizontal period.

[0035] The pixel portion 30 receives a first voltage (ELVDD) from a first power supply and a second voltage (ELVSS) from a second power supply, both the first power supply and the second power supply being located at an exterior location relative to the pixel portion, and provides them to pixels 40. Upon the receipt of the ELVDD and the ELVSS, the pixels 40 control an amount of a current into the

second power supply through a light emitting element corresponding to the data signal, thus generating light corresponding to the data signal.

[0036] FIG. 2 is a block diagram showing an organic light emitting display device according to an embodiment of the present invention. The organic light emitting display device according to an embodiment of the present invention includes a pixel portion 130, a scan driver 110, a data driver 120 and a timing controller 150. The pixel portion 130 includes pixels 140 formed in areas divided by scan lines S1 through Sn, light emitting control lines E1 through En, data lines D1 through Dm and feedback lines F1 through Fm. The scan driver 110 is for driving scan lines S1 through Sn and light emitting control lines E1 through En. The data driver 120 is for driving data lines D1 through Dm and feedback lines F1 through Fm. The timing controller 150 is for controlling the scan driver 110 and the data driver 120.

[0037] The pixel portion 130 includes pixels 140 connected with the scan lines S1 through Sn, light emitting control lines E1 through En, data lines D1 through Dm and feedback lines F1 through Fm. In one embodiment, the scan lines S1 through Sn are formed in a horizontal direction and provide scanning signals to the pixels 140; the light emitting control lines E1 through En are formed in the horizontal direction and provide light emitting control signals to the pixels 140; and the data lines D1 through Dm are formed in a vertical direction and provide data signals having a type of ramp pulse. In the embodiment, the data signals, which are provided to the data lines D1 through Dm, have a voltage that gradually increases or decreases according to a ramp pulse. In the same embodiment, the feedback lines F1 through Fm are formed in the vertical direction and provide currents from the pixels 140 to the data driver 120.

[0038] The pixels 140 receive the first voltage (ELVDD) from the first power supply and the second voltage (ELVSS) from the second power supply, both the first power supply and the second power supply being at an exterior location relative to the pixels 140. The pixels 140 to which the ELVDD and the ELVSS are provided control pixel currents flowing through organic light emitting diodes from the first power supply to the second electrical power supply corresponding to the data signals provided from the data lines D1, D2, . . . , Dm. Since the data signals are provided in the form of ramp pulse, as time elapses, the pixel currents are gradually increased (or decreased). And, the pixels 140 provide the pixel currents to the feedback lines F when the data signals are provided to the data lines D1, D2, . . . , Dm.

[0039] The timing controller 150 generates a data driving control signal DCS and a scan driving control signal SCS corresponding to a synchronizing signal from an exterior location. The data driving control signal DCS is provided to the data driver 120 and the scan driving control signal SCS is provided to the scan driver 110. The timing controller 150 provides data from an exterior location to the data driver 120.

[0040] The scan driver 110 receives the scan driving control signal SCS from the timing controller 150. The scan driver 110, which receives the scan driving control signal SCS, generates a scanning signal and provides the scanning signal to the scan lines S1, S2, . . . , Sn.

[0041] The data driver 120 receives the data driving control signal DCS from the timing controller 150. The data driver 120 also receives a data signal of the type of ramp pulse to the data lines D1 through Dm to be synchronized

with the scanning signal. The data driver 120 also receives the pixel currents from each of pixels 140 through the feedback lines F1 through Fm. The data driver 120 determines whether the pixel current corresponds to the data current in the data driver. For example, when a data current is 10  $\mu$ A, the data driver 120 determines whether the pixel current which flows through each pixel 140 is approximately 10  $\mu$ A. When desirable currents flow through each pixel 140, the data driver 120 ceases to provide the data signal. The data driver 120 includes at least one data driving circuit 129 having j, wherein j is a positive integer. FIG. 2 shows an embodiment of a data driver 120 with two data driving circuits 129.

[0042] FIG. 3 is a block diagram of an embodiment of the data driving circuit 129 depicted in FIG. 2. The data driving circuit 129 includes a shift register part 200 for generating a sampling signal, a sampling latch part 210 for storing data in response to the sampling signal, a holding latch part 220 for temporarily storing data in the sampling latch part 210 and providing the stored data to a current Digital-to-Analog Converter (DAC) part 230, the current DAC part 230 for generating data currents Idata corresponding to bit values of data Data, a current control part 240 for comparing pixel currents Ipixel with the data currents Idata and controlling the supply of the data signal in accordance with the comparison result, and a ramp pulse generating part 250 for providing a ramp pulse.

[0043] The shift register part 200 receives a source shift clock SSC and a source start pulse SSP from the timing controller 150. The shift register part 200 shifts the source start pulse SSP every period of the source shift clock SSC and progressively generates j sampling signal(s). For doing this, the shift register part 200 has j shift register(s) 2001 through 200j.

[0044] The sampling latch part 210 progressively stores data Data in response to the sampling signals provided from the shift register part 200. The sampling latch part 210 has j sampling latch(s) 2101 through 210j for storing j data. And, each sampling latch 2101 through 210j has a size corresponding to bits of the data Data. For example, if the data Data includes k bits, the sampling latches 2101 through 210j are set to k-bit size.

[0045] The holding latch part 220 stores the data Data input from the sampling latch part 210 when a source outputting enable (SOE) signal is input into the holding latch part 220. The holding latch part 220 provides the stored data Data to the current DAC part 230 when the SOE signal is input into the holding latch 220. For doing this, the holding latch part 220 has j holding latch(s) 2201 through 220j, each of which is set to k-bit size.

[0046] The current DAC part 230 generates a data current Idata corresponding to the bit value of data (that is, the gradation value) and provides the data current Idata to the current control part 240. The term "data current" Idata as used herein means "a current that flows through the pixel 140 (not shown) as the data current Idata corresponds to the bit value of the data Data." The term "pixel currents" Ipixel as used herein means "currents flowing through the pixels 140 after pixels 140 receive the data signal." The pixel current Ipixel provided to the organic light emitting diode should be approximately equal to the data current Idata to display an image having a desirable luminance. The current DAC part 230 generates j data currents 2301 through 230j corresponding to j data provided from the holding latch part

**220.** For doing this, the current DAC part **230** includes j current DACs **2301** through **230j**.

**[0047]** The ramp pulse generating part **250** provides comparing parts **2401** through **240j** included in the current control part **240** with the ramp pulse, which is increased or decreased over time. The ramp pulse is provided via the comparing part **2401** through **240j** to data lines D1 through Dj as a data signal.

**[0048]** The current control part **240** provides the data lines D1 through Dj with the data signal as a ramp pulse provided from the ramp pulse generating part **250**. The current control part **240** receives the pixel current Ipixel, which corresponds to the data signal. The pixel current Ipixel is received from the pixel **140** (not shown). The current control part **240** compares the pixel current Ipixel with the data current Idata, and ceases to provide the data signal D1 through Dj when the pixel current Ipixel is approximately equal to the data current Idata. For doing this, the current control part **240** includes j comparing parts **2401** through **240j**. Also, the current control part **240** is provided with a reset signal Reset for one period of each horizontal period.

**[0049]** FIG. 4 is a block diagram showing the second embodiment of the data driving circuit depicted in FIG. 2. As compared with FIG. 3, the data driving circuit **129** further includes a level shift part **260** placed between the holding latch part **220** and the current DAC part **230**. The level shift part **260** causes the voltage level of data Data provided from the holding latch part **230** to be increased and provides it to the current DAC part **230**. If data Data having a high level voltage is input from an external system to the data driving circuit **129**, manufacturing costs may be increased because circuit parts corresponding to that voltage level must be installed. Therefore, data Data having a low voltage level is provided from the external system to the data driving circuit, and the level of data Data may be raised to a high voltage level in the level shift part **260**.

**[0050]** FIG. 5 is a block diagram of embodiments of structures of a comparing part and a pixel depicted in FIG. 3. For convenience of description, only comparing **240**; and one pixel are shown. The comparing part **240j** and the pixel **140** are coupled together by the j-th data line Dj and the jth feedback line Fj. The pixel **140** includes an organic light emitting diode (OLED) and a pixel circuit **142** for controlling a current provided to the OLED.

**[0051]** The OLED generates a light of a predetermined luminance corresponding to an amount of current provided from the pixel circuit **142**. For doing this, the pixel circuit **142** includes a first transistor M1, a second transistor M2, a third transistor M3 and a fourth transistor M4 and a capacitor C1. In one embodiment, the OLED generates a red light, a green light or a blue light corresponding to the amount of current provided from the pixel circuit **142**.

**[0052]** The first electrode of the first transistor M1 is coupled to the data line Dj and the second electrode of M1 is coupled to a first node N1. The gate of the first transistor M1 is coupled to the scan line Sn. The first transistor M1 is turned on to provide the data signal provided from the data line Dj to the first node N1 when the scanning signal is provided to M1. One of the source and the drain is set as the first electrode, and the other is set as the second electrode. For example, if the source is set as the first electrode, the second electrode is the drain.

**[0053]** The first electrode of the second transistor M2 is coupled to the first power source (ELVDD), and the second

electrode of M2 is coupled to the first electrode of the fourth transistor M4. The gate of the second transistor M2 is coupled to the first node N1. The second transistor M2 provides a predetermined current to the fourth transistor M4 corresponding to a voltage charged in the capacitor C1.

**[0054]** The first electrode of the third transistor M3 is coupled to the second electrode of the second transistor M2, and the second electrode of M3 is coupled to feedback line Fj. The gate of the third transistor M3 is coupled to the scan line Sn. When a scanning signal is provided to the third transistor M3, the third transistor M3 is turned on to provide the pixel current from the second transistor M2 to the feedback line Fj.

**[0055]** The first electrode of the fourth transistor M4 is coupled to the second electrode of the second transistor M2. The gate of the fourth transistor M4 is coupled to a light emitting control line En. The fourth transistor M4 is turned off in a case that the light emitting control signal is provided to the light emitting control line En, and in the other cases, the transistor M4 is turned on to allow the second electrode of the second transistor M2 and the OLED to be in electrical connection with each other. Therefore, when the fourth transistor M4 is turned on, the pixel current is provided from the second transistor M2 to the OLED. This operation of the pixel **140** is described in detail later on.

**[0056]** The comparing part **240j** includes a comparator **241**, a control part **242** and a tenth transistor M10. The comparator **241** compares the pixel current Ipixel from the feedback line Fj with the data current Idata from the current DAC part **230** (not shown). The comparator **241** generates a comparison signal and provides it to the control part **242** when a current value of the pixel current Ipixel is substantially different from that of the data current Idata. And, the comparator **241** ceases to provide the comparison signal to the control part **242** when the current value of the pixel current Ipixel is approximately equal to that of the data current Idata.

**[0057]** In one embodiment, either the reset signal or the comparison signal is provided to the control part **242**. The control part **242** provides a control signal CS to the tenth transistor M10 to turn the tenth transistor M10 on. In other embodiments, the control part **242** causes the tenth transistor M10 to be turned off. For doing this, the control part **242** may be implemented with a logic gate. In one embodiment, the control part **242** is implemented by combining at least one or more of an OR gate, an AND gate, a NAND gate or a NOR gate.

**[0058]** When the tenth transistor M10 is turned on, the ramp pulse from the ramp pulse generating part **250** is provided to the data line Dj as the data signal. When the tenth transistor M10 is turned off, the data signal is not provided.

**[0059]** FIG. 6a is an illustration of a driving waveform provided to the comparing part and the pixel depicted in FIG. 5. Describing the operation in connection with FIG. 5 and FIG. 6a, the scanning signal is provided to the scan line Sn during a particular horizontal period, and during the same horizontal period, the light emitting control signal is provided to the light emitting control line En. When the light emitting control signal is provided to the light emitting control line En, the fourth transistor M4 is turned on. When the scanning signal is provided to the scan line Sn, the first transistor M1 and third transistor M3 are turned on.

[0060] The reset signal Reset is provided to the control part 242 for the first period T1 of the horizontal period. Then, for the first period T1, the control signal CS is provided to the tenth transistor M10 to be turned on. If the tenth transistor M10 is turned on, the ramp pulse, which is provided from the ramp pulse generating part 250, is provided to the data line Dj.

[0061] The ramp pulse provided to the data line Dj is provided via the first transistor M1 to the first node N1. At this time, the capacitor C1 is charged with a voltage being progressively increased corresponding to the ramp pulse provided to the first node N1. The second transistor M2 provides the predetermined pixel current Ipixel that corresponds to the voltage of the ramp pulse applied to the first node N1 through the third transistor M3 to the feedback line Fj.

[0062] The comparator 241 compares the pixel current Ipixel with the data current Idata. If the value of the pixel current Ipixel is not approximately equal to that of the data current Idata, the comparator 241 provides the comparison signal to the control part 242. The control part 242, upon receiving the comparison signal, provides the control signal CS to the tenth transistor M10 to remain at the turned-on state.

[0063] When the comparator 241 determines that the value of the pixel current Ipixel is, upon receiving the comparison signal, equal to that of the data current Idata, the comparator 241 ceases to provide the comparison signal. Then, the control part 242 causes the tenth transistor M10 to be turned off at the time that the comparison signal is provided to the control part 242. In other words, at the time that the value of the pixel current Ipixel is approximately equal to that of the data current Idata, the control part 242 ceases to provide the control signal CS to the tenth transistor M10 to allow the tenth transistor M10 to be turned off. For example, in connection with FIG. 6b, at a particular time point during the second period T2, the control part 242 ceases to provide the control signal CS.

[0064] When the tenth transistor M10 is turned off, the supply of the ramp pulse is stopped. The capacitor C1 of the pixel 140 is charged with the voltage corresponding to the ramp pulse provided before the tenth transistor M10 is turned off.

[0065] The supply of the scanning signal is ceased after the particular horizontal period. Accordingly, the first transistor M1 and the third transistor M3 are turned off. The fourth transistor M4 is turned on after the horizontal period. If the fourth transistor M4 is turned on, the pixel current corresponding to the charged voltage in the capacitor C1 is provided to the OLED such that a light of a predetermined luminance is generated from the OLED.

[0066] As described above, according to the present invention, the pixel current flowing through the pixel is fed back to the comparing part 240j and by comparing the feedback current with the data current, the value of the voltage charged in the pixel may be controlled. When the value of the voltage charged in the pixel is controlled by feeding back the pixel current flowing through the pixel 140, an image of uniform luminance can be displayed without regard to threshold voltages of transistors M1, M2, M3, M4 included in the pixel 140 and any deviation of electron mobility. In conventional organic light emitting display

devices, the data signal is generated from channels different from one another such that it is difficult to display an image with a uniform luminance.

[0067] The ramp pulse provided from the ramp pulse generating part 250 may be set to various types of ramps. In one embodiment, the ramp pulse generating part 250, as shown in FIG. 7, generates a ramp pulse having a gradually decreasing voltage value. Though the ramp pulse having a gradually decreasing voltage value is provided to the data line Dj, the pixels 140 can stably display a uniform image.

[0068] As described above, the organic light emitting display device and the driving method for the same according to embodiments of the present invention is provided. A ramp pulse is provided as a data signal and a pixel current corresponding to the provided ramp pulse is feedback from the pixel. After this, the feedback pixel current and the data current are compared with each other, and when it is determined that two current values are approximately equal to each other, the supply of the data signal is ceased. That is, by stopping the supply of the data signal when a desirable pixel current flows through the pixel, the device may be able to uniformly display an image of a desirable luminance without regard to threshold voltages of transistors in the pixel, the deviation of electron mobility, etc. Since the ramp pulse generated from one ramp pulse generating part is provided to all data lines, a uniform image may be displayed without a substantial voltage deviation.

[0069] Although exemplary embodiments of the present invention have been shown and described, it would be appreciated by those skilled in the art that changes might be made in these embodiment without departing from the principles and spirit of the invention, the scope of which is defined in the claims and their equivalents.

What is claimed is:

1. A data driver of an organic light emitting display device, the device having a plurality of pixels, each of the plurality of pixels being coupled to a data line, the data driver comprising:

a ramp pulse generating part for generating a ramp pulse to create a data signal in the data driver;

a current digital-to-analog converting part for generating data currents using data received by the data driver, a current control part for:

providing the data signal to the data line of the organic light emitting display device; and

comparing a pixel current generated in the plurality of pixels and output on the feedback line of the organic light emitting display device with the data current to control whether the data signal is further provided to the data line.

2. The data driver as claimed in claim 1, wherein the current control part comprises a plurality of comparators, wherein each of the plurality of comparators is adapted to receive the pixel current generated in the plurality of pixels.

3. The data driver as claimed in claim 2, wherein the current control part comprises a plurality of comparing parts, wherein each of the plurality of comparing parts includes:

a transistor coupled between the ramp pulse generating part and the data line;

a comparator for comparing the pixel current with the data current; and

a control part for controlling the transistor to be turned on or off corresponding to a comparison result of the comparator.

4. The data driver as claimed in claim 3, wherein the control part allows the transistor to be turned on for a first period while a reset signal is provided from a timing controller to the control part, the first period being included in a horizontal period.

5. The data driver as claimed in claim 4, wherein the comparator provides a comparing signal when the data current and the pixel current are substantially different from each other, and ceases to provide the comparing signal when the data current is approximately equal to the pixel current.

6. The data driver as claimed in claim 5, wherein the control part allows the transistor to be turned off for a second period while the comparing signal ceases to be provided, the second period including a portion of the horizontal period not part of the first period.

7. The data driver as claimed in claim 6, wherein the data signal in the form of the ramp pulse is provided to the data line while the transistor is turned on, and ceases to be provided to the data line while the transistor is turned off.

8. The data driver as claimed in claim 1, wherein the ramp pulse has a gradually increasing voltage value.

9. The data driver as claimed in claim 1, wherein the ramp pulse has a gradually decreasing voltage value.

10. The data driver as claimed in claim 1, further comprising:

- a shift register part for generating a sampling signal;
- a sampling latch part for storing data provided to the sampling latch part in correspondence to the sampling signal; and
- a holding latch part for storing data stored in the sampling latch part.

11. The data driver as claimed in claim 10, further comprising a level shift part that is adapted to:

- receive the data stored in the holding latch part; and
- increase a voltage level of received data.

12. An organic light emitting display device having a plurality of pixels being coupled to data lines comprising:

- a plurality of pixels for receiving a data signal and outputting a pixel current to a feedback line of the organic light emitting display device;
- a scan driver for providing:

- scanning signals to scan lines of the plurality of pixels; and

- emission control signals to emission control lines of the plurality of pixels; and

- a data driver for:

- generating a data current in response to received data;
- applying the data signal to the data lines of the plurality of pixels;

- comparing the data current with the pixel current generated in the plurality of pixels to which the data signal is applied; and

- ceasing to apply the data signal to the data lines of the plurality of pixels when the pixel current is approximately equal to the data current.

13. The organic light emitting display device as claimed in claim 12, wherein each of the plurality of pixels includes:

- an organic light emitting diode;

- a first transistor for providing the data signal to a first node when the scanning signal is provided to the scan line;

- a second transistor for providing the pixel current corresponding to a voltage value applied to the first node;

- a capacitor charged with a voltage corresponding to the voltage value applied to the first node;

a third transistor for providing the pixel current to the feedback line when at least one of the scanning signals is provided to at least one of the scan lines; and

a fourth transistor that is turned on when at least one of the light emitting control signals is provided to at least one of the light emitting control lines to provide the pixel current provided from the second transistor to the data driver.

14. The organic light emitting display device as claimed in claim 13, wherein the data driver comprises:

- a ramp pulse generating part for generating a ramp pulse to create the data signal;

- a current digital-to analog converting part for generating data currents using data received by the data driver; and
- a current control part for:

- providing the data signal to the data line; and
- comparing the pixel current provided from the feedback line with the data current to control whether the data signal is further provided to the data line.

15. The organic light emitting display device as claimed in claim 14, wherein the current control part comprises a plurality of comparators, wherein each of the plurality of comparators is adapted to receive the pixel current generated in the plurality of pixels.

16. The organic light emitting display device as claimed in claim 15, wherein the current control part comprises a plurality of comparing parts, wherein each of the plurality of comparing parts includes:

- a tenth transistor coupled between the ramp pulse generating part and at least one of the data lines;

- a comparator for comparing the pixel current with the data current; and

- a control part for controlling the tenth transistor to be turned either on or off corresponding to a comparison result of the comparator.

17. The organic light emitting display device as claimed in claim 16, wherein the control part controls the tenth transistor to be turned on for a first period when the control part receives a reset signal from a timing controller, wherein the first period is one part of a horizontal period.

18. The organic light emitting display device as claimed in claim 17, wherein the comparator provides a comparing signal when the data current and the pixel current are substantially different from each other and ceases to provide the comparing signal when the data current is approximately equal to the pixel current.

19. The organic light emitting display device as claimed in claim 18, wherein the control part controls the tenth transistor to be turned off when the providing of the comparing signal is ceased during a second period, wherein the second period includes a portion of the horizontal period not part of the first period.

20. The organic light emitting display device as claimed in claim 19, wherein the ramp pulse is provided to the data line while the tenth transistor is turned on and the ramp pulse ceases to be provided to the data line when the tenth transistor is turned off.

21. The organic light emitting display device as claimed in claim 19, wherein the capacitor is charged with a voltage corresponding to a voltage value of the ramp pulse when the tenth transistor is turned off.

22. The organic light emitting display device as claimed in claim 12, wherein the ramp pulse has a gradually increasing voltage value.

**23.** The organic light emitting display device as claimed in claim **12**, wherein the ramp pulse has a gradually decreasing voltage value.

**24.** The organic light emitting display device as claimed in claim **14**, wherein the data driver further comprises: a shift register part for generating a sampling signal; a sampling latch part for storing data, wherein the data corresponds to the sampling signal; and a holding latch part for temporarily storing data stored in the sampling latch part.

**25.** A method of driving an organic light emitting display device having a plurality of pixels and a data driver, the method comprising:  
applying a scanning signal to selected pixels of the plurality of pixels;  
applying a data signal to the selected pixels;

generating in the data driver data current corresponding to data received by the data driver;  
comparing the data current in the data driver with a pixel current generated in the selected pixels to which the data signal is applied; and  
ceasing to apply the data signal to the selected pixels when the pixel current is approximately equal to the data current.

**26.** The organic light emitting display device as claimed in claim **25**, wherein the data signal is a ramp pulse having a gradually increasing voltage value.

**27.** The organic light emitting display device as claimed in claim **25**, wherein the data signal is a ramp pulse having a gradually decreasing voltage value.

\* \* \* \* \*

专利名称(译)	有机发光显示装置及其驱动方法		
公开(公告)号	<a href="#">US20070200804A1</a>	公开(公告)日	2007-08-30
申请号	US11/601180	申请日	2006-11-16
[标]申请(专利权)人(译)	KWON OH KYONG		
申请(专利权)人(译)	KWON OH KYONG		
当前申请(专利权)人(译)	KWON OH KYONG		
[标]发明人	KWON OH KYONG		
发明人	KWON, OH KYONG		
IPC分类号	G09G3/20		
CPC分类号	G09G3/2014 G09G3/3233 G09G3/3291 G09G2300/0417 G09G2300/043 G09G2320/043 G09G2300/0861 G09G2310/066 G09G2320/0233 G09G2320/029 G09G2320/0295 G09G2300/0842 E02B7/44		
优先权	1020060019354 2006-02-28 KR		
其他公开文献	US7834826		
外部链接	<a href="#">Espacenet</a>	<a href="#">USPTO</a>	

### 摘要(译)

提供一种有机发光显示装置及其驱动方法。该设备包括数据驱动器，该数据驱动器可以使得具有均匀亮度的图像的显示。数据驱动器包括斜坡脉冲发生部分，用于产生斜坡脉冲。数据驱动器还包括当前数字 - 模拟转换部分，用于使用提供给数据驱动器的数据产生数据电流。数据驱动器还包括电流控制部分，用于将斜坡脉冲提供给耦合到像素的数据线，并将来自像素的像素电流与数据电流进行比较，以控制向数据线提供斜坡脉冲。像素电流对应于斜坡脉冲。

