



US 20070049828A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2007/0049828 A1**

Yao et al.

(43) **Pub. Date:** **Mar. 1, 2007**

(54) **METHOD AND APPARATUS FOR
ULTRASONIC IMAGING IN MMODE**

Publication Classification

(75) Inventors: **Bin Yao**, Nanshan (CN); **Jian Dong**, Nanshan (CN); **Yong Li**, Nanshan (CN)

(51) **Int. Cl.** **A61B 8/00** (2006.01)
(52) **U.S. Cl.** **600/443**

Correspondence Address:

SUGHRUE MION, PLLC
2100 PENNSYLVANIA AVENUE, N.W.
SUITE 800
WASHINGTON, DC 20037 (US)

(57) **ABSTRACT**

(73) Assignee: **SHENZHEN MINDRAY BIO-MEDICAL ELECTRONICS CO., LTD.**, Nanshan (CN)

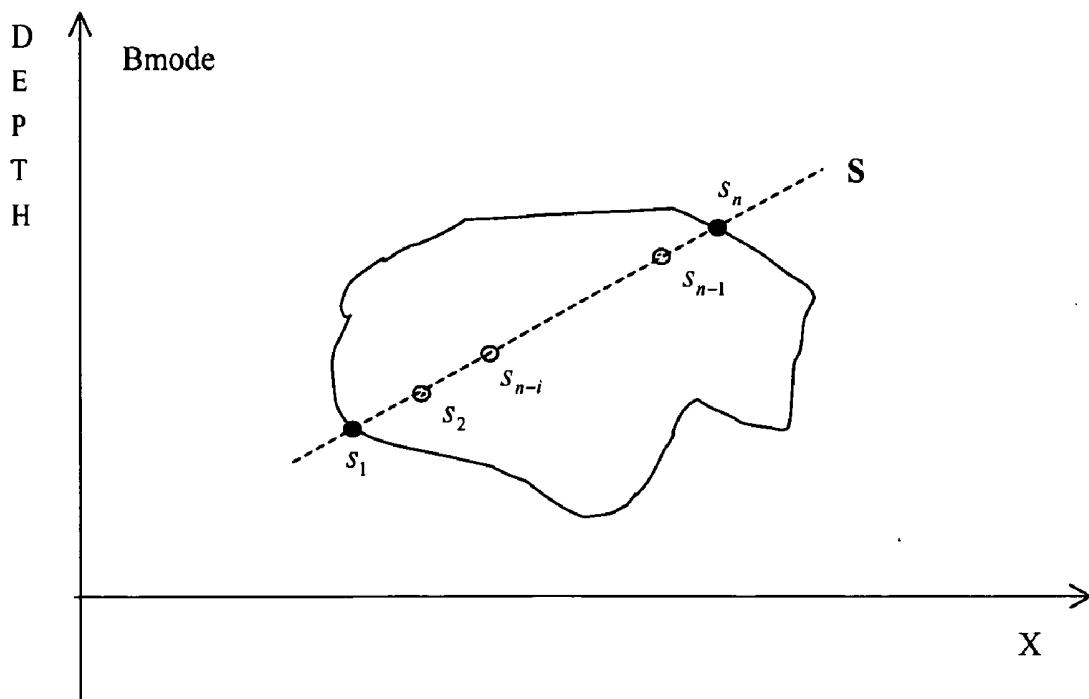
(21) Appl. No.: **11/323,701**

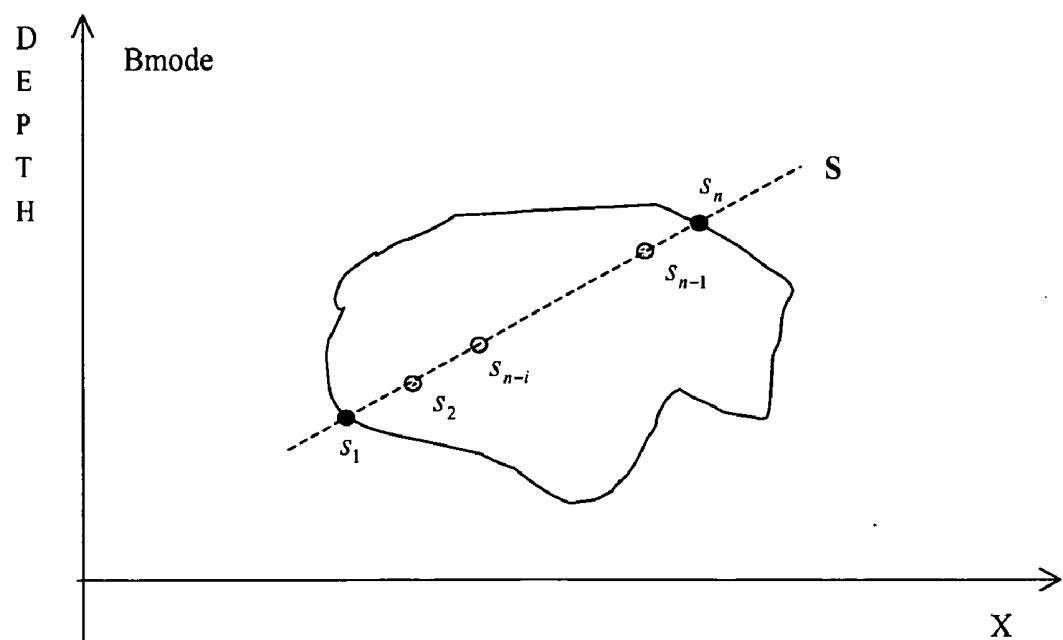
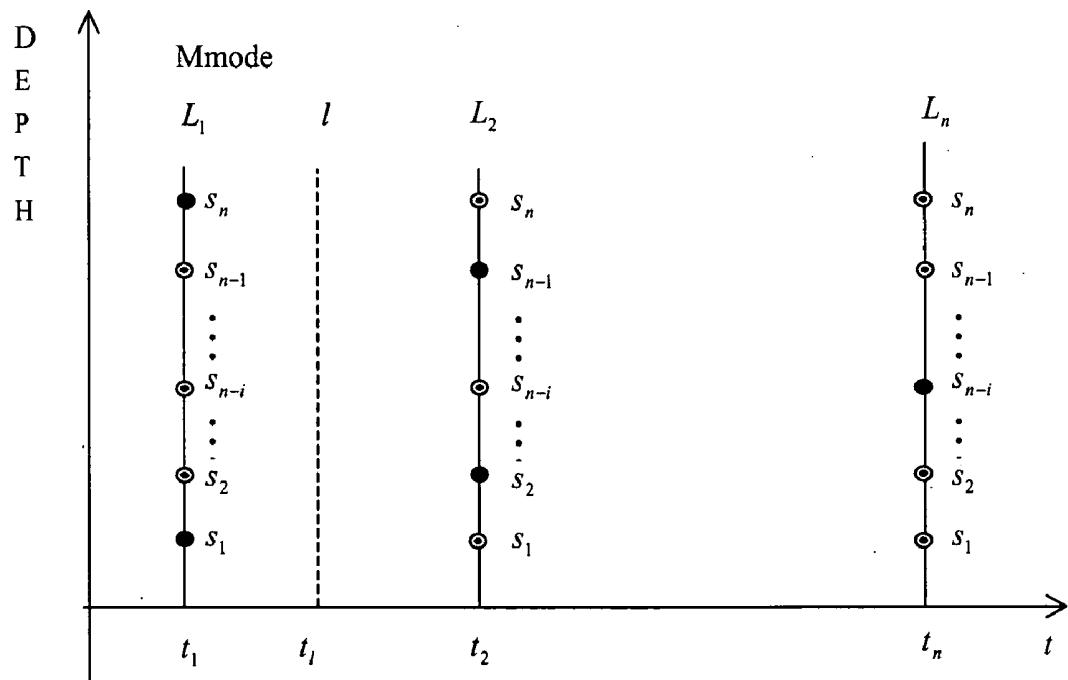
(22) Filed: **Dec. 30, 2005**

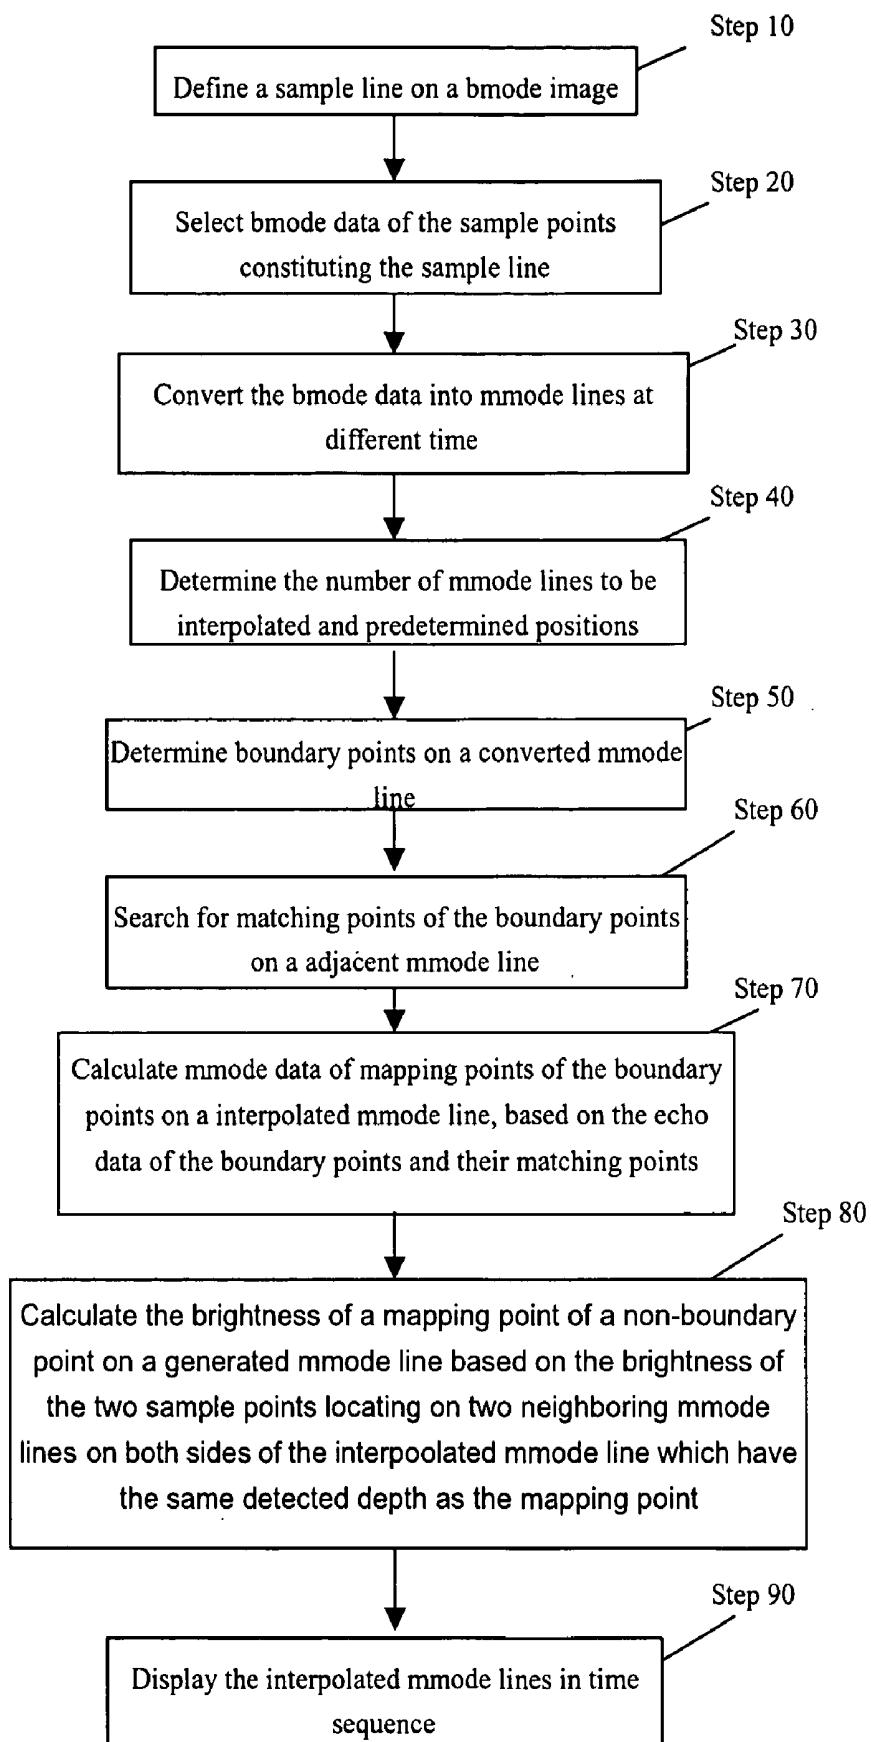
(30) **Foreign Application Priority Data**

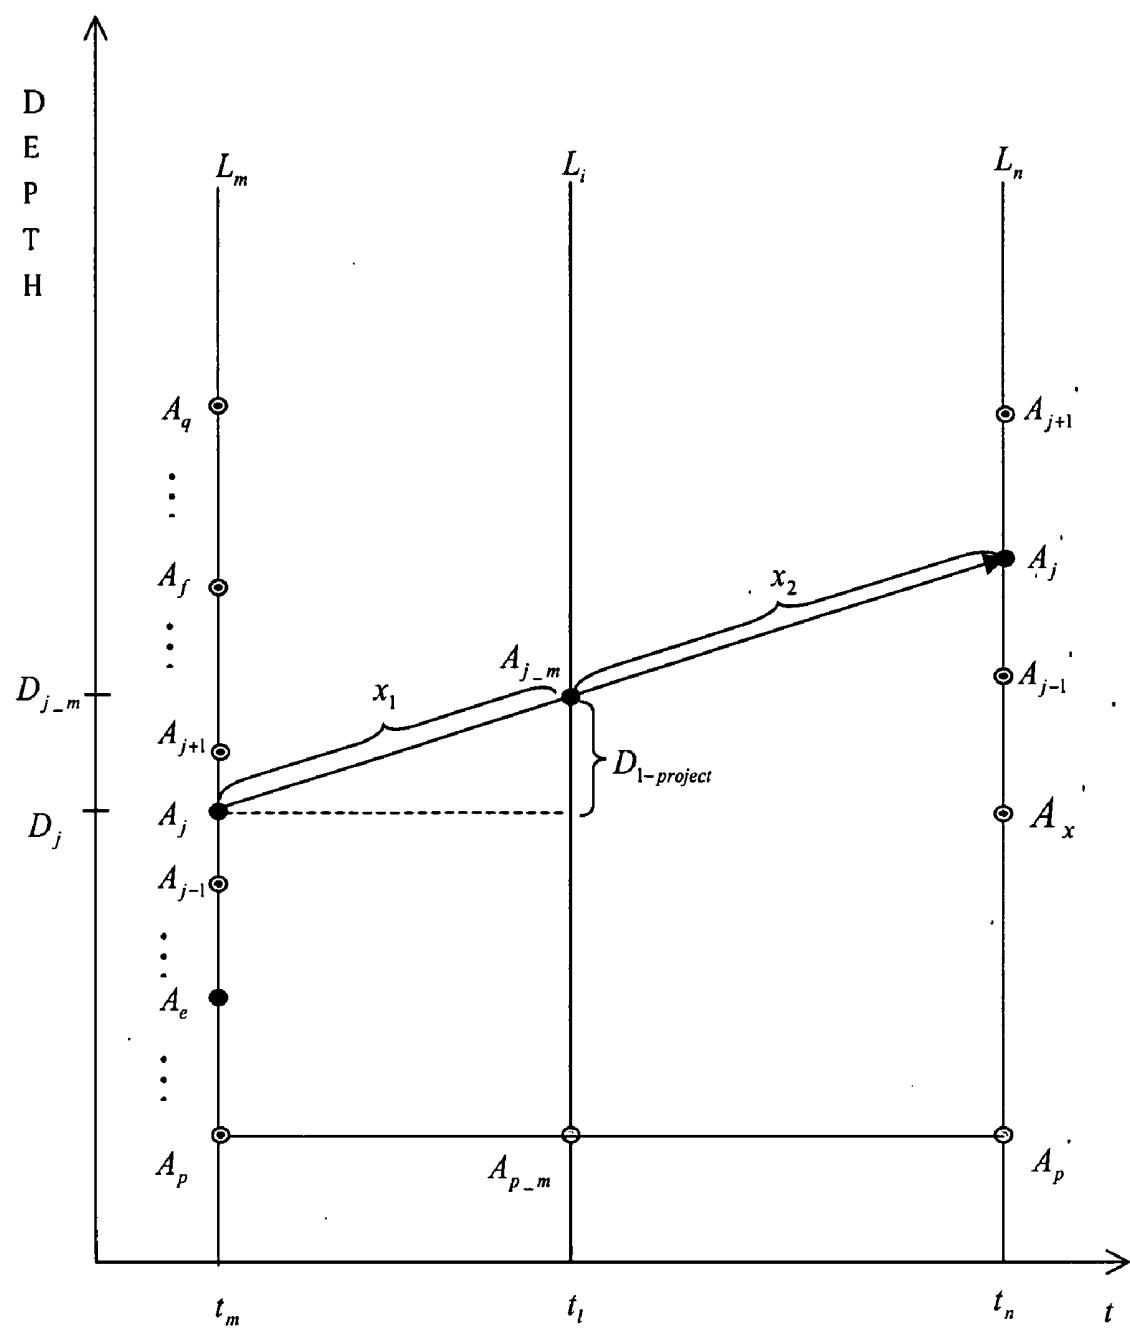
Aug. 29, 2005 (CN) 200510036992.4

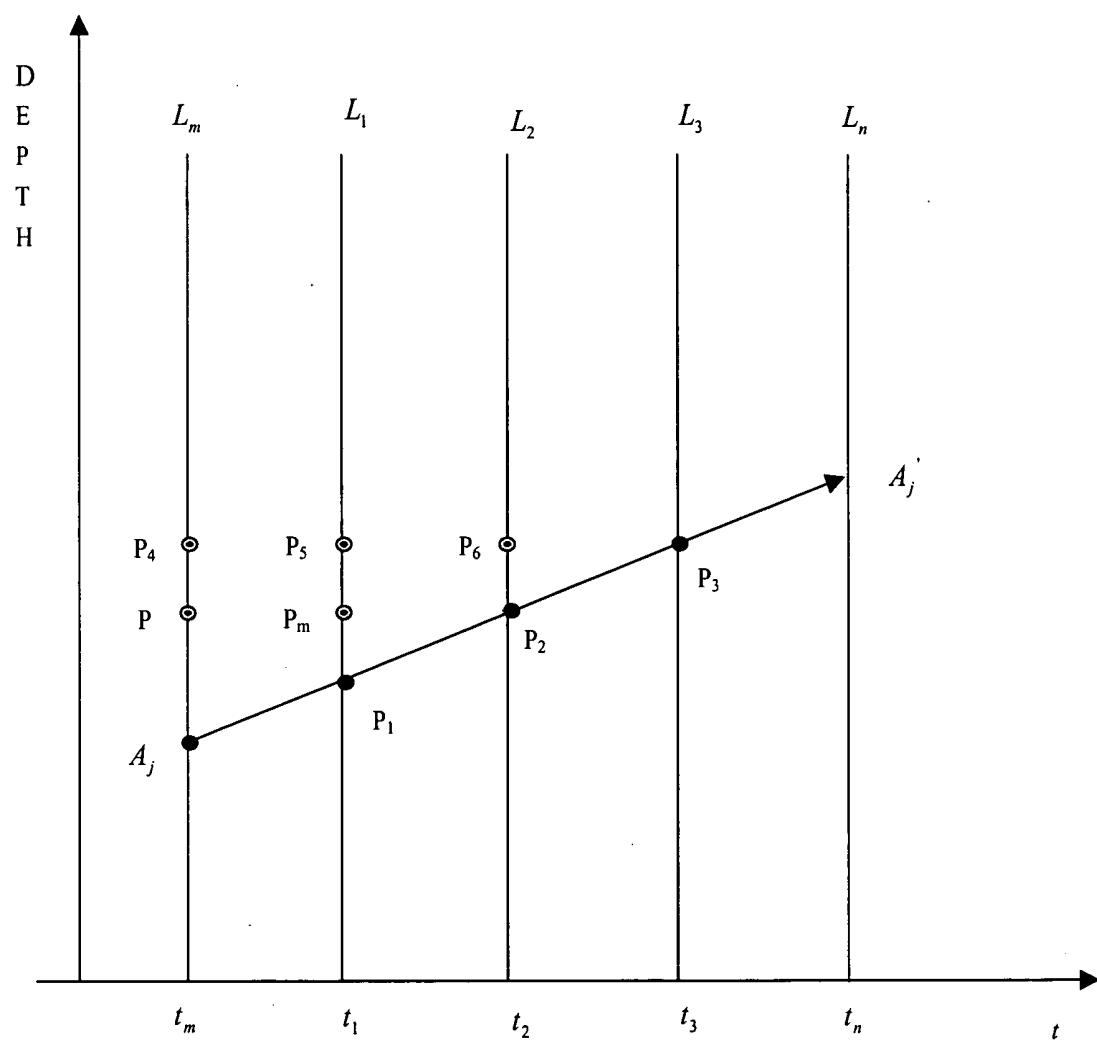
The present invention provides a mmode imaging method and apparatus for an ultrasonic diagnosis device to increase the continuity of the displayed mmode images. The mmode imaging method of the invention comprises steps: define a sample line on a frame of bmode image, so as to select bmode data of sample points constituting the sample line; convert the bmode data of the sample points obtained from two consecutive frames of bmode image into two of mmode lines arranged in time order in a mmode image; at predetermined positions between the two mmode lines, generate mmode data that constitute at least one mmode lines based on the echo data of corresponding sample points on the two mmode lines; and image the mmode data in time sequence.

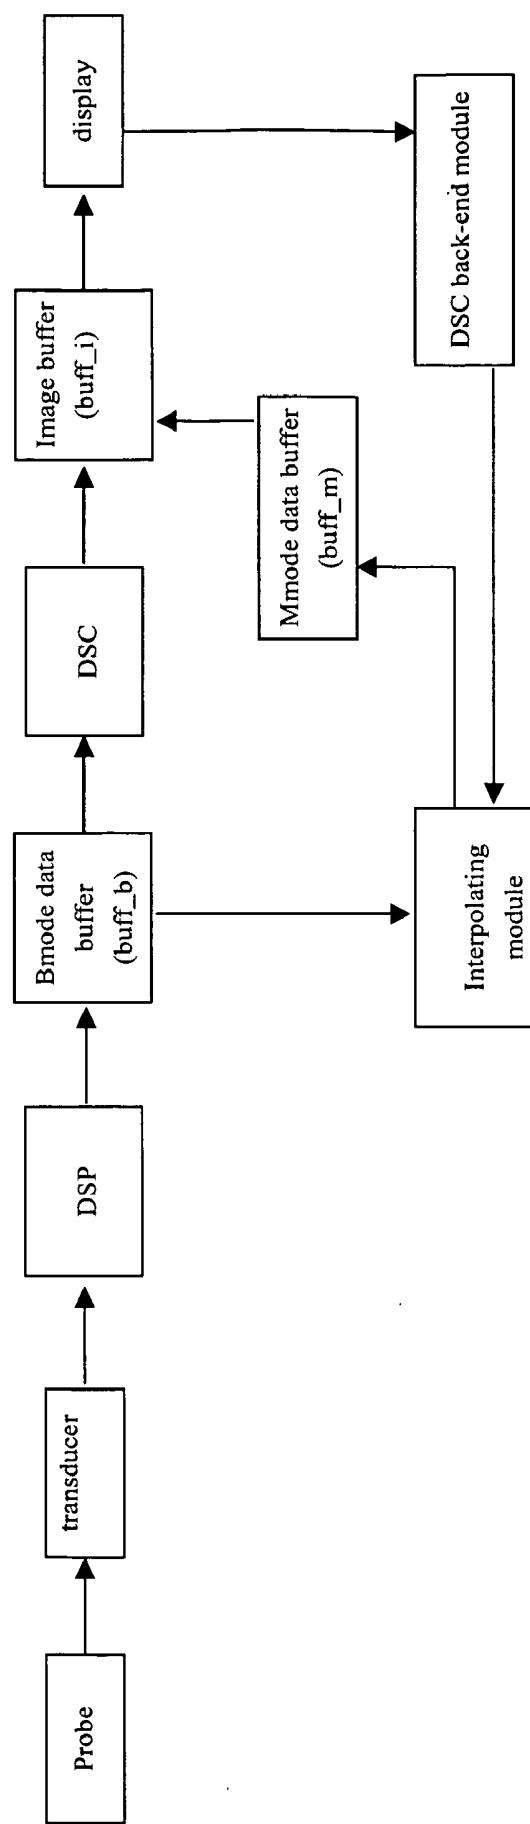


**FIGURE 1A****FIGURE 1B**

**FIGURE 2**

**FIGURE 3**

**FIGURE 4**

**FIGURE 5**

METHOD AND APPARATUS FOR ULTRASONIC IMAGING IN MMODE

TECHNICAL FIELD

[0001] The present invention relates to a method and apparatus for ultrasonic imaging in mmode used in an ultrasonic diagnosis system, more particularly, to an ultrasonic imaging method and apparatus for generating mmode displays from bmode data for generating bmode displays.

BACKGROUND OF THE INVENTION

[0002] Ultrasonic imaging is a method for imaging the interior structure of a living body, such as a human body, by transmitting ultrasonic into a human body and receiving echoes reflected from interfaces between tissues and organs having different acoustic characteristic impedances and imaging them based on the received echoes.

[0003] A bmode ultrasonic diagnosis device scans a living body one dimensionally with ultrasonic beams transmitted from a probe so as to image a cross section of tissues or organs being scanned. On the displayed cross section, brightness of points indicates amplitudes of echo signals (lighted points), X-axis demonstrates a distance over which the ultrasonic beams scan, and Y-axis demonstrates a detected depth into the tissues or organs.

[0004] A conventional mmode ultrasonic diagnosis device which provides images of time-motion type is generally used for observing the motion of a heart. In an operating status, a probe transmits ultrasonic beam from a fixed position and in a certain direction and receives the echo signals. On a mmode display, the brightness of each point constituting the display is proportional to the amplitude of the echo from the depth represented by the point. The Y-axis coordinate of each point represents the depth into a heart, for example, and the X-axis coordinate indicates time at which the data for that point is measured. Therefore, a mmode display shows traces of movement of tissues of a heart.

[0005] Modern ultrasonic diagnosis devices often show bmode and mmode together on the same display. By defining positions that need to be detected by a mmode probe on a bmode cross-section display, and detecting along the defined positions with a mmode probe, desired mmode images are obtained.

[0006] However, during a conventional mmode imaging process, due to the presence of lung or ribs, it's difficult to orient the ultrasonic beam transmitted from a probe to be normal to the wall of the heart being detected, which will deteriorate the accuracy of the resultant data; further, the heart cannot keep being in a constant angle from the ultrasonic beam, as a result, the echo signal from a same position on the surface of the heart has a varying intensity, that is, the displayed trace of movement of the surface of the heart has varying brightness, which in the worst cases might negatively affect judgement of a medicine doctor.

[0007] A patent application U.S. Pat. No. 6,589,175 B2 by PHILIPS discloses a mmode ultrasonic imaging method and apparatus, in which ultrasonic beams are transmitted and echoes are received to form conventional mmode images in the time intervals of producing a plurality of frames of bmode images, inevitably it will occupy the time originally for producing bmode images. To some extent, the method

and apparatus overcome the above-mentioned defaults of conventional mmode images, however it lowers the frame rate of bmode images, and obviously degrades the performance of apparatuses having low frame rate of bmode images.

[0008] Recently there is introduced an anatomical mmode or arbitrary mmode ultrasonic imaging method and apparatus. In this method, based on a sample line defined by a user on a displayed bmode image, bmode data (i.e., detected depth of echo signals and brightness corresponding to the amplitudes of the echoes) corresponding to each sample point included in the sample line are selected from each frame of bmode image. Then convert the bmode data selected from each frame of bmode image into a mmode line corresponding to a certain time in a mmode image, so as to produce a plurality of mmode lines arranged in time order to show the traces of movement of the interfaces that the sample line goes across.

[0009] However, in the case that the bmode images are measured at low frame rate, when producing anatomical mmode images from the bmode data, there will be a relatively big interval between adjacent mmode lines in a mmode image, as a result, the traces displayed in a mmode image are not continuous visually. This is not satisfying for observing organs such as a heart that moves fast.

DISCLOSURE OF THE INVENTION

[0010] One aspect of the invention is to provide a method and apparatus for ultrasonic imaging in mmode, by which the continuity of mmode images which are obtained based on low frame rate bmode data is increased.

[0011] A mmode imaging method according one embodiment of the invention comprises steps:

[0012] (a) defining a sample line on a frame of bmode image, so as to select bmode data of sample points constituting the sample line;

[0013] (b) converting the bmode data of the sample points obtained from two consecutive frames of bmode image into two of mmode lines arranged in time order in a mmode image;

[0014] (c) at predetermined positions between the two mmode lines, generating mmode data that constitute at least one mmode lines based on the echo data of corresponding sample points on the two mmode lines;

[0015] (d) imaging the mmode data in time sequence.

[0016] The other aspects and effects of this invention will be apparent and the present invention will be fully understood through the description taking reference to the following drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] The embodiments of the invention will be described in detail with reference to the drawings, wherein,

[0018] FIG. 1A is a simplified diagram showing a defined sample line on a displayed bmode image according to one embodiment of the invention;

[0019] FIG. 1B is a schematic diagram showing a mmode image converted based on bmode images according to one embodiment of the invention;

[0020] FIG. 2 is a flowchart showing steps for producing continuous mmode images based on bmode data according to one embodiment of the invention;

[0021] FIG. 3 is a schematic diagram demonstrating the principle for producing continuous mmode images based on bmode data according to one embodiment of the invention;

[0022] FIG. 4 is a schematic diagram demonstrating the principle for producing continuous mmode images based on bmode data according to another embodiment of the invention;

[0023] FIG. 5 is a block diagram showing the configuration of the apparatus for producing mmode images based on bmode images according to one embodiment of the invention.

[0024] In all the drawings, the same reference signs identify the same or corresponding features or functions.

EMBODIMENTS

[0025] According to the mmode imaging method of this invention, first, define a sample line on a bmode image, and convert bmode data corresponding to the sample points constituting the sample line in each frame of bmode image into mmode lines in sequence of time. Then, produce mmode data of one or more mmode lines based on the echo data(i.e., detected depth of echo signals and brightness corresponding to the amplitudes of the echoes) of corresponding sample points on two adjacent mmode lines. Finally, interpolate the produced mmode lines between the two adjacent mmode lines so that the continuity of displayed mmode images is increased visually.

[0026] Next the mmode imaging method of this invention will be described in detail referring to the drawings.

[0027] As shown in FIG. 1A, a sample line S is defined on a bmode image, including sample points $s_1, s_2, \dots, s_{n-j} \dots, s_{n-1}, s_n$.

[0028] Convert bmode data at sample points $s_1, s_2, \dots, s_{n-j} \dots, s_{n-1}, s_n$ of each frame of bmode image at time t_1, t_2, \dots, t_n into mmode lines L_1, L_2, \dots, L_n at respective time, so that a mmode image is obtained as shown in FIG. 1 B, which shows the changes of the sample line S over time.

[0029] According to the present invention, based on the above converted mmode lines L_1, L_2, \dots, L_n , with use of echo data of corresponding sample points included in two adjacent mmode lines respectively, several mmode lines (such as mmode line l shown by dashed line in FIG. 1 B)are produced and interpolated between the two adjacent mmode lines, therefore, without lowering the frame rate of bmode images, the sample line S is shown with a desired continuity over time even in the case of low frame rate of bmode images.

[0030] Now the method of producing continuous mmode images based on bmode data will be described with reference to FIG. 2.

[0031] 1. Convert a sample line in a bmode image into mmode lines

[0032] First, define a sample line in a bmode image(step 10). Select bmode data at each sample points composing the sample line from each frame of bmode image(step 20).

Convert the bmode data selected from each frame of bmode image into mmode lines corresponding to different times in a mmode image(step 30).

[0033] 2. Interpolate mmode lines between two adjacent mmode lines

[0034] Based on an expected frame rate of mmode lines, determine the number of mmode lines to be interpolated between two adjacent mmode lines, and subsequently determine the coordinates on the time axis of each mmode line to be interpolated based on the number of mmode lines (step 40).

[0035] Next, take an arbitrary mmode line as an example to determine boundary points in the mmode line whose brightness notably increases and which represent boundaries of tissues or organs within a human body(step S50).

[0036] In an embodiment of the invention, a boundary point is found by evaluating brightness of a group of neighboring sample points, specifically by taking the following steps, select a plurality of sample points neighboring a certain sample point on the mmode line as a sample point group, then, further select a part of the sample point group neighboring said certain sample point as a sample point subgroup. Evaluating the brightness of each sample point included in the sample point group and the subgroup to judge whether said certain sample point is a boundary point. Details of the judgement will be described in an embodiment with reference to FIG. 3.

[0037] Then, as for a boundary point, based on the brightness of the point and its neighboring points, by a similarity searching method, search for a matching point in an adjacent mmode line which best matches with the boundary point-(step 60). The process of searching for a matching point will be described in a following embodiment with reference to FIG. 3.

[0038] The boundary point and its matching point define a movement vector starting at the boundary point ending at the matching point. The intersection point of the movement vector with the interpolated mmode line can be viewed as a mapping point of the boundary point on the interpolated mmode line. The mmode data at the mapping point is calculated based on those of the boundary point and its matching point, so as to obtain Y-axis coordinate and brightness of the mapping point(step 70).

[0039] Besides mapping points of boundary points, the interpolated mmode line also includes mapping points of non-boundary points. As for a mapping point of non-boundary point, its brightness could be calculated based on the brightness of two sample points included in two immediate neighboring mmode lines respectively, which locate at the same depth as the mapping point of non-boundary point (step 80).

[0040] Details in calculating the brightness of mapping points of boundary points and non-boundary points will be described in a following embodiment with reference to FIG. 3.

[0041] 3. Display the generated mmode images

[0042] After mmode data are generated following the above described steps, via a conventional mmode image display device, the interpolated mmode lines can be dis-

played in sequence of time, as a result, the displayed mmode images have better continuity(step 90).

[0043] Next the method for generating continuous mmode images based on bmode data will be described with reference to FIG. 3.

[0044] In FIG. 3, L_m and L_n represent the same sample line defined on a bmode image, but converted from two consecutive frames of bmode image.

[0045] Here, the process of generating mmode data will be introduced by taking an example that one mmode line L_i is interpolated between mmode lines L_m and L_n .

[0046] First boundary points on mmode line L_m are determined.

[0047] A sample point A_j on L_m is selected. Define a plurality of sample points $A_p, \dots, A_{j-1}, A_j, A_{j+1}, A_q$ at neighboring positions in the mmode line L_m as a sample point group, and define a part of the group $A_e, \dots, A_{j-1}, A_j, A_{j+1}, A_f$ at neighboring position of the sample point A_j as a subgroup, wherein, p, q, j, e, f are integers, and satisfying $p < e, f < q$.

[0048] If the number of background points in the sample point group which have brightness smaller than a threshold is larger than a predetermined value, and the number of non-background points in the subgroup which have brightness larger than a threshold is larger than another predetermined value, then define the sample point A_j as a boundary point.

[0049] For example, the sample point group includes 10 sample points($q-p+1=10$), and the subgroup includes 3 points($f-e+1=3$), if more than 50% of sample points in the sample point group are background points, and more than 50% of sample points in the sample point subgroup are non-background points, then sample point A_j is judged as a boundary point.

[0050] Next, through a similarity searching method, search for a matching point A'_j of the boundary point A_j on mmode line L_n .

[0051] Select g sample points on each side of point A_j on the mmode line L_m , which are neighboring to point A_j , which, including point A_j , compose a sample point group of $2g+1$ sample points in total, i.e., $A_{j-g}, \dots, A_j, \dots, A_{j+g}$.

[0052] On the mmode line L_n , for a plurality of sample points, select g sample points on each side of an individual point in a similar manner so as to form a plurality of candidate sample point group, each including $2g+1$ sample points.

[0053] Calculate the brightness difference between each point in the sample point group including point A_j and its corresponding point in a candidate group respectively. For example, it is assumed that one candidate group includes $A_{h-g}, \dots, A'_h, \dots, A_{h+g}$, with point A'_h locating at the middle, then calculate the brightness difference between A_{j-g} and A_{h-g}, \dots, A_j and A'_h, \dots, A_{j+g} and A_{h+g} .

[0054] Calculate the sum of the absolute value of the brightness difference for each candidate group, find the one having a minimum sum value which is considered as having most similar brightness distribution to the sample point group having A_j as its middle point, and the middle point of

the candidate group is judged as the matching point of the point A_j . For instance, if the candidate group including point A'_h has a minimum sum value, then A'_h is the matching point on the mmode line L_n of A_j .

[0055] To find the matching point more quickly, it is possible to choose those points positioned at the same depth as or in a certain range around depth of the selected boundary point as middle points for each candidate group. For example, on the mmode line L_n , choose sample point A'_x at the same depth as point A_j and 10 sample points in the neighboring region of A'_x as the middle points of respective candidate group.

[0056] Further, to calculate the mmode data of a mapping point of a boundary point more accurately, it's possible to correct the mmode data of the matching point based on neighboring sample points of the boundary point and the matching points of the neighboring sample points on a mmode line L_n .

[0057] For example, a boundary point A_j and its neighboring points A_{j-1} and A_{j+1} are determined to have matching points A'_j , A'_{j-1} and A'_{j+1} respectively through the above mentioned process. Since the boundary point A_j is positioned between sample points A_{j-1} and A_{j+1} , subsequently, the matching point A'_j shall be positioned between matching points A'_{j-1} and A'_{j+1} .

[0058] If it's detected that the point A'_j is not positioned between A'_{j-1} and A'_{j+1} , it might be noise data or the like that cause A'_j deviate from its true position. By setting the point A'_j between A'_{j-1} and A'_{j+1} , the errors of the position matching points are reduced.

[0059] After the matching point A'_j of the boundary point A_j is determined, points A_j and A'_j define a movement vector, as shown in FIG. 3. The movement vector intersects with the mmode line L_n at A_{j-m} , which is considered as a mapping point of the boundary point A_j on the mmode line L_n .

[0060] Afterwards, calculate the mmode data of the mapping point(such as A_{j-m}) based on the corresponding boundary point and the matching point(such as A_j and A'_j). The mmode data includes detecting depth and brightness.

[0061] The following describes one of the methods for calculating the mmode data taking the mapping point A_{j-m} as an example.

[0062] Assume a distance x_1 between the boundary point A_j and the mapping point A_{j-m} , and a distance x_2 between the boundary point A_j and the matching point A'_j (see FIG. 3), then,

[0063] The detected depth D_{j-m} of the mapping point A_{j-m} (i.e., the Y-axis coordinate of A_{j-m}) can be obtained by adding the detected depth D_j of the boundary point A_j (i.e., the Y-axis coordinate of A_j) with the projection of distance x_1 on the Y-axis $D_{j-project}$, that is expressed as,

$$D_{j-m} = D_j + D_{j-project} \quad (1)$$

[0064] Round up the detected depth D_{j-m} of the mapping point A_{j-m} so as to obtain the Y-axis coordinate of a pixel corresponding to the mapping point A_{j-m} .

[0065] The brightness B_{j-m} of the mapping point A_{j-m} , which is an average of the brightness B_j and B'_j of points A_j

and A'_i weighted according to the distances x_1 and x_2 between A_{j-m} , A_j and A'_i , and can be given by,

$$B_{j-m} = \frac{x_2}{x_1 + x_2} B_j + \frac{x_1}{x_1 + x_2} B'_i \quad (2)$$

[0066] After obtaining the mmode data of the mapping points of respective boundary points, the mmode data of the mapping points on the interpolated mmode line of non-boundary points are calculated.

[0067] If the speed of the CPU is fast enough, similar process could be adopted for the non-boundary points as for the boundary points, that is, searching for a matching point on the mmode line L_n , and then calculating the mmode data of a mapping point based on the echo data of the non-boundary point and its matching point.

[0068] However, non-boundary points do not have notable changes in brightness, not represent boundaries of tissues and organs within a human body, compared to boundary points, non-boundary points do not provide as meaningful information. Thus, a simplified method could be used as following to determine the mmode data of a mapping point of a non-boundary point on an interpolated mmode line.

[0069] Referring to FIG. 3, it is assumed that A_{p-m} is a mapping point of a non-boundary point on a interpolated mmode line L_i , then the brightness of point A_{p-m} could be calculated based on the brightness of A_p and A'_p , which have the same detected depth as the point A_{p-m} and locate on mmode lines L_m and L_n on both sides of the interpolated mmode line L_i .

[0070] A similar method as that for calculating the brightness of a mapping point of a boundary point could be used for A_{p-m} , that is, to calculate an average of the brightness of points A_p and A'_p weighted according to the distances between A_{p-m} , A_p and A'_p as the brightness of point A_{p-m} ; or simply take an algebraic average of the brightness of points A_p and A'_p .

[0071] In the case of interpolating more than one mmode lines between two adjacent mmode lines, to obtain more accurate brightness for mapping points of non-boundary points on the interpolated mmode lines, it's possible to calculate the brightness of a mapping point of a non-boundary point based on the two points which have the same detected depth as the said mapping point and locate on a nearest mmode line and on a interpolated mmode line respectively.

[0072] For example, 3 mmode lines L_1 , L_2 and L_3 are interpolated between two mmode lines L_m and L_n . As shown in FIG. 4, by way of a movement vector, 3 mapping points P_1 , P_2 and P_3 of a boundary point A_j on mmode lines L_1 , L_2 and L_3 are obtained respectively. As for a mapping point P_m of a non-boundary point on the mmode line L_1 , its brightness could be calculated based on P_2 and another point P on the mmode line L_m , both of which have the same depth as P_m , and the brightness of the mapping points P_2 could be calculated by the above mentioned method by way of movement vector.

[0073] Similarly, the brightness of the mapping point P_5 of a non-boundary point could be calculated based on points P_3

and P_4 which locate at the same depth as P_5 ; the brightness of the mapping point P_6 of a non-boundary point could be calculated based on points P_5 and P_3 on the interpolated mmode lines L_1 and L_3 which locate at the same depth as P_6 .

[0074] In conclusion, as for a mapping point of a non-boundary point on a interpolated mmode line, its brightness is preferably calculated based on two points on two mmode lines respectively which locate on both side of the mapping point, and the two points have the same depth as the mapping point.

[0075] Finally, after obtaining the brightness of all points constituting the interpolated mmode lines(such as L_1 in FIG. 3 and L_1 , L_2 and L_3 in FIG. 4), display the interpolated mmode lines between mmode lines L_m and L_n , so that the displayed mmode images looks more continuous.

[0076] FIG. 5 is a block diagram showing the configuration of an apparatus which produces continuous mmode images based on bmode data according to one embodiment of the invention. On the basis of a conventional bmode imaging apparatus, the following elements are added: a DSC(Digital Scan Conversion) back-end module, for converting the coordinates of each sample point included in a sample line defined on a bmode image displayed on a monitor into polar coordinate, so as to be consistent with the type of coordinates of bmode data stored in a bmode data buffer; an interpolation module, for reading out bmode data corresponding to each sample point from the stored each frame of bmode image, and converting them into respective mmode lines at different time in a mmode image, and interpolating one or more mmode lines between every two adjacent mmode lines; a mmode data buffer, for storing the interpolated mmode data of mmode lines, and supplying the stored mmode data to a display device via a image buffer(buff_i), so as to display the interpolated mmode lines in real time when displaying mmode images.

[0077] The functions of the DSC back-end module and the interpolation module can also be implemented by means of either software or hardware, or a combination thereof.

INDUSTRIAL APPLICABILITY

[0078] In accordance with the mmode imaging method and apparatus of the invention, bmode data from each frame of bmode image which corresponding to the sample points constituting a sample line defined arbitrarily on a displayed bmode image are converted into mmode lines in a sequence of time. One or more mmode lines are generated based on the echo signals of corresponding points on two adjacent mmode lines, and are interpolated between the two adjacent mmode lines, therefore, continuous mmode images with desired frame rate of mmode images could be achieved without lowering the frame rate of bmode images.

[0079] In practice, the technical solutions of the invention could be flexibly implemented and appropriately modified as needed. Those skilled in the art could understand that there should be various modifications to the mmode imaging method and apparatus disclosed by the invention without departing from the spirit of the invention. The scope of protection of the present invention shall be defined by the claims attached.

What is claimed is:

1. A mmode imaging method used for an ultrasonic diagnosis device, comprising steps:

- (a) defining a sample line on a frame of bmode image, so as to select bmode data of sample points constituting the sample line;
- (b) converting the bmode data of the sample points obtained from two consecutive frames of bmode image into two of mmode lines arranged in time order in a mmode image;
- (c) at predetermined positions between the two mmode lines, generating mmode data that constitute at least one mmode lines based on the echo data of corresponding sample points on the two mmode lines;
- (d) imaging the mmode data in time sequence.

2. A mmode imaging method of claim 1, wherein, the echo data comprise brightness of the sample point and detected depth to which the sample point corresponds.

3. A mmode imaging method of claim 2, wherein step (c) includes:

- (c1) based on the brightness of respective sample points on one of the two mmode lines, finding their matching points on another mmode line;
- (c2) calculating mmode data of mapping points of the sample points on the generated mmode lines, based on the echo data of the sample points and their matching points, wherein the mapping point of a sample point on the generated mmode line is a point at which the generated mmode line intersects with the line section connecting the sample point and its matching point.

4. A mmode imaging method of claim 3, wherein step (c1) includes:

- (c11) selecting a plurality of sample points at neighboring positions of a certain sample point on the mmode data line, so as to constitute a sample point group;
- (c12) among said a plurality of sample points, selecting some of the sample points at neighboring positions of the certain sample point so as to constitute a sample point subgroup;
- (c13) evaluating the brightness of each sample point included in the sample point group and the sample point subgroup, to judge whether the certain sample point is a boundary point;
- (c14) if the certain sample point is judged as a boundary point, then searching for the matching point of the boundary point on the other mmode line.

5. A mmode imaging method of claim 4, wherein step (c13) includes:

- in the sample point group, determining the number of background sample points whose brightness are smaller than a predetermined value;
- in the sample point subgroup, determining the number of non-background sample points whose brightness are larger than a predetermined value;
- if the number of background sample points and the number of non-background sample points are both larger than a predetermined number, defining the certain sample point as a boundary point.

6. A mmode imaging method of claim 4, wherein step (c14) includes:

- (i) symmetrically selecting equal number of sample points on both sides of the boundary point at the neighboring positions of the boundary point, with the boundary point as a center, so as to constitute a sample point group which contains the boundary point;
- (ii) on the other mmode line, with a plurality of sample points as center respectively, symmetrically selecting equal number of sample points on both side of each of the center point at the neighboring positions thereof, so as to constitute a plurality of candidate sample point groups, each of the candidate sample point group containing the center point respectively;
- (iii) calculating the brightness difference between each sample point in the sample point group that contains the boundary point and a corresponding point in the candidate sample point group;
- (iv) calculating the sum of the absolute value of the brightness difference for each candidate sample point group, defining the center point in a candidate sample point group having a minimum sum value of the absolute value of the brightness difference as a matching point of the boundary point.

7. A mmode imaging method of claim 6, wherein step (ii) includes:

on the other mmode line, selecting sample points in a certain depth range around the detected depth of the boundary point as said center points.

8. A mmode imaging method of claim 4, wherein step (c2) includes:

calculating the detected depths of the mapping points of the boundary points based on those of the boundary points and their matching points;

calculating the brightness of the mapping points of the boundary points, based on the distances between the boundary points and the mapping points of the boundary points and the distances between the matching points of the boundary points and the mapping points, and based on the brightness of those points.

9. A mmode imaging method of claim 4, wherein, the brightness of a mapping point of a non-boundary point on a generated mmode line depends on the brightness of the two sample points locating on two neighboring mmode lines on both sides of the generated mmode line which have the same detected depth as the mapping point of the non-boundary point.

10. A mmode imaging method of claim 4, further including steps,

correcting matching points of the boundary points according to the matching points of the points at the neighboring positions of the boundary points.

11. A mmode imaging method of claim 1, wherein, the number of the mmode lines to be generated depends on an expected frame rate of the mmode images.

12. An apparatus for mmode imaging used for ultrasonic diagnosis devices, including:

a sampling unit, for defining a sample line on a frame of bmode image, so as to select bmode data of each sample point constituting the sample line;

a converging unit, for converting the bmode data of the sample points obtained from two consecutive frames of bmode image into two of mmode lines arranged in time order in a mmode image;

a generating unit, for generating mmode data that constitute at least one mmode lines based on the echo data of corresponding sample points on the two mmode lines at predetermined positions between the two mmode lines

an imaging unit, for imaging the mmode data in time sequence.

13. An apparatus for mmode imaging of claim 12, wherein, the echo data comprise at least brightness and detected depth of the sample points.

14. An apparatus for mmode imaging of claim 12, wherein, the generating unit includes,

a determining unit, for determining, based on the brightness of the respective sample points on one of said two mmode lines, the matching points on the other mmode line of said sample points;

a calculating unit, for calculating mmode data of mapping points of the sample points on the generated mmode lines, based on the echo data of the sample points and their matching points, wherein the mapping point of a sample point on the generated mmode line is a point at which the generated mmode line intersects with the line section connecting the sample point and its matching point.

15. An apparatus for mmode imaging of claim 14, wherein the steps performed by the determining unit comprise,

selecting a plurality of sample points at neighboring positions of a certain sample point on the mmode data line, so as to constitute a sample point group;

among said a plurality of sample points, selecting some of the sample points at neighboring positions of the certain sample point so as to constitute a sample point subgroup;

evaluating the brightness of each sample point included in the sample point group and the sample point subgroup, to judge whether the certain sample point is a boundary point;

if the certain sample point is judged as a boundary point, searching for the matching point of the boundary point on the other mmode line.

16. An apparatus for mmode imaging of claim 15, wherein the steps performed by the determining unit further comprise,

symmetrically selecting equal number of sample points on both side of the boundary point at the neighboring positions of the boundary point, with the boundary point as a center, so as to constitute a sample point group which contains the boundary point;

on the other mmode line, with a plurality of sample points as center respectively, symmetrically selecting equal number of sample points on both side of each of the center point at the neighboring positions of each of the center point, so as to constitute a plurality of candidate sample point groups, each of the candidate sample point group containing the center point respectively;

calculating the brightness difference between each sample points in the sample point group that contains the boundary point and a corresponding point in the candidate sample point group;

calculating the sum of the absolute value of the brightness difference for each candidate sample point group, defining the center point in a candidate sample point group having a minimum sum value of the absolute value of the brightness difference as a matching point of the boundary point.

17. An apparatus for mmode imaging of claim 15, wherein,

the calculating unit calculates the detected depths of the mapping points of the boundary points based on those of the boundary points and their matching points, and calculates the brightness of the mapping points of the boundary points, based on the brightness of the boundary points and their matching points, and on the distances between the boundary points and the mapping points of the boundary points and the distances between the matching points of the boundary points and the mapping points.

18. An apparatus for mmode imaging of claim 15, wherein, the calculating unit calculates the brightness of a mapping point of a non-boundary point on a generated mmode line based on the brightness of the two sample points locating on two neighboring mmode lines on both sides of the generated mmode line which have the same detected depth as the mapping point.

* * * * *

专利名称(译)	用于在mmode中进行超声成像的方法和设备		
公开(公告)号	US20070049828A1	公开(公告)日	2007-03-01
申请号	US11/323701	申请日	2005-12-30
[标]申请(专利权)人(译)	深圳迈瑞生物医疗电子股份有限公司		
申请(专利权)人(译)	深圳迈瑞生物医疗电子股份有限公司.		
当前申请(专利权)人(译)	深圳迈瑞生物医疗电子股份有限公司.		
[标]发明人	YAO BIN DONG JIAN LL YONG		
发明人	YAO, BIN DONG, JIAN LL, YONG		
IPC分类号	A61B8/00		
CPC分类号	A61B8/08 A61B8/486 A61B8/467 A61B8/0883 A61B8/461 Y10S128/922		
优先权	200510036992.4 2005-08-29 CN		
其他公开文献	US7532747		
外部链接	Espacenet USPTO		

摘要(译)

本发明提供一种用于超声诊断装置的mmode成像方法和装置，以增加所显示的mmode图像的连续性。本发明的mmode成像方法包括步骤：在bmode图像的帧上定义采样线，以选择构成采样线的采样点的bmode数据；将从两个连续帧的bmode图像获得的样本点的bmode数据转换为按时间顺序排列在mmode图像中的两个mmode线；在两个mmode线之间的预定位置处，基于两个mmode线上的相应采样点的回波数据，生成构成至少一个mmode线的mmode数据；并按时间顺序对mmode数据进行成像。

