




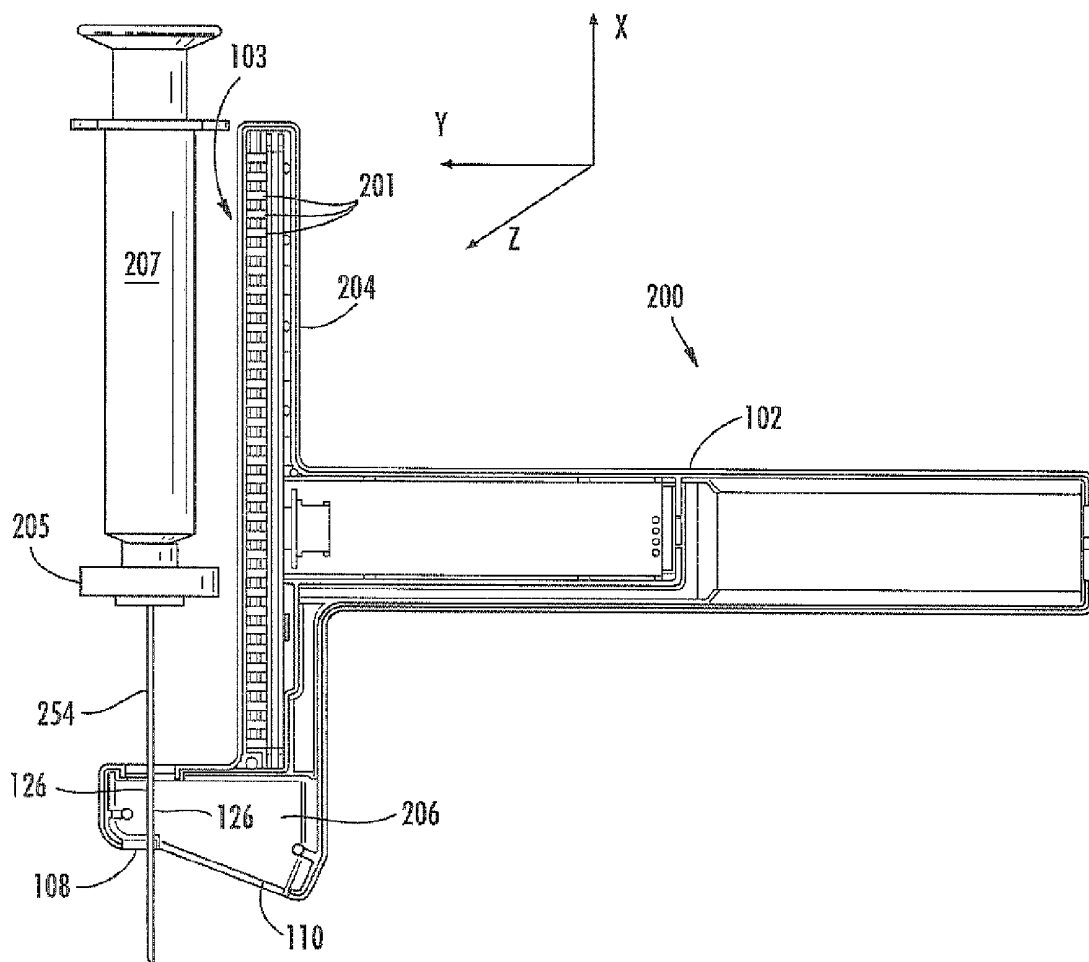



US 20120071759A1


(19) **United States**(12) **Patent Application Publication**
Hagy et al.(10) **Pub. No.: US 2012/0071759 A1**(43) **Pub. Date: Mar. 22, 2012**(54) **VIRTUAL IMAGE FORMATION METHOD
FOR AN ULTRASOUND DEVICE****Publication Classification**(51) **Int. Cl.**
A61B 8/14 (2006.01)(52) **U.S. Cl.** **600/443**(57) **ABSTRACT**

Disclosed are ultrasound devices and methods for use in guiding a subdermal probe during a medical procedure. A device can be utilized to guide a probe through the probe guide to a subdermal site. In addition, a device can include a detector in communication with a processor. The detector can recognize the location of a target associated with the probe. The processor can utilize the data from the detector and create an image of a virtual probe that can accurately portray the location of the actual probe on a sonogram of a subdermal area. In addition, disclosed systems can include a set of correlation factors in the processor instructions. As such, the virtual probe image can be correlated with the location of the actual probe.

(75) **Inventors:** **M. Dexter Hagy**, Greenville, SC (US); **Andrew Petrov**, Brookline, MA (US); **Bernard James Burreson**, Seattle, WA (US); **Andre Doudkin**, Haverhill, MA (US)(73) **Assignee:** **Soma Access Systems, LLC**, Greenville, SC (US)(21) **Appl. No.:** **12/885,832**(22) **Filed:** **Sep. 20, 2010**

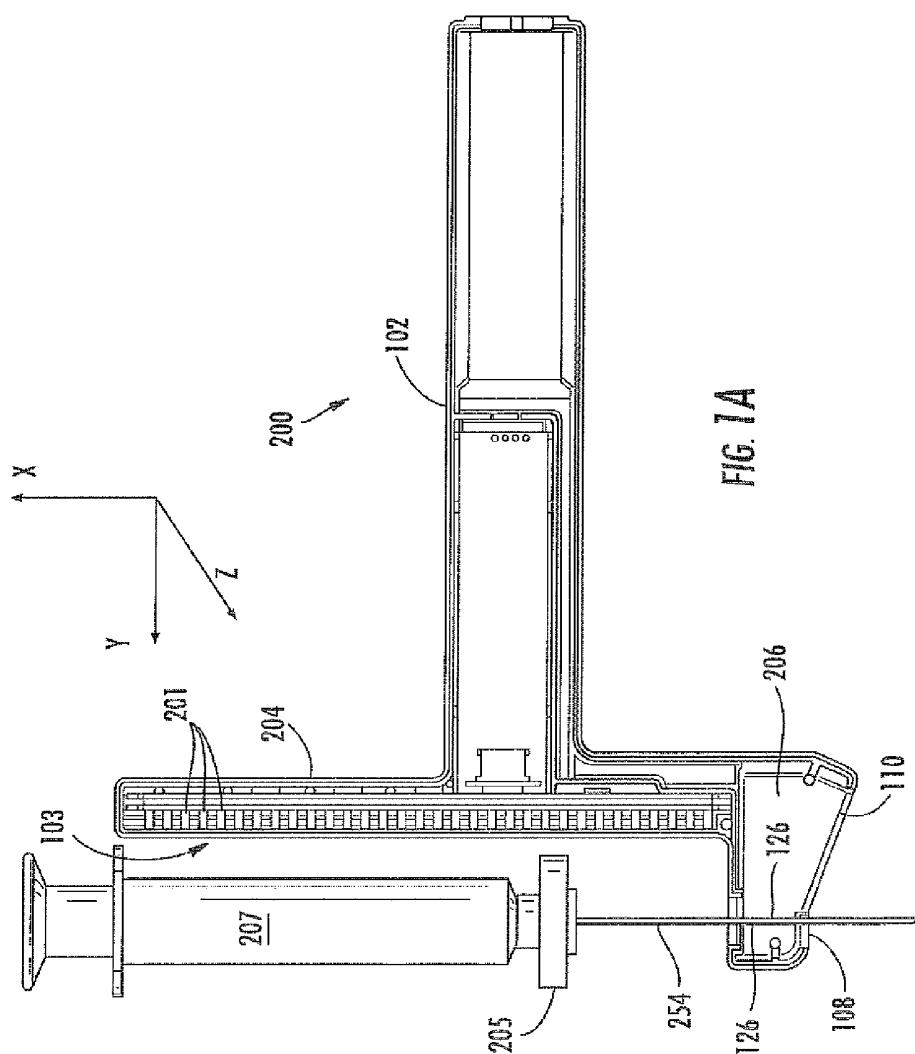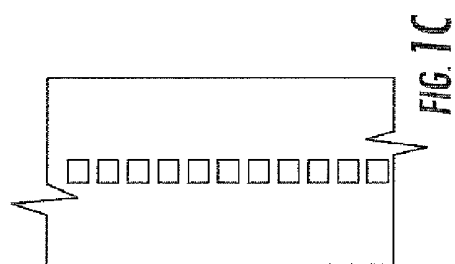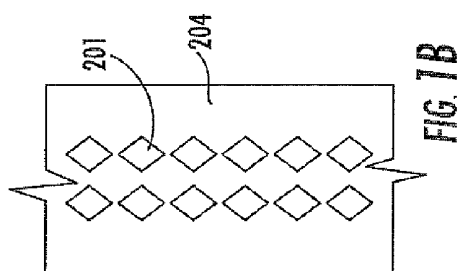

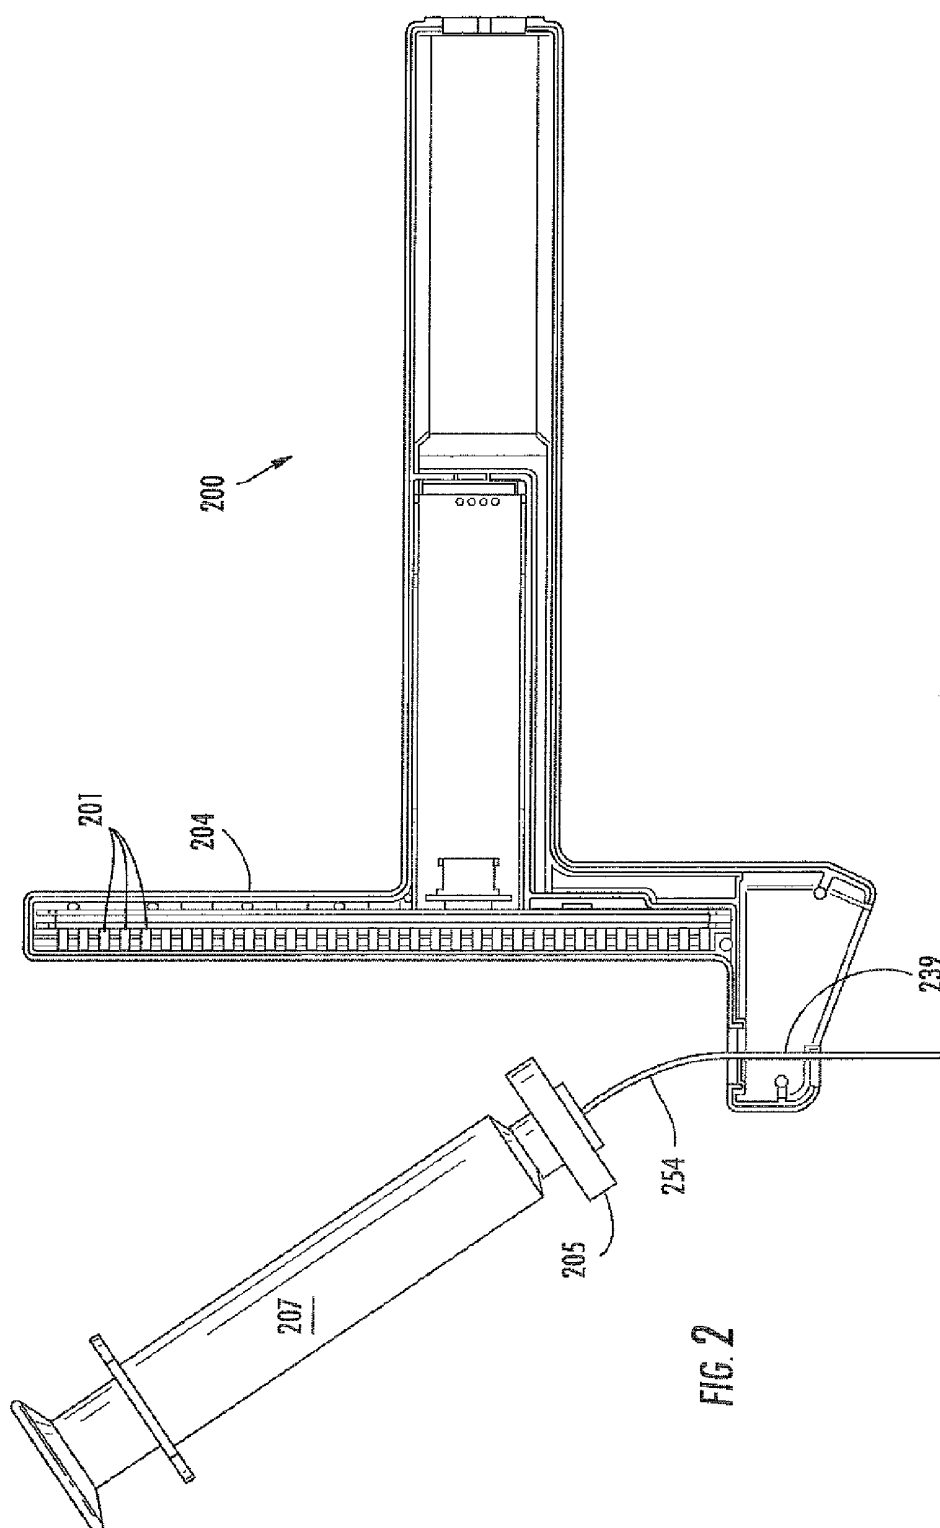

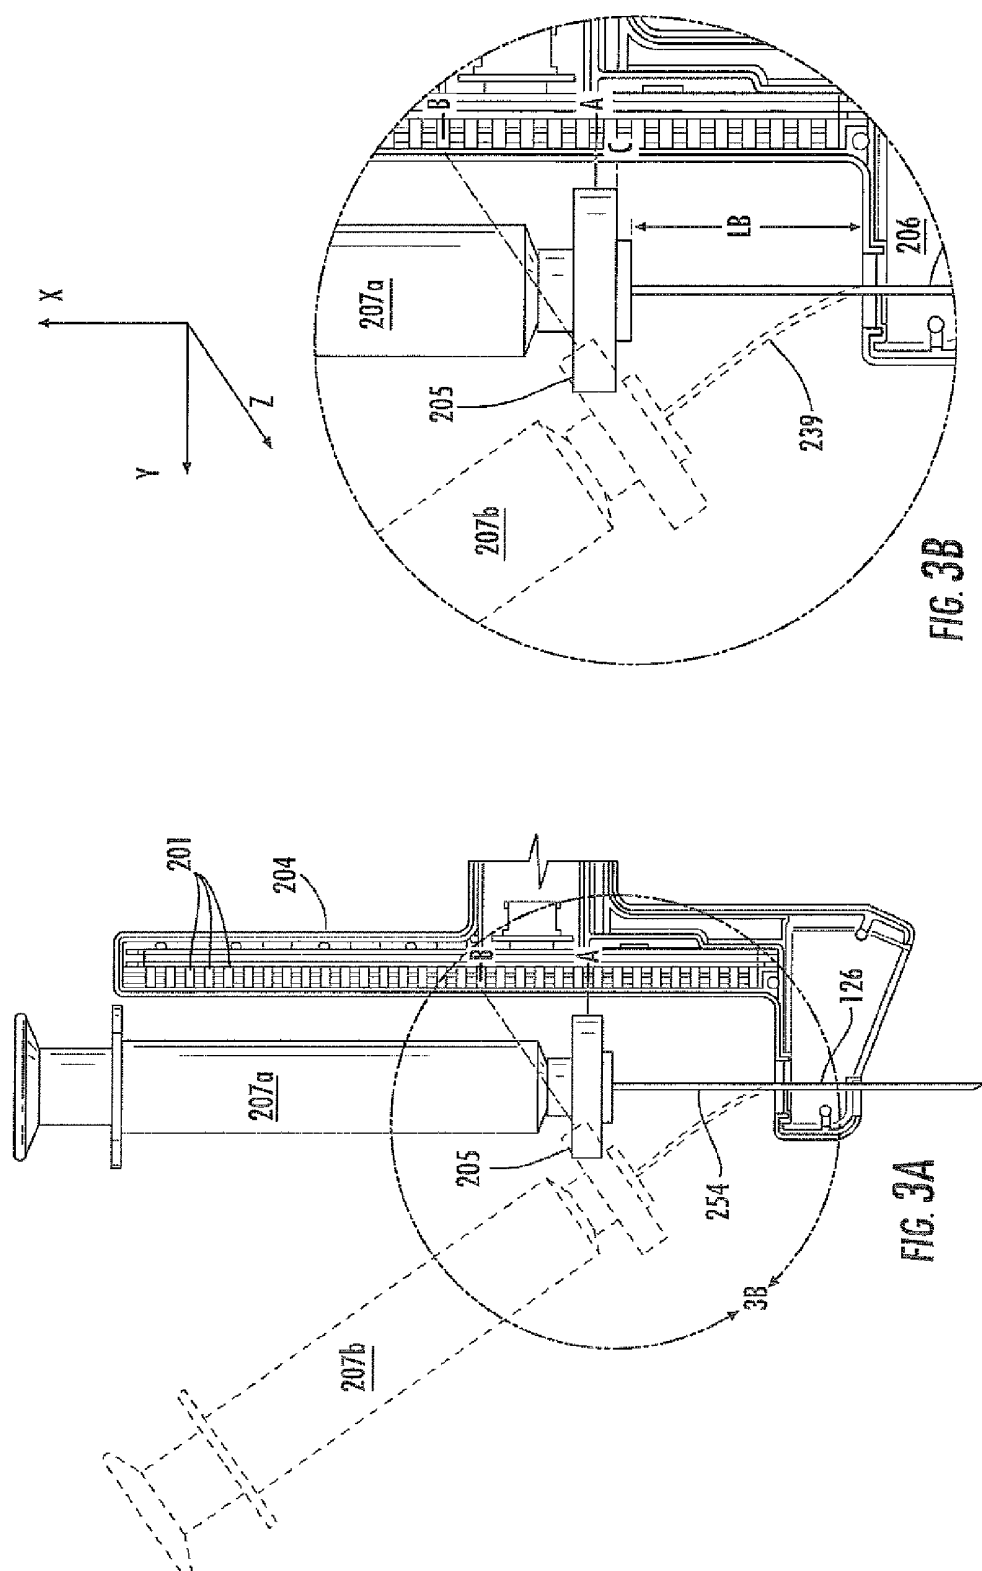

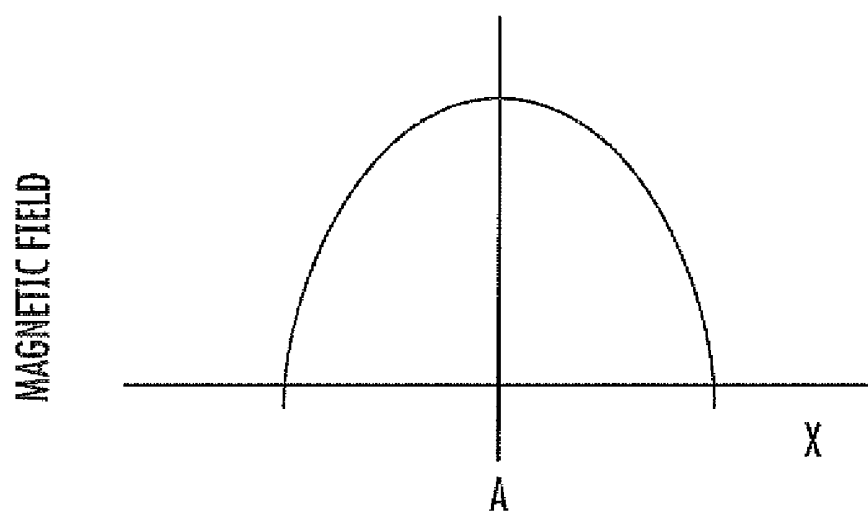


FIG. 4A

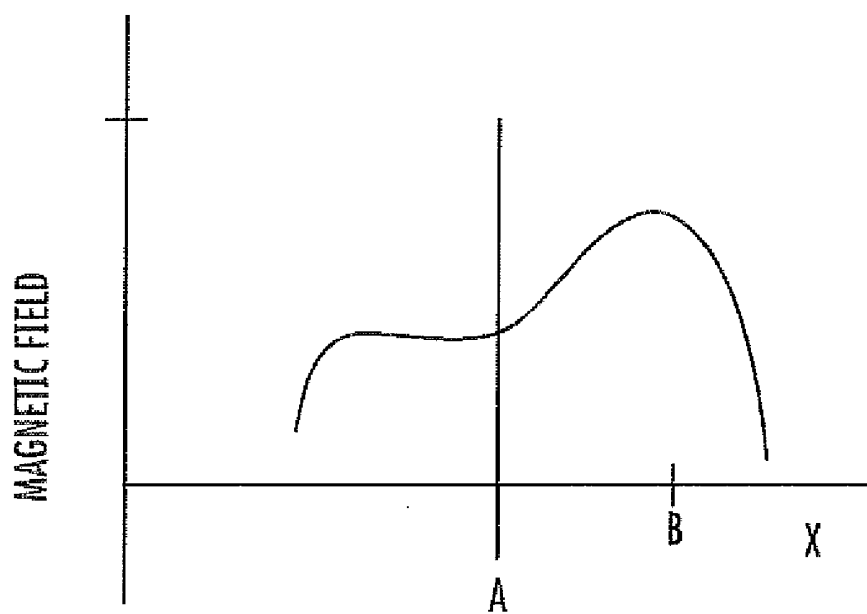


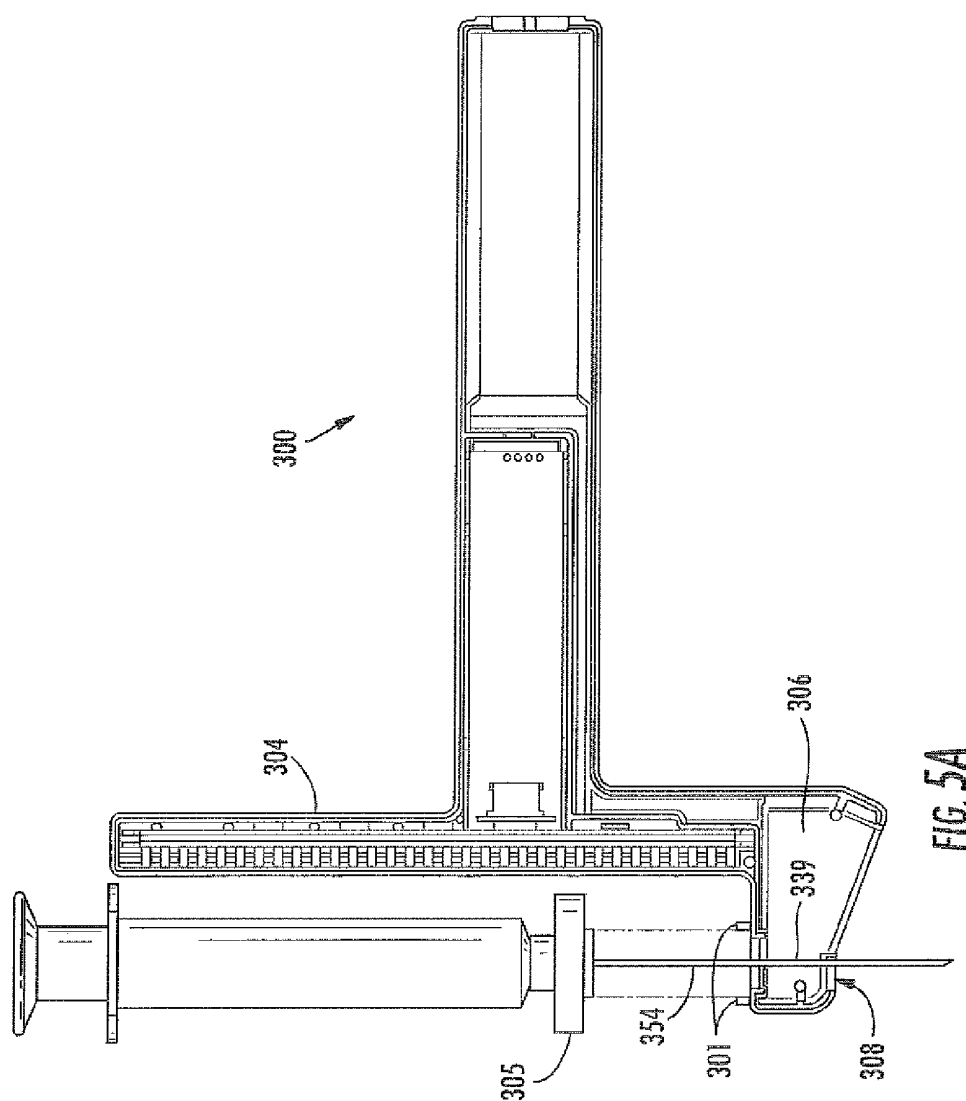
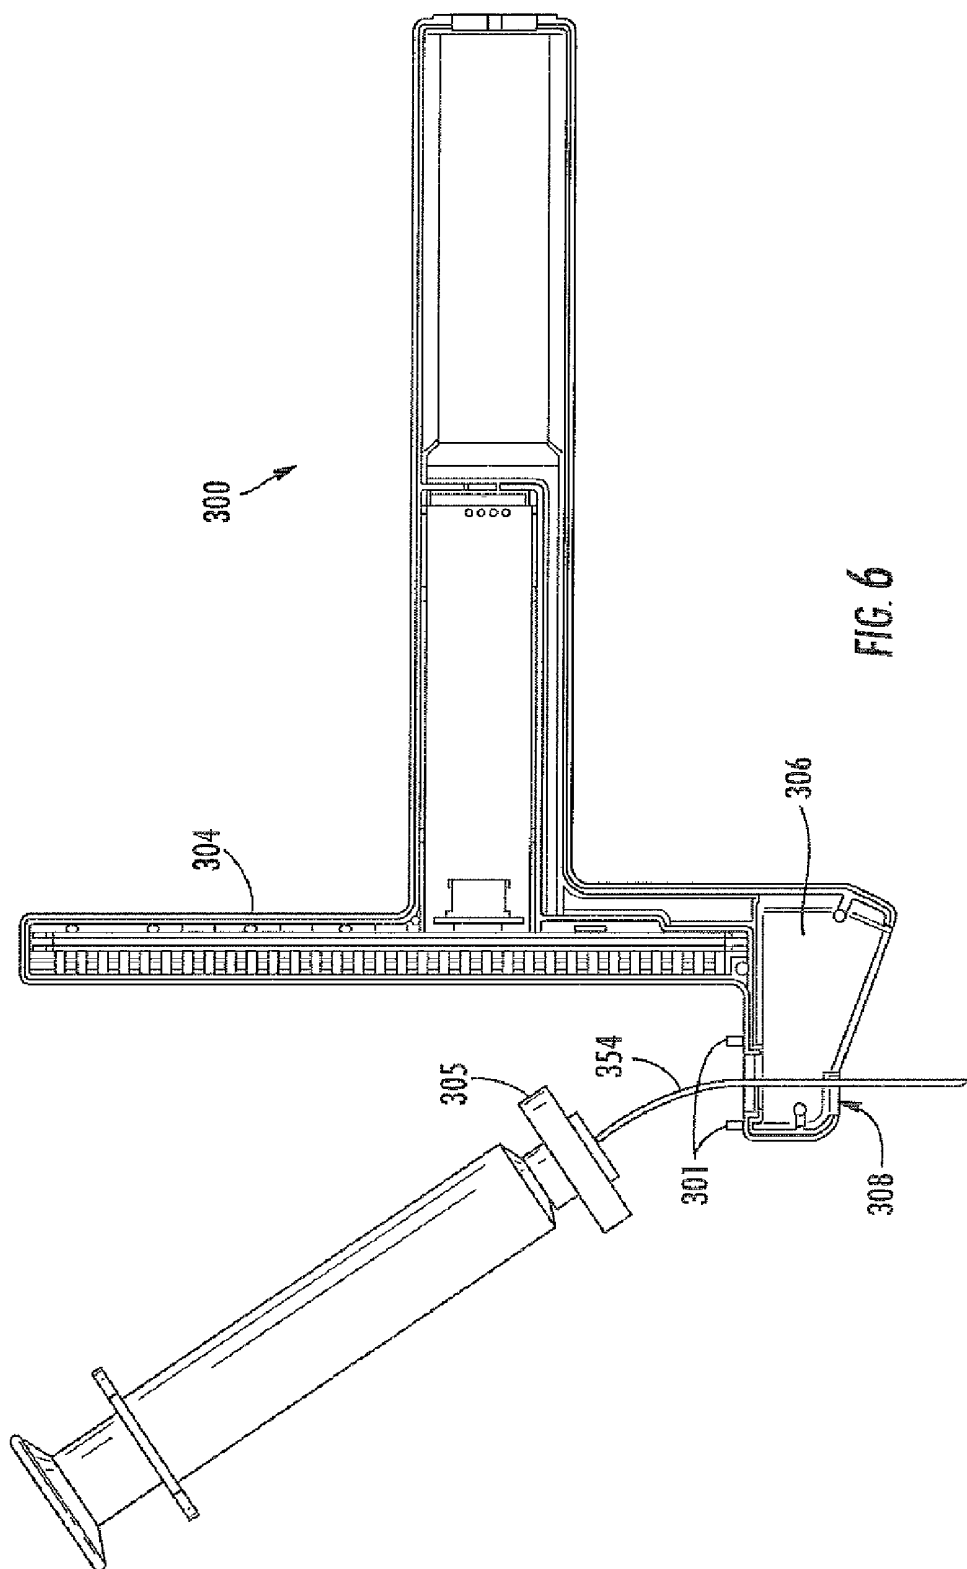
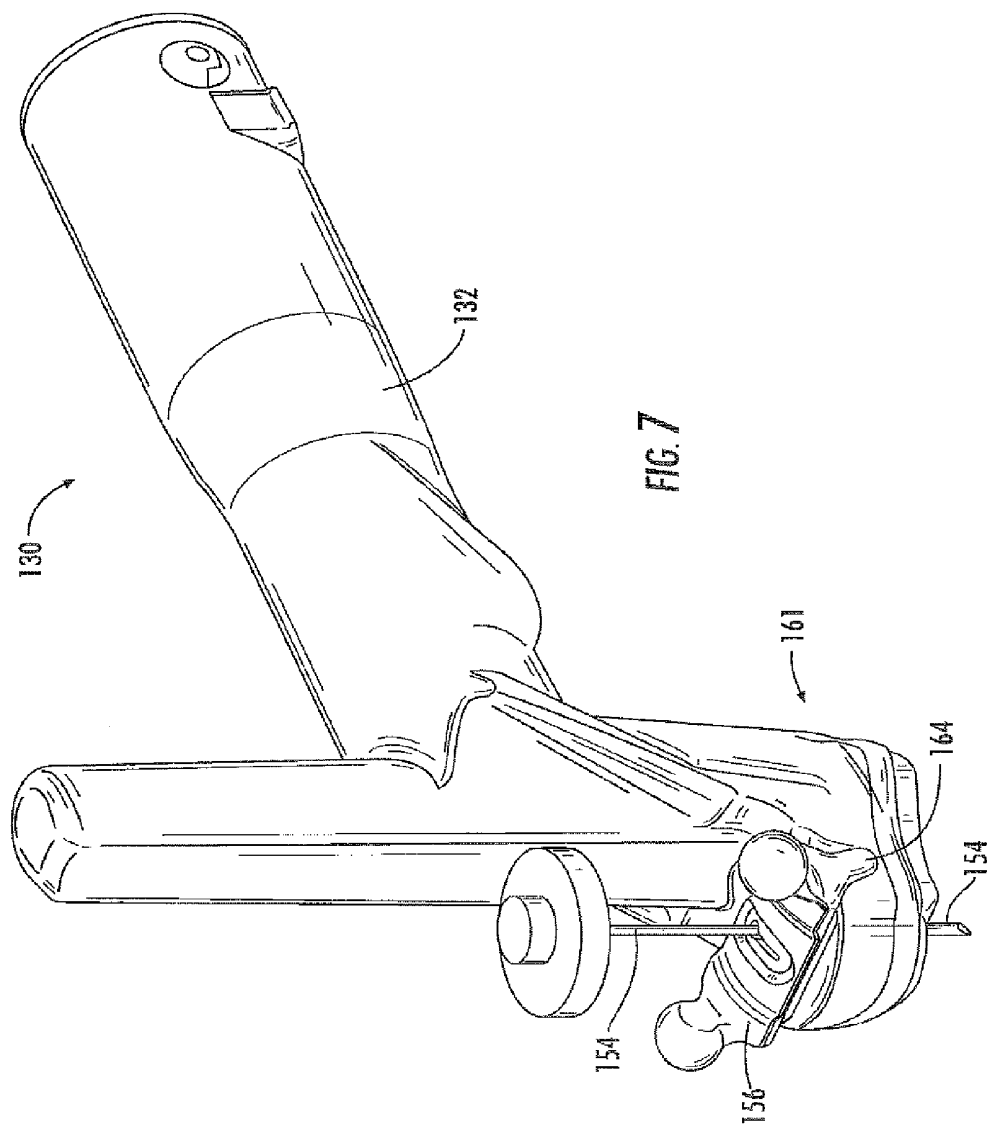
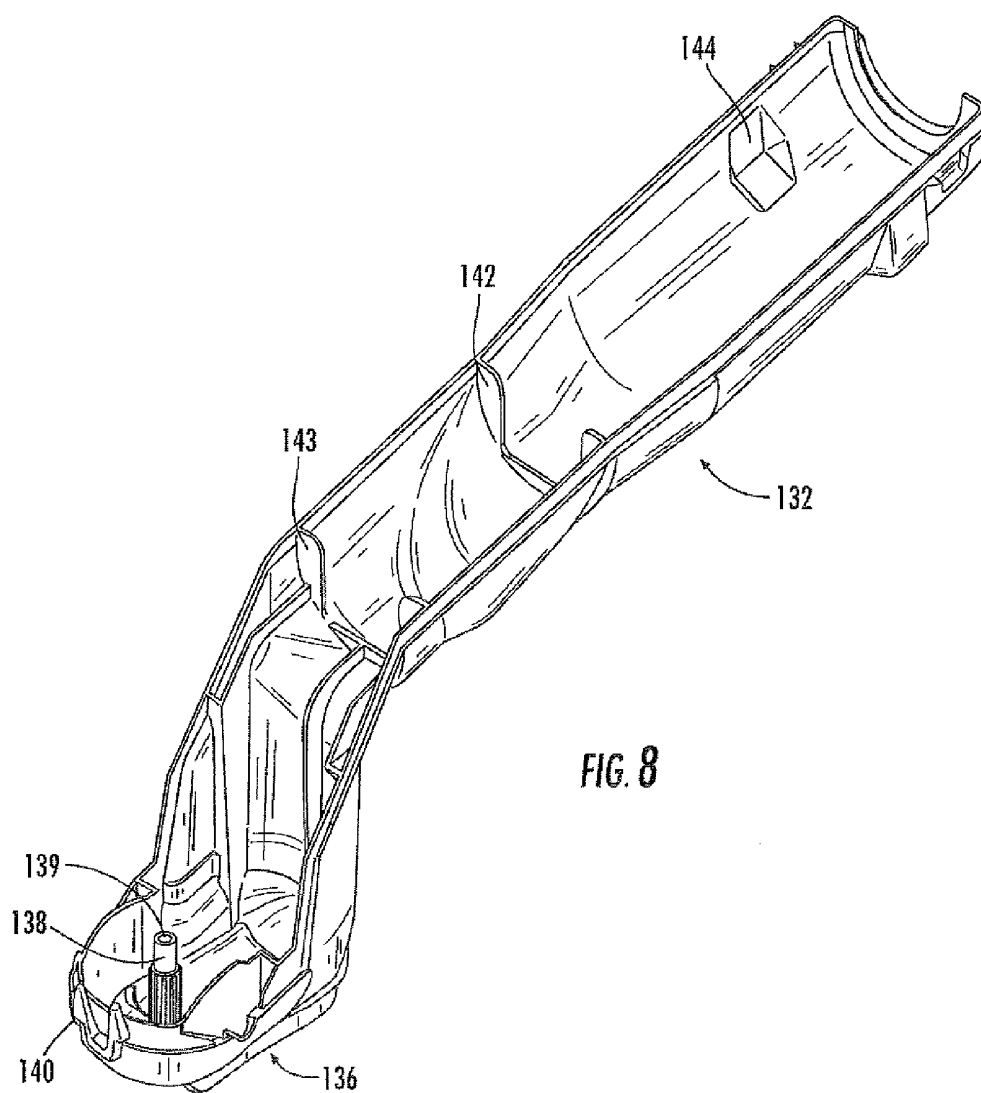



FIG. 4B












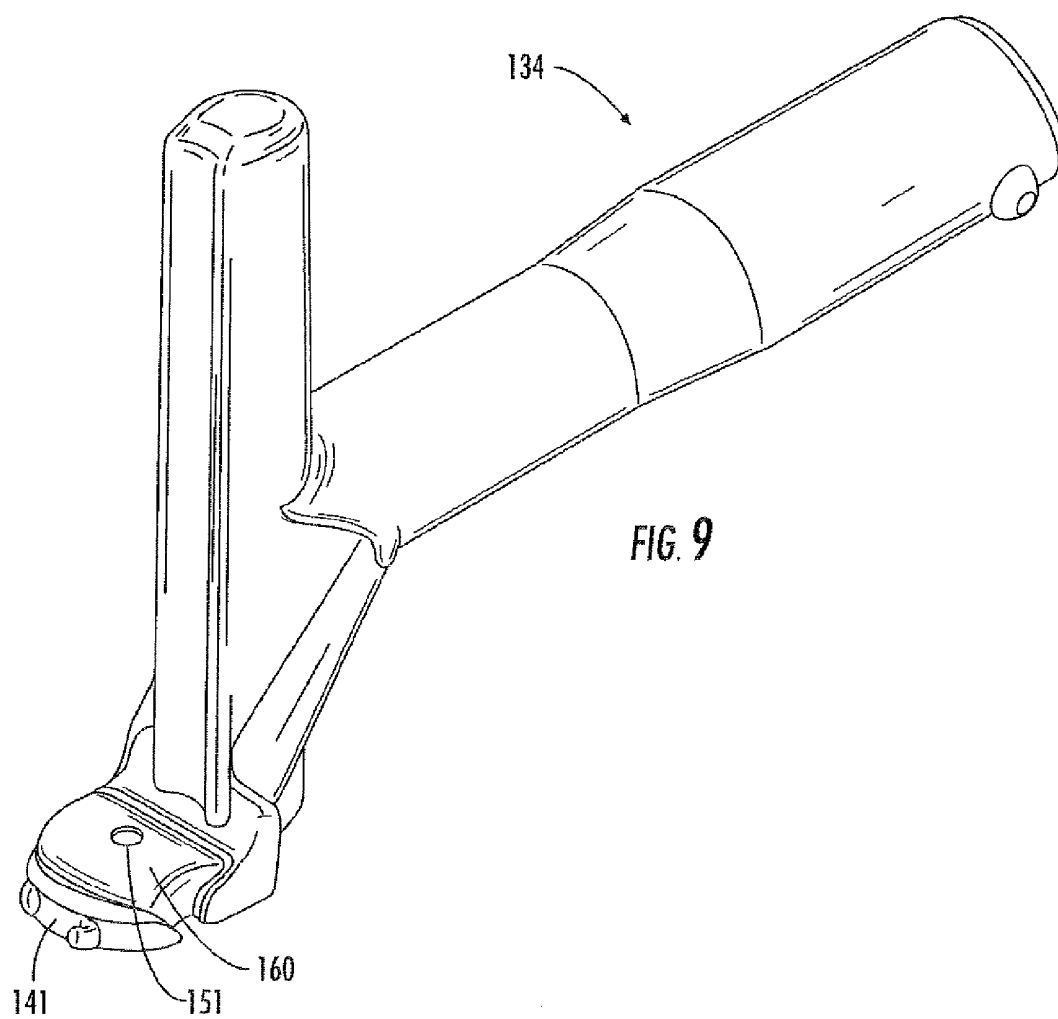

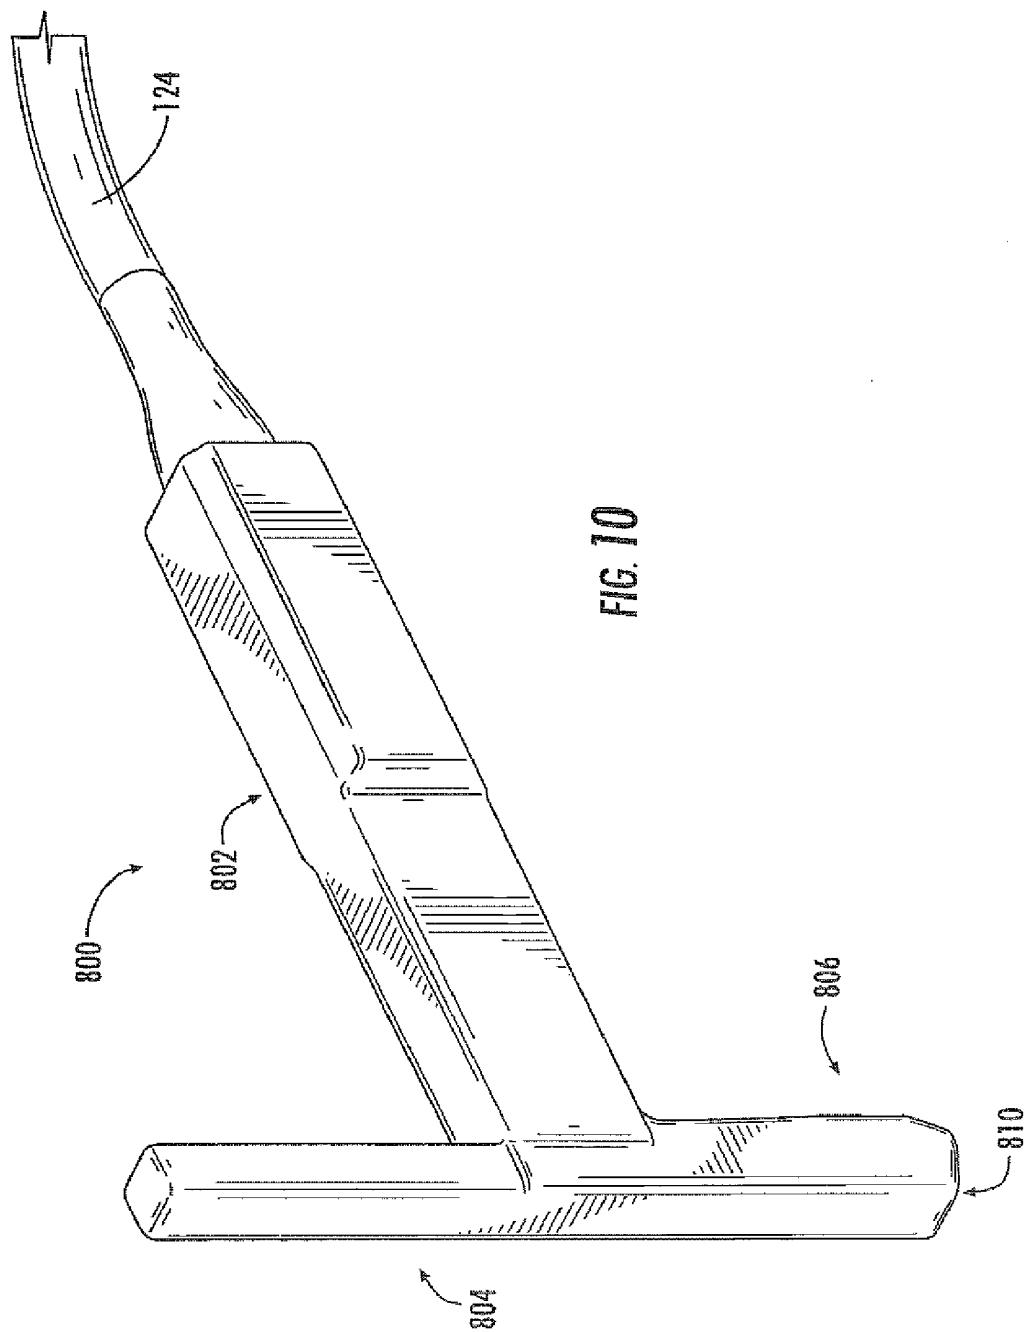

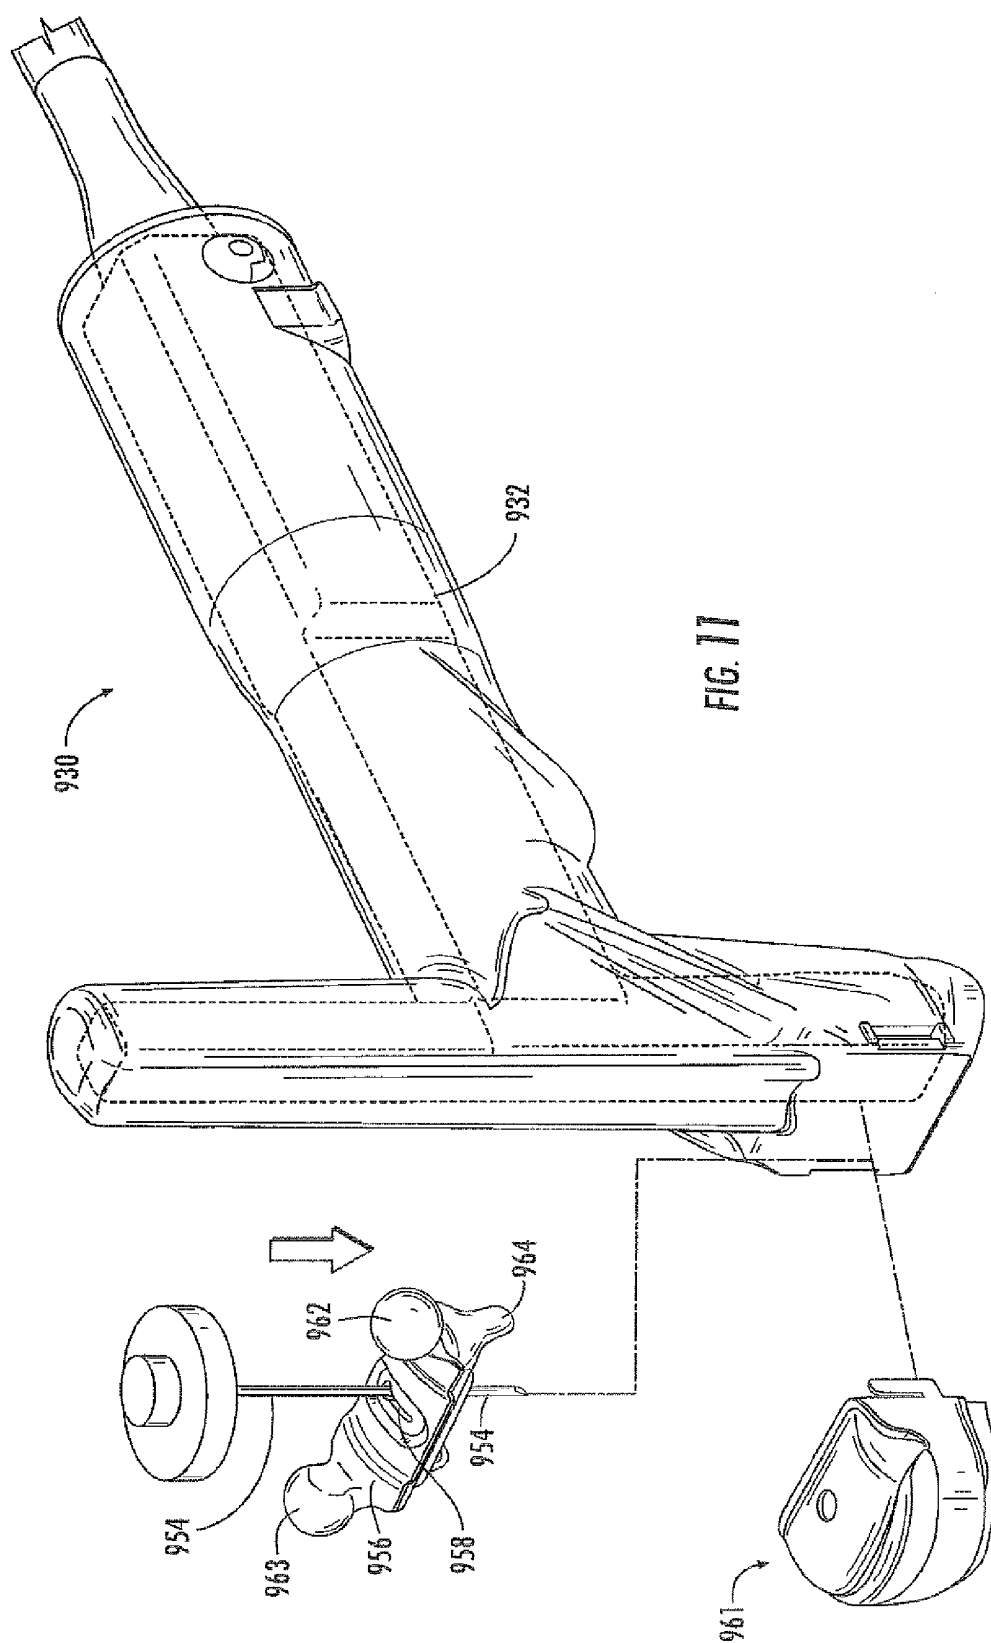

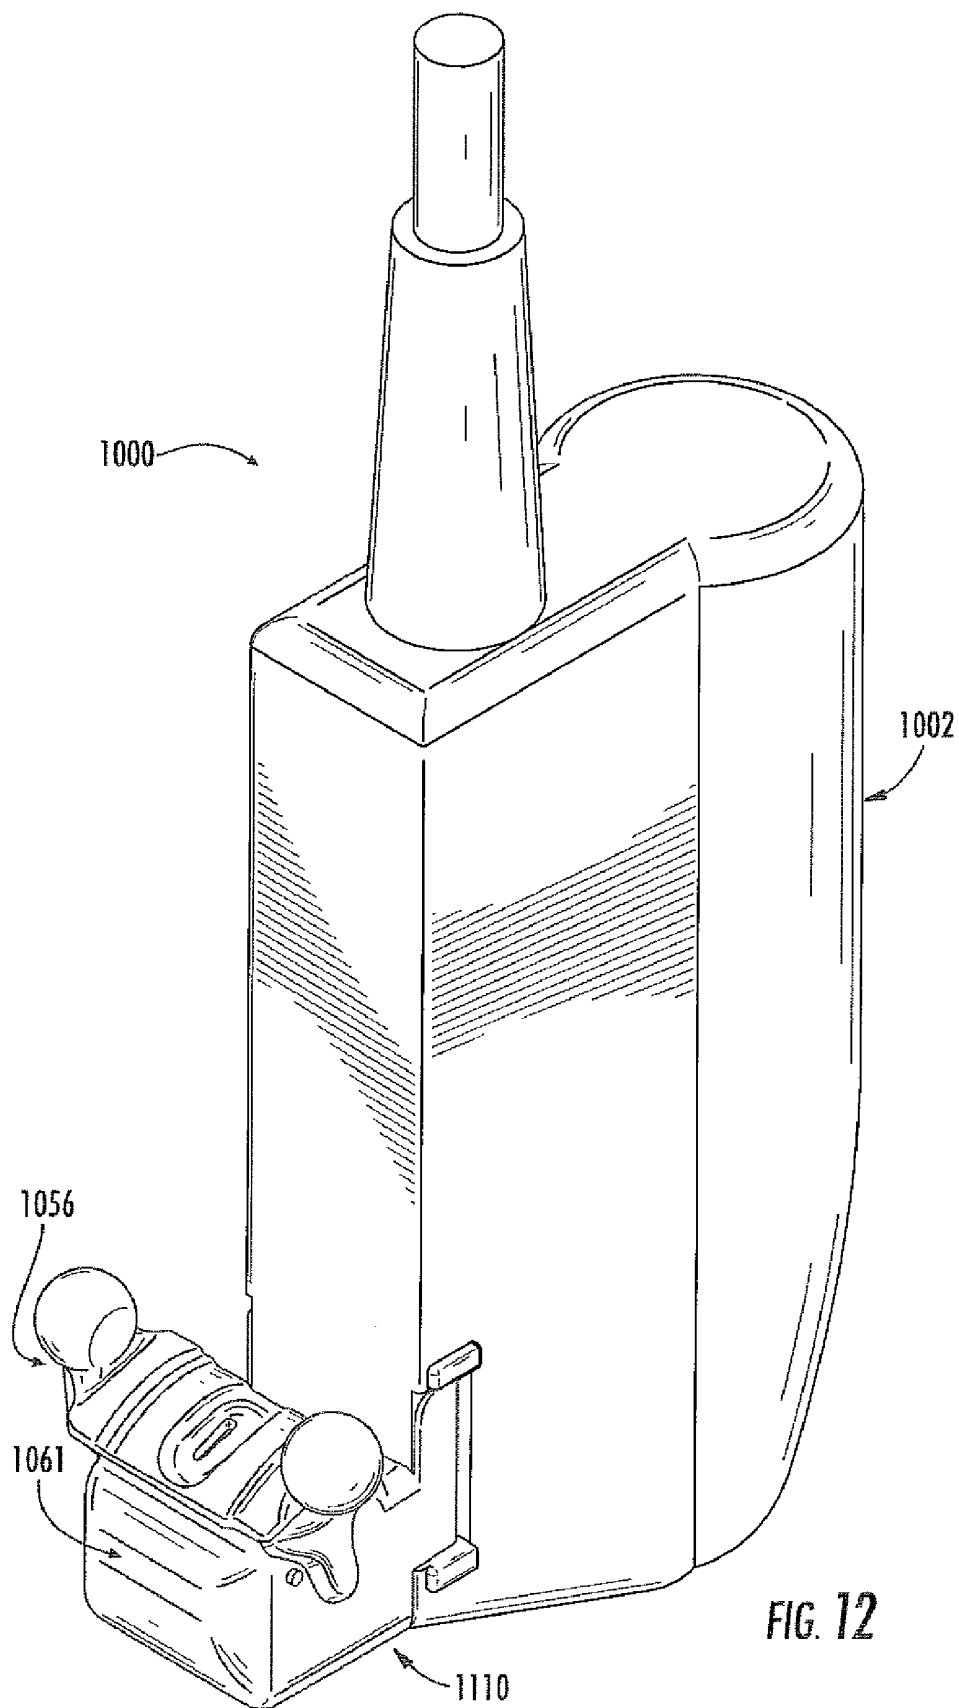

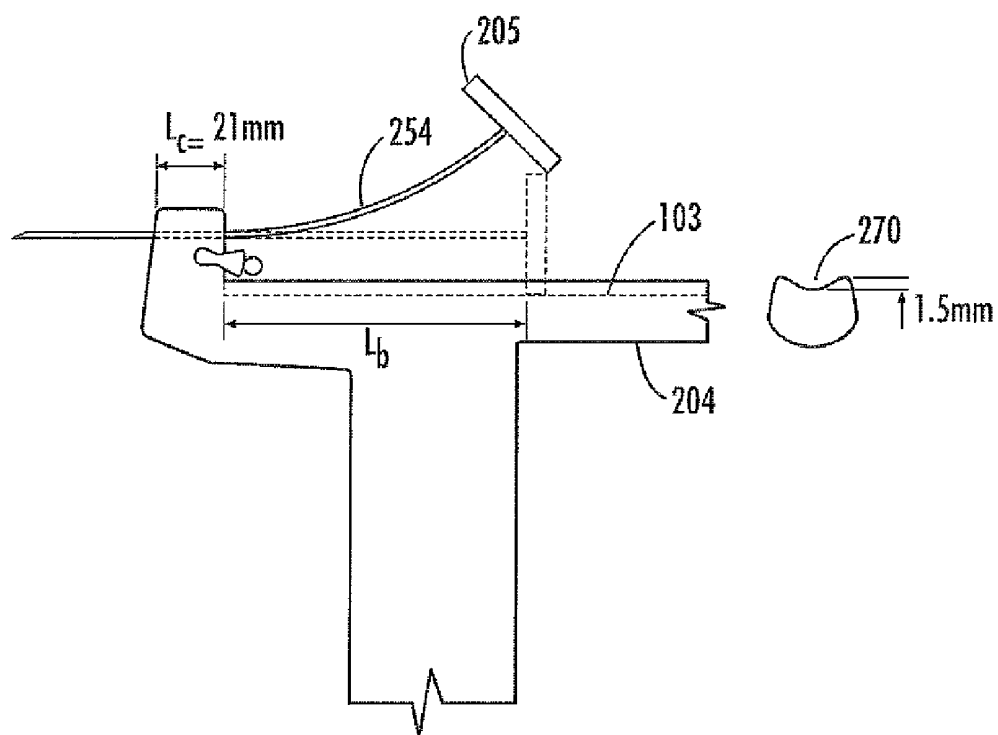


FIG. 13

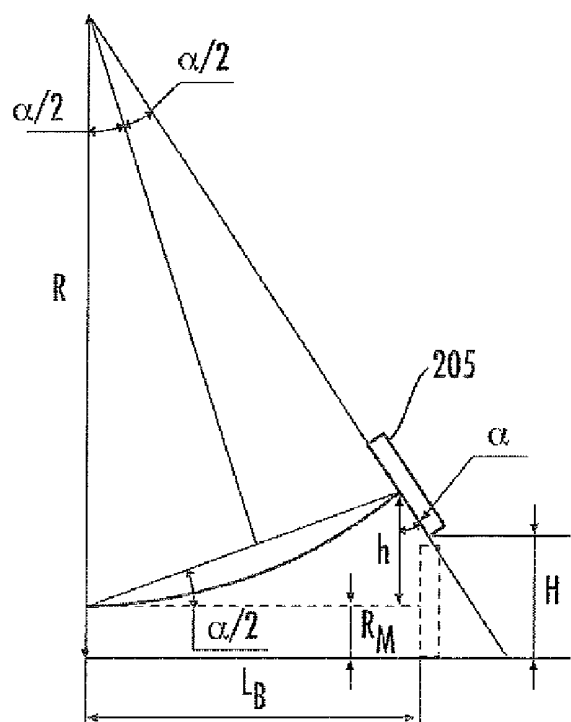
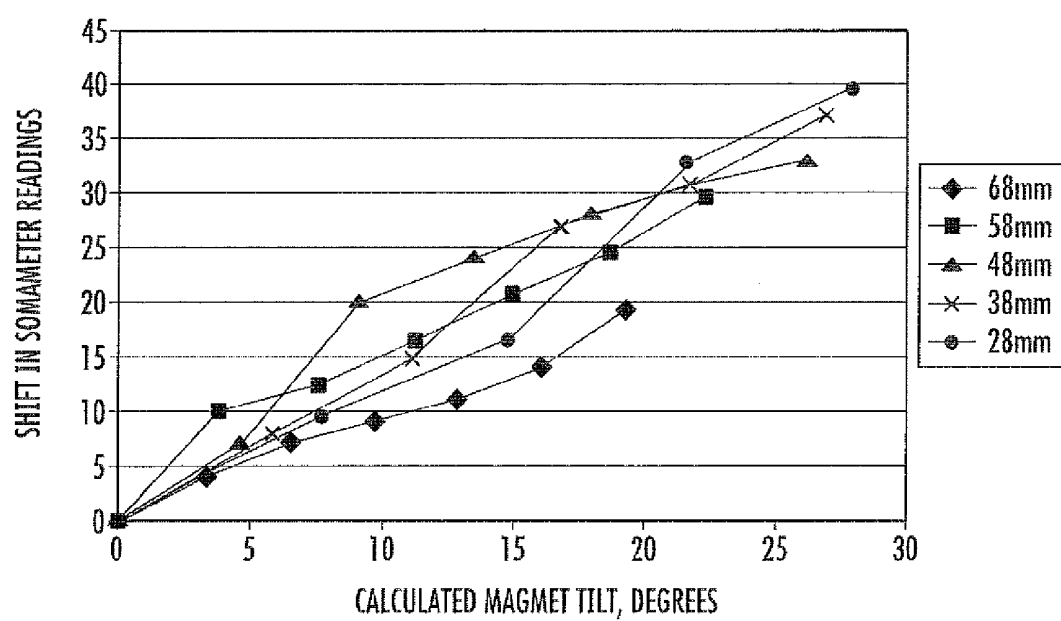


FIG. 14

*FIG. 15*

VIRTUAL IMAGE FORMATION METHOD FOR AN ULTRASOUND DEVICE

BACKGROUND OF THE INVENTION

[0001] Medical probe devices are utilized for many purposes, chief of which include catheterization, centesis, and biopsy procedures. Percutaneous placement of probes using these devices is often performed with techniques which rely on ascertaining the correct locations of palpable or visible structures. This is neither a simple nor a risk-free procedure. For instance, proper insertion and placement of a subdermal probe depends on correct localization of anatomical landmarks, proper positioning of the patient in relation to the care provider, and awareness of both the depth of the subdermal location and angle from the point of probe insertion. Risks of unsuccessful placement of a probe can range from minor complications, such as patient anxiety and discomfort due to repetition of the procedure following incorrect initial placement, to severe complications, such as pneumothorax, arterial or venous laceration, or delay of delivery of life-saving fluids or medications in an emergency situation.

[0002] Ultrasound guided techniques and devices have been developed to aid in correct placement of percutaneous probes. Ultrasound guided techniques often utilize two people, an ultrasound operator who locates the internal site and keeps an image of the site centrally located on a monitor, and a care provider who attempts to guide the probe to the site based upon the sonogram. Such techniques are very difficult perceptually. For instance, these techniques are complicated by the fact that the person guiding the probe to the internal site is not the same person as is operating the ultrasound. In addition, the generally thin, cylindrical probe is usually small and reflects very little of the ultrasound beam. Moreover, as the cylindrical probe and the ultrasound beam are not generally normal to one another, the small amount of ultrasonic energy that is reflected from the probe will reflect at an angle to the incident beam, resulting in little if any of the reflected energy being detected by the ultrasound transducer. As a result, the probe itself is difficult to visualize in the sonogram and the person placing the probe must attempt to guide the probe to the correct location using minimal visual feedback. For example, the only visual feedback available is often only subtle artifacts of the motion of the probe such as slight changes in the sonogram as the probe deflects and penetrates the surrounding tissue. The trained observer can pick up subtle ultrasonic shadow artifacts deep to the probe created when the probe blocks the transmission of the ultrasound beam to the tissue below, and such subtle artifacts can be used to help guide the probe to the desired subdermal location.

[0003] In an attempt to relieve the difficulties of ultrasound guided probe techniques, systems have been developed including a probe guide which can be attached to an ultrasound transducer housing. Problems still exist with such devices however. For instance, the probe is often inserted at angle that crosses the scanned plane displayed on the sonogram, restricting the intersection of the scanned plane and the point of the probe to a very small area in space. In addition, even if the probe passes for a length in line with the scanned plane, very little, if any, ultrasonic energy is reflected from the probe back to the transducer. In fact, due to the lack of reflection off of the probe, visual cues to the location of the probe tip may be even more difficult to discern on a sonogram when using these devices. In addition, in many of these devices, the probe passes through the ultrasound beam at a fixed depth

range depending on the set angle of the probe guide, and this may not correspond to the depth of the desired subdermal site, in which case it may not be possible to show the juncture of the desired site and the probe tip on the sonogram at all.

[0004] What are needed in the art are improved ultrasound devices and methods for using such devices. For instance, what are needed in the art are ultrasound devices that can be utilized by a single operator to accurately visualize the delivery of a probe to a subdermal location.

SUMMARY OF THE INVENTION

[0005] According to one embodiment, disclosed is a method for guiding a probe tip to a subdermal site. For instance, a method can include guiding a probe through a probe guide of an ultrasound device. The ultrasound device can include an ultrasound transducer and a detector, both in communication with a processor. The detector can determine the location of a target that is associated with the probe.

[0006] A method can also include configuring the processor to determine the location of a virtual probe tip from the location of the target as determined by the detector and communicated to the processor. Specifically, the processor can execute instructions provided via software to determine the location of the virtual probe tip. The instructions can include a set of correlation factors that correlate the location of the virtual probe tip as determined by the processor with the subdermal location of the probe tip.

[0007] A method can also include forming a sonogram of the subdermal site on a monitor from information communicated to the processor from the ultrasound transducer, and forming an image on the sonogram of the location of the virtual probe tip as determined and correlated by the processor from information communicated to the processor from the detector.

[0008] A method can also include configuring the processor to determine when a probe has been flexed such that it is out of alignment with the probe guide. For instance, the processor software can determine an index level that can indicate movement of the target away from the detector. Moreover, the processor can trigger an alarm when the index level exceeds a predetermined value, indicating that the target associated with the probe has been moved too far from the detector.

[0009] Also disclosed herein is an ultrasound device that can include an ultrasound transducer, a detector, and a processor. For instance, the detector can include an array of sensors. In one preferred embodiment, the sensors can be Hall effect transducers and the target that is associated with the probe for use with the device can be a magnet.

[0010] An ultrasound device can include additional components as well. For example, a device can include an alarm that can be triggered when a probe is flexed out of alignment with the probe guide (e.g., the index level determined by the processor exceeds a predetermined value). An ultrasound device can also include features such as one or more of a sterilizable shield that encloses at least a portion of the ultrasound device, and a clamp for clamping a probe within the probe guide.

BRIEF DESCRIPTION OF THE FIGURES

[0011] A full and enabling disclosure of the present subject matter, including the best mode thereof to one of ordinary

skill in the art, is set forth more particularly in the remainder of the specification, including reference to the accompanying figures in which:

[0012] FIG. 1A illustrates an ultrasound device including a series of Hall effect sensors along a length of the ultrasound device.

[0013] FIGS. 1B and 1C illustrate two embodiments of arrays of Hall effect sensors as may be utilized in disclosed ultrasound devices.

[0014] FIG. 2 illustrates the ultrasound device of FIG. 1A upon deformation of a probe during use.

[0015] FIG. 3A illustrates an overlay of a FIGS. 1 and 2.

[0016] FIG. 3B illustrates a portion of FIG. 3A.

[0017] FIGS. 4A and 4B graphically illustrate the change in the magnetic field strength along a sensor array for an aligned probe (FIG. 4A) and a probe that is flexed out of alignment (FIG. 4B)

[0018] FIG. 5A illustrates an ultrasound device including a series of sensors on the base of the ultrasound device.

[0019] FIG. 5B illustrates a top view of the ultrasound device of FIG. 5A.

[0020] FIG. 5C illustrates a top view of another embodiment of an array of sensors on the base of an ultrasound device.

[0021] FIG. 6 illustrates the ultrasound device of FIG. 5A upon deformation of a probe during use.

[0022] FIG. 7 illustrates a sterilizable shield that can encase an ultrasound device.

[0023] FIG. 8 illustrates the bottom portion of the sterilizable shield of FIG. 7.

[0024] FIG. 9 illustrates the top portion of a sterilizable shield, the bottom portion of which is illustrated in FIG. 8.

[0025] FIG. 10 illustrates another embodiment of an ultrasound device as disclosed herein.

[0026] FIG. 11 illustrates a partially exploded version of the ultrasound device as is illustrated in FIG. 10.

[0027] FIG. 12 illustrates another embodiment of an ultrasound device as disclosed herein.

[0028] FIG. 13 illustrates a system as utilized in the Example, provided herein.

[0029] FIG. 14 illustrates a geometric description of a magnet tilt calculation model, as described herein.

[0030] FIG. 15 graphically illustrates the shift in sensor readings upon flex in a probe as a function of the tilt of a target magnet.

[0031] Repeat use of reference characters in the present specification and drawings is intended to represent the same or analogous features of elements of the disclosed subject matter. Other objects, features and aspects of the subject matter are disclosed in or are obvious from the following detailed description.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0032] Reference will now be made in detail to various embodiments of the disclosed subject matter, one or more examples of which are set forth below. Each embodiment is provided by way of explanation of the subject matter, not limitation of the subject matter. In fact, it will be apparent to those skilled in the art that various modifications and variations may be made in the present disclosure without departing from the scope or spirit of the subject matter. For instance, features illustrated or described as part of one embodiment, may be used in another embodiment to yield a still further

embodiment. Thus, it is intended that the present disclosure cover such modifications and variations as come within the scope of the appended claims and their equivalents.

Definitions

[0033] As utilized herein, the term “probe” generally refers to an item that can be guided to a subdermal location, for instance for delivery of a therapeutic, e.g., a compound or a treatment, to the location; for removal of material from the location; and so forth. For example, the term “probe” can refer to a needle, a tube, a biopsy needle or blade, or any other item that can be guided to a subdermal location. In general, a probe can be guided by and used in conjunction with an ultrasound device as described herein. A probe can define a ratio of the length of the probe to the diameter (or a width) of the probe greater than about 10. Moreover, a probe can define any cross sectional shape, e.g., round, square, oblong, triangular, rectangular, etc.

[0034] As utilized herein, the term “ultrasound device” generally refers to a device that includes an ultrasound transducer therein and that can be utilized in conjunction with a probe, but does not necessarily include the probe itself. For instance, an ultrasound device can include a probe guide as an attachable or permanent component of the ultrasound device, and a probe can be utilized in conjunction with the ultrasound device to access a subdermal site by guiding the probe through the probe guide of the ultrasound device.

Detailed Description

[0035] According to one embodiment, disclosed herein are ultrasound devices and methods for use in accurately forming a virtual image of a probe in conjunction with a sonogram during a medical procedure. More specifically, disclosed herein are ultrasound devices that can include a detector for detecting the location of a target associated with a probe while the probe is held or moved within a probe guide of the ultrasound device. A detector can be in communication with a processor that can utilize information received from the detector with regard to target location and accurately identify the location of the probe tip based upon the information. A processor can also be in communication with a monitor and can create an image of a virtual probe on the monitor, for instance in conjunction with a sonogram. Beneficially, disclosed ultrasound devices can accurately correlate the image of the virtual probe tip with the location of the actual subdermal probe tip.

[0036] Utilizing an ultrasound device incorporating a probe guide, a probe can be guided such that the probe tip approaches a subdermal site that can be visualized on the scanned plane of a sonogram. For instance, the probe tip can travel on a path that defines a known correlation with sound waves emitted by the ultrasound transducer, e.g., coincident in the scanned plane, parallel to the scanned plane, or intersecting the scanned plane at a point. When utilizing the ultrasound device, the path of the probe to the subdermal site can be known: the probe will advance toward the subdermal site on a straight line and at a predetermined angular relationship to the ultrasound housing base from the probe guide opening to the subdermal site that is imaged by the ultrasound. Thus, the path of the probe and the scanned plane of the sonogram image can both be defined by the orientation of the ultrasound transducer and can be coordinated on the subdermal site. In order to strike the site, the probe tip can be guided along this

known path the desired distance. Beneficially, an ultrasound device can be formed so as to be conveniently utilized by a single operator who can insert a probe using a probe guidance system and also control the ultrasound transducer so as to see the sonogram and a virtual image of the probe overlaid on the sonogram in real time during the procedure.

[0037] An ultrasound device can incorporate a visualization system that can be used to create an image of a virtual probe that accurately correlates with the actual probe as it is being guided to a subdermal site and while it is being held at the site. Through utilization of a visualization system, the path of a probe and hence the location of the probe tip can be more clearly known in relation to subdermal site imaged by an ultrasound device.

[0038] In accord with the present disclosure, an ultrasound device can include a detector that can register the location of a target that is associated with the probe in the probe guide. This information can be electronically communicated to a processor and processed with input data (e.g., the length of the probe, etc.) and displayed as a real time image of a virtual probe in conjunction with a sonogram, i.e., the two images, the image developed from the data obtained by the detector, and the sonogram developed from the data obtained from the ultrasound transducer, can be displayed on the same monitor. Because the virtual probe location is correlated with the actual probe location, the location of the probe tip in relation to the subdermal site and the striking of the subdermal site by the probe tip can be seen in real time by an operator watching the virtual probe on the monitor during the procedure.

[0039] In general, any suitable detector can be utilized in disclosed devices for detecting the target that is associated with the probe. For instance, a detector can utilize infrared (IR), ultrasound, optical, laser, magnetic, or other detection mechanisms. In addition, the location of a detector is not critical to a device, save that it is capable of detecting the target that is associated with the probe. In addition, the target can be any suitable item. It can be all or a portion of the probe itself, or can be directly or indirectly attached to the probe.

[0040] FIG. 1A illustrates one embodiment of a magnetic based detection system as may be utilized. As can be seen, an ultrasound device **200** can include a handle **102**, a post **204**, and a base **206**. The base **206** can define a probe guide **126** therethrough. An ultrasound transducer **110** that transmits and receives ultrasonic waves can be located in base **106**. An ultrasound device **200** can include a series of sensors **201** that form a detector along a length of post **204**. Sensors can be sensitive to the presence of a target **205** that can be attachable to a probe **254** which can be, for example, a needle. In the magnetic based detection system, sensors **201** can be Hall effect sensors that are sensitive to a magnetic field and target **205** can include one or more magnets. One exemplary embodiment of a magnetic based detection system as may be incorporated in disclosed devices is describe in U.S. Pat. No. 6,690,159 to Burrenson, et al., which is incorporated herein by reference.

[0041] The sensors **201** can be arranged in one or more rows extending lengthwise along the post **204**, which is the direction along which the probe will move during insertion, herein defined as the X direction, as shown in FIG. 1A. As is known, the presence of a magnetic field can induce a voltage in a Hall effect sensor that is proportional to the size of the magnetic field. The voltage of each sensor **201** can be electronically scanned and processed to determine the location of the target **205** relative to the sensing array (i.e., the detector).

Processing can include grouping the sensors **201** and providing their outputs to a series of multiplexers which, in turn, are connected to a processor including software for analyzing the outputs and determining the location of the target **205** with regard to the entire sensor array. As the distance from the target **205** to the tip of the probe **254** is constant and known, the processor can likewise compute the location of the tip of probe **254**.

[0042] The processing of the sensor outputs can include determining which sensor **201** has the highest (or lowest, depending upon the magnetic field orientation) voltage output in a recognized grouping, corresponding to the location of the magnetic target **205**. In one embodiment, a processor can analyze the output of the sensor having the highest voltage output and a predetermined number of sensor(s) to each side. The analog outputs of the sensors can be converted to digital output according to known methodology that can then be evaluated to determine the target location.

[0043] Other methods can also be used to determine a set of sensors to evaluate for position. One such method is correlation. In this method, a vector of values corresponding to the desired signal can be mathematically correlated against the vector signal set from scanned sensors **201**. A peak in the correlation signal can indicate the center of the desired sensor set to evaluate.

[0044] Of course, the detection system need not utilize the peak signal and adjacent Hall sensors, but instead or in addition, sensors can evaluate the zero crossing signal that can result from using combinations of north and south magnets.

[0045] Referring again to FIG. 1A, the magnetic target **205** can be mounted at the base of syringe **207** in conjunction with probe **254**. The magnetic target **205** can be mounted on a base plate of magnetically permeable material. By incorporating a base plate of magnetically permeable material beneath the magnetic target **205**, the magnetic flux lines can be concentrated in a direction away from the base plate. Except at very close range, the greatest magnetic flux density can be present at the center of the magnet and extend perpendicular thereto, e.g., parallel to post **204** in the X direction. In general, the flux density decreases as a near Gaussian distribution function as one proceeds away from the magnet center line in the plane of the magnet. The field decreases in a near hyperbolic function as one proceeds away in a direction perpendicular to the magnet face. More details concerning suitable magnet assemblies are described in U.S. Pat. Nos. 5,285,154 and 5,351,004, both of which are incorporated herein by reference.

[0046] While the general construction shown in FIG. 1A can be used, it should not be considered to be limiting. In this particular embodiment, the target incorporates a magnet, with a magnetic field having a flux density which has a maximum at or adjacent to the center of the magnet and which decreases as a function of the distance moved away from the magnet. A single thin magnet can be used, or an array of magnets located side by side. The magnet or array of magnets then can be mounted in conjunction with a probe **254**.

[0047] The magnetic material of target **205** can be any suitable material that has a high enough energy to be detectable over the distance between the target **205** and the sensors **201**. A non-limiting list of suitable materials can include, without limitation, samarium cobalt, neodymium, or iron boron.

[0048] In one embodiment, a row of sensors **201**, e.g., sensors of Hall effect transducers, can be placed side by side in a single row in the X direction along the post **204**, as illustrated

in FIG. 1C. In one preferred embodiment, the sensors **201** can be located close to each other. However, the distance between adjacent sensors can be affected by connection pins, casings, housings in which they are mounted, etc. For example, a small sensing component can be mounted in conjunction with pins or contacts that project from a housing for connection to a supply voltage, ground and output, respectively. Thus, even if housings are placed end to end with their pins projecting in the same or alternate directions, there will be a certain center to center distance between adjacent sensors. This distance can be reduced by providing an array of sensors that are canted at an angle to the sensing or X direction, and are provided in two rows with the sensors staggered relative to each other, as illustrated in FIG. 1B. This can decrease the center to center distance between adjacent sensing components for increased accuracy of a detector. Of course, other arrangements of the individual sensors **201** forming an array along post **204** are likewise encompassed in the present disclosure.

[0049] The Hall effect sensors can operate at a typical supply voltage of about 5 volts. The sensors can be designed to provide a known output voltage, e.g., about 2.5 volts, in the absence of a detectable magnetic field. The presence of a south pole magnetic field will increase the output voltage above the output voltage by an amount proportional to the magnetic field applied within a predetermined range of magnetic field strength. Conversely, the application of a north pole magnetic field will decrease the output voltage from its quiescent value proportional to the magnetic field applied. Thus, for a given sensor, the output voltage can be directly correlated to the magnetic field strength. Moreover, as the magnetic field strength decreases with distance from the magnet, the output voltage of a sensor can be directly correlated to the distance between the sensor and the magnet.

[0050] According to one embodiment, all of the sensors **201** can be mounted on a single printed circuit board. The printed circuit board also can include multiplexers for scanning of the outputs of the sensors. For example, in the case of 64 sensors, eight eight-port multiplexers can be used and coupled to a processor. A ninth multiplexer can be used to take the output of the eight multiplexers to one output for an analog-to-digital converter.

[0051] Each multiplexer can receive the outputs from eight of the Hall effect sensors and can provide a selected output on a line to a processor. The processor can include an analog-to-digital converter that, in combination with the multiplexers, scans the outputs of the sensors and converts the signals to digital form. The processing unit can also store an algorithm by which the Hall array outputs (i.e., the location of the target) can be processed to determine the location of the tip of the probe relative to the sensor having the reading that locates that particular sensor closest to the center of the magnetic target **205**, for example, the sensor closest to the center of magnetic target can be the sensor obtaining the highest voltage output reading.

[0052] In one embodiment, processing of the outputs of the sensors **201** is accomplished by scanning all sensor outputs and determining which of them has the highest value. For this purpose, highest means the maximum difference from the quiescent value, i.e., the degree to which the output voltage has been shifted up or down from the quiescent voltage of, e.g., 2.5 volts. Highest value can also refer to the point in the array where a predetermined signal vector produces the highest correlation against the scanned sensors. The outputs of a predetermined number of sensors at each side of the highest

signal can also be considered, such as three sensors at each side or four sensors at each side. The outputs of the remaining sensors can be ignored or can be incorporated, as desired. This predetermined number of outputs can then be used to calculate the location of the magnetic target **205** and also the tip of the probe **254** that is a known distance from the magnetic target **205**. The accuracy of the measurement in the X direction can be maximized according any suitable methodology. For instance, the geometric arrangement of the sensors can be optimized, as discussed above, to limit the space between adjacent sensors, and the processor algorithm or algorithms used to convert the input signals to distance measurement can be adjusted to reflect the highest voltage output from any individual sensor depending upon its geometric location in the array and with respect to the magnetic target at its closest proximity.

[0053] Input information provided to a processing unit can include information concerning the position of each individual sensor. This can be by sensor number, for example, "1," "2," . . . , "64" for a 64-sensor array, which then can be converted to a location value based on the position of that sensor along the length of the post **204**. One simple algorithm for calculating the position of the probe tip from the selected outputs is represented as follows: The sensor having the highest output is labeled "S," and the system is designed to consider the outputs of three sensors at each side. Accordingly, such additional sensors can be labeled S-3, S-2, S-1, S+1, S+2 and S+3. The sensor number can be multiplied by its respective output, and the mean value determined for the selected sensors. This value then can be converted to a distance or location value for the tip of the probe, as the processing unit can include as input data the distance from the target magnetic material **205** to the probe tip. Similarly, if the conversion of sensor number to location already has been made, the location is weighted by the output of the corresponding sensor, and the mean value determined and used as the indication of the location of the probe tip.

[0054] However, the above method assumes linear proportionality in variation of magnetic field strength away from the target in the sensing direction. In actuality, the variation is nonlinear, and more nearly a Gaussian distribution. Consequently, a more accurate result can be obtained by fitting the selected data to a nonlinear function such as a Gaussian distribution curve. In this computation, one of the parameters is the mean of the Gaussian fit, which can correspond to the target location. Commercially available software can be used to calculate an appropriate Gaussian distribution fit, such as TableCurve 2D, available from SPSS Inc. Thus, the algorithm can include the step of calculating the Gaussian distribution fit and determining the mean.

[0055] Other parameters of a Gaussian distribution that can be taken into account can include the spread of the Gaussian signal and the amplitude. Spread calculations can be used for error correction or fault detection. If a given sensor or sensors influence the fit of a distribution curve beyond reasonable parameters, that sensor or sensors can be assumed to be providing erroneous data and be ignored.

[0056] Approximate Gaussian distributions can be calculated with as few as three sensors, i.e., a maximum strength sensor and one at each side. Using greater numbers of sensors to perform the calculation can increase accuracy, and can also allow more flexibility in ignoring sensors whose values vary unreasonably from other sensors in the calculation set, for error correction and fault detection purposes.

[0057] Signals from the sensors 201 can create a data stream which can be sent to a processor. A processing unit can be internal or external to an ultrasound device 200. For example, data from sensors can be sent to a standard lap top or desk top computer processor or part of a self-contained ultrasound device as is known in the art. A processor can be loaded with suitable recognition and analysis software and can receive and analyze the stream of data from sensors.

[0058] The analysis of data carried out by the processor and associated determination of probe tip location and formation of the virtual probe image can be improved by taking into account variations from an ideal system. For instance, each ultrasound device can vary somewhat from ideal in placement and output of individual sensors used in a sensor array. This potential effect can be mitigated through determination of a voltage offset value for each sensor, and the inclusion of that value in the processor programming, such that the data obtained from each sensor is processed in conjunction with the voltage offset value for that sensor.

[0059] For instance, each sensor can be scanned in the absence of a magnetic field, and the amount of voltage offset, if any, can be determined for each sensor. This voltage offset value can take into account both any innate variation in output of the sensor as well as any variation due to slight mislocation of a sensor when being placed on an ultrasound device during manufacturing. The calculation of the position of the magnetic target along the sensor array can include the adjustment of a sensor output by its offset amount.

[0060] Other variations in individual ultrasound devices due to manufacturing can be accounted for as well through determination of offset values that can be programmed into the processor. For instance, and with reference to FIG. 1A, the distance from the surface 108 to the probe guide exit at the top of base 206 and the location of the sensor array with reference to the probe guide can vary slightly from one ultrasound device to another. This can be accounted for by including a value in the processor programming that represents this variation. S_{offs} is utilized in the present disclosure to represent this variation. It includes two parts: one part is defined by the geometry of the ultrasound device and is the distance from the skin contacting surface of the device 108 at the exit of probe guide 126 to the beginning of the sensor array 103 (i.e., the farthest point of the sensor array from the base). The other component is dependant upon the manufacturing precision: how accurate the sensor array was placed on the ultrasound device in relation to the surface of the ultrasound transducer. This component is variable and will be different for every manufactured probe, but this difference is very small. This value can be obtained by a calibration process and can be provided to the processor programming algorithm.

[0061] An ultrasound device can also be programmed to include more than one S_{offs} value, depending upon the application. For instance, and as described further below, an ultrasound device can be utilized with a sterilizable shield, so as to be used in a sterile procedure. In this embodiment, a device 200 can be enclosed within a shield, which can alter the value of S_{offs} . Such variations can be easily accounted for, however, for instance, by providing a switch on the ultrasound device, which can provide the input value for S_{offs} to the processor, e.g., when the switch is set for a sterile application, the value for S_{offs} takes into account the use of a shield about the ultrasound device 200.

[0062] In addition to standard methods for improving accuracy of a system, as described above, a system can correct for

shifts in the location determination that can be brought about due to the flexibility of a probe. By way of example, FIG. 2 illustrates the flexing of a probe 254 that could occur during use if, for instance, a user inadvertently pushes the syringe 207 away from post 204 during a procedure. As can be seen, this can cause the portion of the probe 254 above the probe guide to bend. As the probe is flexible, the probe will straighten within the probe guide and proceed to the subdermal site along the path defined by the probe guide. This flexibility of the probe during delivery can lead to sensor information provided to the processor that differs from when the probe is aligned with the probe guide, which in turn can cause the processor to present a false location of exactly where the tip of the probe is on a sonogram.

[0063] To better illustrate this condition, FIG. 3A overlays a probe 207a that is aligned with the probe guide 126 in the X direction and a probe 207b that has been pushed a distance out of alignment and is flexed away from post 204 above the probe guide 126. When the probe is in the position of 207a, the magnetic target 205 will be determined by the array of sensors 201 to be at the marked location A. However, when the probe is in the position of 207b, the array of sensors 201 will obtain a different view of the magnetic field, which can lead to the determination of the virtual probe tip at a point that differs from the location of the actual probe tip at the subdermal site. For instance, the highest magnetic field strength can be determined by the sensor array to be at B, rather than at A, when the probe is flexed. This can lead to an error in the correlation of the virtual probe image with the actual probe.

[0064] The probe tip location of the virtual image is determined by the processor based upon the combination of the location of the magnetic target as determined by the sensor array and the known distance between the magnetic target and the probe tip. Any flexing of the probe 254 does not effect the location of the actual subdermal probe tip, it merely tilts the magnet away from the post 204.

[0065] FIG. 3B illustrates in greater detail how the flexing of the probe can lead a system to locate a virtual probe tip at a location that varies from the location of the actual probe tip. This variation is affected by two distinct aspects. First, the magnetic field determination by the sensor array will locate that magnet at point B rather than at point A, as discussed. This will have the effect of placing the virtual probe tip above the actual probe tip (too shallow). In addition, the bending of the needle will alter the geometry of the system, i.e., the length L_B is longer than the length of the chord 239 of the bent probe. The straight projection of the bent probe segment back to the sensor array will locate the magnet at point C, as shown in FIG. 3B, rather than at point A (where the magnet is located when the probe is not bent). This will have the effect of placing the virtual probe tip beneath the actual probe tip (too deep). Disclosed systems can take both of these affects in to account to accurately correlate a virtual image of a probe with the actual subdermal location of the probe.

[0066] The alteration in sensor reading that will occur when a probe is flexed out of alignment can be accounted for by the inclusion of a set of correlation factors into the processor algorithm. A set of correlation factors determined for a single ultrasound device can generally be applicable to all similar ultrasound devices (i.e., devices of a similar size and shape, a similar sensor array and location, etc.). Thus, a set of correlation factors need not be determined for every individual device (though this is certainly an optional embodiment). Rather, a set of correlation factors can be determined for a

single type of device, and those correlation factors can then be incorporated in the processor algorithm for all ultrasound devices of a similar type.

[0067] To describe the determination of the correlation factors, certain terminology is utilized herein including:

[0068] L_B —Length of the bent portion of the probe (e.g., a needle).

[0069] S_0 —The location of the magnetic target as would be determined by the sensor array were the probe to be properly aligned with the probe guide along the X axis.

[0070] S_H —The location of the magnetic target as determined by the sensor array when the probe is flexed out of this alignment.

[0071] L_C —The length of the probe guide as measured from the base surface of the probe guide 108 to the top exit from the probe guide (where the probe begins to be bent out of alignment).

[0072] S_{offs} —The calibrated distance from the skin contacting surface of an ultrasound device to the distal end of the sensor array.

[0073] H —A level index that represents the number of defined steps (or levels) out of alignment the probe is flexed. The level index H can be in any direction from the detector, i.e., in the Y axis, the Z axis or some combination thereof.

[0074] An equation to describe the correlation of a flexed probe has been determined to be:

$$S_0 = S_H + (a * H + c) L_B + b * H + d$$

[0075] where S_0 , S_H , H , and L_B are as described above and a , b , c , and d are a set of correlation factors determined experimentally for each type of ultrasound device, an example of which is explained in further detail below.

[0076] This general equation has been determined experimentally by a best fit process, as described below. Beneficially, this equation can hold for any ultrasound device in which a probe that is ideally aligned with a probe guide and an ultrasound transducer as described herein can be bent out of alignment such that a portion of the probe is bent away from the detector. To accurately portray the location of the virtual probe tip on a formed image so that it is aligned with the actual subdermal location of the probe tip, this equation can be utilized by the processor software to correlate the measured value of S_H with an aligned value S_0 .

[0077] The number of correlation factors encompassed in the equation and programmed into the processor can vary, as desired, with the utilization of more correlation factors providing a higher correlation between the virtual image and the actual location of a subdermal probe. For instance, in one embodiment, fewer correlation factors can be utilized, and the processor instructions can include solving the equation

$$S_0 = S_H + a * H * L_B + b * H.$$

which incorporates only the a and b correlation factors. Similarly, the correlation equation can utilize only the a or the a , b , and c correlation factors in an equation. Moreover, additional factors can be incorporated in an equation, as would be known to one of skill in the art, with a improved alignment possible between the virtual probe tip and the actual probe tip when utilizing more correlation factors in the equation.

[0078] The values for S_H and H can be obtained from the sensor during use. Specifically, S_H is the value obtained by the sensor for the magnetic target location, and H can be obtained by the variation in the measured parameter (e.g., voltage) from the expected value when the probe is not bent. For

instance, when the probe is not bent, and $H=0$, the voltage value obtained by the sensor at the magnetic target location will match the expected value. When the probe is flexed out of alignment, however, the highest voltage level obtained by the sensor can be less than expected. It is a simple matter to equate this drop in voltage with a level index value H , which can then be utilized in the correlation determination.

[0079] The value of L_B is not directly obtainable by the sensor readings, as are S_H and H . However, the length L_B can be written in terms that are obtainable by the sensor reading. Specifically

$$L_B = (S_{offs} - S_H) - L_C$$

[0080] By substituting this equation into the equation for determining S_0 , a value for S_0 can be obtained in terms of parameters that are either predetermined for each ultrasound device (e.g., L_C , S_{offs}) or determinable from the sensor reading (S_H , H).

[0081] Specific values for the correlation factors a , b , c , d , can be experimentally determined, as described in the examples section below. For example, the correlation factors can be:

[0082] a —between about -0.045 and about -0.055 , for instance about -0.050 ;

[0083] b —0 or between about 4 and about 5, for instance about 4.30;

[0084] c —0 or between about 0.02 and about 0.03, for instance about 0.028;

[0085] d —0 or between about -0.5 and about -0.06 , for instance about -0.053 .

[0086] The correlation equation can be included in the instruction provided to the processor in the form of software, and the location of a virtual probe tip imaged in conjunction with a sonogram can be correlated with the location of an actual subdermal probe tip.

[0087] Upon determination of a value for H from the readings obtained by the sensor, the distance the target magnet has traveled away from alignment can be determined. In one embodiment, a device can include a warning signal to alert a user should the magnet be moved beyond a predetermined level. For instance, should a probe be flexed such that the level index H becomes greater than, e.g., 5 or 6, an alarm can be triggered by the processor, so as to alert a user that the probe has been moved out of the desired position. An alarm can be visual, auditory, tactile, or any combination thereof. For instance, a signal light can be turned on should the level index determined at the processor exceed a predetermined value.

[0088] According to another embodiment, correlation of the virtual probe location as determined by the motion detector with the actual probe location can be determined through examination of the individual sensor outputs. As previously discussed, in one embodiment, a plurality of sensors are examined for determination of the location of the magnetic target. Specifically, a number of sensors both above and below a central signal (i.e., that signal location corresponding to the magnet locus) can also be considered, such as three sensors at each side or four sensors at each side. With reference to FIG. 1A, when a probe is aligned with the probe guide opening along the X-axis and generally parallel to the array of sensors 201 in post 204, the variation of magnetic field strength in the sensors above and below the target will be known, and in one embodiment, can be generally equivalent to each other (see, e.g., FIG. 4A, which illustrates one embodiment of the magnetic field strength along the X-axis,

with the magnet at point A). For instance, the magnetic field strength can decrease according to a Gaussian distribution in both directions from the highest signal at the center sensor to the individual sensors that are farther away from the highest signal strength. Even if the decrease above and below the highest signal strength is not equivalent, the ideal decrease in both directions can be known. Upon flexing of a probe away from the desired alignment, the magnetic field strength variation will be altered from the ideal distribution as the magnet and the magnetic field become tipped as compared to the sensors, as shown in FIG. 4B. Thus, this distribution curve and the variation from ideal of the magnetic field distribution curve can be utilized in another embodiment to determine the amount of flex from the aligned position of a probe.

[0089] While the above description is specific for magnetic sensors located on the post of a device, it should be understood that the present disclosure is not limited to this specific sensor type. Any other type of sensor can be utilized in disclosed ultrasound devices. For instance, FIG. 5A illustrates sensors 301 located on the base 306 of ultrasound device 300. Sensors 301 can be on the surface of base 306 or within the base 306, depending upon the sensor type, the materials of the base 306 and so forth. Sensors 301 are directed toward a target 305 associated with probe 354. Sensors 301 can utilize any suitable format, e.g., optics, sonics, proximity sensors, magnetics, etc., and determine the distance from the sensors 301 to the target 305. Input data to a processor can include the distance from the target 305 to the tip of probe 354 so as to accurately portray the location of the actual probe in forming a virtual probe image.

[0090] When the probe 354 is aligned with the probe guide opening 339 and centered above the probe guide opening, as illustrated in FIG. 5A, the two sensors 301 will obtain equivalent distances. FIG. 5B illustrates a top view of the device including two sensors illustrated in FIG. 5A. As can be seen, ultrasound device 300 includes two sensors 301 radially opposite one another across the probe guide opening 326. Upon flexing of the upper portion of a probe 354, as shown in FIG. 6, the distance measured from one sensor will differ from that of its counterpart that is opposite across the probe guide opening, as shown. Thus, the processor can obtain data and determine that the distance from each sensor to the target is no longer equivalent, as it should be.

[0091] According to this embodiment, the processor can include a correlation algorithm, similar to that described above for a sensor array located on a post parallel to the aligned direction of probe travel, so as to accurately locate the tip of the virtual probe image. For instance, an S_{offs} , as described above can be obtained for each device, based upon the variations in manufacturing between devices, and the measured sensor array result for the location of the target, S_{IT} , can be corrected to provide S_0 , i.e., what that result would be if the probe 354 were not flexed out of the aligned position. A series of correlation factors experimentally determined for an ultrasound device can be programmed into the processor for application to all devices of that same type. In other words, the correlation factors obtained can be a permanent part of the processor, and each processor need not be specifically reprogrammed for every device.

[0092] An ultrasound device can include a plurality of sensors at the base. For instance, FIG. 5C illustrates a top view of an embodiment in which an ultrasound device includes multiple sensors 301 surrounding a probe guide opening. When a probe is aligned with the probe guide opening in the X direc-

tion, all of the sensors will have an essentially identical reading as to distance from the sensor to the target. If the target is pushed in any direction and thus out of alignment, the sensors will register the target at a variety of different distances, alerting the processor to the misalignment. The correction algorithm can be similar to that described above for a two-sensor system, but can incorporate additional parameters for the other sensors.

[0093] A processing unit can also include standard imaging software as is generally known in the art to receive data from an ultrasound transducer that is a part of the ultrasound device in addition to software that can process readings from a detector with regard to misalignment of a probe in the device, as described, and form a virtual image on a monitor that accurately portrays the location of the actual probe being inserted subdermally. Input data for the processor, such as the length of the probe, offset values, correlation factors, and so forth, can be entered into the processor by the user at the time of use or can be preprogrammed into the system as default data, depending upon the nature of the data, as discussed. Through analysis of the data stream received from both the detector and the ultrasound transducer, a processor can calculate the position of the probe tip relative to the ultrasound transducer, relative to a sensor, relative to the skin contacting surface of the device, or relative to any other convenient reference point. A processor can communicate this position information digitally to a monitor and the information can be displayed on the monitor such as in a numerical format or as a real time image of a virtual probe. Moreover, this data can be illustrated in conjunction with, e.g., overlaid on, the sonogram that displays an image of the subdermal site, such as a blood vessel.

[0094] In such a manner, disclosed ultrasound devices can be utilized to actually show the approach of a probe toward a subdermal site on a monitor throughout the entire procedure. In addition, disclosed devices can be utilized to ensure the probe tip remains at the subdermal site during subsequent procedures. For example, as long as the detector is interacting with the target the virtual image of the probe can remain on the monitor. Thus, any motion of the probe tip in relation to the subdermal site can be noted by an observer, even following the clamping of the probe within the probe guide.

[0095] Any type of ultrasound transducer as is generally known in the art can be incorporated in ultrasound devices as disclosed herein. By way of example, a piezoelectric transducer formed of one or more piezoelectric crystalline materials arranged in a two or three-dimensional array can be utilized. Such materials generally include ferroelectric piezoceramic crystalline materials such as lead zirconate titanate (PZT). In one embodiment, the elements that form the array can be individual electrode or electrode segments mounted on a single piezoelectric substrate, such as those described in U.S. Pat. No. 5,291,090 to Dias, which is incorporated herein by reference thereto.

[0096] In general, an ultrasound transducer can be formed of multiple elements. However, single crystal ultrasound transducers are also encompassed by the present disclosure. The use of a multiple element ultrasound transducer can be advantageous in certain embodiments, as the individual elements that make up the transducer array can be controlled so as to limit or prevent any break or edge effects in a sonogram. For instance, the firing sequence of individual crystals can be manipulated through various control systems and prevent any possible 'blind spots' in a sonogram as well as to clarify the edges of individual biological structures in the sonogram.

Such control systems are generally known in the art and thus will not be described in detail.

[0097] Referring again to FIG. 1A, the scanned plane (i.e., the plane of the sonogram) can be the geometric central plane of the beam transmitted from the ultrasound transducer **110**. In one preferred embodiment, the path of a probe that is guided through probe guide opening **126** can be within the scanned plane. This is not a requirement of the present disclosure, however. For instance, the path of a probe passing through probe guide opening **126** can be at an angle to the scanned plane such that it intersects the scanned plane at a point. By way of example, the line defined by the path of a probe passing through the probe guide opening **126** can be at an angle of $\pm 1^\circ$ to the scanned plane in one embodiment, at an angle of ± 0.6 degrees in another embodiment, or at a lesser or greater angle in another embodiment. For instance, a line defined by the path of a probe passing through the probe guide opening can be at an angle of $\pm 10^\circ$, $\pm 20^\circ$, $\pm 45^\circ$, or even greater, in other embodiments.

[0098] An ultrasound device as encompassed herein can have any convenient geometry. For instance, and with reference to FIG. 1, handle **102** can be set at an angle to post **204** so as to be comfortably held in the hand while the device is being utilized. For instance, in the illustrated embodiment, handle **102** is about 90° to post **204**, though this angle can be varied as desired. Moreover, in another embodiment described further herein, an ultrasound device need not include an extending handle portion at all.

[0099] The base **206** of an ultrasound device can also have any convenient geometry. For instance, the skin contacting surfaces **108** can be angled, as illustrated, or can be planar from edge to edge. When present, the angle of a skin contacting surface **108** can vary from 0° to about 30° , or from about 10° to about 20° in another embodiment. In yet another embodiment, a skin contact surface can define an angle opposite to that illustrated in FIG. 1, i.e., the skin contacting surface **108** can be convex. A skin contacting surface can also include curvature, e.g., can define an arcuate profile along the length or width of the surface. The footprint shape of the skin contacting surface **108** may be rectangular, round, oblong, triangular, etc. With regard to size, the skin contacting surface **108** can be, e.g., between about 0.5 inches and about 6 inches on its greatest length. In one embodiment, the skin contacting surface **108** can be about 0.5 inches on its greatest width and can promote stability of the device during use. In other embodiments, it can be larger, however, such as about 1 inch on its greatest width, about 2 inches on its greatest width, or even larger.

[0100] The shape of all or a portion of an ultrasound device may be particularly designed to fit specific locations of the anatomy. For example, a device may be shaped to be utilized specifically for infraclavicular approach to the subclavian vein, approach to the internal jugular vein, specific biopsy procedures including, without limitation, breast biopsy, thyroid nodule biopsy, prostate biopsy, lymph node biopsy, and so forth, or some other specific use. Variations in shape for any particular application can include, for example, a specific geometry for the footprint of a base, alteration in the size of post and/or handle, as well as variation in angles at which various elements of a device meet each other.

[0101] An ultrasound device can be utilized in conjunction with a sterilizable shield, for instance in those embodiments in which a probe is intended for use in a sterile field. A sterilizable shield can be formed of sterilizable materials as

are generally known in the art. In one embodiment, a sterilizable shield can be formed of single-use materials such as polymeric materials, and the entire shield can be properly disposed of following a single use. In another embodiment, a sterilizable shield can be utilized multiple times, in which case it can be formed of a material that can be properly sterilized between uses. A sterilizable shield can be formed of a moldable thermoplastic or thermoset polymeric material including, without limitation, polyester, polyvinyl chloride, polycarbonate, and so forth.

[0102] FIG. 7 illustrates one example of a sterilizable shield **130** as may be utilized to encase an ultrasound device. Sterilizable shield **130** can include a lower section **132**, details of which are shown in FIG. 8, and an upper section **134**, details of which are shown in FIG. 9.

[0103] With reference to FIG. 8, shield section **132** can include a base **136** formed of an ultrasonic transmissive material. Base **136** can be of any suitable size and shape, but formed such that an ultrasound transducer housing base may be seated firmly in shield base **136**. Generally, a small amount of an ultrasonic gel can be placed between the bottom surface of the transducer housing base and shield base **136** during seating to prevent any air between the two and promote transmission of ultrasonic waves.

[0104] Arising out of shield base **136** is guide post **138**. Guide post **138** defines at least a portion of a probe guide **139** therethrough. Probe guide **139** extends uninterrupted completely through both guide post **138** and shield base **136**. Guide post **138** can include tabs as shown, or other formations such as hooks, insets, or the like that can be utilized to properly assemble shield base **136** about an ultrasound transducer housing. In one embodiment, guide post **138** may include a removable cap (not shown) for protection of the interior sterile surface of probe guide **139** during assembly of shield **130** with an ultrasound transducer housing. As shown in FIG. 9, section **134** defines the terminal portion **151** of probe guide **139**. Terminal portion **151** is sized so as to snugly reside over the top of guide post **138** of section **132** and form uninterrupted probe guide **139** extending from the top surface of portion **160** of section **134** to the bottom surface of base **136** of section **132**.

[0105] As can be seen, shield section **132** can also include tabs **140**, **142**, **144**, etc. that can be utilized in properly seating an ultrasound housing within shield section **132** as well as aligning shield section **132** with shield section **134** when assembling the complete shield **130** about an ultrasound transducer housing.

[0106] Tabs **140** on shield section **132** can match corresponding notches **141** on shield section **134** shown in FIG. 9. Together tabs **140** and notch **141** form a fastener that can secure shield section **132** and shield section **134** to one another. During assembly, tabs **140** can snap into notch **141** to securely fasten the two sections together and prevent separation of the sections **132**, **134** during use. Of course, a shield can include additional fasteners at other locations between the two sections, or can include a single fastener at an alternative location, as would be known to one of skill in the art.

[0107] In order to disassemble shield **130**, tabs **140** can be simply pinched together and slid out of notch **141**. In another embodiment, a single-use fastening mechanism can be employed to secure sections of a sterilizable shield to one another. According to this embodiment, in order to disassemble a shield following use, the tabs of the fastener can be permanently disabled upon disassembly of the shield. For

instance, tabs **140** and/or notch **141** can be permanently broken away from the shield by a pulling or twisting motion, allowing the shield sections to come apart and also ensuring that the shield, which is no longer sterile, cannot be utilized again. Any method that can ensure that a fastener can only be utilized a single time may alternatively be utilized.

[0108] To assemble the illustrated sterilizable ultrasound device, an ultrasound device **200** defining probe guide opening **126** shown in FIG. 1A can be seated in section **132** of sterilizable shield **130** such that guide post **138** extends through transducer housing probe guide opening **126**. As probe guide opening **126** of ultrasound device **200** is slid over guide post **138**, tabs on guide post **138** can slide or snap into recesses of probe guide opening **126** (not shown), helping to properly seat ultrasound device **200** in section **132**. After ultrasound device **200** is seated in section **132**, section **134** can be aligned with section **132** and fastened into place to cover the top of ultrasound device **200**. If a protective cap covers the end of guide post **138**, it can be removed during assembly and maintain the sterility of the interior of the probe guide **139** throughout the assembly process. Tabs **140** can snap or slide into recesses notch **141** to fasten and secure section **132** and **134** together.

[0109] Following the above described assembly process, probe guide **139** can extend continuously from the top of portion **160** of shield portion **134** through the shield base **136**. Moreover, and of great benefit to the device, probe guide **139** can be sterile and within the probe guide opening **126** of ultrasound device **200**.

[0110] Though illustrated as being formed of two separable sections, a sterilizable shield can be hinged or can include additional sections, as desired. For instance, a sterilizable shield can be formed of two, three, or more separable sections that can be assembled to enclose all or a part of an ultrasound housing and form a sterile barrier between the enclosed housing and an exterior field. In another embodiment, a sterilizable shield can be of a unitary construction. For instance, a sterilizable shield can be of a pliant material that can enclose all or a portion of an ultrasound housing and form a sterile barrier between the enclosed housing and an exterior field.

[0111] Referring to FIG. 7, the assembled sterilizable shield **130** can also include a clamp **156**. During use, clamp **156** can firmly hold a probe **154** in the probe guide and prevent motion of the probe **154** during a procedure such as a catheter insertion, a biopsy procedure, fluid aspiration, or the like. Motion of the subdermal probe tip following insertion can be much less likely when the probe **154** is securely clamped to the probe guide of the sterilizable shield **130** and the ultrasound device is in turn held and stabilized by an operator as compared to devices in which a probe is simply held free-hand by an operator.

[0112] As can be seen in FIG. 7, a probe **154** can extend through a probe guide (not shown) of sterilizable shield **130**. Clamp **156** sits atop the base **161** of sterilizable shield **130** such that probe **154** passes through clamp aperture **158** as shown. Co-owned patent application Ser. No. 12/576,498 to Ridley, et al., which is incorporated by reference, describes one clamp as may be incorporated with an ultrasound device. Any other clamping action can alternatively be utilized. For instance, a clamp can tighten about a probe by a rotational motion of a clamping surface about a clamp, as is illustrated in U.S. Pat. No. 7,244,234 to Ridley, et al., which is incorporated herein by reference. Any relative motion between a clamp and a probe that can serve to firmly hold a probe in

place through a friction hold, through physical interaction of probe/clamp segments, or through any combination thereof is encompassed in the present disclosure.

[0113] FIG. 10 illustrates another embodiment of an ultrasound device **800** that is encompassed by the present disclosure. According to this embodiment, ultrasound device **800** can include a handle **802**, a post **804**, and a base **806**. Ultrasound device **800** also defines a lower surface **810**, as shown. In this particular embodiment, however, the ultrasound transducer housing does not include a probe guide opening. Instead, ultrasound device **800** is removably attachable to a second portion that defines the probe guide opening. For instance, ultrasound device **800** can be utilized in conjunction with a sterilizable shield that defines a probe guide. Moreover, the sterilizable shield can be formed of a single or multiple removably attachable pieces.

[0114] FIG. 11 illustrates a sterilizable shield **930** that can be used in conjunction with an ultrasound device **800** illustrated in FIG. 10. Sterilizable shield **930** includes section **932** and section **961**, which defines a probe guide for passage of probe **954** therethrough. Additionally, section **932** can be separable into two or more section. Section **961** can also include clamp **956** defining aperture **958** and formations **962**, **963**. Clamp **956** can rotate about pivot **964** for clamping probe **954** in the probe guide. During use, section **961** can be attached to section **932**, for instance by use of aligned tabs and notches, and so forth, so as to attach the probe guide portion to the sterilizable shield.

[0115] Of course, any other arrangement of the individual portions of an ultrasound device are encompassed within the present disclosure. For instance, in one embodiment, a section of an ultrasound device that does not define a probe guide opening, as illustrated in FIG. 10, can be removably attached to a section that defines the probe guide opening and includes the clamp, without enclosing the entire device in a sterilizable shield. In another embodiment, a sterilizable shield portion can cover only the skin contacting surface of an ultrasound device. For instance, a shield portion can snap onto the base of an ultrasound device.

[0116] Another embodiment of an ultrasound device is illustrated in FIG. 12. As can be seen, ultrasound device **1000** does not include a handle portion. Such a device can be comfortably held by the rounded back portion **1002**, with the skin contacting surface **1110** held against a subject. Ultrasound device **1000** can include some form of attachment, e.g., tabs, slots, hooks, etc., to attach a probe guide portion **1061** comprising clamp **1056** to device **1000**. When attached, the probe guide of portion **1061** can be aligned with an ultrasound transducer located in the base of ultrasound device **1000**.

[0117] Presently disclosed ultrasound devices and methods may be utilized in many different medical procedures. Exemplary applications for the devices can include, without limitation

- [0118] Central Venous Catheterization
- [0119] Cardiac Catheterization (Central Arterial Access)
- [0120] Dialysis Catheter Placement
- [0121] Breast Biopsies
- [0122] Paracentesis
- [0123] Pericardiocentesis
- [0124] Thoracentesis
- [0125] Arthrocentesis
- [0126] Lumbar Puncture
- [0127] Epidural Catheter Placement

[0128] Peripherally Inserted Central Catheter (PICC) line placement

[0129] Thyroid Nodule Biopsies

[0130] Cholecystic Drain Placement

[0131] Amniocentesis

[0132] Regional Anesthesia—Nerve Block

[0133] Some of these exemplary procedures have employed the use of ultrasound devices in the past, and all of these procedures, as well as others not specifically listed, could utilize disclosed ultrasound devices to improve procedural safety as well as patient safety and comfort, in addition to provide more economical use of ultrasound devices.

[0134] The present disclosure may be better understood with reference to the Examples, provided below.

EXAMPLE 1

[0135] An ultrasound device as illustrated in FIG. 13 was utilized. The needle probe 254 was flexed away from the post 204 of the device, as shown. A sensor array 103 of Hall effect sensors was located within the post 204. The sensors used were ratiometric linear Hall effect sensors available from Allegro MicroSystems, Inc., model no. A1321. FIG. 13 also provides a top view 270 of the post 204, showing the curvature of the post to accommodate the target magnet 205. The needle 254 was flexed by increasing levels away from the post 204. Sensor array readings, S_H , which can be converted to a location parameter by simple geometric conversion based upon the ultrasound device, are provided in the Table 1, below. Data in each row were obtained with the same fixed position of the needle.

TABLE 1

Level H	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Meter	702.5	699	696	692	689												
readings	611	608	605	602	599	596	594										
S_H	520	517	514	511	509	507	506	504	502	500	499	497	496				
	460	458	455	453	451	449	447	446	444	443	442	441	440	439	437		
	401	399	397	394	393	391	389	386	384	383	381	380	378	377	376	375	374

[0136] As shown, flexing the needle (the more the needle is bent the higher is level number H) reduces the sensor readings S_H .

[0137] Best fit of the data, with precision better than 0.3 mm for levels from 0 to 10, and better than 0.6 mm for levels 11-16) provided the following equation:

$$S_0 = S_H + (a * H + c) * L_B + b * H + d$$

[0138] where

[0139] $a = -0.051$;

[0140] $b = 4.31$;

[0141] $c = 0.0276$;

[0142] $d = -0.534$.

EXAMPLE 2

[0143] FIG. 14 illustrates a geometric model utilized to describe the tilt of a target magnet with the flexing of an attached probe from alignment with a probe guide. An assumption was made that the needle was bent with a constant radius of R. (In this example, the value for the level index, H,

has been converted to the distance from the sensor array to the magnet.) The following equations can be written:

$$L_B = R * \alpha$$

$$h = 2R * \sin^2(\alpha/2)$$

$$h + R_M = H + R_M * \cos(\alpha)$$

[0144] R_M is the magnet radius (11 mm in this example).

[0145] Thus,

$$H = [L_B * \sin^2(\alpha/2)] / \alpha - R_M * \cos(\alpha)$$

[0146] This equation was solved digitally, and the results for the values of α (in radians) are shown in Table 2, below.

TABLE 2

H (mm)	$L_B = 68$ mm	$L_B = 58$ mm	$L_B = 48$ mm	$L_B = 38$ mm	$L_B = 28$ mm
0	0	0	0	0	0
3.5	3.34	3.9	4.68	5.84	7.76
5.5	6.6	7.7	9.22	11.44	14.92
7.5	9.84	11.44	13.64	16.78	21.64
9.5	13.04	15.14	17.96	21.96	28
11.5	16.2	18.76	22.2	27.02	
13.5	19.34	22.34	26.38		

[0147] The results of Examples 1 and 2 were combined to provide a graph (FIG. 15) illustrating the experimentally obtained values for the shift in the sensor reading due to the flexing of the needle ($S_0 - S_H$) depend upon the angle of the flex, α . As can be seen with reference to FIG. 15, the sensor

reading shift can not be explained only by the tilt of the magnet, this shift also depends upon the distance between the magnet and the sensors. Disclosed methods provide a route for accounting for this shift during the formation of a virtual image and correlating the position of a virtual image of a probe created on a monitor with the actual location of a subdermal probe.

EXAMPLE 3

[0148] A second set of data for S_H , the output of the Hall effect sensor array, were obtained utilizing a system similar to that described above in Example 1. Raw data is provided below in Table 3. Best fit of the data provided values of the correlation factors $a = -0.051$ and $b = 4.26$. Thus, the correlation equations are as follows (the values for S_{offs} and S_H are in units of 0.1 mm, hence the conversion factor in the equation):

$$L_B = (S_{offs} - S_H) / 10 - L_C$$

$$S_0 = S_H + (4.26 - 0.051 * L_B) * H$$

TABLE 3

H (mm)	$L_B = 68$ mm	$L_B = 58$ mm	$L_B = 48$ mm	$L_B = 38$ mm	$L_B = 28$ mm
0	203	306	404	501	597.5
3.5	199	296	397	493	588
5.5	196	293.5	384	486	581
7.5	194	289.5	380	474	565
9.5	192	285.5	376	470	558
11.5	189	281.5	373	464	
13.5	184	276.5	371		

[0149] Utilizing these correlation factors in the processing software, a test was run. A needle of length 88.9 mm (3.5 inches) was used. A value of S_{off} was determined to be 685. A value of L_C was determined to be 20.9 mm.

[0150] A device as illustrated in FIG. 13 including a detector was used. The detector provided the following readings:

[0151] $S_H=400$

[0152] $H=5$

[0153] From equation 1:

$$L_B=(685-400)/10+21.0=49.5 \text{ (mm)}$$

[0154] From equation 2:

$$S_0-S_H=(4.26-0.051*49.5)*5=8.7$$

[0155] Through use of the correlation factors, the actual needle was determined to protrude from the ultrasound device by a value of

$$dL_B=(S_0-S_H)/10=0.87 \text{ mm}$$

more than is determined by the meter with no correlation of the reading S_H . This determination was confirmed by actual measurement of the protrusion. Accordingly, when forming a virtual image of the needle on an ultrasound image, the location of the virtual needle tip can be accurately located with use of the correlation factors in the processing component of the system.

EXAMPLE 4

[0156] The system and correlation factors of Example 3 were utilized. Parameters measured by the detector included:

[0157] $S_H=550$

[0158] $H=3$

[0159] From equation 1:

$$L_B=(685-550)/10+21.0=34.5 \text{ (mm)}$$

[0160] From equation 2:

$$S_0-S_H=(4.26-0.051*34.5)*3=7.5$$

and

$$dL_B=(S_0-S_H)/10=0.75 \text{ mm}$$

[0161] This determined value was confirmed through actual measurement of the distance from the detector target to the tip of the needle.

[0162] It will be appreciated that the foregoing examples, given for purposes of illustration, are not to be construed as limiting the scope of this invention. Although only a few exemplary embodiments of this invention have been described in detail above, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accord-

ingly, all such modifications are intended to be included within the scope of this invention which is defined in the following claims and all equivalents thereto. Further, it is recognized that many embodiments may be conceived that do not achieve all of the advantages of some embodiments, yet the absence of a particular advantage shall not be construed to necessarily mean that such an embodiment is outside the scope of the present invention.

What is claimed is:

1. A method for guiding a probe tip to a subdermal site comprising:

guiding a probe through a probe guide of an ultrasound device, the probe terminating in the probe tip, the probe guide including a first end and a second end, the first end being closer to a skin contacting surface of the ultrasound device than the second end, the ultrasound device comprising an ultrasound transducer in communication with a processor, the ultrasound device further comprising a detector for determining the location of a target that is associated with the probe, the detector being in communication with the processor;

configuring the processor to determine the location of a virtual probe tip from the location of the target as determined by the detector and communicated to the processor, wherein the processor executes instructions to determine the location of the virtual probe tip, the instructions comprising a set of correlation factors that correlate the location of the virtual probe tip as determined by the processor with the subdermal location of the probe tip; forming a sonogram of the subdermal site on a monitor from information communicated to the processor from the ultrasound transducer; and

forming an image on the sonogram of the location of the virtual probe tip as determined and correlated by the processor from information communicated to the processor from the detector.

2. The method according to claim 1, wherein the instructions executed by the processor include the solution to the equation:

$$S_0=S_H+(a*H+c)*L_B+b*H+d$$

wherein

L_B —the portion of the probe as measured from the second end of the probe guide to the target

S_0 —the location of the target as would be determined by the detector when the probe is aligned with the probe guide

S_H —the location of the target as determined by the detector when a portion of the probe is flexed out of this alignment

H —A level index that represents the number of levels out of alignment the probe is flexed

a, b, c, d —correlation factors for the ultrasound device.

3. The method according to claim 2, wherein the correlation factors are:

a —between about -0.045 and about -0.055 , for instance about -0.050 ;

b —between about 4 and about 5, for instance about 4.3;

c —between about 0.02 and about 0.03, for instance about 0.028;

d —between about -0.5 and about -0.06 , for instance about -0.053 .

4. The method according to claim 2, wherein the correlation factor a is about -0.050, the correlation factor b is about 4.3, the correlation factor c is about 0.028, and the correlation factor d is about -0.053.

5. The method according to claim 1, wherein the detector comprises an array of sensors.

6. The method according to claim 5, wherein the sensors are Hall effect transducers and the target is a magnet.

7. The method according to claim 5, further comprising grouping the sensors and providing their outputs to a series of multiplexers.

8. The method according to claim 7, further comprising analyzing the output of a group of sensors, the center sensor of the group registering the highest or lowest voltage output of the group.

9. The method according to claim 5, further comprising developing a vector set of values corresponding to a predetermined signal and comparing that vector set to a vector set as determined by the sensor array.

10. The method according to claim 1, wherein the image of the location of the virtual probe tip comprises an image of a virtual subdermal portion of the probe.

11. The method according to claim 1, further comprising configuring the processor to determine an index level corresponding to the flexing of a portion of the probe and the subsequent movement of the target away from the detector.

12. The method according to claim 11, wherein the processor instructions comprise the triggering of an alarm when the index level exceeds a predetermined value.

13. The method according to claim 1, further comprising determining one or more offset values for the ultrasound device and incorporating the offset values in the processor instructions.

14. An ultrasound device comprising:

an ultrasound transducer for emitting and receiving sonic waves;

a probe guide for guiding a probe, the probe terminating at a probe tip, the path of a probe guided through the probe guide defining a known correlation with sonic waves emitted by the ultrasound transducer;

a detector for detecting the location of a target associated with a probe guided through the probe guide;

a processor in communication with the ultrasound transducer and with the detector, the processor being configured to execute a set of instructions to determine the location of a virtual probe tip, the instructions comprising a set of correlation factors that correlate the location of the virtual probe tip as determined by the processor with the subdermal location of the probe tip.

15. The ultrasound device according to claim 14, wherein the detector is an array of sensors.

16. The ultrasound device according to claim 15, wherein the sensors are Hall effect transducers and the target is a magnet.

17. The ultrasound device according to claim 15, wherein the array is a linear array.

18. The ultrasound device according to claim 15, wherein the array comprises sensors that are canted at an angle and are provided in multiple rows with the sensors staggered relative to one another.

19. The ultrasound device according to claim 14, wherein the instructions executed by the processor include the solution to the equation:

$$S_0 = S_H + (a * H + c) * L_B + b * H + d$$

wherein

L_B —the portion of the probe as measured from the second end of the probe guide to the target

S_0 —the location of the target as would be determined by the detector when the probe is aligned with the probe guide

S_H —the location of the target as determined by the detector when a portion of the probe is flexed out of this alignment

H—A level index that represents the number of levels out of alignment the probe is flexed

a, b, c, d—correlation factors for the ultrasound device.

20. The ultrasound device according to claim 19, wherein the correlation factors are:

a—between about -0.045 and about -0.055, for instance about -0.050;

b—between about 4 and about 5, for instance about 4.3;

c—between about 0.02 and about 0.03, for instance about 0.028;

d—between about -0.5 and about -0.06, for instance about -0.053.

21. The ultrasound device according to claim 19, wherein the correlation factor a is about -0.050, the correlation factor b is about 4.3, the correlation factor c is about 0.028, and the correlation factor d is about -0.053.

22. The ultrasound device according to claim 14, further comprising an alarm, wherein the processor is configured to determine an index level corresponding to the flexing of a portion of the probe and the subsequent movement of the target away from the detector, the processor instructions comprising the triggering of the alarm when the index level exceeds a predetermined value.

23. The ultrasound device according to claim 14, further comprising a sterilizable shield that encloses at least a portion of the ultrasound device.

24. The ultrasound device according to claim 14, further comprising a clamp for clamping a probe within the probe guide.

25. The ultrasound device according to claim 14, wherein the detector is located on the device such that the direction of motion of a probe when guided through the probe guide is parallel to the detector.

26. The ultrasound device according to claim 14, wherein the ultrasound device includes multiple removably attachable portions, a first portion defining the probe guide and a second portion including the ultrasound transducer.

* * * * *

专利名称(译)	超声设备的虚像形成方法		
公开(公告)号	US20120071759A1	公开(公告)日	2012-03-22
申请号	US12/885832	申请日	2010-09-20
[标]申请(专利权)人(译)	SOMA ACCESS SYST		
申请(专利权)人(译)	SOMA接入系统, LLC		
当前申请(专利权)人(译)	SOMA接入系统, LLC		
[标]发明人	HAGY M DEXTER PETROV ANDREW BURRESON BERNARD JAMES DOUDKIN ANDRE		
发明人	HAGY, M. DEXTER PETROV, ANDREW BURRESON, BERNARD JAMES DOUDKIN, ANDRE		
IPC分类号	A61B8/14		
CPC分类号	A61B8/0841 A61B8/4411 A61B8/4422 A61B8/4455 A61B2019/5276 A61B2017/3407 A61B2019/462 A61B2019/4857 A61B2019/5251 A61B17/3403 A61B2034/2051 A61B2090/062 A61B2090/0811 A61B2090/378 A61B5/062 A61B8/4483 A61B8/461 A61B2017/3413		
其他公开文献	US8425425		
外部链接	Espacenet USPTO		

摘要(译)

公开了超声装置和用于在医疗过程期间引导皮下探针的方法。可利用装置将探针通过探针导向器引导至皮下部位。另外,设备可以包括与处理器通信的检测器。检测器可以识别与探针相关的目标的位置。处理器可以利用来自检测器的数据并创建虚拟探针的图像,该图像可以准确地描绘实际探针在皮下区域的超声波图上的位置。另外,所公开的系统可以在处理器指令中包括一组相关因子。这样,虚拟探针图像可以与实际探针的位置相关联。

