



US 20050280355A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0280355 A1****Lee et al.**(43) **Pub. Date: Dec. 22, 2005**(54) **ORGANIC LIGHT EMITTING DISPLAY  
DEVICE AND METHOD OF FABRICATING  
THE SAME**(52) **U.S. Cl. .... 313/503; 313/504; 313/506**(76) **Inventors: Kwan-Hee Lee, Seoul (KR);  
Jang-Hyuk Kwon, Suwon-si (KR);  
Seoung-Yoon Ryu, Seoul (KR)**(57) **ABSTRACT**

Correspondence Address:  
**MCGUIREWOODS, LLP**  
**1750 TYSONS BLVD**  
**SUITE 1800**  
**MCLEAN, VA 22102 (US)**

An organic light emitting display device may include: a substrate having first, second and third pixel regions. A first electrode layer may be formed in each of the first, second and third pixel regions on the substrate. A hole injection layer may be formed over an entire surface of the substrate on the first electrode layers. A first hole transport layer may be formed on the first electrode layers in the first, second and third pixel region. A second hole transport layer may be formed on the first hole transport layer in any two adjacent pixel regions among the first, second and third pixel regions. A third hole transport layer may be formed on the second hole transport layer in any one of the two adjacent pixel region. A first, second and third organic emission layers may be formed on the first, second and third hole transport layer. A second electrode layer may be formed on the first, second and third organic emission layers. An OLED configured in this or a similar manner benefits from uniform operating characteristics and reducing tac time.

(21) **Appl. No.: 11/149,557**(22) **Filed: Jun. 10, 2005**(30) **Foreign Application Priority Data**

Jun. 18, 2004 (KR) ..... 2004-45724

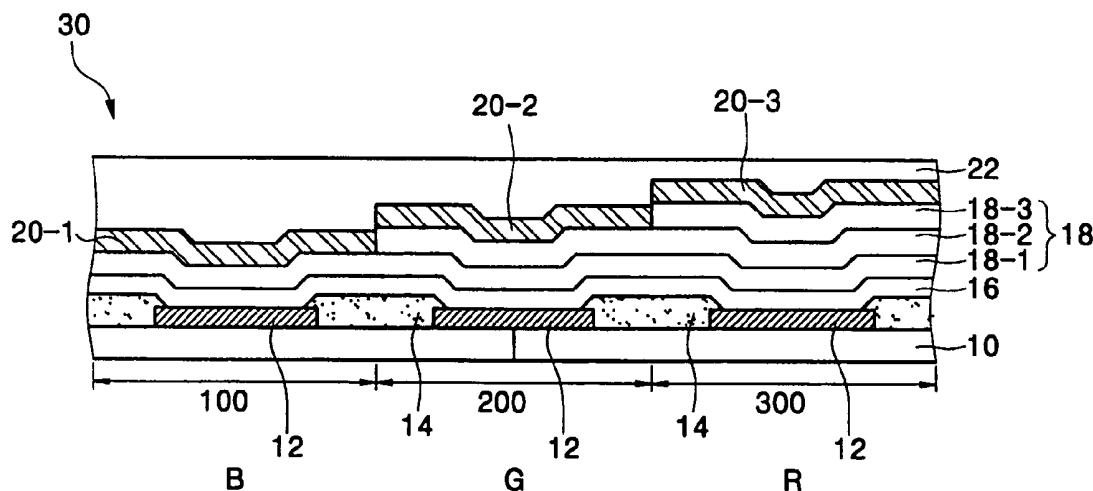
**Publication Classification**(51) **Int. Cl.<sup>7</sup> ..... H05B 33/14; H05B 33/26**

FIG. 1  
(PRIOR ART)


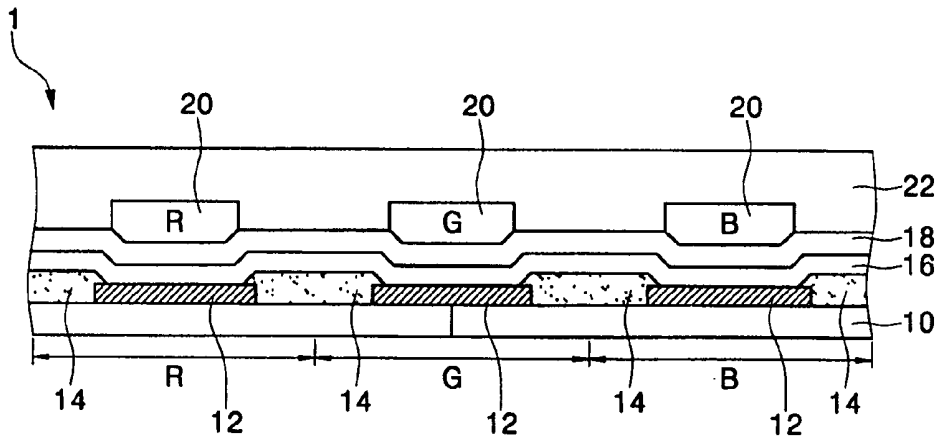


FIG. 2

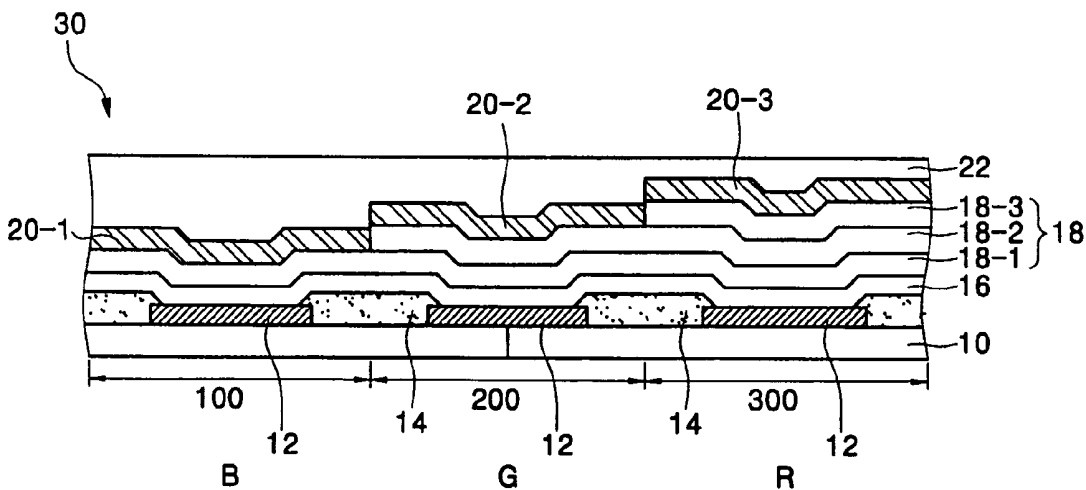

## ORGANIC LIGHT EMITTING DISPLAY DEVICE AND METHOD OF FABRICATING THE SAME

### CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to Korean Patent Application No. 2004-45724, filed Jun. 18, 2004, the disclosure of which is incorporated herein by reference in its entirety.

### BACKGROUND OF THE INVENTION

#### [0002] 1. Field of the Invention

[0003] The present invention relates to an organic light emitting display device (OLED) and method of fabricating the same and, more particularly, to an easily fabricated organic light emitting display device having uniform display characteristics and method of fabricating the same.

#### [0004] 2. Description of the Related Art

[0005] Active and passive matrix OLEDs incorporate thin film transistors and have attracted attention in recent years as providing an alternative to cathode ray tube (CRT) devices because OLEDs offer wider viewing angle, better contrast, and faster response speed.

[0006] OLEDs may be classified as organic or inorganic depending on the type of electroluminescent (EL) material used to form the emission layer of each pixel. The organic EL device has advantages of excellent luminance, low driving voltage, fast response speed, and realization of multi-colors, as compared to an inorganic EL device.

[0007] Further, an organic light emitting display device may comprise a full-color flat panel display device by implementing red, green, and blue colors on respective pixel regions, which are defined by a plurality of scan lines and a plurality of data lines that are formed perpendicular to the scan lines.

[0008] FIG. 1 is a cross-sectional view of a conventional full-color organic light emitting display device 1. In the conventional organic EL device 1, first electrode layers 12 are each formed in a predetermined pattern on a substrate 10 having red, green and blue color pixel regions to emit red, green and blue colors R, G, and B. In a top-emission organic light emitting display device, each of the first electrode layers 12 is formed of a reflective material such as metal, or is formed of a transparent material backed with a layer of reflective material.

[0009] An insulating material is deposited (e.g., a hole injection layer) in the gaps between electrode layers 12 to form a pixel defining layer 14, which is then patterned to form an opening above each electrode layer 12. In this manner, the insulating material separates the respective pixel regions to define individual pixels.

[0010] The hole injection layer 14 may be covered with a hole transport layer 16 to create a common layer over the entire surface of the substrate that encapsulates the first electrode layers 12.

[0011] Subsequently, light emitting materials corresponding to the respective pixel regions may be deposited on the hole transport layer 16 to form red, green and blue emission layers.

[0012] A hole blocking layer 18, an electron transport layer 20, and an electron injection layer 22 are sequentially formed over the entire surface of the substrate. A second electrode layer (not shown) having a pre-determined pattern may be formed on the electron injection layer 22, if necessary. The hole injection layer 14, the hole transport layer 16, the emission layer, the hole blocking layer 18, the electron transport layer 20, and the electron injection layer 22 may be organic thin films made of an organic compound.

[0013] However, in the full-color organic light emitting display device 1, there arises a difference in luminous efficiency between the differently colored pixels. That is, a red-colored light-emitting material has superior luminous efficiency as compared to green-colored and blue-colored light-emitting materials. Additionally, the green-colored light-emitting material has superior luminous efficiency to the blue-colored light-emitting material.

[0014] Accordingly, there have been many conventional attempts to control the thickness of organic thin films in order to obtain maximum efficiency and luminance. For example, Japanese Patent Laid-open No. Hei 4-137485 discloses a technique in which, in a configuration having an anode, a hole transport layer, an emission layer, an electron transport layer and a cathode formed in sequence, the thickness of the electron transport layer is set to about 30 nm to about 60 nm to enhance the luminous efficiency.

[0015] Further, Japanese Patent Laid-open No. Hei 4-328295 discloses a technique in which the thickness of an electron transport layer is adjusted so that the luminance substantially increases when light emitted from an emission layer and light reflected by a cathode interfere therewith. Further, Japanese Patent Laid-open No. Hei 7-240277 discloses an organic light emitting display device in which optical film thickness is controlled to improve luminance, in particular, to increase color purity of blue-color emission.

[0016] In these organic light emitting display devices, a different optical thickness is set for each color to improve the luminance. However, it is difficult to make the optical thickness different for each color in mass production because each color requires a different manufacturing process or step.

### SUMMARY OF THE INVENTION

[0017] The present invention solves the aforementioned problems associated with conventional devices by providing an organic light emitting display device having uniform display characteristics for each of red, green and blue pixels, and a method for fabricating the same.

[0018] In an exemplary embodiment of the present invention, an organic light emitting display device includes a substrate having first, second, and third pixel regions. First electrode layers are formed in each of the first, second and third pixel regions on the substrate. A hole injection layer is formed on the first electrode layers and over an entire surface of the substrate. A first hole transport layer is formed on the first electrode layers in the first, second and third pixel region. A second hole transport layer is formed on the first hole transport layer in two adjacent pixel regions among the first, second and third pixel regions. A third hole transport layer is formed on the second hole transport layer in any one of the two adjacent pixel regions. First, second, and third

organic emission layers are formed on the first, second, and third hole transport layers. A second electrode layer may be formed on the first, second, and third organic emission layers.

[0019] In an exemplary embodiment of the present invention, a method of fabricating an organic light emitting display device may include the following steps, which may be performed in virtually any order. First electrode layers on the substrate are formed and patterned on a substrate. A pixel defining layer is formed on the first electrodes and over the entire surface of the substrate and patterned to define an emission region in each of the first, second, and third pixel regions. A hole injection layer is formed over the entire surface of the substrate. A first hole transport layer is formed on the hole injection layer. A second hole transport layer is formed only on both the second pixel region and the third pixel region. A third hole transport layer is formed only on the third pixel region. Each of the first, second, and third light emitting materials in the respective pixel regions are patterned to form first, second, and third emission layers. A second electrode may be formed on the emission layers.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0020] The above and other features of the present invention will be described in reference to certain exemplary embodiments thereof with reference to the attached drawings.

[0021] FIG. 1 is a cross-sectional view of a conventional organic light emitting display device.

[0022] FIG. 2 is a cross-sectional view of an organic light emitting display device according to an exemplary embodiment of the present invention.

#### DETAILED DESCRIPTION

[0023] The embodiments of the invention and the various features and advantageous details thereof are explained more fully with reference to the non-limiting embodiments and examples that are described and/or illustrated in the accompanying drawings and detailed in the following description. It should be noted that the features illustrated in the drawings are not necessarily drawn to scale, and features of one embodiment may be employed with other embodiments as the skilled artisan would recognize, even if not explicitly stated herein.

[0024] Descriptions of well-known components and manufacturing techniques may be omitted so as to not unnecessarily obscure the embodiments of the invention. The examples used herein are intended merely to facilitate an understanding of ways in which the invention may be practiced and to further enable those of skill in the art to practice the embodiments of the invention. Accordingly, the examples and embodiments herein should not be construed as limiting the scope of the invention, which is defined solely by the appended claims and applicable law. Moreover, it is noted that like reference numerals may represent similar parts throughout the several views of the drawings.

[0025] FIG. 2 is a schematic cross-sectional view of the structure of an organic light emitting display device 30 according to one embodiment of the present invention. Referring to FIG. 2, in the OLED 30, first electrode layers

12 are formed in first a pixel region 100, a second pixel region 200, and a third pixel region 300, respectively, on a substrate 10.

[0026] The respective first, second, and third pixel regions implement different colors. Further, each pixel region implements any one of a red, a green and blue color. In other words, for example, when the first pixel region 100 implements the red color and the second pixel region 200 implements the green color, the third pixel region 300 implements the blue color, and when the first pixel region 100 implements the green color and the second pixel region 200 implements the blue color, the third pixel region 300 implements the red color. Any similar combinations may define the respective pixel regions.

[0027] Meanwhile, the insulating substrate may comprise any suitably insulating material, including, but not limited to, glass, plastic, or the like.

[0028] Each of the first electrode layers 12 may be formed of a reflective material, preferably one selected from a group consisting of Al, an alloy of Al, Ag, Ca, and Mg/A. Alternatively, each of the first electrode layers 12 may be formed of a transparent material backed with a layer a layer of reflective material. Preferably, the reflective material is selected from the group consisting of Al, an alloy of Al, or Ag, and the transparent material is selected from the group consisting of ITO, IZO or the like.

[0029] A pixel defining layer 14 is then formed on the first electrode layers 12 and is patterned to form an opening in the emission regions above each of the electrode layer 12. Preferably, an organic insulating layer such as benzocyclobutene (BCB), acryl resin, or the like is used as the pixel defining layer 14.

[0030] Thereafter, a hole injection layer 16 may be formed to cover the first electrode layers 12 and each of the pixel defining layers 14. Thus, the hole injection layer 16 should be formed in a continuous layer over the entire surface of the substrate including over the respective pixel regions. For the hole injection layer 16, a material, such as, but not limited to, copper phthalocynine (CuPc), 4,4',4"-tris(N-(3-methylphenyl)-N-phenylamino)triphenylamine(MTDATA), or the like may be employed.

[0031] A first hole transport layer 18-1 may be formed on the hole injection layer 16 over the entire surface of the substrate. Preferably the first hole transport layer 18-1 is formed as a single continuous layer.

[0032] a high-definition mask may be used to form a second hole transport layer 18-2 on the first hole transport layer 18-1 to extend over both the second pixel region 200 and the third pixel region 300, but not the first pixel region 100. In other words, although pixel region 200 and pixel region 300 are covered by both the second hole transport layer 18-2, and the first hole transport layer 18-1, pixel region 100 is covered only with the first hole transport layer 18-1.

[0033] Thereafter, the high-definition mask may be used to form a third hole transport layer 18-3 using the high-definition mask to cover only the third pixel region 300, and not the first pixel region 100 and second pixel region 200. In other words, pixel region 300 may be covered by the first hole transport layer 18-1, second hole transport layer 18-2,

and third hole transport layer **18-3**, while pixel region **200** is covered with the first HTL **18-1** and second HTL **18-2**, while pixel region **100** is covered only with first HTL **18-1**. In this manner, a different thickness of hole transport layer **18** will be formed in each of the first pixel region **100**, second pixel region **200**, and third pixel region **300**.

[0034] The hole transport layer **18** may comprise any suitable material, including, but not limited to, N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPD), triphenyldiamine (TPD), polyethylenedioxythiophene (PEDOT), or the like.

[0035] In another embodiment, the first hole transport layer **18-1**, the second hole transport layer **18-2**, and the third hole transport layer **18-3** may each be formed of a different material. Alternatively, any two layers of the first, second and third hole transport layers may be formed of the same material. Alternatively, each of the first, second and third hole transport layers may be formed of the same material. Of course, other variations are possible.

[0036] The first hole transport layer **18-1** may be about 10 nm to about 60 nm thick. The range of thickness depends on the thickness of the hole injection layer **16** and the hole transport layer **18**, which together form a full-color display device. Preferably, the second hole transport layer **18-2** is about 40 nm to about 70 nm thick. This thickness may vary depending on the thicknesses of a first light emitting color layer and a second light emitting color layer, and is determined by a difference in thickness between the first emission layer and the second emission layer because an optimal thickness differs for each color. Preferably, the third hole transport layer **18-3** is about 40 nm to about 70 nm thick. The thickness of the third hole transport layer **18-3** may vary depending on a difference in thickness between the second emission layer **18-2** and the third emission layer **18-3**.

[0037] Subsequently, first, second, and third light emitting materials are patterned to form first emission layer **20-1**, second emission layer **20-2** and third emission layer **20-3** on the hole transport layer **18**. In an OLED manufactured in accordance with the principles of the present invention, the first pixel region **100** should implement blue, the second pixel region **200** should incorporate green, and the third pixel region **300** should incorporate red, respectively, in order to create a full-color OLED. In view of the display characteristics, particularly, the luminous efficiency, which increases in an order of the blue color, the green color and the red color, the thickest region in the hole transport layer should implement the red color, a thinner region should implement the green color, and the thinnest region should implement the blue color.

[0038] Accordingly, it is preferable that the blue-color emission layer **20-1** is formed in the first pixel region **100**, the green-color emission layer **20-2**, is formed in the second pixel region **200** and, the red-color emission layer **20-3** is formed in the third pixel region **300**. [0036] The red-color emission layer may be formed of a phosphorescent material containing carbazole biphenyl (CBP) or monochlorophenols (mCP) as a host material and containing at least one selected from a group consisting of PIQIr(acac)(bis(1-phenylisoquinoline)acetylacetonate iridium), PQIr(acac)(bis(1-phenylquinoline)acetylacetonate iridium), PQIr(tris(1-phenylquinoline)iridium), and PtOEP(octaethylporphyrin platinum) as a dopant material. Alternatively, the red-color emission layer may be formed of a fluorescent material such as PBD:Eu(DBM)<sub>3</sub>(Phen) or Perylene.

[0039] The green-color emission layer may be formed of a phosphorescent material containing the CBP or the mCP as a host material and containing Ir(ppy)<sub>3</sub>(fac tris(2-phenylpyridine)iridium) as a dopant material. Alternatively, the green-color emission layer may be formed using a fluorescent material such as Alq<sub>3</sub>(tris(8-hydroxyquinolino)aluminum).

[0040] The blue color emission layer may be formed of a fluorescent material containing a material selected from a group consisting of DPVBi, spiro-DPVBi, spiro-6P, distyrylbenzene (DSB), distyrylarylene (DSA), PFO-based polymer, and PPV-based polymer. The blue-color emission layer may be formed of the above-mentioned fluorescent materials, as using a phosphorescent material may generate unstable optical characteristics.

[0041] The R, G, and B emission layers may be formed using conventional manufacturing methods, such as laser induced thermal imaging (LITI), an inkjet, a vacuum deposition, or the like.

[0042] The second electrode layer may be formed to be a transmissive metal electrode comprising any one of Ca, Mg/Ag and Al.

[0043] Meanwhile, the organic light emitting display device of the present invention may further include, as a common layer, at least one of a hole blocking layer **18**, an electron transport layer **20**, and an electron injection layer **22** on the emission layer.

[0044] Any suitable material(s) may be used for the hole blocking layer **18**, the electron transport layer **20** and the electron injection layer **22**. For example, Biphenoxy-bi(8-quinololato)aluminum (Balq) may be used for the hole blocking layer **18**. A polycyclic hydrocarbon-based derivative, a heterocyclic compound, tris(8-quinololato)aluminum (Alq<sub>3</sub>) may be used for the electron transport layer **20**. And, a material such as LiF or the like may be used for the electron injection layer **22**.

[0045] In one exemplary embodiment, the OLED **30** may further include a passivation layer (not shown) on a second electrode layer (not shown). Any suitable material(s) having a refractive index of at least 1.5 and a transmissivity of at least 70% may be used for the passivation layer. Illustratively, such organic materials include, but are not limited to, Alq<sub>3</sub>, NPB, CBP or the like. On the other hand, inorganic material having a refractive index of at least 1.5, such as, but not limited to, oxide-based materials, SiO<sub>2</sub>, SnO<sub>2</sub>, SiO, and TiO<sub>2</sub>, a nitride-based material Si<sub>3</sub>N<sub>4</sub>, or ZnS.

[0046] Meanwhile, although not shown, the OLED **30** of the present invention may further include one or more thin film transistors.

[0047] Thus, an OLED manufactured according to the principles of the present invention may improve the display characteristics, particularly, luminous efficiency, by manufacturing the hole transport layer to be a different thickness for each of the red, green and blue pixels. Further, the time may be reduced by patterning the second pixel region and the third pixel region in common using a high-definition mask when the second hole transport layer is formed.

[0048] Although the present invention has been described with reference to certain exemplary embodiments thereof, it will be understood by those skilled in the art that a variety

of modifications and variations may be made to the present invention without departing from the spirit or scope of the present invention defined in the appended claims, and their equivalents.

What is claimed is:

1. An organic light emitting display device, comprising:
  - a substrate having a first pixel region, a second pixel region, and a third pixel region;
  - first electrode layers each formed in the first, second and third pixel regions on the substrate;
  - a hole injection layer formed on the first electrode layer over an entire surface of the substrate;
  - a first hole transport layer formed on the first electrode layers in the first pixel region, the second pixel region and third pixel regions;
  - a second hole transport layer formed on the first hole transport layer in any two adjacent pixel regions among the first pixel region, the second pixel region and the third pixel region;
  - a third hole transport layer formed on the second hole transport layer in any one region of the any two adjacent pixel region;
  - a first organic emission layer formed on the first hole transport layers;
  - a second emission layer formed on the second hole transport layer;
  - a third emission layer formed on the third hole transport layer; and
  - a second electrode layer formed on each of the first emission region, the second emission region and the third organic emission layer.
2. The device of claim 1, wherein the first pixel region, the second pixel region and the third pixel regions implement different colors from each other and each region implements any one of red color, green color and blue color.
3. The device of claim 2, wherein the first pixel region implements the blue color, the second pixel region implements the green color, and the third pixel region implements the red color.
4. The device of claim 1, wherein the first hole transport layer, second hole transport layer, and third hole transport layer are each formed of different materials.
5. The device of claim 1, wherein two layers of the first hole transport layer, second hole transport layer, and third hole transport layer are formed of the same material.
6. The device of claim 1, wherein the first hole transport layer, the second hole transport layer and the third hole transport layer are formed of the same material.
7. The device of claim 1, wherein the first hole transport layer is formed in as a single layer.
8. The device of claim 1, wherein the first hole transport layer is about 10 nm to about 50 nm thick.
9. The device of claim 1, wherein the second hole transport layer is either about 40 nm to about 60 nm or about 80 nm to about 100 nm thick.

10. The device of claim 1, wherein the third hole transport layer is about 30 nm to about 50 nm thick.

11. The device of claim 1, wherein the first electrode layer is formed of a reflective material and the second electrode layer is formed of a transparent material.

12. The device of claim 1, wherein the first electrode layer is a transparent material having a reflecting layer, and the second electrode layer is formed of a transmissive material.

13. The device of claim 12, wherein the transmissive material is any one of Ca, Mg/Ag, Al, and Li.

14. The device of claim 1, further comprising a common layer, on the emission layer, at least one of a hole blocking layer, an electron transport layer, and an electron injection layer.

15. The device of claim 1, further comprising a passivation layer on the second electrode layer.

16. The device of claim 1, wherein each of the first, second and third hole transport layers are formed of at least one of N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPD), and triphenyldiamine (TPD).

17. A method of fabricating an organic light emitting display device (OLED), comprising:

- providing a substrate;
  - forming and patterning first electrode layers on the substrate;
  - forming a pixel defining layer on the first electrodes over an entire surface of the substrate and patterning the pixel defining layer to form an emission region to therein define in each of the first, second and third pixel regions;
  - forming a hole injection layer over an entire surface of the substrate;
  - forming a first hole transport layer on the hole injection layer;
  - forming a second hole transport layer only on both the second pixel region and the third pixel region;
  - forming a third hole transport layer only on the third pixel region;
  - patterning a first light emitting material in the first pixel region to form a first emission layer;
  - patterning a second light emitting material in the second pixel region to form a second emission layer;
  - patterning a third light emitting material in the third pixel region to form a third emission layer; and
  - forming a second electrode on each of the emission layers.
18. The method of claim 17, wherein the second and third hole transport layers are patterned using a high-definition mask.
19. The method of claim 17, wherein the first hole transport layer is formed in a common layer.
20. The method of claim 17, wherein the first, second and third pixel regions implement different colors from each other and each implement any one of red, green and blue colors, respectively.
21. The method of claim 20, wherein the first pixel region implements the blue color, the second pixel region implements the green color, and the third pixel region implements the red color.

**22.** The method of claim 17, wherein the first hole transport layer, second hole transport layer, and third hole transport layer are each formed of different materials

**23.** The method of claim 17, wherein two layers of the first, second, and third hole transport layers are formed of the same material.

**24.** The method of claim 17, wherein the first, second, and third hole transport layers are formed of the same material.

**25.** The method of claim 17, further comprising on the emission layer at least one of a hole blocking layer, an electron transport layer, and an electron injection layer, as a common layer.

**26.** The method of claim 17, further comprising a passivation layer on the second electrode layer.

\* \* \* \* \*

专利名称(译)	有机发光显示装置及其制造方法		
公开(公告)号	<a href="#">US20050280355A1</a>	公开(公告)日	2005-12-22
申请号	US11/149557	申请日	2005-06-10
[标]申请(专利权)人(译)	李宽HEE KWON张赫 RYU SEOUNG YOON		
申请(专利权)人(译)	李宽熙 KWON JANG赫 RYU SEOUNG-YOON		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	LEE KWAN HEE KWON JANG HYUK RYU SEOUNG YOON		
发明人	LEE, KWAN-HEE KWON, JANG-HYUK RYU, SEOUNG-YOON		
IPC分类号	H05B33/26 G09F9/30 H01L27/32 H01L51/50 H01L51/52 H05B33/10 H05B33/12 H05B33/14		
CPC分类号	H01L27/3211 H01L2251/558 H01L51/5265 H01L51/5048		
优先权	1020040045724 2004-06-18 KR		
其他公开文献	US7470933		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

## 摘要(译)

有机发光显示装置可包括：具有第一，第二和第三像素区域的基板。可以在衬底上的第一，第二和第三像素区域中的每一个中形成第一电极层。可以在第一电极层上的衬底的整个表面上形成空穴注入层。可以在第一，第二和第三像素区域中的第一电极层上形成第一空穴传输层。可以在第一，第二和第三像素区域中的任何两个相邻像素区域中的第一空穴传输层上形成第二空穴传输层。可以在两个相邻像素区域中的任何一个中的第二空穴传输层上形成第三空穴传输层。可以在第一，第二和第三空穴传输层上形成第一，第二和第三有机发射层。可以在第一，第二和第三有机发射层上形成第二电极层。以这种或类似方式配置的OLED受益于均匀的操作特性和减少的tac时间。

