



(19) **United States**

(12) **Patent Application Publication**
Song et al.

(10) **Pub. No.: US 2013/0234115 A1**
(43) **Pub. Date: Sep. 12, 2013**

(54) **ORGANIC LIGHT EMITTING DISPLAY HAVING A SINGLE-LAYERED ANTI-REFLECTION LAYER OF ALUMINUM FLUORIDE AND METHOD OF FABRICATING THE SAME**

Publication Classification

(51) **Int. Cl.**
H01L 51/56 (2006.01)
H01L 51/52 (2006.01)
(52) **U.S. Cl.**
CPC *H01L 51/56* (2013.01); *H01L 51/5237* (2013.01)
USPC 257/40; 438/28

(76) Inventors: **Seung Yong Song**, Yongn-si (KR); **Jin Woo Park**, Yongin-si (KR); **Young Seo Choi**, Yongin-si (KR); **Young Cheol Zu**, Yongin-si (KR)

(21) Appl. No.: **11/540,150**

(22) Filed: **Sep. 29, 2006**

(30) **Foreign Application Priority Data**

Jan. 25, 2006 (KR) 10-2006-0007890

(57) **ABSTRACT**

An organic light emitting display device includes a first substrate including a pixel region in which at least one organic light emitting diode including a first electrode, an organic layer, and a second electrode is formed and a non-pixel region formed beside the pixel region. The device includes a second substrate and a frit provided between the non-pixel region on the first substrate and the second substrate. A reflection prevention layer is formed on at least one surface of the second substrate.

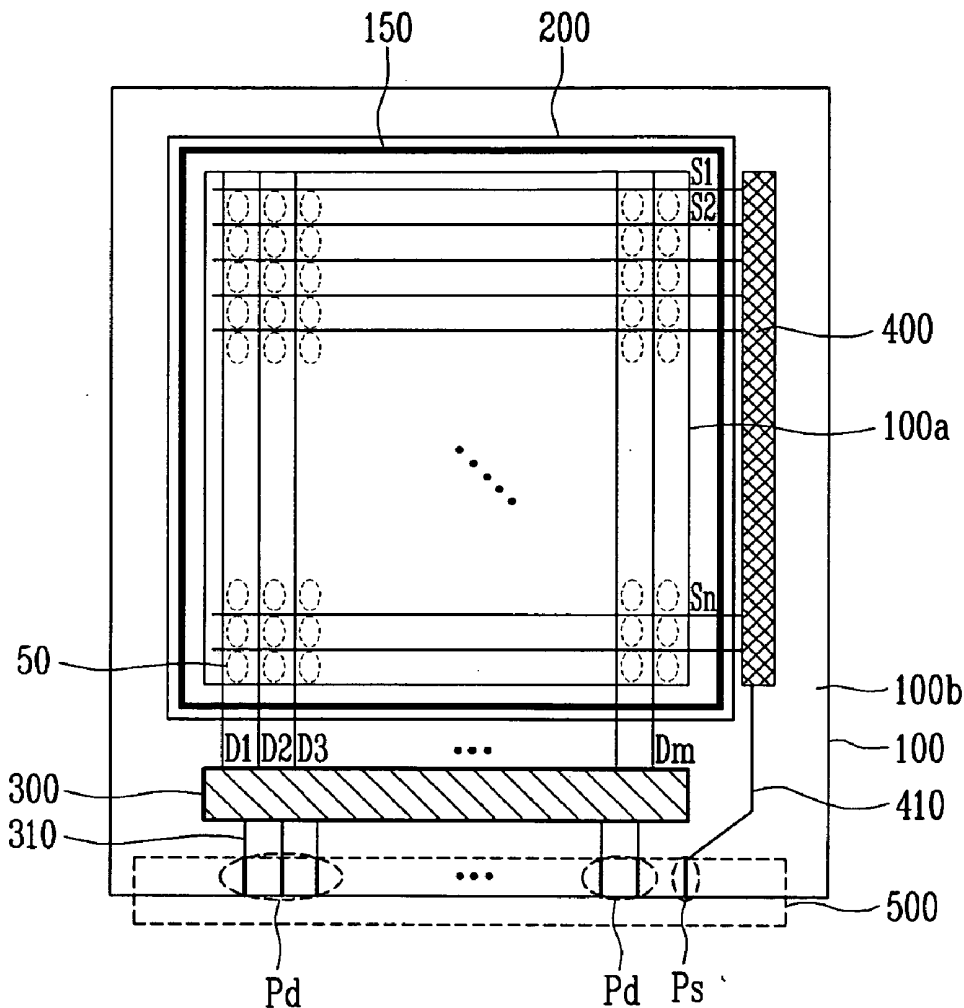


FIG. 1

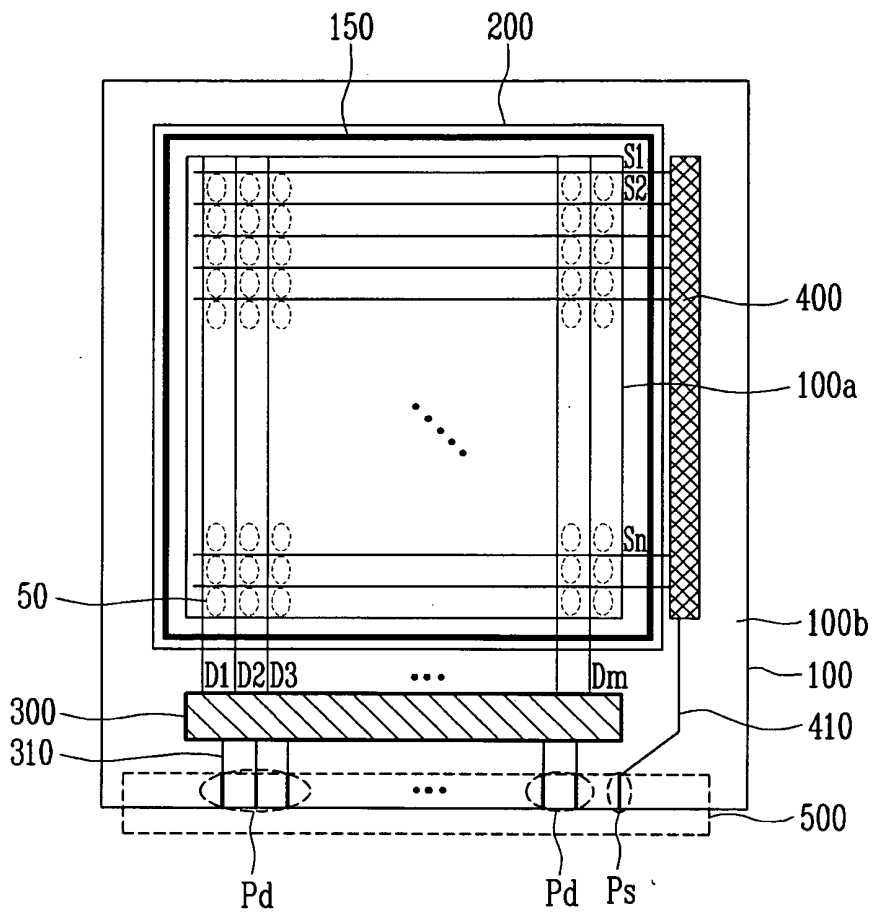


FIG. 2

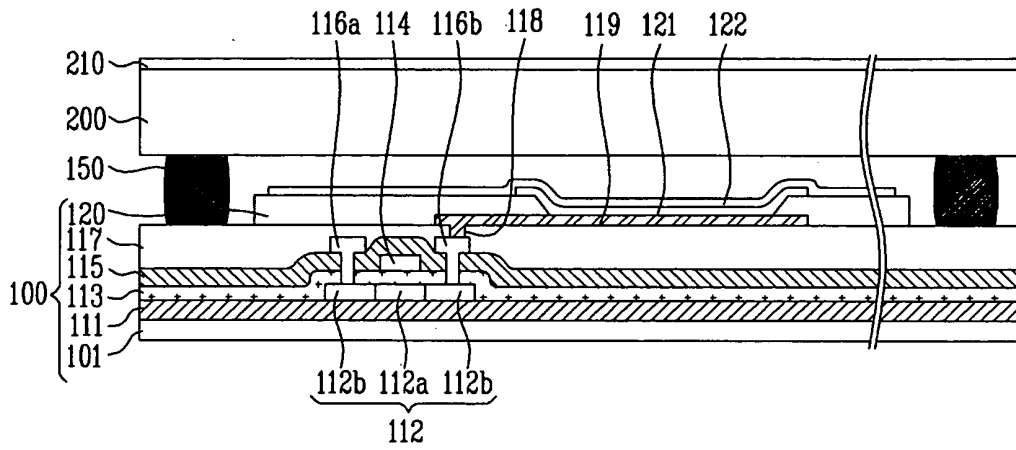


FIG. 3

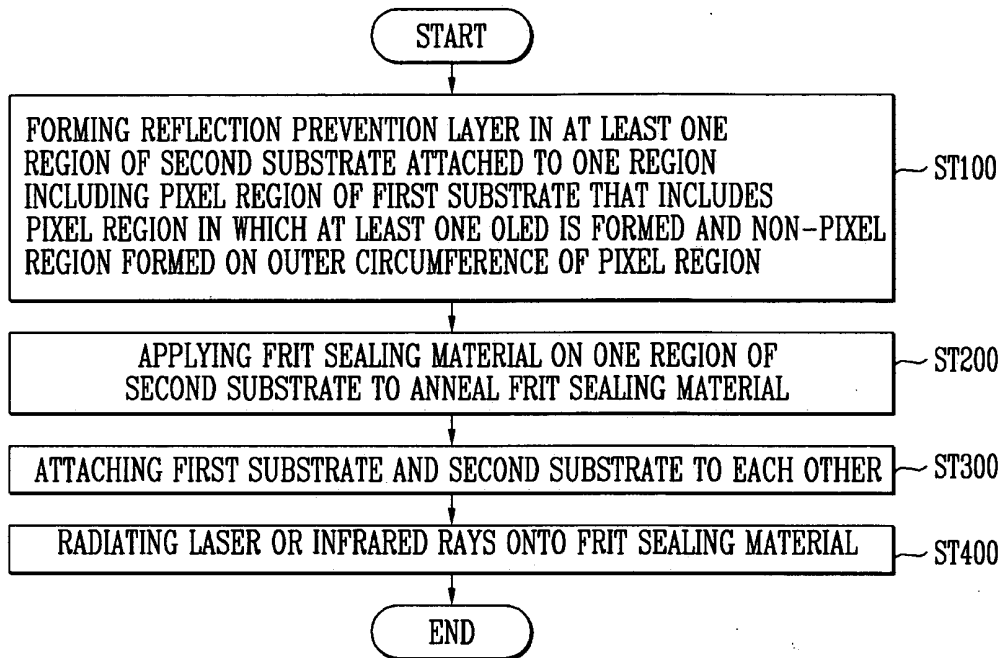


FIG. 4A

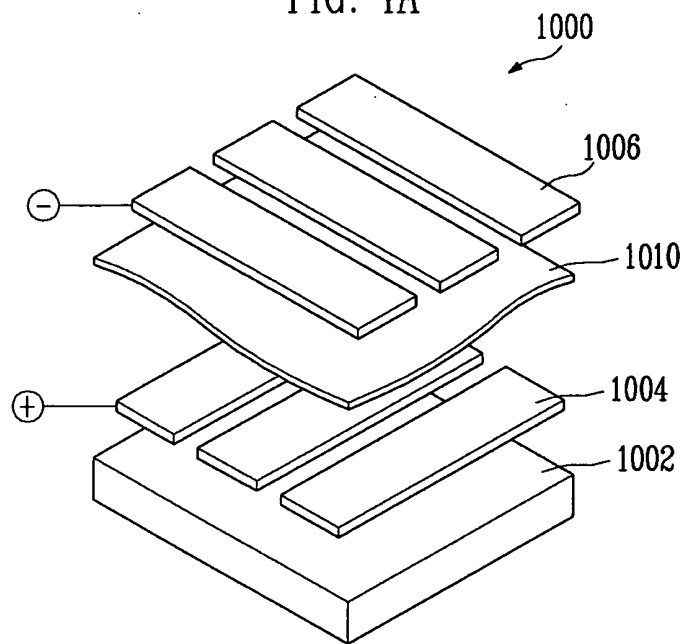


FIG. 4B

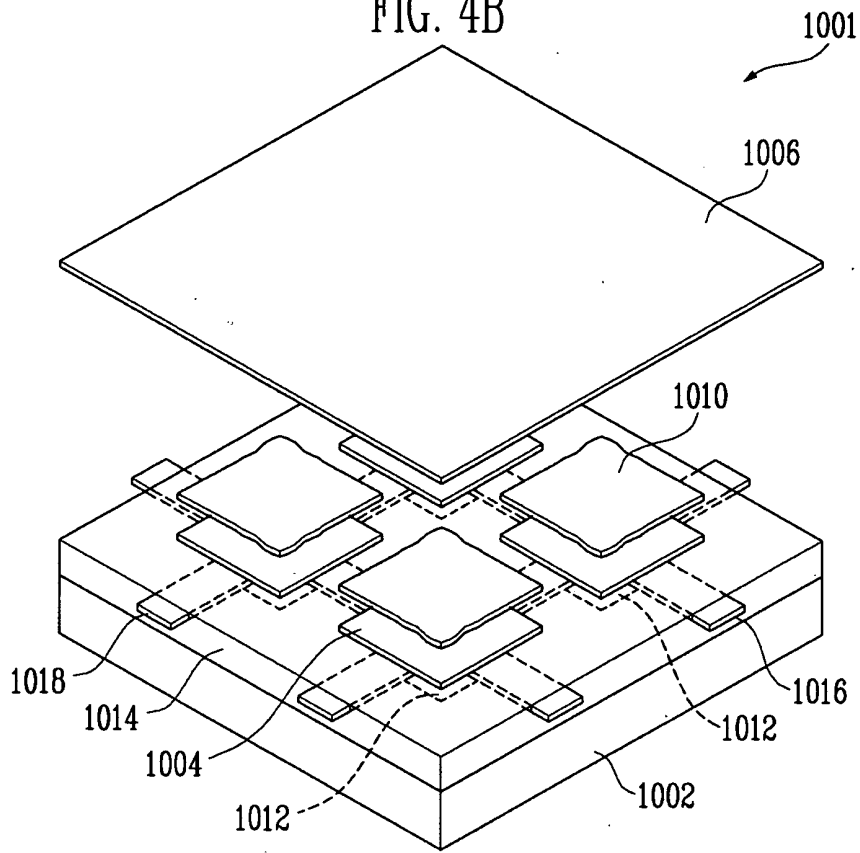


FIG. 4C

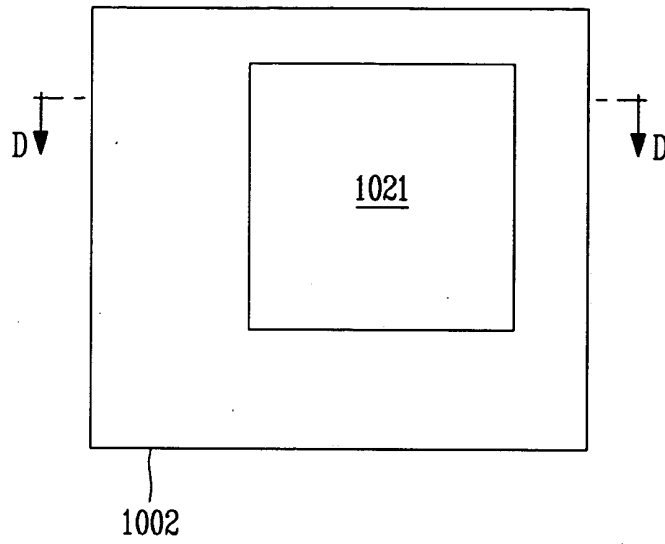


FIG. 4D


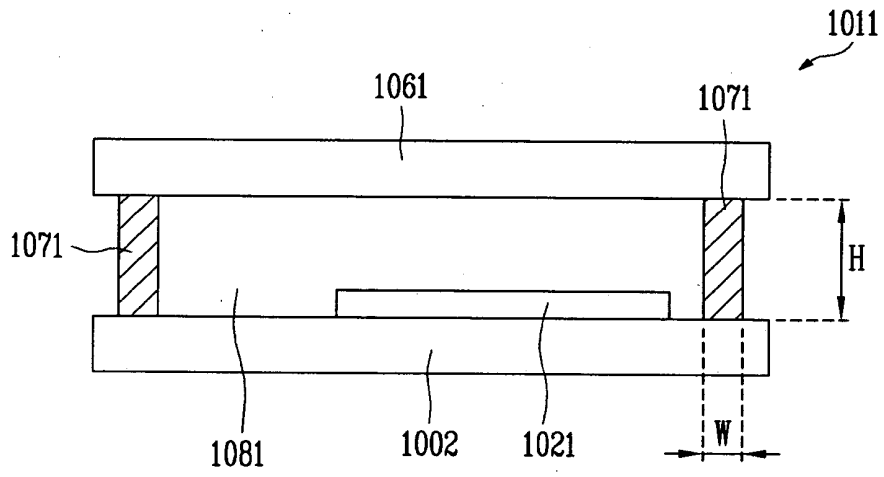


FIG. 4E

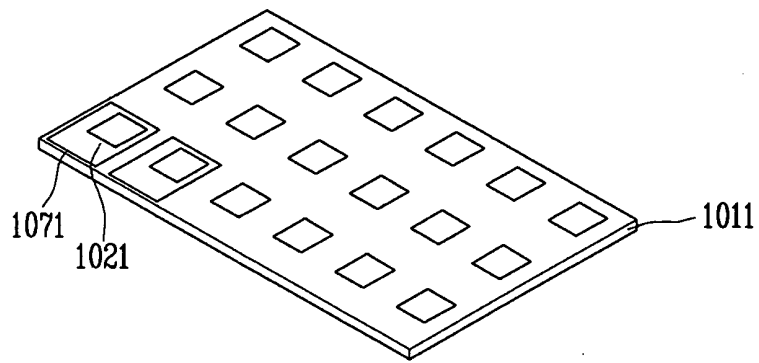

**ORGANIC LIGHT EMITTING DISPLAY
HAVING A SINGLE-LAYERED
ANTI-REFLECTION LAYER OF ALUMINUM
FLUORIDE AND METHOD OF FABRICATING
THE SAME**

CROSS-REFERENCE TO RELATED
APPLICATIONS

[0001] This application claims the benefit of Korean Patent Application No. 10-2006-0007890, filed on Jan. 25, 2006, in the Korean Intellectual Property Office, the disclosure of which is incorporated herein by reference in its entirety. This application is related to and incorporates herein by reference the entire contents of the following concurrently filed applications:

Title	Atty. Docket No.	Filing Date	Application No.
ORGANIC LIGHT-EMITTING DISPLAY DEVICE AND METHOD OF FABRICATING THE SAME	SDISHN.043AUS		
ORGANIC LIGHT-EMITTING DISPLAY DEVICE AND METHOD OF MANUFACTURING THE SAME	SDISHN.045AUS		
ORGANIC LIGHT EMITTING DISPLAY DEVICE	SDISHN.048AUS		
ORGANIC LIGHT-EMITTING DISPLAY DEVICE WITH FRIT SEAL AND REINFORCING STRUCTURE	SDISHN.051AUS		
ORGANIC LIGHT EMITTING DISPLAY AND METHOD OF FABRICATING THE SAME	SDISHN.053AUS		
ORGANIC LIGHT-EMITTING DISPLAY DEVICE WITH FRIT SEAL AND REINFORCING STRUCTURE BONDED TO FRAME	SDISHN.054AUS		
METHOD FOR PACKAGING ORGANIC LIGHT EMITTING DISPLAY WITH FRIT SEAL AND REINFORCING STRUCTURE	SDISHN.055AUS		
METHOD FOR PACKAGING ORGANIC LIGHT EMITTING DISPLAY WITH FRIT SEAL AND REINFORCING STRUCTURE	SDISHN.056AUS		
ORGANIC LIGHT-EMITTING DISPLAY DEVICE AND THE PREPARATION METHOD OF THE SAME	SDISHN.060AUS		
ORGANIC LIGHT EMITTING DISPLAY AND FABRICATING METHOD OF THE SAME	SDISHN.061AUS		
ORGANIC LIGHT-EMITTING DISPLAY AND METHOD OF MAKING THE SAME	SDISHN.062AUS		
ORGANIC LIGHT EMITTING DISPLAY AND FABRICATING METHOD OF THE SAME	SDISHN.063AUS		
ORGANIC LIGHT EMITTING DISPLAY DEVICE AND MANUFACTURING METHOD THEREOF	SDISHN.064AUS		
ORGANIC LIGHT-EMITTING DISPLAY DEVICE AND MANUFACTURING METHOD OF THE SAME	SDISHN.066AUS		
ORGANIC LIGHT EMITTING DISPLAY AND FABRICATING METHOD OF THE SAME	SDISHN.067AUS		
ORGANIC LIGHT EMITTING DISPLAY AND METHOD OF FABRICATING THE SAME	SDISW.017AUS		
ORGANIC LIGHT EMITTING DISPLAY DEVICE METHOD OF FABRICATING THE SAME	SDISW.018AUS		

-continued

Title	Atty. Docket No.	Filing Date	Application No.
ORGANIC LIGHT EMITTING DISPLAY AND METHOD OF FABRICATING THE SAME	SDISW.020AUS		

BACKGROUND

[0002] 1. Field of the Invention

[0003] The present invention relates to organic light emitting display devices and, more particularly, to packaging such devices.

[0004] 2. Discussion of Related Art

[0005] Recently, organic light emitting displays that use organic light emitting diodes are spotlighted. The organic light emitting displays are spontaneous emission displays that electrically excite phosphorous organic compounds to emit light and can be driven at a low voltage, can be easily made thin, and have a wide view angle and high response speed.

[0006] The organic light emitting display includes a plurality of pixels that include organic light emitting diodes that are formed on a substrate and thin film transistors (TFT) for driving the organic light emitting diodes. The organic light emitting diodes are sensitive to moisture. Therefore, a sealing structure in which moisture is prevented from contacting the organic materials by using a metal cap coated with an absorbent or a sealing glass substrate is provided. U.S. Pat. No. 6,998,776 B2 discloses that an organic light-emitting display includes a first substrate plate, a second substrate plate and a frit connecting the plates.

SUMMARY OF CERTAIN INVENTIVE ASPECTS

[0007] An aspect of an organic light emitting display device, which may comprises: a first substrate comprising a single layer or multiple layers; a second substrate comprising a single layer or multiple layers, the second substrate comprising an inner surface facing the first substrate and an outer surface facing away from the first substrate; an array of organic light emitting pixels formed on the first substrate and interposed between the first and second substrates, the array comprising a top surface opposing the inner surface of the second substrate, wherein the top surface and the inner surface has a gap therebetween with a gap distance smaller than about 300 μm ; a frit seal interconnecting the first and second substrates while surrounding the array, wherein the frit seal, the first substrate and the second substrate in combination define an enclosed space in which the array is located; and an antireflection layer formed over at least one of the inner and outer surfaces of the second substrate.

[0008] In the foregoing device, the antireflection layer may comprise a material having a reflectance for visible light smaller than the second substrate. The gap distance may be smaller than about 100 μm . The gap distance may be smaller than about 10 μm . The gap distance is from about 3 μm to about 150 μm . The antireflection layer may form on the outer surface of the second substrate. The antireflection layer may form on the inner surface of the second substrate. The antireflection layer may comprise at least one material selected from the group consisting of MgF_2 , NaF and AlF_3 . The antireflection layer may comprise at least two sublayers, each of which comprises a different material from each other. The antireflection layer may comprise a sublayer comprising ZnS

or TiO_2 and another sublayer comprising SiO_2 . The array may be configured to emit visible light through the top surface. The frit seal may comprise one or more materials selected from the group consisting of magnesium oxide (MgO), calcium oxide (CaO), barium oxide (BaO), lithium oxide (Li_2O), sodium oxide (Na_2O), potassium oxide (K_2O), boron oxide (B_2O_3), vanadium oxide (V_2O_5), zinc oxide (ZnO), tellurium oxide (TeO_2), aluminum oxide (Al_2O_3), silicon dioxide (SiO_2), lead oxide (PbO), tin oxide (SnO), phosphorous oxide (P_2O_5), ruthenium oxide (Ru_2O), rubidium oxide (Rb_2O), rhodium oxide (Rh_2O), ferrite oxide (Fe_2O_3), copper oxide (CuO), titanium oxide (TiO_2), tungsten oxide (WO_3), bismuth oxide (Bi_2O_3), antimony oxide (Sb_2O_3), lead-borate glass, tin-phosphate glass, vanadate glass, and borosilicate.

[0009] Another aspect of the invention provides a method of making an organic light emitting display device, which may comprise: providing an unfinished device comprising a first substrate and an array of organic light emitting pixels formed on the first substrate, the array comprising a top surface facing away from the first substrate; providing a second substrate and an antireflection layer, the second substrate comprises an inner surface and an outer surface, wherein the antireflection layer is formed on at least one of the inner and outer surfaces; arranging the second substrate over the unfinished device such that the inner surface opposes the array and that the array is interposed between the first and second substrates, wherein the array and the inner surface forms a gap therebetween; and forming a frit seal between and interconnecting the first and second substrates while surrounding the array such that the gap distance is smaller than about 300 μm .

[0010] In the foregoing method, wherein forming the frit seal may comprise interposing a frit material between the first and second substrate, and bonding the frit material to the first and second substrate so as to form a substantially hermetic seal. The frit seal may have a height measured between the first and second substrate, wherein the height may be from about 2 μm to about 30 μm . The gap distance may be about 3 to about 150 μm . The gap distance may be smaller than 10 μm . The organic light emitting device may be configured to display an image on the outer surface substantially free of Newton's rings.

[0011] Still in the foregoing method, the unfinished device may further comprise a plurality of additional arrays of organic light emitting pixels formed on the first substrate, wherein the method may further comprise forming a plurality of additional seals between and interconnecting the first and second substrates, wherein a first one of the additional seals may surround a first one of the additional arrays. The first additional array and the second substrate may form a gap therebetween with a gap distance smaller than about 300 μm . The antireflection layer may comprise at least one material selected from the group consisting of MgF_2 , NaF and AlF_3 . The antireflection layer may comprise a sublayer comprising ZnS or TiO_2 and another sublayer comprising SiO_2 .

[0012] Still another aspect of the present invention provides an organic light emitting display, which may comprise a first

substrate including a pixel region in which at least one organic light emitting diode including a first electrode, an organic layer, and a second electrode is formed and a non-pixel region formed beside the pixel region, a second substrate formed on one region including the pixel region on the first substrate, a frit provided between the non-pixel region on the first substrate and the second substrate to seal the first substrate and the second substrate to each other, and a reflection prevention layer formed on at least one surface of the second substrate.

[0013] Further aspect of the present invention provides a method of fabricating an organic light emitting display comprising a first substrate comprising a pixel region in which at least one organic light emitting diode is formed and a non-pixel region formed beside the pixel region and a second substrate formed on one region comprising the pixel region on the first substrate, which may comprise the steps of forming a reflection prevention layer in at least one region of the second substrate, applying a frit on one region of the second substrate to sinter the frit at a predetermined temperature, attaching the first substrate and the second substrate to each other, and melting the frit to adhere the first substrate and the second substrate to each other.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] These and other features and advantages of the invention will become apparent and more readily appreciated from the following description of the embodiments, taken in conjunction with the accompanying drawings of which:

[0015] FIG. 1 is a schematic plan view illustrating an organic light emitting display according to an embodiment of the present invention;

[0016] FIG. 2 is a sectional view illustrating the organic light emitting display according to an embodiment of the present invention;

[0017] FIG. 3 is a flowchart illustrating a method of fabricating the organic light emitting display according to an embodiment of the present invention;

[0018] FIG. 4A is a schematic exploded view of a passive matrix type organic light emitting display device in accordance with one embodiment;

[0019] FIG. 4B is a schematic exploded view of an active matrix type organic light emitting display device in accordance with one embodiment;

[0020] FIG. 4C is a schematic top plan view of an organic light emitting display in accordance with one embodiment;

[0021] FIG. 4D is a cross-sectional view of the organic light emitting display of FIG. 4C, taken along the line d-d; and

[0022] FIG. 4E is a schematic perspective view illustrating mass production of organic light emitting devices in accordance with one embodiment.

DETAILED DESCRIPTION OF EMBODIMENTS

[0023] Hereinafter, embodiments according to the present invention will be described with reference to the accompanying drawings.

[0024] An organic light emitting display (OLED) is a display device comprising an array of organic light emitting diodes. Organic light emitting diodes are solid state devices which include an organic material and are adapted to generate and emit light when appropriate electrical potentials are applied.

[0025] OLEDs can be generally grouped into two basic types dependent on the arrangement with which the stimulat-

ing electrical current is provided. FIG. 4A schematically illustrates an exploded view of a simplified structure of a passive matrix type OLED 1000. FIG. 4B schematically illustrates a simplified structure of an active matrix type OLED 1001. In both configurations, the OLED 1000, 1001 includes OLED pixels built over a substrate 1002, and the OLED pixels include an anode 1004, a cathode 1006 and an organic layer 1010. When an appropriate electrical current is applied to the anode 1004, electric current flows through the pixels and visible light is emitted from the organic layer.

[0026] Referring to FIG. 4A, the passive matrix OLED (PMOLED) design includes elongate strips of anode 1004 arranged generally perpendicular to elongate strips of cathode 1006 with organic layers interposed therebetween. The intersections of the strips of cathode 1006 and anode 1004 define individual OLED pixels where light is generated and emitted upon appropriate excitation of the corresponding strips of anode 1004 and cathode 1006. PMOLEDs provide the advantage of relatively simple fabrication.

[0027] Referring to FIG. 4B, the active matrix OLED (AMOLED) includes driving circuits 1012 arranged between the substrate 1002 and an array of OLED pixels. An individual pixel of AMOLEDs is defined between the common cathode 1006 and an anode 1004, which is electrically isolated from other anodes. Each local driving circuit 1012 is coupled with an anode 1004 of the OLED pixels and further coupled with a data line 1016 and a scan line 1018. In embodiments, the scan lines 1018 supply scan signals that select rows of the driving circuits, and the data lines 1016 supply data signals for particular driving circuits. The data signals and scan signals stimulate the local driving circuits 1012, which excite the anodes 1004 so as to emit light from their corresponding pixels.

[0028] In the illustrated AMOLED, the local driving circuits 1012, the data lines 1016 and scan lines 1018 are buried in a planarization layer 1014, which is interposed between the pixel array and the substrate 1002. The planarization layer 1014 provides a planar top surface on which the organic light emitting pixel array is formed. The planarization layer 1014 may be formed of organic or inorganic materials, and formed of two or more layers although shown as a single layer. The local driving circuits 1012 are typically formed with thin film transistors (TFT) and arranged in a grid or array under the OLED pixel array. The local driving circuits 1012 may be at least partly made of organic materials, including organic TFT. AMOLEDs have the advantage of fast response time improving their desirability for use in displaying data signals. Also, AMOLEDs have the advantages of consuming less power than passive matrix OLEDs.

[0029] Referring to common features of the PMOLED and AMOLED designs, the substrate 1002 provides structural support for the OLED pixels and circuits. In various embodiments, the substrate 1002 can comprise rigid or flexible materials as well as opaque or transparent materials, such as plastic, glass, and/or foil. As noted above, each OLED pixel or diode is formed with the anode 1004, cathode 1006 and organic layer 1010 interposed therebetween. When an appropriate electrical current is applied to the anode 1004, the cathode 1006 injects electrons and the anode 1004 injects holes. In certain embodiments, the anode 1004 and cathode 1006 are inverted; i.e., the cathode is formed on the substrate 1002 and the anode is oppositely arranged.

[0030] Interposed between the cathode 1006 and anode 1004 are one or more organic layers. More specifically, at

least one emissive or light emitting layer is interposed between the cathode **1006** and anode **1004**. The light emitting layer may comprise one or more light emitting organic compounds. Typically, the light emitting layer is configured to emit visible light in a single color such as blue, green, red or white. In the illustrated embodiment, one organic layer **1010** is formed between the cathode **1006** and anode **1004** and acts as a light emitting layer. Additional layers, which can be formed between the anode **1004** and cathode **1006**, can include a hole transporting layer, a hole injection layer, an electron transporting layer and an electron injection layer.

[0031] Hole transporting and/or injection layers can be interposed between the light emitting layer **1010** and the anode **1004**. Electron transporting and/or injecting layers can be interposed between the cathode **1006** and the light emitting layer **1010**. The electron injection layer facilitates injection of electrons from the cathode **1006** toward the light emitting layer **1010** by reducing the work function for injecting electrons from the cathode **1006**. Similarly, the hole injection layer facilitates injection of holes from the anode **1004** toward the light emitting layer **1010**. The hole and electron transporting layers facilitate movement of the carriers injected from the respective electrodes toward the light emitting layer.

[0032] In some embodiments, a single layer may serve both electron injection and transportation functions or both hole injection and transportation functions. In some embodiments, one or more of these layers are lacking. In some embodiments, one or more organic layers are doped with one or more materials that help injection and/or transportation of the carriers. In embodiments where only one organic layer is formed between the cathode and anode, the organic layer may include not only an organic light emitting compound but also certain functional materials that help injection or transportation of carriers within that layer.

[0033] There are numerous organic materials that have been developed for use in these layers including the light emitting layer. Also, numerous other organic materials for use in these layers are being developed. In some embodiments, these organic materials may be macromolecules including oligomers and polymers. In some embodiments, the organic materials for these layers may be relatively small molecules. The skilled artisan will be able to select appropriate materials for each of these layers in view of the desired functions of the individual layers and the materials for the neighboring layers in particular designs.

[0034] In operation, an electrical circuit provides appropriate potential between the cathode **1006** and anode **1004**. This results in an electrical current flowing from the anode **1004** to the cathode **1006** via the interposed organic layer(s). In one embodiment, the cathode **1006** provides electrons to the adjacent organic layer **1010**. The anode **1004** injects holes to the organic layer **1010**. The holes and electrons recombine in the organic layer **1010** and generate energy particles called "excitons." The excitons transfer their energy to the organic light emitting material in the organic layer **1010**, and the energy is used to emit visible light from the organic light emitting material. The spectral characteristics of light generated and emitted by the OLED **1000**, **1001** depend on the nature and composition of organic molecules in the organic layer(s). The composition of the one or more organic layers can be selected to suit the needs of a particular application by one of ordinary skill in the art.

[0035] OLED devices can also be categorized based on the direction of the light emission. In one type referred to as "top

emission" type, OLED devices emit light and display images through the cathode or top electrode **1006**. In these embodiments, the cathode **1006** is made of a material transparent or at least partially transparent with respect to visible light. In certain embodiments, to avoid losing any light that can pass through the anode or bottom electrode **1004**, the anode may be made of a material substantially reflective of the visible light. A second type of OLED devices emits light through the anode or bottom electrode **1004** and is called "bottom emission" type. In the bottom emission type OLED devices, the anode **1004** is made of a material which is at least partially transparent with respect to visible light. Often, in bottom emission type OLED devices, the cathode **1006** is made of a material substantially reflective of the visible light. A third type of OLED devices emits light in two directions, e.g. through both anode **1004** and cathode **1006**. Depending upon the direction(s) of the light emission, the substrate may be formed of a material which is transparent, opaque or reflective of visible light.

[0036] In many embodiments, an OLED pixel array **1021** comprising a plurality of organic light emitting pixels is arranged over a substrate **1002** as shown in FIG. 4C. In embodiments, the pixels in the array **1021** are controlled to be turned on and off by a driving circuit (not shown), and the plurality of the pixels as a whole displays information or image on the array **1021**. In certain embodiments, the OLED pixel array **1021** is arranged with respect to other components, such as drive and control electronics to define a display region and a non-display region. In these embodiments, the display region refers to the area of the substrate **1002** where OLED pixel array **1021** is formed. The non-display region refers to the remaining areas of the substrate **1002**. In embodiments, the non-display region can contain logic and/or power supply circuitry. It will be understood that there will be at least portions of control/drive circuit elements arranged within the display region. For example, in PMOLEDs, conductive components will extend into the display region to provide appropriate potential to the anode and cathodes. In AMOLEDs, local driving circuits and data/scan lines coupled with the driving circuits will extend into the display region to drive and control the individual pixels of the AMOLEDs.

[0037] One design and fabrication consideration in OLED devices is that certain organic material layers of OLED devices can suffer damage or accelerated deterioration from exposure to water, oxygen or other harmful gases. Accordingly, it is generally understood that OLED devices be sealed or encapsulated to inhibit exposure to moisture and oxygen or other harmful gases found in a manufacturing or operational environment. FIG. 4D schematically illustrates a cross-section of an encapsulated OLED device **1011** having a layout of FIG. 4C and taken along the line d-d of FIG. 4C. In this embodiment, a generally planar top plate or substrate **1061** engages with a seal **1071** which further engages with a bottom plate or substrate **1002** to enclose or encapsulate the OLED pixel array **1021**. In other embodiments, one or more layers are formed on the top plate **1061** or bottom plate **1002**, and the seal **1071** is coupled with the bottom or top substrate **1002**, **1061** via such a layer. In the illustrated embodiment, the seal **1071** extends along the periphery of the OLED pixel array **1021** or the bottom or top plate **1002**, **1061**.

[0038] In embodiments, the seal **1071** is made of a frit material as will be further discussed below. In various embodiments, the top and bottom plates **1061**, **1002** comprise materials such as plastics, glass and/or metal foils which can

provide a barrier to passage of oxygen and/or water to thereby protect the OLED pixel array **1021** from exposure to these substances. In embodiments, at least one of the top plate **1061** and the bottom plate **1002** are formed of a substantially transparent material.

[0039] To lengthen the life time of OLED devices **1011**, it is generally desired that seal **1071** and the top and bottom plates **1061**, **1002** provide a substantially non-permeable seal to oxygen and water vapor and provide a substantially hermetically enclosed space **1081**. In certain applications, it is indicated that the seal **1071** of a frit material in combination with the top and bottom plates **1061**, **1002** provide a barrier to oxygen of less than approximately 10^{-3} cc/m²-day and to water of less than 10^{-6} g/m²-day. Given that some oxygen and moisture can permeate into the enclosed space **1081**, in some embodiments, a material that can take up oxygen and/or moisture is formed within the enclosed space **1081**.

[0040] The seal **1071** has a width W, which is its thickness in a direction parallel to a surface of the top or bottom substrate **1061**, **1002** as shown in FIG. 4D. The width varies among embodiments and ranges from about 300 μ m to about 3000 μ m, optionally from about 500 μ m to about 1500 μ m. Also, the width may vary at different positions of the seal **1071**. In some embodiments, the width of the seal **1071** may be the largest where the seal **1071** contacts one of the bottom and top substrate **1002**, **1061** or a layer formed thereon. The width may be the smallest where the seal **1071** contacts the other. The width variation in a single cross-section of the seal **1071** relates to the cross-sectional shape of the seal **1071** and other design parameters.

[0041] The seal **1071** has a height H, which is its thickness in a direction perpendicular to a surface of the top or bottom substrate **1061**, **1002** as shown in FIG. 4D. The height varies among embodiments and ranges from about 2 μ m to about 30 μ m, optionally from about 10 μ m to about 15 μ m. Generally, the height does not significantly vary at different positions of the seal **1071**. However, in certain embodiments, the height of the seal **1071** may vary at different positions thereof.

[0042] In the illustrated embodiment, the seal **1071** has a generally rectangular cross-section. In other embodiments, however, the seal **1071** can have other various cross-sectional shapes such as a generally square cross-section, a generally trapezoidal cross-section, a cross-section with one or more rounded edges, or other configuration as indicated by the needs of a given application. To improve hermeticity, it is generally desired to increase the interfacial area where the seal **1071** directly contacts the bottom or top substrate **1002**, **1061** or a layer formed thereon. In some embodiments, the shape of the seal can be designed such that the interfacial area can be increased.

[0043] The seal **1071** can be arranged immediately adjacent the OLED array **1021**, and in other embodiments, the seal **1071** is spaced some distance from the OLED array **1021**. In certain embodiment, the seal **1071** comprises generally linear segments that are connected together to surround the OLED array **1021**. Such linear segments of the seal **1071** can extend, in certain embodiments, generally parallel to respective boundaries of the OLED array **1021**. In other embodiment, one or more of the linear segments of the seal **1071** are arranged in a non-parallel relationship with respective boundaries of the OLED array **1021**. In yet other embodiments, at least part of the seal **1071** extends between the top plate **1061** and bottom plate **1002** in a curvilinear manner.

[0044] As noted above, in certain embodiments, the seal **1071** is formed using a frit material or simply "frit" or glass frit," which includes fine glass particles. The frit particles includes one or more of magnesium oxide (MgO), calcium oxide (CaO), barium oxide (BaO), lithium oxide (Li₂O), sodium oxide (Na₂O), potassium oxide (K₂O), boron oxide (B₂O₃), vanadium oxide (V₂O₅), zinc oxide (ZnO), tellurium oxide (TeO₂), aluminum oxide (Al₂O₃), silicon dioxide (SiO₂), lead oxide (PbO), tin oxide (SnO), phosphorous oxide (P₂O₅), ruthenium oxide (Ru₂O), rubidium oxide (Rb₂O), rhodium oxide (Rh₂O), ferrite oxide (Fe₂O₃), copper oxide (CuO), titanium oxide (TiO₂), tungsten oxide (WO₃), bismuth oxide (Bi₂O₃), antimony oxide (Sb₂O₃), lead-borate glass, tin-phosphate glass, vanadate glass, and borosilicate, etc. In embodiments, these particles range in size from about 2 μ m to about 30 optionally about 5 μ m to about 10 μ m, although not limited only thereto. The particles can be as large as about the distance between the top and bottom substrates **1061**, **1002** or any layers formed on these substrates where the frit seal **1071** contacts.

[0045] The frit material used to form the seal **1071** can also include one or more filler or additive materials. The filler or additive materials can be provided to adjust an overall thermal expansion characteristic of the seal **1071** and/or to adjust the absorption characteristics of the seal **1071** for selected frequencies of incident radiant energy. The filler or additive material(s) can also include inversion and/or additive fillers to adjust a coefficient of thermal expansion of the frit. For example, the filler or additive materials can include transition metals, such as chromium (Cr), iron (Fe), manganese (Mn), cobalt (Co), copper (Cu), and/or vanadium. Additional materials for the filler or additives include ZnSiO₄, PbTiO₃, ZrO₂, eucryptite.

[0046] In embodiments, a frit material as a dry composition contains glass particles from about 20 to 90 about wt %, and the remaining includes fillers and/or additives. In some embodiments, the frit paste contains about 10-30 wt % organic materials and about 70-90% inorganic materials. In some embodiments, the frit paste contains about 20 wt % organic materials and about 80 wt % inorganic materials. In some embodiments, the organic materials may include about 0-30 wt % binder(s) and about 70-100 wt % solvent(s). In some embodiments, about 10 wt % is binder(s) and about 90 wt % is solvent(s) among the organic materials. In some embodiments, the inorganic materials may include about 0-10 wt % additives, about 20-40 wt % fillers and about 50-80 wt % glass powder. In some embodiments, about 0-5 wt % is additive(s), about 25-30 wt % is filler(s) and about 65-75 wt % is the glass powder among the inorganic materials.

[0047] In forming a frit seal, a liquid material is added to the dry frit material to form a fit paste. Any organic or inorganic solvent with or without additives can be used as the liquid material. In embodiments, the solvent includes one or more organic compounds. For example, applicable organic compounds are ethyl cellulose, nitro cellulose, hydroxyl propyl cellulose, butyl carbitol acetate, terpeneol, butyl cellusolve, acrylate compounds. Then, the thus formed frit paste can be applied to form a shape of the seal **1071** on the top and/or bottom plate **1061**, **1002**.

[0048] In one exemplary embodiment, a shape of the seal **1071** is initially formed from the fit paste and interposed between the top plate **1061** and the bottom plate **1002**. The seal **1071** can in certain embodiments be pre-cured or pre-sintered to one of the top plate and bottom plate **1061**, **1002**.

Following assembly of the top plate **1061** and the bottom plate **1002** with the seal **1071** interposed therebetween, portions of the seal **1071** are selectively heated such that the frit material forming the seal **1071** at least partially melts. The seal **1071** is then allowed to resolidify to form a secure joint between the top plate **1061** and the bottom plate **1002** to thereby inhibit exposure of the enclosed OLED pixel array **1021** to oxygen or water.

[0049] In embodiments, the selective heating of the frit seal is carried out by irradiation of light, such as a laser or directed infrared lamp. As previously noted, the frit material forming the seal **1071** can be combined with one or more additives or filler such as species selected for improved absorption of the irradiated light to facilitate heating and melting of the frit material to form the seal **1071**.

[0050] In some embodiments, OLED devices **1011** are mass produced. In an embodiment illustrated in FIG. 4E, a plurality of separate OLED arrays **1021** is formed on a common bottom substrate **1101**. In the illustrated embodiment, each OLED array **1021** is surrounded by a shaped frit to form the seal **1071**. In embodiments, common top substrate (not shown) is placed over the common bottom substrate **1101** and the structures formed thereon such that the OLED arrays **1021** and the shaped frit paste are interposed between the common bottom substrate **1101** and the common top substrate. The OLED arrays **1021** are encapsulated and sealed, such as via the previously described enclosure process for a single OLED display device. The resulting product includes a plurality of OLED devices kept together by the common bottom and top substrates. Then, the resulting product is cut into a plurality of pieces, each of which constitutes an OLED device **1011** of FIG. 4D. In certain embodiments, the individual OLED devices **1011** then further undergo additional packaging operations to further improve the sealing formed by the frit seal **1071** and the top and bottom substrates **1061**, **1002**.

[0051] Generally, when using a frit seal, the top and bottom substrates can be arranged such that the distance between the substrates is smaller than when using other sealing techniques. The small distances between the top and bottom substrates that can be formed by frit technology may result in Newton's rings on display surfaces. Also, the top substrate may form a curvature due to its own load. More specifically, the distance between the top and bottom substrates may be smaller in the central area than the peripheral areas. As such, in certain embodiments, the distance between the top and bottom substrates may not be uniform through out. Also, a curvature in the top substrate or a non-uniform distance between the top and bottom substrates may create Newton's rings on a display surface. As the Newton's rings generally interfere with high quality image display, it is desirable to avoid Newton's rings.

[0052] FIG. 1 is a plan view illustrating an organic light emitting display according to an embodiment of the present invention. Referring to FIG. 1, the organic light emitting display according to the present invention includes a first or bottom substrate **100**, a frit **150**, a second or top substrate **200**, and a reflection prevention layer **210**. The first substrate **100** includes a pixel region **100a** and a non-pixel region **100b**. The pixel region **100a** includes a plurality of scan lines **S1**, **S2**, . . . , and **Sn** and a plurality of data lines **D1**, **D2**, . . . , and **Dm** so that a plurality of pixels **50** are provided in the regions that are defined by the scan lines **S1**, **S2**, . . . , and **Sn** and the data lines **D1**, **D2**, . . . , and **Dm**. At this time, each of the pixels **50** is connected to each of the scan lines **S1**, **S2**, . . . , and **Sn** and each of the data lines **D1**, **D2**, . . . , and **Dm** and each of power source lines (not shown) to display one of red, green, blue,

and white with a predetermined brightness level. Therefore, the pixel region **100a** displays a predetermined image in accordance with the color and brightness of each of the pixels **50**. The non-pixel region **100b** is formed beside the pixel region **100a** to represent all of the regions excluding the pixel region **100a** on the first substrate **100**. On the other hand, the non-pixel region **100b** includes a data driver **300**, a scan driver **400**, and a pad unit **500**.

[0053] The data driver **300** supplies data signals to the plurality of data lines **D1**, **D2**, . . . , and **Dm** that extend in the pixel region **100a** on the first substrate **100**. The data driver **300** is formed on one side of the pixel region **100a** on the first substrate **100** and on the other side adjacent to the one side of the pixel region **100a** in which the scan driver **400** is formed. At this time, the data driver **300** is mounted on the first substrate **100** by a chip on glass (COG) method in the form of a chip. Also, the data driver **300** is connected to a plurality of first pads **Pd** in the pad unit **500** by a plurality of data supply lines **310**.

[0054] The scan driver **400** sequentially supplies scan signals to the plurality of scan lines **S1**, **S2**, . . . , and **Sn** that extend in the pixel region **100a**. The scan driver **400** is formed on one side of the pixel region **100a** on the first substrate **100** and is connected to at least one first pad **Ps** in the pad unit **500** by at least one scan supply line **410**. The pad unit **500** is adjacent to the scan driver **400** and the data driver **300** on the first substrate **100** and is electrically connected to the scan supply line **410** and the data supply line **310** to supply electrical signals to the plurality of scan lines **S1**, **S2**, . . . , and **Sn** and the plurality of data lines **D1**, **D2**, . . . , and **Dm** in the pixel region **100a**.

[0055] The frit **150** is provided between the non-pixel region **100b** of the first substrate **100** and the second substrate **200** to attach the first substrate **100** and the second substrate **200** to each other. The organic light emitting display device has a gap between the first surface of the array and the inner surface of the second substrate. Generally, the size of the gap depends on the height of the seal interconnecting two substrates. The frit seal, among other forms of sealing, allows the gap size significantly smaller than others. For example, when using frit seal, the gap size (the distance between the array and the second substrate) can be in the order of a few μm to several hundred μm . When the gap size is in this range, dark rings called Newton's rings may be formed on the display surface due to optical interference created by light incident to the display surface. More specifically, when the gap size is about or less than $10\ \mu\text{m}$, the possibility of Newton's rings may increase. Thus, in packaging an organic light emitting display device with the frit seal, the configuration for avoiding Newton's rings can be a design factor.

[0056] As illustrated in FIG. 1, the frit **150** is formed to seal the pixel region **100a** formed on the first substrate **100** and may be applied to seal the pixel region **100a** and the scan driver **400** when the scan driver **400** is built-in. That is, since the gap between the first substrate **100** and the second substrate **200** is sealed by the frit **150**, an array of organic light emitting diodes or pixels that are interposed between the first substrate **100** and the second substrate **200** are protected against moisture and oxygen. At this time, the frit **150** includes a filler (not shown) for controlling a thermal expansion coefficient and an absorbent (not shown) that absorbs laser or infrared rays. Also, the frit **150** is melted by irradiating of the laser or infrared rays onto the frit **150** and resolidified. At this time, the intensity of the laser radiated onto the frit **150** is in the range of about 25 W to about 60 W.

[0057] In one embodiment, when the temperature of the heat applied to glass is rapidly reduced, a frit in the form of

glass powders is generated. In general, oxide powders are added to the glass powders to be used. When an organic material is added to the frit, a gel-type paste is obtained. When the gel-type paste is sintered or baked at a predetermined temperature, the organic material is extinguished in the air and the gel-type paste is hardened so that a glass fit is obtained. The temperature at which the fit **150** is baked is in the range of about 300° C. to about 700° C.

[0058] The second substrate **200** is joined to the first substrate by a frit that surrounds the pixel region **100a**. At this time, the second substrate **200** is provided to prevent the organic light emitting diodes or pixels (not shown) formed on the pixel region **100a** on the first substrate **100** from being affected by moisture and oxygen from the outside. At this time, although not limited thereto, the second substrate **200** may be formed of a material selected from the group consisting of SiO₂, SiNx, and SiOxNy.

[0059] The reflection prevention layer or antireflection layer **210** may be formed on the top surface of the second substrate **200** as illustrated in FIG. 2 or may be formed on the bottom surface or on both of the top and bottom surfaces of the second substrate **200** although not shown in the drawing. At this time, the reflection prevention layer **210** reduces light incident through the second substrate **200** from being reflected to prevent Newton's rings from being generated between the first substrate **100** and the second substrate **200**. That is, when load is applied to the second substrate **200**, the second substrate **200** may have a curvature so that the distance between the first substrate **100** and the second substrate **200** may not be uniform. Therefore, Newton's rings may be generated due to interference between the reflected lights, that is caused by differences in the distance between the first substrate **100** and the second substrate **200**. Newton's rings may be concentric circles and the Newton's rings may be shown in display surfaces. The Newton's rings can be generated when the distance between the first substrate **100** and the second substrate **200** is sufficiently small. Since the characteristics of the display may deteriorate due to the Newton's rings, in order to prevent the Newton's rings from being generated, the reflection prevention layer **210** that reduces the reflectance of the incident light is formed. The reflection prevention layer **210** may be formed of a single layer of a plurality of layers. When the reflection prevention layer **210** is formed of the single layer, the reflection prevention layer **210** is made of at least one material selected from the group consisting of MgF₂, NaF, and AlF₃. When the reflection prevention layer **210** is formed of the plurality of layers, the reflection prevention layer **210** is made of at least one material selected from the group consisting of ZnS/SiO₂ and TiO₂/SiO₂. The materials of which the reflection prevention layer **210** is made and the reflectance thereof are illustrated in Table 1.

TABLE 1

Single layer	Reflectance	A plurality of layers	Reflectance
MgF ₂	1.24%	ZnS/SiO ₂	0.13%
NaF	0.27%	TiO ₂ /SiO ₂	0.21%
AlF ₃	1.57%		

[0060] The reflectance of the second substrate **200** is generally about 4% when the reflection layer is not formed. Therefore, since it is possible to prevent the Newton's rings from being generated when the reflectance of the incident light is reduced according to the present invention, the reflection prevention layer **210** having the reflectance smaller than 4% can be formed on at least one side of the second substrate

200. The reflectance of the reflection prevention layer **210** is smaller when the reflection prevention layer **210** is made of a plurality of layers than when the reflection prevention layer **210** is made of the single layer. As illustrated in the Table 1, it is preferable to use the reflection prevention layer **210** obtained by laminating ZnS/SiO₂.

[0061] FIG. 2 is a sectional view illustrating the organic light emitting display according to the present invention. Referring to FIG. 2, in the illustrated embodiment, the organic light emitting display according to the present invention includes the first substrate **100**, the second substrate **200**, and the reflection prevention layer **210**. The first substrate **100** includes a deposition substrate **101** and at least one organic light emitting diode **110** formed on the deposition substrate **101**. First, a buffer layer **111** is formed on the deposition substrate **101**. The deposition substrate **101** is formed of glass and the buffer layer **111** is formed of an insulating material such as SiO₂ and SiNx. On the other hand, the buffer layer **111** is formed to prevent the deposition substrate **101** from being damaged by factors such as heat from the outside. A semiconductor layer **112** that includes an active layer **112a** and ohmic contact layers **112b** is formed on at least one region of the buffer layer **111**. A gate insulation layer **113** is formed on the buffer layer **111** and the semiconductor layer **112**. A gate electrode **114** of the size corresponding to the width of an active layer **112a** is formed on one region of the gate insulation layer **113**.

[0062] An interlayer insulation layer **115** is formed on the gate insulation layer **113** and the gate electrode **114**. Source and drain electrodes **116a** and **116b** are formed on a predetermined region of the interlayer insulation layer **115**. Each of the source and drain electrodes **116a** and **116b** is connected to one exposed region of each of the ohmic contact layers **112b**. A planarization layer **117** is formed on the interlayer insulation layer **115** to include the source and drain electrodes **116a** and **116b**. A first electrode **119** is formed on one region of the planarization layer **117**. At this time, the first electrode **119** is connected to one exposed region of one of the source and drain electrodes **116a** and **116b** by a via hole **118**. A pixel definition layer **120** including an aperture (not shown) that exposes at least one region of the first electrode **119** is formed on the planarization layer **117** to include the first electrode **119**. An organic layer **121** is formed on the aperture of the pixel definition layer **120** and a second electrode layer **122** is formed on the pixel definition layer **120** to include the organic layer **121**.

[0063] In embodiments, the second substrate **200** is attached to the first substrate **100** by the frit **150** with predetermined structures interposed in order to protect the predetermined structures formed on the first substrate **100** against the oxygen and moisture from the outside. At this time, although not limited thereto, the second substrate **200** may be formed of at least one selected from the group consisting of SiO₂, SiNx, and SiOxNy. The frit **150** is provided between the non-pixel region (not shown) of the first substrate **100** and the second substrate **200** to interconnect the first substrate **100** and the second substrate **200**. At this time, the frit **150** is applied so that the pixel region (not shown) formed on the first substrate **100** is sealed or encapsulated and may be applied so that the pixel region and the scan driver are sealed up when the scan driver (not shown) is formed.

[0064] In one embodiment, the reflection prevention layer **210** may be formed on the top surface of the second substrate **200** as illustrated in FIG. 2. In another embodiment, the reflection prevention layer **210** may be formed on the bottom surface or on both of the top and bottom surfaces of the second substrate **200** although not shown in the drawing. At this time,

the reflection prevention layer **210** reduces the light incident through the second substrate **200** from being reflected to prevent the Newton's rings from being generated between the first substrate **100** and the second substrate **200**. On the other hand, the reflection prevention layer **210** may be formed of the single layer or the plurality of layers. When the reflection prevention layer **210** is formed of the single layer, the reflection prevention layer **210** is made of at least one material selected from the group consisting of MgF_2 , NaF, and AlF_3 . When the reflection prevention layer **210** is formed of the plurality of layers, the reflection prevention layer **210** is made of at least one material selected from the group consisting of ZnS/SiO_2 and TiO_2/SiO_2 .

[0065] FIG. 3 is a flowchart illustrating a method of fabricating the organic light emitting display according to the present invention. Referring to FIG. 3, a method of packaging the organic light emitting display according to the present invention includes a first step ST100, a second step ST200, a third step ST300, and a fourth step ST400. In the first step ST100 of the method of fabricating the organic light emitting display, the first substrate including the pixel region in which at least one organic light emitting diode is formed and the non-pixel region formed in the outer circumference of the pixel region is provided. The second substrate with the reflection prevention layer formed on the top surface or/and the bottom surface is provided. In an embodiment, the reflection prevention layer may control the reflection angle of the light incident through the second substrate to prevent the Newton's rings from being generated. Due to the load of the second substrate, the second substrate may have a curvature so that the distance between the first substrate and the second substrate is not uniform. The Newton's rings may be generated due to the difference of the distance between the first substrate and the second substrate. The reflection prevention layer is formed to reduce the reflectance of the incident light and thus prevents the Newton's rings. In certain embodiments, the reflection prevention layer may be formed of the single layer or the plurality of layers. When the reflection prevention layer is formed of the single layer, the reflection prevention layer is made of at least one material selected from the group consisting of MgF_2 , NaF, and AlF_3 . When the reflection prevention layer is formed of the plurality of layers, the reflection prevention layer is made of at least one material selected from the group consisting of ZnS/SiO_2 and TiO_2/SiO_2 .

[0066] In the second step ST200, the frit is applied to one region of the second substrate to be sintered. At this time, the frit is interposed between the second substrate and the non-pixel region. Also, the frit is applied so that the pixel region formed on the first substrate is sealed up and may be applied so that the pixel region and the scan driver are sealed up when the scan driver is built-in. Here, the frit includes a filler for controlling a thermal expansion coefficient and an absorbent that absorbs laser or infrared rays. On the other hand, when the temperature of the heat applied to glass is rapidly reduced, the frit in the form of glass powders is generated. In general, the oxide powders are added to the frit to be used. When the organic material is added to the frit in which the oxide powders are included, the gel-type paste is obtained. The gel-type paste is applied along the sealing line of the second substrate. Then, when thermal treatment is performed on the frit at a predetermined temperature, the organic material is extinguished in the air and the gel-type paste is hardened so that the glass frit is obtained. At this time, the temperature at which the frit is sintered is preferable in the range of about $300^\circ C$. to about $700^\circ C$.

[0067] In the third step ST300, the first substrate and the second substrate are attached to each other. At this time, the

first substrate and the second substrate are attached to each other so that the organic light emitting diode formed on the first substrate is encapsulated. In the fourth step ST400, the frit is melted so that the first substrate and the second substrate are adhered to each other. The frit is melted by irradiating the laser or infrared rays onto the frit. At this time, the preferable intensity of the laser for melting the frit is in the range of about 25 W to about 60 W. The frit is melted to bond the first substrate and the second substrate to each other.

[0068] In the organic light emitting display according to the present invention and the method of manufacturing the same, it is possible to prevent the Newton's rings from being generated due to the small distance between the substrate and the sealing substrate. The frit seal is used for adhering the deposition substrate and the sealing substrate to each other so that it is possible to completely protect the organic light emitting diode.

[0069] Although a few embodiments of the present invention have been shown and described, it would be appreciated by those skilled in the art that changes might be made in this embodiment without departing from the principles and spirit of the invention, the scope of which is defined in the claims and their equivalents.

1. An organic light emitting display device, comprising:
 - a first substrate comprising a single layer or multiple layers;
 - a second substrate comprising a single layer or multiple layers, the second substrate comprising an inner surface facing the first substrate and an outer surface facing away from the first substrate;
 - an array of organic light emitting pixels formed on the first substrate and interposed between the first and second substrates, the array comprising a top surface opposing the inner surface of the second substrate, wherein the top surface and the inner surface has a gap therebetween with a gap distance smaller than about $300\ \mu m$;
 - a frit seal interconnecting the first and second substrates while surrounding the array, wherein the frit seal, the first substrate and the second substrate in combination define a sealed enclosed space in which the array is located such that the gap distance is smaller than about $300\ \mu m$; and
 - an antireflection layer formed over at least one of the inner and outer surfaces of the second substrate, wherein the antireflection layer consists of a single layer of AlF_3 .
2. (canceled)
3. The device of claim 1, wherein the gap distance is smaller than about $100\ \mu m$.
4. The device of claim 1, wherein the gap distance is smaller than about $10\ \mu m$.
5. The device of claim 1, wherein the gap distance is from about $150\ \mu m$ to about $3\ \mu m$.
6. The device of claim 1, wherein the antireflection layer forms on the outer surface of the second substrate.
7. The device of claim 1, wherein the antireflection layer forms on the inner surface of the second substrate.
8. (canceled)
9. (canceled)
10. (canceled)
11. The device of claim 1, wherein the array is configured to emit visible light through the top surface.
12. The device of claim 1, wherein the frit seal comprises one or more materials selected from the group consisting of magnesium oxide (MgO), calcium oxide (CaO), barium oxide (BaO), lithium oxide (Li_2O), sodium oxide (Na_2O),

potassium oxide (K_2O), boron oxide (B_2O_3), vanadium oxide (V_2O_5), zinc oxide (ZnO), tellurium oxide (TeO_2), aluminum oxide (Al_2O_3), silicon dioxide (SiO_2), lead oxide (PbO), tin oxide (SnO), phosphorous oxide (P_2O_5), ruthenium oxide (Ru_2O), rubidium oxide (Rb_2O), rhodium oxide (Rh_2O), ferrite oxide (Fe_2O_3), copper oxide (CuO), titanium oxide (TiO_2), tungsten oxide (WO_3), bismuth oxide (Bi_2O_3), antimony oxide (Sb_2O_3), lead-borate glass, tin-phosphate glass, vanadate glass, and borosilicate.

13. A method of making an organic light emitting display device, the method comprising:

providing an unfinished device comprising a first substrate and an array of organic light emitting pixels formed on the first substrate, the array comprising a top surface facing away from the first substrate;

providing a second substrate and an antireflection layer, the second substrate comprises an inner surface and an outer surface, wherein the antireflection layer is formed on at least one of the inner and outer surfaces, and the antireflection layer consists of a single layer of AlF_3 ;

arranging the second substrate over the unfinished device such that the inner surface opposes the array and that the array is interposed between the first and second substrates, wherein the array and the inner surface forms a gap therebetween; and

forming a frit seal between and interconnecting the first and second substrates while surrounding the array in an enclosed space such that the gap distance is smaller than about $300\ \mu m$.

14. The method of claim **13**, wherein forming the fit seal comprises:

interposing a fit material between the first and second substrate; and

bonding the frit material to the first and second substrate so as to form a substantially hermetic seal.

15. The method of claim **13**, wherein the frit seal has a height measured between the first and second substrate, wherein the height is from about $2\ \mu m$ to about $30\ \mu m$.

16. The method of claim **13**, wherein the gap distance is about 3 to about $150\ \mu m$.

17. The method of claim **13**, wherein the gap distance is smaller than $10\ \mu m$.

18. The method of claim **13**, wherein the organic light emitting device is configured to display an image on the outer surface substantially free of Newton's rings.

19. The method of claim **13**, wherein the unfinished device further comprises a plurality of additional arrays of organic light emitting pixels formed on the first substrate, wherein the method further comprises forming a plurality of additional seals between and interconnecting the first and second substrates, wherein a first one of the additional seals surrounds a first one of the additional arrays.

20. The method of claim **19**, wherein the first additional array and the second substrate forms a gap therebetween with a gap distance smaller than about $300\ \mu m$.

21. (canceled)

22. (canceled)

* * * * *

