



(19) **United States**

(12) **Patent Application Publication**
Winters

(10) **Pub. No.: US 2004/0222746 A1**

(43) **Pub. Date: Nov. 11, 2004**

(54) **REDUCING THE EFFECTS OF SHORTS IN PIXELS OF AN ACTIVE MATRIX ORGANIC ELECTROLUMINESCENT DEVICE**

(52) **U.S. Cl. 315/167; 315/169.3**

(57) **ABSTRACT**

(75) **Inventor: Dustin Winters, Webster, NY (US)**

Correspondence Address:
Thomas H. Close
Patent Legal Staff
Eastman Kodak Company
343 State Street
Rochester, NY 14650-2201 (US)

(73) **Assignee: Eastman Kodak Company**

(21) **Appl. No.: 10/430,759**

(22) **Filed: May 6, 2003**

Publication Classification

(51) **Int. Cl.⁷ H05B 37/00**

An OLED device, with each pixel including a plurality of laterally spaced first electrodes, each corresponding to a portion of the pixel and a common second electrode vertically spaced from the plurality of first electrodes; at least one light-emitting layer disposed between the first and second electrodes including a host and a dopant for emitting light in response to current; a hole-transporting layer disposed between the light-emitting layer and the first or second electrodes; and a transistor drive circuit for each pixel including separate transistors, each transistor associated with a different one of the first electrodes and when driven causes current to pass between its corresponding first electrode and the second electrode so that, if there is a short in the portion between an individual first electrode and the second electrode, the remaining portions will continue to produce light in the light-emitting layer, thereby reducing the effects of the short.

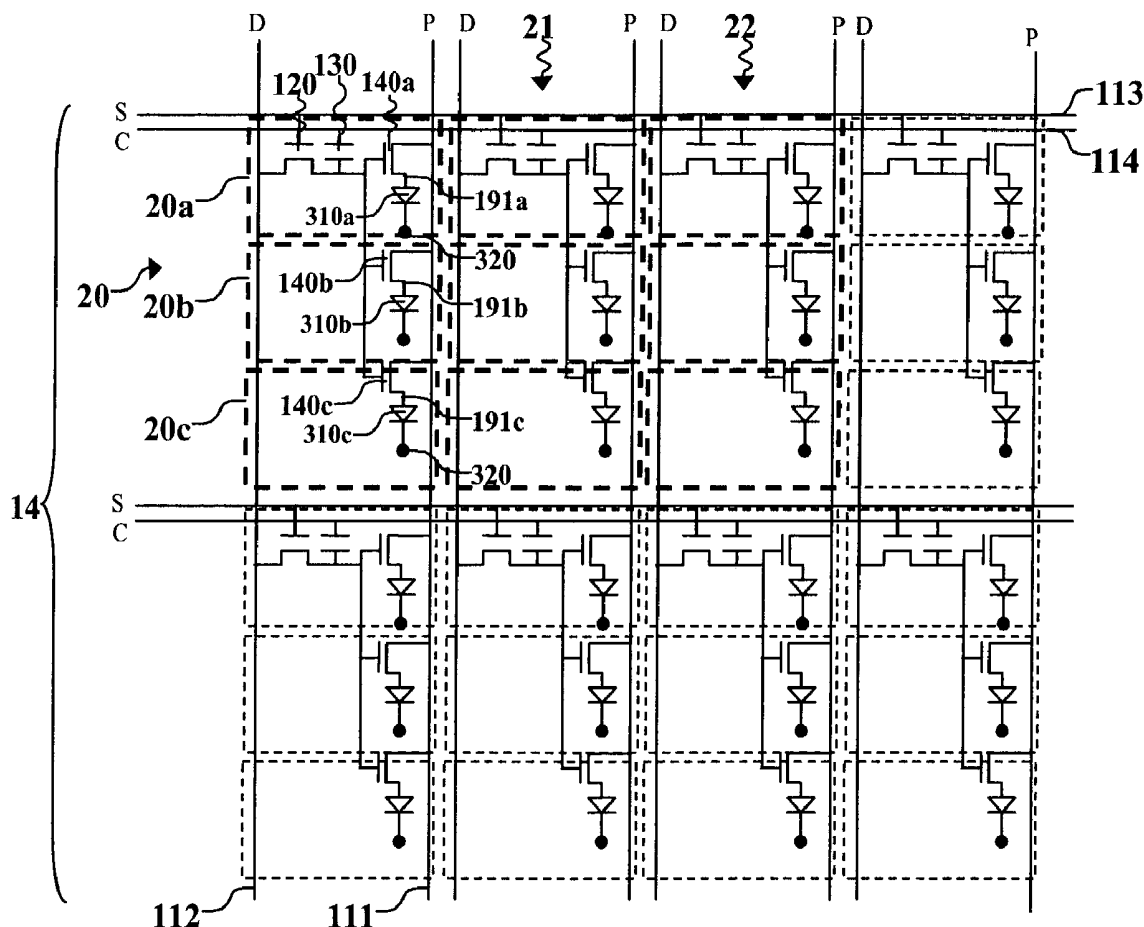


FIG. 2


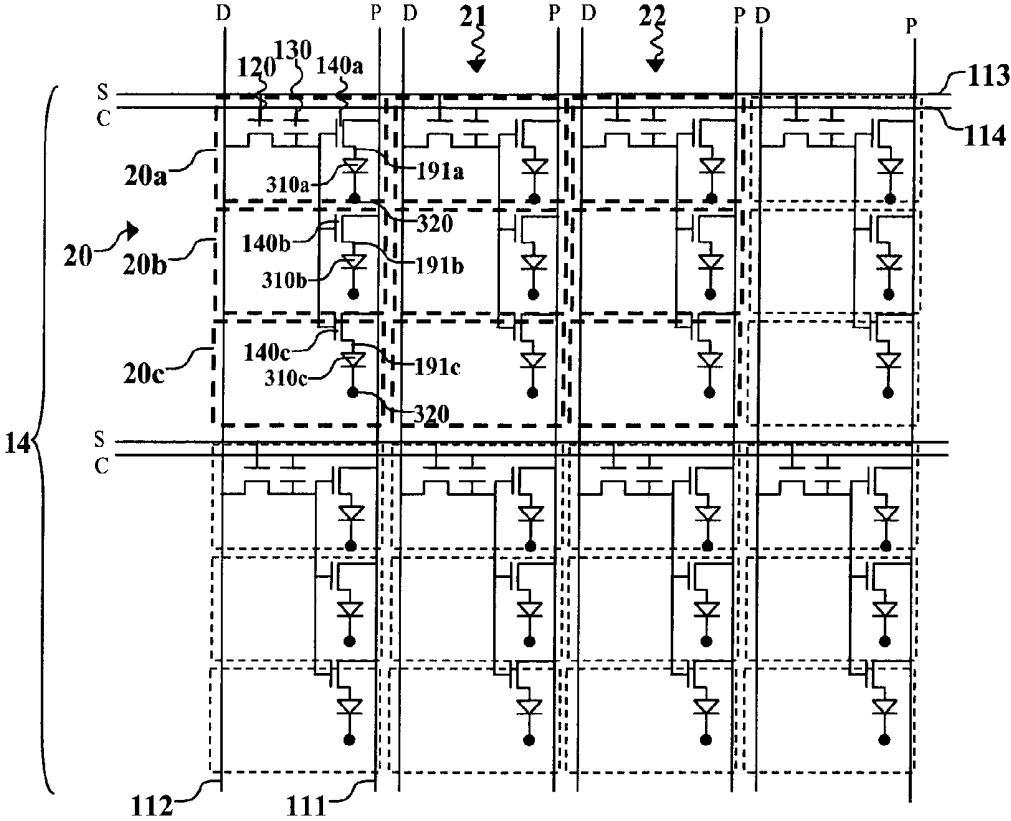


FIG. 4

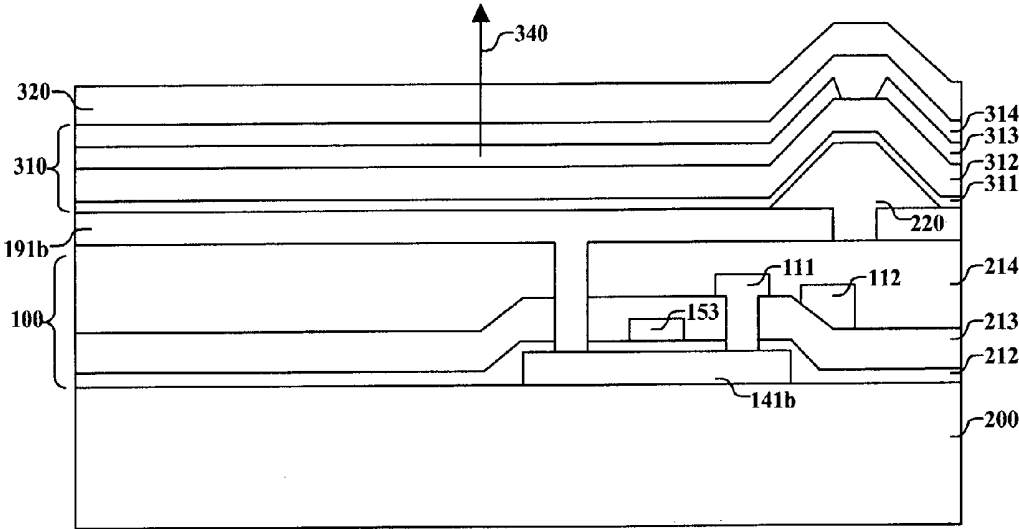

REDUCING THE EFFECTS OF SHORTS IN PIXELS OF AN ACTIVE MATRIX ORGANIC ELECTROLUMINESCENT DEVICE

FIELD OF THE INVENTION

[0001] The present invention relates to organic electroluminescent (EL) devices, which reduce the effects of shorts in pixels.

BACKGROUND OF THE INVENTION

[0002] Organic EL displays are typically driven by active matrix circuitry in order to produce high performance devices. In an active matrix configuration, each pixel is driven by multiple circuit elements such as two or more transistors, one or more capacitors, and signal lines. For multicolor devices, a pixel is divided into subpixels each with a complete set of circuit elements. For a RGB (red, green, blue) device, each pixel consists of three subpixels, which emit red, green, and blue light. Examples of such active matrix organic EL devices are provided in U.S. Pat. Nos. 5,550,066; 6,281,634; and 6,456,013; and EP 1102317.

[0003] When manufacturing organic EL displays, problems such as a particle contamination or scratches in the organic EL materials from the various process steps such as shadow masking may result in defects in a display. One type of defect that is caused by particle contamination or scratches is a short circuit through the thin organic materials, connecting the anode and the cathode. A short between the anode and cathode results in a non-emitting pixel.

[0004] Many defects, such as particle contamination and scratches, typically occur with an area density that depends on the capability of the manufacturing process and equipment. However, the total yield with respect to non-emitting pixels depends on the area density of the defects and the area of the individual displays. Larger displays such as those useful for televisions, computer monitors, or laptops, will have lower yields than smaller substrates given the same defect density.

SUMMARY OF THE INVENTION

[0005] It is therefore an object of the present invention to produce an active matrix organic EL device that is less sensitive to anode to cathode short circuit defects caused by the manufacturing process.

[0006] This object is achieved by an OLED device having a plurality of pixels, with each pixel comprising:

[0007] a) a plurality of laterally spaced first electrodes, each corresponding to a portion of the pixel and a common second electrode vertically spaced from the plurality of first electrodes;

[0008] b) at least one light-emitting layer disposed between the first and second electrodes including a host and a dopant for emitting light in response to current;

[0009] c) a hole-transporting layer disposed between the light-emitting layer and the first or second electrodes; and

[0010] d) a transistor drive circuit for each pixel including separate transistors, each transistor associated with a different one of the first electrodes and when driven causes current to pass between its corresponding first electrode and the

second electrode so that, if there is a short in the portion between an individual first electrode and the second electrode, the remaining portions will continue to produce light in the light-emitting layer, thereby reducing the effects of the short.

ADVANTAGES

[0011] It has been determined that, while no non-emitting pixels are desired, some amount of non-emitting area may be acceptable, depending on the quality requirements of the display application. Furthermore, partially emitting pixels (that is partially dark or relatively dim) can be more acceptable than totally non-emitting pixels.

[0012] An OLED device, in accordance with the invention, will have a higher manufacturing yield and therefore lower cost. Such a device reduces the effects of shorts by producing two or more emitting elements per pixel with separated lower electrodes and which, along with separate drive transistors, are connected in parallel to each other.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] FIG. 1 shows a circuit pattern diagram of an OLED device active matrix circuit according to the prior art;

[0014] FIG. 2 shows a circuit pattern diagram of an OLED device active matrix circuit according to a first embodiment of the present invention;

[0015] FIG. 3 shows a layout pattern diagram of an OLED device active matrix circuit according to a first embodiment of the present invention; and

[0016] FIG. 4 shows a cross-sectional view of an OLED device according to the present invention.

[0017] Since device feature dimensions such as layer thicknesses are frequently in sub-micrometer ranges, the drawings are scaled for ease of visualization rather than dimensional accuracy.

DETAILED DESCRIPTION OF THE INVENTION

[0018] The term "OLED device" is used in its art-recognized meaning of a display device comprising organic light-emitting diodes as pixels and will also be referred to as an organic light-emitting device. A color OLED device emits light of at least one color. The term "multicolor" is employed to describe a display panel that is capable of emitting light of a different hue in different areas. In particular, it is employed to describe a display panel that is capable of displaying images of different colors. These areas are not necessarily contiguous. The term "full color" is employed to describe multicolor display panels that are capable of producing light in the red, green, and blue regions of the visible spectrum and displaying images in any combination of hues. The red, green, and blue colors constitute the three primary colors from which all other colors can be generated by appropriately mixing these three primaries. The term "hue" refers to the intensity profile of light emission within the visible spectrum, with different hues exhibiting visually discernible differences in color. The term "pixel" is employed in its art-recognized usage to designate an area of a display panel that can be stimulated to emit light independently of other areas. For the purpose of this invention, no

distinction is made between pixels and multicolor subpixels. For example, in an RGB device, the red element is defined here as a pixel, the blue element is defined as another pixel, and the green element is defined as a third pixel.

[0019] Turning now to FIG. 1, there is shown a circuit pattern diagram of an OLED device 12 active matrix circuit used to drive an OLED display according to the prior art. This circuit includes a select line 113, which is used to select a row of pixels including 20. One row is addressed at any given time by applying voltage to that row's select line 113. All rows are scanned once per frame. Data lines 112 run perpendicular to the select line 113 and are used to determine the brightness of each pixel 20 in the row. The gate of a select transistor 120 is connected to the select line 113 and a second terminal is connected to the data line 112. The third terminal of the select transistor 120 is connected to the gate of the power transistor 140 as well as to one side of storage capacitor 130. Storage capacitor 130 then holds the data line voltage while the select line 113 is not selected until the row is again selected in the next frame. The second side of the storage capacitor 130 is connected to capacitor line 114 with all capacitors connected together. The other terminals of the power transistor 140 are connected on one side to a power line 111 and on the other side to the first electrode 191 of the organic EL element 310. The second electrode 320 of the organic EL element is common to all pixels. Organic EL layers 310 are represented by a diode symbol in FIG. 1.

[0020] While OLED device 12 is shown as a monochrome device, it can also represent a multicolor or full color OLED display in which a plurality of devices produces different colors. For example, pixels 20, 21, and 22 can represent red-emitting, green-emitting, and blue-emitting pixels, respectively, in a repeating pattern across the surface of OLED display 12.

[0021] FIG. 2 shows a circuit pattern diagram of an OLED device 14 active matrix circuit used to drive an OLED display according to a first embodiment of the present invention. In the present invention, power lines 111, data lines 112, select lines 113, and capacitor lines 114 are all present and serve the same function as in the prior art. Furthermore, a select transistor 120 connected to select line 113 and data line 112, as well as a storage capacitor 130, are also present and serve the same function as in the prior art. However, in the current invention, the single power transistor 140 of the prior art is replaced by two or more separate power transistors (shown in this embodiment as first, second, and third power transistors 140a, 140b, and 140c, respectively) which are connected in parallel by a single common gate connection to be simultaneously driven. The common gate connection is also connected to the storage capacitor 130 and to one terminal of the select transistor 120 to indicate the amount of current to be driven through each portion 20a, 20b, and 20c of pixel 20. Each of the power transistors is also connected to independent portions of pixels 20 (shown as pixel portions 20a, 20b, and 20c). The multiple portions of pixel 20 each have a separate laterally spaced first electrode 191a, 191b, or 191c each corresponding to a portion (20a, 20b, or 20c, respectively) of pixel 20, and each associated with its corresponding power transistor 140a, 140b, or 140c. Organic EL layers are formed over the first electrodes creating an individual emitting element for each of the first electrodes. The emitting elements are shown in this embodiment as organic light emitting diode 310a

connected to first electrode 191a, organic light emitting diode 310b connected to first electrode 191b, and organic light emitting diode 310c connected to first electrode 191c. Therefore, independent current paths are formed from the power line 111 to the common second electrode 320, which is vertically spaced from the plurality of first electrodes 191a, 191b, and 191c. Through arrangement of this circuit, current simultaneously passes between the first electrodes 191a, 191b, and 191c and the second electrode 320 so that a short circuit between the a first electrode and the second electrode in any one of the pixel portions 20a, 20b, and 20c caused by a manufacturing defect in the area of the pixel 20 will cause only that portion of the pixel 20 to be non-emissive. However, the remaining portions of the pixel 20 which are not in the area of the defect will continue to produce light, causing pixel 20 to be partially emissive instead of completely non-emissive, thereby reducing the effects of the short.

[0022] While OLED device 14 is shown as a monochrome device, it can also represent a multicolor or full color OLED display in which a plurality of devices produces different colors. For example, pixels 20, 21, and 22 can represent red-emitting, green-emitting, and blue-emitting pixels, respectively, in a repeating pattern across the surface of OLED display 14.

[0023] FIG. 3 shows a layout pattern diagram of an OLED device pixel 20 for the above first embodiment of the invention. The drive circuitry components are fabricated using conventional integrated circuit technologies. For each pixel 20, the select transistor 120 is formed from a first semiconductor region 121 using techniques well known in the art. Similarly, the multiple power transistors 140a, 140b, and 140c can be formed in semiconductor regions 141a, 141b, and 141c. The first and second semiconductor regions are typically formed in the same semiconductor layer. This semiconductor layer is typically silicon which can be amorphous, polycrystalline, or crystalline. This first semiconductor region 121 also forms one side of the storage capacitor 130. Over the first and second semiconductor regions is an insulating layer (not shown) that forms the gate insulator of the select transistor 120, the gate insulator for power transistors 140a, 140b, and 140c, and the insulating layer of the storage capacitor 130. The gate of the select transistor 120 is formed from part of the select line 113, which is formed in the first conductor layer. The power transistors 140a, 140b, and 140c have a common gate connection 153, also preferably formed in the first conductor layer, and are all connected to power line 111 through respective vias 146a, 146b, and 146c. The power transistor's 140a, 140b, and 140c are also connected to the organic EL elements' first electrodes 191a, 191b, and 191c by vias 145a, 145b, and 145c, respectively. The other electrode of the storage capacitor 130 is formed as part of capacitor line 114, also preferably formed from the first conductive layer. The power lines 111 and the data lines 112 are preferably formed in a second conductive layer. One or more of the signal lines (e.g. select line 113) frequently cross at least one or more of the other signal lines (e.g. data line 112), which requires these lines to be fabricated from multiple conductive layers with at least one interlayer insulating layer (not shown). The pixel 20 is formed by patterning first electrodes 191a, 191b, and 191c for each pixel as well as depositing one or more layers of organic EL media (not shown) and a second electrode (not shown).

[0024] Connections between layers are formed by etching holes (or vias) in the insulating layers such as vias **145a**, **145b**, **145c**, **146a**, **146b**, and **146c** described above. Other vias include via **152** connecting the power transistor gate conductor **153** to first semiconductor region **121** of the storage capacitor **130**, and via **122** connecting data line **112** to the first semiconductor region **121** of the select transistor **120**.

[0025] FIG. 4 shows a cross section of pixel **20** of the device along line X-X' as shown in FIG. 3. The OLED device of this invention and the subpixels therein are typically disposed as shown over a supporting substrate **200**. The substrate can either be light transmissive or opaque, depending on the intended direction of light emission. The light transmissive property is desirable for viewing the EL emission through the substrate. Transparent glass or plastic is commonly employed in such cases. For applications where the EL emission is viewed through the top electrode, the transmissive characteristic of the bottom support is immaterial, and therefore can be light transmissive, light absorbing or light reflective. Substrates for use in this case include, but are not limited to, glass, plastic, semiconductor materials, silicon, ceramics, and circuit board materials.

[0026] FIG. 4 shows the vertical arrangement of the various layers and the vertically spaced first and second electrodes **191b** and **320**, respectively, included in each portion (e.g. **20b**) of a pixel (e.g. **20**). The transistor drive circuit **100** is disposed over substrate **200** and under organic EL layers **310** in a manner herein described. Over the substrate **200**, a semiconductor layer is formed, doped, and patterned into regions including semiconductor region **141b**. A gate insulating layer **212** is formed over the semiconductor layer. Over the gate insulating layer **212**, a gate conductor **153** is formed from a first conductor layer. Semiconductor region **141b** is then doped to form source and drain regions on either sides of the gate conductor **153** by well known methods. A first interlayer insulator layer **213** is formed over the gate conductor **153**. Over the first interlayer insulator layer **213**, a second conductor layer is deposited and patterned forming the power lines **111** and the data lines **112**. A second interlayer insulator layer **214** is formed over the power and data lines. The first electrode **191b** of pixel **20b** is formed over the second interlayer insulator layer **214**. The first electrodes, such as **191b**, are patterned to form multiple organic EL elements per pixel. That is, the first electrodes are patterned so as to be isolated from the other first electrodes of the other portions (e.g. **20a**, **20c**) of that pixel as well as isolated from the first electrodes of neighboring pixels (e.g. **21**). Around the edges of the first electrode **191b**, an electrode insulating film **220** is formed to reduce shorts between the first electrode **191b** and the second electrode **320**. Use of such electrode insulating films over the first electrode **191b** is disclosed in U.S. Pat. No. 6,246,179. While use of the electrode insulating film **220** can have beneficial effects, it is not required for successful implementation of the invention.

[0027] The electrode nearest the substrate is conveniently referred to as the bottom electrode or first electrode **191b**. When EL emission is viewed through the first electrode **191b**, the first electrode should be transparent or substantially transparent to the emission of interest. Common transparent first electrode materials used in this invention are indium-tin oxide (ITO), indium-zinc oxide (IZO) and tin

oxide, but other metal oxides can work including, but not limited to, aluminum- or indium-doped zinc oxide, magnesium-indium oxide, and nickel-tungsten oxide. In addition to these oxides, metal nitrides, such as gallium nitride, and metal selenides, such as zinc selenide, and metal sulfides, such as zinc sulfide, can be used as the first electrode **191b**. For applications where EL emission is viewed only through the second electrode **320**, the first electrode **191b** is reflective and example conductors for this application include, but are not limited to, gold, silver, iridium, molybdenum, palladium, and platinum. The first electrode **191b** is typically biased as the anode, but this invention is not limited to that configuration. Typical anode materials, transmissive or otherwise, have a work function of 4.1 eV or greater. Desired first electrode materials are commonly deposited by any suitable means such as evaporation, sputtering, chemical vapor deposition, or electrochemical means. First electrode **191b** can be patterned using well known photolithographic processes. Optionally, first electrode **191b** can be polished prior to application of other layers to reduce surface roughness so as to reduce shorts or enhance reflectivity. While the first electrode **191b** is shown as one layer, multiple layers of differing materials can be used to achieve the desired electrical and optical properties.

[0028] Organic EL media **310** are disposed between the first and second electrodes, **191b** and **320**, respectively, of each pixel portion. There are numerous organic EL layer structures known in the art wherein the present invention can be employed. For example, organic EL media **310** can include e.g. light-emitting layer **313** disposed between first electrode **191b** and second electrode **320**, hole-transporting layer **312** disposed between light-emitting layer **313** and the electrode that is configured as an anode, hole-injecting layer **311** disposed between the hole-transporting layer **312** and the anode, and electron-transporting layer **314** disposed between light-emitting layer **313** and the electrode configured as a cathode.

[0029] While not always necessary, it is often useful to provide a hole-injecting layer **311** between first electrode **191b** and hole-transporting layer **312**. The hole-injecting layer **311** can serve to improve the film formation property of subsequent organic layers and to facilitate injection of holes into the hole-transporting layer **312**. Suitable materials for use in the hole-injecting layer **311** include, but are not limited to, porphyrinic compounds as described in U.S. Pat. No. 4,720,432, plasma-deposited fluorocarbon polymers as described in U.S. Pat. Nos. 6,127,004, 6,208,075, and 6,208,077, and some aromatic amines, for example, m-MTDATA (4,4',4"-tris[(3-methylphenyl)phenylamino]triphenylamine). Alternative hole-injecting materials for organic EL devices are described in EP 0 891 121 A1 and EP 1 029 909 A1.

[0030] The hole-transporting layer **312** is disposed in this invention between light-emitting layer **313** and the electrode that is configured as the anode, and contains at least one hole-transporting compound such as an aromatic tertiary amine, where the latter is understood to be a compound containing at least one trivalent nitrogen atom that is bonded only to carbon atoms, at least one of which is a member of an aromatic ring. In one form the aromatic tertiary amine can be an arylamine, such as a monoarylamine, diarylamine, triarylamine, or a polymeric arylamine. Exemplary monomeric triarylaminines are illustrated by Klupfel et al. U.S. Pat.

No. 3,180,730. Other suitable triaryl amines substituted with one or more vinyl radicals and/or comprising at least one active hydrogen containing group are disclosed by Brantley et al U.S. Pat. Nos. 3,567,450 and 3,658,520.

[0031] A more preferred class of aromatic tertiary amines are those which include at least two aromatic tertiary amine moieties as described in U.S. Pat. Nos. 4,720,432 and 5,061,569. The hole-transporting layer **312** can be formed of a single or a mixture of aromatic tertiary amine compounds. Illustrative of useful aromatic tertiary amines are the following:

- [0032] 1,1-Bis(4-di-p-tolylaminophenyl)cyclohexane
- [0033] 1,1-Bis(4-di-p-tolylaminophenyl)-4-phenylcyclohexane
- [0034] 4,4'-Bis(diphenylamino)quadriphenyl
- [0035] Bis(4-dimethylamino-2-methylphenyl)-phenylmethane
- [0036] N,N,N-Tri(p-tolyl)amine
- [0037] 4-(di-p-tolylamino)-4'-[4(di-p-tolylamino)-styryl]stilbene
- [0038] N,N,N',N'-Tetra-p-tolyl-4,4'-diaminobiphenyl
- [0039] N,N,N',N'-Tetraphenyl-4,4'-diaminobiphenyl
- [0040] N,N,N',N'-tetra-1-naphthyl-4,4'-diaminobiphenyl
- [0041] N,N,N',N'-tetra-2-naphthyl-4,4'-diaminobiphenyl
- [0042] N-Phenylcarbazole
- [0043] 4,4'-Bis[N-(1-naphthyl)-N-phenylamino]biphenyl
- [0044] 4,4'-Bis[N-(1-naphthyl)-N-(2-naphthyl)amino]biphenyl
- [0045] 4,4''-Bis[N-(1-naphthyl)-N-phenylamino]p-terphenyl
- [0046] 4,4'-Bis[N-(2-naphthyl)-N-phenylamino]biphenyl
- [0047] 4,4'-Bis[N-(3-acenaphthenyl)-N-phenylamino]biphenyl
- [0048] 1,5-Bis[N-(1-naphthyl)-N-phenylamino]naphthalene
- [0049] 4,4'-Bis[N-(9-anthryl)-N-phenylamino]biphenyl
- [0050] 4,4''-Bis[N-(1-anthryl)-N-phenylamino]p-terphenyl
- [0051] 4,4'-Bis[N-(2-phenanthryl)-N-phenylamino]biphenyl
- [0052] 4,4'-Bis[N-(8-fluoranthryl)-N-phenylamino]biphenyl
- [0053] 4,4'-Bis[N-(2-pyrenyl)-N-phenylamino]biphenyl
- [0054] 4,4'-Bis[N-(2-naphthacenyl)-N-phenylamino]biphenyl
- [0055] 4,4'-Bis[N-(2-perylenyl)-N-phenylamino]biphenyl

- [0056] 4,4'-Bis[N-(1-coronenyl)-N-phenylamino]biphenyl
- [0057] 2,6-Bis(di-p-tolylamino)naphthalene
- [0058] 2,6-Bis[di-(1-naphthyl)amino]naphthalene
- [0059] 2,6-Bis[N-(1-naphthyl)-N-(2-naphthyl)amino]naphthalene
- [0060] N,N,N',N'-Tetra(2-naphthyl)-4,4''-diamino-p-terphenyl
- [0061] 4,4'-Bis{N-phenyl-N-[4-(1-naphthyl)-phenyl]amino}biphenyl
- [0062] 4,4'-Bis[N-phenyl-N-(2-pyrenyl)amino]biphenyl
- [0063] 2,6-Bis[N,N-di(2-naphthyl)amine]fluorene
- [0064] 1,5-Bis[N-(1-naphthyl)-N-phenylamino]naphthalene
- [0065] 4,4',4''-tris[(3-methylphenyl)phenylamino]triphenylamine.

[0066] Another class of useful hole-transporting materials includes polycyclic aromatic compounds as described in EP 1 009 041. Tertiary aromatic amines with more than two amine groups can be used including oligomeric materials. In addition, polymeric hole-transporting materials can be used such as poly(N-vinylcarbazole) (PVK), polythiophenes, polypyrrole, polyaniline, and copolymers such as poly(3,4-ethylenedioxythiophene)/poly(4-styrenesulfonate) also called PEDOT/PSS.

[0067] As more fully described in U.S. Pat. Nos. 4,769,292 and 5,935,721, the light-emitting layer (LEL) **313** of pixel portion **20b** includes a luminescent or fluorescent material where electroluminescence is produced as a result of electron-hole pair recombination in this region, emitting light **340** in response to current. In the case of a full color or multicolor OLED display, light-emitting layer **313** emits a particular colored light so that various devices within the OLED display produce different colors. Light **340** is shown for a top-emitting device, wherein light **340** passes through second electrode **320** to be viewed by a user, but it will be understood that pixel portion **20b** can be a bottom-emitting device in other embodiments. As is shown in FIG. 4, light-emitting layer **313** is the only layer that requires patterning between pixels of different color according to the technique taught in U.S. Pat. No. 6,281,634. However, it is not necessary to pattern light-emitting layer **313** between the portions within a pixel. The light-emitting layer **313** can be comprised of a single material, but more commonly consists of a host material doped with a guest compound or compounds where light emission comes primarily from the dopant and can be of any color. The host materials in the light-emitting layer **313** can be an electron-transporting material, as defined below, a hole-transporting material, as defined above, or another material or combination of materials that support hole-electron recombination. The dopant is usually chosen from highly fluorescent dyes, but phosphorescent compounds, e.g., transition metal complexes as described in WO 98/55561, WO 00/18851, WO 00/57676, and WO 00/70655 are also useful. Dopants are typically coated as 0.01 to 10% by weight into the host material. Polymeric materials such as polyfluorenes and polyvinylarylenes, e.g., poly(p-phenylenevinylene), PPV, can also be

used as the host material. In this case, small molecule dopants can be molecularly dispersed into the polymeric host, or the dopant can be added by copolymerizing a minor constituent into the host polymer.

[0068] An important relationship for choosing a dye as a dopant is a comparison of the bandgap potential which is defined as the energy difference between the highest occupied molecular orbital and the lowest unoccupied molecular orbital of the molecule. For efficient energy transfer from the host to the dopant molecule, a necessary condition is that the band gap of the dopant is smaller than that of the host material. For phosphorescent emitters it is also important that the host triplet energy level of the host be high enough to enable energy transfer from host to dopant.

[0069] Host and emitting molecules known to be of use include, but are not limited to, those disclosed in U.S. Pat. Nos. 4,768,292; 5,141,671; 5,150,006; 5,151,629; 5,405,709; 5,484,922; 5,593,788; 5,645,948; 5,683,823; 5,755,999; 5,928,802; 5,935,720; 5,935,721; and 6,020,078.

[0070] Metal complexes of 8-hydroxyquinoline (oxine) and similar derivatives constitute one class of useful host compounds capable of supporting electroluminescence. Illustrative of useful chelated oxinoid compounds are the following:

[0071] CO-1: Aluminum trisoxine [alias, tris(8-quinolinolato)aluminum(III)]

[0072] CO-2: Magnesium bisoxine [alias, bis(8-quinolinolato)magnesium(II)]

[0073] CO-3: Bis[benzo{f}-8-quinolinolato]zinc (II)

[0074] CO-4: Bis(2-methyl-8-quinolinolato)aluminum(III)-*μ*-oxo-bis(2-methyl-8-quinolinolato) aluminum(III)

[0075] CO-5: Indium trisoxine [alias, tris(8-quinolinolato)indium]

[0076] CO-6: Aluminum tris(5-methyloxine) [alias, tris(5-methyl-8-quinolinolato) aluminum(III)]

[0077] CO-7: Lithium oxine [alias, (8-quinolinolato)lithium(I)]

[0078] CO-8: Gallium oxine [alias, tris(8-quinolinolato)gallium(III)]

[0079] CO-9: Zirconium oxine [alias, tetra(8-quinolinolato)zirconium(IV)].

[0080] Other classes of useful host materials include, but are not limited to derivatives of anthracene, such as 9,10-di-(2-naphthyl)anthracene and derivatives thereof as described in U.S. Pat. No. 5,935,721, distyrylarylene derivatives as described in U.S. Pat. No. 5,121,029, and benzazole derivatives, for example, 2,2', 2''-(1,3,5-phenylene)tris[1-phenyl-1H-benzimidazole]. Carbazole derivatives are particularly useful hosts for phosphorescent emitters.

[0081] Useful fluorescent dopants include, but are not limited to, derivatives of anthracene, tetracene, xanthene, perylene, rubrene, coumarin, rhodamine, and quinacridone, dicyanomethylenepyran compounds, thiopyran compounds, polymethine compounds, pyrilium and thiapyrilium compounds, fluorene derivatives, perflanthene derivatives, inde-

noperylene derivatives, bis(azinyl)amine boron compounds, bis(azinyl)methane compounds, and carbostyryl compounds.

[0082] Preferred thin film-forming materials for use in forming the electron-transporting layer **314** of the organic EL elements of this invention are metal chelated oxinoid compounds, including chelates of oxine itself (also commonly referred to as 8-quinolinol or 8-hydroxyquinoline). Such compounds help to inject and transport electrons, exhibit high levels of performance, and are readily fabricated in the form of thin films. Exemplary oxinoid compounds were listed previously.

[0083] Other electron-transporting materials include various butadiene derivatives as disclosed in U.S. Pat. No. 4,356,429 and various heterocyclic optical brighteners as described in U.S. Pat. No. 4,539,507. Benzazoles and triazines are also useful electron-transporting materials.

[0084] Disposed over the organic EL layers is the second electrode **320**. The second electrode is common to all pixels and does not require precision alignment and patterning. The second electrode **320** is typically biased as the cathode. When light emission is viewed solely through substrate **200**, the second electrode **320** used in this invention can be comprised of nearly any conductive material. Desirable materials have good film-forming properties to ensure good contact with the underlying organic layer, promote electron injection at low voltage, and have good stability. Useful cathode materials often contain a low work function metal (<4.0 eV) or metal alloy. One preferred cathode material is comprised of a Mg:Ag alloy wherein the percentage of silver is in the range of 1 to 20%, as described in U.S. Pat. No. 4,885,221. Another suitable class of cathode materials includes bilayers comprising a thin electron-injecting layer (EIL) in contact with the organic layer (e.g., electron-transporting layer **314**) which is capped with a thicker layer of a conductive metal. Here, the EIL preferably includes a low work function metal or metal salt, and if so, the thicker capping layer does not need to have a low work function. One such cathode is comprised of a thin layer of LiF followed by a thicker layer of Al as described in U.S. Pat. No. 5,677,572. Other useful cathode material sets include, but are not limited to, those disclosed in U.S. Pat. Nos. 5,059,861, 5,059,862, and 6,140,763.

[0085] When light emission is viewed through the second electrode **320**, the second electrode **320** must be transparent or nearly transparent. For such applications, metals must be thin or one must use transparent conductive oxides, or a combination of these materials. Optically transparent cathodes have been described in more detail in U.S. Pat. Nos. 4,885,211 and 5,247,190; JP 3,234,963; U.S. Pat. Nos. 5,703,436; 5,608,287; 5,837,391; 5,677,572; 5,776,622; 5,776,623; 5,714,838; 5,969,474; 5,739,545; 5,981,306; 6,137,223; 6,140,763; and 6,172,459; EP 1 076 368; U.S. Pat. Nos. 6,278,236 and 6,284,393. Materials for second electrode **320** are typically deposited by evaporation, sputtering, or chemical vapor deposition. While one layer is shown for the second electrode, multiple sublayers can be combined to achieve the desired level of conductance and transparency such as an ITO layer and an Al layer.

[0086] In some instances, light-emitting layer **313** and electron-transporting layer **314** can optionally be replaced by a single layer that serves the function of supporting both

light emission and electron transportation. It is also known in the art that emitting dopants can be added to the hole-transporting layer 312, which can serve as a host.

[0087] Additional layers such as electron- or hole-blocking layers as taught in the art can be employed in devices of this invention. Hole-blocking layers are commonly used to improve efficiency of phosphorescent emitter devices, for example, as in U.S. Patent Application Publication 2002/0015859 A1.

[0088] The organic materials above are suitably deposited through a vapor-phase method such as sublimation, but can be deposited from a fluid, for example, from a solvent with an optional binder to improve film formation. If the material is a polymer, solvent deposition is useful but other methods can be used, such as sputtering or thermal transfer from a donor sheet. The material to be deposited by sublimation can be vaporized from a sublimator "boat" often comprised of a tantalum material, e.g., as described in U.S. Pat. No. 6,237,529, or can be first coated onto a donor sheet and then sublimed in closer proximity to the substrate. Layers with a mixture of materials can utilize separate sublimator boats or the materials can be premixed and coated from a single boat or donor sheet. Patterned deposition can be achieved using shadow masks, integral shadow masks (U.S. Pat. No. 5,294,870), spatially-defined thermal dye transfer from a donor sheet (U.S. Pat. Nos. 5,688,551, 5,851,709 and 6,066,357) and inkjet method (U.S. Pat. No. 6,066,357).

[0089] Most OLED devices are sensitive to moisture or oxygen, or both, so they are commonly sealed in an inert atmosphere such as nitrogen or argon, along with a desiccant such as alumina, bauxite, calcium sulfate, clays, silica gel, zeolites, alkaline metal oxides, alkaline earth metal oxides, sulfates, or metal halides and perchlorates. Methods for encapsulation and desiccation include, but are not limited to, those described in U.S. Pat. No. 6,226,890. In addition, barrier layers such as SiO_x, Teflon, and alternating inorganic/polymeric layers are known in the art for encapsulation.

[0090] OLED devices of this invention can employ various well known optical effects in order to enhance its properties if desired. This includes but is not limited to optimizing layer thicknesses to yield maximum light transmission, providing dielectric mirror structures, replacing reflective electrodes with light-absorbing electrodes, providing anti-glare or anti-reflection coatings over the display, providing a polarizing medium over the display, or providing colored, neutral density, or color conversion filters over the display.

[0091] The invention has been described in detail with particular reference to certain preferred embodiments thereof, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention.

PARTS LIST

[0092] 12 OLED device or OLED display
 [0093] 14 OLED device or OLED display
 [0094] 20 pixel
 [0095] 20a pixel portion

[0096] 20b pixel portion
 [0097] 20c pixel portion
 [0098] 21 pixel
 [0099] 22 pixel
 [0100] 100 transistor drive circuit
 [0101] 111 power line
 [0102] 112 data line
 [0103] 113 select line
 [0104] 114 capacitor line
 [0105] 120 select transistor
 [0106] 121 semiconductor region
 [0107] 122 via
 [0108] 130 storage capacitor
 [0109] 140 power transistor
 [0110] 140a power transistor
 [0111] 140b power transistor
 [0112] 140c power transistor
 [0113] 141a semiconductor region
 [0114] 141b semiconductor region
 [0115] 141c semiconductor region
 [0116] 145a via
 [0117] 145b via
 [0118] 145c via
 [0119] 146a via
 [0120] 146b via
 [0121] 146c via
 [0122] 152 via
 [0123] 153 gate conductor
 [0124] 191 first electrode
 [0125] 191a first electrode
 [0126] 191b first electrode
 [0127] 191c first electrode
 [0128] 200 substrate
 [0129] 212 gate insulating layer
 [0130] 213 insulator layer
 [0131] 214 insulator layer
 [0132] 220 insulating film
 [0133] 310 organic EL layers
 [0134] 310a organic light emitting diode
 [0135] 310b organic light emitting diode
 [0136] 310c organic light emitting diode
 [0137] 311 hole-injecting layer
 [0138] 312 hole-transporting layer

[0139] 313 light-emitting layer

[0140] 314 electron-transporting layer

[0141] 320 second electrode

[0142] 340 light

What is claimed is:

1. An OLED device having a plurality of pixels, with each pixel comprising:

- a) a plurality of laterally spaced first electrodes, each corresponding to a portion of the pixel and a common second electrode vertically spaced from the plurality of first electrodes;
- b) at least one light-emitting layer disposed between the first and second electrodes including a host and a dopant for emitting light in response to current;
- c) a hole-transporting layer disposed between the light-emitting layer and the first or second electrodes; and
- d) a transistor drive circuit for each pixel including separate transistors, each transistor associated with a different one of the first electrodes and when driven causes current to pass between its corresponding first electrode and the second electrode so that, if there is a short in the portion between an individual first electrode and the second electrode, the remaining portions will continue to produce light in the light-emitting layer, thereby reducing the effects of the short.

2. The device of claim 1 wherein the first electrodes are anodes, and the second electrode is a cathode.

3. The device of claim 2 further including an electron-transporting layer disposed between the cathode and the light-emitting layer.

4. The device of claim 1 wherein light, which is viewed by a user, passes through the second electrode.

5. The device of claim 1 wherein the transistors are power transistors that are connected in parallel and further including a select transistor connected to the gate of each power transistor to pass a data signal to indicate the amount of current to be driven through each portion of the pixel.

6. The device of claim 1 wherein the transistors are power transistors that are connected in parallel and further including a storage capacitor connected the gate of the power transistors to hold and a select transistor connected to the gate of each power transistor to pass a data signal to be held

by the storage capacitor which indicates the amount of current to be driven through each portion of the pixel.

7. An OLED device which produces different colors and wherein the OLED device has a plurality of pixels with each pixel comprising:

- a) a plurality of laterally spaced first electrodes, each corresponding to a portion of the pixel and a common second electrode vertically spaced from the plurality of first electrodes;
- b) at least one light-emitting layer disposed between the first and second electrodes including a host and a dopant for emitting a particular colored light in response to current;
- c) a hole-transporting layer disposed between the light-emitting layer and the first or second electrodes; and
- d) a transistor drive circuit for each pixel including separate transistors, each transistor associated with a different one of the first electrodes and when driven causes current to pass between its corresponding first electrode and the second electrode so that, if there is a short in the portion between an individual first electrode and the second electrode, the remaining portions will continue to produce light in the light-emitting layer, thereby reducing the effects of the short.

8. The device of claim 7 wherein the first electrodes are anodes, and the second electrode is a cathode.

9. The device of claim 8 further including an electron-transporting layer disposed between the cathode and the light-emitting layer.

10. The device of claim 7 wherein light, which is viewed by a user, passes through the second electrode.

11. The device of claim 7 wherein the transistors are power transistors that are connected in parallel and further including a select transistor connected to the gate of each power transistor to pass a data signal to indicate the amount of current to be driven through each portion of the pixel.

12. The device of claim 7 wherein the transistors are power transistors that are connected in parallel and further including a storage capacitor connected the gate of the power transistors to hold and a select transistor connected to the gate of each power transistor to pass a data signal to be held by the storage capacitor which indicates the amount of current to be driven through each portion of the pixel.

* * * * *

专利名称(译)	减少有源矩阵有机电致发光器件的像素短路的影响		
公开(公告)号	US20040222746A1	公开(公告)日	2004-11-11
申请号	US10/430759	申请日	2003-05-06
[标]申请(专利权)人(译)	伊斯曼柯达公司		
申请(专利权)人(译)	伊士曼柯达公司		
当前申请(专利权)人(译)	全球OLED科技有限责任公司		
[标]发明人	WINTERS DUSTIN		
发明人	WINTERS, DUSTIN		
IPC分类号	H01L51/50 G09F9/30 G09G3/20 G09G3/30 G09G3/32 H01L27/32 H05B33/14 H05B37/00		
CPC分类号	G09G3/3233 G09G2300/0443 G09G2300/0814 G09G2300/0842 G09G2330/10 H01L27/3202 H01L27/3244 H01L51/5206 H01L2251/568 Y10S345/904		
其他公开文献	US6961032		
外部链接	Espacenet	USPTO	

摘要(译)

一种OLED器件，每个像素包括多个横向隔开的第一电极，每个第一电极对应于像素的一部分和与多个第一电极垂直间隔开的公共第二电极；至少一个发光层，设置在第一和第二电极之间，包括主体和掺杂剂，用于响应电流发光；空穴传输层，设置在发光层和第一或第二电极之间；每个像素的晶体管驱动电路包括分离的晶体管，每个晶体管与第一电极中的不同的一个相关联，并且当被驱动时使电流在其相应第一电极和第二电极之间通过，使得如果该部分中存在短路则在个别第一电极和第二电极之间，其余部分将继续在发光层中产生光，从而减少短路的影响。

