



(19) **United States**

(12) **Patent Application Publication**
Sun

(10) **Pub. No.: US 2004/0178719 A1**
(43) **Pub. Date: Sep. 16, 2004**

(54) **ORGANIC LIGHT EMITTING DIODES DISPLAY**

Publication Classification

(76) **Inventor: Wein-Town Sun, Kaohsiung (TW)**

(51) **Int. Cl.⁷ H05B 33/00; H05B 33/02**
(52) **U.S. Cl. 313/500; 313/504; 313/505**

Correspondence Address:
THOMAS, KAYDEN, HORSTEMEYER & RISLEY, LLP
100 GALLERIA PARKWAY, NW
STE 1750
ATLANTA, GA 30339-5948 (US)

(57) **ABSTRACT**


An organic light emitting diodes display device includes a number of data lines, scan lines, and cathode electrodes. These scan lines are perpendicular to the data lines to form a number of pixels, each of which possess a pixel area respectively. All the pixels areas form a pixel area array. These cathode electrodes are parallel to the scan lines or data lines and partially cover the pixel area array. Spaces between each two cathode electrodes are above the scan lines or data lines to avoid the parasitic capacitance between the cathode electrodes and scan lines or data lines. And thus the resistance capacitance time delay is prevented.

(21) **Appl. No.: 10/417,875**

(22) **Filed: Apr. 17, 2003**

(30) **Foreign Application Priority Data**

Mar. 10, 2003 (TW)..... 092105134

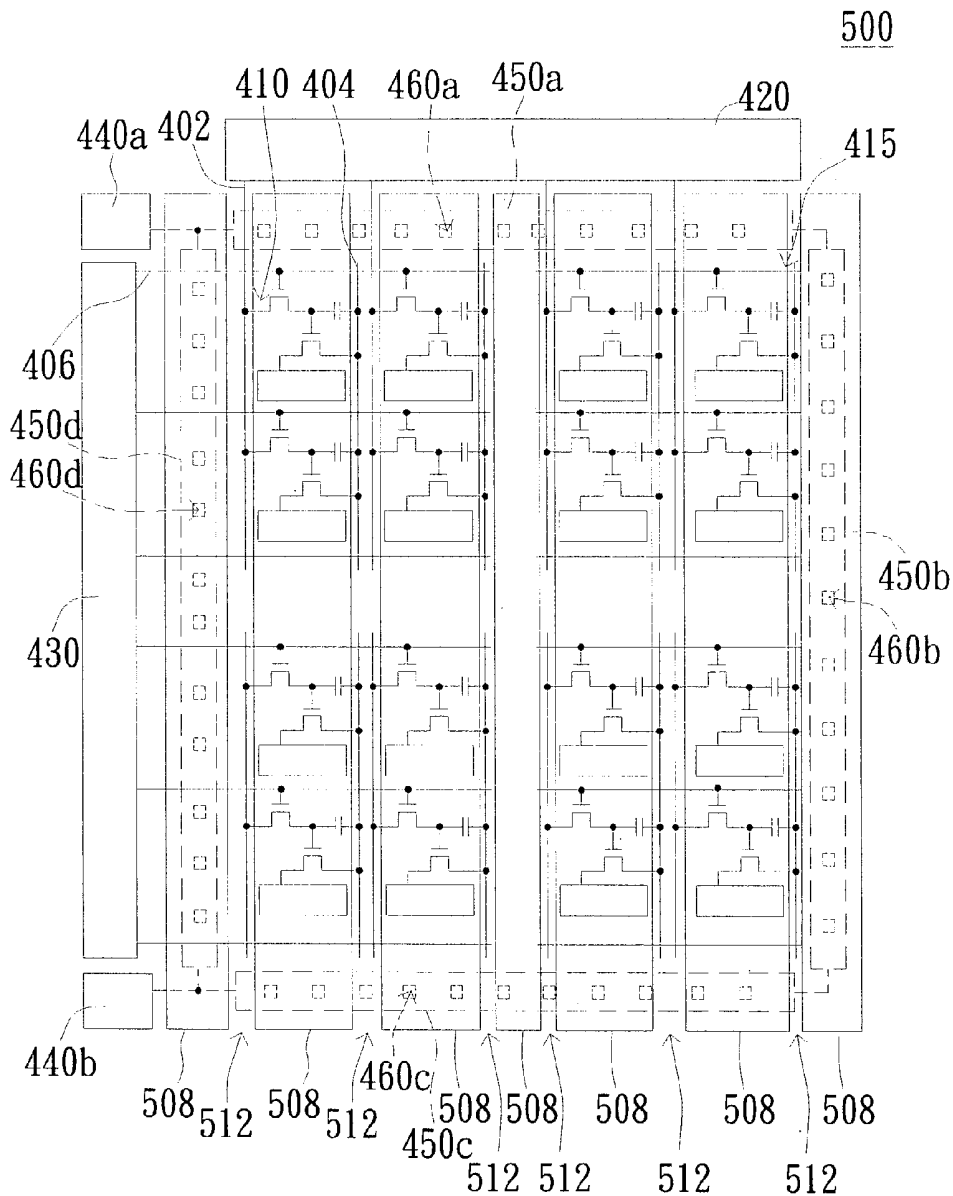

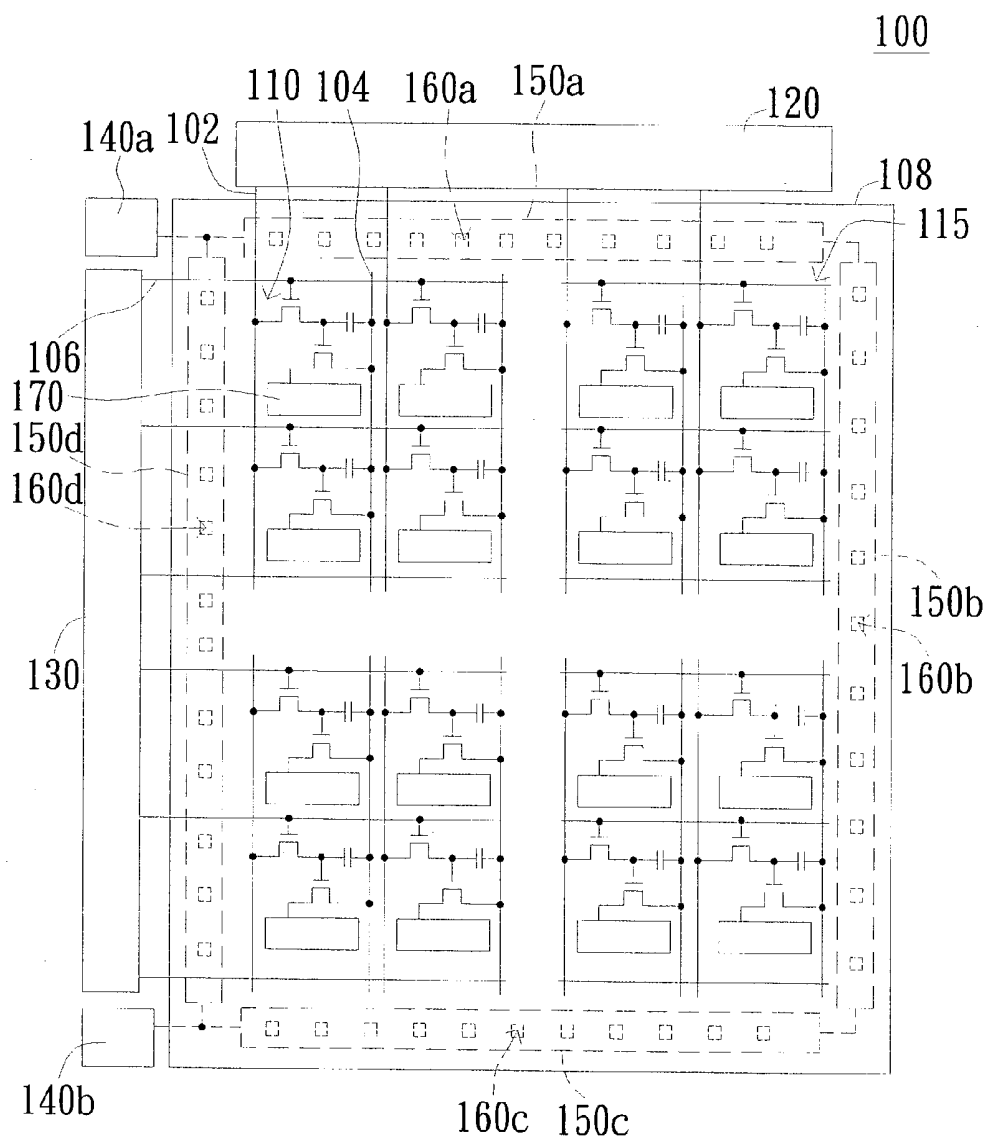


FIG. 1(PRIOR ART)

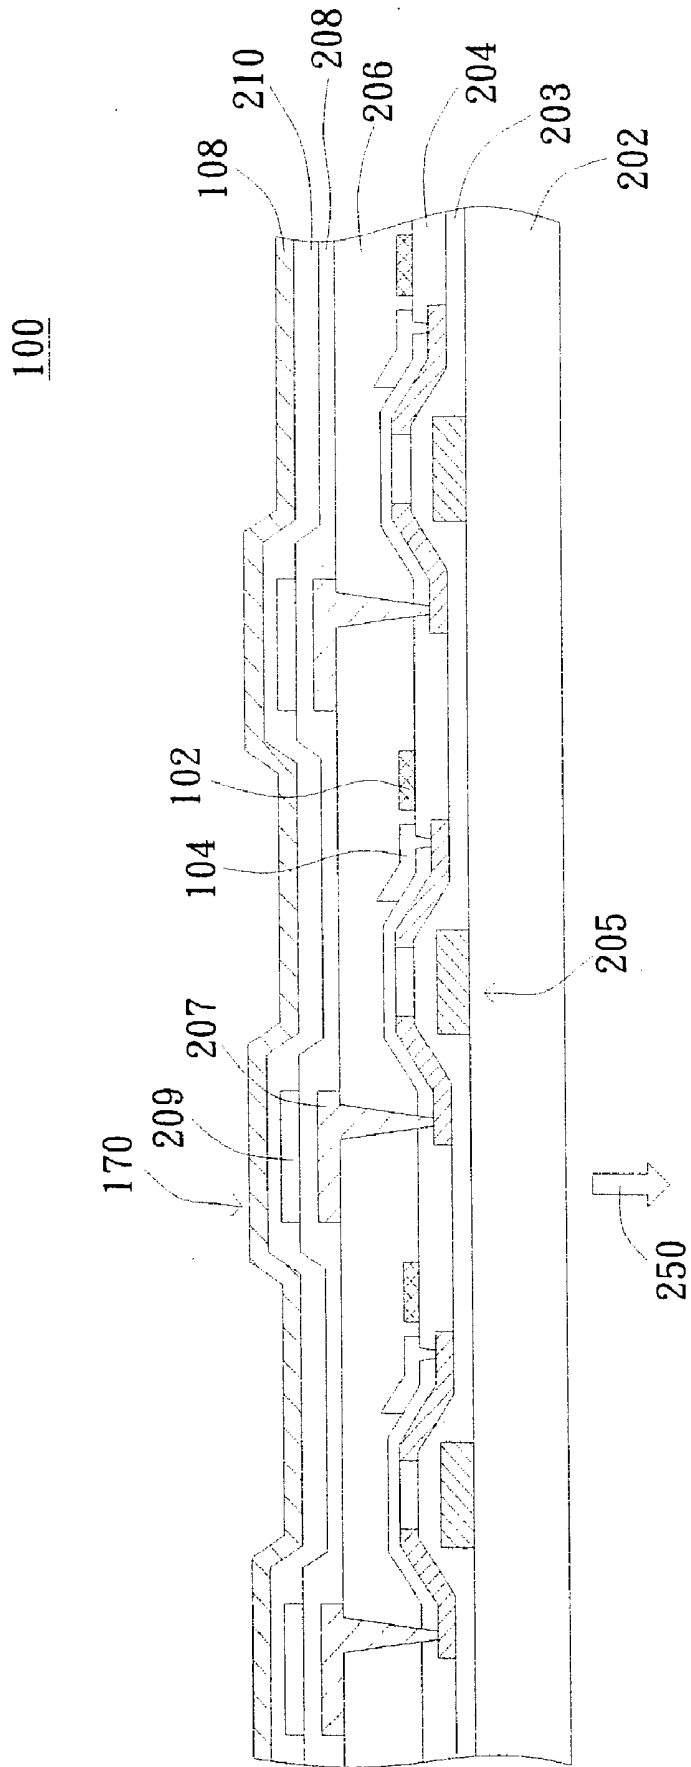


FIG. 2(PRIOR ART)

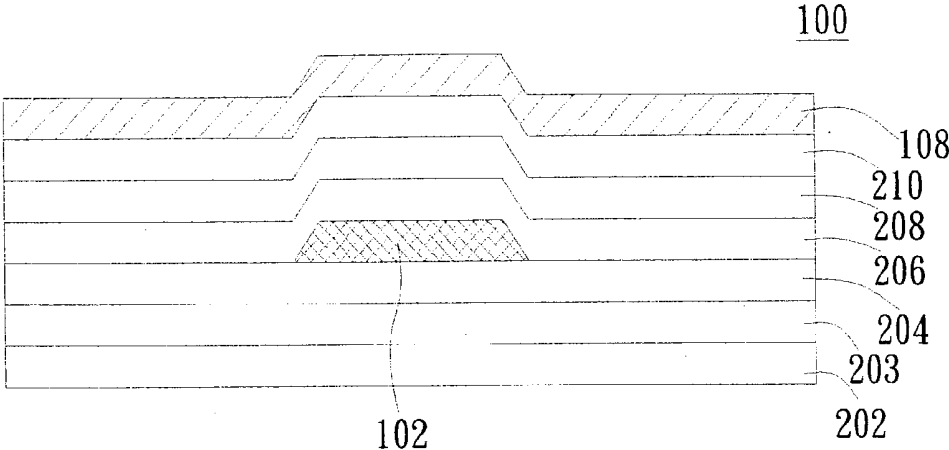


FIG. 3A(PRIOR ART)

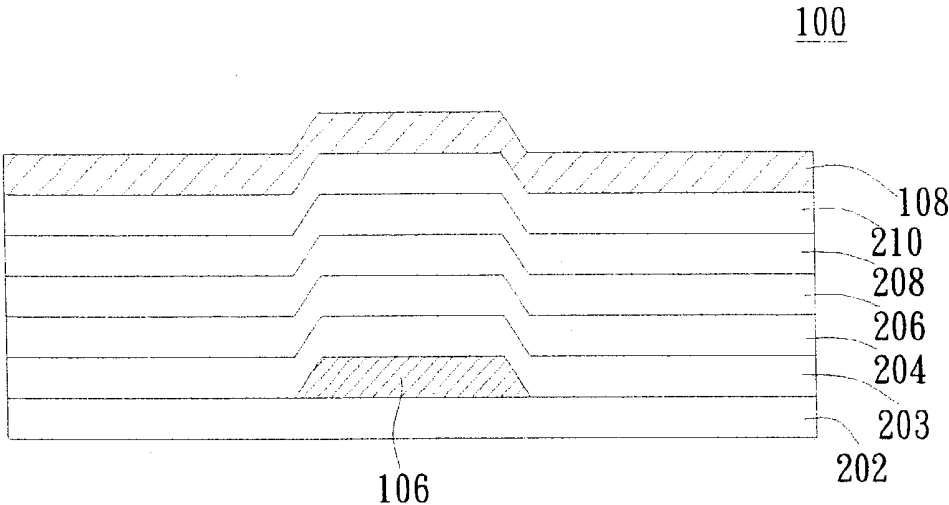


FIG. 3B(PRIOR ART)

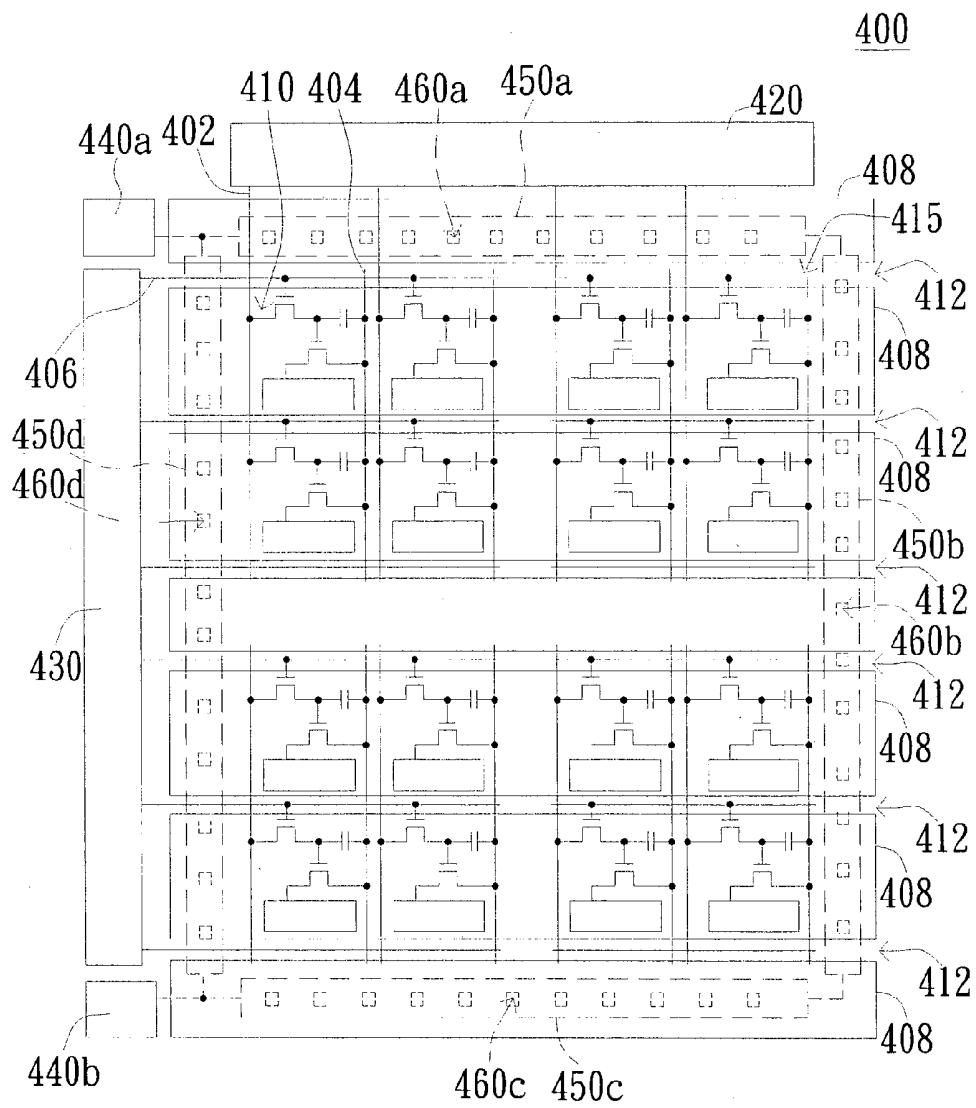


FIG. 4

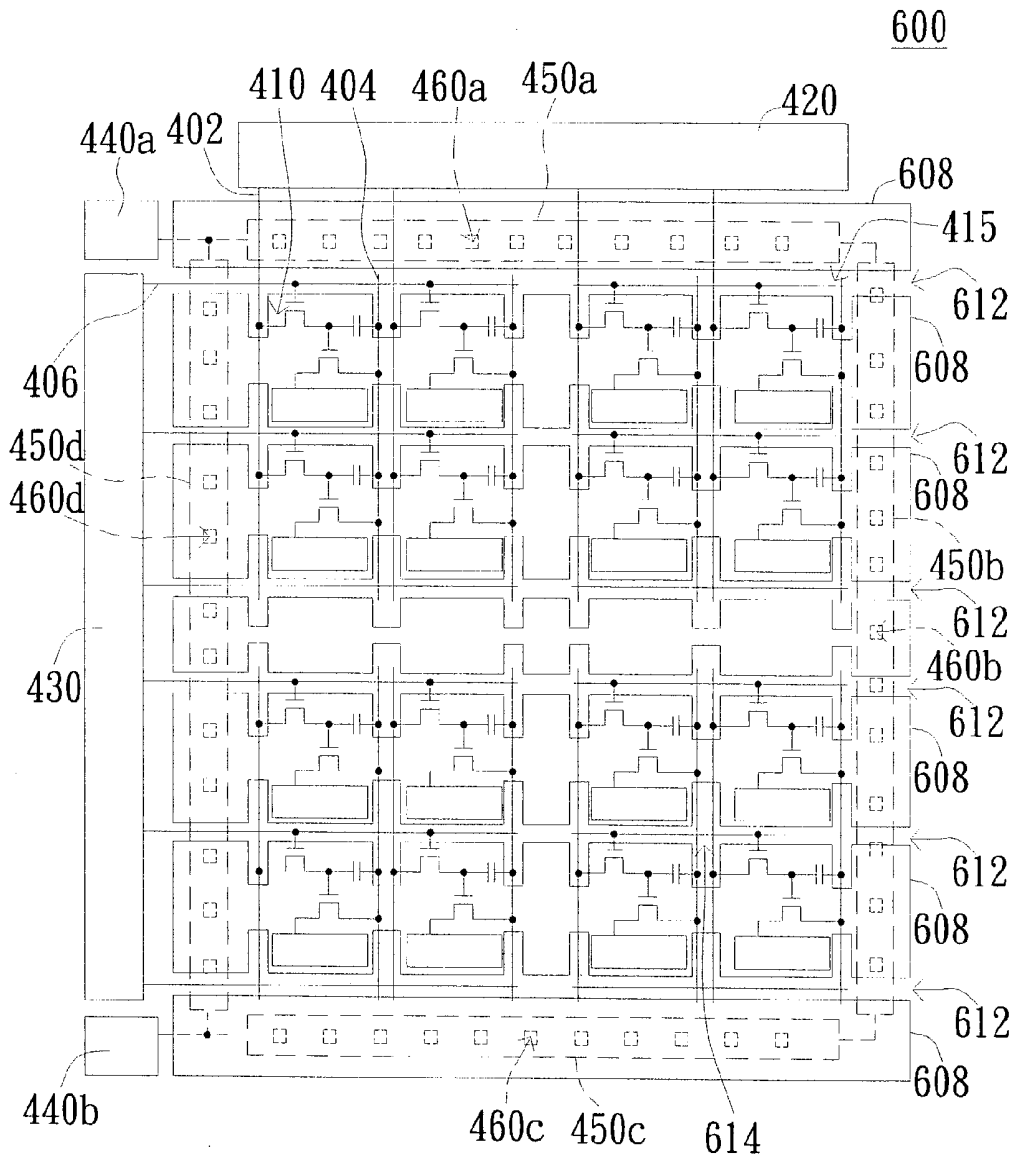


FIG. 6

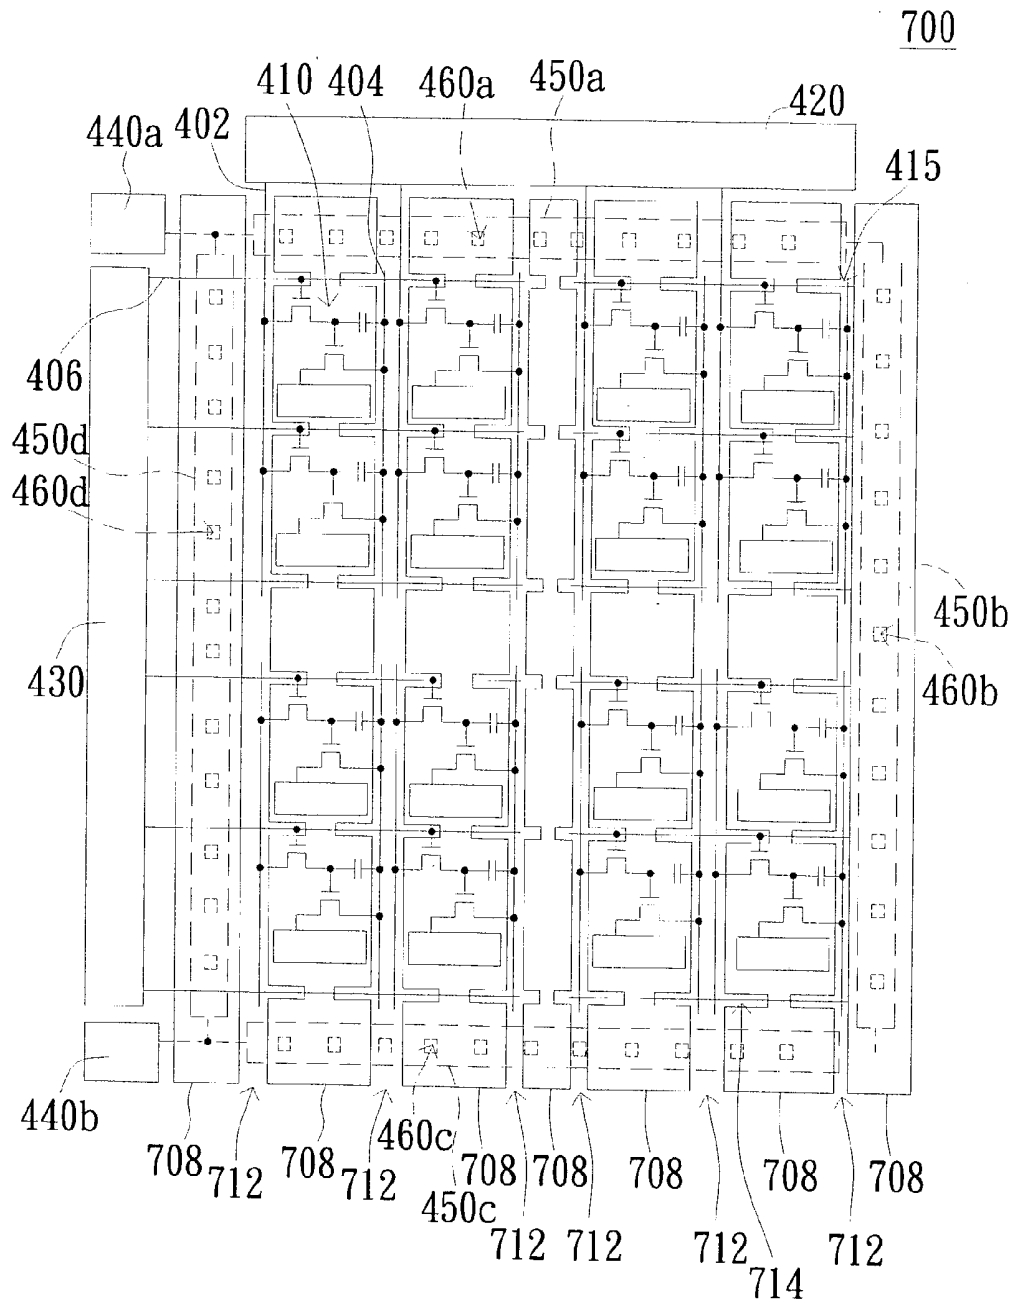


FIG. 7

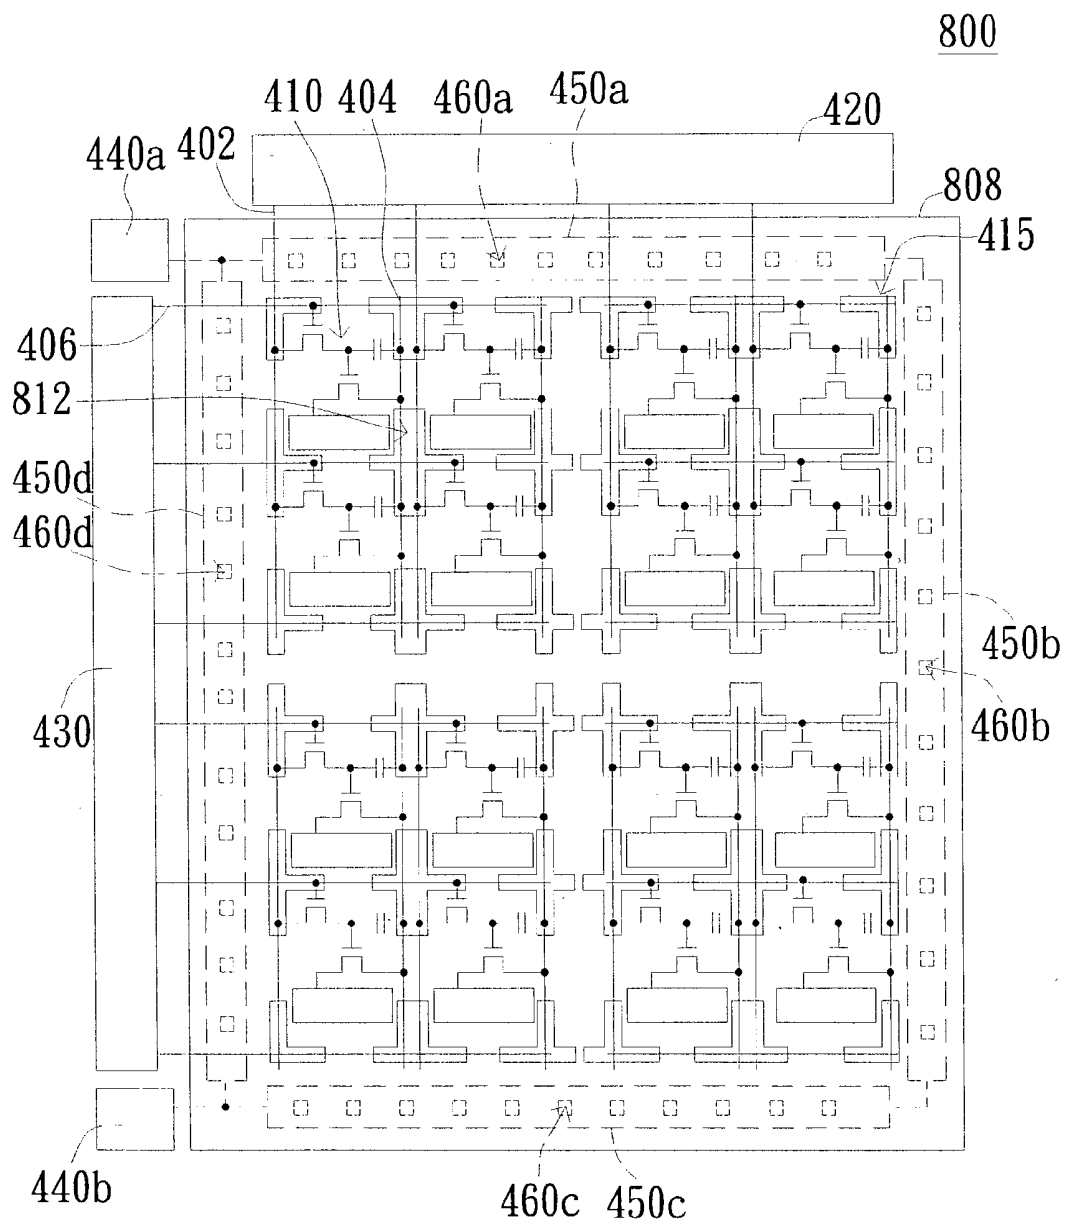


FIG. 8

ORGANIC LIGHT EMITTING DIODES DISPLAY

[0001] This application claims the benefit of Taiwan application Serial No. 92105134, filed Mar. 10, 2003.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates in general to an organic light emitting diode (OLED) display, and more particularly to an OLED display which is able to avoid the parasitic capacitance between the cathode electrodes and scan lines or data lines, and thus the consequential resistance capacitance time delay (RC delay) is prevented.

[0004] 2. Description of the Related Art

[0005] OLED display technology requires no backlighting—unlike liquid crystal display (LCD) panel, since OLED pixels are self-luminous by way of current driven or voltage driven. Additional advantages of OLED displays are exceptionally wide viewing angle and full-colour. Therefore, the OLED displays are expected to replace LCDs in most flat-panel display applications which include personal digital assistants (PDAs), cell phones, and more.

[0006] FIG. 1 is a schematic diagram showing a circuit configuration of a conventional OLED display. An OLED display 100 includes a data driver 120, a scan driver 130, a cathode electrode 108, data lines 102, power lines 104, scan lines 106, pixel areas 110, V_{SS} 140a and 140b, metal layers 150a, 150b, 150c and 150d, and contact holes 160a, 160b, 160c and 160d.

[0007] The data lines 102 are parallel to the power supply lines 104. And both the data lines 102 and the power lines 104 are perpendicular to the scan lines 106 to form a number of pixels, each of which possesses a pixel area 110, respectively. All the pixel areas 110 form a pixel area array 115.

[0008] The data driver 120 drives all the data lines 102 and provides the data lines with data signals. The data lines 102 then transmit the data signals to the corresponding pixels. The scan driver 130 drives all the scan lines 106 and provides the scan lines with scan signals. The scan lines 106 then transmit the scan signals to the corresponding pixels. Besides, the power supply lines 104 function as transmitting the power to the corresponding pixels. Each pixel generates different levels of brightness according to the level of voltage it receives.

[0009] The pixel area array 115 is surrounded by the metal layers 150a, 150b, 150c, and 150d, which are respectively at the upper side, right side, bottom side, and left side of the pixel area array 115. The V_{SS} 140a and 140b are electrically coupled to the metal layers 150a, 150b, 150c, and 150d.

[0010] The cathode electrode 108 covers the pixel area array 115 and the metal layers 150a, 150b, 150c, and 150d including the scan lines 106, the data lines 102, and the power supply lines 104. The cathode electrode 108 is electrically coupled to the metal layers 150a, 150b, 150c, and 150d through the contact holes 160a, 160b, 160c, and 160d outside of the pixel area array 115. Therefore, the cathode electrode 108 can be electrically coupled to the V_{SS} 140a and 140b.

[0011] In addition, there are at least two thin film transistors (TFTs), a capacitor, and an electroluminescence display device 170 for each pixel.

[0012] FIG. 2 is a cross-sectional view of the conventional OLED display in FIG. 1. Three pixels of the OLED display are shown in FIG. 2 for example. The gate of TFT 205 is formed on the transparent substrate 202 and is covered by the gate insulating layer 203. The scan lines 106 shown in FIG. 1 (not shown in FIG. 2) are formed on the transparent substrate 202 and also covered by the gate insulating layer 203. Further, the drain and source of TFT 205 are formed on the gate insulating layer 203. The drain and source of TFT 205 are covered by the interlayer insulating layer 204 which is further covered by the planarization insulating layer 206. The data lines 102 and the power supply lines 104 are disposed on the interlayer insulating layer 204 and covered by the planarization insulating layer 206. The anode electrodes 207 are formed on the surface of the planarization insulating layer 206, corresponding to each pixel. Furthermore, the sources of the TFT 205 are coupled to the anode electrode 207 and the drains of the TFT 205 are coupled to the power supply lines 104.

[0013] The stack structure of a second TFT in each pixel (not shown in FIG. 2), other than the TFT 205, is similar to the TFT 205, but it is electrically coupled to the capacitor and the drain thereof is electrically coupled to the data lines 102.

[0014] The hole transport layer 208 is formed on the anode electrode 207 and the planarization insulating layer 206, covering all pixels. The emissive layer 209 is formed on the hole transport layer 208, corresponding to each pixel. The electron transport layer 210 is formed on the emissive layer 209 and the hole transport layer 208, covering all pixels. The cathode electrode 108 is formed on the electron transport layer 210. Therefore, the anode electrodes 207, the hole transport layer 208, the emissive layer 209, the electron transport layer 210, and the cathode electrode 108 together form the electroluminescence display device 170. The holes and the electrons respectively transmitted from the hole transport layer 208 and the electron transport layer 210 meet in the emissive layer 209 so that light can be emitted from the emissive layer 209 toward outside along the direction indicated by the arrow 205, as shown in FIG. 2.

[0015] However, the image quality of the OLED display will be affected by the resistance capacitance time delay (RC delay). The RC delay is caused from the parasitic capacitance between the cathode electrode 108 and scan lines or data lines respectively. From a top view, the scan lines 106 and the data lines 102 are covered under the cathode electrode 108 of a conventional OLED display according to the overall covering cathode electrode.

[0016] FIG. 3A is a cross-sectional view of a part of FIG. 1 around the data line. The circuit configuration of the OLED display 100 is a multi-layer stack structure whose arrangement from bottom to top is the transparent substrate 202, the gate insulating layer 203, the interlayer insulating layer 204, the data lines 102, the planarization insulating layer 206, the hole transport layer 208, the electron transport layer 210, and the cathode electrode 108.

[0017] The parasitic capacitance between the cathode electrode 108 and the data lines 102 is formed since the cathode electrode 108 is above the data lines 102 to affect image quality and cause the resistance capacitance time delay. Furthermore, it will result in the data signals delay of the data lines 102.

[0018] FIG. 3B is a cross-sectional view of a part of FIG. 1 around the scan line. The multi-layer stack structure of the OLED display 100 arranged from bottom to top is the transparent substrate 202, the scan lines 106, the gate insulating layer 203, the interlayer insulating layer 204, the planarization insulating layer 206, the hole transport layer 208, the electron transport layer 210, and the cathode electrode 108.

[0019] Also, the parasitic capacitance between the cathode electrode 108 and the scan lines 106 is formed since the cathode electrode 108 is above the scan lines 106 to cause the resistance capacitance time delay. Furthermore, it will result in the scan signals delay of the scan lines 106.

[0020] As the size of OLED display 100 extends, the amount of the parasitic capacitance respectively forming between the cathode electrode 108 and the data lines 102 or the scan lines 106 grows and it will result in worse RC delay. The problems such as cross talk and inefficiency of the power supply affect the OLED display 100 hugely because the data signals delay and the scan signals delay are both resulted from the RC delay respectively. Besides, owing to the capacitive losses power is in proportion to the parasitic capacitance, the capacitive losses power of the OLED display 100 will increase relatively with the increasing parasitic capacitance when the OLED display size extends.

SUMMARY OF THE INVENTION

[0021] It is therefore an object of the invention to provide an improved OLED display with space in cathode electrodes where the space is above scan lines or data lines so that this device is able to avoid the parasitic capacitance between the cathodes and scan lines or data lines. And thus the resistance capacitance time delay and the scan and data signals delay are prevented.

[0022] In accordance with the present invention, an improved OLED display includes a number of data lines, scan lines, and cathode electrodes. These scan lines are perpendicular to the data lines to form a number of pixels, each of which possess a pixel area respectively. All the pixel areas form a pixel area array. These cathode electrodes are parallel to the scan lines or the data lines and partially cover the pixel area array. There is a space between each two cathode electrodes, and the space is above the scan lines or data lines.

[0023] The invention achieves the above-identified object by providing another improved OLED display includes a number of data lines, scan lines, and cathode electrodes. These scan lines are perpendicular to the data lines to form a number of pixels, each of which possess a pixel area respectively. All the pixel areas form a pixel area array. These cathode electrodes are parallel to the scan lines or the data lines and partially cover the pixel area array. There is a space between each two cathode electrodes and the space is above the scan lines or data lines. The cathode electrodes further includes a number of recesses, which is adjacent to the spaces and exposes the scan lines or the data lines.

[0024] Further, another improved OLED display in accordance with the present invention includes a number of data lines, scan lines and a cathode electrode. These scan lines are perpendicular to the data lines to form a number of pixels, each of which possess a pixel area respectively. All the pixel

areas form a pixel area array. This cathode electrode covers mostly the pixel area array and possesses a number of openings that exposes the projective crosses and is above the scan lines or data lines.

[0025] Other objects, features, and advantages of the invention will become apparent from the following detailed description of the preferred but non-limiting embodiments. The following description is made with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0026] FIG. 1 (Prior Art) is a schematic diagram showing a circuit configuration of a conventional OLED display;

[0027] FIG. 2 (Prior Art) is a cross-sectional view of the conventional OLED display in FIG. 1;

[0028] FIG. 3A (Prior Art) is a cross-sectional view of a part of FIG. 1 around the data line of the conventional OLED display;

[0029] FIG. 3B (Prior Art) is a cross-sectional view of a part of FIG. 1 around the scan line of the conventional OLED display;

[0030] FIG. 4 is a schematic diagram illustrating a circuit configuration of an OLED display according to the first embodiment of the invention;

[0031] FIG. 5 is a schematic diagram illustrating a circuit configuration of an OLED display according to the second embodiment of the invention;

[0032] FIG. 6 is a schematic diagram illustrating a circuit configuration of an OLED display according to the third embodiment of the invention;

[0033] FIG. 7 is a schematic diagram illustrating a circuit configuration of an OLED display according to the fourth embodiment of the invention; and

[0034] FIG. 8 is a schematic diagram illustrating a circuit configuration of an OLED display according to the fifth embodiment of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0035] In this invention, an OLED display includes a number of data lines, scan lines, and cathode electrodes. These scan lines are perpendicular to the data lines to form a number of pixels, each of which possess a pixel area, respectively. All the pixel areas form a pixel area array.

[0036] The present invention aims to diminish the cover area of the cathode electrodes above the scan lines or the data lines and reduce the parasitic capacitance to avoid the data signals delay or the scan signals delay. The practical applications of the cathode electrodes are described as following five examples with relating figures, respectively.

EXAMPLE 1

[0037] FIG. 4 is a schematic diagram illustrating a circuit configuration of an OLED display according to the first embodiment of the invention. Referring to FIG. 4, an OLED display 400 includes a data driver 420, a scan driver 430, a number of data lines 402, power supply lines 404, scan lines 406, pixel areas 410, cathode electrodes 408, V_{SS} 440a and

440b, metal layers **450a**, **450b**, **450c** and **450d**, and contact holes **460a**, **460b**, **460c** and **460d**.

[0038] Multiple data lines **402** and the scan lines **406** forms multiple pixels, each of which possess a pixel area **410**, respectively. All the pixel areas **410** together form a pixel area array **415**. The data driver **420** drives all the data lines **402** and provides the data lines **402** with data signals. The data lines **402** then transmit the data signals to the corresponding pixels. The scan driver **430** drives all the scan lines **406** and provides the scan lines **406** with scan signals. The scan lines **406** then transmit the scan signals to the corresponding pixels. Besides, the power supply lines **404** function as transmitting the power to the corresponding pixels. Each pixel generates different levels of brightness according to the level of voltage it receives.

[0039] The pixel area array **415** is surrounded by the metal layers **450a**, **450b**, **450c** and **450d**, which are respectively at the upper side, right side, bottom side, and left side of the pixel area array **415**. The V_{SS} **440a** and **440b** are set at both sides of the scan driver circuit **430** and electrically coupled to the metal layers **450a**, **450b**, **450c**, and **450d**.

[0040] The cathode electrodes **408** cover the pixel area array **415** and the metal layers **450a** and **450c** and cover partially the metal layers **450b** and **450d** in a direction parallel the scan lines **406**. Spaces **412** between each two cathode electrodes **408** are above the scan lines **406**. The cathode electrode **408** can be electrically coupled to the V_{SS} **440a** and **440b** by being electrically coupled to the metal layers **450a**, **450b**, **450c**, and **450d** through the contact holes **460a**, **460b**, **460c**, and **460d**.

[0041] The cathode electrodes **408** can effectively reduce the parasitic capacitance between the cathode electrodes **408** and the scan lines **406** so that the scan signal delay of the scan lines **406** is prevented.

EXAMPLE 2

[0042] FIG. 5 is a schematic diagram illustrating a circuit configuration of an OLED display according to the preferred embodiment of the invention. Referring to FIG. 5, the OLED display **500** differs from the OLED display **400** shown in FIG. 4 in that the cathode electrodes **508** cover the pixel area array **415** and the metal layers **450b** and **450d** and partly cover the metal layers **450a** and **450c** in a direction parallel to the data lines **402**. There is a space **512** between each two cathode electrodes **508**, and each space **512** is above the data lines **402** and the power supply lines **404**. The cathode electrode **508** can be electrically coupled to the V_{SS} **440a** and **440b** by being electrically coupled to the metal layers **450a**, **450b**, **450c**, and **450d** through the contact holes **460a**, **460b**, **460c**, and **460d**.

[0043] The cathode electrodes **508** can reduce the parasitic capacitance between the cathode electrodes **508** and the data lines **402** so that the data signals delay of the data lines **402** is prevented.

EXAMPLE 3

[0044] FIG. 6 is a schematic diagram illustrating a circuit configuration of an OLED display according to the third embodiment of the invention. Referring to FIG. 6, the OLED display **600** differs from the OLED display **400** shown in FIG. 4 in that the cathode electrodes **608** cover the

pixel area array **415** and the metal layers **450a** and **450c** and partially cover the metal layers **450b** and **450d** in a direction parallel to the scan lines **406**. There is a space **612** between each two cathode electrodes **608**, and each space **612** is above the scan lines **406**. The cathode electrodes **608** further includes a number of recesses **614**. The recesses **614** are adjacent to the spaces **612** and above the data lines **402**, or the power supply lines **404**. Consequently, the cathode electrodes **608** cover less than 90% of the data lines **402** and also the power supply lines **404**. Besides, the cathode electrode **608** can be electrically coupled to the V_{SS} **440a** and **440b** by being electrically coupled to the metal layers **450a**, **450b**, **450c**, and **450d** through the contact holes **460a**, **460b**, **460c**, and **460d**.

[0045] The cathode electrodes **608** can effectively reduce the parasitic capacitance between the cathode electrodes **608** and the scan lines **406** and part of the parasitic capacitance between the cathode electrodes **608** and the data lines **402** so that the scan signals and the data signals delay are reduced.

EXAMPLE 4

[0046] FIG. 7 is a schematic diagram illustrating a circuit configuration of an OLED display according to the fourth embodiment of the invention. Referring to FIG. 7, the OLED display **700** differs from the OLED display **500** shown in FIG. 5 in that the cathode electrodes **708** cover the pixel area array **415** and the metal layers **450b** and **450d** and partially cover the metal layers **450a** and **450c** in a direction parallel to the data lines **402**. There is a space **712** between each two cathode electrodes **708**, and each space **712** is above the data lines **402** or the power supply lines **404**. The cathode electrodes **708** further include a number of recesses **714**. The recesses **714** are adjacent to the spaces **712** and above the scan lines **406**. Consequently, the cathode electrodes **708** cover less than 90% of the scan lines **406**. Besides, the cathode electrode **708** can be electrically coupled to the V_{SS} **440a** and **440b** by being electrically coupled to the metal layers **450a**, **450b**, **450c**, and **450d** through the contact holes **460a**, **460b**, **460c**, and **460d**.

[0047] The cathode electrodes **708** can effectively reduce the parasitic capacitance between the cathode electrodes **708** and the data lines **402** and part of the parasitic capacitance between the cathode electrodes **708** and the scan lines **406** so that the scan signals and the data signals delay are reduced.

EXAMPLE 5

[0048] FIG. 8 is a schematic diagram illustrating a circuit configuration of an OLED display according to the fifth embodiment of the invention. Referring to FIG. 8, the cathode electrode **808** of the OLED display **800** covers mostly but not thoroughly the pixel area array **415** and the metal layers **450a**, **450b**, **450c** and **450d**. The scan lines **406** do not substantially cross the data lines **402** and the power supply lines **404**. However, in order to describe the layout of the cathode electrodes, where the data lines **402** cross the power supply lines **404**, and the scan lines **406**, from a top view, are defined as "projective crosses", herein. A number of openings **812**, preferably in the shape of a cross, are approximately above the projective crosses. Therefore, the cathode electrodes **708** cover less than 90% of the data lines **402**, the power supply lines **404** and also the scan lines **406**.

Besides, the cathode electrode **808** can be electrically coupled to the V_{SS} **440a** and **440b** by being electrically coupled to the metal layers **450a**, **450b**, **450c**, and **450d** through the contact holes **460a**, **460b**, **460c**, and **460d**.

[0049] The layout of the cathode electrodes **808** according to the fifth embodiment, can effectively reduce part of the parasitic capacitance between the cathode electrodes **708** and the data lines **402** and part of the parasitic capacitance between the cathode electrodes **708** and the scan lines **406** so that the scan signals and the data signals delay are reduced.

[0050] However, the present inventions are not just limited in what are described above. For example, the cathode electrodes **408**, **508**, **608**, **708**, and **808** can be fabricated by using a shadow mask, by etching, lifting off, or patterning in the OLED display **400**, **500**, **600**, **700**, and **800** individually.

[0051] With the above configurations of diminishing the cover area of the cathode electrodes above scan lines or data lines, the parasitic capacitance between the cathode electrodes and the scan lines or the data lines is effectively reduced. The data signals delay and the scan signals delay reduce as the parasitic capacitance decreases. The power supply inefficiency and cross talk problems are resolved, and the capacitive losses power of the OLED display is thus improved.

[0052] While the invention has been described by way of examples and in terms of a preferred embodiment, it is to be understood that the invention is not limited thereto. On the contrary, it is intended to cover various modifications and similar arrangements and procedures, and the scope of the appended claims therefore should be accorded the broadest interpretation so as to encompass all such modifications and similar arrangements and procedures.

What is claimed is:

1. An organic light emitting diode (OLED) display, at least comprising:

a plurality of data lines;

a plurality of scan lines perpendicular to the data lines, wherein the scan lines and the data lines define a plurality of pixels, each of the pixels has a pixel area and the pixel areas form a pixel area array; and

a plurality of cathode electrodes parallel to the scan lines or the data lines and covering the pixel area array, wherein there is a space between each two said cathode electrodes and said space is above the scan lines or the data lines.

2. The OLED display of claim 1, wherein the cathode electrodes are electrically coupled to a voltage V_{SS} through at least a contact hole and a metal layer.

3. The OLED display of claim 1, wherein the cathode electrodes are fabricated by using a shadow mask.

4. The OLED display of claim 1, wherein the cathode electrodes are fabricated by etching.

5. The OLED display of claim 1, wherein the cathode electrodes are fabricated by lifting off.

6. The OLED display of claim 1, wherein the cathode electrodes are fabricated by patterning.

7. An organic light emitting diode (OLED) display, at least comprising:

a plurality of data lines;

a plurality of scan lines perpendicular to the data lines, wherein the scan lines and the data lines define a plurality of pixels, each of the pixels has a pixel area and the pixel areas form a pixel area array; and

a plurality of cathode electrodes parallel to the scan lines or the data lines and covering the pixel area array, wherein there is a space between each two said cathode electrodes and said space is above the scan lines or the data lines, and the cathode electrodes further comprise a plurality of recesses, which are adjacent to the spaces and above the scan lines or the data lines.

8. The OLED display of claim 7, wherein, from a top view, the cathode electrodes cover less than 90% of the data lines if the cathode electrodes are parallel to the scan lines, but the cathode electrodes cover less than 90% of the scan lines if the cathode electrodes are parallel to the data lines.

9. The OLED display of claim 7, wherein the cathode electrodes are electrically coupled to a voltage V_{SS} through at least a contact hole and a metal layer.

10. The OLED display of claim 7, wherein the cathode electrodes are fabricated by using a shadow mask.

11. The OLED display of claim 7, wherein the cathode electrodes are fabricated by etching.

12. The OLED display of claim 7, wherein the cathode electrodes are fabricated by lifting off.

13. The OLED display of claim 7, wherein the cathode electrodes are fabricated by patterning.

14. An organic light emitting diode (OLED) display, at least comprising:

a plurality of data lines;

a plurality of scan lines perpendicular to the data lines to form a plurality of pixel area respectively and all the pixels areas form a pixel area array, wherein, from a top view, where the scan lines and the data lines crosses are defined as projective crosses; and

a cathode electrode covering partially the pixel area array and possessing a plurality of openings, wherein the openings are above the projective crosses or above the scan lines and the data lines and away from the projective crosses, respectively.

15. The OLED display of claim 14, wherein the openings are in the shape of a cross and are above the projective crosses.

16. The OLED display of claim 14, wherein the openings are in the shape of a stripe and are away from the projective crosses.

17. The OLED display of claim 14, wherein the cathode electrode covers less than 90% of the scan lines and covers less than 90% of the data lines.

18. The OLED display of claim 14, wherein the cathode electrodes are electrically coupled to a voltage V_{SS} through at least a contact hole and a metal layer.

19. The OLED display of claim 14, wherein the cathode electrodes are fabricated by etching.

20. The OLED display of claim 14, wherein the cathode electrodes are fabricated by lifting off.

21. The OLED display of claim 14, wherein the cathode electrodes are fabricated by patterning.

专利名称(译)	有机发光二极管显示器		
公开(公告)号	US20040178719A1	公开(公告)日	2004-09-16
申请号	US10/417875	申请日	2003-04-17
[标]申请(专利权)人(译)	SUN WEIN TOWN		
申请(专利权)人(译)	SUN WEIN-TOWN		
当前申请(专利权)人(译)	友达光电.		
[标]发明人	SUN WEIN TOWN		
发明人	SUN, WEIN-TOWN		
IPC分类号	H01L27/32 H01L33/00 H01L51/52 H05B33/00 H05B33/02		
CPC分类号	H01L27/3244 H01L51/5221 H01L27/3276		
优先权	092105134 2003-03-10 TW		
其他公开文献	US7079093		
外部链接	Espacenet USPTO		

摘要(译)

有机发光二极管显示装置包括多条数据线，扫描线和阴极电极。这些扫描线垂直于数据线以形成多个像素，每个像素分别具有像素区域。所有像素区域形成像素区域阵列。这些阴极电极与扫描线或数据线平行，并部分覆盖像素区域阵列。每两个阴极电极之间的空间位于扫描线或数据线之上，以避免阴极电极和扫描线或数据线之间的寄生电容。因此防止了电阻电容时间延迟。

