



(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2004/0245922 A1**
Ohshita et al. (43) **Pub. Date: Dec. 9, 2004**

(54) **ORGANIC ELECTROLUMINESCENT DISPLAY PANEL AND METHOD OF MANUFACTURING THE SAME**

(30) **Foreign Application Priority Data**

Feb. 22, 2000 (JP) P. 2000-044629

Mar. 23, 2000 (JP) P. 2000-081931

(75) Inventors: **Isamu Ohshita**, Yamagata (JP); **Ryuji Murayama**, Yamagata (JP)

Publication Classification

Correspondence Address:
SUGHRUE MION, PLLC
2100 PENNSYLVANIA AVENUE, N.W.
SUITE 800
WASHINGTON, DC 20037 (US)

(51) **Int. Cl.⁷** **H05B 33/14**; H05B 33/26;
H05B 33/00

(52) **U.S. Cl.** **313/504**; 313/503; 313/506

(73) Assignee: **TOHOKU PIONEER CORPORATION**

(57) **ABSTRACT**

(21) Appl. No.: **10/882,169**

A method of manufacturing an organic electroluminescent display panel includes the steps of: forming first electrodes on the substrate; forming organic layers by deposition; forming different light emitting layers for different luminous colors in desired areas; and forming second electrodes; wherein the organic layers are formed by an angle deposition method which performs deposition at more than a predetermined angle to the normal of the substrate.

(22) Filed: **Jul. 2, 2004**

Related U.S. Application Data

(62) Division of application No. 09/789,586, filed on Feb. 22, 2001.

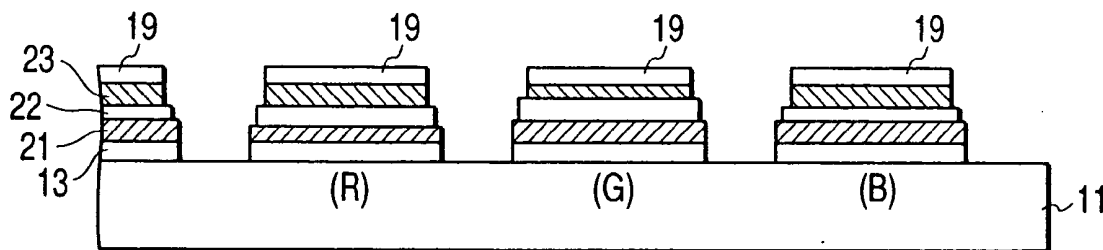


FIG. 1

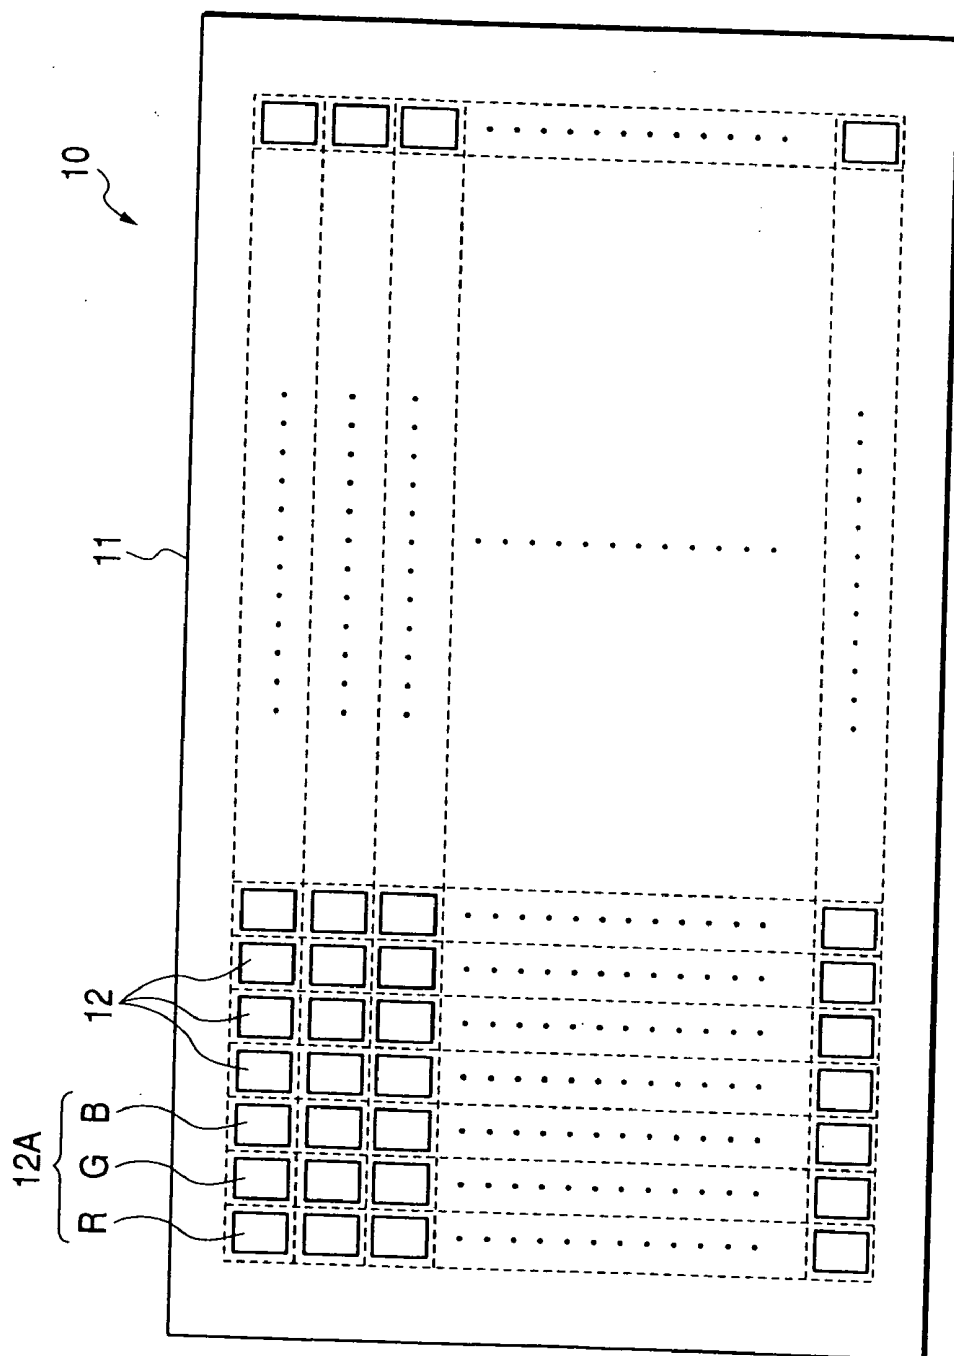


FIG. 2

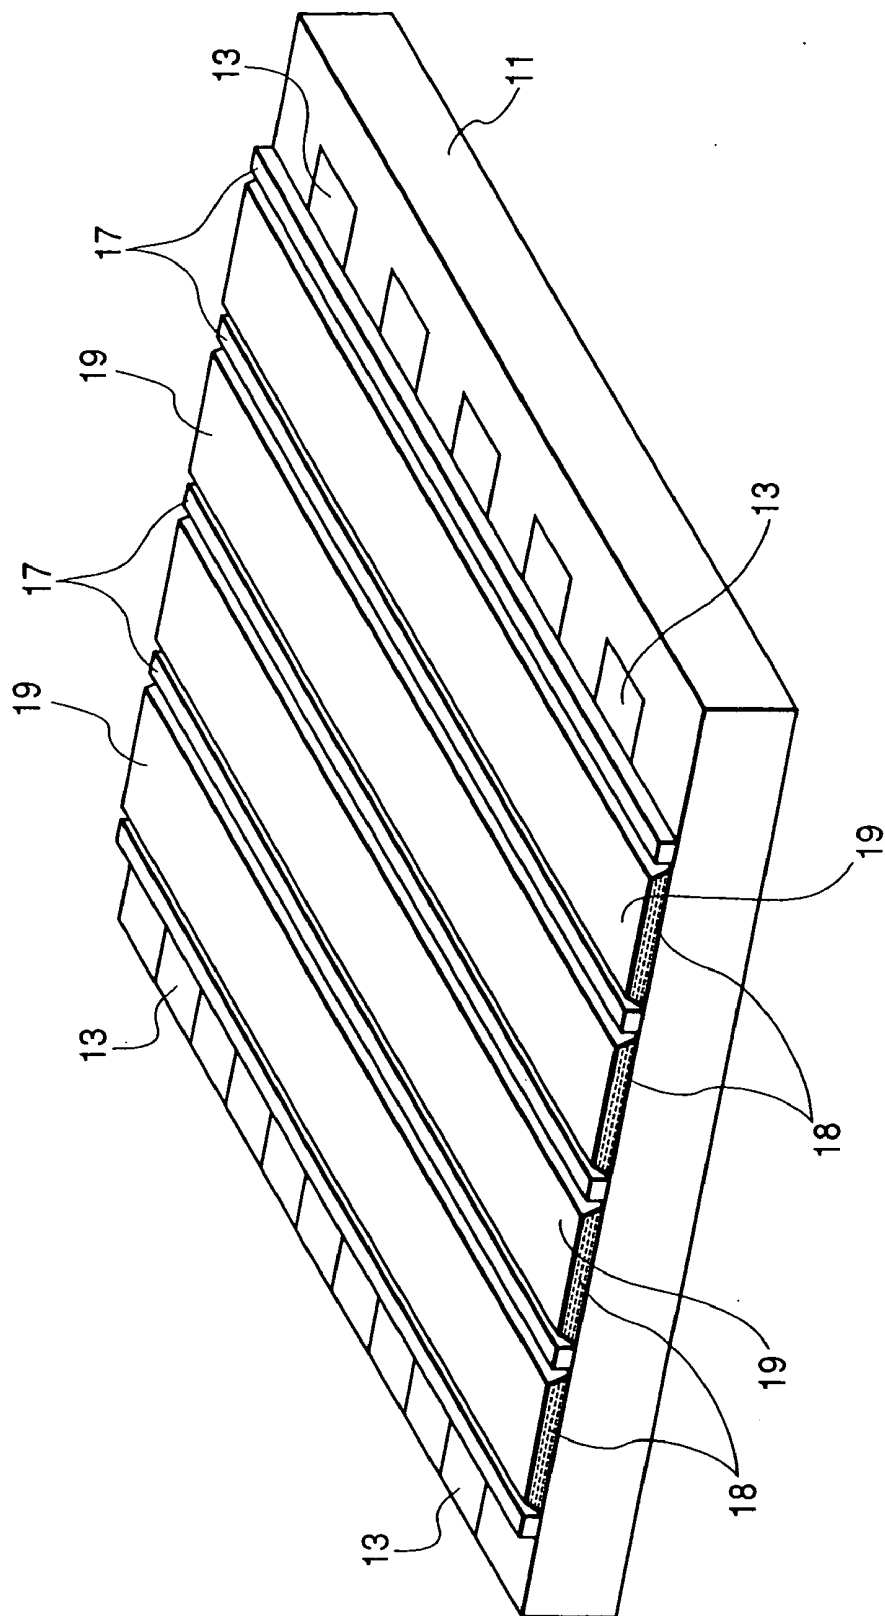


FIG. 3

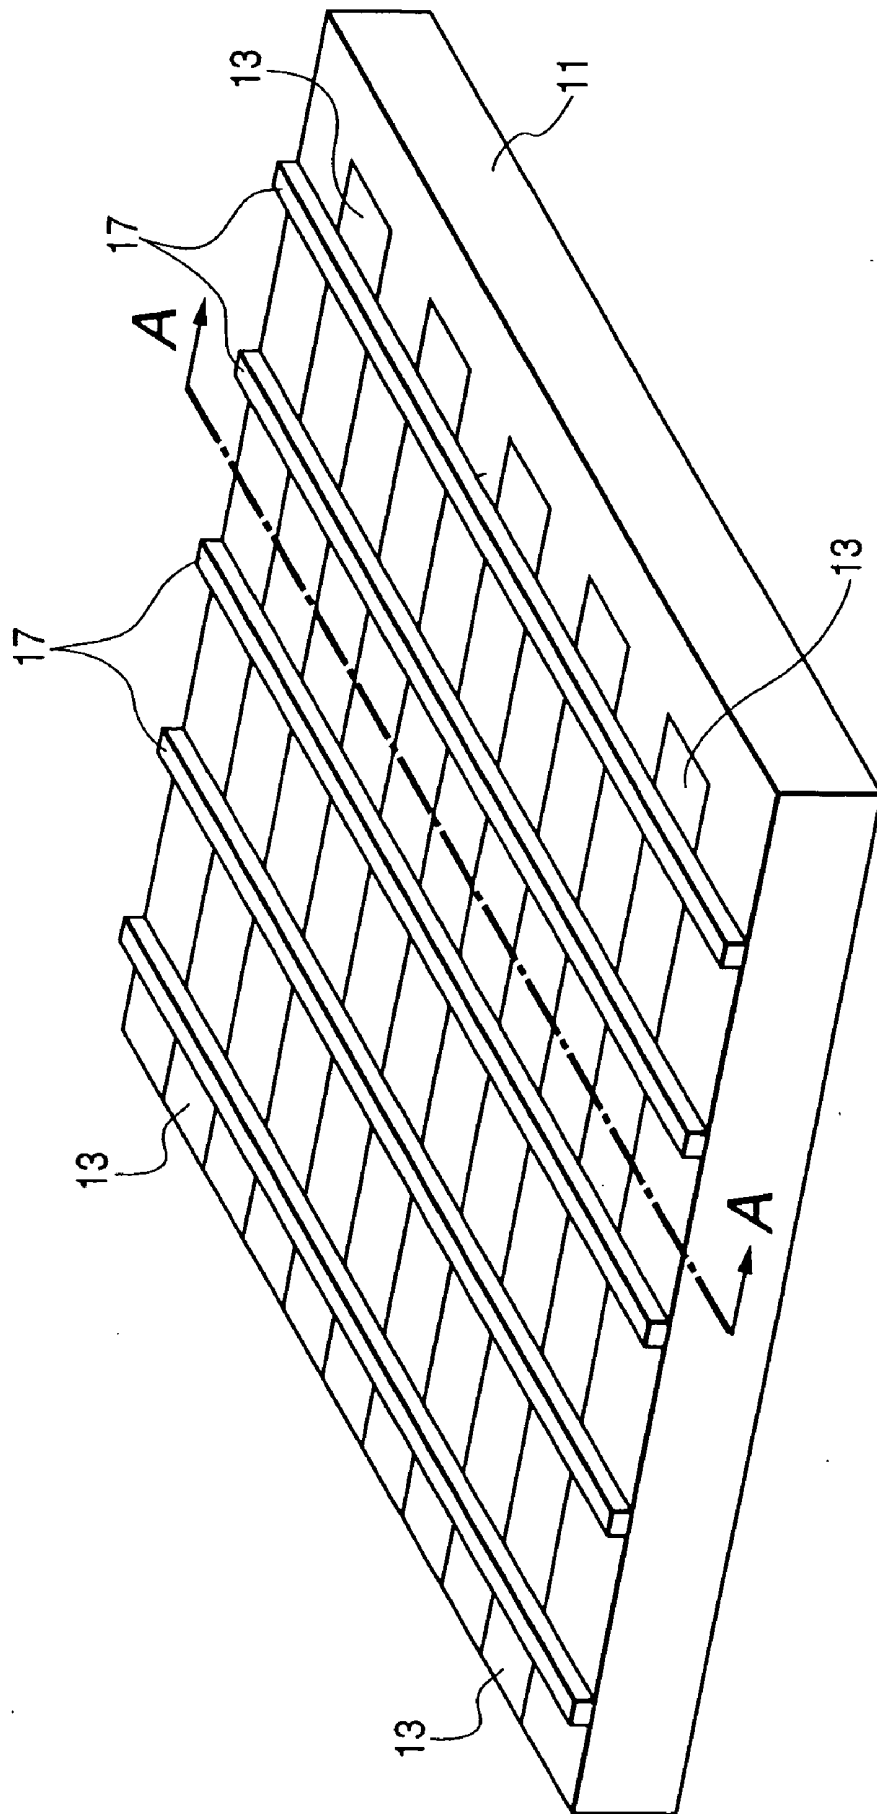


FIG. 4A

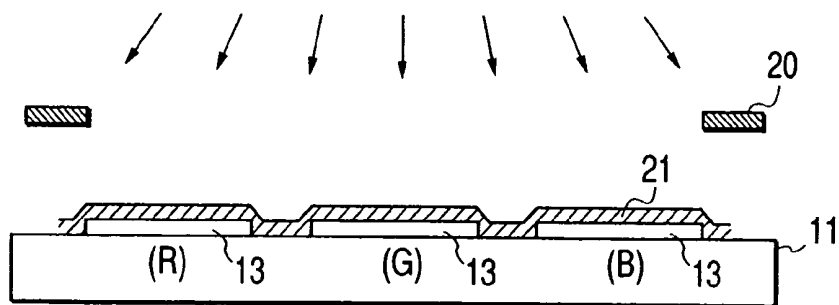


FIG. 4B

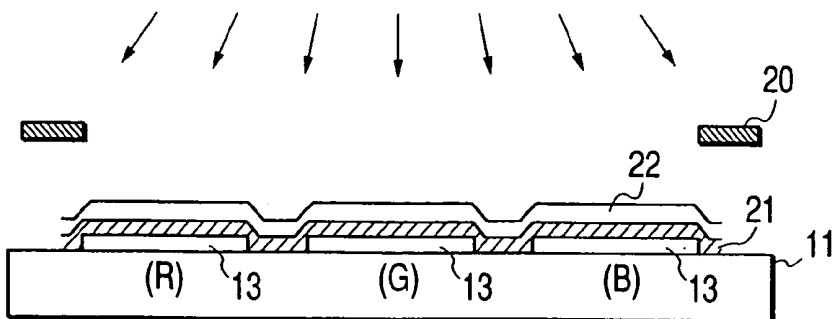


FIG. 5A

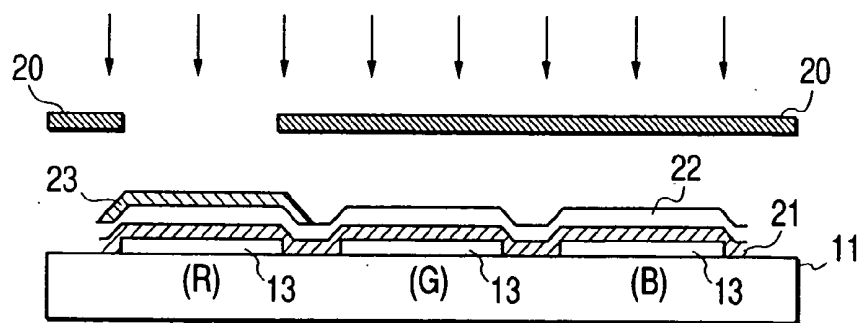


FIG. 5B

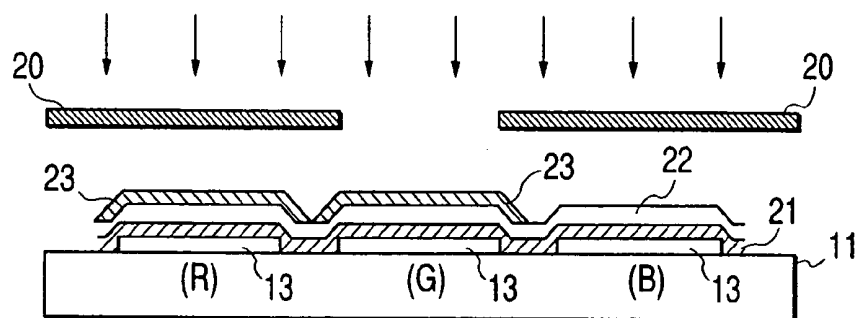


FIG. 5C

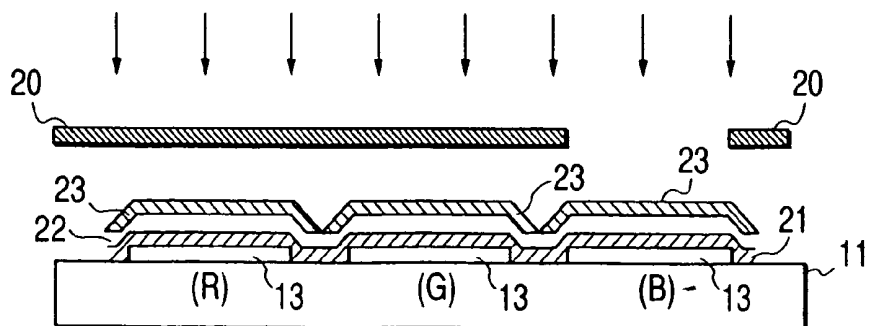


FIG. 6A

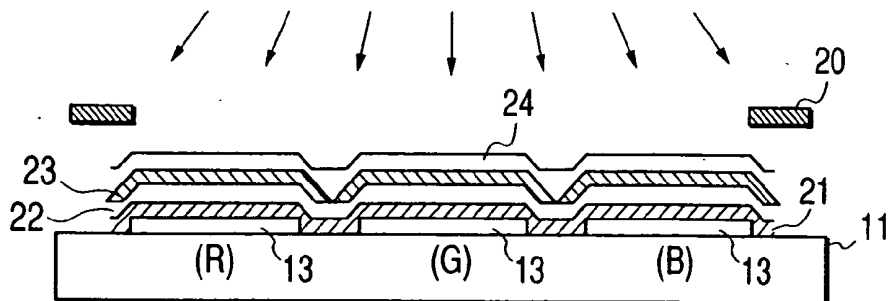


FIG. 6B

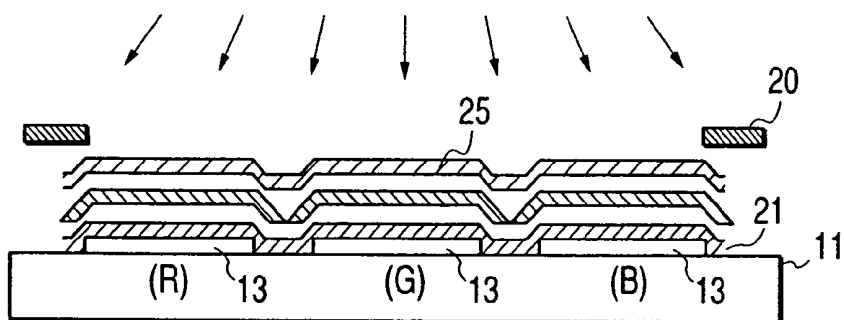


FIG. 6C

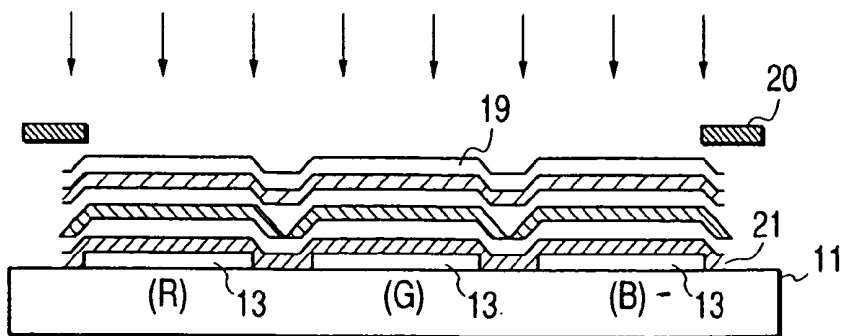


FIG. 7A

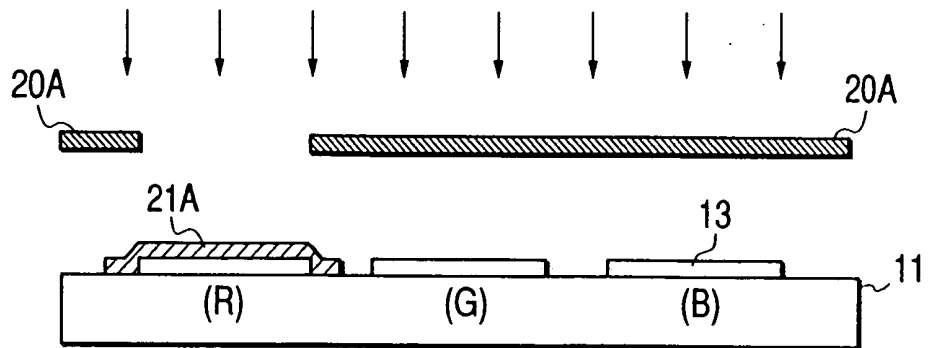


FIG. 7B

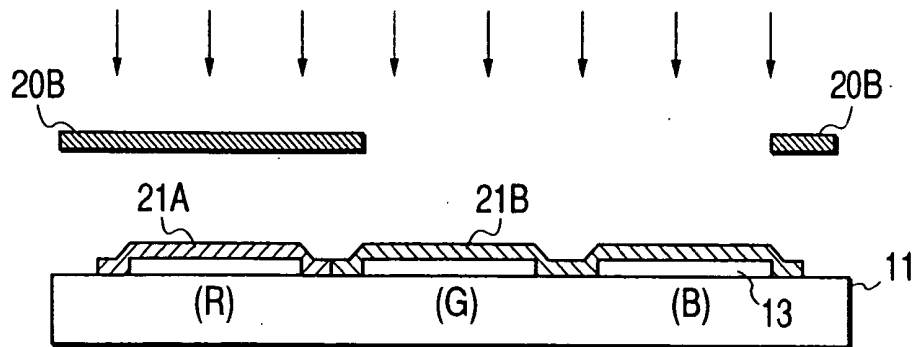


FIG. 8

PROCESS	LAYER NO.	ORGANIC EL MEDIUM LAYER	FILM THICKNESS (nm)		
			R	G	B
1-2	21A	HOLE TRANSPORT LAYER (DIFFERENCE)	0	20	50
3	21B	HOLE TRANSPORT LAYER (COMMON)	50		
4	22A	LIGHT EMITTING LAYER (R)	d(R)	—	—
5	22B	LIGHT EMITTING LAYER (G)	—	d(G)	—
6	22C	LIGHT EMITTING LAYER (B)	—	—	d(B)
7-8	23A	ELECTRON TRANSPORT LAYER (DIFFERENCE)	60	0	30
9	23B	ELECTRON TRANSPORT LAYER (COMMON)	20		

FIG. 9A

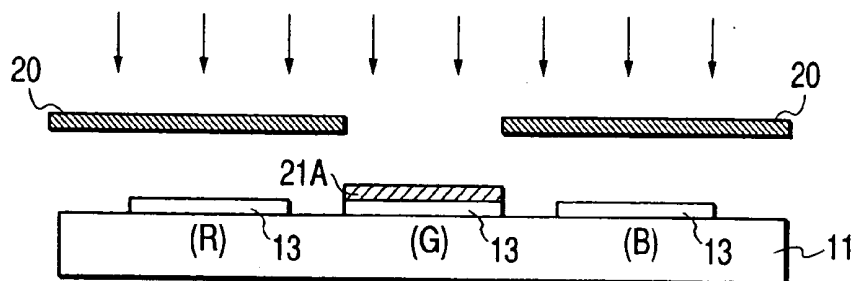


FIG. 9B

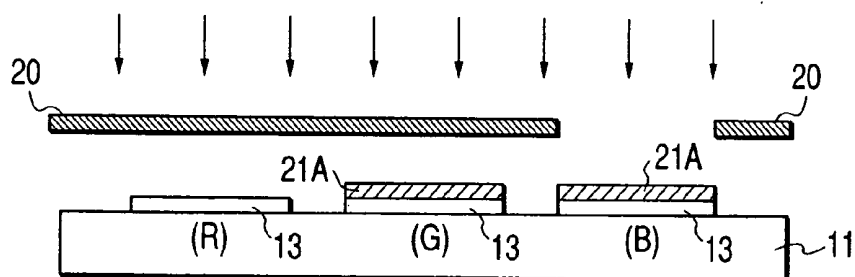


FIG. 9C

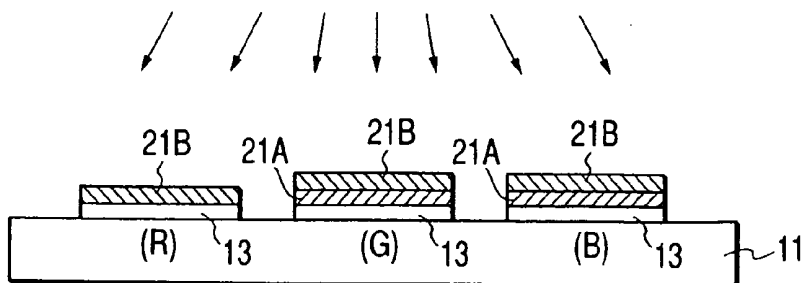


FIG. 10A

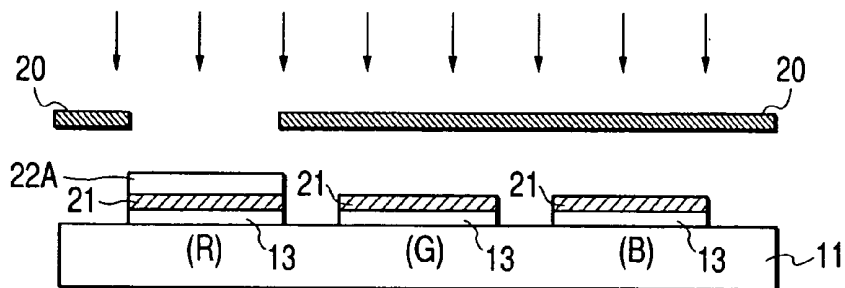


FIG. 10B

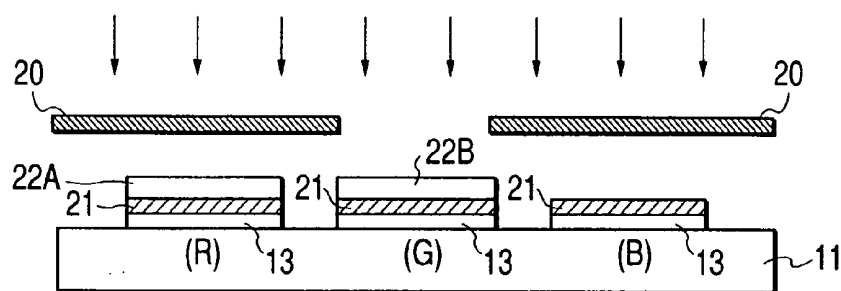


FIG. 10C

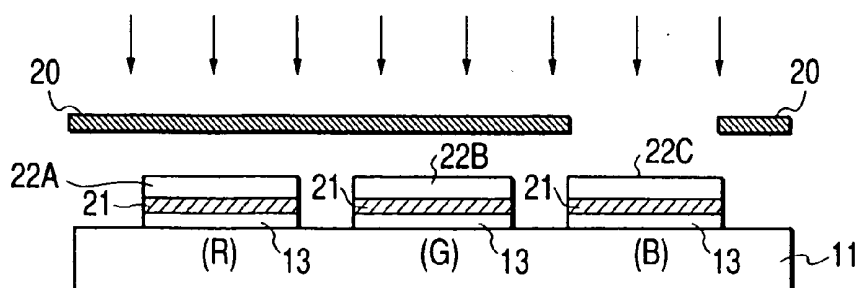


FIG. 11A

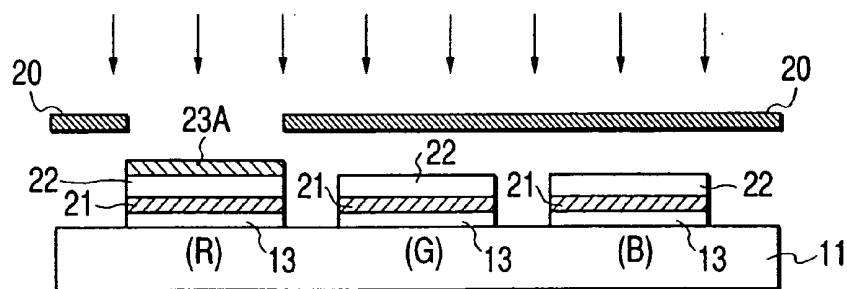


FIG. 11B

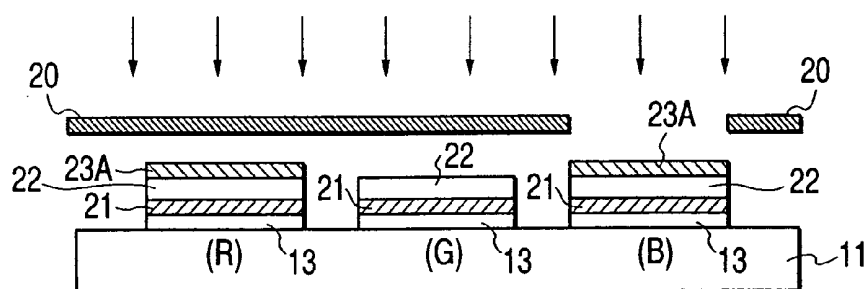


FIG. 11C


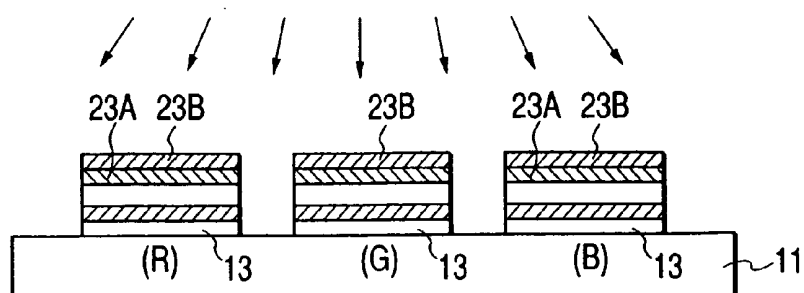


FIG. 12

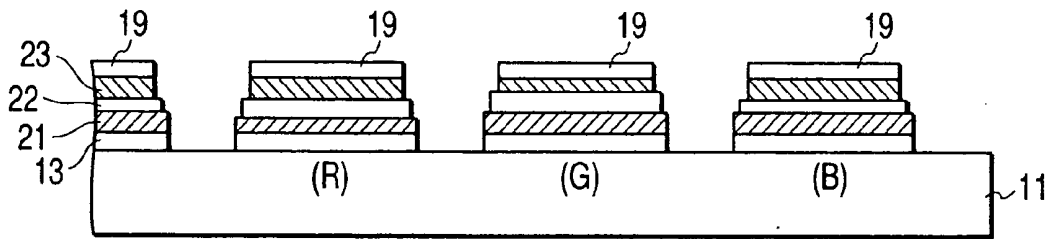

**ORGANIC ELECTROLUMINESCENT DISPLAY
PANEL AND METHOD OF MANUFACTURING
THE SAME**

[0001] This is a divisional of application Ser. No. 09/789, 586 filed Feb. 22, 2001; the disclosure of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a display panel using organic electroluminescence-devices (hereafter referred to as organic EL devices) and a method of manufacturing the display panel, and more particularly to an organic EL color display panel having light emitting portions in a plurality of luminous colors and to a method of manufacturing the organic EL color display panel.

[0004] 2. Description of the Related Art

[0005] There have been disclosed conventional organic EL display panels, for example, in JP-A 8-315981, 10-312886 and 11-194585.

[0006] In such organic EL display panels, during the process of making an organic EL display panel, it is generally difficult to pattern organic EL medium layers or electrode layers after forming the organic EL medium layers because of low heat resistance, low solvent resistance and low humidity resistance of the organic EL medium used in charge injection layers and light emitting layers. For example, when the photolithography generally used to pattern thin films is used for the patterning in the organic EL display panel, a problem arises that the organic EL device characteristics are degraded by infiltration of solvent into photoresist, by a high-temperature ambient gas during baking of photoresist, by infiltration of photoresist development liquid into the devices, or by damages to devices by plasma during dry etching.

[0007] Other examples of the patterning method include a vapor deposition method that uses a mask to pattern the organic EL medium layers and electrode layers. However, because of the wraparound of vapor that may occur in gaps between the mask and the substrate and the shadowing caused by projections and debris, the coverage of the organic EL medium may become insufficient. This in turn causes characteristic degradations during the operation of the organic EL display panel, such as current leakage and poor emission of light, which stand in the way of performance enhancement of the organic EL display panel.

[0008] Also, in the conventional full color organic EL display panel, when the same organic EL material is used commonly for the organic EL medium layers of different luminous colors, the layers are formed under the same conditions irrespective of the colors. Hence, the light emitting characteristics of the individual light emitting portions cannot be optimized according to the colors, which is detrimental to enhancing the performance of the full color organic EL display panel.

SUMMARY OF THE INVENTION

[0009] The present invention has been accomplished under these circumstances to provide a high performance organic EL display panel and a method of manufacturing such a display panel.

[0010] In order to achieve the above object, according to one aspect of the invention, there is provided a method of manufacturing an organic electroluminescent display panel having light emitting portions in a plurality of luminous colors formed on a substrate, the method comprising: a step of forming first electrodes on the substrate; an organic layer forming step of forming organic layers by deposition; a light emitting layer forming step of forming different light emitting layers for different luminous colors in desired areas; and a step of forming second electrodes; wherein in the organic layer forming step, the organic layers are formed by an angle deposition method.

[0011] According to the present invention, there is provided a method of manufacturing an organic electroluminescent display panel having light emitting portions in a plurality of luminous colors formed on a substrate, the method comprising: a step of forming first electrodes on the substrate; a first organic layer forming step of simultaneously forming same first organic layers common to all the luminous colors in light emitting areas by deposition; a second organic layer forming step of forming different second organic layers for different luminous colors in desired areas by deposition; a light emitting layer forming step of forming different light emitting layers for different luminous colors in desired areas; and a step of forming second electrodes; wherein the first organic layers are formed by an angle deposition method and the second organic layers are deposited at a deposition angle smaller than that of the angle deposition method.

[0012] According to the present invention, there is provided an organic electroluminescent display panel having light emitting portions in a plurality of luminous colors formed on a substrate; the display panel comprising: first electrodes formed on the substrate; organic layers formed by deposition; light emitting layers formed in desired areas according to the luminous colors; and second electrodes; wherein the organic layers are formed by an angle deposition method.

[0013] According to the present invention, there is provided an organic electroluminescent display panel having light emitting portions in a plurality of luminous colors formed on a substrate; the display panel comprising: first electrodes formed on the substrate; first organic layers formed in light emitting areas at one time by deposition; second organic layers formed in desired areas and being different among different luminous colors; and second electrodes; wherein the first organic layers are formed by an angle deposition method and the second organic layers are deposited at a deposition angle smaller than that of the angle deposition method.

[0014] According to another aspect of the present invention, there is provided a method of manufacturing an organic electroluminescent display panel having light emitting portions in a plurality of luminous colors formed on a substrate, the method comprising: a step of forming first electrodes on the substrate; an organic layer forming step of forming organic layers in associated light emitting areas, the organic layers having different thicknesses for different luminous colors; a light emitting layer forming step of forming light emitting layers for different luminous colors in the associated light emitting areas; and a step of forming second electrodes.

[0015] According to the present invention, there is provided a method of manufacturing an organic electroluminescent display panel having light emitting portions in a plurality of luminous colors formed on a substrate, the method comprising: a step of forming first electrodes on the substrate; a first organic layer forming step of forming organic layers in associated light emitting areas on the substrate on which the first electrodes were formed, the organic layers having different thicknesses for different luminous colors; a light emitting layer forming step of forming light emitting layers for different luminous colors in the associated light emitting areas after performing the first organic layer forming step; and a step of forming second electrodes after performing the light emitting layer forming step.

[0016] According to the present invention, there is provided an organic electroluminescent display panel having light emitting portions in a plurality of luminous colors formed on a substrate; the display panel comprising: first electrodes formed on the substrate; first organic layers having different thicknesses for different luminous colors in associated light emitting areas on the substrate on which the first electrodes were formed; light emitting layers formed on the first organic layers on the light emitting areas corresponding to the different luminous colors; and second electrodes formed on the light emitting layers.

BRIEF DESCRIPTION OF THE-DRAWINGS

[0017] FIG. 1 is a plan view schematically showing an example array of luminous pixels on a full color organic EL display panel according to a first embodiment of this invention;

[0018] FIG. 2 is a perspective view schematically showing a part of the organic EL display panel;

[0019] FIG. 3 is a perspective view schematically showing a process of making films in the organic EL display panel according to the embodiment of the invention;

[0020] FIGS. 4A and 4B are cross sections showing a process of forming hole injection layers and hole transport layers in the organic EL display panel according to the first embodiment of the invention;

[0021] FIGS. 5A to 5C are cross sections showing a process of forming light emitting layers in the organic EL display panel according to the first embodiment of the invention;

[0022] FIGS. 6A to 6C are cross sections showing a process of forming electron transport layers and electron injection layers in the organic EL display panel according to the first embodiment of the invention;

[0023] FIGS. 7A and 7B are cross sections showing a process of forming hole transport layers in the organic EL display panel according to a second embodiment of the invention;

[0024] FIG. 8 is a table showing the process of forming organic EL medium layers in the organic EL display panel according to a third embodiment of the invention;

[0025] FIGS. 9A to 9C are cross sections showing the process of manufacturing an organic EL display panel according to the third embodiment of the invention;

[0026] FIGS. 10A to 10C are cross sections showing the process of manufacturing an organic EL display panel according to the third embodiment of the invention;

[0027] FIGS. 11A to 11C are cross sections showing the process of manufacturing an organic EL display panel according to the third embodiment of the invention; and

[0028] FIG. 12 is a cross section of an organic EL display panel as the third embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0029] Embodiments of the organic EL display panel and of the method of manufacture thereof will be described in detail by referring to the accompanying drawings. In the drawings elements that are virtually identical are assigned like reference numerals.

[0030] (First Embodiment)

[0031] FIG. 1 is a plan view schematically showing an example array of luminous pixels on a full color organic EL display panel 10 as a first embodiment of this invention. As shown in the figure, the organic EL display panel-10 has an image display array made up of a plurality of luminous pixels 12A each consisting of red (R), green (G) and blue (B) light emitting portions 12.

[0032] FIG. 2 is a perspective view schematically showing a part of the organic EL display panel 10. As shown in the figure, in the organic EL display panel 10 first electrodes 13. (anodes) made of indium-tin oxide film (hereafter referred to as an ITO film) are arranged on the transparent substrate 11 made of, for example, glass. The first electrodes 13 are arrayed in a plurality of parallel stripes. A plurality of insulating separation walls 17 projecting from the substrate 11 are formed over the substrate 11 and the first electrodes 13 so that they are perpendicular to the first electrodes 13. That is, the separation walls 17 are formed to expose parts of the first electrodes 13.

[0033] In areas between the separation walls 17, at least one layer of an organic EL medium layer 18 is formed over the first electrodes 13. For example, the organic EL medium layer 18 is a single layer of organic EL luminous layer, or includes in addition to the organic EL luminous layer an organic hole injection layer, an organic hole transport layer, an organic electron transport layer or an organic electron injection layer.

[0034] Over the organic EL medium layers 18 are formed second electrodes 19 (cathodes) that extend along the lengths of the organic EL medium layers 18. Portions sandwiched between the crossing first electrodes 13 and second electrodes 19 correspond to the light emitting portions. The adjacent second electrodes 19 on the organic EL medium layers 18 are electrically isolated from each other by the separation walls 17 to prevent the second electrodes from becoming shorted. Hence, as shown in FIG. 2, the separation walls 17 are preferably formed in an overhang shape such as an inverted taper and T-letter shape.

[0035] Over the second electrodes 19 of the passive-matrix organic EL display panel 10, a protective film or protective substrate (not shown) may be formed. In the organic EL display panel 10, because the substrate 11 and the first electrodes 13 are transparent and the luminescent

light is emitted from the substrate side, a reflection film (not shown) is preferably provided on the second electrodes **19** with or without a protective film interposed in order to enhance the luminous efficiency of the organic EL display panel **10**. It is also possible to form the second electrodes **19** from a transparent material contrary to the above-described organic EL display panel **10** and emit luminescent light from the second electrode side. In that case, to increase the luminous efficiency a reflection film is preferably provided on the outer side of the first electrodes **13**.

[0036] A process of manufacturing the organic EL display panel **10** will be described below. First, as shown in **FIG. 3**, a plurality of conductive transparent films of ITO or the like in stripes are formed as first electrodes **13** (anodes) over a transparent substrate **11** such as glass. The conductive transparent films may be patterned using the photolithography, for example. Next, the separation walls **17** of an inverted taper shape are formed. The separation walls **17** are formed of an insulating material such as photoresist by using the photolithography, dry etching or wet etching.

[0037] With the first electrodes **13** and the separation walls **17** formed, the organic EL medium layers **18** and the second electrodes **19** are formed. In the following, the process of forming the organic EL medium layers **18** will be explained in the order of a hole injection layer, a hole transport layer, a light emitting layer, an electron transport layer and an electron injection layer, all making up the organic EL medium layers **18**.

[0038] **FIGS. 4A to 4C** are cross sections taken along the line A-A through the color organic EL display panel **10** of **FIG. 3**, showing the process of making the hole injection layer **21** and the hole transport layer **22**. First, as shown in **FIG. 4A**, the hole injection layer **21** is formed to a predetermined thickness by a vapor deposition method using a mask **20**. In this process, an angle vapor deposition method, in which a vapor flow is at more than a predetermined angle to the normal of the substrate **11**, is used to ensure that the vapor material wraps around to provide a satisfactory coverage. The deposition angle in the angle vapor deposition method can be achieved by adjusting the positional relations, such as distance and angle, between the substrate **11** and the vapor source. It is also possible to combine the above deposition method with additional methods of mounting the substrate in a tilted position and of rotating the substrate on its axis and around an orbit.

[0039] After the hole injection layer **21** is formed, the hole transport layer **22** is deposited to a predetermined thickness as shown in **FIG. 4B**. In the process of forming the hole transport layer **22**, too, the angle vapor deposition is performed to provide a satisfactory coverage, as in the case with the hole injection layer **21**.

[0040] Next, as shown in **FIGS. 5A to 5C**, by using the mask **20**, organic materials for RGB light emitting layers are selectively deposited over the associated light emitting areas on the substrate **11** on which the hole injection layer **21** and the hole transport layer **22** were formed. First, the mask **20** is positioned and set to align its opening with the light emitting area corresponding to a red light emitting portion (R), as shown in **FIG. 5A**. Then a red luminous organic material is deposited to a predetermined thickness to form a red light emitting layer **23**. In this process, unlike the process of depositing the hole injection layer **21** and the hole

transport layer **22**, the deposition is performed at less than a predetermined angle to the normal of the substrate **11** to prevent unwanted wraparound of vapor material. This deposition angle may be determined according to the conditions, such as presence or absence of the separation walls **17**, height or taper angle of the separation walls **17**, and wrap-around margin of vapor. The direction of deposition may be set nearly perpendicular to the substrate **11**.

[0041] After the red light emitting layer **23** is formed, the opening of the mask **20** is positioned and aligned with the light emitting area corresponding to the green light emitting portion (G). Then a green luminous organic material is deposited to a predetermined-thickness to form a green light emitting layer **23**, as shown in **FIG. 5B**. In this process, as with the red light emitting layer **23**, the deposition is performed at less than a predetermined angle. The predetermined thickness needs only to be appropriate for the green light emitting layer **23** and, though normally different from the thickness of the red light emitting layer **23**, maybe set equal to it. With the green light emitting layer **23** formed, the mask **20** is positioned and aligned as shown in **FIGS. 5A to 5C** as in the case with the red and green light emitting layers **23**, and a blue light emitting layer **23** is formed to a predetermined thickness. This predetermined thickness needs only to be appropriate for the blue light emitting layer **23**.

[0042] After the RGB light emitting layers **23** are formed, the electron transport layer **24** and the electron injection layer **25** are formed successively. As shown in **FIG. 6A**, the electron transport layer **24** is first deposited to a predetermined thickness. In this process, the angle deposition is employed, as in the case with the hole injection layer **21** and the hole transport layer **22**, to obtain a satisfactory coverage. After the electron transport layer **24** is formed, the electron injection layer **25** is deposited to a predetermined thickness, as shown in **FIG. 6B**. In this case, too, the angle deposition is performed to ensure a sufficient coverage.

[0043] Next, second electrodes (cathodes) are formed over the substrate that is already formed with the above-described organic medium layers. The second electrodes may be formed by depositing, for example, aluminum (Al) to a predetermined thickness by a resistance heating method. In the process of forming the second electrodes, the deposition is performed at less than a predetermined angle to the normal of the substrate **11**, for example in an almost vertical direction with respect to the substrate **11**, to avoid electric short-circuits caused by vapor wraparound.

[0044] As described above, this invention can realize a high performance organic EL display panel without drawbacks such as vapor wraparound and insufficient coverage.

[0045] (Second Embodiment)

[0046] In the first embodiment described above, the organic medium layers except for the RGB light emitting layers **23** are formed simultaneously for all RGB light emitting areas in one deposition process, whereas in this embodiment the organic medium layers are formed under different conditions for different RGB light emitting areas.

[0047] **FIGS. 7A and 7B** are cross sections schematically showing the process of manufacturing the full color organic EL display panel **10** as a second embodiment of this invention. In the following we will explain about a case where the

hole transport layers **22A**, **22B** as the first organic EL medium layers are deposited over the substrate **11** already formed with the first electrodes **13** and the separation walls **17**.

[0048] First, as shown in **FIG. 7A**, the mask **20A** is positioned and set to align its opening with the light emitting area corresponding to the red light emitting portion (R) and then the hole transport layer **22A** is deposited to a predetermined thickness. The thickness, material and composition of the hole transport layer **22A** are preferably selected to be optimum for the red light emitting portion. To prevent the wraparound of vapor being deposited, the deposition is performed at less than a predetermined angle to the normal of the substrate **11**, for example in an almost vertical direction with respect to the substrate **11**.

[0049] Next, as shown in **FIG. 7B**, the mask **20B** is positioned and set to align its opening with the light emitting areas corresponding to the green light emitting portion (G) and the blue light emitting portion (B), and then the hole transport layer **22B** is deposited to a predetermined thickness. The thickness, material and composition of the hole transport layer **22B** are preferably selected to be optimum for the green and blue light emitting portions. The deposition is similarly performed at less than a predetermined angle to the normal of the substrate **11**, for example in an almost vertical direction with respect to the substrate **11**.

[0050] Further, the organic medium layers deposited over the green light emitting portion (G) and the blue light emitting portion (B) may be formed under different film making conditions. The film making method described above can also be applied to other organic medium layers.

[0051] As explained above, with the present invention it is possible to form the organic medium layers over different light emitting areas under different filmmaking conditions, thereby realizing a high performance organic EL display panel with no such problems as vapor wraparound and insufficient coverage.

[0052] In the above embodiments, an organic EL display panel with separation walls is taken as an example case. This invention is also applicable to a case where the organic EL medium layers are patterned by using a mask or photolithography technique without forming separation walls.

[0053] The method of depositing the organic EL medium layers and electrode layers include various kinds of film making methods and deposition methods having directivity.

[0054] In the above embodiment, the organic EL medium layers are formed over the anodes. This invention is also applicable where the organic EL medium layers are formed over cathodes. Further, a variety of organic EL medium layers and electrode layers as well as their film making conditions have been described by way of example only, and they can be properly selected, combined or modified as required.

[0055] (Third Embodiment)

[0056] **FIGS. 8** to **11C** show a method of forming layers of organic EL medium according to a third embodiment of the invention. That is, the first electrodes **13** (anodes) made of an ITO film are formed in stripes over the transparent glass substrate **11**, and then individual organic EL medium layers are formed according to the film deposition process shown

in **FIG. 8**. These organic EL medium layers are formed by a vapor deposition method, for example. **FIGS. 9A** to **11C** are cross sections showing a process of manufacturing an organic EL display panel.

[0057] A hole transport layer **21** is first formed such that final thicknesses of the layers **21** for R, G and B light emitting portions are 50, 70 and 100 nm, respectively. First, using a mask **20**, the RGB light emitting areas are deposited with layers to differential thicknesses that are equal to a common layer thickness subtracted from the respective final layer thicknesses. That is, the films are deposited in the RGB light emitting areas to the differential thicknesses of 0, 20 and 50 nm, respectively, that are obtained by subtracting the common layer thickness of 50 nm from the final thicknesses of the respective light emitting areas. More specifically, as shown in **FIG. 9A**, in a first step the mask **20** is positioned and set by aligning its opening with the light emitting area corresponding to the green (G) light emitting portion. Then, a hole transport layer **21A** is deposited to the differential thickness for green (G) of 20 nm. Then, as shown in **FIG. 9B**, in a second step the mask **20** is shifted by one cycle of the light emitting areas to align the opening with the blue (B) light emitting area. The hole transport layer **21A** is then deposited to the differential thickness for blue (B)-of 50 nm.

[0058] Next, as shown in **FIG. 9C**, in a third step the mask **20** is removed and a hole transport layer **21B** is deposited commonly for all the RGB light emitting areas to a thickness of 50 nm. In this way, the hole transport layers **21** consisting of hole transport layers **21A** and **21B** can be formed over the RGB light emitting areas to different thicknesses.

[0059] When forming the hole transport layers **21A** over the light emitting portions to their respective differential thicknesses, the vapor deposition is preferably performed such that the direction of a vapor flow is at less than a predetermined angle to the normal of the substrate **11**, to prevent the wraparound of the vapor flow of the organic EL material. When forming the hole transport layers **21B** at one time, on the other hand, the vapor deposition is preferably performed such that the direction of vapor flow is at a predetermined angle to the normal of the substrate **11** (hereafter referred to as an angle vapor deposition) to avoid shadowing due to debris or projections and secure good coverage.

[0060] As described above, after the hole transport layer **21** is deposited, a light emitting layer **22** is formed. First, as shown in **FIG. 10A**, the mask **20** is positioned and set by aligning its opening with the light emitting area corresponding to the red (R) light emitting portion. Then, a light emitting layer **22A** for red (R) is deposited to a predetermined thickness (d(R)) (fourth step in **FIG. 8**). Next, as shown in **FIG. 10B** the mask **20** is shifted by one cycle of the light emitting areas to align the opening with the green (G) light emitting area. A light emitting layer **22B** for green (G) is deposited to a predetermined thickness (d(G)) (fifth step). Further, in the similar manner as shown in **FIG. 10C**, a light emitting layer **22C** for blue (B) is deposited to a predetermined thickness (d(B)) (sixth step). In this way, the R, G and B light emitting areas can be deposited with the light emitting layers **22** of different organic EL materials. During the process of forming the light emitting layers **22A**, **22B**, **22C**, the direction of the vapor flow is preferably set at a predetermined angle or less to the normal of the substrate **11**.

[0061] After the light emitting layer **22** is formed, an electron transport layer **23** is formed such that final thicknesses of the layers **23** for R, G and B light emitting portions are 80, 20 and 50 nm, respectively. First, using the mask **20**, the RGB light emitting areas are deposited with layers to differential thicknesses that are equal to a common layer thickness subtracted from the respective final layer thicknesses. That is, the films are deposited in the RGB light emitting areas as to the differential thicknesses of 60, 0 and 30 nm, respectively, that are obtained by subtracting the common layer thickness of 20 nm from the final thicknesses of the respective light emitting areas. More specifically, as shown in FIG. 11A, the mask **20** is positioned and set by aligning its opening with the light emitting area corresponding to the red (R) light emitting portion. Then, an electron transport layer **23A** is deposited to the differential thickness for red (R) of 60 nm (seventh step). Next, as shown in FIG. 11B, the mask **20** is shifted by two cycles of the light emitting areas to align the opening with the blue (B) light emitting area, and then the electron transport layer **23A** is deposited to the differential thickness for blue (B) of 30 nm (eighth step).

[0062] Next, as shown in FIG. 11C, the mask is removed and an electron transport layer **23B** is commonly deposited over all the RGB light emitting areas to a thickness of 20 nm (ninth step). In this way, the electron transport layer **23** consisting of electron transport layers **23A** and **23B** can be formed over the RGB light emitting areas to different thicknesses.

[0063] As in the case with the formation of the hole transport layer **21**, during the vapor deposition of the electron transport layers **23A** to the differential thicknesses, the direction of the vapor flow is preferably set at a predetermined angle or less to the normal of the substrate **11** and, during the vapor deposition of the common electron transport layer **23B**, the angle vapor deposition is preferably performed.

[0064] As described above, after each organic EL layer is formed, the second electrodes (cathodes) **19** made of metal for example is formed over the organic EL medium layers between the separation walls **17**, thus manufacturing the organic EL display panel **10**.

[0065] As described above, this invention allows the organic EL medium layers of different luminous colors to be formed to their optimum thicknesses, thus realizing a high performance full color organic EL display panel.

[0066] In the above embodiment, we have explained a case where organic EL medium layers for different luminous colors are formed to different thicknesses (different differential thicknesses) and then organic EL medium layers of equal thicknesses for all luminous colors are formed at one time. It is possible to form the organic EL medium layers of equal thicknesses for all light emitting areas first.

[0067] It is also noted that this invention is not limited to the application where both the hole transport layer and the electronic transport layer are provided. It can also be applied to where only one of these transport layers is provided. Further, the organic EL medium layer is not limited to the hole transport layer and electron transport layer. It may, for example, be a hole injection layer and an electron injection layer. Although in the above embodiment the organic EL

medium layers are formed over an anode, they may be formed over a cathode. The organic EL medium layers and their thicknesses have been described by way of example only and may be modified as required.

[0068] As can be seen from the foregoing, this invention can realize a high performance organic EL display panel.

What is claimed is:

1. An organic electroluminescent display panel having light emitting portions in a plurality of luminous colors formed on a substrate, said display panel comprising:

first electrodes formed on the substrate;

organic layers formed by deposition;

light emitting layers formed in desired areas according to the luminous colors; and

second electrodes;

wherein the organic layers are formed by an angle deposition method.

2. An organic electroluminescent display panel having light emitting portions in a plurality of luminous colors formed on a substrate, said display panel comprising:

first electrodes formed on the substrate;

first organic layers formed in light emitting areas at one time by deposition;

second organic layers formed in desired areas and being different among different luminous colors;

light emitting layers formed in desired areas according to the luminous colors; and

second electrodes;

wherein the first organic layers are formed by an angle deposition method and the second organic layers are deposited at a deposition angle smaller than that of the angle deposition method.

3. The organic electroluminescent display panel according to claim 2, wherein at least one of the second organic layers is made of an organic material different from that of the first organic layers.

4. The organic electroluminescent display panel according to claim 2, wherein the second organic layers are each made of different organic materials.

5. The organic electroluminescent display panel according to claim 2, wherein the second organic layers are made of the same organic material and have different thicknesses.

6. The organic electroluminescent display panel according to claim 3, wherein the second organic layers are formed over the first organic layers.

7. The organic electroluminescent display panel according to claim 1 or 2, wherein the light emitting layers are each deposited at a deposition angle smaller than that of the angle deposition method.

8. The organic electroluminescent display panel according to claim 1 or 2, wherein the second electrodes are deposited at a deposition angle smaller than that of the angle deposition method.

9. The organic electroluminescent display panel according to claim 2, wherein the second organic holes are hole transport layers.

10. The organic electroluminescent display panel according to claim 2, wherein the second organic holes are electron transport layers.

11. An organic electroluminescent display panel having light emitting portions in a plurality of luminous colors formed on a substrate; said display panel comprising:

first electrodes formed on the substrate;

first organic layers having different thicknesses for different luminous colors in associated light emitting areas on the substrate on which the first electrodes were formed;

light emitting layers formed on the first organic layers on the light emitting areas corresponding to the different luminous colors; and

second electrodes formed on the light emitting layers.

12. An organic electroluminescent display panel according to claim 11, wherein the first organic layers include organic layers having equal thicknesses for all the luminous colors and organic layers having different thicknesses for different luminous colors.

13. An organic electroluminescent display panel according to claim 12, wherein the first organic layers include organic layers having different thicknesses for different luminescent colors and organic layers formed on the organic

layers of different thicknesses and having equal thicknesses for all the luminous colors.

14. An organic electroluminescent display panel according to claim 11, further having second organic layers having different thicknesses for different luminous colors and formed in the associated light emitting areas on the light emitting layers.

15. The organic electroluminescent display panel according to claim 14, wherein the second organic layers include organic layers having equal thicknesses for all the luminous colors and organic layers having different thicknesses for different luminous colors.

16. The organic electroluminescent display panel according to claim 15, wherein the second organic layers include organic layers having different thicknesses for different luminescent colors and organic layers formed on the organic layers of different thicknesses and having equal thicknesses for all the luminous colors.

17. The organic electroluminescent display panel according to claim 11, wherein the first organic layers are a hole transport layer.

18. An organic electroluminescent display panel according to claim 14, wherein the second organic layers are an electron transport layer.

* * * * *

专利名称(译)	有机电致发光显示板及其制造方法		
公开(公告)号	US20040245922A1	公开(公告)日	2004-12-09
申请号	US10/882169	申请日	2004-07-02
[标]申请(专利权)人(译)	东北先锋股份有限公司		
申请(专利权)人(译)	TOHOKU PIONEER CORPORATION		
当前申请(专利权)人(译)	TOHOKU PIONEER CORPORATION		
[标]发明人	OHSHITA ISAMU MURAYAMA RYUJI		
发明人	OHSHITA, ISAMU MURAYAMA, RYUJI		
IPC分类号	H05B33/10 C23C14/06 C23C14/24 H01L27/32 H01L51/00 H01L51/50 H01L51/56 H05B33/12 H05B33/14 H05B33/22 H05B33/26 H05B33/00		
CPC分类号	H01L27/3211 H01L27/3281 H01L51/0011 H01L51/56		
优先权	2000081931 2000-03-23 JP 2000044629 2000-02-22 JP		
其他公开文献	US7187120		
外部链接	Espacenet USPTO		

摘要(译)

一种制造有机电致发光显示板的方法，包括以下步骤：在基板上形成第一电极；通过沉积形成有机层；在所需区域形成不同发光颜色的不同发光层；并形成第二电极；其中有机层通过角度沉积方法形成，所述角度沉积方法以大于预定角度的方式进行与基板法线的沉积。

