




US 20060204784A1


(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2006/0204784 A1**  
(43) **Pub. Date: Sep. 14, 2006**  
**Begley et al.**(54) **ORGANIC LIGHT-EMITTING DEVICES  
WITH MIXED ELECTRON TRANSPORT  
MATERIALS**(52) **U.S. Cl.** ..... **428/690**; 428/917; 313/504;  
313/506; 257/E51; 257/E51;  
257/E51(76) Inventors: **William J. Begley**, Webster, NY (US);  
**Tukaram K. Hatwar**, Penfield, NY  
(US); **Ralph H. Young**, Rochester, NY  
(US); **Natasha Andrievsky**, Webster,  
NY (US)(57) **ABSTRACT**Correspondence Address:  
**Paul A. Leipold**  
**Patent Legal Staff**  
**Eastman Kodak Company**  
**343 State Street**  
**Rochester, NY 14650-2201 (US)**


An OLED device comprises a cathode, an anode, a light emitting layer, and on the cathode side of said emitting layer, a further layer containing a) a first compound that has the lowest LUMO value of the compounds in the layer, in an amount greater than or equal to 10% by volume and less than 100% by volume of the layer; b) at least one second compound exhibiting a higher LUMO value than the first compound, where at least one of the second compounds is a low voltage electron transport material, the total amount of such second compounds(s) is less than or equal to 90% by volume of the layer; and c) a metallic material based on a metal having a work function less than 4.2 eV.

(21) Appl. No.: **11/077,218**(22) Filed: **Mar. 10, 2005****Publication Classification**(51) **Int. Cl.**  
**H01L 51/54** (2006.01)  
**H05B 33/12** (2006.01)

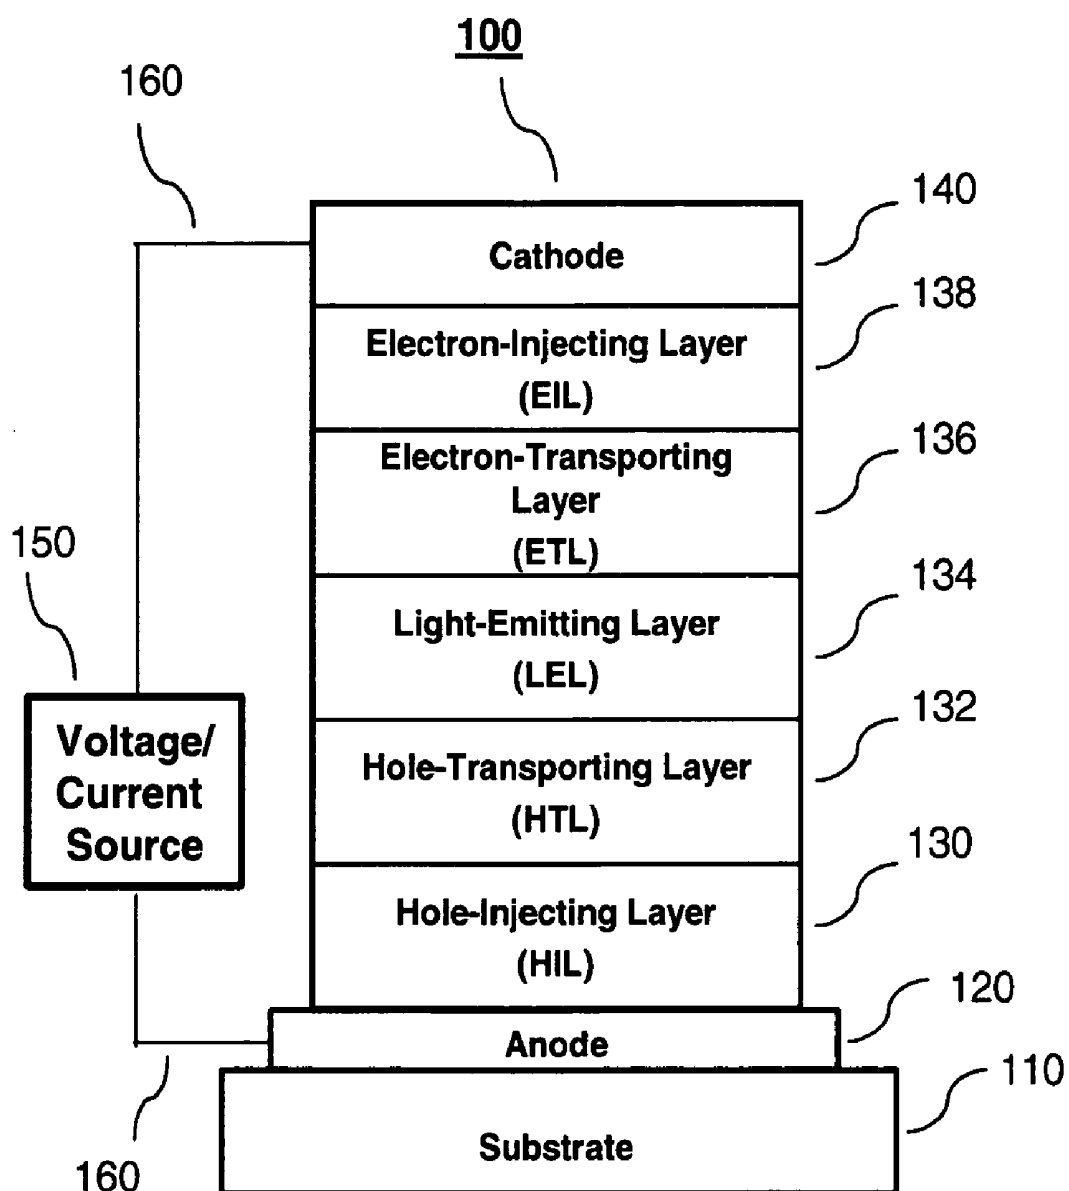

**Figure 1**

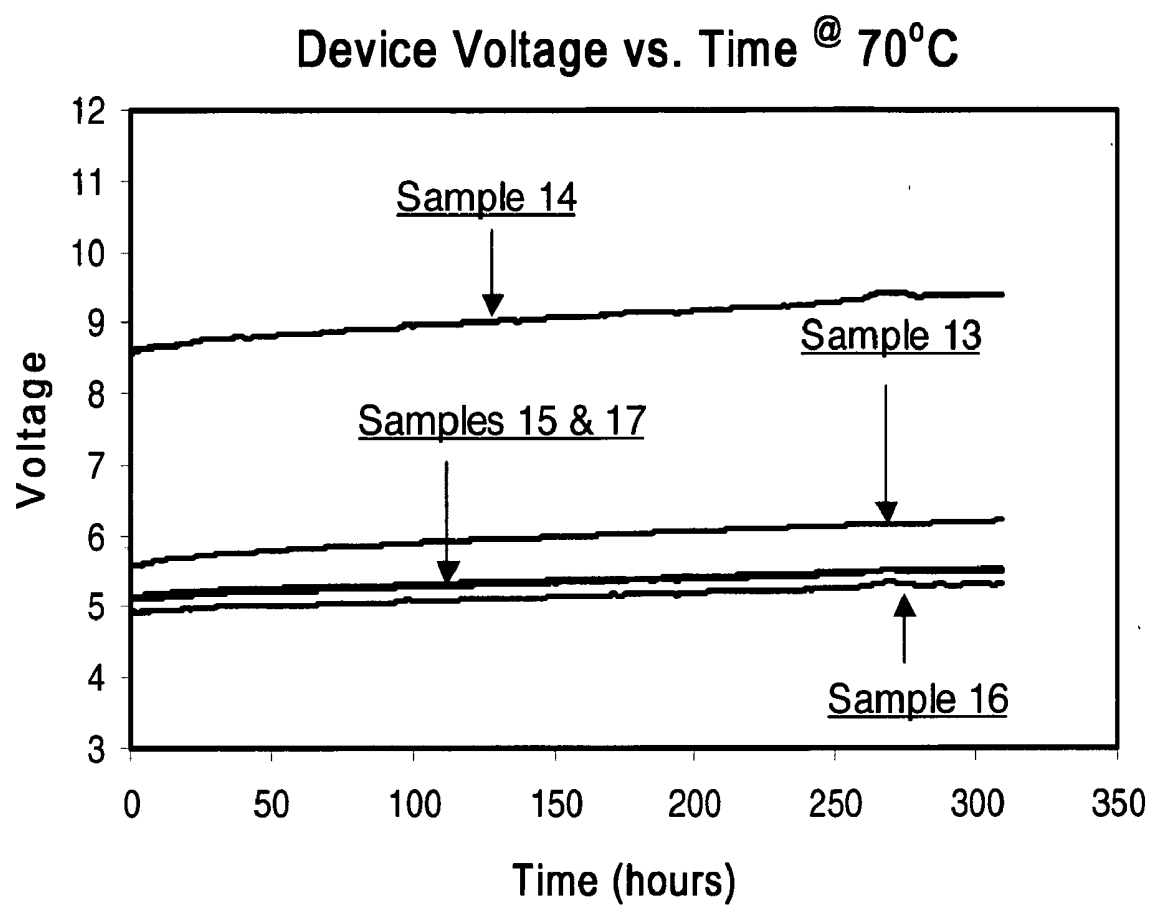**Figure 2**

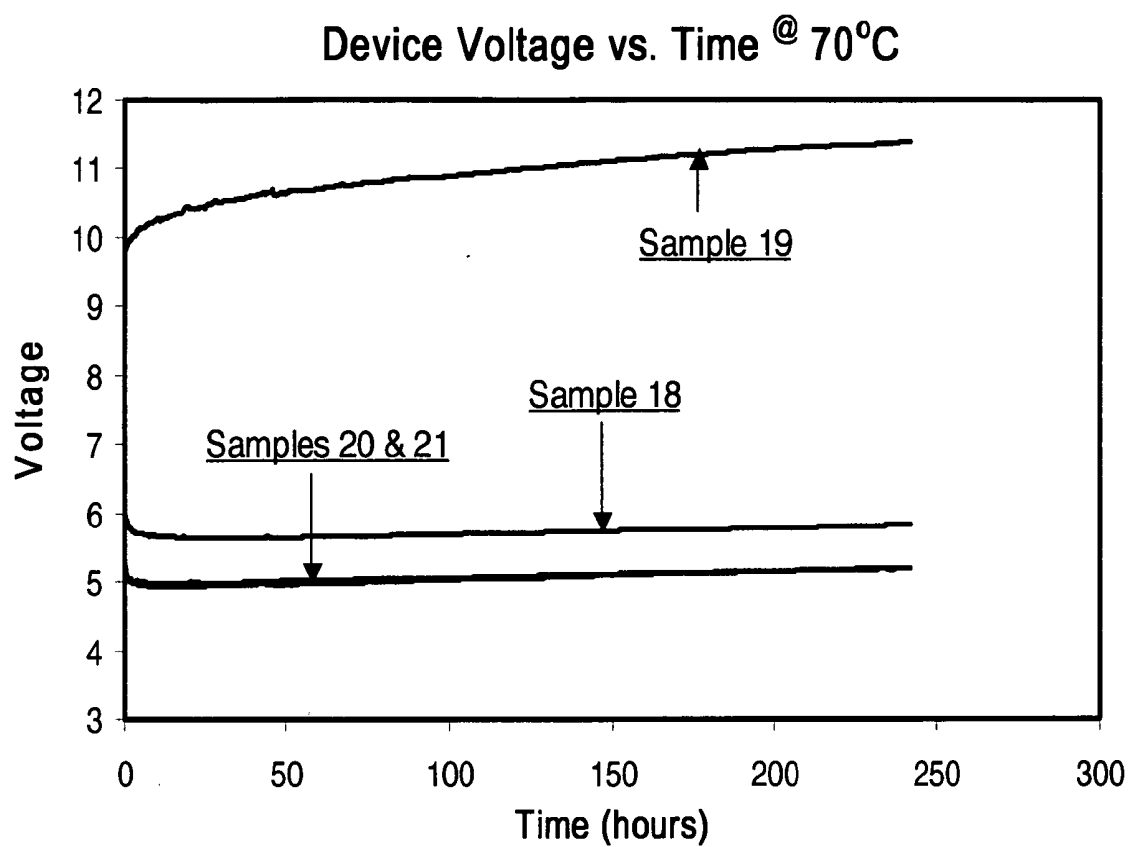**Figure 3**

## ORGANIC LIGHT-EMITTING DEVICES WITH MIXED ELECTRON TRANSPORT MATERIALS

### FIELD OF THE INVENTION

[0001] This invention relates to an organic light emitting diode (OLED) electroluminescent (EL) device comprising a layer between an emitting layer and the cathode containing a mixture of at least two compounds.

### BACKGROUND OF THE INVENTION

[0002] While organic electroluminescent (EL) devices have been known for over two decades, their performance limitations have represented a barrier to many desirable applications. In a basic two-layer EL device structure, described first in U.S. Pat. No. 4,356,429, one organic layer of the EL element adjacent to the anode is specifically chosen to transport holes, therefore, it is referred to as the hole-transporting layer, and the other organic layer is specifically chosen to transport electrons, referred to as the electron-transporting layer. The interface between the two layers provides an efficient site for the recombination of the injected hole/electron pair and the resultant electroluminescence.

[0003] These devices are also commonly referred to as organic light-emitting diodes, or OLEDs. Representative of earlier organic EL devices are Gurnee et al. U.S. Pat. No. 3,172,862, issued Mar. 9, 1965; Gurnee U.S. Pat. No. 3,173,050, issued Mar. 9, 1965; Dresner, "Double Injection Electroluminescence in Anthracene", RCA Review, Vol. 30, pp. 322-334, 1969; and Dresner U.S. Pat. No. 3,710,167, issued Jan. 9, 1973. The organic layers in these devices, usually composed of a polycyclic aromatic hydrocarbon, were very thick (much greater than 1  $\mu\text{m}$ ). Consequently, operating voltages were very high, often >100V.

[0004] More recent multilayer organic EL devices include an organic EL element consisting of extremely thin layers (e.g. <1.0  $\mu\text{m}$ ) between the anode and the cathode. Reducing the thickness lowered the resistance of the organic layer and has enabled devices that operate at much lower voltage. Because of their low driving voltage, high luminance, wide-angle viewing and capability for full-color flat emission displays, these devices are now more attractive for many display applications. Tang et al., has described this multilayer OLED device in U.S. Pat. Nos. 4,769,292; 4,885,211 and in J Applied Physics, Vol. 65, Pages 3610-3616, 1989 which describe an organic light-emitting layer (LEL) between the hole-transporting layer and electron-transporting layer wherein the light-emitting layer commonly consists of a host material doped with a guest material—dopant, which results in an efficiency improvement and allows for color tuning.

[0005] EL devices in recent years have expanded to include not only single color emitting devices, such as red, green and blue, but also white-devices, devices that emit white light. Efficient white light producing OLED devices are highly desirable in the industry and are considered as a low cost alternative for several applications such as paper-thin light sources, backlights in LCD displays, automotive dome lights, and office lighting. White light producing OLED devices should be bright, efficient, and generally have Commission International d'Eclairage (CIE) chromaticity coordinates of about (0.33, 0.33). In any event, in

accordance with this disclosure, white light is that light which is perceived by a user as having a white color.

[0006] Since the early inventions, further improvements in device materials have resulted in improved performance in attributes such as color, stability, luminance efficiency and manufacturability, e.g., as disclosed in U.S. Pat. No. 5,061,569, U.S. Pat. No. 5,409,783, U.S. Pat. No. 5,554,450, U.S. Pat. No. 5,593,788, U.S. Pat. No. 5,683,823, U.S. Pat. No. 5,908,581, U.S. Pat. No. 5,928,802, U.S. Pat. No. 6,020,078, and U.S. Pat. No. 6,208,077, amongst others.

[0007] Notwithstanding all of these developments, there are continuing needs for organic EL device components, such as electron transporting materials and or electron injecting materials, that will provide even lower device drive voltages and hence lower power consumption, while maintaining high luminance efficiencies and long lifetimes combined with high color purity.

[0008] A useful class of electron transporting materials is that derived from metal chelated oxinoid compounds including chelates of oxine itself, also commonly referred to as 8-quinolinol or 8-hydroxyquinoline. Tris(8-quinolinolato)aluminum (III), also known as Alq or Alq<sub>3</sub>, and other metal and non-metal oxine chelates are well known in the art as electron transporting materials.

[0009] Tang et al., in U.S. Pat. No. 4,769,292 and VanSlyke et al., in U.S. Pat. No. 4,539,507 lower the drive voltage of the EL devices by teaching the use of Alq as an electron transport material in the luminescent layer or luminescent zone.

[0010] Baldo et al., in U.S. Pat. No. 6,097,147 and Hung et al., in U.S. Pat. No. 6,172,459 teach the use of an organic electron transporting layer adjacent to the cathode so that when electrons are injected from the cathode into the electron transporting layer, the electrons traverse both the electron transporting layer and the light emitting layer.

[0011] Tamano et al., in U.S. Pat. No. 6,150,042 teaches use of hole-injecting materials in an organic EL device. Examples of electron transporting materials useful in the device are given and included therein are mixtures of electron transporting materials. There is no indication of how to select the electron transporting materials in terms of Lowest Unoccupied Molecular Orbital levels (LUMOs) and no reference to low drive voltage with the devices.

[0012] Seo et al., in US2002/0086180A1 teaches the use of a 1:1 mixture of Bphen, (also known as 4,7-diphenyl-1,10-phenanthroline or bathophenanthroline) as an electron transporting material, and Alq as an electron injection material, to form an electron transporting mixed layer. However, the Bphen/Alq mix of Seo et al., shows inferior stability and falls outside the scope of the current invention.

[0013] Kido et al., in U.S. Pat. No. 6,013,384 teaches an EL device with at least one luminescent layer having an organic compound doped with a metal capable of acting as a dopant. The disclosure does not mention mixtures of compounds with metal doping.

[0014] However, these devices do not have the desired EL characteristics in terms of stability of the components in combination with low drive voltages.

[0015] The problem to be solved therefore, is to provide an OLED device having a light-emitting layer (LEL) that

exhibits good luminance efficiency and stability while at the same time requiring low drive voltages for reduced power consumption.

#### SUMMARY OF THE INVENTION

[0016] The invention provides an OLED device comprising a cathode, an anode, a light emitting layer, and on the cathode side of said emitting layer, a further layer containing

[0017] a) a first compound that has the lowest LUMO value of the compounds in the layer, in an amount greater than or equal to 10% by volume and less than 100% by volume of the layer;

[0018] b) at least one second compound exhibiting a higher LUMO value than the first compound, where at least one of the second compounds is a low voltage electron transport material, the total amount of such second compounds(s) is less than or equal to 90% by volume of the layer; and

[0019] c) a metallic material based on a metal having a work function less than 4.2 eV.

[0020] The OLED device has a light-emitting layer (LEL) that exhibits good luminance efficiency and stability while at the same time requiring low drive voltages for reduced power consumption and longer battery life.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0021] **FIG. 1** shows a cross-sectional view of one embodiment of the present invention wherein the first compound, the second compound(s) and the metal are located in the electron-transporting layer (ETL, 136). The figure shows a hole-injecting layer (HIL, 130) and an electron-injecting layer (EIL, 138), but these are optional.

[0022] **FIGS. 2 and 3** are graphs, showing voltage versus operational time, demonstrating the low drive voltages over time of the OLED devices fabricated in accordance with the present invention.

#### DETAILED DESCRIPTION OF THE INVENTION

[0023] The invention is generally described above. An OLED device of the invention is a multilayer electroluminescent device comprising a cathode, an anode, hole-injecting layer(s) (if necessary), electron-injecting layer(s) (if necessary), hole-transporting layer(s), electron-transporting layer(s) and a light-emitting layer(s) (LEL). The further layer of the invention is located on the cathode side of the emitting layer and contains at least two different compounds, a first compound and a second compound, and a metal dopant. The first compound has the lowest LUMO value of the compounds in the layer. The second compound(s) has a higher LUMO value(s) than the first compound and at least one of the second compound(s) is a low voltage electron-transport material. The metal dopant can be any metal as long as it can reduce at least one of the compounds in the layer.

[0024] The first compound of the invention has a Lowest Unoccupied Molecular Orbital (LUMO) value lower than the LUMO value of the second compound, the low voltage electron transport material. In other words, the second compound has a higher LUMO value than the first com-

pound. In addition to lower drive voltage, the devices containing mixtures of the above-mentioned first and second compounds also have good luminance efficiency and good operational stability. Further embodiments of the invention support more than one second compound in said layer. Metals useful for doping are not restricted to specific ones as long as it is a metal that can reduce one or more of the organic compound in the layer. For simplicity, preferred embodiments of the invention are those that contain one first compound and one second compound. The amount of the first compound present in the layer is greater than or equal to 10% by volume, but cannot be 100%. The total amount of the second compound(s), the low voltage electron transporting material(s), present in the layer is less than or equal to 90% by volume, but cannot be 0%. The amount of metal dopant is more than 0.1% and less than 15%.

[0025] As used herein, the term "low voltage electron transport material" are those materials that when incorporated alone into the electron transporting layer, as described in paragraph d) of the devices of Examples 3 and 4, result in drive voltages of 13 volts or less. Low voltage electron transport materials with drive voltages of 10 volts or less are also useful as second compounds of the invention while materials of 8 volts or less are preferred as second compounds.

[0026] As used herein the term "metallic material" includes both the elemental metal and compounds thereof based on a metal having a work function less than 4.2 eV.

[0027] OLED devices made in accordance with the present invention give devices that require lower drive voltages to operate than devices employing the second compound, the low voltage electron-transport material, alone in the layer.

[0028] In a preferred embodiment of the invention there is only one first compound and only one second compound. In other embodiments of the invention there may be more than one second compound. In all embodiments, the first compound has the lowest LUMO value of all the compounds in the layer.

[0029] Embodiments of the invention may also exhibit high operational stability and give low voltage rises over the lifetime of the devices and can be produced with high reproducibility and consistently to provide good light efficiency.

[0030] **FIG. 1** shows one embodiment of the invention in which hole-injecting and electron-injecting layers are present. The electron-transporting layer in this embodiment is the said further layer containing both the first compound, the second compound(s) and the metal dopant, and is adjacent to the electron-injecting layer. When there is no electron-injecting layer present, the said further layer is adjacent to the cathode. In other embodiments there may be more than one hole-injecting, electron-injecting and electron-transporting layers. When more than one electron-transporting layers are present, the said further layer of the invention may be adjacent to the cathode while the additional electron transporting layers are adjacent to the light-emitting layer(s). Additionally, when more than one electron-transporting layers are present, the said further layer of the invention may be adjacent to the light-emitting layer with the additional electron transporting layers adjacent to the cathode.

[0031] The further layer as described above, can be an emitting or non-emitting layer. It functions to transport electrons with the result that the OLED device requires a lower voltage for operation than either of the first or second compound alone. When emitting, the electroluminescence from said layer can enhance the emission from the other emitting layer. When non-emitting, either the first or second compound or both should be essentially colorless or non-emitting.

[0032] One useful embodiment of the invention is an OLED device comprising a cathode, an anode, a light emitting layer, and on the cathode side of said emitting layer, a further layer containing

[0033] a) a first compound that contains at least 2 fused rings and has the lowest LUMO value of the compounds in the layer, in an amount greater than or equal to 10% by volume of the layer;

[0034] b) at least one second compound exhibiting a higher LUMO value than the first compound, where at least one of the second compounds is a low voltage electron transport material, the total amount of such second compounds(s) is less than or equal to 90% by volume of the layer; and

[0035] c) a metal having a work function less than 4.2 eV.

[0036] At least one of the aforementioned 2 fused rings can be a carbocyclic ring, or at least one of the fused rings can be a heterocyclic ring.

[0037] Another useful embodiment of the invention is an OLED device comprising a cathode, an anode, a light emitting layer, and on the cathode side of said emitting layer, a further layer containing

[0038] a) a first compound that contains at least 3 fused rings and has the lowest LUMO value of the compounds in the layer, in an amount greater than or equal to 10% by volume of the layer;

[0039] b) at least one second compound exhibiting a higher LUMO value than the first compound, where at least one of the second compounds is a low voltage electron transport material, the total amount of such second compounds(s) is less than or equal to 90% by volume of the layer; and

[0040] c) a metal having a work function less than 4.2 eV.

[0041] At least one of the aforementioned 3 fused rings can be a carbocyclic ring, or at least one of the fused rings can be a heterocyclic ring.


[0042] As used herein and throughout this application, the term carbocyclic and heterocyclic rings or groups are generally as defined by the *Grant & Hackh's Chemical Dictionary*, Fifth Edition, McGraw-Hill Book Company. A carbocyclic ring is any aromatic or non-aromatic ring system containing only carbon atoms and a heterocyclic ring is any aromatic or non-aromatic ring system containing both carbon and non-carbon atoms such as nitrogen (N), oxygen (O), sulfur (S), phosphorous (P), silicon (Si), gallium (Ga), boron (B), beryllium (Be), indium (In), aluminum (Al), and other elements found in the periodic table useful in forming ring systems. For the purpose of this invention, also included in the definition of a heterocyclic ring are those rings that include coordinate bonds. The definition of a coordinate

bond can be found in *Grant & Hackh's Chemical Dictionary*, page 91. In essence, a coordinate bond is formed when electron rich atoms such as O or N, donate a pair of electrons to electron deficient atoms such as Al or B. One such example is found in tris(8-quinolinolato)aluminum(III), also referred to as Alq, wherein the nitrogen on the quinoline moiety donates its lone pair of electrons to the aluminum atom thus forming the heterocycle and hence providing Alq with a total of 3 fused rings. The definition of work function can be found in *CRC Handbook of Chemistry and Physics*, 70th Edition, 1989-1990, CRC Press Inc., page F-132 and a list of the work functions for various metals can be found on pages E-93 and E-94.

[0043] Carbocyclic and heterocyclic ring systems useful for the current invention for the first and second compounds are selected from metal and non-metal chelated oxinoids, anthracenes, bipyridyls, butadienes, imidazoles, phenanthrenes, phenanthrolines, styrylarylenes, benzazoles, buckminsterfullerene- $C_{60}$  (also known as buckyball or fullerene- $C_{60}$ ), tetracenes, xanthenes, perylenes, coumarins, rhodamines, quinacridones, dicyanomethylenepyrans, thiopyrans, polymethines, pyryliums, fluoranthenes, perfluoranthrenes, silacyclopentadienes or siloles, thiapyryliums, triazines, carbostyryls, metal and non-metal chelated bis(azinyl)amines, metal and non-metal chelated bis(azinyl)methenes.

[0044] More specifically, the first and second compounds of the invention can be selected from compounds represented by Formula I:

Formula I

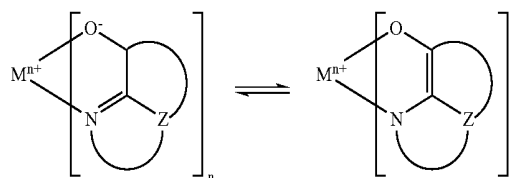


wherein

[0045] M represents a metal or non-metal;

[0046] n is an integer of from 1 to 4; and

[0047] Z independently in each occurrence represents the atoms completing a nucleus having at least two fused aromatic rings.

[0048] The first and second compounds can also be selected from compounds represented by Formula II:



Formula II

wherein

[0049] M is a metal or non-metal;


[0050] Q in each occurrence represents a substituted 8-quinolinolato ligand;

[0051]  $R^S$  represents an 8-quinolinolato ring substituent chosen to block sterically the attachment of more than two substituted 8-quinolinolato ligands to the aluminum atom; and


[0052] L is a phenyl or aromatic fused ring moiety, which can be substituted with hydrocarbon groups such that L has from 6 to 24 carbon atoms.

[0053] Both first and second compounds can be selected from compounds represented by Formula I, or both may be selected from compounds represented by Formula II, with the provisos that the compounds have different LUMO values, that at least one second compound is a low voltage electron-transporting material and that the second compound has the highest LUMO value. Additional second compounds can be selected having Formulae I and II.

[0054] The first compound of the invention can be selected from chelated bis(aziny)amines and chelated bis(aziny)methenes which are represented by Formulae III and IV in which boron and nitrogen form a coordinated bond:

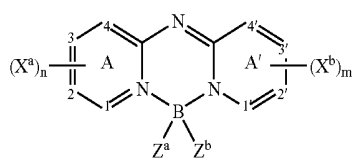

Formula III

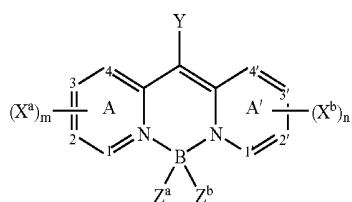

Formula IV

wherein:

[0055] A and A' represent independent azine ring systems corresponding to 6-membered aromatic ring systems containing at least one nitrogen;

[0056] each X<sup>a</sup> and X<sup>b</sup> is an independently selected substituent, two of which may join to form a fused ring to A or A';


[0057] m and n are independently 0 to 4;

[0058] Z<sup>a</sup> and Z<sup>b</sup> are independently selected substituents;

[0059] Y is hydrogen or a substituent; and

[0060] 1, 2, 3, 4, 1', 2', 3', and 4' are independently selected as either carbon or nitrogen atoms.

[0061] Additionally, the first compound can be selected from naphthacene derivatives that are represented by Formulae V:

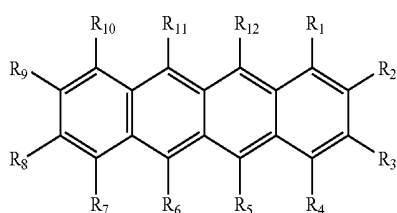

Formula V


wherein:

[0062] R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub>, R<sub>4</sub>, R<sub>5</sub>, R<sub>6</sub>, R<sub>7</sub>, R<sub>8</sub>, R<sub>9</sub>, R<sub>10</sub>, R<sub>11</sub>, and R<sub>12</sub> are independently selected as hydrogen or substituents;

[0063] provided that any of the indicated substituents may join to form further fused rings.

[0064] Preferentially, the first compound of the invention represented by Formula V are those in which at least one of R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub>, R<sub>4</sub>, R<sub>5</sub>, R<sub>6</sub>, R<sub>7</sub>, R<sub>8</sub>, R<sub>9</sub>, R<sub>10</sub>, R<sub>11</sub>, and R<sub>12</sub> are independently selected from alkyl and aryl groups.

[0065] Another first compound can be selected from anthracene derivatives that are represented by Formulae VI:

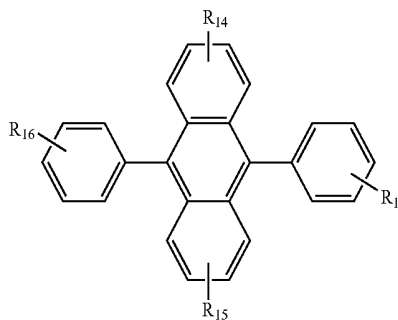

Formula VI

wherein:

[0066] R<sub>13</sub>, R<sub>14</sub>, R<sub>15</sub> and R<sub>16</sub> represent hydrogen or one or more substituents selected from the following groups:

[0067] Group 1: hydrogen, alkyl and alkoxy groups typically having from 1 to 24 carbon atoms;

[0068] Group 2: a ring group, typically having from 6 to 20 carbon atoms;

[0069] Group 3: the atoms necessary to complete a carbocyclic fused ring group such as naphthyl, anthracenyl, pyrenyl, and perylenyl groups, typically having from 6 to 30 carbon atoms;





[0070] Group 4: the atoms necessary to complete a heterocyclic fused ring group such as furyl, thienyl, pyridyl, and quinoliny groups, typically having from 5 to 24 carbon atoms;

[0071] Group 5: an alkoxylamino, alkylamino, and arylamino group typically having from 1 to 24 carbon atoms; and

[0072] Group 6: fluorine, chlorine, bromine and cyano radicals.

[0073] More specifically, the first compound of the invention can be selected from compounds represented by the following structures:




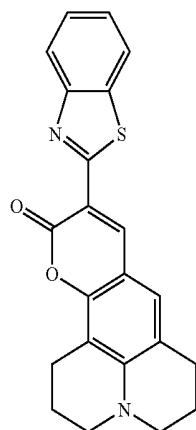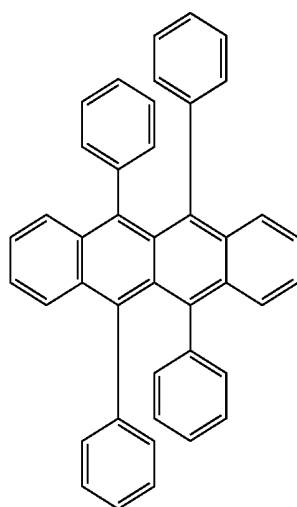


A-1

-continued


A-4

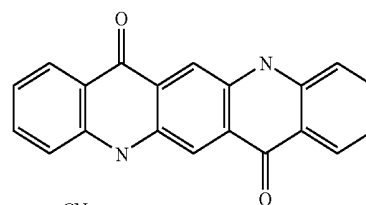

A-5




A-2



A-6

A-3

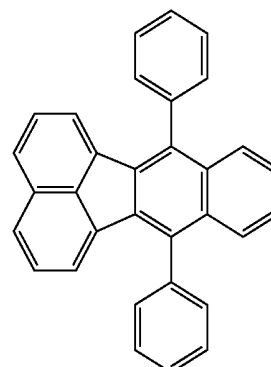


Also included in structures A-1 to A-6 are compounds containing the A-1 through A-6 structural features with substituents suitable to render said structures with the desired properties to function as first compound materials of the invention.


[0074] Specific first compounds of the invention can be selected from the following group;

A-7

A-8

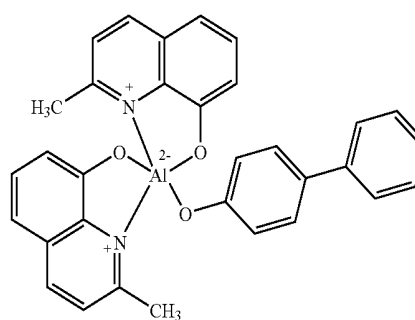


-continued





A-9

A-10

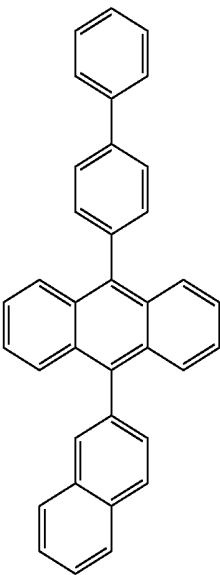



A-11

A-12

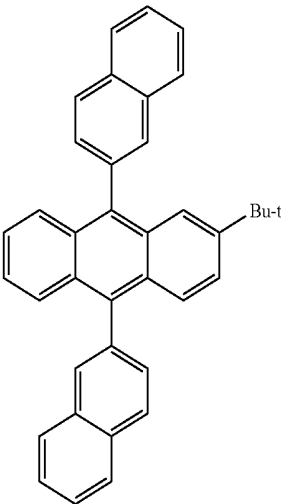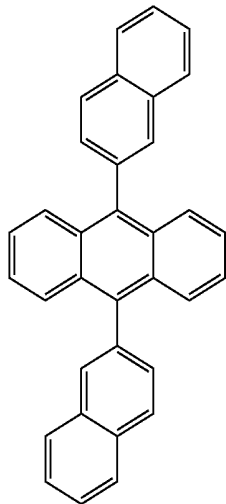


A-13

A-14

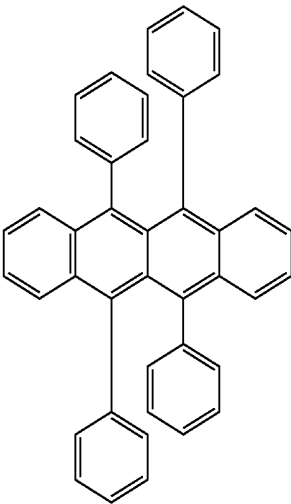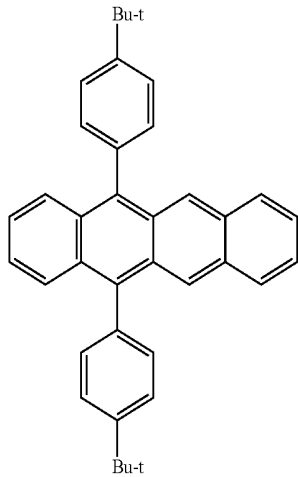


-continued


A-15

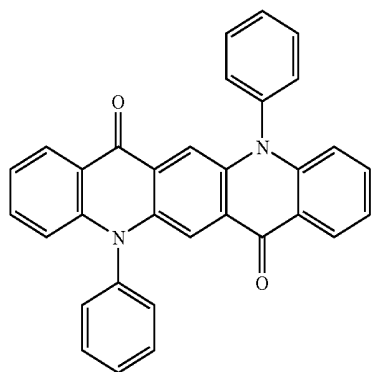


A-16

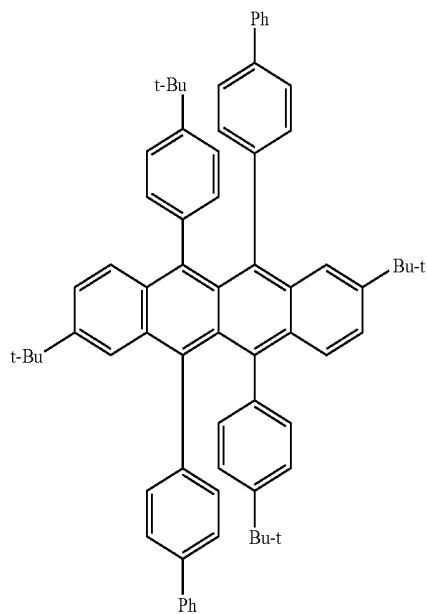


A-17

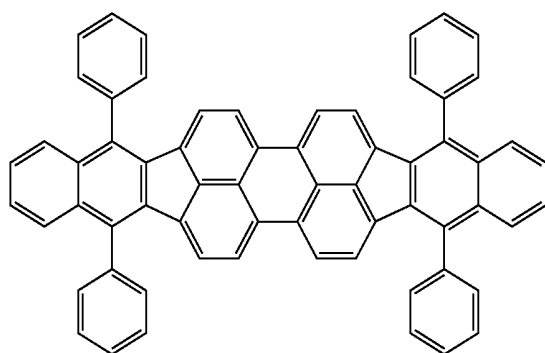


A-18



A-19

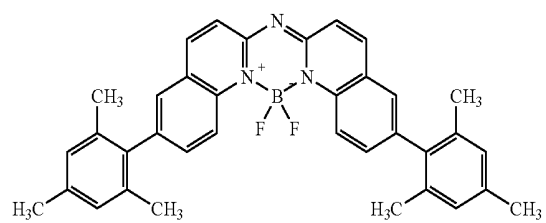


A-20

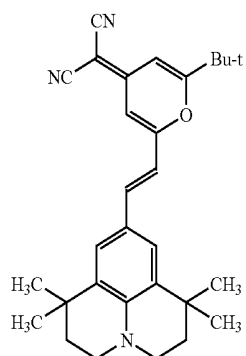


-continued


A-21

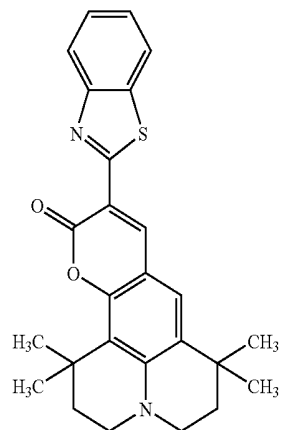

A-22

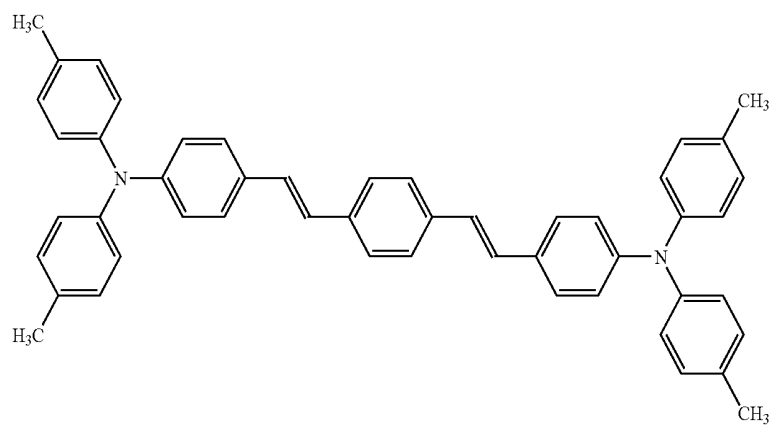


A-23

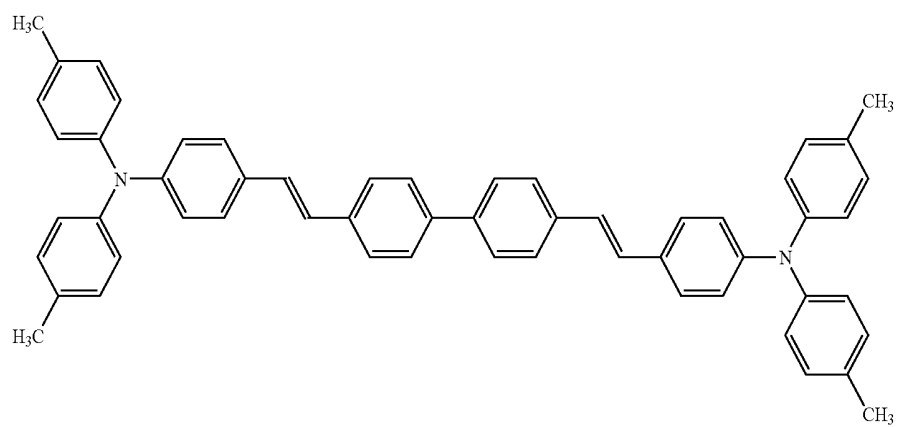


-continued

A-24

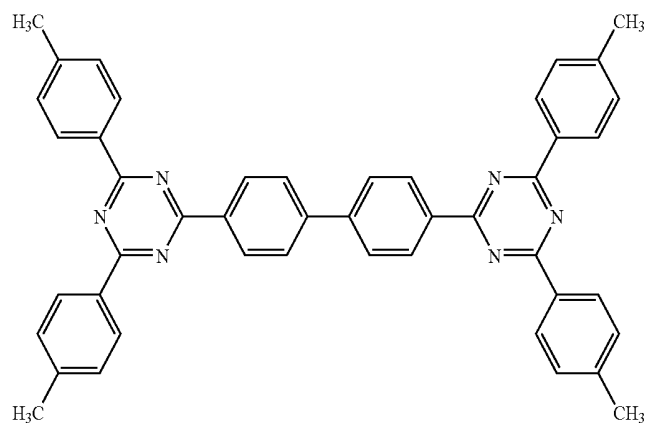

[0075] Second compounds of the invention can be selected from phenanthroline derivatives represented by Formula VII:




Formula VII

wherein

[0076]  $R_{17}$ ,  $R_{18}$ ,  $R_{19}$ ,  $R_{20}$ ,  $R_{21}$ ,  $R_{22}$ ,  $R_{23}$  and  $R_{24}$  are hydrogen or substituents; and

[0077] provided that any of the indicated substituents may join to form further fused rings.

[0078] Heterocyclic derivatives, represented by Formula VIII form a group of materials from which the second compounds of the invention can be selected:



Formula VIII

wherein


[0079]  $m$  is an integer of from 3 to 8;

[0080]  $Z$  is O,  $NR_{29}$ , or S;

[0081]  $R_{25}$ ,  $R_{26}$ ,  $R_{27}$ ,  $R_{28}$  and  $R_{29}$  are hydrogen; alkyl of from 1 to 24 carbon atoms; aryl or hetero-atom substituted aryl of from 5 to 20 carbon atoms; or halo; or are the atoms necessary to complete a fused carbocyclic or heterocyclic ring; and

[0082]  $Y$  is a linkage unit usually comprising an alkyl or aryl group that conjugately or unconjugately connects the multiple benzazoles together.

[0083] Additional second compounds of the invention can be selected from silole or silacyclopentadiene derivatives represented by Formula IX:




Formula IX

wherein

[0084]  $R_{30}$ ,  $R_{31}$ , and  $R_{32}$  are hydrogen or substituents or are the atoms necessary to complete a fused carbocyclic or hetero cyclic ring.

[0085] Other second compounds of the invention can be selected from triazine derivatives represented by Formula X:



Formula X


wherein

[0086] k is an integer of from 1 to 4;


[0087]  $R_{33}$  is hydrogen, substituents or carbocyclic or heterocyclic rings; and

[0088] Y is a linkage unit usually comprising an alkyl or aryl group that conjugately or unconjugately connects the multiple triazines together.


[0089] Specific second compounds based on formulae I, II, VII, VIII, IX and X are shown in the following structures:




B-1

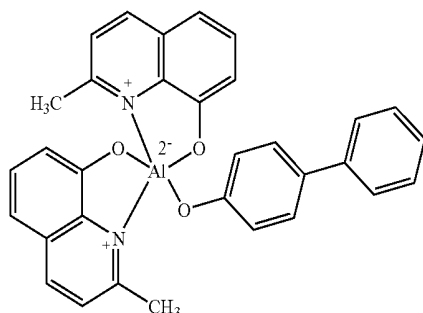

B-2




B-3

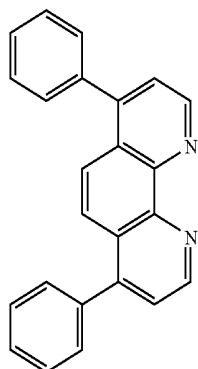


B-4

-continued


B-5

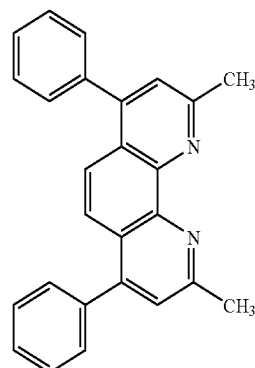


B-6

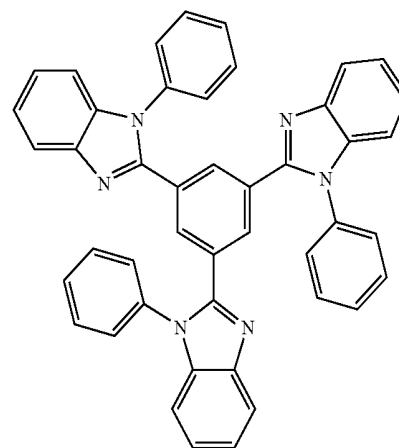

B-7

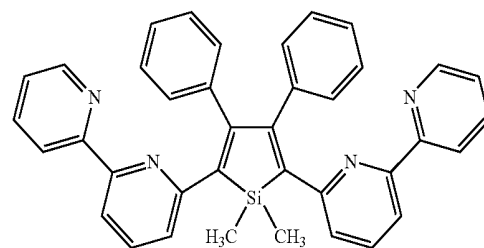

B-8

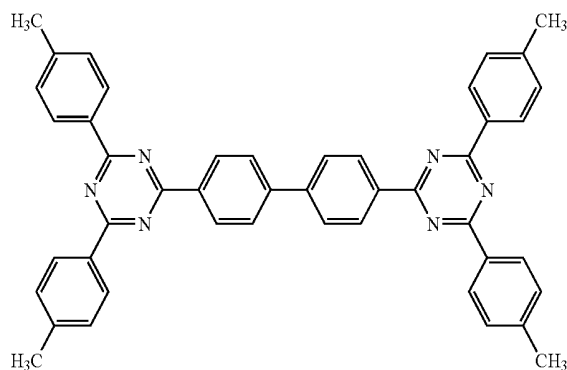

[0090] First and second compounds useful in the invention are any of those known in the art that meet the LUMO requirements of the invention and wherein at least one second compound is a low voltage electron transporting material as defined in the invention.

[0091] The amount of the first compound in the layer is greater than or equal to 10% by volume of the layer but less than 100% by volume, and the total amount of the second compound(s) is less than or equal to 90% by volume of the layer but more than 0%. Particularly useful ranges for the first compound are 20, 40, 50, 60, 75 and 90% with 80, 60, 50, 40, 25 and 10% respectively, by necessity completing the ranges for the total amounts for the second compound(s) and the metal.

[0092] The concentration of the metal in said layer is not restricted to a specific one. However, it is preferred that the concentration is in the range of from 0.1% to 15% by volume of the total material in the layer. The preferred concentration of metal doping is in the range of 0.1% to 10% but more preferably in the range of from 1% to 8%.

[0093] Embodiments of the invention are those in which the amount of the first compound is selected from any value in the aforementioned range, the total amount of the second compound(s) is selected from any value in the aforementioned range and the amount of the metal is selected from the aforementioned range to fulfill the remainder, to 100%.

[0094] In the invention, the metal of said further layer is not restricted to a specific one, as long as it is a metal that can reduce at least one of the organic compounds. It can be selected from the alkali metals such as Li, alkali earth metals such as Mg and transition metals including rare earth metals. In particular, the metal having a work function of less than or equal to 4.2 eV can be suitably used as the metal, and typical examples of such dopant metals include Li, Na, K, Be, Mg, Ca, Sr, Ba, Y, La, Sm, Gd, Yb.

[0095] Preferred combinations of the invention are those wherein the first compounds are selected from A-7, A-8, A-9, A-13, A-14, A-15A-16, A-18, A-19 and A-24, and the second compounds are selected from B-1, B-2, B-3, B-4, B-5, B-6, B-7 and B-8.

[0096] The further layer as described in the invention contains a first compound, at least one second compound and a metal with a work function less than 4.2 eV. The first compound has the lowest LUMO value of the compounds in the layer. In addition, at least one second compound is a low voltage electron-transporting compound. The combination of both the first and second compounds with the metal in the further layer of the invention in the aforementioned ratios, give devices that have reduced drive voltages even lower when compared to the devices in which either the first or second compound are incorporated alone in said layer.

[0097] Following are the chemical names and acronyms associated with compounds mentioned in the invention:

[0098] A-2, perylene; A-7 or B-1, Alq or Alq<sub>3</sub>, tris(8-quinolinolato)aluminum (III); A-8 or B-2, BAlq; A-9 or B-3, Gaq or Gaq<sub>3</sub>, tris(8-quinolinolato)gallium(III); A-10, 9-(2-naphthyl)-10-(4-phenyl)phenylanthracene; A-11, ADN, 9,10-bis(2-naphthyl)-2-phenylanthracene; A-12, tBADN, 2-tert-butyl-9,10-bis(2-naphthyl)-2-phenylanthracene; A-13, tBDPN, 5,12-bis[4-tert-butylphenyl]naphthacene; A-14, rubrene, 5,6,11,12-tetraphenylnaphthacene; A-18, TBP, 2,5,8,11-tetra-tert-butylperylene; B-4, BPhen, 4,7-diphenyl-1,10-phenanthroline; B-5, BCP, 2,9-dimethyl-4,7-diphenyl-1,10-phenanthroline; B-6, TPBI, 2,2',2''-(1,3,5-benzenetriyl)tris[1-phenyl-1H-benzimidazole]; and A-24 or B-8, TRAZ, 2,2'-(1,1'-biphenyl)-4,4'-diylbis(4,6-(p-tolyl)-1,3,5-triazine).

[0099] For use herein, the term 8-quinolinolato ligand, is a ligand derived from 8-hydroxyquinoline wherein the nitrogen in the 1-position of quinoline coordinates, by donating its free pair of electrons to a metal or non-metal atom bound to the hydroxyl group in the 8-position, with the metal or non-metal atom accepting the electrons, to form a coordinate bond and a chelated or heterocyclic ring system. R<sup>s</sup> is an 8-quinolinolato-ring substituent chosen to block sterically the attachment of more than two substituted 8-quinolinolato ligands to the metal or non-metal atom. Preferred R<sup>s</sup> groups are selected from alkyl and aryl groups. L groups are hydrocarbons of from 6 to 24 carbon atoms. Preferred L groups are selected from alkyl, carbocyclic and heterocyclic groups. Y groups are selected from alkyl, carbocyclic or heterocyclic groups. Preferred Y groups are aryl or biphenyl groups. M can be any suitable metal or non-metal found in the periodic table that can be used to form compounds of Formulae I and II. For example, M can be an alkali metal, such as lithium, sodium, or potassium; an alkaline earth metal, such as magnesium or calcium; an earth metal, such as aluminum or gallium, or a transition metal such as zinc or zirconium. Generally any monovalent, divalent, trivalent, or tetravalent metals known to be a useful chelating metal can be employed. Also included are boron and beryllium. Additional examples of first and second compounds represented by Formula II can be found in Bryan et al., U.S. Pat. No. 5,141,671, incorporated herein by reference.

[0100] The EL device of the invention is useful in any device where stable light emission is desired such as a lamp or a component in a static or motion imaging device, such as a television, cell phone, DVD player, or computer monitor.

[0101] Typical embodiments of the invention provide not only improved drive voltage but can also provide improved luminance efficiency, operational stability and low voltage rise.

[0102] Unless otherwise specifically stated, use of the term "substituted" or "substituent" means any group or atom other than hydrogen. Additionally, when the term "group" is used, it means that when a substituent group contains a substitutable hydrogen, it is also intended to encompass not only the substituent's unsubstituted form, but also its form further substituted with any substituent group or groups as herein mentioned, so long as the substituent does not destroy properties necessary for device utility. Suitably, a substituent group may be halogen or may be bonded to the remainder of the molecule by an atom of carbon, silicon, oxygen, nitrogen, phosphorous, sulfur, selenium, or boron. The substituent may be, for example, halogen, such as chloro, bromo or fluoro; nitro; hydroxyl; cyano; carboxyl; or groups which may be further substituted, such as alkyl, including straight or branched chain or cyclic alkyl, such as methyl, trifluoromethyl, ethyl, t-butyl, 3-(2,4-di-t-pentylphenoxy)propyl, and tetradecyl; alkenyl, such as ethylene, 2-butene; alkoxy, such as methoxy, ethoxy, propoxy, butoxy, 2-methoxyethoxy, sec-butoxy, hexyloxy, 2-ethylhexyloxy, tetradecyloxy, 2-(2,4-di-t-pentylphenoxy)ethoxy, and 2-dodecyloxyethoxy; aryl such as phenyl, 4-t-butylphenyl, 2,4,6-trimethylphenyl, naphthyl; aryloxy, such as phenoxy, 2-methylphenoxy, alpha- or beta-naphthyloxy, and 4-tolyloxy; carbonamido, such as acetamido, benzamido, butyramido, tetradecanamido, alpha-(2,4-di-t-pentylphenoxy)acetamido, alpha-(2,4-di-t-pentylphenoxy)butyramido, alpha-

(3-pentadecylphenoxy)-hexanamido, alpha-(4-hydroxy-3-t-butylphenoxy)-tetradecanamido, 2-oxo-pyrrolidin-1-yl, 2-oxo-5-tetradecylpyrrolin-1-yl, N-methyltetradecanamido, N-succinimido, N-phthalimido, 2,5-dioxo-1-oxazolidinyl, 3-dodecyl-2,5-dioxo-1-imidazolyl, and N-acetyl-N-dodecylamino, ethoxycarbonylamino, phenoxycarbonylamino, benzyloxycarbonylamino, hexadecyloxycarbonylamino, 2,4-di-t-butylphenoxycarbonylamino, phenylcarbonylamino, 2,5-(di-t-pentylphenyl)carbonylamino, p-dodecylphenylcarbonylamino, p-tolylcarbonylamino, N-methylureido, N,N-dimethylureido, N-methyl-N-dodecylureido, N-hexadecylureido, N,N-di-octadecylureido, N,N-di-octyl-N'-ethylureido, N-phenylureido, N,N-diphenylureido, N-phenyl-N-p-tolylureido, N-(m-hexadecylphenyl)ureido, N,N-(2,5-di-t-pentylphenyl)-N'-ethylureido, and t-butylcarbonamido; sulfonamido, such as methylsulfonamido, benzenesulfonamido, p-tolylsulfonamido, p-dodecylbenzenesulfonamido, N-methyltetradecylsulfonamido, N,N-dipropylsulfamoylamino, and hexadecylsulfonamido; sulfamoyl, such as N-methylsulfamoyl, N-ethylsulfamoyl, N,N-dipropylsulfamoyl, N-hexadecylsulfamoyl, N,N-dimethylsulfamoyl, N-[3-(dodecyloxy)propyl]sulfamoyl, N-[4-(2,4-di-t-pentylphenoxy)butyl]sulfamoyl, N-methyl-N-tetradecylsulfamoyl, and N-dodecylsulfamoyl; carbamoyl, such as N-methylcarbamoyl, N,N-dibutylcarbamoyl, N-octadecylcarbamoyl, N-[4-(2,4-di-t-pentylphenoxy)butyl]carbamoyl, N-methyl-N-tetradecylcarbamoyl, and N,N-di-octylcarbamoyl; acyl, such as acetyl, (2,4-di-t-amylphenoxy)acetyl, phenoxycarbonyl, p-dodecyloxyphenoxycarbonyl methoxycarbonyl, butoxycarbonyl, tetradecyloxycarbonyl, ethoxycarbonyl, benzyloxycarbonyl, 3-pentadecyloxycarbonyl, and dodecyloxycarbonyl; sulfonyl, such as methoxysulfonyl, octyloxysulfonyl, tetradecyloxysulfonyl, 2-ethylhexyloxysulfonyl, phenoxysulfonyl, 2,4-di-t-pentylphenoxysulfonyl, methylsulfonyl, octylsulfonyl, 2-ethylhexylsulfonyl, dodecylsulfonyl, hexadecylsulfonyl, phenylsulfonyl, 4-nonylphenylsulfonyl, and p-tolylsulfonyl; sulfonyloxy, such as dodecylsulfonyloxy, and hexadecylsulfonyloxy; sulfinyl, such as methylsulfinyl, octylsulfinyl, 2-ethylhexylsulfinyl, dodecylsulfinyl, hexadecylsulfinyl, phenylsulfinyl, 4-nonylphenylsulfinyl, and p-tolylsulfinyl; thio, such as ethylthio, octylthio, benzylthio, tetradecylthio, 2-(2,4-di-t-pentylphenoxy)ethylthio, phenylthio, 2-butoxy-5-t-octylphenylthio, and p-tolylthio; acyloxy, such as acetyloxy, benzyloxy, octadecanoyloxy, p-dodecylamidobenzyloxy, N-phenylcarbamoyloxy, N-ethylcarbamoyloxy, and cyclohexylcarbamoyloxy; amine, such as phenylanilino, 2-chloroanilino, diethylamine, dodecylamine; imino, such as 1 (N-phenylimido)ethyl, N-succinimido or 3-benzylhydantoinyl; phosphate, such as dimethylphosphate and ethylbutylphosphate; phosphite, such as diethyl and dihexylphosphite; a heterocyclic group, a heterocyclic oxy group or a heterocyclic thio group, each of which may be substituted and which contain a 3 to 7 membered heterocyclic ring composed of carbon atoms and at least one hetero atom selected from the group consisting of oxygen, nitrogen, sulfur, phosphorous, or boron. Such as 2-furyl, 2-thienyl, 2-benzimidazolyl or 2-benzothiazolyl; quaternary ammonium, such as triethylammonium; quaternary phosphonium, such as triphenylphosphonium; and silyloxy, such as trimethylsilyloxy.

[0103] If desired, the substituents may themselves be further substituted one or more times with the described substituent groups. The particular substituents used may be

selected by those skilled in the art to attain desirable properties for a specific application and can include, for example, electron-withdrawing groups, electron-donating groups, and steric groups. When a molecule may have two or more substituents, the substituents may be joined together to form a ring such as a fused ring unless otherwise provided. Generally, the above groups and substituents thereof may include those having up to 48 carbon atoms, typically 1 to 36 carbon atoms and usually less than 24 carbon atoms, but greater numbers are possible depending on the particular substituents selected.

#### General Device Architecture

[0104] The present invention can be employed in most OLED device configurations. These include very simple structures comprising a single anode and cathode to more complex devices, such as passive matrix displays comprised of orthogonal arrays of anodes and cathodes to form pixels, and active-matrix displays where each pixel is controlled independently, for example, with a thin film transistor (TFT).

[0105] There are numerous configurations of the organic layers wherein the present invention can be successfully practiced. Essential requirements are a cathode, an anode, a HTL and a LEL. A more typical structure is shown in **FIG. 1** for OLED **100**, and contains a substrate **110**, an anode **120**, an optional hole-injecting layer **130**, a hole-transporting layer **132**, a light-emitting layer **134**, an electron-transporting layer **136**, an optional electron-injecting layer **138** and a cathode **140**. These layers are described in detail below. Note that the substrate may alternatively be located adjacent to the cathode, or the substrate may actually constitute the anode or cathode. Also, the total combined thickness of the organic layers is preferably less than 500 nm.

[0106] The light-emitting layer can be constructed of a single layer or multiple layers. If a single layer, it can be fabricated to emit any color of light, with the selection chosen depending on the application, and most notably from the red, green and blue regions of the spectrum. If the device is required to emit white light, then several layers emitting different colors of light with sufficient spectral breadth are needed so that when combined, white light is formed.

[0107] The anode and cathode of the OLED are connected to a voltage/current source **150**, through electrical conductors **160**. Applying a potential between the anode and cathode such that the anode is at a more positive potential than the cathode operates the OLED. Holes are injected into the organic EL element from the anode. Enhanced device stability can sometimes be achieved when the OLED is operated in an AC mode where, for some time period in cycle, the potential bias is reversed and no current flows. An example of an AC driven OLED is described in U.S. Pat. No. 5,552,678.

#### Substrate

[0108] The substrate **110** can either be light transmissive or opaque, depending on the intended direction of light emission. The light transmissive property is desirable for viewing the EL emission through the substrate. Transparent glass or organic material are commonly employed in such cases. For applications where the EL emission is viewed through the top electrode, the transmissive characteristic of the bottom support is immaterial, and therefore can be light



transmissive, light absorbing or light reflective. Substrates for use in this case include, but are not limited to, glass, plastic, semiconductor materials, ceramics, and circuit board materials. Of course it is necessary to provide in these device configurations a light-transparent top electrode.

#### Anode

[0109] The conductive anode layer **120** is commonly formed over the substrate and, when EL emission is viewed through the anode, it should be transparent or substantially transparent to the emission of interest. Common transparent anode materials used in this invention are indium-tin oxide (ITO) and tin oxide, but other metal oxides can work including, but not limited to, aluminum- or indium-doped zinc oxide (IZO), magnesium-indium oxide, and nickel-tungsten oxide. In addition to these oxides, metal nitrides, such as gallium nitride, and metal selenides, such as zinc selenide, and metal sulfides, such as zinc sulfide, can be used in layer **120**. For applications where EL emission is viewed through the top electrode, the transmissive characteristics of layer **120** are immaterial and any conductive material can be used, transparent, opaque or reflective. Example conductors for this application include, but are not limited to, gold, iridium, molybdenum, palladium, and platinum. Typical anode materials, transmissive or otherwise, have a work function of 4.1 eV or greater. Desired anode materials are commonly deposited by any suitable means such as evaporation, sputtering, chemical vapor deposition, or electrochemical means. Anodes can be patterned using well-known photolithographic processes.

#### Hole-Injecting Layer (HIL)

[0110] While not always necessary, it is often useful that a hole-injecting layer **130** be provided between anode **120** and hole-transporting layer **132**. The hole-injecting material can serve to improve the film formation property of subsequent organic layers and to facilitate injection of holes into the hole-transporting layer. Suitable materials for use in the hole-injecting layer include, but are not limited to, porphyrinic compounds such as those described in U.S. Pat. No. 4,720,432, and plasma-deposited fluorocarbon polymers such as those described in U.S. Pat. No. 6,208,075. Alternative hole-injecting materials reportedly useful in organic EL devices are described in EP 0 891 121 A1 and EP 1 029 909 A1.

#### Hole-Transporting Layer (HTL)

[0111] The hole-transporting layer **132** of the organic EL device contains at least one hole-transporting compound such as an aromatic tertiary amine, where the latter is understood to be a compound containing at least one trivalent nitrogen atom that is bonded only to carbon atoms, at least one of which is a member of an aromatic ring. Additionally, the hole-transporting layer may be constructed of one or more layers such that each layer can be doped or un-doped with the same or different light emitting material. The thickness of the HTL can be any suitable thickness. It can be in the range of from 0.1 to 300 nm. In one form, the aromatic tertiary amine can be an arylamine, such as a monoarylamine, diarylamine, triarylamine, or a polymeric arylamine group. Exemplary monomeric triarylaminos are illustrated by Klupfel et al. U.S. Pat. No. 3,180,730. Other suitable triarylaminos substituted with one or more vinyl radicals and/or comprising at least one active hydrogen

containing group are disclosed by Brantley et al U.S. Pat. No. 3,567,450 and U.S. Pat. No. 3,658,520.

[0112] A more preferred class of aromatic tertiary amines are those which include at least two aromatic tertiary amine moieties as described in U.S. Pat. No. 4,720,432 and U.S. Pat. No. 5,061,569. Such compounds include those represented by structural formula (A).



wherein  $\text{Q}_1$  and  $\text{Q}_2$  are independently selected aromatic tertiary amine moieties and G is a linking group such as an arylene, cycloalkylene, or alkylene group of a carbon to carbon bond. In one embodiment, at least one of  $\text{Q}_1$  or  $\text{Q}_2$  contains a polycyclic fused ring group, e.g., a naphthalene. When G is an aryl group, it is conveniently a phenylene, biphenylene, or naphthalene group.

[0113] A useful class of triarylamine groups satisfying structural formula (A) and containing two triarylamine groups is represented by structural formula (B):



where


[0114]  $\text{R}_1$  and  $\text{R}_2$  each independently represents a hydrogen atom, an aryl group, or an alkyl group or  $\text{R}_1$  and  $\text{R}_2$  together represent the atoms completing a cycloalkyl group; and

[0115]  $\text{R}_3$  and  $\text{R}_4$  each independently represents an aryl group, which is in turn substituted with a diaryl substituted amino group, as indicated by structural formula (C):



wherein  $\text{R}_5$  and  $\text{R}_6$  are independently selected aryl groups. In one embodiment, at least one of  $\text{R}_5$  or  $\text{R}_6$  contains a polycyclic fused ring group, e.g., a naphthalene.

[0116] Another class of aromatic tertiary amine groups are the tetraaryldiamines. Desirable tetraaryldiamines groups include two diarylamino groups, such as indicated by formula (C), linked through an arylene group. Useful tetraaryldiamines include those represented by formula (D).



(D)

wherein

[0117] each Are is an independently selected arylene group, such as a phenylene or anthracene group,

[0118] n is an integer of from 1 to 4, and

[0119] Ar, R<sub>7</sub>, R<sub>8</sub>, and R<sub>9</sub> are independently selected aryl groups.

In a typical embodiment, at least one of Ar, R<sub>7</sub>, R<sub>8</sub>, and R<sub>9</sub> is a polycyclic fused ring group, e.g., a naphthalene

[0120] The various alkyl, alkylene, aryl, and arylene groups of the foregoing structural formulae (A), (B), (C) and (D), can each in turn be substituted. Typical substituents include alkyl groups, alkoxy groups, aryl groups, aryloxy groups, and halogen such as fluoride, chloride, and bromide. The various alkyl and alkylene groups typically contain from about 1 to 6 carbon atoms. The cycloalkyl moieties can contain from 3 to about 10 carbon atoms, but typically contain five, six, or seven ring carbon atoms—e.g., cyclopentyl, cyclohexyl, and cycloheptyl ring structures. The aryl and arylene groups are usually phenyl and phenylene moieties.

[0121] The hole-transporting layer can be formed of a single or a mixture of aromatic tertiary amine compounds. Specifically, one may employ a triarylamine, such as a triarylamine satisfying the formula (B), in combination with a tetraaryldiamine, such as indicated by formula (D). When a triarylamine is employed in combination with a tetraaryldiamine, the latter is positioned as a layer interposed between the triarylamine and the electron injecting and transporting layer. Illustrative of useful aromatic tertiary amines are the following:

[0122] 1,1-Bis(4-di-p-tolylaminophenyl)cyclohexane

[0123] 1,1-Bis(4-di-p-tolylaminophenyl)-4-phenylcyclohexane

[0124] 4,4'-Bis(diphenylamino)quadruphenyl

[0125] Bis(4-dimethylamino-2-methylphenyl)-phenylmethane

[0126] N,N,N-Tri(p-tolyl)amine

[0127] 4-(di-p-tolylamino)-4'-[4(di-p-tolylamino)-styryl]stilbene

[0128] N,N,N',N'-Tetra-p-tolyl-4,4'-diaminobiphenyl

[0129] N,N,N',N'-Tetraphenyl-4,4'-diaminobiphenyl

[0130] N,N,N',N'-tetra-1-naphthyl-4,4'-diaminobiphenyl

[0131] N,N,N',N'-tetra-2-naphthyl-4,4'-diaminobiphenyl

[0132] N-Phenylcarbazole

[0133] 4,4'-Bis[N-(1-naphthyl)-N-phenylamino]biphenyl (NPB)

[0134] 4,4'-Bis[N-(1-naphthyl)-N-(2-naphthyl)amino]biphenyl(TNB)

[0135] 4,4''-Bis[N-(1-naphthyl)-N-phenylamino]p-terphenyl

[0136] 4,4'-Bis[N-(2-naphthyl)-N-phenylamino]biphenyl

[0137] 4,4'-Bis [N-(3-acenaphthenyl)-N-phenylamino]biphenyl

[0138] 1,5-Bis[N-(1-naphthyl)-N-phenylamino]naphthalene

[0139] 4,4'-Bis [N-(9-anthryl)-N-phenylamino]biphenyl

[0140] 4,4''-Bis[N-(1-anthryl)-N-phenylamino]-p-terphenyl

[0141] 4,4'-Bis[N-(2-phenanthryl)-N-phenylamino]biphenyl

[0142] 4,4'-Bis[N-(8-fluoranthryl)-N-phenylamino]biphenyl

[0143] 4,4'-Bis[N-(2-pyrenyl)-N-phenylamino]biphenyl

[0144] 4,4'-Bis[N-(2-naphthacenyl)-N-phenylamino]biphenyl

[0145] 4,4'-Bis[N-(2-perylenyl)-N-phenylamino]biphenyl

[0146] 4,4'-Bis [N-(1-corononyl)-N-phenylamino]biphenyl

[0147] 2,6-Bis(di-p-tolylamino)naphthalene

[0148] 2,6-Bis[di-(1-naphthyl)amino]naphthalene

[0149] 2,6-Bis[N-(1-naphthyl)-N-(2-naphthyl)amino]naphthalene

[0150] N,N,N',N'-Tetra(2-naphthyl)-4,4''-diamino-p-terphenyl

[0151] 4,4'-Bis {N-phenyl-N-[4-(1-naphthyl)-phenyl]amino}biphenyl

[0152] 4,4'-Bis[N-phenyl-N-(2-pyrenyl)amino]biphenyl

[0153] 2,6-Bis[N,N-di(2-naphthyl)amine]fluorene

[0154] 1,5-Bis[N-(1-naphthyl)-N-phenylamino]naphthalene

[0155] 4,4',4''-tris[(3-methylphenyl)phenylamino]triphenylamine (MTDATA)

[0156] 4,4'-Bis[N-(3-methylphenyl)-N-phenylamino]biphenyl (TPD)

[0157] Another class of useful hole-transporting materials includes polycyclic aromatic compounds as described in EP 1 009 041. In addition, polymeric hole-transporting materials can be used such as poly(N-vinylcarbazole) (PVK), polythiophenes, polypyrrole, polyaniline, and copolymers such as poly(3,4-ethylenedioxythiophene)/poly(4-styrene-sulfonate) also called PEDOT/PSS.

Light-Emitting Layer (LEL)


[0158] As more fully described in U.S. Pat. Nos. 4,769, 292 and 5,935,721, the light-emitting layer (LEL) 134 of the organic EL element comprises a luminescent or fluorescent material where electroluminescence is produced as a result of electron-hole pair recombination in this region. The light-emitting layer can be comprised of a single material,

but more commonly consists of non-electroluminescent compounds doped with an electroluminescent guest compound or compounds where light emission comes primarily from the electroluminescent compound and can be of any color. The non-electroluminescent compound or compounds in the light-emitting layer can be an electron-transporting material, as defined below, a hole-transporting material, as defined above, or another material or combination of materials that support hole-electron recombination. The electroluminescent compound is usually chosen from highly fluorescent dyes, but phosphorescent compounds, e.g., transition metal complexes as described in WO 98/55561, WO 00/18851, WO 00/57676, and WO 00/70655 are also useful. Electroluminescent compounds can be coated as 0.01 to 50% into the non-electroluminescent component material, but typically coated as 0.01 to 30% and more typically coated as 0.01 to 15% into the non-electroluminescent component. The thickness of the LEL can be any suitable thickness. It can be in the range of from 0.1 nm to 100 nm.

[0159] An important relationship for choosing a dye as a electroluminescent component is a comparison of the band-gap potential which is defined as the energy difference between the highest occupied molecular orbital and the lowest unoccupied molecular orbital of the molecule. For efficient energy transfer from the non-electroluminescent compound to the electroluminescent compound molecule, a necessary condition is that the band gap of the electroluminescent compound is smaller than that of the non-electroluminescent compound or compounds.

[0160] Non-electroluminescent compounds and emitting molecules known to be of use include, but are not limited to, those disclosed in U.S. Pat. No. 4,768,292, U.S. Pat. No. 5,141,671, U.S. Pat. No. 5,150,006, U.S. Pat. No. 5,151,629, U.S. Pat. No. 5,405,709, U.S. Pat. No. 5,484,922, U.S. Pat. No. 5,593,788, U.S. Pat. No. 5,645,948, U.S. Pat. No. 5,683,823, U.S. Pat. No. 5,755,999, U.S. Pat. No. 5,928,802, U.S. Pat. No. 5,935,720, U.S. Pat. No. 5,935,721, and U.S. Pat. No. 6,020,078.

[0161] Metal complexes of 8-hydroxyquinoline and similar derivatives (Formula E) constitute one class of useful non-electroluminescent component compounds capable of supporting electroluminescence, and are particularly suitable for light emission of wavelengths longer than 500 nm, e.g., green, yellow, orange, and red.

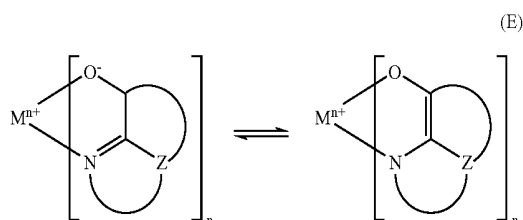

wherein

[0162] M represents a metal;

[0163] n is an integer of from 1 to 4; and

[0164] Z independently in each occurrence represents the atoms completing a nucleus having at least two fused aromatic rings.

[0165] From the foregoing it is apparent that the metal can be monovalent, divalent, trivalent, or tetravalent metal. The metal can, for example, be an alkali metal, such as lithium, sodium, or potassium; an alkaline earth metal, such as magnesium or calcium; an earth metal, such as aluminum or gallium, or a transition metal such as zinc or zirconium. Generally any monovalent, divalent, trivalent, or tetravalent metal known to be a useful chelating metal can be employed.

[0166] Z completes a heterocyclic nucleus containing at least two fused aromatic rings, at least one of which is an azole or azine ring. Additional rings, including both aliphatic and aromatic rings, can be fused with the two required rings, if required. To avoid adding molecular bulk without improving on function the number of ring atoms is usually maintained at 18 or less.

[0167] Illustrative of useful chelated oxinoid compounds are the following:

[0168] CO-1: Aluminum trisoxine[alias, tris(8-quinolinolato)aluminum(III)]

[0169] CO-2: Magnesium bisoxine[alias, bis(8-quinolinolato)magnesium(II)]

[0170] CO-3: Bis[benzo {f}-8-quinolinolato]zinc(II)

[0171] CO-4: Bis(2-methyl-8-quinolinolato)aluminum(III)-μ-oxo-bis(2-methyl-8-quinolinolato)aluminum(III)

[0172] CO-5: Indium trisoxine[alias, tris(8-quinolinolato)indium]

[0173] CO-6: Aluminum tris(5-methyloxine)[alias, tris(5-methyl-8-quinolinolato)aluminum(III)]

[0174] CO-7: Lithium oxine[alias, (8-quinolinolato)lithium(I)]

[0175] CO-8: Gallium oxine[alias, tris(8-quinolinolato)gallium(III)]

[0176] CO-9: Zirconium oxine[alias, tetra(8-quinolinolato)zirconium(IV)]

[0177] CO-10: Bis(2-methyl-8-quinolinolato)-4-phenylphenolatoaluminum(III)


[0178] Other electron-transporting materials include various butadiene derivatives as disclosed in U.S. Pat. No. 4,356,429 and various heterocyclic optical brighteners as described in U.S. Pat. No. 4,539,507. Benzazoles and triazines are also useful electron-transporting materials.

[0179] A preferred embodiment of the luminescent layer consists of a host material doped with fluorescent dyes. Using this method, highly efficient EL devices can be constructed. Simultaneously, the color of the EL devices can be tuned by using fluorescent dyes of different emission wavelengths in a common host material. Tang et al. in commonly assigned U.S. Pat. No. 4,769,292 has described this dopant scheme in considerable details for EL devices using Alq as the host material.

[0180] Shi et al. in commonly assigned U.S. Pat. No. 5,935,721 has described this dopant scheme in considerable details for the blue emitting OLED devices using 9,10-di-(2-naphthyl)anthracene (ADN) derivatives as the host material.

[0181] Derivatives of 9,10-di-(2-naphthyl)anthracene (Formula F) constitute one class of useful non-electroluminescent compounds capable of supporting electroluminescence, and are particularly suitable for light emission of wavelengths longer than 400 nm, e.g., blue, green, yellow, orange or red.

(F)

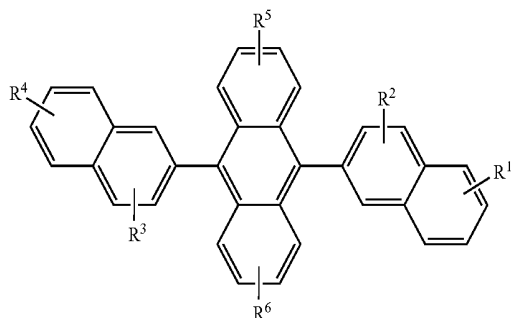

wherein:  $R^1$ ,  $R^2$ ,  $R^3$ ,  $R^4$ ,  $R^5$ , and  $R^6$  represent hydrogen or one or more substituents selected from the following groups:

[0182] Group 1: hydrogen, alkyl and alkoxy groups typically having from 1 to 24 carbon atoms;

[0183] Group 2: a ring group, typically having from 6 to 20 carbon atoms;


[0184] Group 3: the atoms necessary to complete a carbocyclic fused ring group such as naphthyl, anthracenyl, pyrenyl, and perylenyl groups, typically having from 6 to 30 carbon atoms;

[0185] Group 4: the atoms necessary to complete a heterocyclic fused ring group such as furyl, thienyl, pyridyl, and quinolynyl groups, typically having from 5 to 24 carbon atoms;

[0186] Group 5: an alkoxyamino, alkylamino, and arylamino group typically having from 1 to 24 carbon atoms; and

[0187] Group 6: fluorine, chlorine, bromine and cyano radicals.


[0188] Illustrative examples include 9,10-di-(2-naphthyl)anthracene (ADN) and 2-t-butyl-9,10-di-(2-naphthyl)anthracene (TBADN). Other anthracene derivatives can be useful as a non-electroluminescent compound in the LEL, such as diphenylanthracene and its derivatives, as described in U.S. Pat. No. 5,927,247. Styrylarylene derivatives as described in U.S. Pat. No. 5,121,029 and JP 08333569 are also useful non-electroluminescent materials for blue emission. For example, 9,10-bis[4-(2,2-diphenylethenyl)phenyl]anthracene, 4,4'-Bis(2,2-diphenylethenyl)-1,1'-biphenyl (DPVBi) and phenylanthracene derivatives as described in EP 681,019 are useful non-electroluminescent materials for blue emission. Another useful non-electroluminescent material capable of supporting electroluminescence for blue-light emission is H-1 and its derivatives shown as follows:

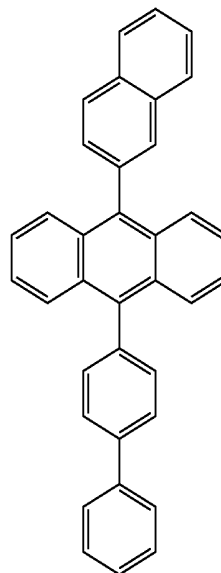

H-1

[0189] Benzazole derivatives (Formula G) constitute another class of useful non-electroluminescent components capable of supporting electroluminescence, and are particularly suitable for light emission of wavelengths longer than 400 nm, e.g., blue, green, yellow, orange or red.

(G)



where:

[0190]  $n$  is an integer of 3 to 8;

[0191]  $Z$  is  $-O-$ ,  $-NR-$  or  $-S-$  where  $R$  is H or a substituent; and


[0192]  $R'$  represents one or more optional substituents where  $R$  and each  $R'$  are H or alkyl groups such as propyl, t-butyl, and heptyl groups typically having from 1 to 24 carbon atoms; carbocyclic or heterocyclic ring groups such as phenyl and naphthyl, furyl, thienyl, pyridyl, and quinolynyl groups and atoms necessary to complete a fused aromatic ring group typically having from 5 to 20 carbon atoms; and halo such as chloro, and fluoro;

[0193]  $L$  is a linkage unit usually comprising an alkyl or aryl group which conjugately or unconjugately connects the multiple benzazoles together.


[0194] An example of a useful benzazole is 2,2',2''-(1,3,5-benzenetriyl)tris[1-phenyl-1H-benzimidazole], (TPBI).

[0195] Distyrylarylene derivatives as described in U.S. Pat. No. 5,121,029 are also useful non-electroluminescent component materials in the LEL.


[0196] Desirable fluorescent electroluminescent components include groups derived from fused ring, heterocyclic and other compounds such as anthracene, tetracene, xanthene, perylene, rubrene, pyran, rhodamine, quinacridone, dicyanomethylenepyran, thiopyran, polymethine, pyrilium thiapyrilium, and carbostyryl compounds. Illustrative examples of useful electroluminescent components include, but are not limited to, the following:




L1



L2




L3

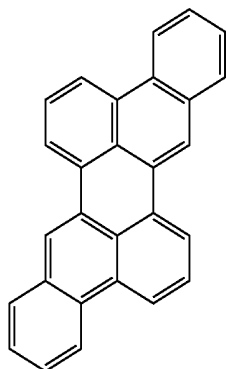


L4

-continued


L5

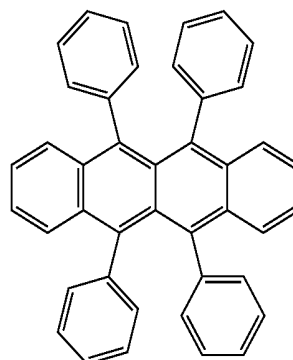



L6

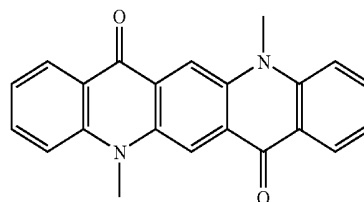

L7

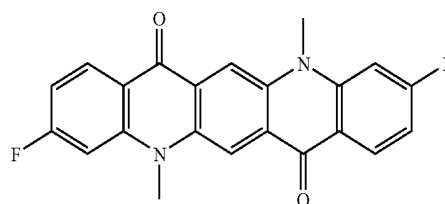


L8

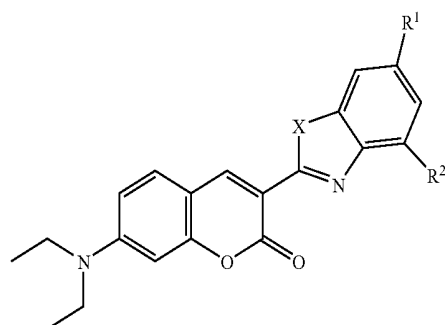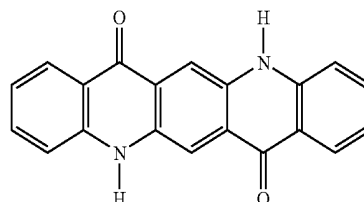


	X	R1	R2
L9	O	H	H
L10	O	H	Methyl
L11	O	Methyl	H
L12	O	Methyl	Methyl
L13	O	H	t-butyl
L14	O	t-butyl	H
L15	O	t-butyl	t-butyl
L16	S	H	H
L17	S	H	Methyl
L18	S	Methyl	H
L19	S	Methyl	Methyl
L20	S	H	t-butyl
L21	S	t-butyl	H
L22	S	t-butyl	t-butyl


-continued

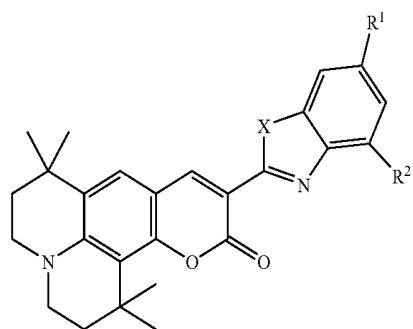

	X	R1	R2
L23	O	H	H
L24	O	H	Methyl
L25	O	Methyl	H
L26	O	Methyl	Methyl
L27	O	H	t-butyl
L28	O	t-butyl	H
L29	O	t-butyl	t-butyl
L30	S	H	H
L31	S	H	Methyl
L32	S	Methyl	H
L33	S	Methyl	Methyl
L34	S	H	t-butyl
L35	S	t-butyl	H
L36	S	t-butyl	t-butyl

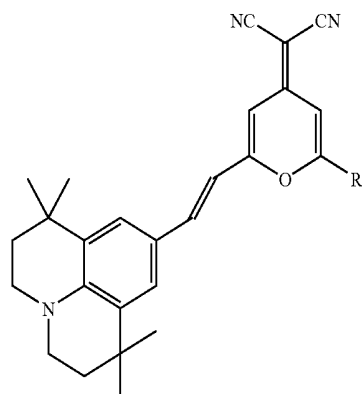


R  
 L37 phenyl  
 L38 methyl  
 L39 t-butyl  
 L40 mesityl

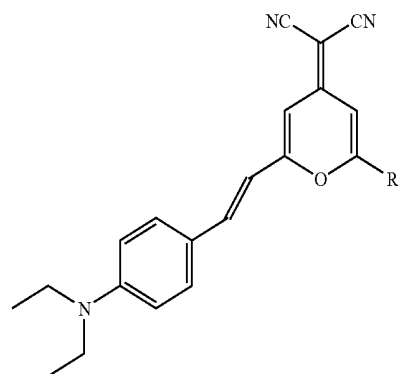


R  
 L41 phenyl  
 L42 methyl  
 L43 t-butyl  
 L44 mesityl


-continued




L45




L46



L47

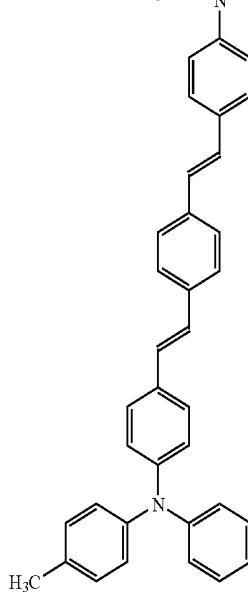


L48



[0197] Many blue fluorescent dopants are known in the art, and are contemplated for use in the practice of this invention. Blue dopants or light-emitting materials can be coated as 0.01 to 50% by weight into the host material, but typically coated as 0.01 to 30% and more typically coated as 0.01 to 15% by weight into the host material. The thickness of the blue-light emitting can be any suitable thickness. It

can be in the range of from 10 to 100 nm. Particularly useful classes of blue-emitting dopants include perylene and its derivatives such as 2,5,8,11-tetra-*tert*-butyl perylene (TBP), and distyrylamine derivatives as described in U.S. Pat. No. 5,121,029, such as L47 (structure shown above)

[0198] Another useful class of blue-emitting dopants is represented by Formula 2, known as a bis(azinyloamine borane complex, and is described in commonly assigned U.S. Pat. No. 6,661,023 (Feb. 9, 2003) by Benjamin P. Hoag et al., entitled "Organic Element for Electroluminescent Devices"; the disclosure of which is incorporated herein.

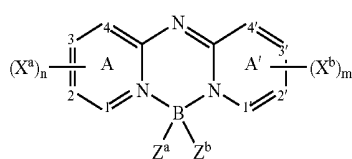

Formula 2

wherein:

[0199] A and A' represent independent azine ring systems corresponding to 6-membered aromatic ring systems containing at least one nitrogen;

[0200] each X<sup>a</sup> and X<sup>b</sup> is an independently selected substituent, two of which may join to form a fused ring to A or A';


[0201] m and n are independently 0 to 4;

[0202] Z<sup>a</sup> and Z<sup>b</sup> are independently selected substituents; and

[0203] 1, 2, 3, 4, 1', 2', 3', and 4' are independently selected as either carbon or nitrogen atoms.


[0204] Desirably, the azine rings are either quinolinyl or isoquinolinyl rings such that 1, 2, 3, 4, 1', 2', 3', and 4' are all carbon; m and n are equal to or greater than 2; and X<sup>a</sup> and X<sup>b</sup> represent at least two carbon substituents which join to form an aromatic ring. Desirably, Z<sup>a</sup> and Z<sup>b</sup> are fluorine atoms.

[0205] Preferred embodiments further include devices where the two fused ring systems are quinoline or isoquinoline systems; the aryl or heterocyclic substituent is a phenyl group; there are present at least two X<sup>a</sup> groups and two X<sup>b</sup> groups which join to form a 6-6 fused ring, the fused ring systems are fused at the 1-2, 3-4, 1'-2', or 3'-4' positions, respectively; one or both of the fused rings is substituted by a phenyl group; and where the dopant is depicted in Formulae 3, 4, or 5.

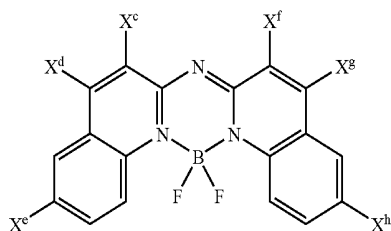


Formula 3

-continued

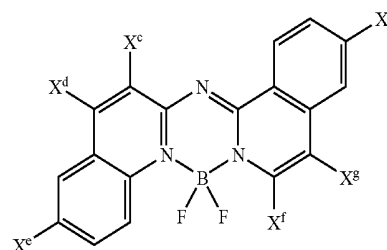

Formula 4

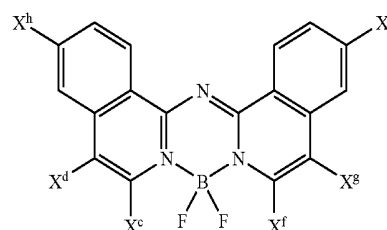


Formula 5


wherein each X<sup>c</sup>, X<sup>d</sup>, X<sup>e</sup>, X<sup>f</sup>, X<sup>g</sup>, and X<sup>h</sup> is hydrogen or an independently selected substituent, one of which must be an aryl or heterocyclic group.

[0206] Desirably, the azine rings are either quinolinyl or isoquinolinyl rings such that 1, 2, 3, 4, 1', 2', 3', and 4' are all carbon; m and n are equal to or greater than 2; and X<sup>a</sup> and X<sup>b</sup> represent at least two carbon substituents which join to form an aromatic ring, and one is an aryl or substituted aryl group. Desirably, Z<sup>a</sup> and Z<sup>b</sup> are fluorine atoms.

[0207] Illustrative, non-limiting examples of boron compounds complexed by two ring nitrogens of a deprotonated bis(azinyloamine ligand, wherein the two ring nitrogens are members of different 6,6 fused ring systems in which at least one of the systems contains an aryl or heterocyclic substituent, useful in the present invention are the following:

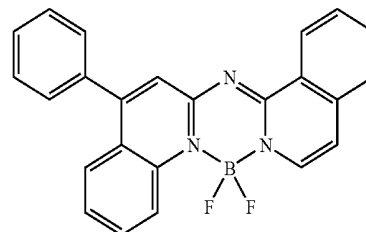


B-1

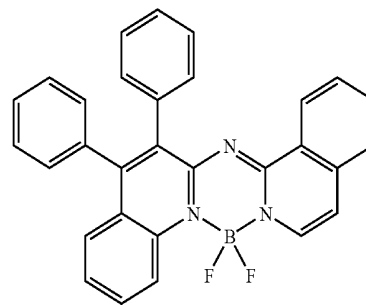


B-2


-continued

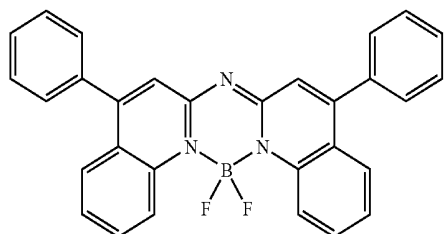


B-3




B-4



B-5

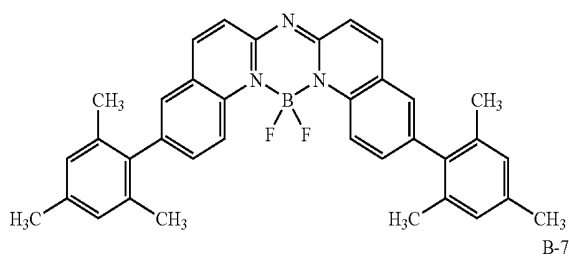

B-6

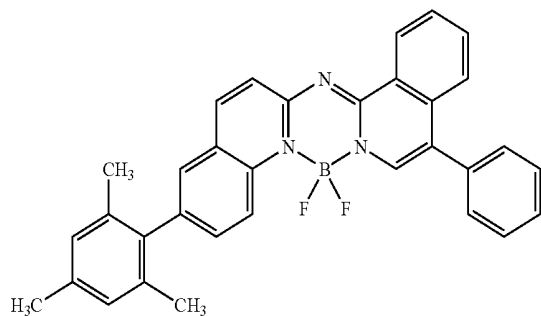


B-7


[0208] Coumarins represent a useful class of green-emitting dopants as described by Tang et al. in U.S. Pat. Nos. 4,769,292 and 6,020,078. Green dopants or light-emitting materials can be coated as 0.01 to 50% by weight into the host material, but typically coated as 0.01 to 30% and more typically coated as 0.01 to 15% by weight into the host

material. Examples of useful green-emitting coumarins include C545T and C545TB. Quinacridones represent another useful class of green-emitting dopants. Useful quinacridones are described in U.S. Pat. No. 5,593,788, publication JP 09-13026A, and commonly assigned U.S. patent application Ser. No. 10/184,356 filed Jun. 27, 2002 by Lelia Cosimbescu, entitled "Device Containing Green Organic Light-Emitting Diode", the disclosure of which is incorporated herein.

[0209] Examples of particularly useful green-emitting quinacridones are shown below:

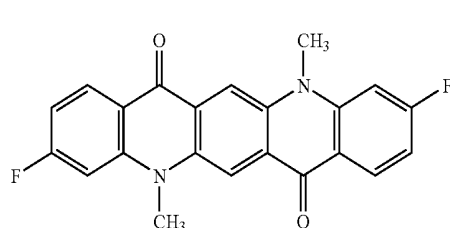


G-1

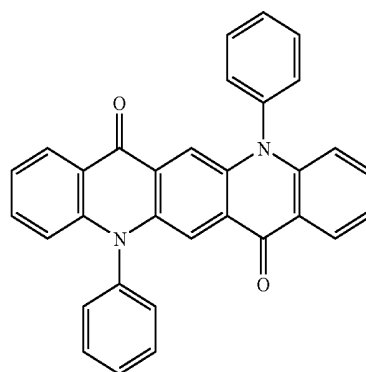

G-2

[0210] Formula 6 below represents another class of green-emitting dopants useful in the invention.



Formula 6

wherein:

[0211] A and A' represent independent azine ring systems corresponding to 6-membered aromatic ring systems containing at least one nitrogen;

[0212] each  $X^a$  and  $X^b$  is an independently selected substituent, two of which may join to form a fused ring to A or A';

[0213] m and n are independently 0 to 4;

[0214] Y is H or a substituent;


[0215]  $Z^a$  and  $Z^b$  are independently selected substituents; and




[0216] 1, 2, 3, 4, 1', 2', 3', and 4' are independently selected as either carbon or nitrogen atoms.

[0217] In the device, 1, 2, 3, 4, 1', 2', 3', and 4' are conveniently all carbon atoms. The device may desirably contain at least one or both of ring A or A' that contains substituents joined to form a fused ring. In one useful embodiment, there is present at least one X<sup>a</sup> or X<sup>b</sup> group selected from the group consisting of halide and alkyl, aryl, alkoxy, and aryloxy groups. In another embodiment, there is present a Z<sup>a</sup> and Z<sup>b</sup> group independently selected from the group consisting of fluorine and alkyl, aryl, alkoxy and aryloxy groups. A desirable embodiment is where Z<sup>a</sup> and Z<sup>b</sup> are F. Y is suitably hydrogen or a substituent such as an alkyl, aryl, or heterocyclic group.


[0218] The emission wavelength of these compounds may be adjusted to some extent by appropriate substitution around the central bis(aziny)methene boron group to meet a color aim, namely green. Some examples of useful formulas follow:




G-3




G-4



G-5




G-6



G-7

[0219] Naphthalenes and derivatives thereof also represent a useful class of emitting dopants, which can be used as stabilizers. These dopant materials can be coated as 0.01 to 50% by weight into the host material, but typically coated as 0.01 to 30% and more typically coated as 0.01 to 15% by weight into the host material. Naphthalene derivative Y-1 (alias t-BuDPN) below, is an example of a dopant material used as a stabilizer:

Y-1

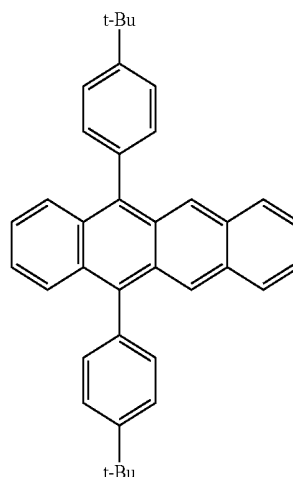

#### Electron-Transporting Layer (ETL)

[0220] Preferred thin film-forming materials for use in forming the electron-transporting layer of the organic EL devices of this invention are metal chelated oxinoid compounds, including chelates of oxine itself (also commonly referred to as 8-quinolinol or 8-hydroxyquinoline). Such compounds help to inject and transport electrons and exhibit both high levels of performance and are readily fabricated in the form of thin films. Exemplary of contemplated oxinoid compounds are those satisfying structural formula (E), previously described.

[0221] Other electron-transporting materials include various butadiene derivatives as disclosed in U.S. Pat. No. 4,356,429 and various heterocyclic optical brighteners as described in U.S. Pat. No. 4,539,507. Benzazoles satisfying structural formula (G) are also useful electron transporting materials.

[0222] In some instances, the electron transport and light emitting layers can optionally be collapsed into a single layer that serves the function of supporting both light emission and electron transportation. The thickness of the ETL can be any suitable thickness. It can be in the range of from 0.1 nm to 100 nm.

#### Cathode

[0223] When light emission is through the anode, the cathode layer 140 used in this invention can be comprised of nearly any conductive material. Desirable materials have good film-forming properties to ensure good contact with the underlying organic layer, promote electron injection at

low voltage, and have good stability. Useful cathode materials often contain a low work function metal ( $<4.0$  eV) or metal alloy. Cathode materials are comprised of Mg:Ag, Al:Li and Mg:Al alloys. One preferred cathode material is comprised of a Mg:Ag alloy wherein the percentage of silver is in the range of 1 to 20%, as described in U.S. Pat. No. 4,885,221. Another suitable class of cathode materials includes, bilayers comprised of a thin layer of a low work function metal or metal salt capped with a thicker layer of conductive metal. One such cathode is comprised of a thin layer of LiF followed by a thicker layer of Al as described in U.S. Pat. No. 5,677,572. Other useful cathode materials include, but are not limited to, those disclosed in U.S. Pat. No. 5,059,861, U.S. Pat. No. 5,059,862, and U.S. Pat. No. 6,140,763.

[0224] When light emission is viewed through the cathode, the cathode must be transparent or nearly transparent. For such applications, metals must be thin or one must use transparent conductive oxides, or a combination of these materials. Optically transparent cathodes have been described in more detail in U.S. Pat. No. 5,776,623. Cathode materials can be deposited by evaporation, sputtering, or chemical vapor deposition. When needed, patterning can be achieved through many well known methods including, but not limited to, through-mask deposition, integral shadow masking as described in U.S. Pat. No. 5,276,380 and EP 0 732 868, laser ablation, and selective chemical vapor deposition.

#### Deposition of Organic Layers

[0225] The organic materials mentioned above are suitably deposited through sublimation, but can be deposited from a solvent with an optional binder to improve film formation. If the material is a polymer, solvent deposition is usually preferred. The material to be deposited by sublimation can be vaporized from a sublimator "boat" often comprised of a tantalum material, e.g., as described in U.S. Pat. No. 6,237,529, or can be first coated onto a donor sheet and then sublimed in closer proximity to the substrate. Layers with a mixture of materials can utilize separate sublimator boats or the materials can be pre-mixed and coated from a single boat or donor sheet. Patterned deposition can be achieved using shadow masks, integral shadow masks (U.S. Pat. No. 5,294,870), spatially-defined thermal dye transfer from a donor sheet (U.S. Pat. No. 5,851,709 and U.S. Pat. No. 6,066,357) and inkjet method (U.S. Pat. No. 6,066,357).

[0226] Organic materials useful in making OLEDs, for example organic hole-transporting materials, organic light-emitting materials doped with an organic electroluminescent components have relatively complex molecular structures with relatively weak molecular bonding forces, so that care must be taken to avoid decomposition of the organic material(s) during physical vapor deposition. The aforementioned organic materials are synthesized to a relatively high degree of purity, and are provided in the form of powders, flakes, or granules. Such powders or flakes have been used heretofore for placement into a physical vapor deposition source wherein heat is applied for forming a vapor by

sublimation or vaporization of the organic material, the vapor condensing on a substrate to provide an organic layer thereon.

[0227] Several problems have been observed in using organic powders, flakes, or granules in physical vapor deposition: These powders, flakes, or granules are difficult to handle. These organic materials generally have a relatively low physical density and undesirably low thermal conductivity, particularly when placed in a physical vapor deposition source which is disposed in a chamber evacuated to a reduced pressure as low as  $10^{-6}$  Torr. Consequently, powder particles, flakes, or granules are heated only by radiative heating from a heated source, and by conductive heating of particles or flakes directly in contact with heated surfaces of the source. Powder particles, flakes, or granules which are not in contact with heated surfaces of the source are not effectively heated by conductive heating due to a relatively low particle-to-particle contact area; This can lead to non-uniform heating of such organic materials in physical vapor deposition sources. Therefore, result in potentially nonuniform vapor-deposited organic layers formed on a substrate.

[0228] These organic powders can be consolidating into a solid pellet. These solid pellets consolidating into a solid pellet from a mixture of a sublimable organic material powder are easier to handle. Consolidation of organic powder into a solid pellet can be accomplished with relatively simple tools. A solid pellet formed from mixture comprising one or more non-luminescent organic non-electroluminescent component materials or luminescent electroluminescent component materials or mixture of non-electroluminescent component and electroluminescent component materials can be placed into a physical vapor deposition source for making organic layer. Such consolidated pellets can be used in a physical vapor deposition apparatus.

[0229] In one aspect, the present invention provides a method of making an organic layer from compacted pellets of organic materials on a substrate, which will form part of an OLED.

[0230] One preferred method for depositing the materials of the present invention is described in US 2004/0255857 and U.S. Ser. No. 10/945,941 where different source evaporators are used to evaporate each of the materials of the present invention. A second preferred method involves the use of flash evaporation where materials are metered along a material feed path in which the material feed path is temperature controlled. Such a preferred method is described in the following co-assigned patent applications: U.S. Ser. No. 10/784,585; U.S. Ser. No. 10/805,980; U.S. Ser. No. 10/945,940; U.S. Ser. No. 10/945,941; U.S. Ser. No. 11/050,924; and U.S. Ser. No. 11/050,934. Using this second method, each material may be evaporated using different source evaporators or the solid materials may be mixed prior to evaporation using the same source evaporator.

#### Encapsulation

[0231] Most OLED devices are sensitive to moisture and/or oxygen so they are commonly sealed in an inert atmo-


sphere such as nitrogen or argon, along with a desiccant such as alumina, bauxite, calcium sulfate, clays, silica gel, zeolites, alkaline metal oxides, alkaline earth metal oxides, sulfates, or metal halides and perchlorates. Methods for encapsulation and desiccation include, but are not limited to, those described in U.S. Pat. No. 6,226,890.

[0232] The invention and its advantages are further illustrated by the specific examples that follow. The term “percentage” or “percent” and the symbol “%” indicate the volume percent (or a thickness ratio as measured on a thin film thickness monitor) of a particular first or second compound of the total material in the layer of the invention and other components of the devices. If more than one second compound is present, the total volume of the second compounds can also be expressed as a percentage of the total material in the layer of the invention. The entire contents of the patents and other publications referred to in this specification are incorporated herein by reference.

#### EXAMPLES

[0233] The inventions and its advantages are further illustrated by the specific examples that follow: Example 1 describes LUMO values; Example 2 describes synthesis; Example 3 describes device fabrication; Example 4 describes low voltage electron transport materials as defined in the invention reported as Samples 1-7; Example 5 describes inventive, control and comparison samples reported as Samples 8-31; Example 6 describes inventive and control samples reported as Samples 32-35; and Example 7 is a prior art comparison as Samples 36 and 37.

[0234] A-14, A-16, A-18, B-1, B-4 and B-5 are used as single compounds in control devices and as such their use falls outside the scope of the current invention. The combination of compounds B-1 and CBP and the combination of compounds A-16 and A-10 also fall outside the scope of the current invention and are used to show that not all combinations of materials give the desired results.

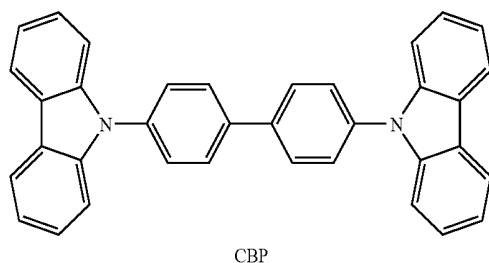

B-1, tris(8-quinolinolato)aluminum(III) and B-4,4,7-diphenyl-1,10-phenanthroline individually, are electron transport materials well known in the art. B-4, the electron transporting material and B-1, the electron injecting material are the subject of Embodiment 2 in US2002/0086180A1, wherein they are co-deposited at the deposition rate ratio of 1:1. Example 7 compares Embodiment 2 of US2002/0086180A1 to the current invention.

#### Example 1

##### LUMO Values

[0235] An important relationship exists when selecting the first compound(s) and second compound(s) of the invention. A comparison of the LUMO values of the first and second compounds in the layer of the invention, must be carefully considered. In devices of the invention, for there to be a drive voltage reduction over devices that contain only a first compound or only a second compound, there must be a difference in the LUMO values of the compounds. The first compound must have a lower LUMO value (more negative) than the second compound, or compounds (less negative).

[0236] The LUMO values are typically determined experimentally by electrochemical methods. A Model CHI660 electrochemical analyzer (CH Instruments, Inc., Austin, Tex.) was employed to carry out the electrochemical measurements. Cyclic voltammetry (CV) and Osteryoung square-wave voltammetry (SWV) were used to characterize the redox properties of the compounds of interest. A glassy carbon (GC) disk electrode ( $A=0.071 \text{ cm}^2$ ) was used as working electrode. The GC electrode was polished with 0.05  $\mu\text{m}$  alumina slurry, followed by sonication cleaning in Milli-Q deionized water twice and rinsed with acetone in between water cleaning. The electrode was finally cleaned and activated by electrochemical treatment prior to use. A platinum wire served as counter electrode and a saturated calomel electrode (SCE) was used as a quasi-reference electrode to complete a standard 3-electrode electrochemical cell. Ferrocene (Fc) was used as an internal standard ( $E_{\text{FC}}=0.50 \text{ V vs. SCE}$  in 1:1 acetonitrile/toluene, 0.1 M TBAF). Mixture of acetonitrile and toluene (50%/50% v/v, or 1:1) was used as organic solvent system. The supporting electrolyte, tetrabutylammonium tetrafluoroborate (TBAF) was recrystallized twice in isopropanol and dried under vacuum. All solvents used were low water grade ( $<20 \text{ ppm}$  water). The testing solution was purged with high purity nitrogen gas for approximately 5 minutes to remove oxygen and a nitrogen blanket was kept on the top of the solution during the course of the experiments. All measurements were performed at ambient temperature of  $25 \pm 1^\circ \text{C}$ . The oxidation and reduction potentials were determined either by averaging the anodic peak potential ( $E_{\text{p,a}}$ ) and cathodic peak potential ( $E_{\text{p,c}}$ ) for reversible or quasi-reversible electrode processes or on the basis of peak potentials (in SWV) for irreversible processes. All LUMO values pertaining to this application are calculated from the following:

Formal reduction potentials vs. SCE for reversible or quasi-reversible processes;

$$E_{\text{red}}^{\text{O}} = (E_{\text{p,a}} + E_{\text{p,c}}) / 2$$

Formal reduction potentials vs. Fc;

$$E_{\text{red}}^{\text{O}} \text{ vs. Fc} = (E_{\text{red}}^{\text{O}} \text{ vs. SCE}) - E_{\text{FC}}$$

where  $E_{Fc}$  is the oxidation potential  $E_{ox}$  of ferrocene;  
Estimated lower limit for LUMO;

$$LUMO = HOMO_{Fc} - (E_{red}^{O_1} \text{ vs. } Fc)$$

where  $HOMO_{Fc}$  (Highest Occupied Molecular Orbital for ferrocene) = -4.8 eV.

[0237] The LUMO values for some first and second compounds are listed in Table 1. To make a selection of compounds useful in the invention, the first compound should have a lower LUMO value than its paired second compound(s).



TABLE 1

LUMO Values for Representative Materials	
Material	LUMO (eV)
A-7/B-1	-2.50
A-8/B-2	-2.50
A-10	-2.44
A-11	-2.45
A-12	-2.40
A-13	-2.77
A-14	-2.83
A-15	-3.02
A-16	-2.72
A-17	-3.24
A-18	-2.52
A-19	-2.83
A-22	-2.35
B-4	-2.4
B-5	-2.3
B-6	-2.3

## Example 2

## Synthesis—Scheme 1

[0238]

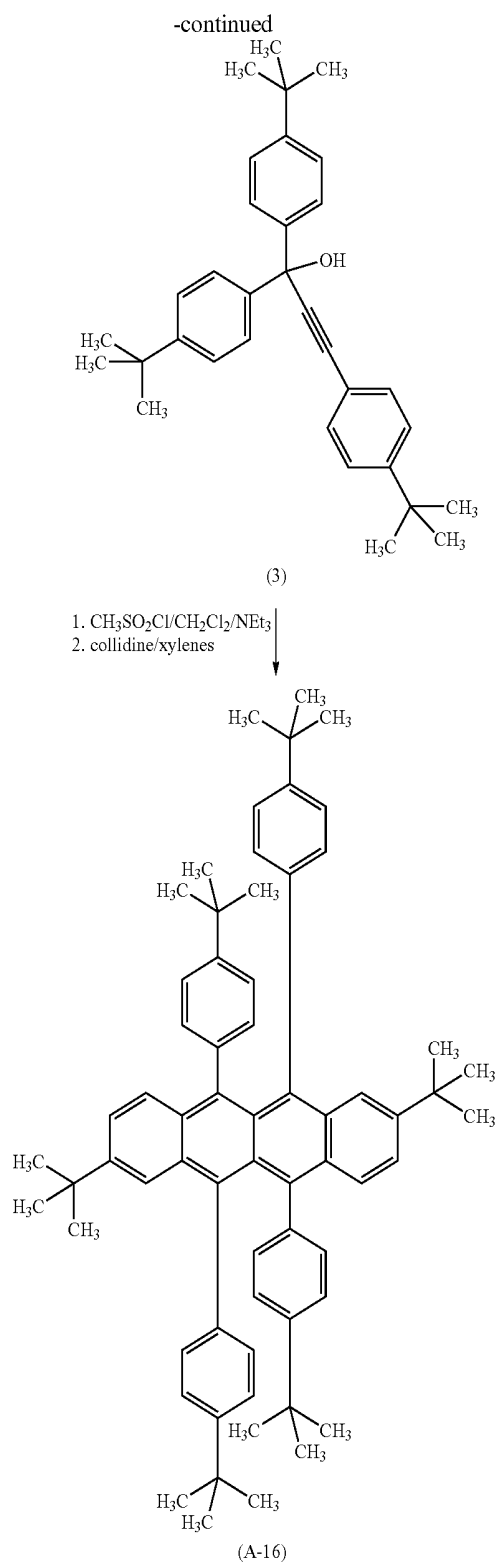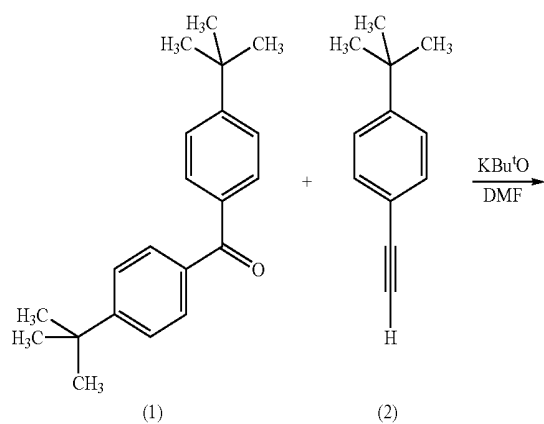

## Example 2

## Synthesis—Method

[0239] Preparation of compound (3): Under a nitrogen atmosphere, acetylenic compound (2) (2.0 g, 12 mMole), was dissolved in dimethylformamide (DMF) (100 mL) and

the solution cool to 0° C. Potassium t-butoxide (K<sup>t</sup>BuO) (1.4 g, 12 mMole), was added and the mixture stirred well for approximately 15 minutes. To this mixture was then added the benzophenone (1) (3.53 g, 30 mMole). Stirring was continued at 0° C. for approximately 30 minutes and then allowed to come to room temperature over a 1-hour period. At the end of this time the solution was cooled to 0° C. and the reaction treated with saturated sodium chloride (20 mL). The mixture was then diluted with ethyl acetate, washed with 2N—HCl (×3), dried over MgSO<sub>4</sub>, filtered and concentrated under reduced pressure. The crude product was triturated with petroleum ether to give the product as an off-white solid. Yield of compound (3), 3.0 g.

[0240] Preparation of Compound, A-16: Compound (3) (7.0 g, 15 mMole) was dissolved in methylene chloride (CH<sub>2</sub>Cl<sub>2</sub>) (70 mL), and stirred at 0° C. under a nitrogen atmosphere. To this solution was added triethylamine (NEt<sub>3</sub>) (1.56 g, 15 mMole) and then treated drop by drop with methanesulfonyl chloride (CH<sub>3</sub>SO<sub>2</sub>Cl) (1.92 g, 15 mMole), keeping the temperature of the reaction in the range 0-5° C. After the addition the solution was stirred at 0° C. for 30 minutes and then allowed to warm to room temperature over 1 hour. The reaction was then heated to reflux, distilling off the methylene chloride solvent and gradually replacing it with xylenes (a total of 70 mL). When the internal temperature of the reaction reached 80° C., collidine (2.40 g, 19.82 mMole), dissolved in xylenes (10 mL) was added drop by drop over a 10-minute period. The temperature was then raised to 110° C. and held at this temperature for 4 hours. After this period the reaction was cooled and concentrated under reduced pressure. The oily residue was stirred with methanol (70 mL) to give the crude product. This material was filtered off, washed with methanol and petroleum ether to give inventive compound A-16 as a bright red solid. Yield 1.5 g with a melting point of 300-305° C. The product may be further purified by sublimation (250° C. @ 200 millitorr) with a N<sub>2</sub> carrier gas.

### Example 3

#### EL Device Fabrication

[0241] EL devices satisfying the requirements of the invention and for the purposes of comparison, were constructed in the following manner:

[0242] A glass substrate coated with an 85 nm layer of indium-tin oxide (ITO) as the anode was sequentially ultrasonicated in a commercial detergent, rinsed in deionized water, degreased in toluene vapor and exposed to oxygen plasma for about 1 min.

[0243] a) Over the ITO was deposited a 1 nm fluorocarbon (CF<sub>x</sub>) hole-injecting layer (HIL) by plasma-assisted deposition of CHF<sub>3</sub>.

[0244] b) A hole-transporting layer (HTL) of N,N'-di-1-naphthalenyl-N,N'-diphenyl-4,4'-diaminobiphenyl (NPB) having a thickness of 75 nm was then evaporated onto a).

[0245] c) A 35 nm light-emitting layer (LEL) of tris(8-quinolinolato)aluminum (III) (Alq) was then deposited onto the hole-transporting layer.

[0246] d) A 35 nm electron-transporting layer (ETL) of the materials and amounts indicated in Tables 2-7 and 9 were then deposited onto the light-emitting layer.

[0247] e) On top of the ETL was deposited a 0.5 nm layer of LiF.

[0248] f) On top of the LiF layer was deposited a 130 nm layer of Al to form the cathode.

[0249] The above sequence completed the deposition of the EL device. The device was then hermetically packaged in a dry glove box for protection

### Example 4

#### Low Voltage Electron Transport Materials

[0250] The further layer as described in the invention contains a first compound and a second compound. The second compound is a low voltage electron-transporting compound. The combination of both the first and second compounds in the further layer of the invention in the aforementioned ratios, give devices that have reduced drive voltages that are even lower when compared to the devices in which either the first or second compound are incorporated alone in said layer.

[0251] Low voltage electron transport materials are materials that when incorporated alone into the electron transporting layer, as described in paragraph d) of the device of Example 3, result in drive voltages of 13 volts or less. Low voltage electron transport materials with drive voltages of 10 volts or less are also useful as second compounds of the invention while materials of 8 volts or less are preferred as second compounds. Materials tested for low drive voltages and the results are shown in Table 2.

TABLE 2

Low Voltage Electron Transport Materials			
Sample	Material	Type	Drive Voltage (volts)
1	B-1	Low	8.0
2	B-5	Low	9.9
3	B-6	Low	8.3
4	A-10	High	13.7
5	A-13	High	15.4
6	A-18	High	16.5
7	CBP	High	14.3

Table 2 shows that compounds B-1, B-5 and B-6 qualify as low voltage electron transport materials, while A-10, A-13, A-18 and CBP do not.

### Example 5

#### Inventive, Control and Comparison Samples

[0252] OLED devices satisfying the requirements of the invention were constructed as Samples 8 through Sample 31 in the same manner as Example 3 wherein the materials and their amounts in the layer of paragraph d) are reported in Tables 3 through 7.

TABLE 3

Test Results for EL Devices with 2% Li. Electron Transport Layer Containing a First Compound(A-14) and a Second Compound(B-1).						
Sample	Type	A-14/B-1 Vol. %	Li Vol. %	Drive Voltage (volts)	Yield (cd/A) <sup>1</sup>	Stability <sup>2</sup>
8	Control	0/98	2	6.9	3.27	65%
9	Control	98/0	2	7.2	3.19	65%
10	Inventive	24/74	2	5.7	2.7	68%
11	Inventive	49/49	2	5.7	3.07	66%
12	Inventive	74/24	2	6.4	3.12	64%

<sup>1</sup>Luminance yields reported at 20 mA/cm<sup>2</sup>.<sup>2</sup>Stability refers to the % of luminance remaining after the device has operated for 250 hours at 70° C. with a current density of 20 mA/cm<sup>2</sup>.

[0253]

TABLE 4

Test Results for EL Devices with 2% Li. Electron Transport Layer Containing a First Compound (A-16) and a Second Compound(B-1).						
Sample	Type	A-16/B-1 Vol. %	Li Vol. %	Drive Voltage (volts)	Yield (cd/A) <sup>1</sup>	Stability <sup>2</sup>
13	Control	0/98	2	6.2	3.51	68%
14	Control	98/0	2	9.3	3.24	67%
15	Inventive	24/74	2	5.4	3.44	71%
16	Inventive	49/49	2	5.1	3.40	68%
17	Inventive	74/24	2	5.3	3.28	67%

<sup>1</sup>Luminance yields reported at 20 mA/cm<sup>2</sup>.<sup>2</sup>Stability refers to the % of luminance remaining after the device has operated for 250 hours at 70° C. with a current density of 20 mA/cm<sup>2</sup>.

[0254]

TABLE 5

Test Results for EL Devices. Electron Transport Layer containing a First Compound(A-18) and a Second Compound (B-5).						
Sample	Type	A-18/B-5 Vol. %	Li Vol. %	Drive Voltage (volts)	Yield (cd/A) <sup>1</sup>	Stability <sup>2</sup>
18	Control	0/98	2	7.23	3.11	66%
19	Control	98/0	2	10.6	3.06	66%
20	Inventive	49/49	2	5.08	3.04	68%
21	Inventive	74/24	2	5.38	3.03	72%

<sup>1</sup>Luminance yields reported at 20 mA/cm<sup>2</sup>.<sup>2</sup>Stability refers to the % of luminance remaining after the device has operated for 240 hours at 70° C. with a current density of 20 mA/cm<sup>2</sup>.

[0255]

TABLE 6

Comparative Test Results for EL Devices. B-1 with a Lower LUMO Value than CBP.				
Sample	Type	B-1/CBP Vol. %	Li Vol. %	Drive Voltage (volts)
22	Control	0/98	2	13.9
23	Control	98/0	2	7.19

TABLE 6-continued

Comparative Test Results for EL Devices. B-1 with a Lower LUMO Value than CBP.				
Sample	Type	B-1/CBP Vol. %	Li Vol. %	Drive Voltage (volts)
24	Comparative	24/74	2	9.35
25	Comparative	49/49	2	8.0
26	Comparative	74/24	2	7.4

[0256]

TABLE 7

Comparative Test Results for EL Devices. A-16 with a Lower LUMO Value than A-10.				
Sample	Type	A-16/A-10 Vol. %	Li Vol. %	Drive Voltage (volts)
27	Control	0/98	2	9.1
28	Control	98/0	2	9.5
29	Comparative	24/74	2	9.2
30	Comparative	49/49	2	9.2
31	Comparative	74/24	2	9.4

The results shown in Tables 3, 4 and 5 show, that overall the devices of the invention have superior performance to their respective controls of 100% first or second compounds initially and after operating for a period of time. **FIGS. 2 and 3** further exemplify the superiority of the invention over the comparisons in terms of Drive Voltage in graphic form for Samples 13, 14, 15, 16, 17, 18, 19, 20, and 21 over a 250 to 300-hour period.

[0257] The results in Tables 6 and 7 show that not all combinations of materials give beneficial results. In Table 6, B-1 is classified as the first compound because it has a lower LUMO than CBP. However, CBP does not fulfill the requirements of the invention because being the second compound, it is not a low voltage electron transporting material as defined in the invention. In Table 7, A-16 is classified as the first compound because it has a lower LUMO than A-10. However, A-10 does not fulfill the requirements of the invention because being the second compound, it too is not a low voltage electron transporting material as defined in the invention.

## Example 6

## Inventive and Control Samples

[0258] EL devices satisfying the requirements of the invention and for the purposes of comparison, were constructed as Samples 32-35 in the following manner:

[0259] A glass substrate coated with an 85 nm layer of indium-tin oxide (ITO) as the anode was sequentially ultrasonicated in a commercial detergent, rinsed in deionized water, degreased in toluene vapor and exposed to oxygen plasma for about 1 min.

[0260] a) Over the ITO was deposited a 1 nm fluorocarbon (CF<sub>x</sub>) hole-injecting layer (HIL) by plasma-assisted deposition of CHF<sub>3</sub>.

[0261] b) A hole-transporting layer (HTL) of N,N'-di-1-naphthalenyl-N,N'-diphenyl-4,4'-diaminobiphenyl (NPB) having a thickness of 75 nm was then evaporated onto a).

[0262] c) A 35 nm light-emitting layer (LEL) of 9-(2-naphthyl)-10-(4-phenyl)phenylanthracene, (A-10), (95%); NPB(5%); and 2,5,8,11-tetra-tert-butylperylene, (A-18, TBP)(2%) was then deposited onto the hole-transporting layer.

[0263] d) A 35 nm electron-transporting layer (ETL) of a mixture of B-1, A-16 and Li in the amounts indicated in Table 8 was then deposited onto the light-emitting layer.

[0264] e) On top of the ETL was deposited a 0.5 nm layer of LiF.

[0265] f) On top of the LiF layer was deposited a 130 nm layer of Al to form the cathode.

[0266] The above sequence completed the deposition of the EL device. The device was then hermetically packaged in a dry glove box for protection.

TABLE 8

Test Results for EL Devices with 2% Li. Electron Transport Layer containing a First Compound(A-16) and a Second Compound (B-1).						
Sample	Type	A-16/B-1 Vol. %	Drive Voltage	Yield (cd/A) <sup>1</sup>	Stability <sup>2</sup>	Voltage Rise <sup>3</sup> (volts)
32	Control	0/98	7.5	4.76	72%	+0.7
33	Control	98/0	9.9	4.13	75%	+1.07
34	Inventive	24/74	6.8	4.6	80%	+0.49
35	Inventive	49/49	6.6	4.48	75%	+0.65

<sup>1</sup>Luminance yields reported at 20 mA/cm<sup>2</sup>.

<sup>2</sup>Stability refers to the % of luminance remaining after the device has operated for 240 hours at 70° C. with a current density of 20 mA/cm<sup>2</sup>.

<sup>3</sup>The voltage rise is the change in voltage that occurs after the device has operated for 240 hours at 70° C. with a current density of 20 mA/cm<sup>2</sup>.

Sample 32 is the OLED device with 98% of the second compound and 2%—Li, and Sample 33 is the OLED device with 98% of the first compound and 2%—Li. It can be seen from Table 8 that overall, Samples of the invention 34 and 35, are far superior to the controls in terms of drive voltage, stability and voltage rise.

### Example 7

#### Inventive and Comparison Samples

[0267] OLED devices satisfying the requirements of the invention were constructed as Samples 36 and Sample 37 in the same manner as Example 3 wherein the materials and their amounts in the layer of paragraph d) are reported in Table 9.

TABLE 9

Test Results for EL Devices with 2% Li. B-1/B-4 Comparison versus First Compound(A-16) and Second Compound (B-4).				
Sample	Type	B-1/B-4/Li Vol. %	A-16/B-4/Li Vol. %	Stability <sup>1</sup>
36	Comparison	49/49/2		66%
37	Inventive		49/49/2	79%

<sup>1</sup>Stability refers to the % of luminance remaining after the device has operated for 250 hours at 70° C. with a current density of 20 mA/cm<sup>2</sup>.

Table 9 shows that the stability of the current invention in Sample 37 is superior to comparison Sample 36.

[0268] The invention has been described in detail with particular reference to certain preferred embodiments thereof, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention. For example, multiple second compounds can be used in said further layer of the invention as long as they have the correct LUMO values in relation to the first compound. Different metals can be used as dopants. In addition, the invention can be used in devices emitting any colored light and said layer can be adjacent to other layers on either side, between the cathode and the LEL.

[0269] The patents and other publications referred to are incorporated herein in their entirety.

### Parts List

[0270] 100 OLED

[0271] 110 Substrate

[0272] 120 Anode

[0273] 130 Hole-Injecting layer (HIL)

[0274] 132 Hole-Transporting layer (HTL)

[0275] 134 Light-Emitting layer (LEL)

[0276] 136 Electron-Transporting layer (ETL)

[0277] 138 Electron-Injecting layer (EIL)

[0278] 140 Cathode

[0279] 150 Voltage/Current Source

[0280] 160 Electrical Connectors

1. An OLED device comprising a cathode, an anode, a light emitting layer, and on the cathode side of said emitting layer, a further layer containing

a) a first compound that has the lowest LUMO value of the compounds in the layer, in an amount greater than or equal to 10% by volume and less than 100% by volume of the layer;

b) at least one second compound exhibiting a higher LUMO value than the first compound, where at least one of the second compounds is a low voltage electron transport material, the total amount of such second compounds(s) is less than or equal to 90% by volume of the layer; and

c) a metallic material based on a metal having a work function less than 4.2 eV.

2. The OLED device of claim 1 wherein said further layer is adjacent to said emitting layer.

3. The OLED device of claim 1 wherein said further layer is adjacent to an electron-injecting layer, which is adjacent to the cathode.

4. The OLED device of claim 1 wherein said further layer is a non-emitting layer.


5. The OLED device of claim 1 wherein the further layer comprises a first compound and only one second compound.

6. The OLED device of claim 1 wherein the further layer comprises a first compound and two second compounds.

7. The OLED device of claim 1 wherein the first and second compounds are non-emitting.

8. The OLED device of claim 1 wherein the first and second compounds are selected from metal and non-metal chelated oxinoids, anthracenes, bipyrindyls, butadienes, imidazoles, phenanthrenes, phenanthrolines, styrylarylenes, benzazoles, buckminsterfullerene- $C_{60}$  (also known as buckyball or fullerene- $C_{60}$ ), tetracenes, xanthenes, perylenes, coumarins, rhodamines, quinacridones, dicyanomethylenepyrans, thiopyrans, polymethines, pyryliums, fluoranthenes, perflanthrenes, silacyclopentadienes or siloles, thiapyryliums, triazines, carbostyryls, metal and non-metal chelated bis(azinyl)amines, metal and non-metal chelated bis(azinyl)methenes.

9. The OLED device of claim 1 wherein the first compound is represented by Formula I:

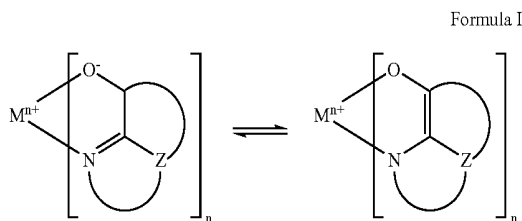

wherein

M represents a metal;

n is an integer of from 1 to 4; and

Z independently in each occurrence represents the atoms completing a nucleus having at least two fused aromatic rings.

10. The OLED device of claim 1 wherein the first compound is represented by Formula II:



wherein



M is a metal or non-metal;

Q in each occurrence represents a substituted 8-quinolinolato ligand;

$R^S$  represents an 8-quinolinolato ring substituent chosen to block sterically the attachment of more than two substituted 8-quinolinolato ligands to the aluminum atom; and

L is a phenyl or aromatic fused ring moiety, which can be substituted with hydrocarbon groups such that L has from 6 to 24 carbon atoms.

11. The OLED device of claim 1 wherein the first compound is represented by Formulae III or IV:

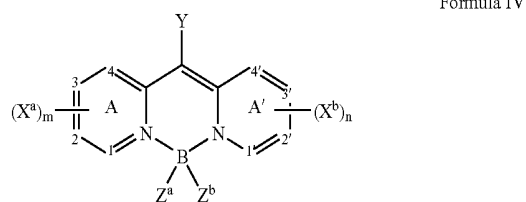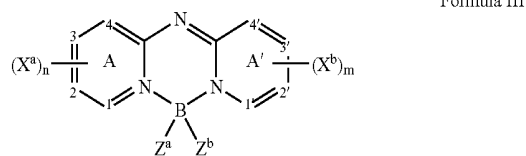

wherein:

A and A' represent independent azine ring systems corresponding to 6-membered aromatic ring systems containing at least one nitrogen;

each  $X^a$  and  $X^b$  is an independently selected substituent, two of which may join to form a fused ring to A or A';


m and n are independently 0 to 4;

$Z^a$  and  $Z^b$  are independently selected substituents;

Y is hydrogen or a substituent; and

1, 2, 3, 4, 1', 2', 3', and 4' are independently selected as either carbon or nitrogen atoms.

12. The OLED device of claim 1 wherein the first compound is represented by Formula V:

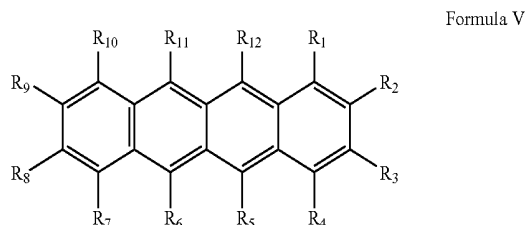

wherein:


$R_1, R_2, R_3, R_4, R_5, R_6, R_7, R_8, R_9, R_{10}, R_{11},$  and  $R_{12}$  are independently selected as hydrogen or substituents;

provided that any of the indicated substituents may join to form further fused rings.

13. The OLED device of claim 12 wherein at least one of  $R_1, R_2, R_3, R_4, R_5, R_6, R_7, R_8, R_9, R_{10}, R_{11},$  and  $R_{12}$  are independently selected from alkyl and aryl groups.



14. The OLED device of claim 1 wherein Formula VI represents the first compound:

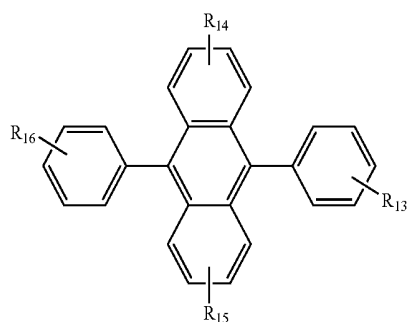

Formula VI

wherein:

R<sub>13</sub>, R<sub>14</sub>, R<sub>15</sub> and R<sub>16</sub> represent hydrogen or one or more substituents selected from the following groups:

Group 1: hydrogen, alkyl and alkoxy groups typically having from 1 to 24 carbon atoms;

Group 2: a ring group, typically having from 6 to 20 carbon atoms;


Group 3: the atoms necessary to complete a carbocyclic fused ring group such as naphthyl, anthracenyl, pyrenyl, and perylenyl groups, typically having from 6 to 30 carbon atoms;

Group 4: the atoms necessary to complete a heterocyclic fused ring group such as furyl, thienyl, pyridyl, and quinolinyl groups, typically having from 5 to 24 carbon atoms;


Group 5: an alkoxyamino, alkylamino, and arylamino group typically having from 1 to 24 carbon atoms; and

Group 6: fluorine, chlorine, bromine and cyano radicals.

15. The OLED device of claim 1 wherein the first compound is selected from the group consisting of:

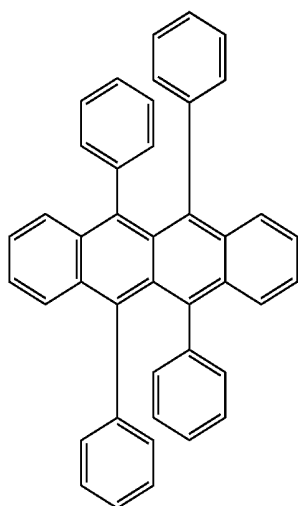


A-1

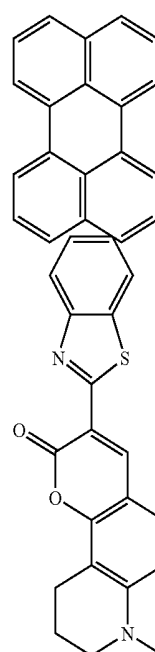


-continued


A-2

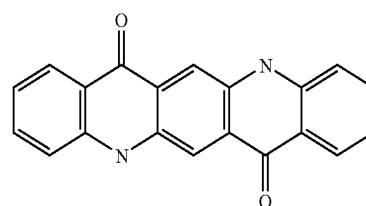


A-3

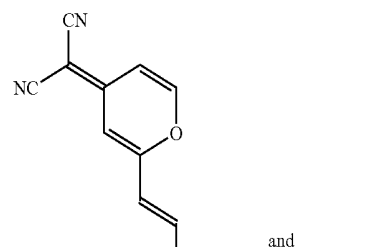

A-4




A-5

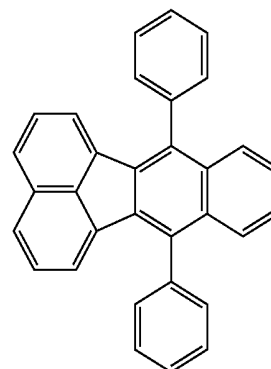

A-6


and wherein members of the group may be substituted.

16. The OLED device of claim 1 wherein the first compound is selected from the group consisting of:




-continued


A-13

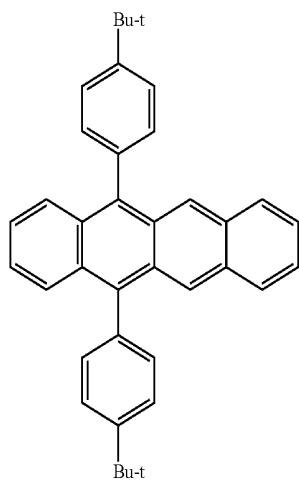


A-14

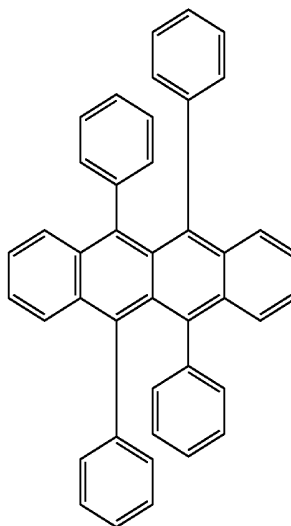


A-15

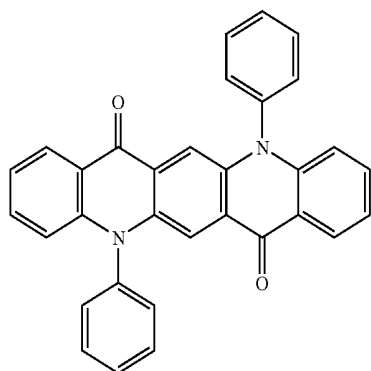


A-16

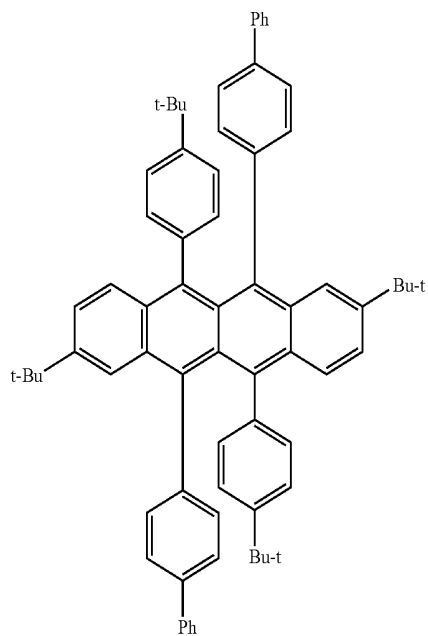



A-17

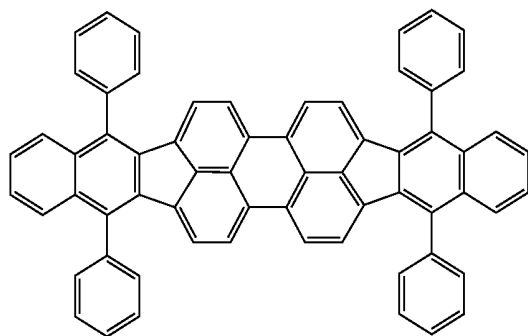

A-18




-continued

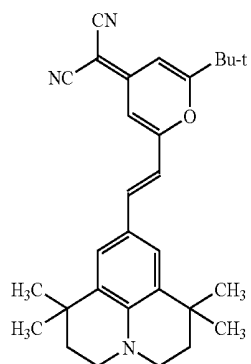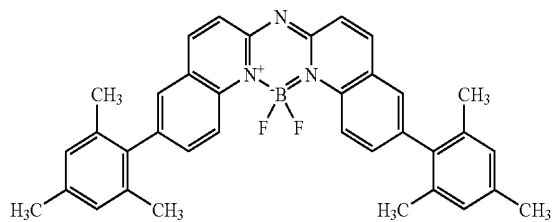


A-20


A-21

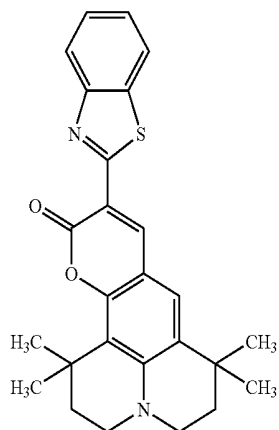

A-22

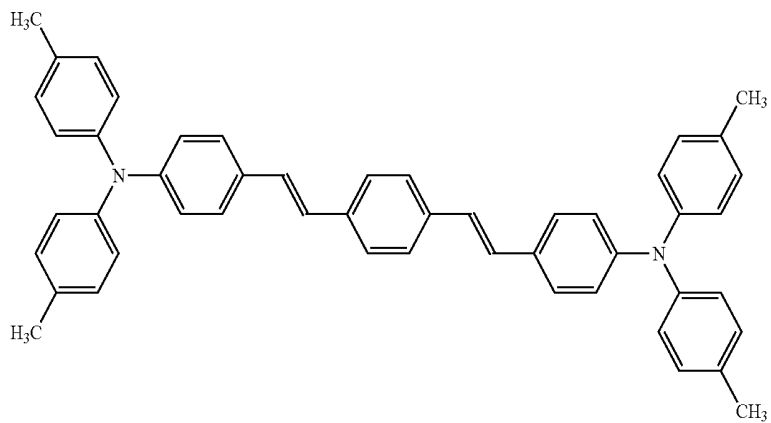


A-23

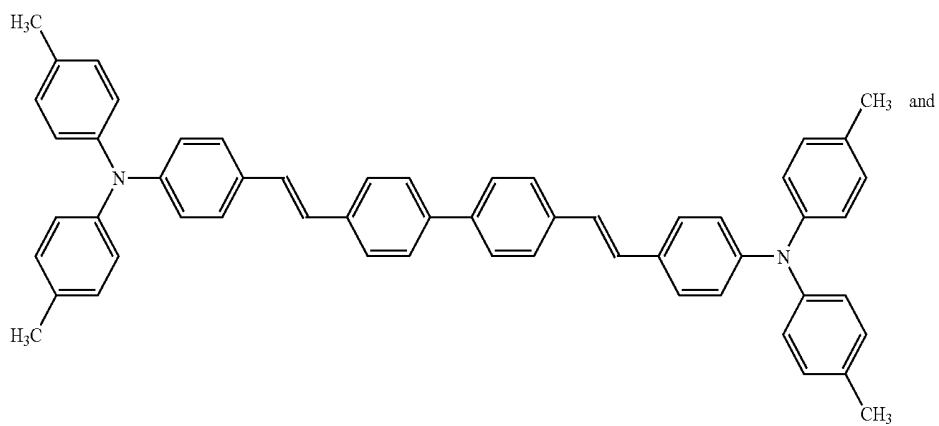

and


-continued

A-24

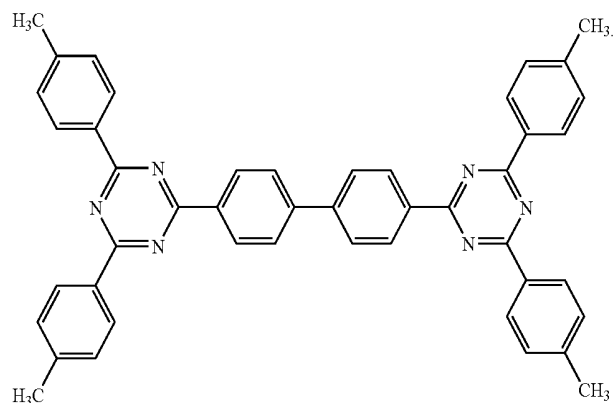


17. The OLED device of claim 1 wherein the second compound(s) comprise one represented by Formula I:

19. The OLED device of claim 1 wherein the second compound(s) comprise one represented by Formula VII:

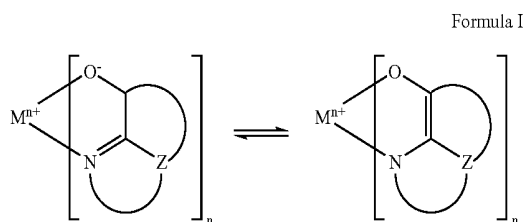

Formula VII



wherein

M represents a metal;

n is an integer of from 1 to 4; and

Z independently in each occurrence represents the atoms completing a nucleus having at least two fused aromatic rings.

18. The OLED device of claim 1 wherein the second compound(s) comprise one represented by Formula II:



wherein

M is a metal or non-metal;

Q in each occurrence represents a substituted 8-quinolinolato ligand;

R<sup>S</sup> represents an 8-quinolinolato ring substituent chosen to block sterically the attachment of more than two substituted 8-quinolinolato ligands to the aluminum atom; and


L is a phenyl or aromatic fused ring moiety, which can be substituted with hydrocarbon groups such that L has from 6 to 24 carbon atoms.

wherein

R<sub>17</sub>, R<sub>18</sub>, R<sub>19</sub>, R<sub>20</sub>, R<sub>21</sub>, R<sub>22</sub>, R<sub>23</sub> and R<sub>24</sub> are hydrogen or substituents; and

provided that any of the indicated substituents may join to form further fused rings.

20. The OLED device of claim 1 wherein the second compound(s) comprise one represented by Formula VIII:



wherein


m is an integer of from 3 to 8;

Z is O, NR<sub>29</sub>, or S;

$R_{25}$ ,  $R_{26}$ ,  $R_{27}$ ,  $R_{28}$  and  $R_{29}$  are hydrogen; alkyl of from 1 to 24 carbon atoms; aryl or hetero-atom substituted aryl of from 5 to 20 carbon atoms; or halo; or are the atoms necessary to complete a fused carbocyclic or heterocyclic ring; and

Y is a linkage unit usually comprising an alkyl or aryl group that conjugately or unconjugately connects the multiple benzazoles together.

**21.** The OLED device of claim 1 wherein the second compound(s) comprise one represented by Formula IX:




Formula IX

wherein

$R_{30}$ ,  $R_{31}$ , and  $R_{32}$  are hydrogen or substituents or are the atoms necessary to complete a fused carbocyclic or heterocyclic ring.

**22.** The OLED device of claim 1 wherein the second compound(s) comprise one represented by Formula X:



Formula X


wherein

k is an integer of from 1 to 4;


$R_{33}$  is hydrogen, substituents or carbocyclic or heterocyclic rings; and

Y is a linkage unit usually comprising an alkyl or aryl group that conjugately or unconjugately connects the multiple triazines together.


**23.** The OLED device of claim 1 wherein the second compound(s) comprise one selected from the group consisting of:




B-1

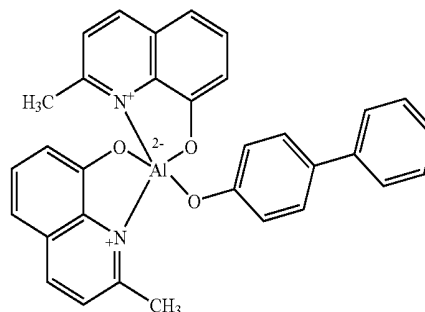

B-2




B-3

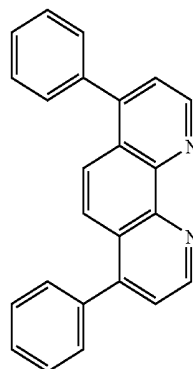


B-4


-continued  
B-5

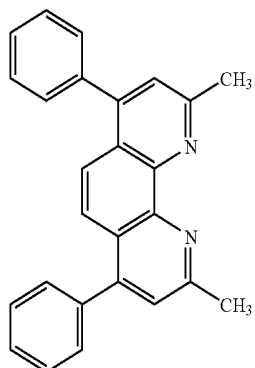


B-6

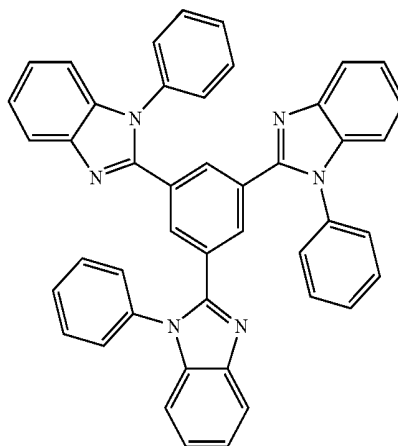



B-7

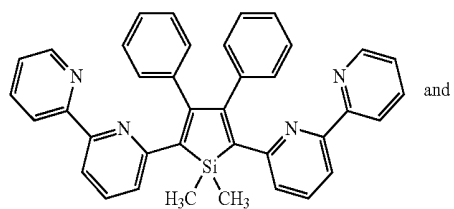


B-8

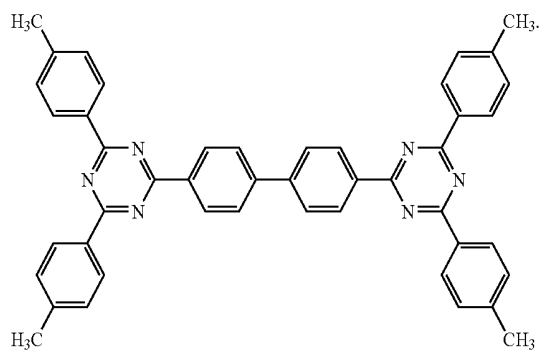




24. The OLED device of claim 1 wherein the first compound is selected from the group consisting of:

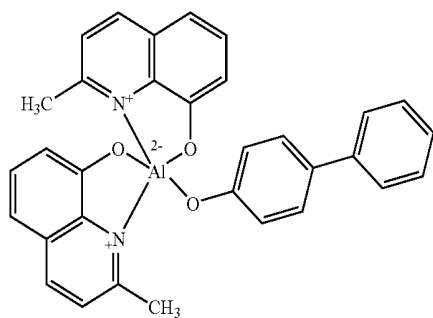



-continued

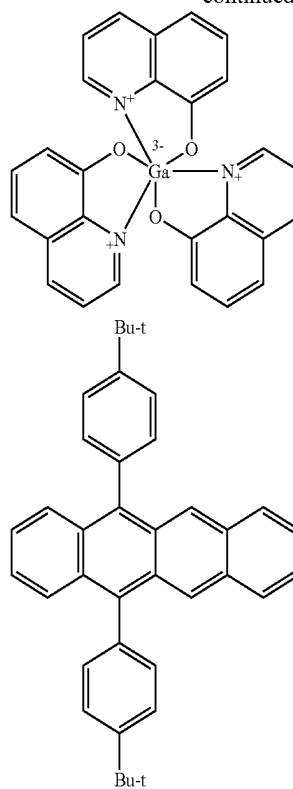



-continued

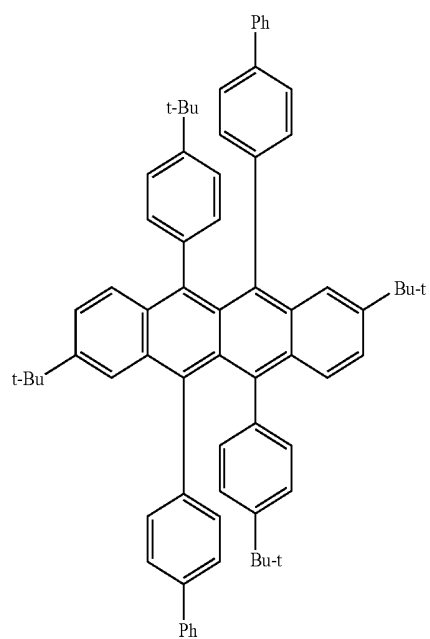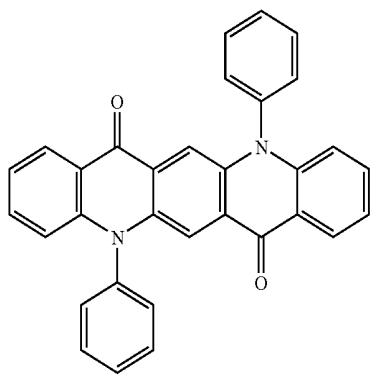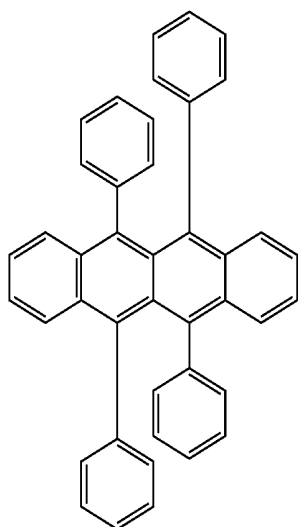

-continued



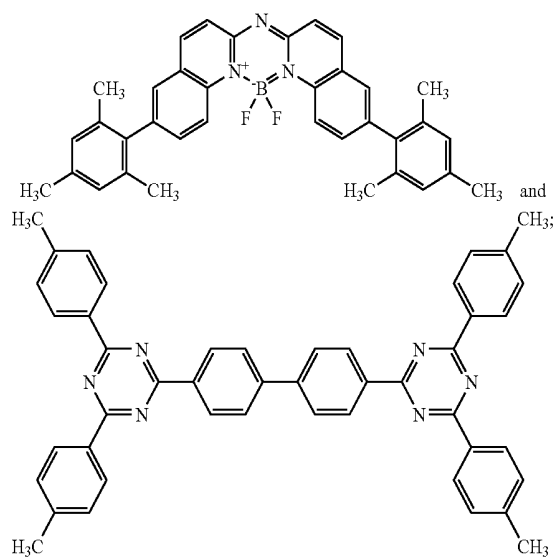



and the second compound is selected from the group consisting of:

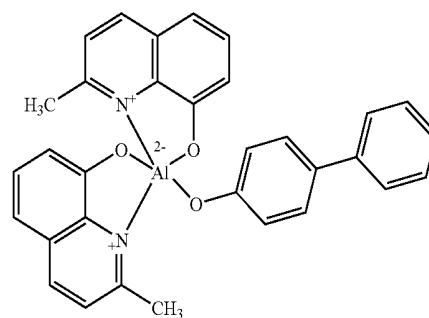





-continued

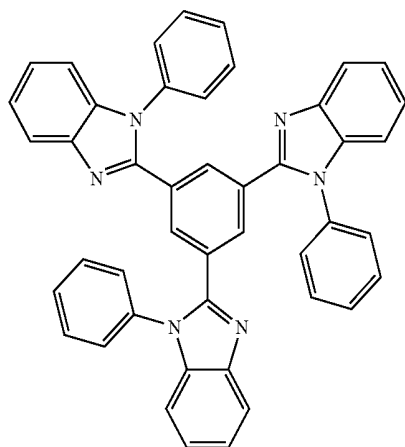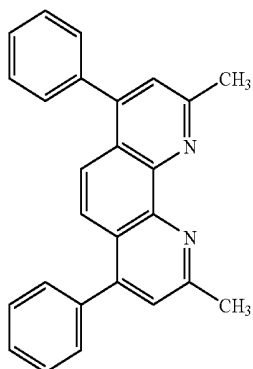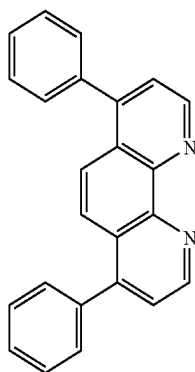

-continued

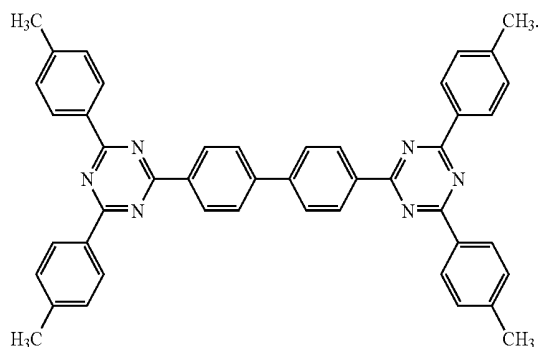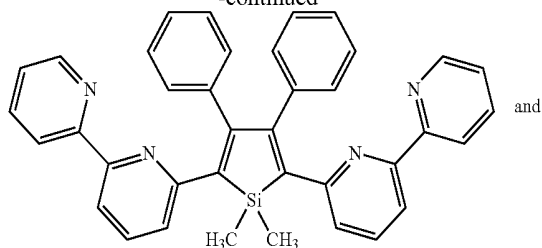

**25.** An OLED device comprising, in order:

- i) a substrate;
- ii) an anode;
- iii) a hole injecting layer;
- iv) a hole transport layer;
- v) a light emitting layer;
- vi) a further layer as described in claim 1 disposed over the light emitting layer; and
- vii) a cathode.

**26.** The device of claim 1 wherein the cathode is selected from the group consisting of LiF/Al, Mg:Ag alloy, Al—Li alloy, and Mg—Al alloy.

**27.** The OLED device of claim 1 wherein the first compound is present in an amount greater than or equal to 20% by volume and less than 100% by volume of the layer, the second compound(s) is present in an amount less than or equal to 80% by volume and more than 0% by volume of the layer and the metal is present in an amount greater than 0.1% and less than 10% of the layer.

**28.** The OLED device of claim 1 wherein the first compound is present in an amount greater than or equal to 40% by volume and less than 100% by volume of the layer, the second compound(s) is present in an amount less than or equal to 60% by volume and more than 0% by volume of the layer and the metal is present in an amount greater than 0.1% and less than 10% of the layer.

**29.** The OLED device of claim 1 wherein the first compound is present in an amount greater than or equal to 60% by volume and less than 100% by volume of the layer,

the second compound(s) is present in an amount less than or equal to 40% by volume and more than 0% by volume of the layer and the metal is present in an amount greater than 0.1% and less than 10% of the layer.

30. The OLED device of claim 1 wherein the first compound is present in an amount greater than or equal to 90% by volume and less than 100% by volume of the layer, the second compound(s) is present in a total amount less than or equal to 10% by volume and more than 0% by volume of the layer and the metallic material is present in an amount greater than 0.1% and less than 10% of the layer.

31. An OLED device comprising a cathode, an anode, a light emitting layer, and on the cathode side of said emitting layer, a further layer containing:

- a) a first compound that contains at least 2 fused rings and has the lowest LUMO value of the compounds in the layer, in an amount greater than or equal to 10% by volume of the layer;
- b) at least one second compound exhibiting a higher LUMO value than the first compound, where at least one of the second compounds is a low voltage electron transport material, the total amount of such second compounds(s) is less than or equal to 90% by volume of the layer; and

- c) a metallic material based on a metal having a work function less than 4.2 eV.

32. The OLED device of claim 31 wherein at least one of the fused rings is carbocyclic.

33. The OLED device of claim 31 wherein at least one of the fused rings is heterocyclic.

34. The OLED device of claim 1 wherein said metallic material in the further layer is an element or compound based on a metal selected from the alkali metals and alkaline earth metals.

35. The OLED device of claim 34 wherein the metal is selected from Li, Na, K, Rb, and Cs.

36. The OLED device of claim 34 wherein said metallic material based on an alkali metal or alkaline earth metal is present in the amount of from 0.1% to 15% by volume of the total material in the layer.

37. The OLED device of claim 36 wherein said further layer contains metallic material based on an alkali metal or an alkaline earth metal in an amount of from 0.1% to 10% by volume of the total material in the layer.

38. The OLED device of claim 36 wherein said further layer contains metallic material based on an alkali metal or an alkaline earth metal in an amount of from 1% to 8% by volume of the total material in the layer.

39. An OLED device comprising a cathode, an anode, a light emitting layer, and on the cathode side of said emitting layer, a further layer containing:

- a) a first compound that contains at least 3 fused rings and has the lowest LUMO value of the compounds in the layer, in an amount greater than or equal to 10% by volume of the layer;
- b) at least one second compound exhibiting a higher LUMO value than the first compound, where at least one of the second compounds is a low voltage electron

transport material, the total amount of such second compounds(s) is less than or equal to 90% by volume of the layer; and

- c) a metallic material based on a metal having a work function less than 4.2 eV.


40. The OLED device of claim 39 wherein at least one of the fused rings is carbocyclic.

41. The OLED device of claim 39 wherein at least one of the fused rings is heterocyclic.

42. An OLED device comprising, in order:

- i) a substrate;
- ii) an anode;
- iii) a hole transport layer;
- iv) a light emitting layer;
- v) an electron transport layer disposed over the light emitting layer as described in claim 1; and
- vi) a cathode.

43. The OLED device of claim 1 wherein the first compound is represented by Formula V:

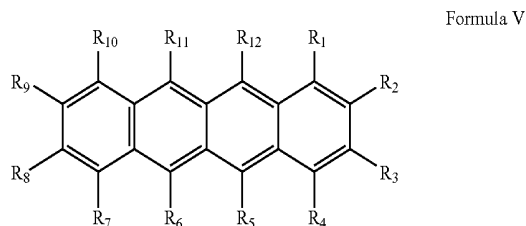


wherein:

$R_1$ ,  $R_2$ ,  $R_3$ ,  $R_4$ ,  $R_5$ ,  $R_6$ ,  $R_7$ ,  $R_8$ ,  $R_9$ ,  $R_{10}$ ,  $R_{11}$ , and  $R_{12}$  are independently selected as hydrogen or substituents;

provided that any of the indicated substituents may join to form further fused rings;

and the second compound is represented by Formula I:

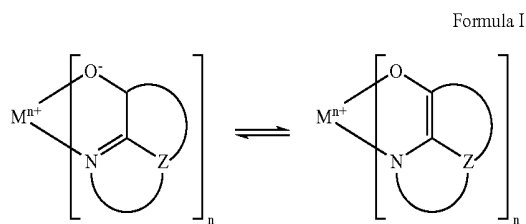

wherein

M represents a metal or non-metal;

n is an integer of from 1 to 4; and

Z independently in each occurrence represents the atoms completing a nucleus having at least two fused aromatic rings.

\* \* \* \* \*

专利名称(译)	具有混合电子传输材料的有机发光器件		
公开(公告)号	<a href="#">US20060204784A1</a>	公开(公告)日	2006-09-14
申请号	US11/077218	申请日	2005-03-10
[标]申请(专利权)人(译)	贝格利WILLIAM J hatwar tukaram K YOUNG RALPH H ANDRIEVSKY娜塔莎		
申请(专利权)人(译)	贝格利WILLIAM J hatwar tukaram K YOUNG RALPH H ANDRIEVSKY娜塔莎		
当前申请(专利权)人(译)	伊士曼柯达公司		
[标]发明人	BEGLEY WILLIAM J HATWAR TUKARAM K YOUNG RALPH H ANDRIEVSKY NATASHA		
发明人	BEGLEY, WILLIAM J. HATWAR, TUKARAM K. YOUNG, RALPH H. ANDRIEVSKY, NATASHA		
IPC分类号	H01L51/54 H05B33/12		
CPC分类号	H01L51/0052 H01L51/0059 H01L51/0062 H01L51/0081 H01L51/5048 H01L51/5052		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

# 摘要(译)

OLED器件包括阴极，阳极，发光层，并且在所述发光层的阴极侧上，包含a) 第一化合物的另一层，所述第一化合物具有层中化合物的最低LUMO值，其量为大于或等于10% ( 体积 ) 且小于100% ( 体积 ) 的层；b) 至少一种第二化合物，其具有比第一化合物更高的LUMO值，其中至少一种第二化合物是低电压电子传输材料，这种第二化合物的总量小于或等于90层的体积%；c) 基于功函数小于4.2eV的金属的金属材料。

Formula I

