



US 20060078760A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2006/0078760 A1**

Ragini et al. (43) **Pub. Date: Apr. 13, 2006**

(54) **CYCLOMETALATED TRANSITION METAL COMPLEX AND ORGANIC ELECTROLUMINESCENT DISPLAY DEVICE USING THE SAME**

(30) **Foreign Application Priority Data**

Oct. 11, 2004 (KR)..... 10-2004-0081060

Publication Classification

(76) Inventors: **Das Rupasree Ragini**, Suwon-si (KR); **Seok Chang**, Daejeon-si (KR); **Yi-Yeol Lyu**, Yongin-si (KR); **Eun-Sil Han**, Yongin-si (KR); **Young-Hun Byun**, Yongin-si (KR); **Lyong-Sun Pu**, Suwon-si (KR); **Jong-Hyoup Lee**, Seoul (KR)

(51) **Int. Cl.**
H01L 51/54 (2006.01)
H05B 33/14 (2006.01)
C09K 11/06 (2006.01)
C07D 401/00 (2006.01)
(52) **U.S. Cl.** **428/690**; 428/917; 313/504; 313/506; 257/E51; 548/101; 548/108; 546/2; 546/4; 546/10

Correspondence Address:
Robert E. Bushnell
Attorney-at-Law
Suite 300
1522 "K" Street, N.W.
Washington, DC 20005-1202 (US)

(57) **ABSTRACT**

A cyclometalated transition metal complex exhibiting phosphorescence with high efficiency and an organic electroluminescent display device using the same are provided. This transition metal complex can be used in forming an organic film of an organic electroluminescent display device. The transition metal complex can emit light at the wavelength range of 400 to 650 nm. Further, the complex can emit white light by using a green light emitting material or a red light emitting material together.

(21) Appl. No.: **11/219,820**

(22) Filed: **Sep. 7, 2005**

FIG. 1

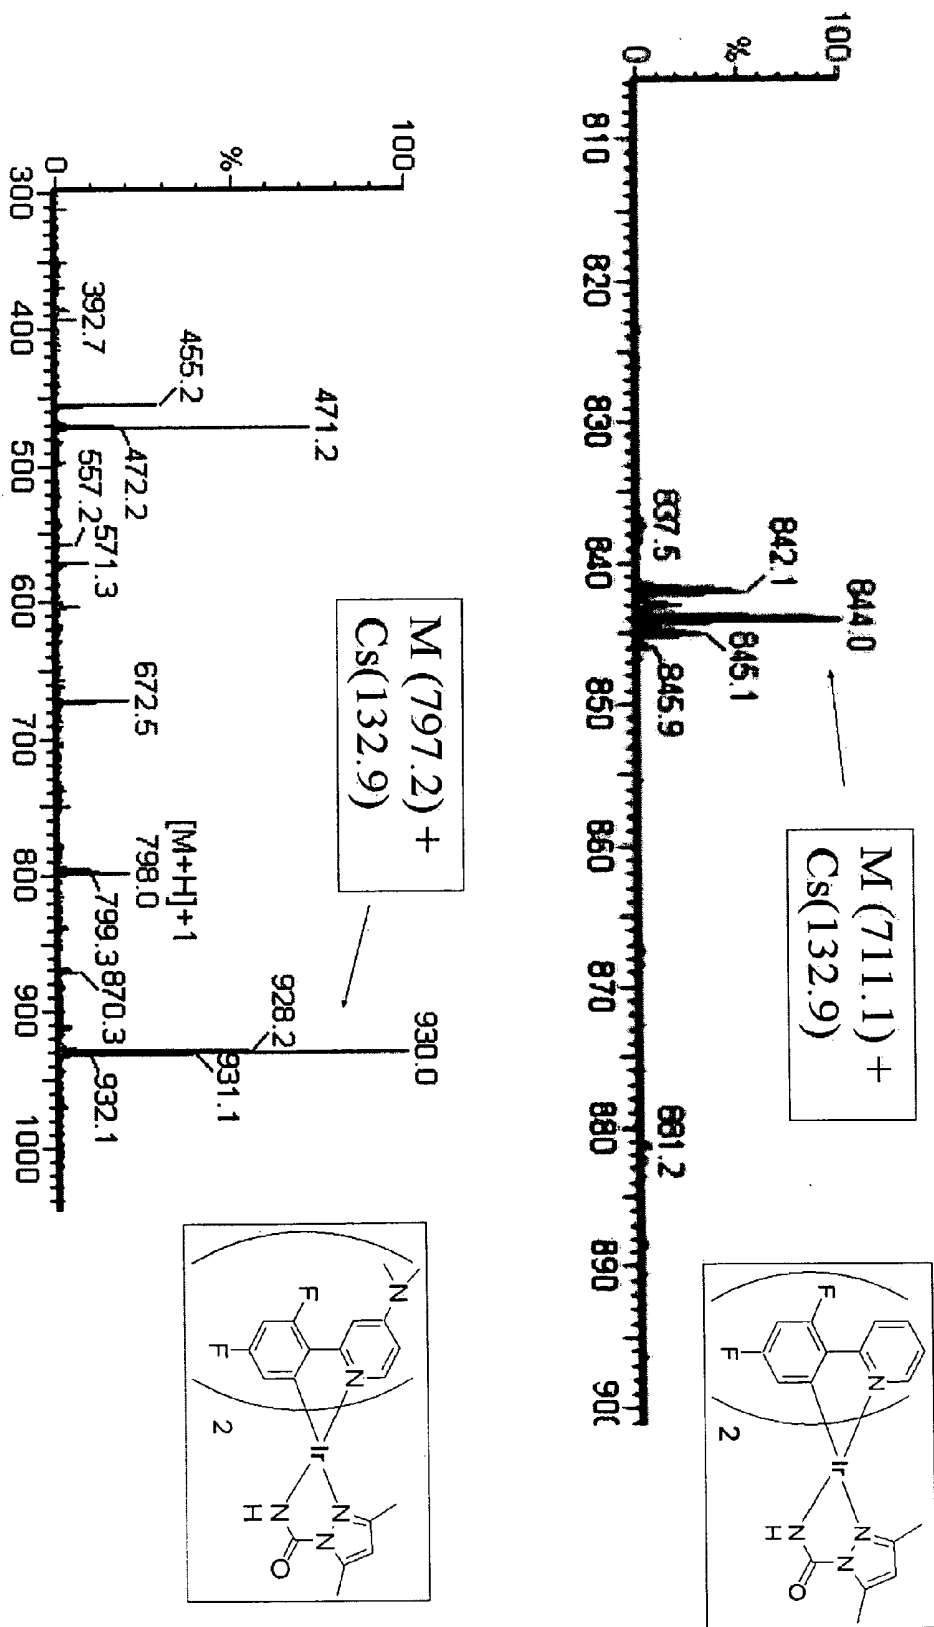


FIG. 2

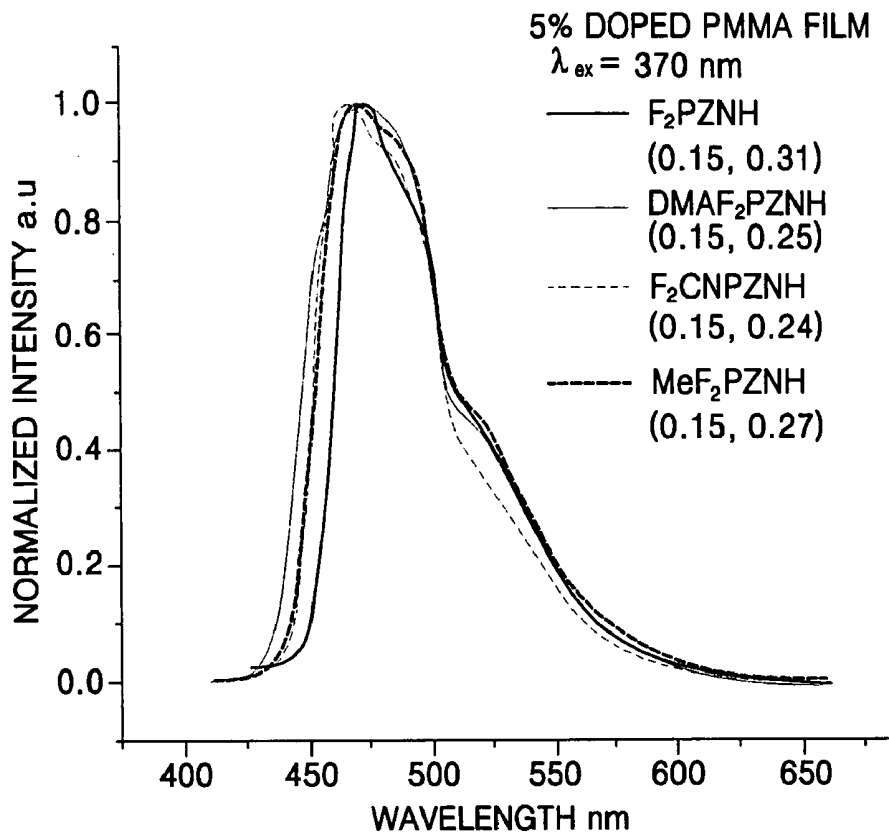


FIG. 3

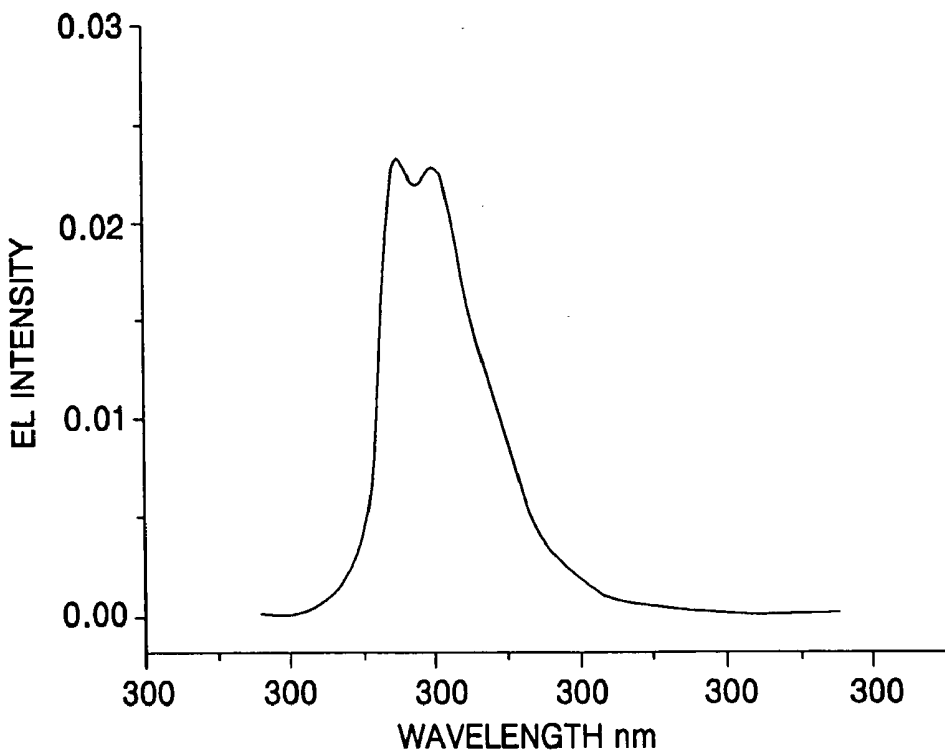


FIG. 4

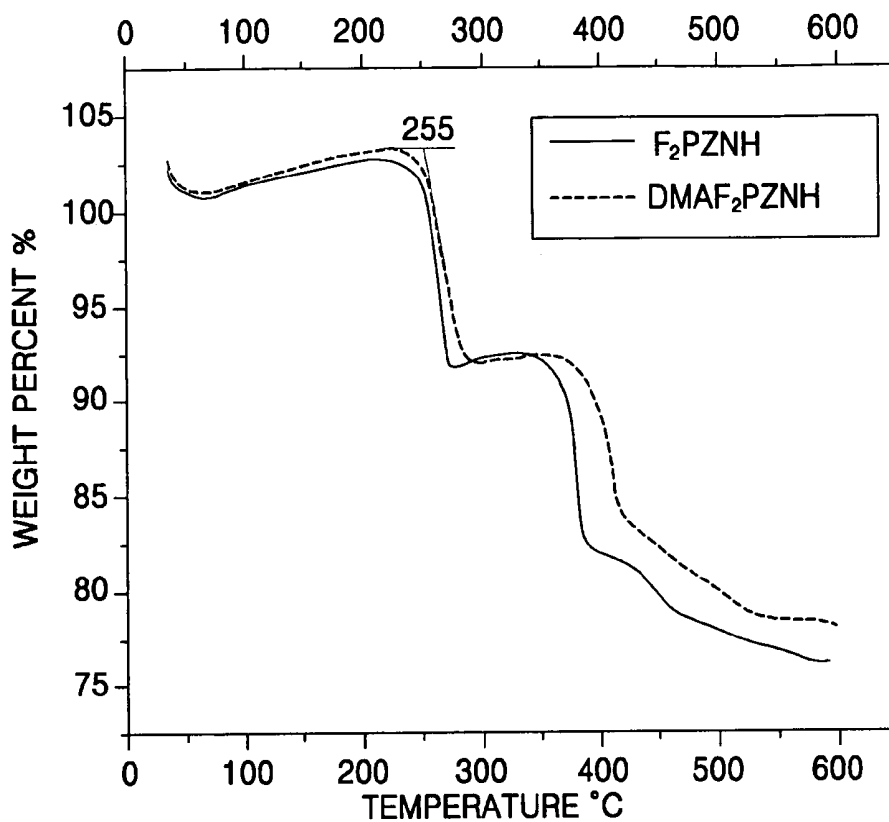


FIG. 5A

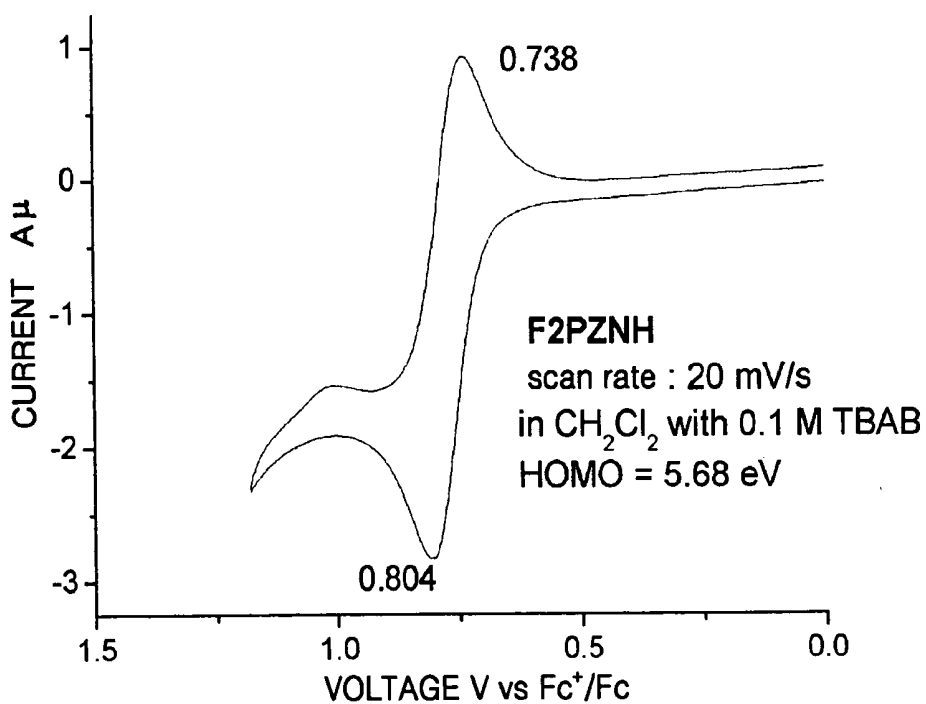


FIG. 5B

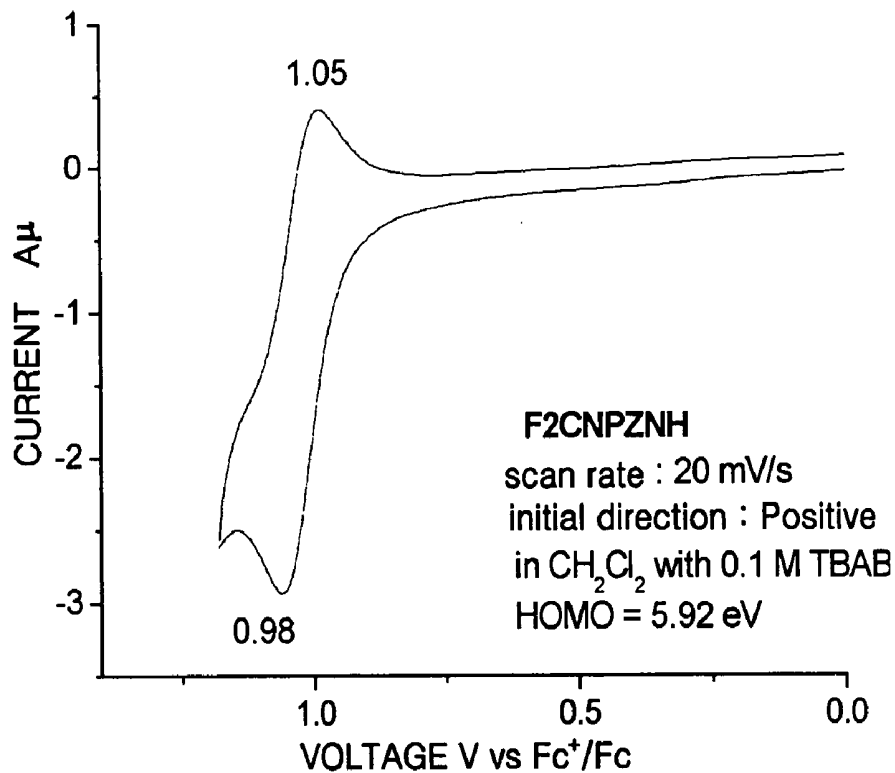


FIG. 6

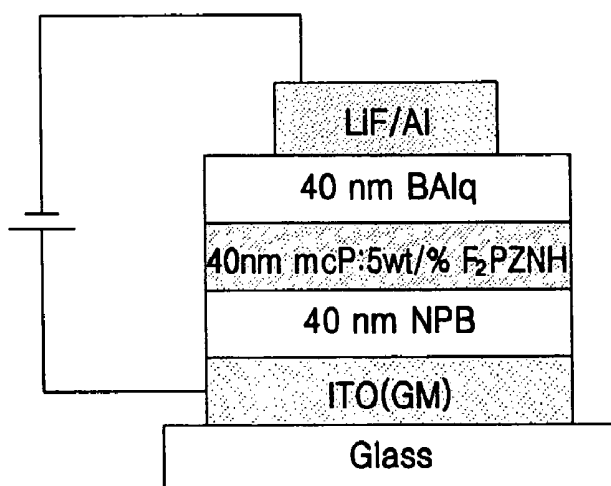


FIG. 7

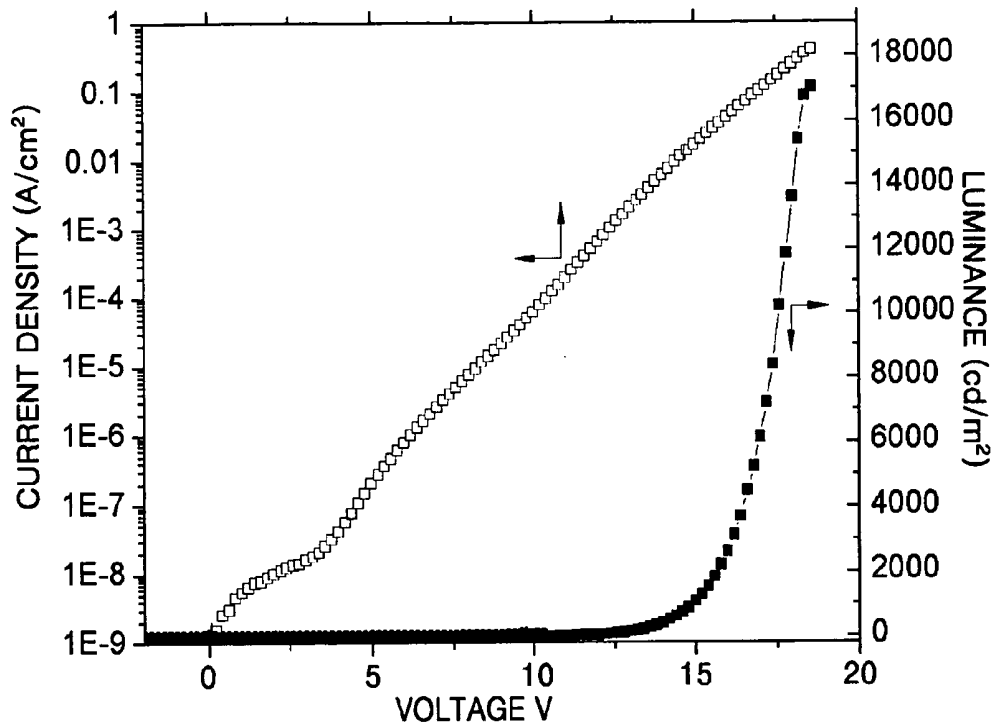


FIG. 8

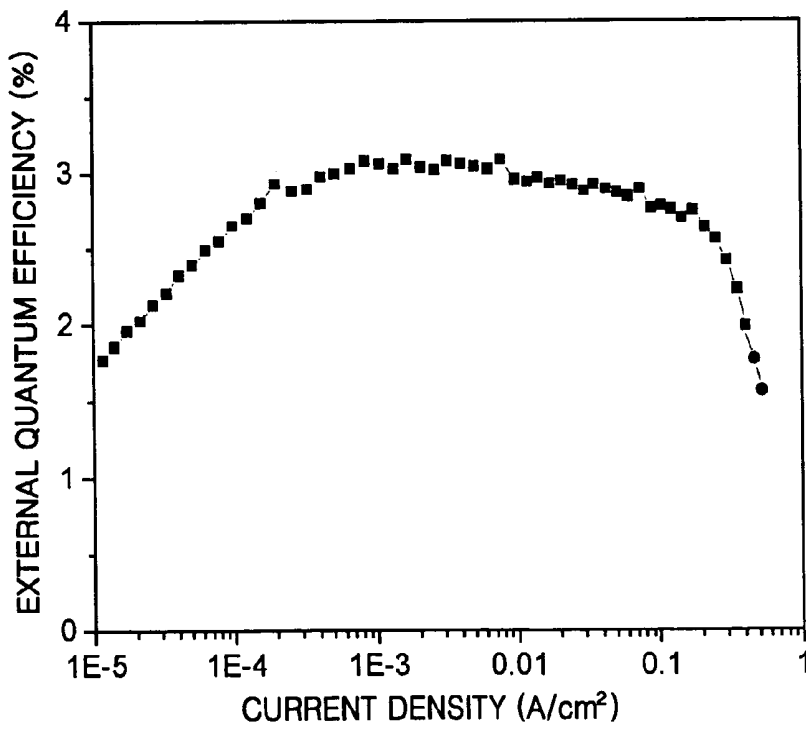


FIG. 9


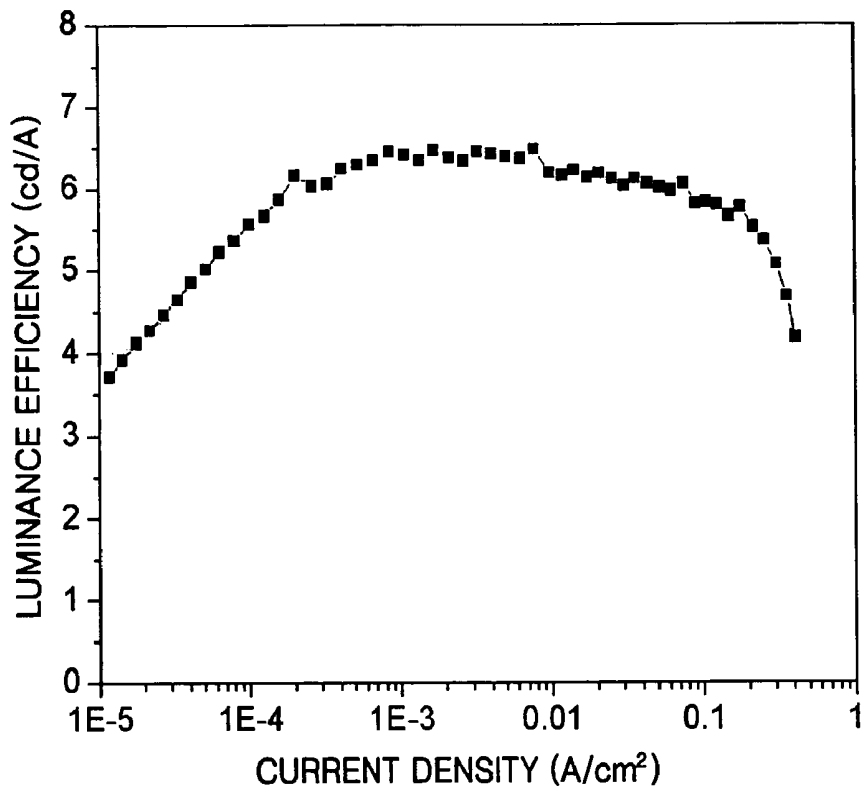


FIG. 10

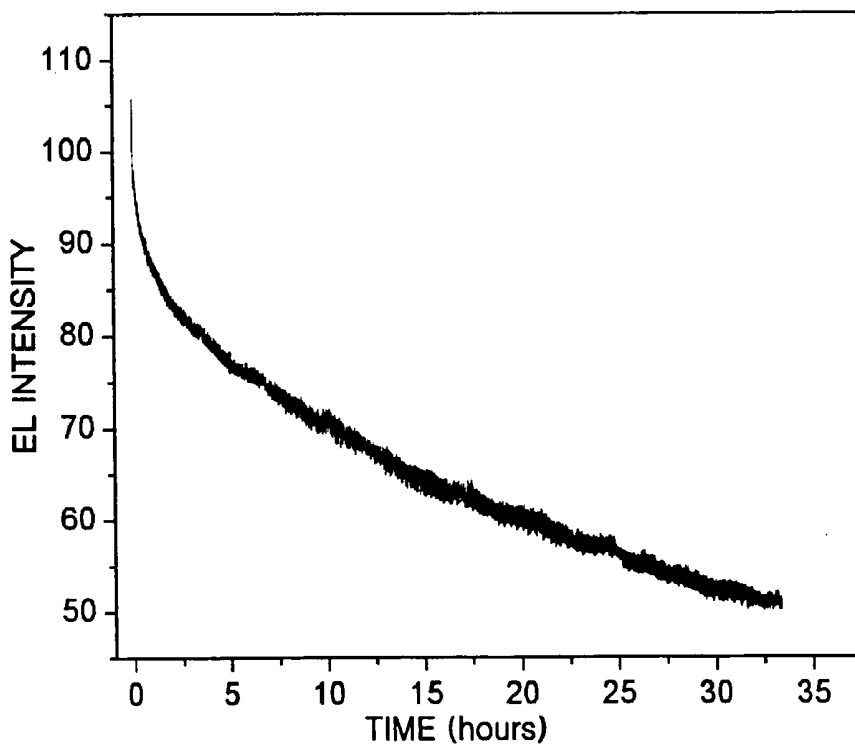

**CYCOMETALATED TRANSITION METAL
COMPLEX AND ORGANIC
ELECTROLUMINESCENT DISPLAY DEVICE
USING THE SAME**

CLAIM OF PRIORITY

[0001] This application claims the benefit of Korean Patent Application No. 10-2004-0081060, filed on Oct. 11, 2004, in the Korean Intellectual Property Office, the disclosure of which is incorporated herein in its entirety by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a cyclometalated transition metal complex and an organic electroluminescent display device using the same, and more particularly, to a cyclometalated transition metal complex that can emit light at a wavelength range from the blue region to the red region from triplet metal-to-ligand charge-transfer (³MLCT) state, and an organic electroluminescent display device that applies the complex as an organic film forming material.

[0004] 2. Description of the Related Art

[0005] An organic electroluminescent display device (organic electroluminescence (EL) display device) is an active light-emitting display device employing the phenomenon that when an electric current is applied to a thin film (hereinafter referred to as "organic film") composed of a fluorescent or phosphorescent organic compound, the fluorescent or the phosphorescent organic compound emits light in response to the recombination of electrons and holes in the organic film. The display device is light, has a structure of which the components are simple and its manufacturing process is simple, and ensures wide view angle with high image quality. Further, the display has the electrical properties suitable for portable electronic devices, since it can embody completely high color purity and moving picture, and can be driven with low power consumption and low voltage.

[0006] A general organic electroluminescent display device has a structure that has an anode formed at the upper part of a substrate, and a hole transporting layer, a light emitting layer, an electron transporting layer and a cathode sequentially formed at the upper part of the anode. Herein, the hole-transporting layer, the light emitting layer and the electron-transporting layer are organic films composed of organic compounds. The driving principle for the organic electroluminescent display device having such a structure is as follows. When voltage is applied between the anode and the cathode, a hole injected from an anode is migrated to a light-emitting layer via a hole-transporting layer. Meanwhile, an electron is injected from a cathode into a light-emitting layer via an electron-transporting layer, and carriers are recombined at the area of the light-emitting layer to form an exciton. The exciton emits light with a wavelength corresponding to a band gap of the material when the exciton decays radiatively.

[0007] The light emitting layer-forming materials are classified into a fluorescent material using singlet excitons and a phosphorescent material using triplet excitons, according to their light-emitting mechanism. The light emitting layer is

formed of the fluorescent or phosphorescent material alone or an appropriate host material doped with the fluorescent or phosphorescent material, and as electrons are excited, singlet excitons and triplet excitons are formed in the host. Herein, the statistic-forming ratio of the singlet excitons to the triplet excitons is 1:3.

[0008] The organic electroluminescent display device using a fluorescent material as a light emitting layer-forming material has a disadvantage that the triplet excitons formed in the host are wasted, while the device using a phosphorescent material as a light emitting layer-forming material has an advantage that both of the singlet excitons and the triplet excitons can be used, and thus the internal quantum efficiency can reach 100% (Baldo, et al., Nature, Vol. 395, 151-154, 1998). Accordingly, the phosphorescent material can possess even higher light emitting efficiency when a phosphorescent material is used as a light emitting layer-forming material than when a fluorescent material is used.

[0009] When a heavy metal such as Ir, Pt, Rh, Pd, etc. is incorporated into an organic molecule, triplet state and singlet state are mixed through spin-orbital coupling occurred by the heavy metal atom effect. Due to this, the transition that had been blocked is possible, and the phosphorescence can be occurred efficiently even at room temperature.

[0010] Recently, a green material or a red material with high efficiency employing the phosphorescence of which the internal quantum efficiency reaches 100% was developed.

[0011] Although transition metal compounds comprising transition metals such as an iridium, a platinum, etc. as a highly efficient luminescent material employing phosphorescence are reported, the materials that satisfy the properties required for realizing a full color display with high efficiency or white light emitting with low power consumption are limited to the green and red regions, and a phosphorescent material suitable for the blue region is not developed. For such reason, there is an obstacle in developing a phosphorescent full color device.

[0012] To solve such problems, a blue light emitting material is developing (WO02/15645 A1, U.S. Patent Publication No. 2002/0064681 A1). Further, an organic metal complex, incorporating a bulky functional group that can make the HOMO-LUMO difference large by changing the molecular geometry, or a functional group that has a strong ligand field (e.g., cyano group), was developed. Besides, an iridium complex represented by formula Ir(ppy)₂P(ph)₃Y (wherein Y=Cl or CN) (U.S. Patent Publication No. 2002/0182441 A1), and an iridium (III) complex having a cyclometalated ligand, a chelating diphosphine, a chlorine and a cyano group (U.S. Patent Publication No. 2002/0048689 A1) were developed.

[0013] Further, the US Patent Publication No. 2002/0134984 discloses a cyclometalated transition metal complex comprised of nitrogen atoms and carbon atoms, and an organic electroluminescent display device comprising the same.

[0014] However, all of the above materials do not show satisfactory properties in terms of color purity, light emitting efficiency and lifetime, etc.

SUMMARY OF THE INVENTION


[0015] It is therefore an object of the present invention to provide an improved organic film forming material.

[0016] It is also an object of the present invention to provide an improved organic electroluminescent display device

[0017] The present invention provides a cyclometalated transition metal complex that can emit light at a wavelength range from the blue region to the red region more efficiently by triplet metal-to-ligand charge-transfer (³MLCT) state.

[0018] The present invention also provides an organic electroluminescent display device that can emit light at a wavelength range from the blue region to the red region more efficiently.

[0019] According to an aspect of the present invention, there is provided a cyclometalated transition metal complex represented by the formula I below:

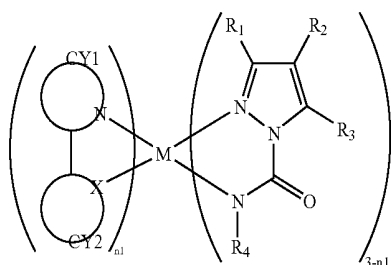

(I)

[0020] wherein

[0021] M is a transition metal;

[0022] each of R₁, R₂, R₃ and R₄ is a substituent or a hydrogen atom;

[0023] X is N or C;

[0024] each of CY1 and CY2 is an aromatic ring or an aliphatic ring; and

[0025] n1 is 1 or 2.


[0026] According to another aspect of the present invention, there is provided an organic electroluminescent display device including an organic film between a pair of electrodes, wherein the organic film comprises a cyclometalated transition metal complex represented by the formula I.

[0027] The R₁, R₂, R₃ and R₄ may be independently a hydrogen atom, or any substituent selected from the group consisting of an alkyl group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₀), an alkenyl group (preferably C₂-C₃₀, more preferably C₂-C₂₀, most preferably C₂-C₁₀), an alkynyl group (preferably C₂-C₃₀, more preferably C₂-C₂₀, most preferably C₂-C₁₀), an aryl group (preferably C₆-C₃₀, more preferably C₆-C₂₀, most preferably C₆-C₁₂), an amino group (preferably C₀-C₃₀, more preferably C₀-C₂₀, most preferably C₀-C₁₀), an alkoxy group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₀), an aryloxy group (preferably C₆-C₃₀, more preferably C₆-C₂₀, most preferably C₆-C₁₂), a heterocyclicoxy group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), an acyl group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), an alkoxycarbonyl group (preferably C₂-C₃₀, more preferably C₂-C₂₀, most preferably C₂-C₁₀), an aryloxycarbonyl group (preferably C₇-C₃₀, more preferably C₇-C₂₀, most preferably C₇-C₁₂), an acyloxy group (preferably C₂-C₃₀, more preferably C₂-C₂₀, most preferably C₂-C₁₀), an acylamino group (preferably C₂-C₃₀, more preferably C₂-C₂₀, most preferably C₂-C₁₀), an alkoxycarbonylamino group

(preferably C₂-C₃₀, more preferably C₂-C₂₀, most preferably C₂-C₁₂), an aryloxycarbonylamino group (preferably C₇-C₃₀, more preferably C₇-C₂₀, most preferably C₇-C₁₂), a sulfonfylamino group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), a sulfamoyl group (preferably C₀-C₃₀, more preferably C₀-C₂₀, most preferably C₀-C₁₂), a carbamoyl group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), an alkylthio group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), an arylthio group (preferably C₆-C₃₀, more preferably C₆-C₂₀, most preferably C₆-C₁₂), a heterocyclicthio group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), a sulfonyl group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), a sulfinyl group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), an ureido group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), a phosphoramidate group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), a hydroxyl group, a mercapto group, a halogen atom, a cyano group, a sulfo group, a carboxyl group, a nitro group, a hydroxamic group, a sulfino group, a hydrazino group, an imino group, a heterocyclic group (preferably C₁-C₃₀, more preferably C₁-C₁₂), a silyl group (preferably C₃-C₄₀, more preferably C₃-C₃₀, most preferably C₃-C₂₄) and a silyloxy group (preferably C₃-C₄₀, more preferably C₃-C₃₀, most preferably C₃-C₂₄).

[0028] The cyclometalated transition metal complex represented by the formula I may be any one of the compounds represented by Formulae II through X below:

(II)

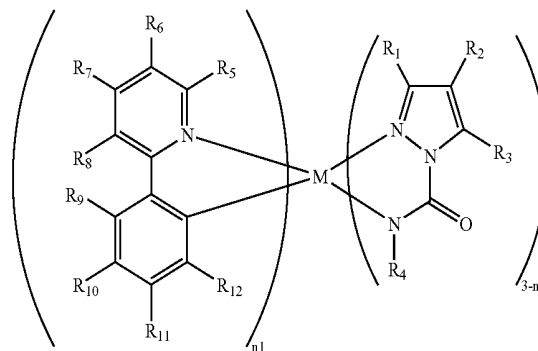


[0029] wherein

[0030] each of R₁, R₂, R₃, R₄, R₅, R₆, R₇, R₈, R₉, R₁₀, R₁₁, and R₁₂ is a substituent or a hydrogen atom;

[0031] M is a transition metal; and

[0032] n1 is 1 or 2.

(III)

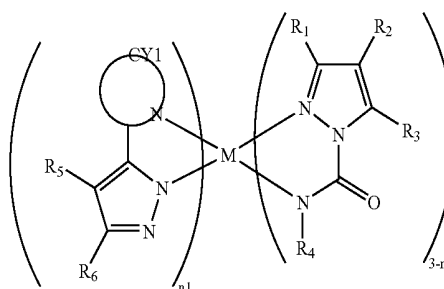


[0033] wherein

[0034] each of R_1 , R_2 , R_3 , R_4 , R_5 , and R_6 is a substituent or a hydrogen atom;

[0035] M is a transition metal;

[0036] n_1 is 1 or 2; and

[0037] $CY1$ is an aromatic ring or an aliphatic ring.

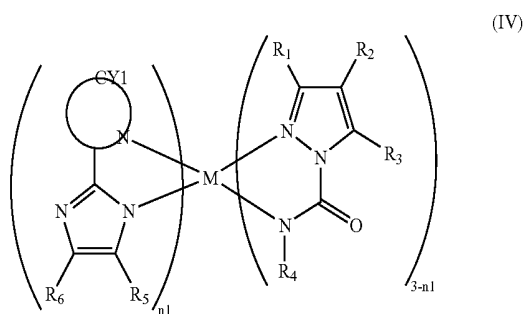


[0038] wherein

[0039] each of R_1 , R_2 , R_3 , R_4 , R_5 , and R_6 is a substituent or a hydrogen atom;

[0040] M is a transition metal;

[0041] n_1 is 1 or 2; and

[0042] $CY1$ is an aromatic ring or an aliphatic ring.

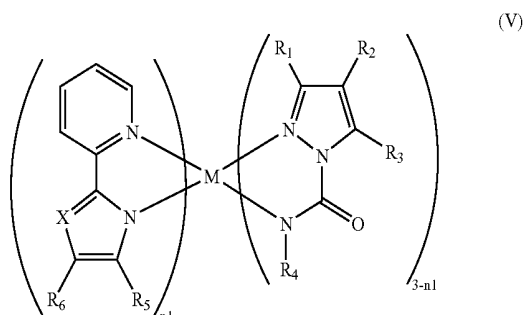


[0043] wherein

[0044] each of R_1 , R_2 , R_3 , R_4 , R_5 , and R_6 is a substituent or a hydrogen atom;

[0045] M is a transition metal;

[0046] X is C, N, O, S or P; and

[0047] n_1 is 1 or 2.

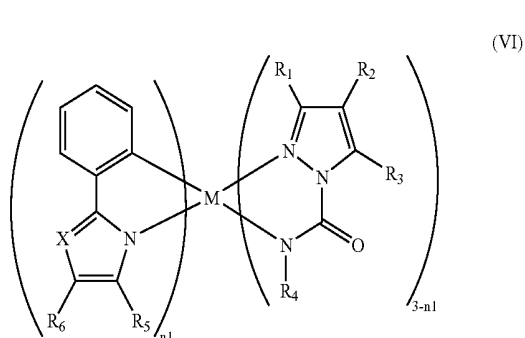


[0048] wherein

[0049] each of R_1 , R_2 , R_3 , R_4 , R_5 , and R_6 is a substituent or a hydrogen atom;

[0050] M is a transition metal;

[0051] X is C, N, O, S or P; and

[0052] n_1 is 1 or 2.

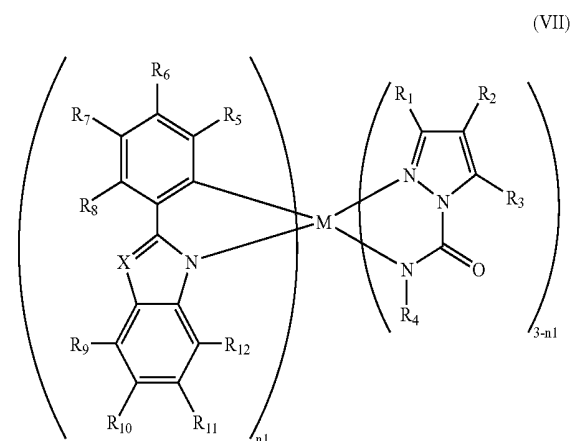


[0053] wherein

[0054] each of R_1 , R_2 , R_3 , R_4 , R_5 , R_6 , R_7 , R_8 , R_9 , R_{10} , R_{11} , and R_{12} is a substituent or a hydrogen atom;

[0055] M is a transition metal;

[0056] X is C, N, O, S or P; and

[0057] n_1 is 1 or 2.

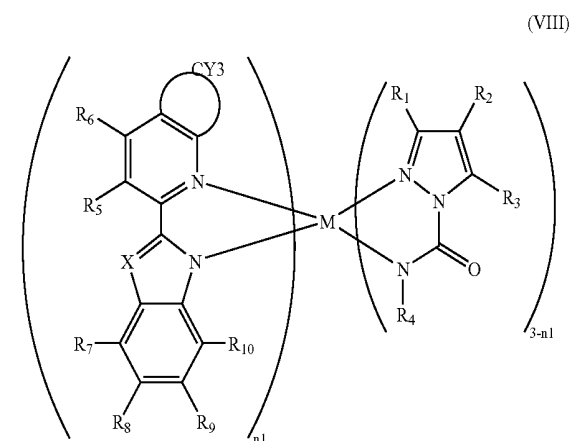

[0058] wherein


[0059] each of R_1 , R_2 , R_3 , R_4 , R_5 , R_6 , R_7 , R_8 , R_9 , and R_{10} is a substituent or a hydrogen atom;

[0060] M is a transition metal;

[0061] X is C, N, O, S or P;

[0062] $CY3$ is an aromatic ring or an aliphatic ring; and

[0063] n_1 is 1 or 2.

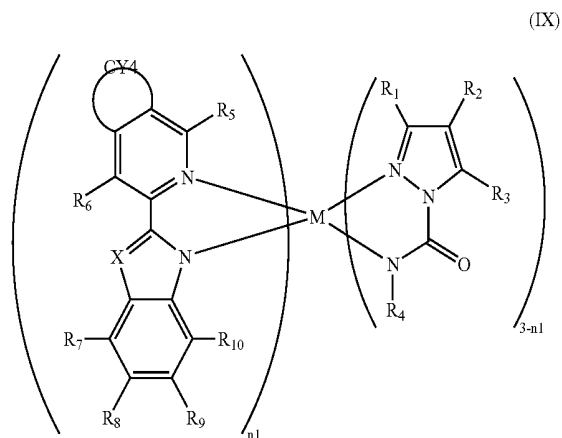

[0064] wherein


[0065] each of R_1 , R_2 , R_3 , R_4 , R_5 , R_6 , R_7 , R_8 , R_9 , and R_{10} is a substituent or a hydrogen atom;

[0066] M is a transition metal;

[0067] X is C, N, O, S or P;

[0068] $CY4$ is an aromatic ring or an aliphatic ring, and

[0069] $n1$ is 1 or 2.

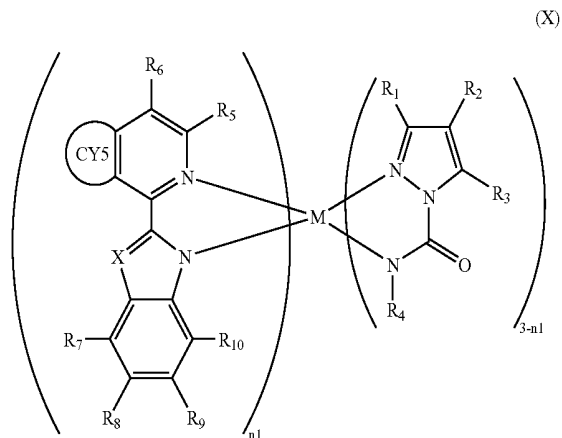

[0070] wherein

[0071] each of R_1 , R_2 , R_3 , R_4 , R_5 , R_6 , R_7 , R_8 , R_9 , and R_{10} is a substituent or a hydrogen atom;

[0072] M is a transition metal;

[0073] X is C, N, O, S or P;

[0074] $CY5$ is an aromatic ring or an aliphatic ring; and


[0075] $n1$ is 1 or 2.

[0076] In the formulae II through X, R_1 , R_2 , R_3 , R_4 , R_5 , R_6 , R_7 , R_8 , R_9 , R_{10} , R_{11} , and R_{12} may include the substituents defined in R_1 , R_2 , R_3 , and R_4 of the formula I.

[0077] In the formulae I through X, $CY1$, $CY2$, $CY3$, $CY4$ and $CY5$ may include aromatic hydrocarbon rings such as a benzene ring, a naphthalene ring, a quinoline ring and an anthracene ring; aromatic heterocycles such as a pyridine ring, a pyrazine ring, a quinoline ring, a furan ring and a thiophene ring; aliphatic hydrocarbon rings such as a cyclohexane ring; and aliphatic heterocycles such as a pyrane ring.

[0078] In the formula I, the transition metal M may be Ru, Rh, Os, Ir, Pt or Au.

[0079] The cyclometalated transition metal complex according to the formula I is preferably one of the compound represented by the formulae below:

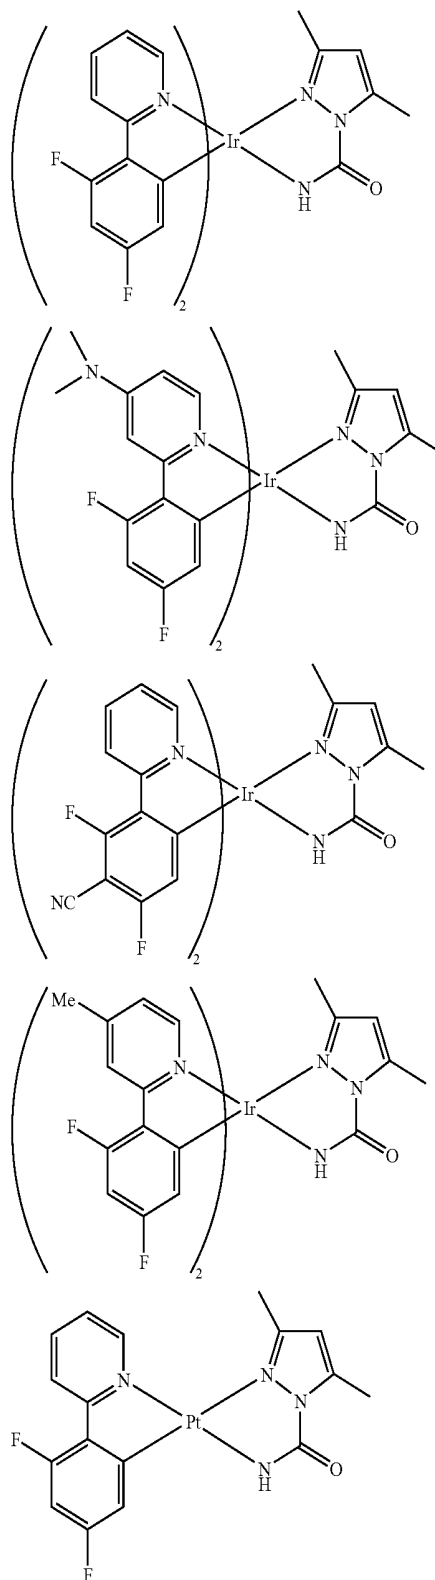

[0080] According to another aspect of the present invention, an organic electroluminescent display device is constructed with a pair of electrodes and an organic film between the pair of electrodes, the organic film including a transition metal complex having a transition metal and a pyrazolecarboxamide ligand connected to the transition metal.

[0081] The cyclometalated transition metal complex can emit light at a wavelength range of 400 nm to 680 nm. The light emitting diode employing such an organic metal complex may be used in light source illumination for displaying full color, backlight, an outdoor bulletin board, optical communication, and interior decoration, etc.

BRIEF DESCRIPTION OF THE DRAWINGS

[0082] A more complete appreciation of the present invention, and many of the above and other features and advantages of the present invention, will be readily apparent as the same becomes better understood by reference to the following detailed description when considered in conjunction with the accompanying drawings in which like reference symbols indicate the same or similar components, wherein:

[0083] FIG. 1 is a mass spectrum of the compounds according to the examples 1 and 3 of the present invention;

[0084] FIG. 2 is a PL (photoluminescence) spectrum of the compounds according to the examples 1 to 4 of the present invention;

[0085] FIG. 3 is an EL (electroluminescence) spectrum of the compound according to the example 1 of the present invention;

[0086] FIG. 4 is a TGA (thermo-gravimetric analyzer) graph of the compounds according to the examples 1 and 3 of the present invention;

[0087] FIG. 5 is a graph showing the oxidative cyclovoltamogram of the compounds according to the examples 1 and 4 of the present invention;

[0088] FIG. 6 is a schematic diagram showing the structure of an organic electroluminescent display device employing the compounds according to the example 1 of the present invention;

[0089] FIG. 7 is a graph showing the I-V-L property of an organic electroluminescent display device employing the compounds according to the example 1 of the present invention;

[0090] FIG. 8 is a graph showing the external quantum efficiency of an organic electroluminescent display device employing the compounds according to the example 1 of the present invention;

[0091] FIG. 9 is a graph showing the luminance efficiency of an organic electroluminescent display device employing the compounds according to the example 1 of the present invention; and

[0092] FIG. 10 is a graph showing the lifetime of an organic electroluminescent display device at 2.5 mA/cm² employing the compounds according to the example 1 of the present invention.


DETAILED DESCRIPTION OF THE INVENTION

[0093] The present invention will now be described more fully hereinafter with reference to the accompanying draw-

ings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as being limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout the specification.

[0094] The present invention provides a cyclometalated transition metal complex that can emit light at a wavelength range from the blue region to the red region more efficiently by triplet metal-to-ligand charge-transfer (³MLCT) state.

[0095] According to an aspect of the present invention, there is provided a cyclometalated transition metal complex represented by the formula I below:

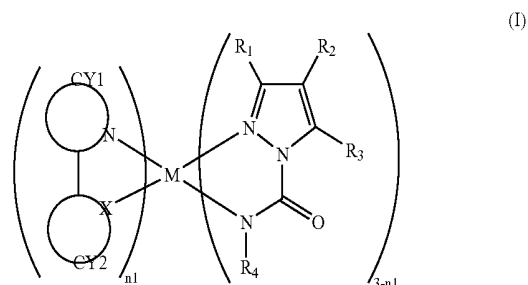

[0096] wherein

[0097] M is a transition metal;

[0098] each of R₁, R₂, R₃ and R₄ is a substituent or a hydrogen atom;

[0099] X is N or C;

[0100] each of CY1 and CY2 is an aromatic ring or an aliphatic ring; and

[0101] n₁ is 1 or 2.

[0102] According to another aspect of the present invention, there is provided an organic electroluminescent display device including an organic film between a pair of electrodes, wherein the organic film comprises a cyclometalated transition metal complex represented by the formula I.


[0103] A cyclometalated transition metal complex according to the present invention can emit blue light with high performance and efficiency by including a non-carbon coordinating chelating ligand.

[0104] The cyclometalated transition metal complex according to the present invention is characterized in that a pyrazolecarboxamide ligand is connected to a transition metal.

[0105] The R₁, R₂, R₃ and R₄ may be independently a hydrogen atom, or any substituent selected from the group consisting of an alkyl group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₀), an alkenyl group (preferably C₂-C₃₀, more preferably C₂-C₂₀, most preferably C₂-C₁₀), an alkynyl group (preferably C₂-C₃₀, more preferably C₂-C₂₀, most preferably C₂-C₁₀), an aryl group (preferably C₆-C₃₀, more preferably C₆-C₂₀, most preferably C₆-C₁₂), an amino group (preferably C₀-C₃₀, more

preferably C₀-C₂₀, most preferably C₀-C₁₀), an alkoxy group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₀), an aryloxy group (preferably C₆-C₃₀, more preferably C₆-C₂₀, most preferably C₆-C₁₂), a heterocyclicoxy group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), an acyl group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), an alkoxycarbonyl group (preferably C₂-C₃₀, more preferably C₂-C₂₀, most preferably C₂-C₁₂), an aryloxycarbonyl group (preferably C₇-C₃₀, more preferably C₇-C₂₀, most preferably C₇-C₁₂), an acyloxy group (preferably C₂-C₃₀, more preferably C₂-C₂₀, most preferably C₂-C₁₀), an acylamino group (preferably C₂-C₃₀, more preferably C₂-C₂₀, most preferably C₂-C₁₀), an alkoxycarbonylamino group (preferably C₂-C₃₀, more preferably C₂-C₂₀, most preferably C₂-C₁₂), an aryloxycarbonylamino group (preferably C₇-C₃₀, more preferably C₇-C₂₀, most preferably C₇-C₁₂), a sulfonamino group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), a sulfamoyl group (preferably C₀-C₃₀, more preferably C₀-C₂₀, most preferably C₀-C₁₂), a carbamoyl group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), an alkylthio group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), an arylthio group (preferably C₆-C₃₀, more preferably C₆-C₂₀, most preferably C₆-C₁₂), a heterocyclicthio group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), a sulfonyl group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), a sulfinyl group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), an ureido group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), a phosphoramidate group (preferably C₁-C₃₀, more preferably C₁-C₂₀, most preferably C₁-C₁₂), a hydroxyl group, a mercapto group, a halogen atom, a cyano group, a sulfo group, a carboxyl group, a nitro group, a hydroxamic group, a hetero group, a hydrazino group, an imino group, a heterocyclic group (preferably C₁-C₃₀, more preferably C₁-C₁₂), a silyl group (preferably C₃-C₄₀, more preferably C₃-C₃₀, most preferably C₃-C₂₄) and a silyloxy group (preferably C₃-C₄₀, more preferably C₃-C₃₀, most preferably C₃-C₂₄).

[0106] The cyclometalated transition metal complex represented by the formula I may be any one of the compounds represented by Formulae II through X below:

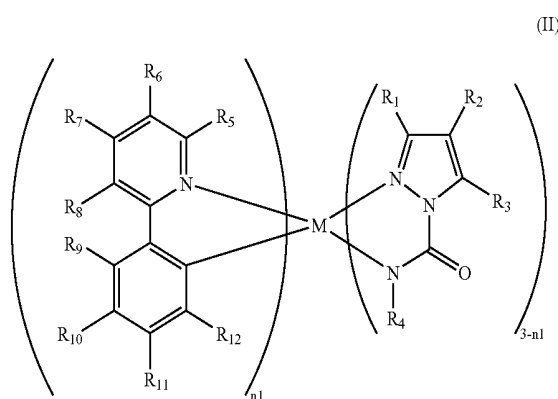


[0107] wherein

[0108] each of R₁, R₂, R₃, R₄, R₅, R₆, R₇, R₈, R₉, R₁₀, R₁₁, and R₁₂ is a substituent or a hydrogen atom;

[0109] M is a transition metal; and

[0110] n1 is 1 or 2.

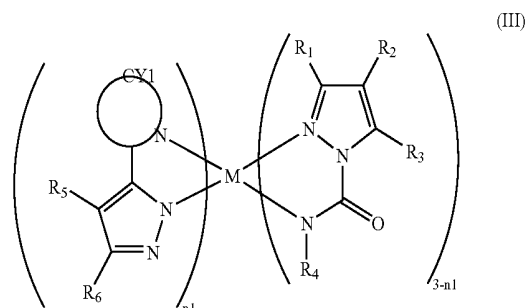


[0111] wherein

[0112] each of R₁, R₂, R₃, R₄, R₅, and R₆ is a substituent or a hydrogen atom;

[0113] M is a transition metal;

[0114] n1 is 1 or 2; and

[0115] CY1 is an aromatic ring or an aliphatic ring.

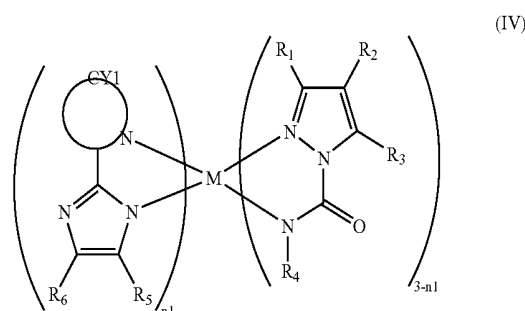


[0116] wherein

[0117] each of R₁, R₂, R₃, R₄, R₅, and R₆ is a substituent or a hydrogen atom;

[0118] M is a transition metal;

[0119] n1 is 1 or 2; and

[0120] CY1 is an aromatic ring or an aliphatic ring.

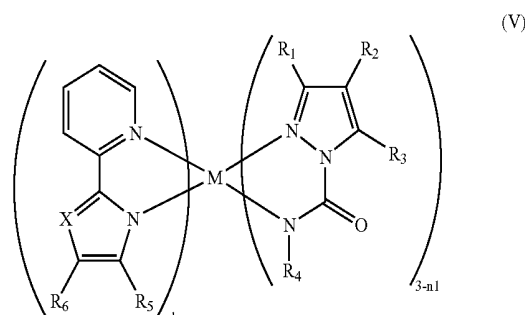


[0121] wherein

[0122] each of R_1 , R_2 , R_3 , R_4 , R_5 , and R_6 is a substituent or a hydrogen atom;

[0123] M is a transition metal;

[0124] X is C, N, O, S or P; and

[0125] n_1 is 1 or 2.

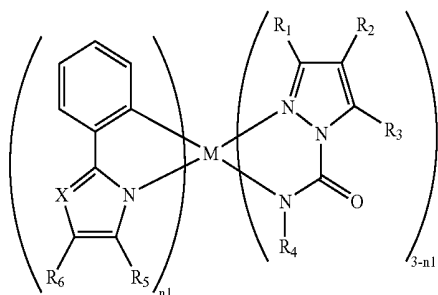


[0126] wherein

[0127] each of R_1 , R_2 , R_3 , R_4 , R_5 , and R_6 is a substituent or a hydrogen atom;

[0128] M is a transition metal;

[0129] X is C, N, O, S or P; and

[0130] n_1 is 1 or 2.

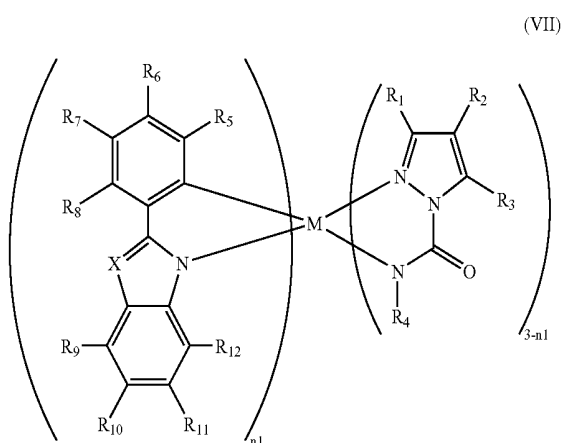


[0131] wherein

[0132] each of R_1 , R_2 , R_3 , R_4 , R_5 , R_6 , R_7 , R_8 , R_9 , R_{10} , R_{11} , and R_{12} is a substituent or a hydrogen atom;

[0133] M is a transition metal;

[0134] X is C, N, O, S or P; and

[0135] n_1 is 1 or 2.

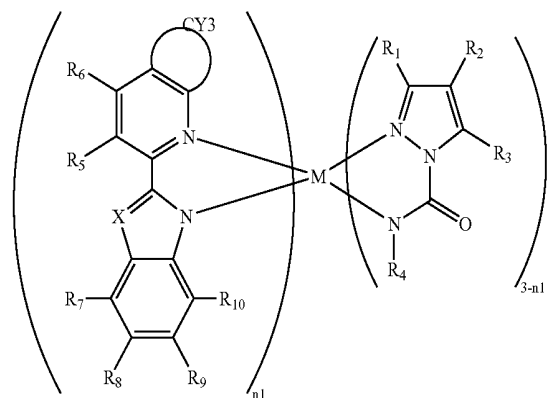

[0136] wherein


[0137] each of R_1 , R_2 , R_3 , R_4 , R_5 , R_6 , R_7 , R_8 , R_9 , and R_{10} is a substituent or a hydrogen atom;

[0138] M is a transition metal;

[0139] X is C, N, O, S or P;

[0140] CY_3 is an aromatic ring or an aliphatic ring; and

[0141] n_1 is 1 or 2.

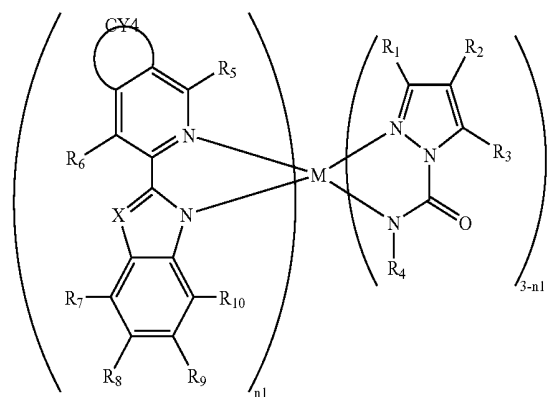

[0142] wherein


[0143] each of R_1 , R_2 , R_3 , R_4 , R_5 , R_6 , R_7 , R_8 , R_9 , and R_{10} is a substituent or a hydrogen atom;

[0144] M is a transition metal;

[0145] X is C, N, O, S or P;

[0146] CY_4 is an aromatic ring or an aliphatic ring, and

[0147] n_1 is 1 or 2.

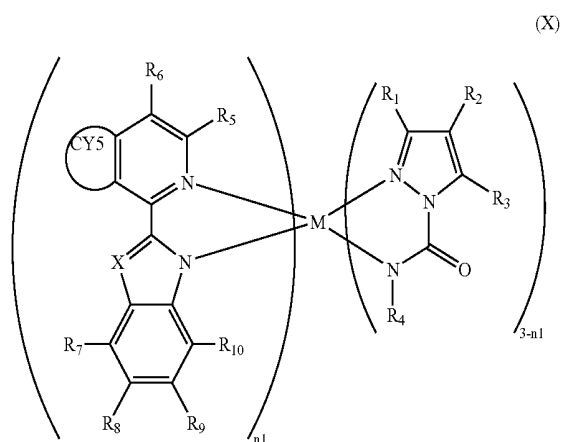

[0148] wherein

[0149] each of R_1 , R_2 , R_3 , R_4 , R_5 , R_6 , R_7 , R_8 , R_9 , and R_{10} is a substituent or a hydrogen atom;

[0150] M is a transition metal;

[0151] X is C, N, O, S or P;

[0152] CY5 is an aromatic ring or an aliphatic ring; and



[0153] n_1 is 1 or 2.

[0154] In the formulae II through X, R_1 , R_2 , R_3 , R_4 , R_5 , R_6 , R_7 , R_8 , R_9 , R_{10} , R_{11} , and R_{12} may include the substituents defined in R_1 , R_2 , R_3 , and R_4 of the formula I.

[0155] In the formulae I through X, CY1, CY2, CY3, CY4 and CY5 may include aromatic hydrocarbon rings such as a benzene ring, a naphthalene ring, a quinoxaline and an anthracene ring; aromatic heterocycles such as a pyridine ring, a pyrazine ring, a quinoline ring, a furan ring and a thiophene ring; aliphatic hydrocarbon rings such as a cyclohexane ring; and aliphatic heterocycles such as a pyrane ring.

[0156] In the formula I, the transition metal M may be Ru, Rh, Os, Ir, Pt or Au.

[0157] The cyclometalated transition metal complex according to the formula I may be specified to any one of the compound represented by the formulae below, however, is not limited to these:

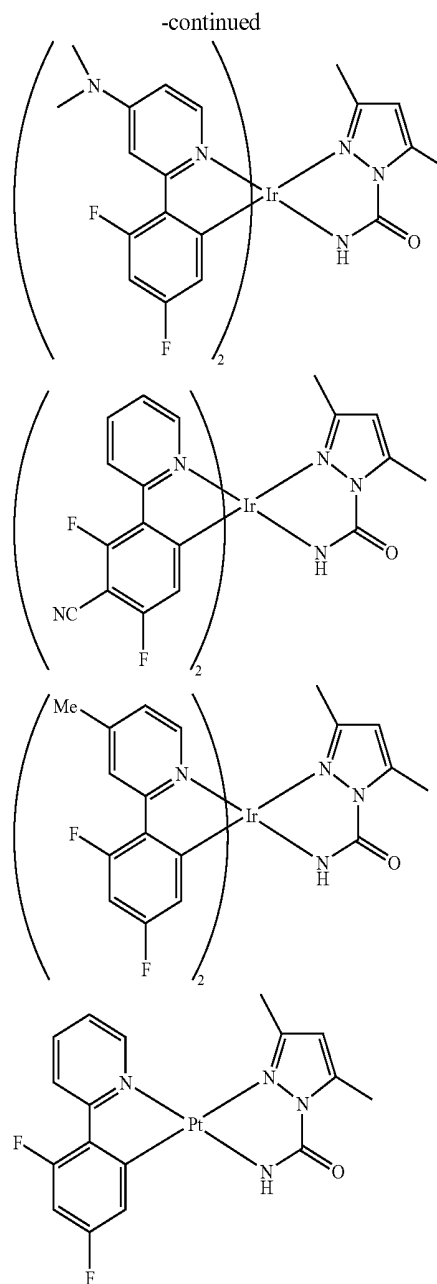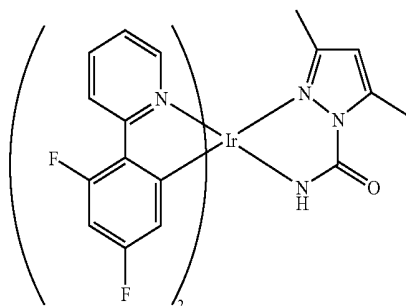


[0158] The transition metal complex according to the present invention has light-emitting property at a wavelength range of 400 nm to 680 nm.

[0159] The transition metal complex according to the present invention can be synthesized by using the starting material $[\text{Ir}(\text{C}^{\wedge}\text{N})_2\text{Cl}]_2$ derivative that provides a cyclometalated moiety according to the method reported by Watts and his colleagues (F. O. Garces, R. J. Watts, *Inorg. Chem.* 1988, (35), 2450, which is incorporated herein by reference).

[0160] Hereinafter, the synthetic method will be described concerning the synthetic pathways of an iridium complex according to an embodiment of the present invention.

[0161] Referring the reaction scheme I below, a cyclometalated transition metal complex can be synthesized by

mixing the starting material $[\text{Ir}(\text{C}^{\prime}\text{N})_2\text{Cl}]_2$ derivative and a pyrazolecarboxamide compound with a solvent such as a chloroform and a methanol, and stirring the resulting mixture for 2 to 48 hours at room temperature:

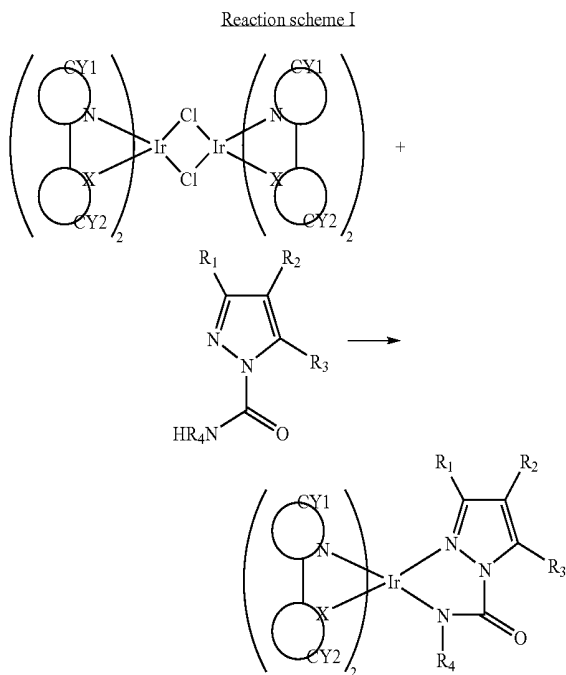

[0162] In the reaction scheme I, X, R₁, R₂, R₃, R₄, CY1 and CY2 are the same as defined in the formula I.

[0163] The organic electroluminescent device according to the present invention is prepared by forming an organic film, particularly a light emitting layer employing the cyclometalated transition metal complex according to the present invention. The transition metal complex represented by the formula I is very useful as a phosphorescent dopant material that is a light emitting layer-forming material, and provides excellent light-emitting properties in the range of blue wavelengths.

[0164] When the transition metal complex according to the present invention is used as a phosphorescent dopant, an organic film may further comprise at least one selected from the group consisting of at least one of polymer hosts, a mixed host of a polymer and a low molecular weight compound, a low molecular weight host, and a non-luminescent polymer matrix. Herein, any materials that are typically used for forming a light-emitting layer for an organic electroluminescent device can be used as the polymer host, the low molecular weight host and a non-luminescent polymer matrix. The polymer host includes a polyvinylcarbazole (PVK) and a polyfluorene, and the low molecular weight host includes a 4,4'-N,N'-dicarbazole-biphenyl (CBP), a 4,4'-bis[9-(3,6-biphenylcarbazolyl)]-1,1'-biphenyl, a 9,10-bis[(2',7'-t-butyl)-9',9''-spiro biffuorenyl anthracene, and a tetrafluorene and the like. The non-luminescent polymer matrix includes a polymethylmethacrylate and a polystyrene, etc., however, is not limited to these.

[0165] The amount of the transition metal complex according to the present invention may be 1 to 30 parts by

weight, based on 100 parts by weight of the total weights of the light-emitting layer-forming material. The incorporation of the transition metal complex into the light-emitting layer can be carried out by vacuum vapor deposition, sputtering, printing, coating, ink jetting, or a method using electronic beam, etc.

[0166] Further, the transition metal complex according to the present invention can emit white light by using a green light-emitting material or a red light-emitting material together.

[0167] The thickness of the organic film may be 30 nm to 100 nm. The organic film used herein refers to a film of an organic compound, which is formed between a pair of electrodes in an organic electroluminescent display device, such as an electron transporting layer and a hole transporting layer, in addition to a light emitting layer. Such an organic electroluminescent display device can have commonly known various structures, such as anode/light emitting layer/cathode, anode/buffer layer/light emitting layer/cathode, anode/hole transporting layer/light emitting layer/cathode, anode/buffer layer/hole transporting layer/light emitting layer/cathode, anode/buffer layer/hole transporting layer/light emitting layer/electron transporting layer/cathode, anode/buffer layer/hole transporting layer/light emitting layer/hole blocking layer/cathode and the like, but the structures are not limited to these.

[0168] The buffer layer may be composed of a material commonly used for a buffer, and may be composed of, but is not limited to, a copper phthalocyanine, a polythiophene, a polyaniline, a polyacetylene, a polypyrrole, a polyphenylene vinylene or their derivatives.

[0169] The hole transporting layer may be composed of a material commonly used for a hole transporting layer, and may be composed of, but is not limited to, a polytriphenylamine.

[0170] The electron transporting layer may be composed of a material commonly used for an electron transporting layer, and may be composed of, but is not limited to, a polyoxadiazole.

[0171] The hole blocking layer may be composed of a material commonly used for a hole blocking layer, and may be composed of, but is not limited to, LiF, BaF₂ or MgF₂ and the like.

[0172] The organic electroluminescent display device according to the present invention may be prepared by a common method of manufacturing an organic electroluminescent display device employing common luminescent materials, and thus does not need any special apparatuses or processes.

[0173] The cyclometalated transition metal complex can emit light at a wavelength range of 400 nm to 680 nm. The light emitting diode employing such an organic metal complex may be used in light source illumination for displaying full color, backlight, an outdoor bulletin board, optical communication, and interior decoration, etc.


[0174] Hereinafter, the present invention will be described in greater detail with reference to the following examples. The following examples are for illustrative purposes and are not intended to limit the scope of the invention.

EXAMPLES

Reference Example 1

Synthesis of $[(F_2ppy)_2IrCl]_2$ (F_2ppy dimer)

[0175]

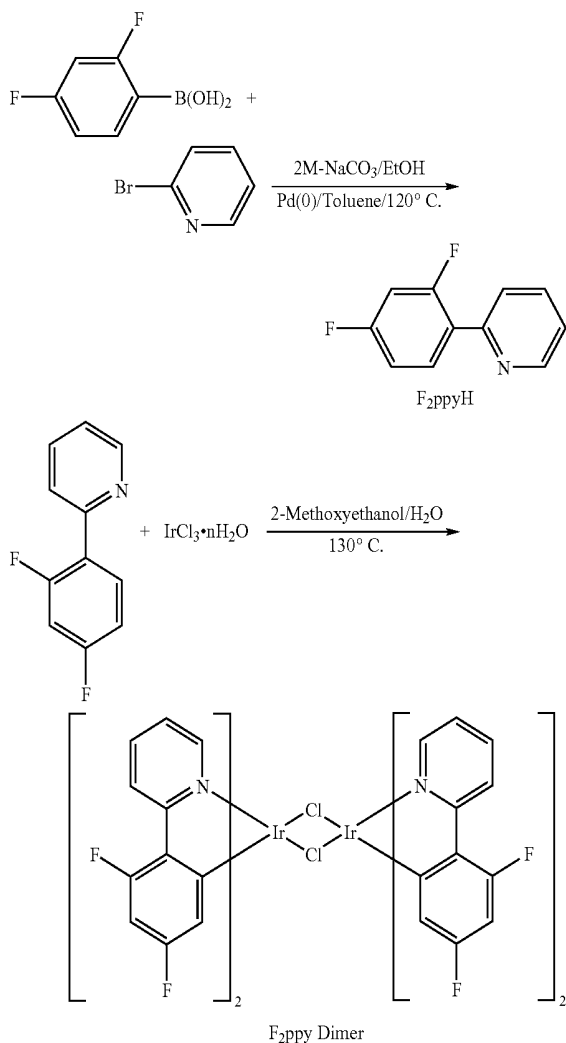

[0176] To a 500 ml flask with a side arm, 19.85 g (125 mmol) of 2-bromopyridine, 25.00 g (158 mmol) of a 2,4-difluorophenyl boronic acid, 100 ml of a toluene, 48 ml of an ethanol and 2M sodium carbonate solution in 95 ml of water were added, and the mixture was agitated under nitrogen atmosphere at room temperature. Then, 4.53 g (3.92 mmol) of a tetrakis(triphenylphosphine) palladium(0) were added to the reaction mixture, and the mixture was refluxed under the nitrogen atmosphere for 15 hrs in a dark room.

[0177] After the temperature of the reaction mixture was returned to room temperature on completion of the reaction, an organic layer was extracted using ethyl acetate and water. Then, the extract was separated by column chromatography (toluene:hexane=10:1) to obtain a pale brown liquid (F_2ppyH).

[0178] 1H -NMR(CD_2Cl_2 ,ppm): 8.69(d, 1H), 8.03(m, 1H), 7.70(m, 2H), 7.27(m, 1H), 7.00(m, 2H).

[0179] A yellow powder of $[(F_2ppy)_2IrCl]_2$ dimer was synthesized by using 2-(4,6-difluorophenylpyridine) mono-


mer synthesized according to the above procedure and $IrCl_3 \cdot nH_2O$. Herein, the synthesis was performed with reference to J. Am. Chem. Soc., 1984, 106, 6647-6653, which is incorporated herein by reference.

[0180] 1H -NMR(CD_2Cl_2 ,ppm): 9.1(d, 4H), 8.3(d, 4H), 7.9(t, 4H), 6.9(m, 4H), 6.5(m, 4H), 5.3(d, 4H).

Reference Example 2

Synthesis of $[(MeF_2ppy)_2IrCl]_2$

[0181]

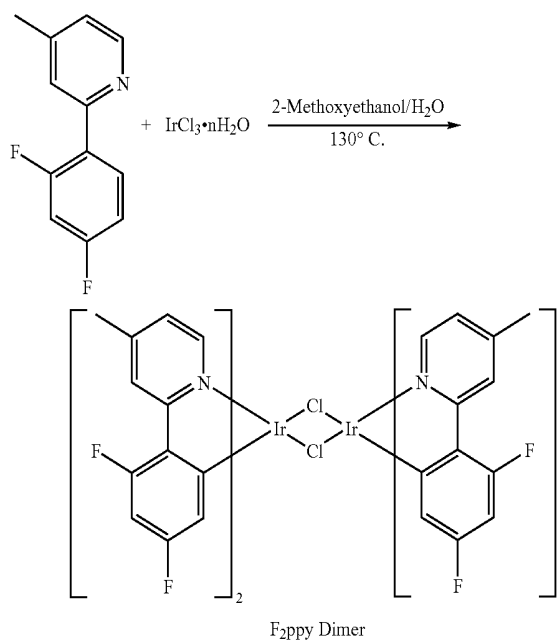


[0182] A $[(MeF_2ppy)_2IrCl]_2$ (F_2pmp dimer) was synthesized by using the same method as in the reference example 1, except that a 2-bromo-4-methylpyridine was used instead of a 2-bromopyridine.


[0183] 1H -NMR(CD_2Cl_2 ,ppm): 8.9(d, 4H), 8.1(s, 4H), 6.6(d, 4H), 6.3(m, 4H), 5.3(d, 4H), 2.6(s, 12H).

Reference Example 3

Synthesis of $[(DMAF_2ppy)_2IrCl]_2$

[0184]

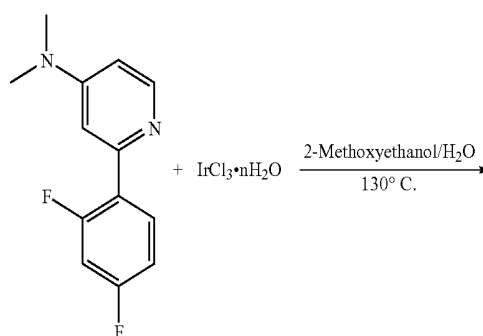

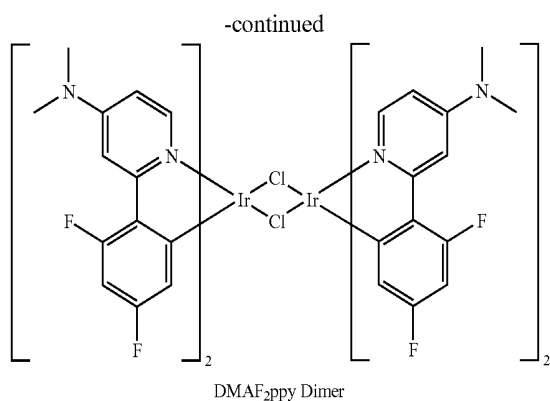



[0185] A [(DMAF₂ppy)₂IrCl]₂ (DMAF₂ppy dimer) was synthesized by using the same method as in the reference example 1, except that 25.26 g (1.25×10⁴ mmol) of a 2-bromo-4-dimethylaminopyridine were used instead of a 2-bromopyridine.

[0186] ¹H-NMR(CD₂Cl₂,ppm): 8.7(d, 4H), 7.5(t, 4H), 6.3(m, 4H), 6.1(m, 4H) 5.4(d, 4H), 3.2(s, 24H).

Reference Example 4

Synthesis of [(F₂CNppy)₂IrCl]₂

[0187]

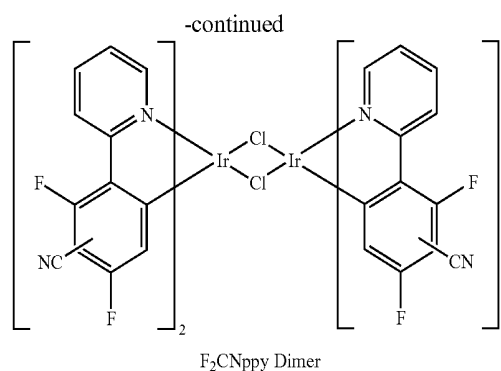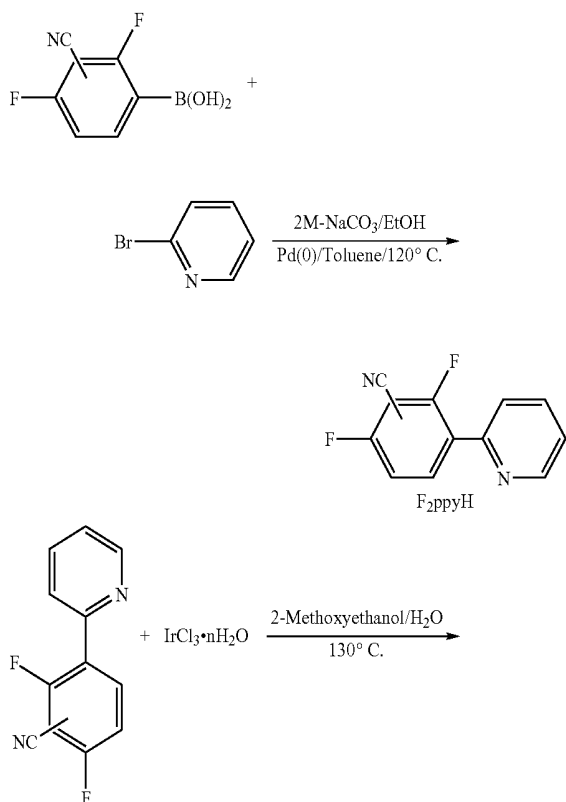


[0188] An [(F₂CNppy)₂IrCl]₂ (F₂CNppy dimer) was synthesized by using the same method as in the reference example 1, except that 22.87 g (125 mmol) of a 2,4-difluoro-3-cyano-phenylboronic acid were used instead of a 2,4-difluorophenylboronic acid.

Reference Example 5

Synthesis of [(F₂ppy)PtCl]₂ (F₂ppy dimer)

[0189]

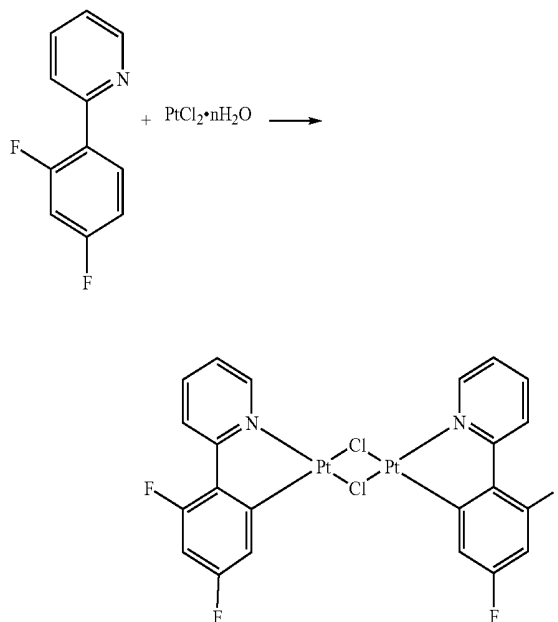

[0190] To a 500 ml flask with a side arm, 19.85 g (1.25×10⁴ mmol) of 2-bromopyridine, 25.00 g (1.58×10⁴ mmol) of a 2,4-difluorophenyl boronic acid, 100 ml of a toluene, 48 ml of an ethanol and 2M sodium carbonate solution in of water were added, and the mixture was agitated under nitrogen atmosphere at room temperature. Then, 4.53 g (3.92 mmol) of a tetrakis(triphenylphosphine) palladium(0)

were added to the reaction mixture, and the mixture was refluxed under the nitrogen atmosphere for 15 hrs in a dark room.

[0191] After the temperature of the reaction mixture was returned to room temperature on completion of the reaction, an organic layer was extracted using ethyl acetate and water. Then, the extract was separated by column chromatography (toluene:hexane=10:1) to obtain a pale brown liquid (F_2 ppyH).


[0192] 1H -NMR(CD_2Cl_2 ,ppm): 8.69(d, 1H), 8.03(m, 1H), 7.70(m, 2H), 7.27(m, 1H), 7.00(m, 2H).

[0193] A green powder $[(F_2ppy)PtCl]_2$ dimer was synthesized by using 2-(4,6-difluorophenylpyridine) monomer synthesized according to the above procedure and $K_2[PtCl]_4$. Herein, the synthesis was performed with reference to J. Am. Chem. Soc., 1984, 106, 6647-6653.

Example 1

Preparation of Compound (1) (F_2 PZNH)

[0194]

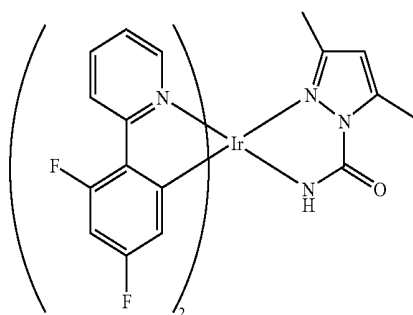


[0195] In the 100 ml 2-neck flask equipped with a thermometer, a mechanical stirrer and a reflux condenser, 0.605 g (0.5 mmol) of $[(F_2ppy)_2IrCl]_2$ prepared in the reference example 1 and 0.160 g (1.25 mmol) of 3,5-dimethylpyrazole-1-carboxamide were dissolved in 30 ml of a mixed solution of methanol and chloroform under nitrogen atmosphere, and the resulting solution was stirred for about 2 hrs at room temperature. Then, the reaction temperature was slowly elevated and the reaction mixture was refluxed for 8 hours. After completion of the reaction, the reaction mixture was cooled to room temperature, and then unreacted starting materials were removed by filtering. The solvents were all removed from the filtrate with a rotatory evaporator, and diethyl ether was added in droplets. The resulting green solid was filtered with a filter paper, and washed several times with diethyl ether and hexane. Yellow solid was fully dried in a vacuum oven at 30° C., and was weighed. 0.55 g (yield: 87%) of the title compound were obtained as pure green solid, and the melting point of the compound was 255° C. The synthesized compound was confirmed by 1H NMR and MS (FIG. 1).

Example 2

Preparation of Compound (2) (MeF_2 PZNH)

[0196]

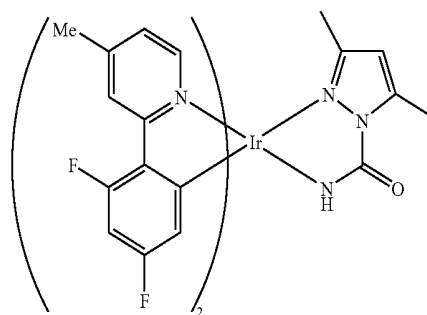

(2)


[0197] 0.575 g (yield: 85%) of the title compound were obtained as pure pale green solid by performing the same method as in the example 1, except that 0.65 g (0.5 mmol) of $[(MeF_2ppy)_2IrCl]_2$ prepared in the reference example 2 were used instead of $[(F_2ppy)_2IrCl]_2$. The melting point of the compound was 260° C. The synthesized compound was confirmed by 1H NMR and MS.

(1)

Example 3

Preparation of Compound (3) ($DMAF_2$ PZNH)

[0198]

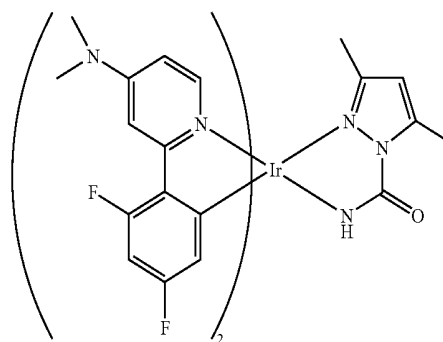


(3)

[0199] 0.63 g (yield: 85%) of the title compound were obtained as pure pale green solid by performing the same method as in the example 1, except that 0.71 g (0.5 mmol) of $[(DMAF_2ppy)_2IrCl]_2$ prepared in the reference example 3 were used instead of $[(F_2ppy)_2IrCl]_2$. The melting point of the compound was 255° C. The synthesized compound was confirmed by 1H NMR and MS (FIG. 1).

Example 4

Preparation of Compound (4) (F₂CNPZNH)

[0200]

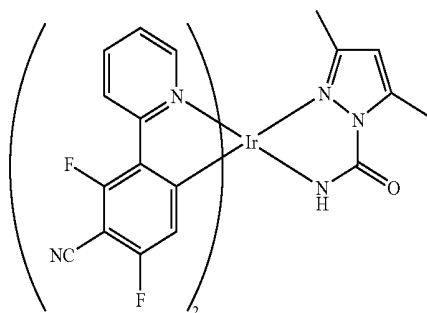

(4)


[0201] 0.580 g (yield: 83%) of the title compound were obtained as pale green solid by performing the same method as in the example 1, except that 0.67 g (0.5 mmol) of [(F₂CNppy)₂IrCl]₂ prepared in the reference example 4 were used instead of [(F₂ppy)₂IrCl]₂.

[0202] The synthesized compound was confirmed by ¹H NMR and MS (FIG. 1).

Example 5

Preparation of Compound (5) (F₂PZNH(Pt))

[0203]

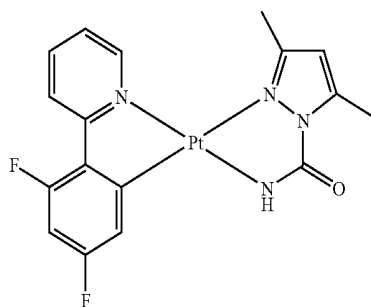

(5)

[0204] 0.690 g (yield: 80%) of the title compound were obtained by performing the same method as in the example 1, except that 0.84 g (1 mmol) of [(F₂ppy)PtCl]₂ prepared in the reference example 5 were used instead of [(F₂ppy)₂IrCl]₂. The synthesized compound was confirmed by ¹H NMR and MS.

[0205] The light emitting characteristics for the compounds obtained from the above procedure were examined according to the methods below.

[0206] In the first method, the compound was dissolved in methylene chloride to prepare 10⁻⁴ M solution, and then the light emitting characteristics in the state of a methylene chloride solution were examined. In the second method, 94 parts by weight of polymethylmethacrylate (PMMA) and 6 parts by weight of the compound were dissolved in a solvent, the solution was spin coated to prepare a film, and the light emitting characteristics in the film state were examined. The maximum light emitting wavelength, the color coordinate (CIE), the degradation temperature and

HOMO level for the compounds obtained from the examples were summarized in Table 1 below.

TABLE 1

| Compound No. | λ_{\max} (nm, solution) | λ_{\max} (nm, film) | Color coordinate (x, y) | Degradation temperature (° C.) | HOMO |
|--------------|---------------------------------|-----------------------------|-------------------------|--------------------------------|------|
| 1 | 474 | 473 | 0.15, 0.31 | 255 | 5.68 |
| 2 | 469 | 469 | 0.15, 0.27 | 260 | |
| 3 | 474 | 472 | 0.15, 0.25 | 255 | |
| 4 | 465 | 464 | 0.14, 0.24 | | 5.92 |
| 5 | 469, 494 | 469, 494, 531, 612 | 0.33, 0.38 (film) | | |

[0207] The EL display device adopting the compound synthesized in the examples had the following multiplayer structure (refer to FIG. 6), and its light emitting area was 9 mm²:

[0208] substrate/first electrode/hole transporting layer/light emitting layer/hole blocking layer/electron transporting layer/electron injecting layer/second electrode=glass/ITO/NBP (40 nm)/mCP: 5 wt % F₂PZNH (40 nm)/BALq (40 nm)/LiF (2 nm)/Al (200 nm).

[0209] The display device was manufactured as follows.

[0210] After NPB was deposited on the pre-washed ITO with a thickness of 40 nm, F₂PZNH was mixed with a host mCP (N,N'-dicarbazolyl-3,5-benzene) (in a ratio of 95:5 (wt %)) and coated on the deposits. BALq was coated onto this as a positive charge blocking layer (hole blocking layer (HBL)) with a thickness of 40 nm by heat depositing method, LiF was coated onto this as a negative charge transporting layer (electron transporting layer (ETL)) with a thickness of 2 nm, and finally Al was coated as an anode with a thickness of 200 nm.

[0211] The evaluation results for the device (maximum light emitting wavelength, color coordinate, brightness, lifetime, etc.) are summarized in Table 2.

TABLE 2

| λ_{\max} (nm, PL) | CIE PL | λ_{\max} (nm, EL) | CIE EL | η_a Cd/A | η_{ex} % | Maximum brightness (Cd/m ²) | lifetime (hr) (2.5 mA/cm ²) |
|---------------------------|------------|---------------------------|------------|---------------|---------------|---|---|
| 474 | 0.15, 0.31 | 474, 499 | 0.18, 0.38 | 6.5 | 3.1 | 17030 | 34.1 |

[0212] FIG. 1 shows a mass spectrum of the compounds according to the examples 1 and 3 of the present invention, FIG. 2 is a PL (photoluminescence) spectrum of the compounds according to the examples 1 to 4 of the present invention, and FIG. 3 shows an electroluminescence (EL) intensity of the compound according to the example 1 of the present invention.

[0213] FIG. 4 is a TGA (thermo-gravimetric analyzer) graph of the compounds according to the examples 1 and 3 of the present invention.

[0214] FIGS. 5A and 5B are graphs showing the oxidative cyclovoltammogram of the compounds according to the examples 1 and 4 of the present invention. From the figure,

the HOMO level can be seen, and accordingly it can be seen that the compounds have semi-reversibility.

[0215] FIG. 7 is a graph showing the I-V-L property of an organic electroluminescent display device employing the compounds according to the example 1 of the present invention. From the figure, it can be seen that the turn-on voltage is low.

[0216] FIGS. 8 through 10 are graphs showing the external quantum efficiency, the luminance efficiency and lifetime (2.5 mA/cm²) of the display device employing compounds according to the example 1 of the present invention.


[0217] From the foregoing, it can be seen that on incorporation of a pyrazolecarboxamide ligand, a dopant having excellent phosphorescent property is formed and is suitable as a blue phosphorescent material. Further, it can be seen that the full color of red, green and blue is embodied by incorporating various main ligands.

[0218] A cyclometalated transition metal complex according to the present invention can emit light at a wavelength range from the blue region to the red region more efficiently by triplet metal-to-ligand charge-transfer (MLCT). This organic metal complex can be used in forming an organic film of an organic electroluminescent display device. The organic metal complex can emit light at the wavelength range of 400 to 650 nm as a phosphorescent material with high efficiency. Further, the complex can emit white light by using a green light emitting material or a red light emitting material together.

[0219] While the present invention has been particularly shown and described with reference to exemplary embodiments thereof, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the spirit and scope of the present invention as defined by the following claims.

What is claimed is:

1. A transition metal complex represented by Formula I:

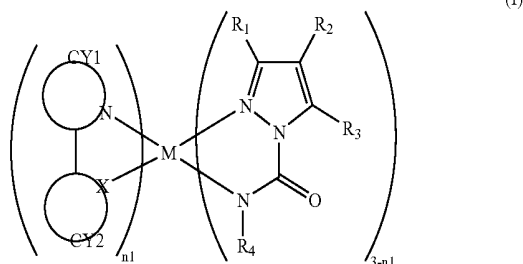

wherein

M is a transition metal;

each of R₁, R₂, R₃ and R₄ is a substituent or a hydrogen atom;

X is N or C;


each of CY1 and CY2 is an aromatic ring or an aliphatic ring, and

n₁ is 1 or 2.

2. The transition metal complex according to claim 1, wherein R₁, R₂, R₃ and R₄ are independently a hydrogen atom, or a substituent selected from the group consisting of

an alkyl group, an alkenyl group, an alkynyl group, an aryl group, an amino group, an alkoxy group, an aryloxy group, a heterocycloxy group, an acyl group, an alkoxy carbonyl group, an aryloxy carbonyl group, an acyloxy group, an acylamino group, an alkoxy carbonylamino group, an aryloxy carbonylamino group, a sulfonylamino group, a sulfamoyl group, a carbamoyl group, an alkylthio group, an arylthio group, a heterocyclithio group, a sulfonyl group, a sulfinyl group, an ureido group, a phosphoramidate group, a hydroxyl group, a mercapto group, a halogen atom, a cyano group, a sulfo group, a carboxyl group, a nitro group, a hydroxamic group, a sulfinio group, a hydrazino group, an imino group, a heterocyclic group, a silyl group and a silyloxy group.

3. The transition metal complex according to claim 1, wherein the transition metal complex of Formula I is a compound represented by Formula II:

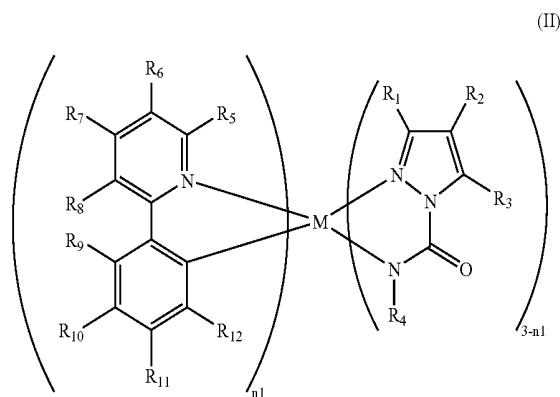


wherein

each of R₁, R₂, R₃, R₄, R₅, R₆, R₇, R₈, R₉, R₁₀, R₁₁, and R₁₂ is a substituent or a hydrogen atom;

M is a transition metal; and

n₁ is 1 or 2.

4. The transition metal complex according to claim 1, wherein the transition metal complex of Formula I is a compound represented by Formula III:

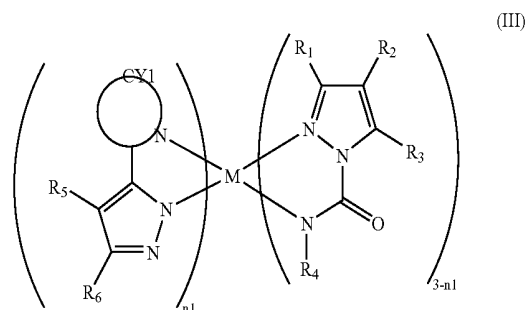

wherein


each of R₁, R₂, R₃, R₄, R₅, and R₆ is a hydrogen atom;

M is a transition metal;

n₁ is 1 or 2; and

CY1 is an aromatic ring or an aliphatic ring.

5. The transition metal complex according to claim 1, wherein the transition metal complex of Formula I is a compound represented by the formula IV:

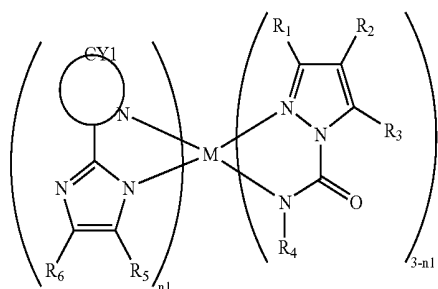

wherein


each of R_1 , R_2 , R_3 , R_4 , R_5 , and R_6 is a substituent or a hydrogen atom;

M is a transition metal;

n_1 is 1 or 2; and

CY1 is an aromatic ring or an aliphatic ring.

6. The transition metal complex according to claim 1, wherein the transition metal complex of Formula I is a compound represented by Formula V:

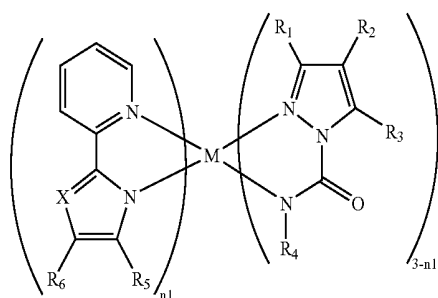

wherein


each of R_1 , R_2 , R_3 , R_4 , R_5 , and R_6 is a substituent or a hydrogen atom;

M is a transition metal;

X is C, N, O, S or P; and

n_1 is 1 or 2.

7. The transition metal complex according to claim 1, wherein the transition metal complex of Formula I is a compound represented by Formula VI:

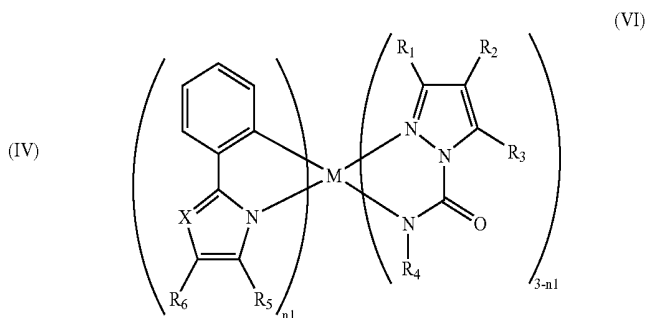

wherein


each of R_1 , R_2 , R_3 , R_4 , R_5 , and R_6 is a substituent or a hydrogen atom;

M is a transition metal;

X is C, N, O, S or P atom; and

n_1 is 1 or 2.

8. The transition metal complex according to claim 1, wherein the transition metal complex of Formula I is a compound represented by Formula VII:

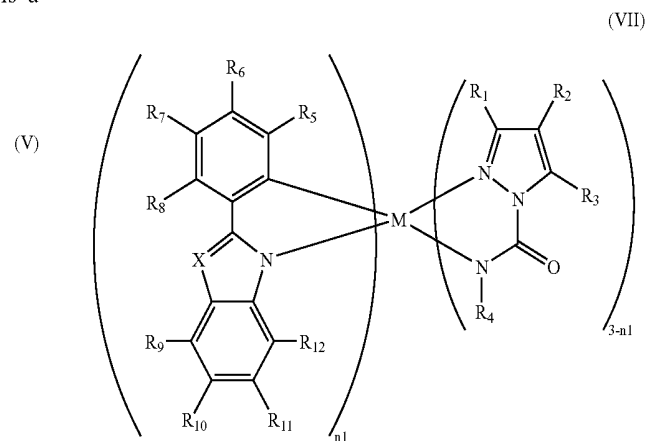

wherein

each of R_1 , R_2 , R_3 , R_4 , R_5 , R_6 , R_7 , R_8 , R_9 , R_{10} , R_{11} , and R_{12} is a substituent or a hydrogen atom;


M is a transition metal;

X is C, N, O, S or P; and

n_1 is 1 or 2.

9. The transition metal complex according to claim 1, wherein the transition metal complex of Formula I is a compound represented by Formula VIII:

11. The transition metal complex according to claim 1, wherein the transition metal complex of Formula I is a compound represented by Formula X:

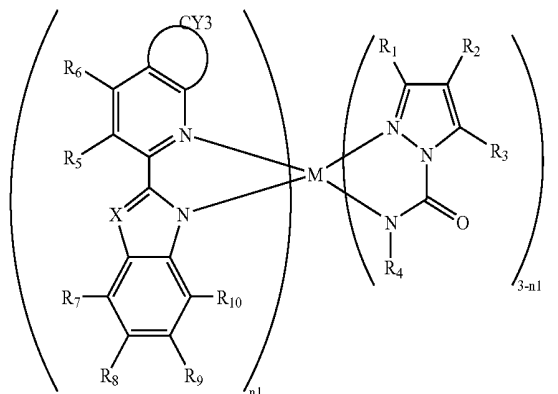

wherein

each of R₁, R₂, R₃, R₄, R₅, R₆, R₇, R₈, R₉, and R₁₀ is a substituent or a hydrogen atom;


M is a transition metal;

X is C, N, O, S or P;

CY3 is an aromatic ring or an aliphatic ring; and

n₁ is 1 or 2.

10. The transition metal complex according to claim 1, wherein the transition metal complex of Formula I is a compound represented by Formula IX:

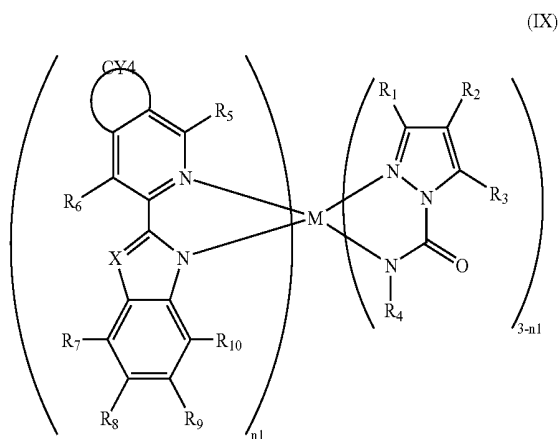

wherein


each of R₁, R₂, R₃, R₄, R₅, R₆, R₇, R₈, R₉, and R₁₀ is a substituent or a hydrogen atom;

M is a transition metal;

X is C, N, O, S or P;

CY4 is an aromatic ring or an aliphatic ring; and

n₁ is 1 or 2.

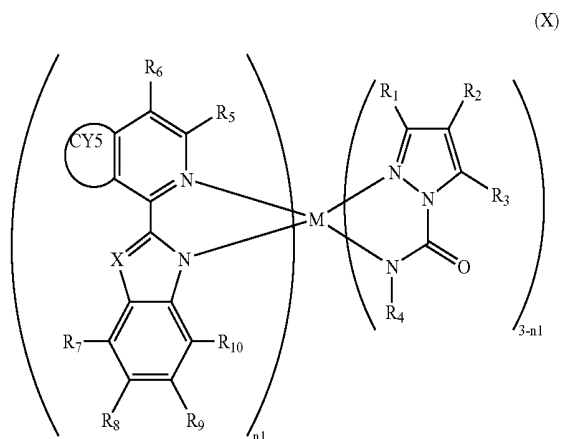

wherein

each of R₁, R₂, R₃, R₄, R₅, R₆, R₇, R₈, R₉, and R₁₀ is a substituent or a hydrogen atom;

M is a transition metal;


X is C, N, O, S or P;


CY5 is an aromatic ring or an aliphatic ring; and

n₁ is 1 or 2.

12. The transition metal complex according to claim 1, wherein M is Ru, Rh, Os, Ir, Pt or Au.

13. The transition metal complex according to claim 1, wherein the transition metal complex of Formula I is one of the compounds represented by the formulae below:

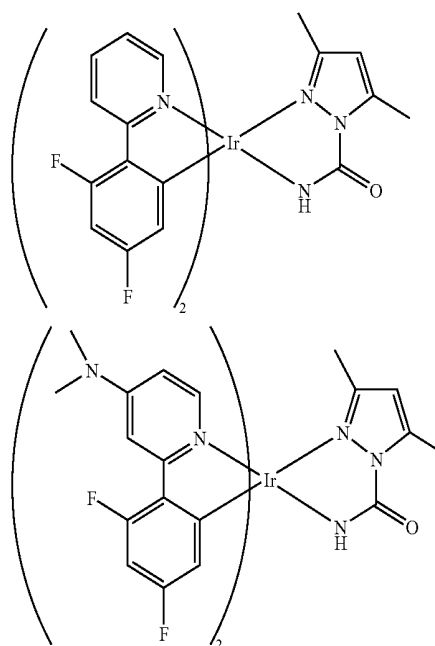

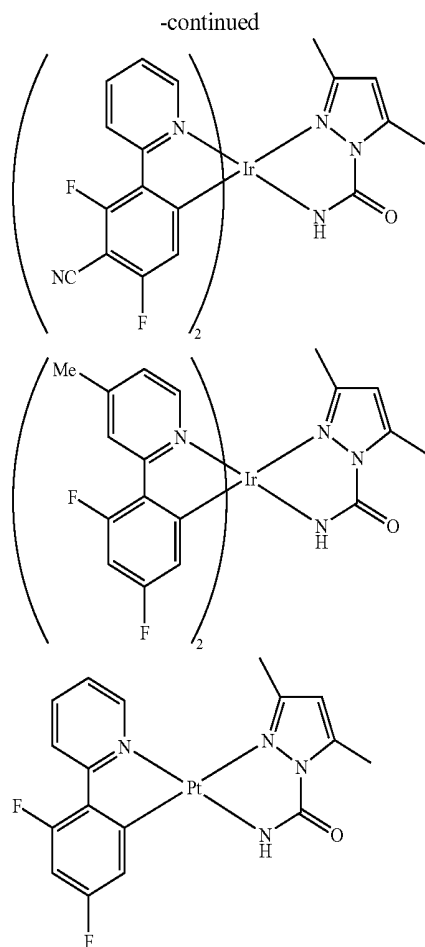


14. An organic electroluminescent display device comprising an organic film having the transition metal complex according to claim 1.

15. An organic electroluminescent display device, comprising:

a pair of electrodes; and

an organic film between the pair of electrodes, the organic film comprising a transition metal complex represented by Formula I:

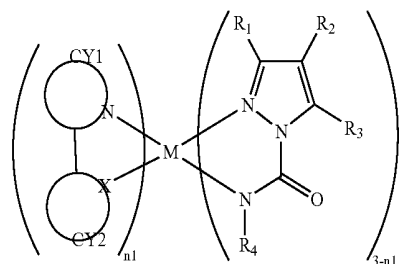

(I)

wherein

M is a transition metal;

each of R₁, R₂, R₃ and R₄ is a substituent or a hydrogen atom;

X is N or C;

each of CY1 and CY2 is an aromatic ring or an aliphatic ring, and

n₁ is 1 or 2.

16. The organic electroluminescent display device of claim 15, wherein the organic film further comprises at least one selected from the group consisting of at least one of polymer hosts, a mixed host of a polymer and a low molecular weight host, a low molecular weight host, and a non-luminescent polymer matrix.


17. The organic electroluminescent display device of claim 15, wherein the organic film further comprises at least one of a green light emitting material and a red light emitting material.

18. An organic electroluminescent display device, comprising:

a pair of electrodes; and

an organic film between the pair of electrodes, the organic film comprising a transition metal complex having a transition metal and a pyrazolecarboxamide ligand connected to the transition metal.

19. The organic electroluminescent display device, wherein the transition metal complex is represented by Formula I:

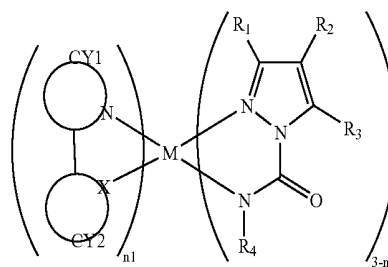

(I)

wherein

M is Ru, Rh, Os, Ir, Pt or Au;

each of R₁, R₂, R₃ and R₄ is a substituent or a hydrogen atom;

X is N or C;

each of CY1 and CY2 is an aromatic ring or an aliphatic ring, and

n₁ is 1 or 2.

20. The organic electroluminescent display device according to claim 19, wherein the amount of the transition metal complex ranges from 1 to 30 parts by weight, based on 100 parts by weight of the total weights of light-emitting layer-forming materials.

* * * * *

| | | | |
|----------------|---|---------|------------|
| 专利名称(译) | 环金属化过渡金属络合物和使用其的有机电致发光显示装置 | | |
| 公开(公告)号 | US20060078760A1 | 公开(公告)日 | 2006-04-13 |
| 申请号 | US11/219820 | 申请日 | 2005-09-07 |
| [标]申请(专利权)人(译) | RAGINI DASř 常SEOK LYU易YEOL 韩EUN SIL BYUN YOUNG HUN PU LYONG SUN 李钟HYOUP | | |
| 申请(专利权)人(译) | RAGINI DASř 常SEOK LYU YI-YEOL 韩EUN-SIL BYUN YOUNG-HUN PU LYONG-SUN 李钟HYOUP | | |
| 当前申请(专利权)人(译) | 三星DISPLAY CO. , LTD. | | |
| [标]发明人 | RAGINI DAS RUPASREE CHANG SEOK LYU YI YEOL HAN EUN SIL BYUN YOUNG HUN PU LYONG SUN LEE JONG HYOUP | | |
| 发明人 | RAGINI, DAS RUPASREE CHANG, SEOK LYU, YI-YEOL HAN, EUN-SIL BYUN, YOUNG-HUN PU, LYONG-SUN LEE, JONG-HYOUP | | |
| IPC分类号 | H01L51/54 H05B33/14 C09K11/06 C07D401/00 | | |
| CPC分类号 | C07F15/0033 C07F15/0086 C09K11/06 C09K2211/1044 C09K2211/185 H01L51/0059 H01L51/0081 H01L51/0085 H01L51/5016 H01L51/5036 H05B33/14 Y02B20/181 Y10S428/917 | | |
| 优先权 | 1020040081060 2004-10-11 KR | | |
| 其他公开文献 | US7601438 | | |
| 外部链接 | Espacenet USPTO | | |

摘要(译)

提供了一种具有高效磷光的环金属化过渡金属络合物和使用该络合物的有机电致发光显示装置。该过渡金属络合物可用于形成有机电致发光显示装置的有机膜。过渡金属配合物可以发射波长范围为400-650nm的光。此外，通过一起使用绿色发光材料或红色发光材料，复合物可以发射白光。

(I)

