



US 20050064238A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0064238 A1**

Lee et al.

(43) **Pub. Date:** **Mar. 24, 2005**

(54) **4,4'-BIS(CARBAZOL-9-YL)-BIPHENYL
BASED SILICONE COMPOUND AND
ORGANIC ELECTROLUMINESCENT
DEVICE USING THE SAME**

(75) Inventors: **Seok Jong Lee**, Suwon-si (KR);
Young-Kook Kim, Suwon-si (KR);
Seok-Hwan Hwang, Suwon-si (KR)

Correspondence Address:
STAAS & HALSEY LLP
SUITE 700
1201 NEW YORK AVENUE, N.W.
WASHINGTON, DC 20005 (US)

(73) Assignee: **Samsung SDI Co., Ltd.**, Suwon-si (KR)

(21) Appl. No.: **10/876,843**

(22) Filed: **Jun. 28, 2004**

(30) **Foreign Application Priority Data**

Sep. 22, 2003 (KR) 2003-65538

Publication Classification

(51) **Int. Cl.**⁷ **H05B 33/12**; **C07D 209/82**;
C07F 7/10

(52) **U.S. Cl.** **428/690**; **428/917**; **313/504**;
313/506; **548/440**; **556/413**;
562/899

(57) **ABSTRACT**

A 4,4'-Bis(carbazol-9-yl)-biphenyl (CBP) based silicone compound and an organic electroluminescent device using the CBP based silicon compound have excellent blue light emission characteristics and hole transfer capability. The CBP based silicon compound may be used as a blue light emission material or as a host material for various phosphorescent or fluorescent dopants emitting red, green, blue, or white light. Therefore, the organic electroluminescent device using the CBP based silicon compound has excellent characteristics such as a high efficiency, a high luminance, a long life span, and a low power consumption.

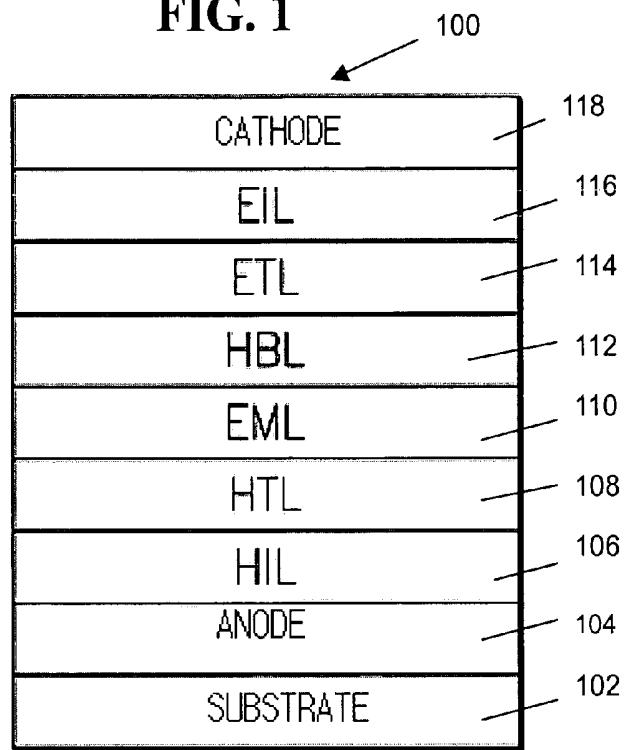
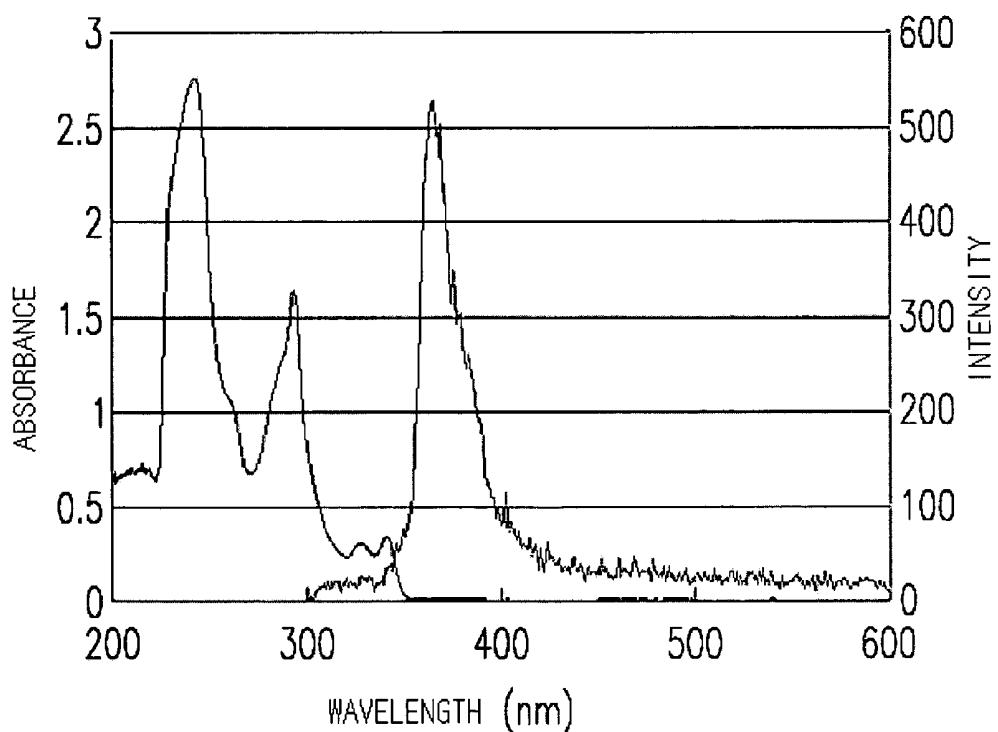
FIG. 1**FIG. 2**

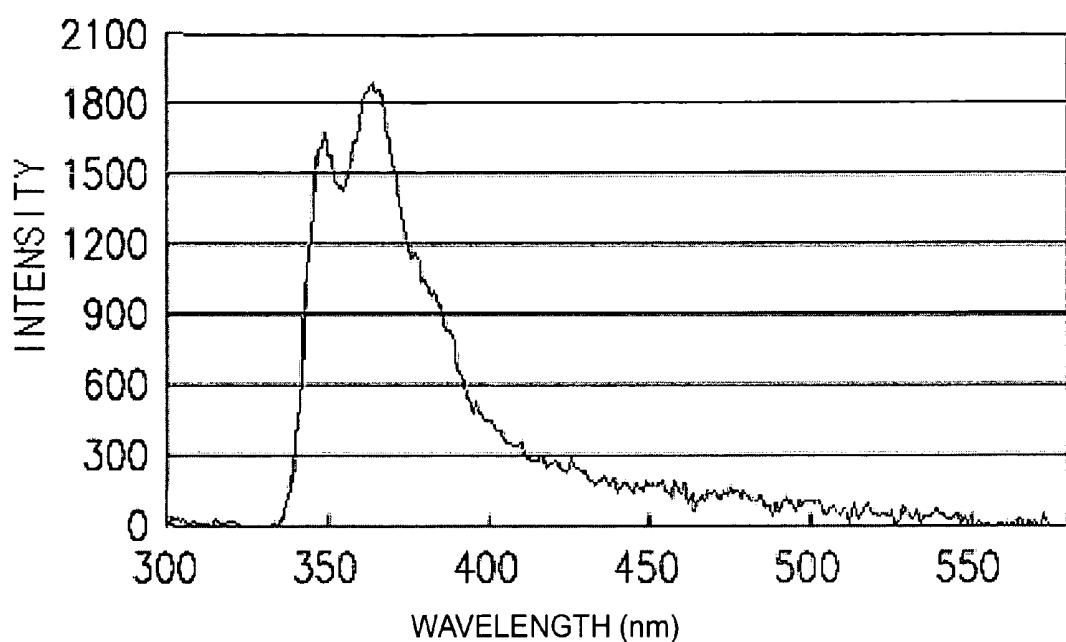
FIG. 3

FIG. 4

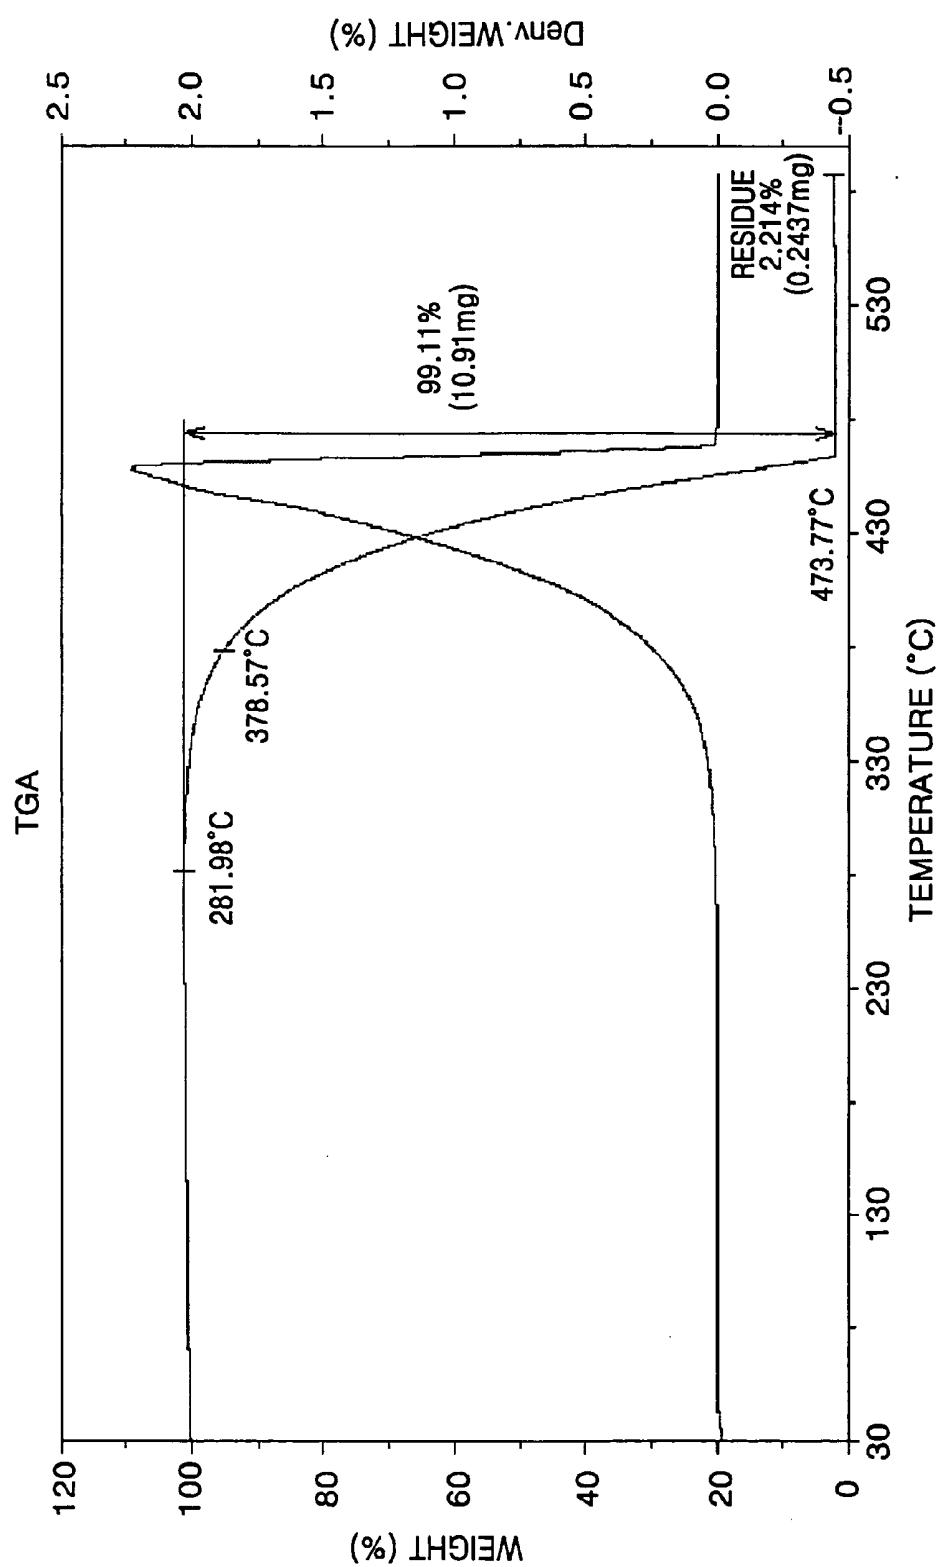


FIG. 5

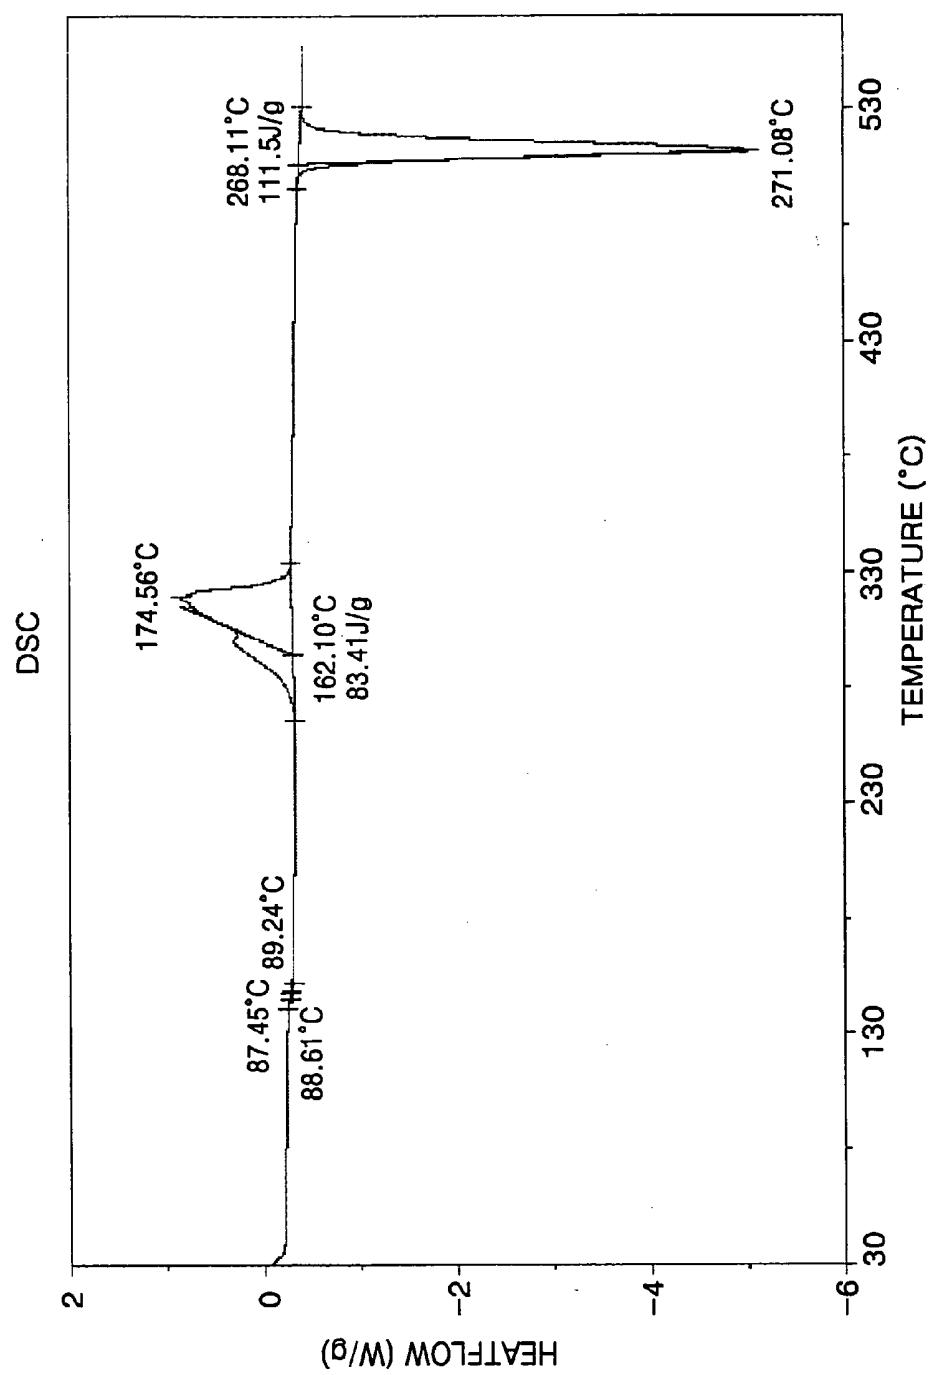


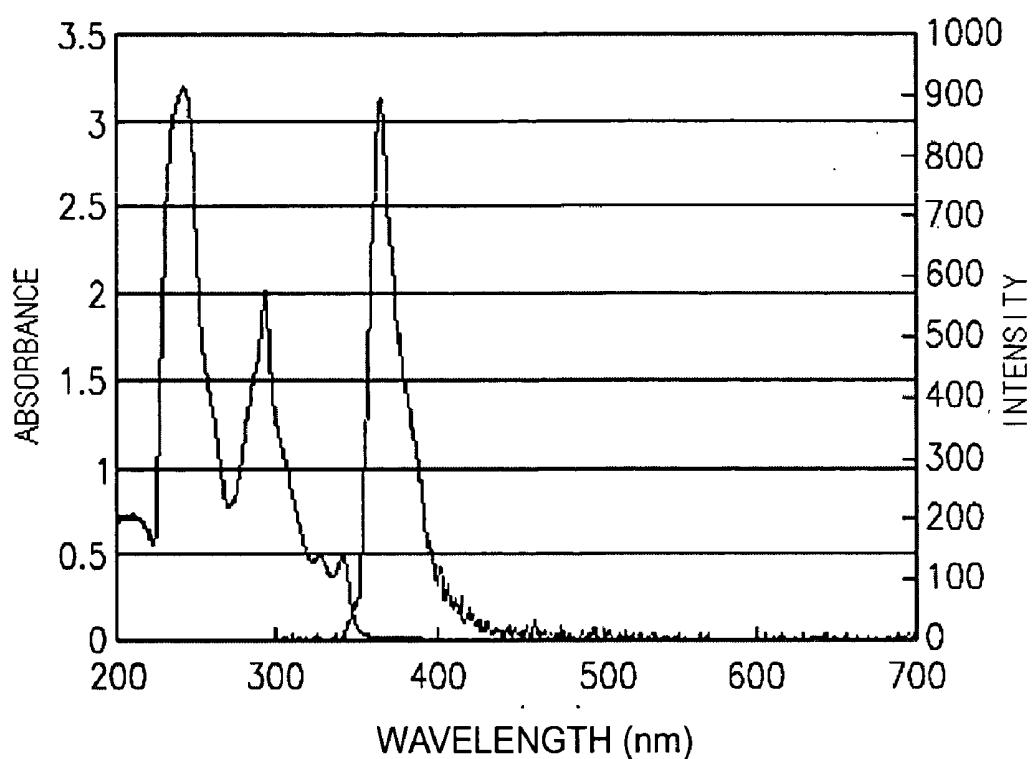
FIG. 6

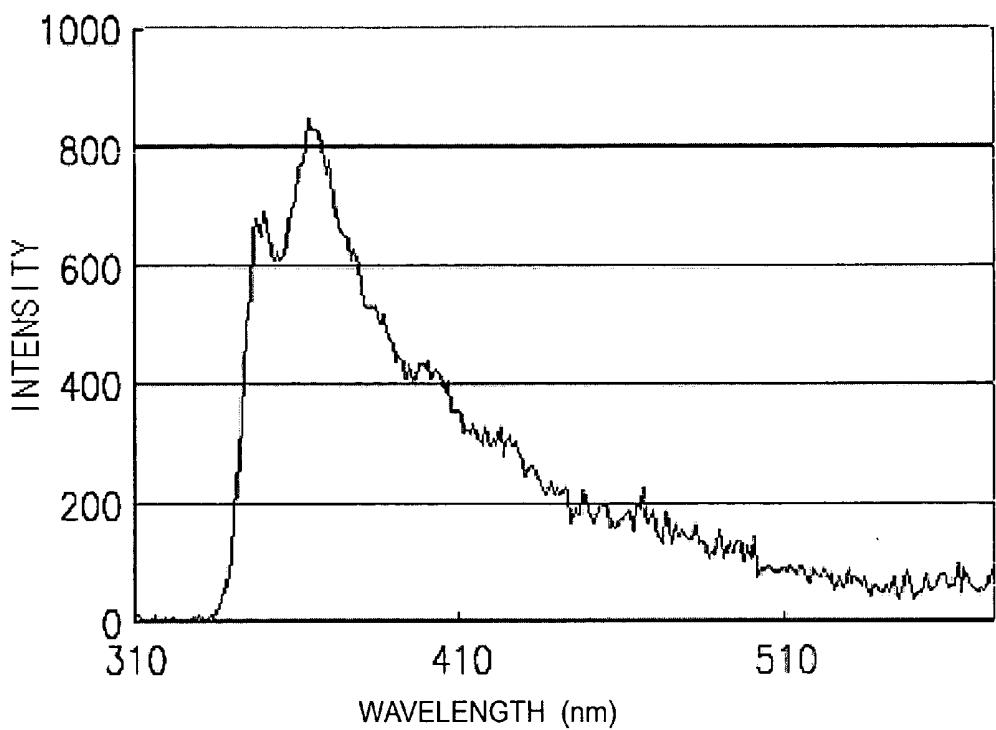
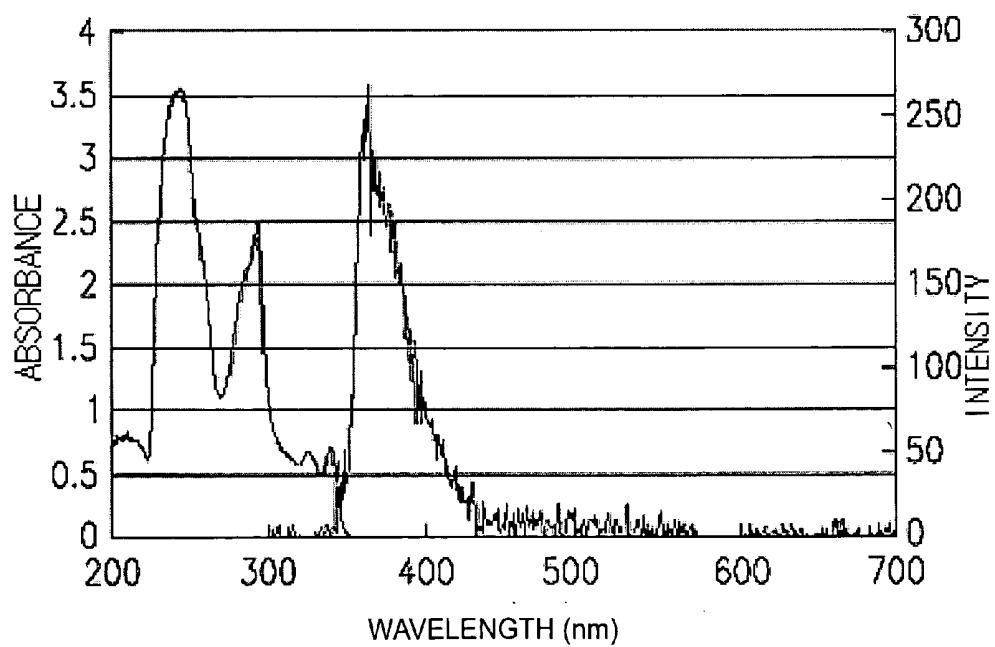
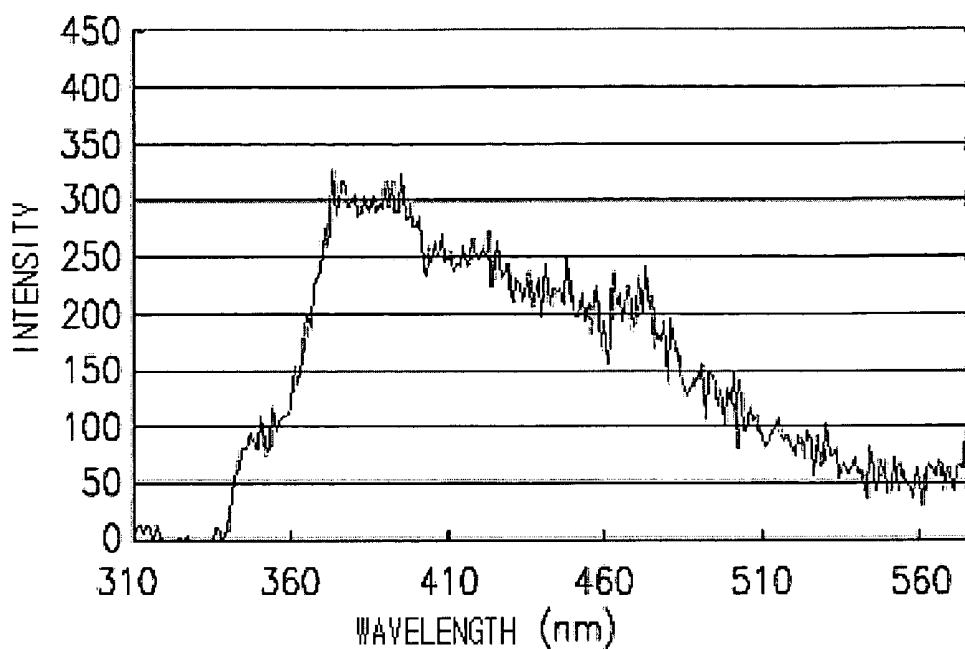
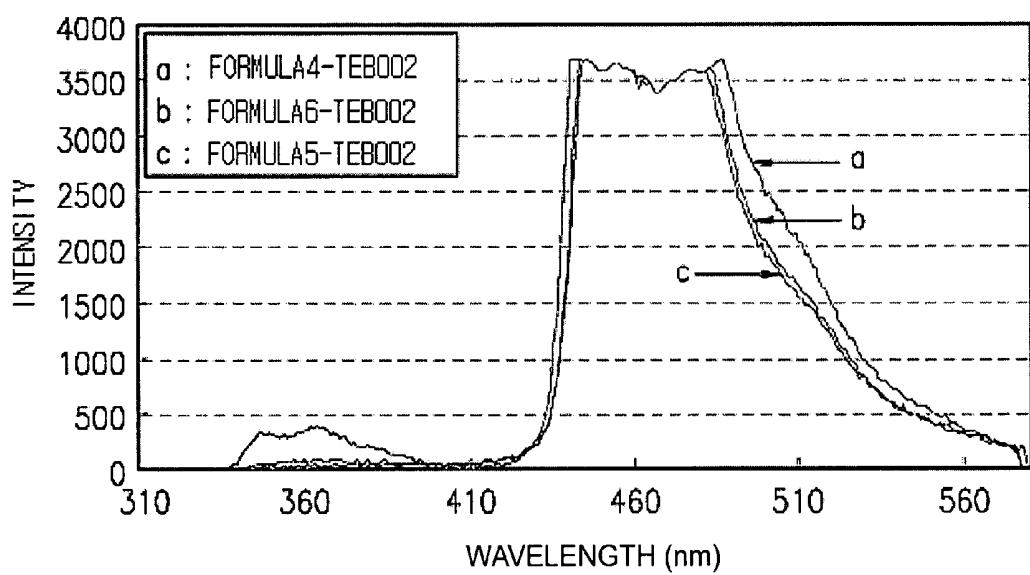
FIG. 7**FIG. 8**

FIG. 9**FIG. 10**

**4,4'-BIS(CARBAZOL-9-YL)-BIPHENYL BASED
SILICONE COMPOUND AND ORGANIC
ELECTROLUMINESCENT DEVICE USING THE
SAME**

**CROSS-REFERENCE TO RELATED
APPLICATIONS**

[0001] This application claims the priority of Korean Patent Application No. 2003-65538, filed on Sep. 22, 2003, in the Korean Intellectual Property Office, the disclosure of which is incorporated herein by reference in its entirety.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a 4,4'-Bis(carbazol-9-yl)-biphenyl (CBP) based silicone compound and an organic electroluminescent device using the same. More particularly, the present invention relates to a CBP based compound that may be used as a host material for various phosphorescent or fluorescent dopants emitting red, green, blue, or white light, and an organic electroluminescent device using the CBP based compound which has enhancements such as, for example, high efficiency, high luminance, long life span, and low power consumption.

[0004] 2. Description of the Related Art

[0005] Electroluminescent devices (EL devices) are self emission type display devices that have advantages such as a wide viewing angle, superior contrast, and fast response speed.

[0006] The EL devices are classified into inorganic EL devices and organic EL devices according to the material utilized in a light-emitting layer. The organic EL devices have advantages over the inorganic EL devices, such as high luminance, low driving voltage, fast response speed, and multi-coloration.

[0007] Generally, the organic EL devices have a sequentially stacked structure of an anode, a hole transport layer, a light-emitting layer, an electron transport layer, and a cathode on a substrate. The hole transport layer, the light-emitting layer, and the electron transport layer are organic films comprising an organic compound.

[0008] The organic EL devices having the above-described structure are driven in accordance with the following principle.

[0009] When a voltage is applied to the anode and the cathode, holes from the anode migrate toward the light-emitting layer via the hole transport layer. On the other hand, electrons from the cathode are injected into the light-emitting layer via the electron transport layer. Thereafter, the electrons and the holes recombine with each other at the light-emitting layer to generate excitons. When the excitons are converted from an excited state to a ground state, a fluorescent molecule of the light-emitting layer emits light, which displays an image. Here, light emission through conversion from a singlet excited state to a ground state is

called "fluorescence", and light emission through conversion from a triplet excited state to a ground state is called "phosphorescence." With respect to fluorescence, the proportion of singlet excited state is 25% (the proportion of triplet excited state is 75%), and thus, there is a limitation on light emission efficiency. On the other hand, with respect to phosphorescence, the triplet excited state and the singlet excited state may be used. Therefore, a theoretical internal quantum efficiency may reach 100%.

[0010] By way of an example of an organic electroluminescent device using phosphorescence, a highly efficient, green and red-emitting organic electroluminescent device may use a CBP based host, and a phosphorescent dopant such as $\text{Ir}(\text{ppy})_3$ (ppy is phenylpyridine) and PtOEP (platinum(II) octaethylporphyrin) having heavy elements with significant spin-orbit coupling such as Ir and Pt in the center thereof may be utilized. However, the organic electroluminescent device has a short life span of 150 hours or less since CBP has a low glass transition temperature of less than 110° C. and is easily crystallized, which makes it difficult to provide a commercially suitable product.

[0011] As another example of an organic electroluminescent device using phosphorescence, an organic electroluminescent device uses a blue phosphorescent dopant $(4,6-\text{F}_2\text{ppy})_2\text{Irpic}$ with a fluorinated ppy ligand structure. The energy band gap between the triplet state and the ground state of CBP is high enough to provide an energy transition for green and red phosphorescent dopants, but is smaller than the energy band gap of a blue phosphorescent dopant. Therefore, it is reported that a very inefficient endothermic energy transition, not an exothermic energy transition, occurs even when a material such as $(4,6-\text{F}_2\text{ppy})_2\text{Irpic}$ with photoluminescent (PL) peaks at 475 nm and 495 nm is used. For this reason, the CBP based host cannot provide a sufficient energy transition for a blue phosphorescent dopant, thus causing problems such as low-efficiency blue light emission and a short life span.

[0012] In addition, U.S. patent application Laid-Open Publication No. 2002/0125818 A1 discloses an organic electroluminescent device using a CBP based compound.

[0013] Recently, a mCP (1,3-Bis(carbazol-9-yl)-benzene) compound having a triplet energy band gap higher than CBP has been used. However, the mCP compound has problems such as a molecular weight that is too small and a low stability. In this regard, to obtain high-efficiency blue light emission characteristics exhibiting a long lifetime, it is very beneficial to develop a host material with a triplet energy band gap that is larger than the triplet energy band gap of CBP for efficient energy transition for a blue-emitting dopant and which has a high glass transition temperature (Tg).

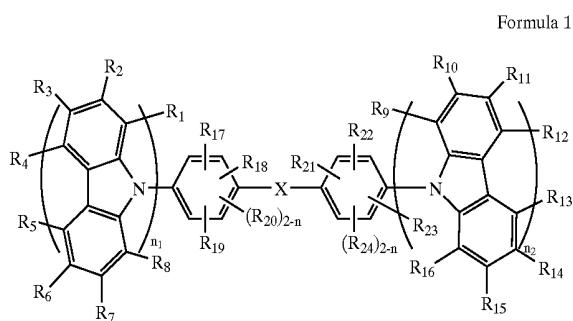
SUMMARY OF THE INVENTION

[0014] The present invention provides a host material suitable for fluorescent and phosphorescent dopants, emitting a full color including red, green, blue, and white color,

which has a high electrical stability, a high charge transport capability, and a high glass transition temperature, and prevents crystallization.

[0015] The present invention also provides an organic electroluminescent device having a high efficiency, low voltage, high luminance, and long life span by using the host material.

[0016] According to an aspect of the present invention, a compound is represented by Formula 1 below:



[0017] wherein:

[0018] n_1 and n_2 are independently 1 or 2,

[0019] X is $-\text{Si}(\text{A}_1)(\text{A}_2)$ - or Se, and

[0020] $\text{A}_1, \text{A}_2, \text{R}_1$ and R_{24} are independently a hydrogen atom, a substituted or unsubstituted alkyl group of $\text{C}_1\text{-C}_{30}$, a substituted or unsubstituted acyl group of $\text{C}_1\text{-C}_{30}$, a substituted or unsubstituted alkoxy carbonyl group of $\text{C}_1\text{-C}_{30}$, a substituted or unsubstituted alkoxy group of $\text{C}_1\text{-C}_{30}$, a substituted or unsubstituted alkenyl group of $\text{C}_2\text{-C}_{30}$, a substituted or unsubstituted alkynyl group of $\text{C}_2\text{-C}_{30}$, a substituted or unsubstituted alkylcarboxyl group of $\text{C}_2\text{-C}_{30}$, a substituted or unsubstituted aryl group of $\text{C}_6\text{-C}_{30}$, a substituted or unsubstituted aralkyl group of $\text{C}_6\text{-C}_{30}$, a substituted or unsubstituted aralkyloxy group of $\text{C}_6\text{-C}_{30}$, a substituted or unsubstituted heteroaryl group of $\text{C}_2\text{-C}_{30}$, a substituted or unsubstituted heteroaryloxy group of $\text{C}_2\text{-C}_{30}$, a substituted or unsubstituted aryloxy group of $\text{C}_6\text{-C}_{30}$, a substituted or unsubstituted cycloalkyl group of $\text{C}_4\text{-C}_{30}$, $-\text{N}(\text{R})(\text{R}')$ provided that R and R' are independently a hydrogen, an alkyl group of $\text{C}_1\text{-C}_{30}$, an aryl group of $\text{C}_6\text{-C}_{30}$, or a heteroaryl group of $\text{C}_2\text{-C}_{30}$, cyano, hydroxy, or carboxyl, and at least an adjacent two of R_1 to R_{24} are connectable to form a ring.

[0021] According to another aspect of the present invention, an organic electroluminescent device comprises an organic film between a pair of electrodes, wherein the organic film comprises the above-described compound.

[0022] Additional aspects and/or advantages of the invention will be set forth in part in the description which follows and, in part, will be obvious from the description, or may be learned by practice of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] These and/or other aspects and advantages of the invention will become apparent and more readily appreci-

ated from the following description of the embodiments, taken in conjunction with the accompanying drawings of which:

[0024] FIG. 1 is a sectional view of a conventional organic electroluminescent device in accordance with an embodiment of the present invention;

[0025] FIG. 2 is a photoluminescent (PL) spectrum of a solution containing a compound of Formula 4;

[0026] FIG. 3 is a PL spectrum of a film including a compound of Formula 4;

[0027] FIG. 4 is a graph illustrating the results of a thermogravimetric analysis (TGA) of the compound of Formula 4;

[0028] FIG. 5 is a graph illustrating the results of a differential scanning calorimetry (DSC) analysis of the compound of Formula 4;

[0029] FIG. 6 is a PL spectrum of a solution containing a compound of Formula 5;

[0030] FIG. 7 is a PL spectrum of a film including the compound of Formula 5;

[0031] FIG. 8 is a PL spectrum of a solution containing a compound of Formula 6;

[0032] FIG. 9 is a PL spectrum of a film including the compound of Formula 6; and

[0033] FIG. 10 is a PL spectrum of films including a mixture of the compound of Formula 4 and TEB002 (COVION CO.), a mixture of the compound of Formula 5 and TEB002 (COVION CO.), and a mixture of the compound of Formula 6 and TEB002 (COVION CO.).

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0034] Reference will now be made in detail to the embodiments of the present invention, examples of which are illustrated in the accompanying drawings, wherein like reference numerals refer to the like elements throughout. The embodiments are described below to explain the present invention by referring to the figures.

[0035] The compound represented by Formula 1 according to an embodiment of the present invention is a blue light emission material and exhibits blue light emission characteristics that are darker than the blue light emission characteristics of conventional molecules. Therefore, the compound represented by Formula 1 may be used as a blue host material for a full color organic electroluminescent device. In particular, the compound is useful as a blue phosphorescent host with a triplet energy band gap and a thermal stability suitable for a blue phosphorescent dopant containing a metal such as Ir, Pt, Os, and/or Re. In addition, the compound may be used as a host material for various phosphorescent or fluorescent dopants emitting red, green, blue, or white light. Therefore, an organic electrolumines-


cent device having a high efficiency, a high luminance, a long life span, and a low power consumption may be obtained.

[0036] In Formula 1, as described above, at least an adjacent two of R₁ to R₂₄ may be interconnected to form a ring. For example, any pair of adjacent substituents such as R₁ and R₂, R₂ and R₃, R₃ and R₄, R₅ and R₆, R₆ and R₇, and R₇ and R₈ may independently form a benzene ring or a cyclohexane ring.


[0037] A representative of the compound of Formula 1 may be a compound of Formula 2 or 3 below:

-continued

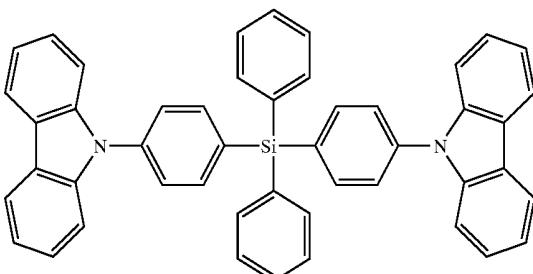
Formula 5




Formula 2

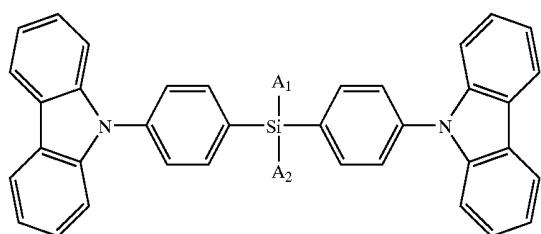


Formula 3

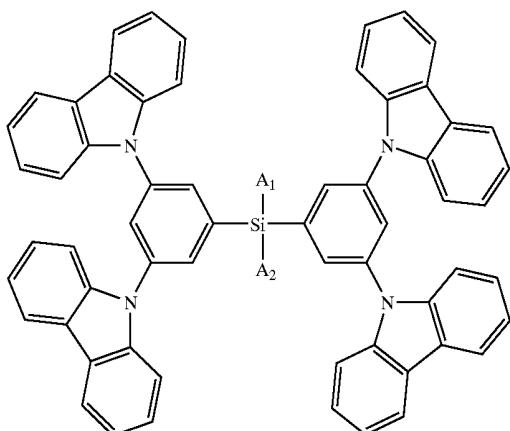

Formula 6

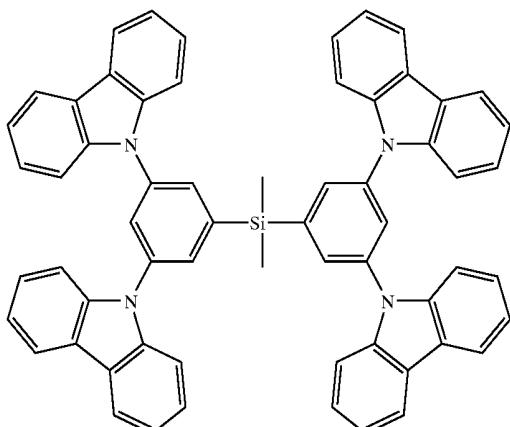


Formula 7

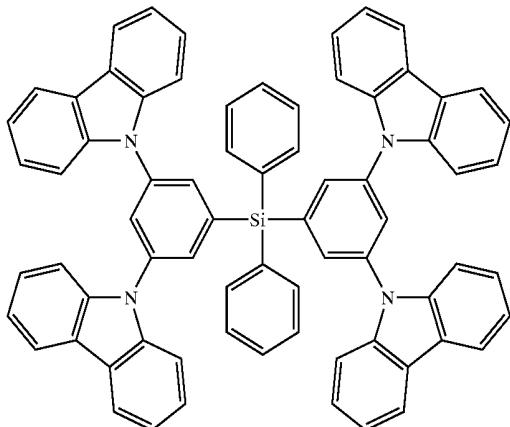


[0038] wherein, A₁ and A₂ are as defined above.

[0039] Examples of the compound of Formula 2 or 3 include the compounds represented by Formulas 4 to 18 below:

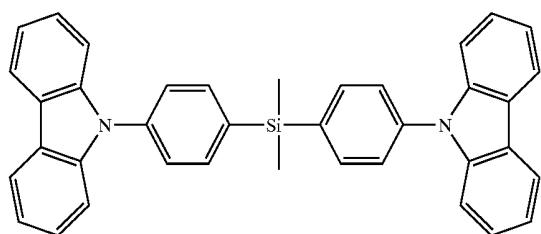Formula 4





Formula 8

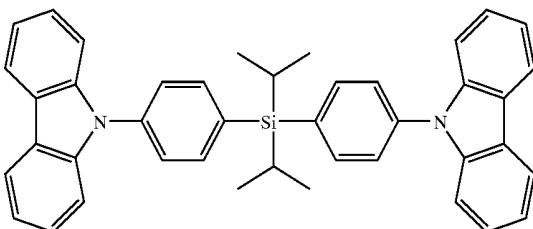


-continued

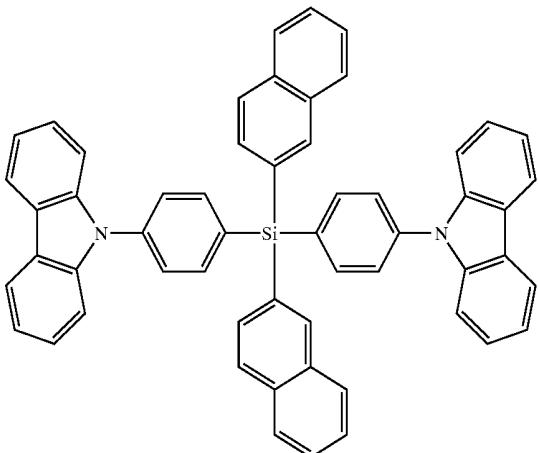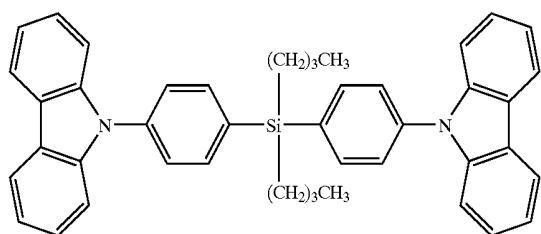
-continued




Formula 10

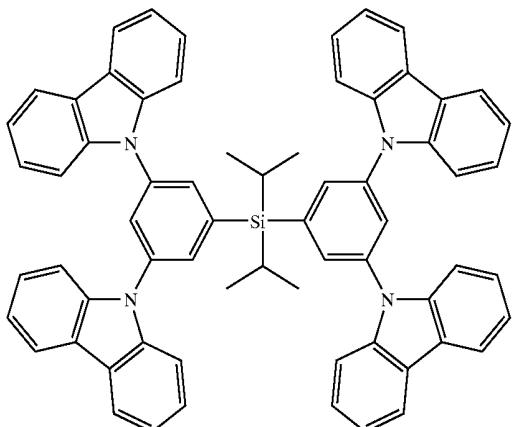


Formula 13

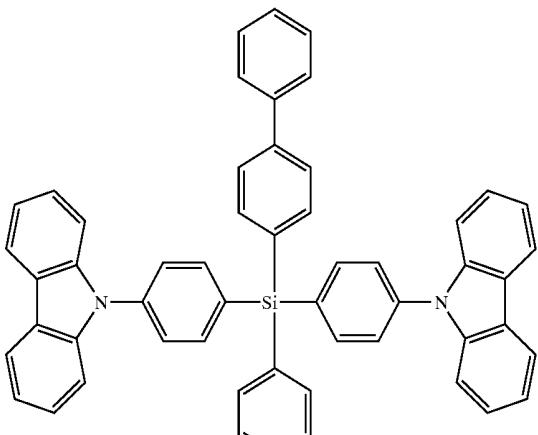

Formula 11

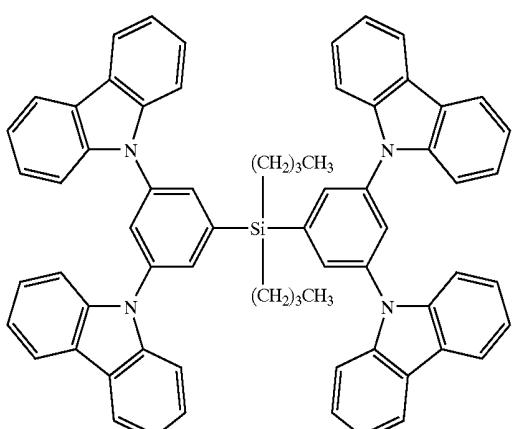


Formula 14

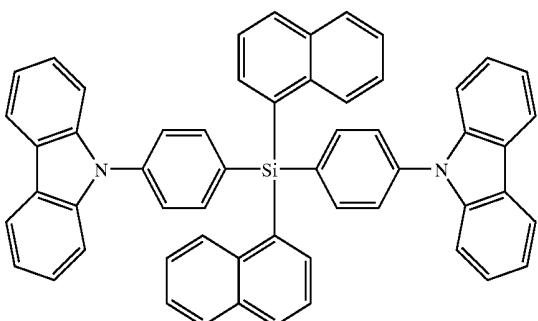


-continued

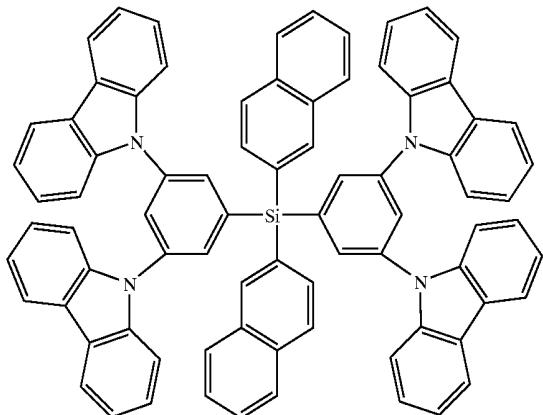Formula 15




-continued

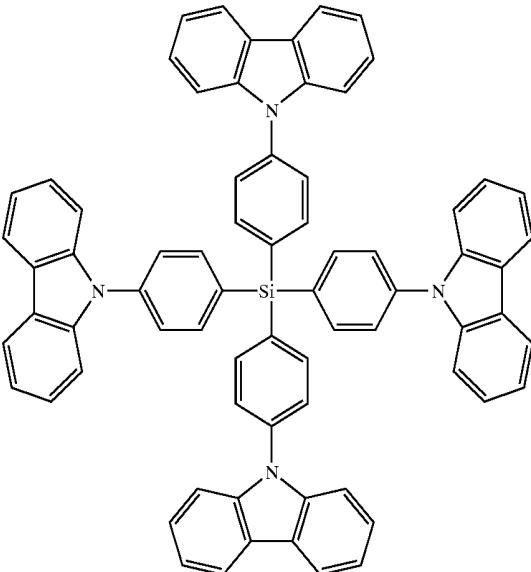
Formula 18



Formula 16

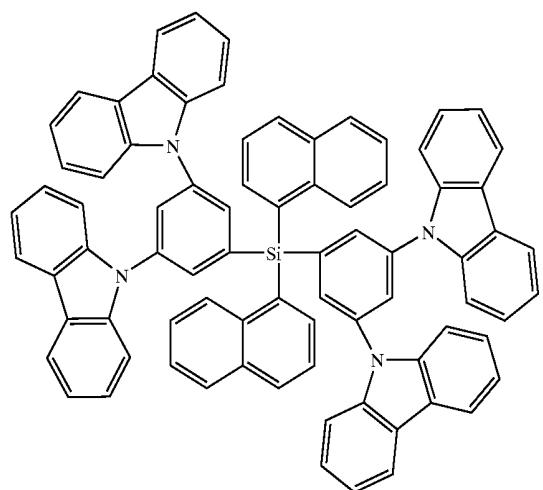

Formula 17

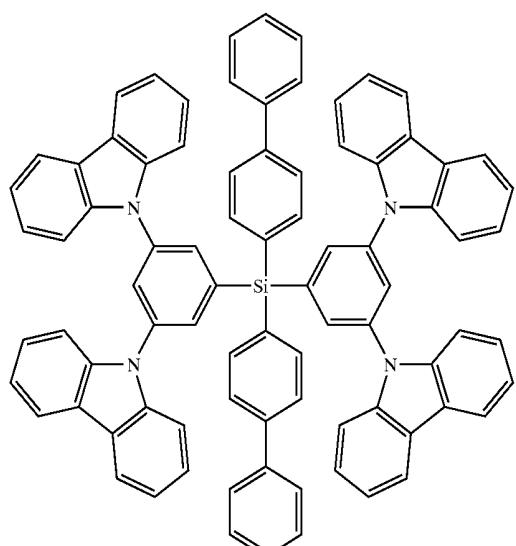

[0040] Examples of an unsubstituted alkyl group of C_1 - C_{30} , as used in Formulas 1 to 3, include methyl, ethyl, propyl, isobutyl, sec-butyl, pentyl, iso-amyl, and hexyl. One or more hydrogen atoms of the alkyl group may be substituted with a halogen atom, a hydroxy group, a nitro group, a cyano group, an amino group, an amidino group, a hydrazine group, a hydrazone group, a carboxyl group or its salt, a sulfonyl group or its salt, a phosphoryl group or its salt, an alkyl group of C_1 - C_{30} , an alkenyl group of C_1 - C_{30} , an alkynyl group of C_1 - C_{30} , an aryl group of C_6 - C_{30} , an arylalkyl group of C_7 - C_{20} , a heteroaryl group of C_2 - C_{20} , or a heteroarylalkyl group of C_3 - C_{30} .

[0041] Examples of an unsubstituted acyl group of C_1 - C_{30} , as used in Formulas 1 to 3, include acetyl, ethylcarbonyl, isopropylcarbonyl, phenylcarbonyl, naphthylene-carbonyl, diphenylcarbonyl, and cyclohexylcarbonyl. One or more hydrogen atoms of the acyl group may be substituted with the same substituent as in the above-described alkyl group.

[0042] Examples of an unsubstituted alkoxy carbonyl group of C_2 - C_{30} , as used in Formulas 1 to 3, include methoxycarbonyl, ethoxycarbonyl, phenoxy carbonyl, cyclohexyloxy carbonyl, naphthoxy carbonyl, and isopropoxy carbonyl. One or more hydrogen atoms of the alkoxy carbonyl group may be substituted with the same substituent as in the above-described alkyl group.

[0043] Examples of an unsubstituted alkoxy group of C_1 - C_{30} , as used in Formulas 1 to 3, include methoxy, ethoxy, phenoxy, cyclohexyloxy, naphthoxy, isopropoxy, and diphenyloxy. One or more hydrogen atoms of the alkoxy group may be substituted with the same substituent as in the above-described alkyl group.

[0044] The term “unsubstituted alkenyl group of C_2 - C_{30} ,” as used in Formulas 1 to 3, indicates a radical that contains

one or more carbon-carbon double bonds at a center or end of the alkyl group as defined above. Examples of the unsubstituted alkenyl group of C_2 - C_{30} include ethylene, propylene, butylene, and hexylene. One or more hydrogen atoms of the alkenyl group may be substituted with the same substituent as in the above-described alkyl group.

[0045] The term “unsubstituted alkynyl group of C_2 - C_{30} ,” as used in Formulas 1 to 3, indicates a radical that contains one or more carbon-carbon triple bonds at a center or an end of the alkyl group as defined above. Examples of the unsubstituted alkynyl group of C_2 - C_{30} include acetylene, propylene, phenylacetylene, naphthylacetylene, isopropylacetylene, t-butylacetylene, and diphenylacetylene. One or more hydrogen atoms of the alkynyl group may be substituted with the same substituent as in the above-described alkyl group.

[0046] Examples of the unsubstituted alkylcarboxyl group of C_2 - C_{30} , as used in Formulas 1 to 3, include a methylcarboxyl group, an ethylcarboxyl group, a phenylcarboxyl group, a cyclohexylcarboxyl group, a naphthylcarboxyl group, and an isopropylcarboxyl group. One or more hydrogen atoms of the alkylcarboxyl group may be substituted with the same substituent as in the above-described alkyl group.

[0047] The term “unsubstituted aryl group,” as used in Formulas 1 to 3, indicates a C_6 to C_{30} carbocyclic aromatic system containing one or more rings, wherein such rings may be attached together in a pendant manner or may be fused. The term, “aryl” includes an aromatic radical such as phenyl, naphthyl, and tetrahydronaphthyl. One or more hydrogen atoms of the aryl group may be substituted with the same substituent as in the above-described alkyl group.

[0048] Examples of the unsubstituted aryloxy group, as used in Formulas 1 to 3, includes phenoxy, naphthoxy, and diphenyloxy. One or more hydrogen atoms of the aryloxy group may be substituted with the same substituent as in the above-described alkyl group.

[0049] The term “unsubstituted aralkyl group,” as used in Formulas 1 to 3, indicates the above-defined aryl group having a lower alkyl substituents for some hydrogen atoms. Examples of the unsubstituted aralkyl group include benzyl and phenylethyl. One or more hydrogen atoms of the aralkyl group may be substituted with the same substituent as in the above-described alkyl group.

[0050] The term “unsubstituted heteroaryl group,” as used herein, indicates a 5-30 membered aromatic cyclic system containing one, two, or three of hetero atoms selected from N, O, P, and S. One or more hydrogen atoms of the heteroaryl group may be substituted with the same substituent as in the above-described alkyl group.

[0051] The term “unsubstituted heteroaryloxy group,” as used herein, indicates the above defined heteroaryl group containing oxygen. Examples of the unsubstituted heteroaryloxy group include benzyloxy and phenylethoxy. One or more hydrogen atoms of the heteroaryloxy group may be substituted with the same substituent as in the above-described alkyl group.

[0052] An example of an unsubstituted aralkyloxy group, as used herein, is benzyloxy group. One or more hydrogen atoms of the aralkyloxy group may be substituted with the same substituent as in the above-described alkyl group.

[0053] The term “unsubstituted heteroaralkyl group,” as used herein, indicates the heteroaryl group having an alkyl substituent. One or more hydrogen atoms of the heteroaralkyl group may be substituted with the same substituent as in the above-described alkyl group.


[0054] Examples of the unsubstituted cycloalkyl group, as used herein, include the cyclohexyl group and the cyclopentyl group. One or more hydrogen atoms of the cycloalkyl group may be substituted with the same substituent as in the above-described alkyl group.

[0055] Examples of $-\text{N}(\text{R})(\text{R}')$, as used herein, include an amino group and a dimethylamino group.

[0056] The compound represented by Formula 1 may be synthesized by various reaction pathways known in the pertinent art. An example of such reaction pathways is as follows.

[0057] First, carbazole (A) reacts with phenyl halide (B) to produce a compound (C), as shown in Scheme 1 below.


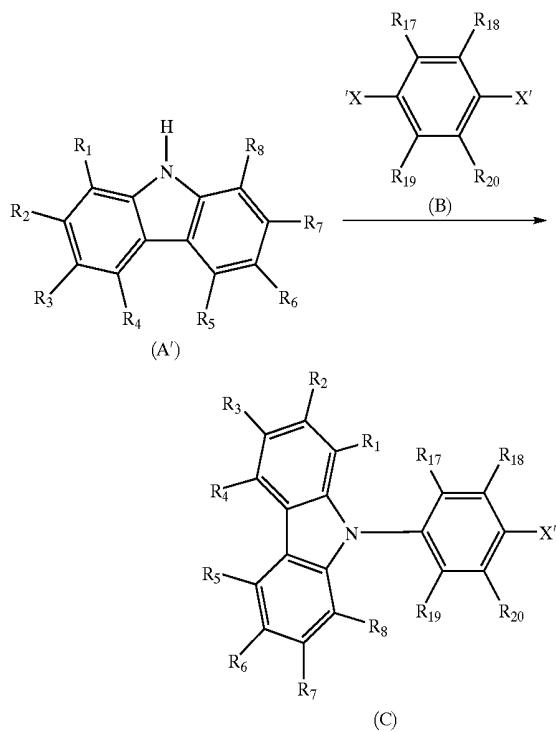
Scheme 1



[0058] wherein, X' is $-\text{Cl}$, $-\text{Br}$, or $-\text{I}$, and R₁ to R₈, and R₁₇ to R₂₀ are as defined above.

[0059] Next, the compound (C) reacts with an organic lithium compound such as n-butyllithium, and then silicone halogenide such as $(\text{A}_1)(\text{A}_2)\text{SiX}'_2$ to produce the compound represented by Formula 1, as shown in Scheme 2 below.

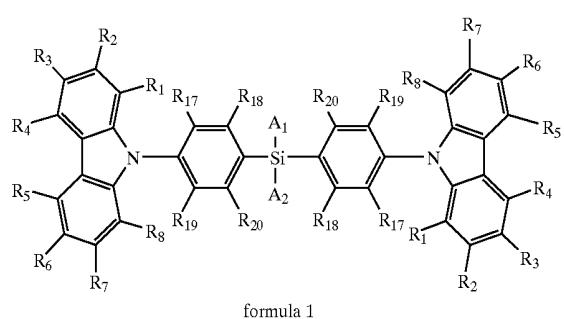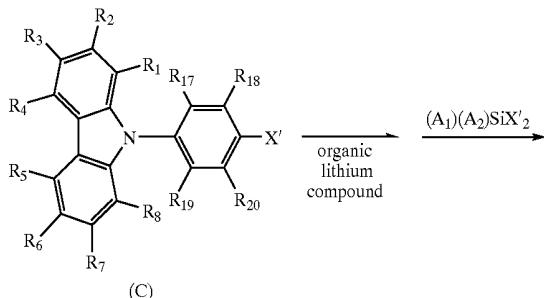Scheme 2



[0060] wherein, X' is —Cl, —Br, or —I, A₁ and A₂, R₁ to R₈, and R₁₇ to R₂₀ are as defined above.

[0061] Hereinafter, an organic electroluminescent device using the compound represented by Formula 1 as a material for an organic film, and a method of manufacturing the same will be described in detail.

[0062] FIG. 1 is a sectional view of an organic electroluminescent (EL) device **100** in accordance with an embodiment of the present invention. First, an anode material is coated on an upper surface of a substrate **102** to form an anode **104**. Here, the substrate **102** may be a substrate used in a conventional organic EL device. It is preferable to use a glass substrate or a transparent plastic substrate with excellent transparency, surface smoothness, a facilitated handling property, and a waterproof property. The anode material may be indium tin oxide (ITO), indium zinc oxide (IZO), tin oxide (SnO₂), or zinc oxide (ZnO), all of which are transparent and conductive.

[0063] A hole injection material is applied to an upper surface of the anode by vacuum thermal deposition or spin coating to form a hole injection layer (HIL) **106**. Although there are no particular limitations on the hole injection material, it is preferable to use copper phthalocyanine (CuPc), or Starburst amines such as TCTA, m-MTDATA, and m-MTDAPB. Here, TCTA, m-MTDATA, and m-MTDAPB have chemical Formulas shown in J. Chem. Inf. Comput. Sci. 2003, vol. 43, pp. 970-977.

[0064] Next, a hole transport material is applied to an upper surface of the hole injection layer by vacuum thermal

deposition or spin coating to form a hole transport layer (HTL) **108**. Although there are no particular limitations on the hole transport material, it is preferable to use N,N'-bis(3-methylphenyl)-N,N'-diphenyl-4,4'-diamine (TPD), or N,N'-di(naphthalene-1-yl)-N,N'-diphenyl benzidine.

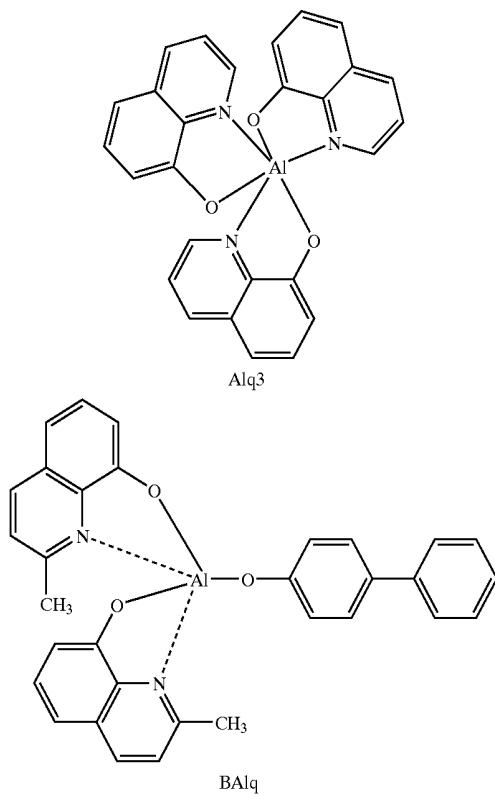
[0065] A light-emitting layer (EML) **110** is formed on an upper surface of the hole transport layer **108** thus formed. There are no particular limitations on a material for the light-emitting layer **110**. The compound of Formula 1 may be used in alone or may be used as a host material, together with a visible light phosphorescent or fluorescent dopant.

[0066] The fluorescent dopant may be IDE102 or IDE105, which are commercially available from IDEMITSU CO., and the phosphorescent dopant may be Ir(ppy)₃ (ppy is phenylpyridine) (green light), (4,6-F₂ppy)₂Irpic et al. (Chi-haya Adachi etc., Appl. Phys. Lett., 79, 2082-2084, 2001), TEB002 (COVION CO.), or PtOEP (platinum(II) octaethylporphyrin).

[0067] The method of forming the light-emitting layer may vary according to the light-emitting material. For example, vacuum thermal deposition may be used.

[0068] The dopant is used in an amount of 0.1 to 20 parts by weight, preferably 0.5 to 12 parts by weight, based on 100 parts by weight of the light-emitting material, i.e., the total weight of the host compound of Formula 1 and the dopant. If the content of the dopant is less than 0.1 parts by weight, an addition effect is insufficient. On the other hand, if the content of the dopant exceeds 20 parts by weight, phosphorescence and fluorescence are too weak due to concentration quenching.

[0069] An electron transport material is applied to the light-emitting layer by vacuum deposition or spin coating to form an electron transport layer (ETL) **114**. Although there are no particular limitations on the electron transport material, it is preferable to use Alq₃ (tris(8-quinolinolato)-aluminum) represented by following formula, BCP (2,9-dimethyl-4,7-diphenylphenanthroline), TAZ (3-phenyl-4-(1'-naphthyl)-5-phenyl-1,2,4-triazole), or OXD7 (1,3-bis(N,N-t-butyl-phenyl)-1,3,4-oxadiazole). When a phosphorescent dopant is used in the formation of the light-emitting layer to prevent the diffusion of triplet excitons or holes into the electron transport layer, a hole blocking material may be further applied to the light-emitting layer by vacuum thermal deposition to form a hole blocking layer (HBL) **112**, as shown in FIG. 1. Although there are no particular limitations on the hole blocking material, it is preferable to use the hole blocking material having an electron transport capability and an ionic potential higher than the light-emitting material. A representative of the hole blocking material is Balq, as represented by following formula or phenanthroline (for example: BCP, UDC Co.).



[0070] Then, an electron injection layer (EIL) 116 may be deposited on the electron transport layer, as shown in FIG. 1. Examples of an electron injection material include LiF, NaCl, CsF, Li₂O, and BaO.

[0071] Finally, a metal for forming cathode is formed on the electron injection layer by vacuum thermal deposition to form a cathode 118. Accordingly, an organic EL device is completed. The metal may be lithium (Li), magnesium (Mg), aluminum (Al), aluminum-lithium (Al—Li), calcium (Ca), magnesium-indium (Mg—In), or magnesium-silver (Mg—Ag). The cathode for a front emission type organic electroluminescent device may, for example, be a light-transmissible cathode made of a transparent material, such as ITO and IZO.

[0072] The CBP based silicon compound of Formula 1 may be used as the material for the hole transport layer 108 or the hole injection layer 106, due to a superior hole transport capability, in addition to being utilized as the material for the light-emitting layer 110, as described above.


[0073] The organic EL device of the present invention may include one or more intermediate layers between the anode 104, the hole injection layer 106, the hole transport layer 108, the light-emitting layer 110, the hole blocking layer 112, the electron transport layer 114, the electron injection layer 116, and the cathode 118, when needed.

[0074] Hereinafter, the present invention will be described more specifically by the following Syntheses and Examples. However, the following Syntheses and Examples are provided only for illustrations and thus the present invention is not limited to or by them.

[0075] Synthesis 1. Preparation of Compounds of Formulas 4 and 5

[0076] A compound of Formula 4 and a compound of Formula 5 were synthesized according to the reaction pathways shown in Scheme 3 below.

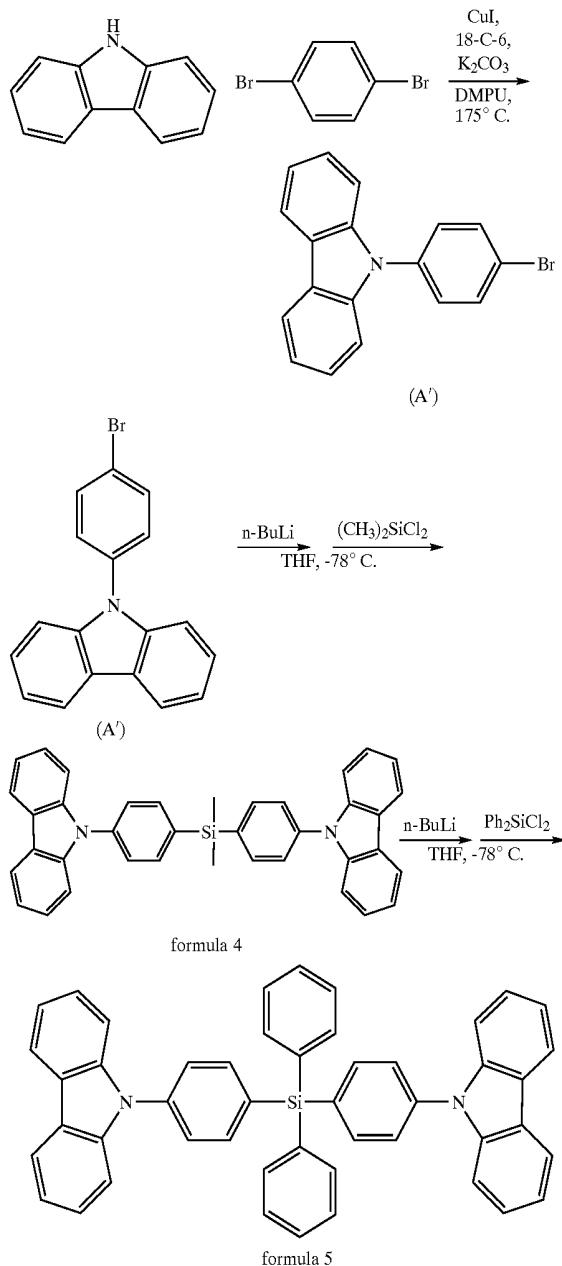Scheme 3



[0077] Synthesis of Intermediate (A')

[0078] Carbazole (335 mg, 2 mmol), 1,4-dibromobenzene (1.2 g, 5 mmol), CuI (76 mg, 0.4 mmol), K₂CO₃ (1.1 g, 8 mmol), and 18-Crown-6 (10 mg, 0.04 mmol) were dissolved in DMPU (1,3-Dimethyl-3,4,5,6-tetrahydro-(1H)-pyrimidinone) (5 mL), and then were heated at 170°C for 8 hours. The resultant mixture was cooled to room temperature, and the solids were filtered. After the filtration, a little ammonia

water was added to a filtrate, and the filtrate was extracted three times with diethylether (10 mL), and the thus-obtained diethylether layer was combined. The combined diethylether layer was dried over $MgSO_4$, and then was dried under reduced pressure to obtain a crude product. The crude product was purified by silica-gel column chromatography to give the intermediate (A') as a white solid (480 mg, yield 75%) and had the following spectrum: 1H -NMR ($CDCl_3$, 400MHz) δ (ppm) 8.12 (d, 2H), 7.70 (d, 2H), 7.43-7.34 (m, 6H), 7.30-7.26 (m, 2H).

[0079] Synthesis of Compound of Formula 4

[0080] The intermediate (A') (2 g, 6.29 mmol) was dissolved in THF (20 mL) and n-butyllithium (2.75 mL, 7.2 mmol, 2.5 equiv.) in n-hexane at $-78^\circ C$. was then dropwise added thereto, followed by stirring for one hour. Dichloromethylsilane (0.365 mL, 3.0 mmol) was added to the resultant mixture, and the resulting mixture was stirred at room temperature for 5 hours.

[0081] When the reaction was completed, an ammonium hydroxide solution (1 ml) was added to the reaction mixture, stirred for one hour, and extracted three times with ethylacetate (20 mL). A combined ethylacetate layer was dried over $MgSO_4$, and a solvent was removed. An obtained residue was dissolved in a mixed solvent (1:4 by volume) of ethylacetate and n-hexane and filtered to give the compound of Formula 4 as a white solid (1.2 g, yield 74%), which had the following spectra: 1H -NMR ($CDCl_3$, 300MHz) δ (ppm) 8.14 (d, 4H), 7.83 (d, 4H), 7.62 (d, 4H), 7.49 (d, 4H), 7.41 (dt, 4H), 7.29 (dt, 4H), 0.773 (s, 6H) and ^{13}C NMR ($CDCl_3$, 100 MHz) δ (ppm) 140.7, 138.7, 137.1, 135.7, 126.3, 125.9, 123.5, 120.3, 120.3, 120.0, 109.9, -2.2.

[0082] The compound of Formula 4 was diluted to 0.2 mM in $CHCl_3$, and a UV spectrum was measured. The UV spectrum of the diluted solution showed the maximal absorbance at 293 nm. Also, the compound of Formula 4 was diluted to 10 mM in $CHCl_3$ and a photoluminescent (PL) spectrum was measured at 293 nm. The PL spectrum of the diluted solution showed the maximal light intensity at 364 nm (FIG. 2). Color purity corresponded to the CIE coordinate of $x=0.2534$, $y=0.3029$ in NTSC (National Television System Committee) chromaticity diagram.

[0083] The compound of Formula 4 and polymethylmethacrylate (PMMA) were mixed at a ratio of 1:15 (w/w) and dissolved in chloroform. The resultant mixture was spin coated on a glass substrate (thickness: 1.0 mm, 50 mm \times 50 mm) to form a thin film and PL characteristics were evaluated. As a result, the maximal light intensity was observed at 365 nm (FIG. 3). Color purity corresponded to the CIE coordinate of $x=0.1523$, $y=0.1235$ in the NTSC chromaticity diagram.

[0084] Thermogravimetric analysis (TGA) and differential scanning calorimetry (DSC) analysis of the compound of Formula 4 were carried out. TGA was carried out under a N_2 gas atmosphere from room temperature to $600^\circ C$., with increasing temperature at a rate of $10^\circ C/min$. DSC analysis was carried out under N_2 gas atmosphere from room temperature to $400^\circ C$.

[0085] As a result, the compound of Formula 4 exhibited Td of $379^\circ C$., Tg of $89^\circ C$., and Tm of $271^\circ C$. (FIGS. 4 and 5).

[0086] UV absorption spectrum and ionic potential were measured using a photoelectron spectrometer (Riken-Keiki AC-2). As a result, the HOMO (Highest Occupied Molecular Orbital) energy level and the LUMO (Lowest Occupied Molecular Orbital) energy level of the compound of Formula 4 were 5.92 and 2.43 eV, respectively, and the Eg was 3.49 eV.

[0087] Synthesis of Compound of Formula 5

[0088] The intermediate (A') (710 mg, 2.2 mmol) was dissolved in THF (10 mL) and n-butyllithium (0.92 mL, 2.3 mmol, 2.5 equiv.) in n-hexane at $-78^\circ C$. was dropwise added thereto, followed by stirring for one hour. Dichlorodiphenylsilane (0.205 mL, 1.0 mmol) was added to the resultant mixture and stirred at $-78^\circ C$. for one hour, and then at room temperature for 5 hours.

[0089] When the reaction was completed, an ammonium hydroxide solution (1 ml) was added to the reaction mixture, stirred for one hour, and extracted three times with ethylacetate (10 mL). A combined organic layer was dried over $MgSO_4$, and a solvent was removed. An obtained residue was purified by silica-gel column chromatography to give the compound of Formula 5 as a white solid (335 mg, yield 50%) with the following spectra: 1H -NMR ($CDCl_3$, 300 MHz) δ (ppm) 8.13 (d, 4H), 7.88 (d, 4H), 7.72 (dd, 4H), 7.65 (d, 4H), 7.53-7.46 (m, 10H), 7.40 (t, 4H), 7.28 (t, 4H) and ^{13}C NMR ($CDCl_3$, 100 MHz) δ (ppm) 140.5, 139.2, 137.9, 136.4, 133.6, 133.1, 130.0, 128.2, 126.3, 125.9, 123.5, 120.3, 120.1, 109.9.

[0090] The compound of Formula 5 was diluted to 0.2 mM in $CHCl_3$ and a UV spectrum was measured. The UV spectrum of the diluted solution showed the maximal absorbance at 293 nm. Also, the compound of Formula 5 was diluted to 10 mM in $CHCl_3$, and a PL spectrum was measured at 293 nm. The PL spectrum of the diluted solution showed the maximal light intensity at 365 nm (FIG. 6). Color purity corresponded to the CIE coordinate of $x=0.2166$, $y=0.1401$ in the NTSC chromaticity diagram.

[0091] The compound of Formula 5 and PMMA were mixed at a ratio of 1:15 (w/w) and dissolved in chloroform. The resultant mixture was spin coated on a glass substrate (thickness: 1.0 mm, 50 mm \times 50 mm) to form a thin film, and the PL spectrum was measured. As a result, the maximal light intensity was observed at 364 nm (FIG. 7). Color purity corresponded to the CIE coordinate of $x=0.1921$, $y=0.2018$ in the NTSC chromaticity diagram.

[0092] UV absorption spectrum and ionic potential were measured using AC-2. As a result, the HOMO energy level and the LUMO energy level of the compound of Formula 5 were 6.09 and 2.61 eV, respectively, and the Eg was 3.49 eV.


[0093] TGA and DSC analysis of the compound of Formula 5 were carried out. TGA was carried out under a N_2 gas atmosphere from room temperature to $600^\circ C$., with increasing temperature at a rate of $10^\circ C/min$. DSC analysis was carried out under N_2 gas atmosphere from room temperature to $400^\circ C$.

[0094] As a result, the compound of Formula 5 exhibited Td of $393^\circ C$. and Tg of $109^\circ C$.

[0095] Synthesis 2. Preparation of Compound of Formula 6

[0096] The compound of Formula 6 was synthesized according to Scheme 4 below.

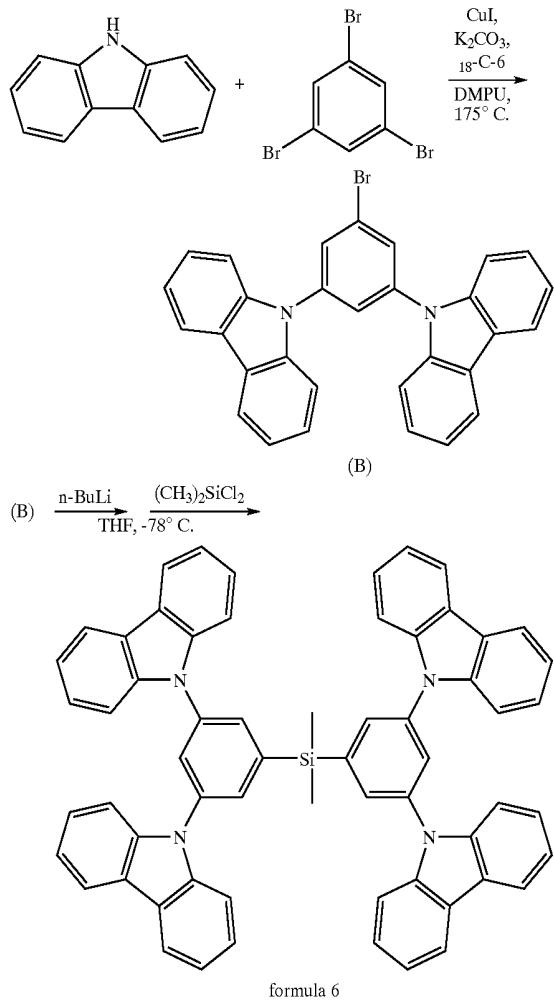Scheme 4



[0097] Synthesis of Intermediate (B)

[0098] Carbazole (1 g, 6 mmol), 1,3,5-tribromobenzene (944 mg, 6 mmol), CuI (50 mg, 0.6 mmol), K_2CO_3 (3 g, 48 mmol), and 18-Crown-6 (30 mg, 0.24 mmol) were dissolved in DMPU (15mL) and heated at 175° C. for 8 hours.

[0099] The resultant mixture was cooled to room temperature, and the solids were filtered. A little ammonia water was then added to a filtrate, and the filtrate was washed three times with diethylether (20 mL). A washed diethylether layer was dried over $MgSO_4$ and then dried under reduced pressure to obtain a crude product. The crude product was purified by silica-gel column chromatography to give the intermediate (B) as a white solid (560 mg, yield 20%) having the following spectra: 1H -NMR ($CDCl_3$, 400 MHz) δ (ppm) 8.12 (d, 4H), 7.84 (d, 2H), 7.77 (t, 1H), 7.53 (d, 4H), 7.45 (dt, 4H), 7.31 (dt, 4H) and ^{13}C NMR ($CDCl_3$, 100 MHz) δ (ppm) 140.4, 140.2, 134.4, 128.6, 126.3, 123.9, 123.8, 120.7, 120.5, 109.5.

[0100] Synthesis of Compound of Formula 6

[0101] The intermediate (B) (200 mg, 0.41 mmol) was dissolved in THF (3 mL), and n-butyllithium (0.2 mL, 0.49 mmol, 2.5 equiv.) in n-hexane at -78° C. was then dropwise added thereto, followed by stirring for one hour. Dichloromethylsilane (0.02 mL, 0.16 mmol) was added to the resultant mixture and stirred at -78° C. for one hour, and then at room temperature for 5 hours.

[0102] When the reaction was completed, an ammonium hydroxide solution (1 ml) was added to the reaction mixture, stirred for one hour, and extracted three times with ethylacetate (each 5 mL). A combined ethylacetate layer was dried over $MgSO_4$, and a solvent was removed. An obtained residue was purified by silica-gel column chromatography to give the compound of Formula 6 as a white solid (70 mg, yield 49%) having the following spectra: 1H NMR ($CDCl_3$, 300 MHz) δ (ppm) 8.16-8.11 (m, 8H), 7.91 (d, 4H), 7.84 (t, 2H), 7.44 (d, 8H), 7.32-7.24 (m, 16H), 0.78 (s, 6H) and ^{13}C NMR ($CDCl_3$, 100 MHz) δ (ppm) 141.7, 140.5, 139.3, 131.0, 126.4, 126.2, 123.6, 120.5, 120.4, 109.5, -2.5.

[0103] The compound of Formula 6 was diluted to 0.2 mM in $CHCl_3$ and a UV spectrum was measured. The UV spectrum of the diluted solution showed the maximal absorbance at 292.5 nm. Also, the compound of Formula 6 was diluted to 10 mM in $CHCl_3$ and a PL spectrum was measured at 292.5 nm. The PL spectrum of the diluted solution showed a peak light intensity at 364 nm (FIG. 8). Color purity corresponded to the CIE coordinate of x=0.2241, y=0.1926 in the NTSC chromaticity diagram.

[0104] The compound of Formula 6 and PMMA were mixed at a ratio of 1:15 (w/w) and dissolved in chloroform. The resultant mixture was spin coated on a glass substrate (thickness: 1.0 mm, 50 mm×50 mm) to form a thin film and PL spectrum was measured. As a result, a peak light intensity was observed at 373 nm (FIG. 9). Color purity corresponded to the CIE coordinate of x=0.1878, y=0.2088 in the NTSC chromaticity diagram, and Eg was 3.51 eV.

[0105] TGA and DSC analysis of the compound of Formula 6 were carried out. TGA was carried out under N_2 gas atmosphere from room temperature to 600° C., with increasing temperature at a rate of 10° C./min. DSC analysis was carried out under N_2 gas atmosphere from room temperature to 400° C.

[0106] As a result, the compound of Formula 6 exhibited T_d of 409° C. and T_g of 130° C.

EXAMPLE 1

[0107] An ITO substrate ($10 \Omega/cm^2$) (CORNING CO.) was used as an anode. IDE406 (IDEMITSU CO.) was vacuum deposited on the substrate to form a hole injection layer with a thickness of 600 Å. Then, IDE320 (IDEMITSU CO.) was vacuum deposited to a thickness of 300 Å on the hole injection layer to form a hole transport layer. A mixture (90:10, w/w) of the compound of Formula 4 and TEB002 (COVION CO.) was vacuum deposited on the hole transport layer to form a light-emitting layer with a thickness of 300 Å.

[0108] Then, BAlq was vacuum deposited on the light-emitting layer to form a hole blocking layer with a thickness of 50 Å. Alq₃ was then vacuum deposited on the hole

blocking layer to form an electron transport layer with a thickness of 200 Å. LiF and Al were sequentially vacuum deposited to a thickness of 10 Å and 3,000 Å, respectively, on the electron transport layer to form a cathode. Accordingly, an organic electroluminescent device was completed.

EXAMPLE 2

[0109] An organic electroluminescent device was manufactured in the same manner as in Example 1 except that a mixture (80:20, w/w) of the compound of Formula 4 and TEB002 (COVION CO.) was used in the formation of the light-emitting layer, instead of the mixture (90:10, w/w) of the compound of Formula 4 and TEB002 (COVION CO.).

EXAMPLE 3

[0110] An organic electroluminescent device was manufactured in the same manner as in Example 1 except that a mixture (90:10, w/w) of the compound of Formula 5 and TEB002 (COVION CO.) was used in the formation of the light-emitting layer, instead of the mixture (90:10, w/w) of the compound of Formula 4 and TEB002 (COVION CO.).

EXAMPLE 4

[0111] An organic electroluminescent device was manufactured in the same manner as in Example 1 except that a mixture (90:10, w/w) of the compound of Formula 6 and TEB002 (COVION CO.) was used in the formation of the light-emitting layer, instead of the mixture (90:10, w/w) of the compound of Formula 4 and TEB002 (COVION CO.).

[0112] The driving voltage, current density, luminance, current efficiency, power efficiency, and color coordinate characteristics of the organic electroluminescent devices of Examples 1-2 were measured, and the results are presented in Table 1 below.

TABLE 1

Section	Voltage	Current	Lu-minance	Current	Power	Color coordinate
Example 1	6.5	2.4	100	4.25	2.05	(0.14, 0.19)
Example 2	6.7	5.5	100	1.7	0.80	(0.15, 0.20)

[0113] As seen from Table 1, the organic electroluminescent devices of Examples 1 and 2 exhibited excellent voltage, current density, luminance, current and power efficiency, and color coordinate characteristics.

[0114] Each of the mixtures for the light-emitting layers of Examples 1, 3, and 4 was mixed with PMMA at a ratio of 1:15 (w/w), and was then dissolved in chloroform. The resultant mixture was spin coated to form a thin film, and PL characteristics were evaluated. The results are presented in Table 2 below and FIG. 10.

TABLE 2

Section	Composition of Light-Emitting Layer	PL	Color coordinate (x, y)
Example 1	Mixture of Compound of Formula 4 and TEB002 (90:10, w/w)	443	(0.1397, 0.2063)

TABLE 2-continued

Section	Composition of Light-Emitting Layer	PL	Color coordinate (x, y)
Example 3	Mixture of Compound of Formula 5 and TEB002 (90:10, w/w)	446	(0.1402, 0.1928)
Example 4	Mixture of Compound of Formula 6 and TEB002 (90:10, w/w)	444	(0.1416, 0.1915)

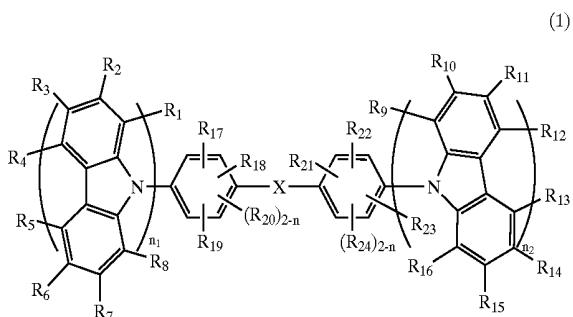
[0115] As seen from Table 2, the energy transition of the compound of Formula 4 to a blue phosphorescent dopant, TEB002 occurred efficiently.

[0116] A CBP based silicon compound of the present invention has excellent blue light emission characteristics and hole transfer capability. The CBP based silicon compound may be used as a blue light emission material or as a host material for various phosphorescent or fluorescent dopants emitting red, green, blue, or white light. Therefore, an organic electroluminescent device using the CBP based silicon compound has excellent characteristics such as a high efficiency, a high luminance, a long life span, and a low power consumption.

[0117] Although a few embodiments of the present invention have been shown and described, it would be appreciated by those skilled in the art that changes may be made in these embodiments without departing from the principles and spirit of the invention, the scope of which is defined in the claims and their equivalents.

What is claimed is:

1. A compound represented by Formula 1:



wherein, n_1 and n_2 are independently 1 or 2,

X is $-\text{Si}(\text{A}_1)(\text{A}_2)-$ or Se , and

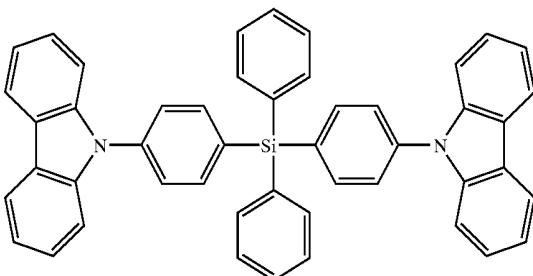
$\text{A}_1, \text{A}_2, \text{R}_1$ and R_{24} are independently a hydrogen atom, a substituted or unsubstituted alkyl group of $\text{C}_1\text{-C}_{30}$, a substituted or unsubstituted acyl group of $\text{C}_1\text{-C}_{30}$, a substituted or unsubstituted alkoxycarbonyl group of $\text{C}_1\text{-C}_{30}$, a substituted or unsubstituted alkoxy group of $\text{C}_1\text{-C}_{30}$, a substituted or unsubstituted alkynyl group of $\text{C}_2\text{-C}_{30}$, a substituted or unsubstituted alkynyl group of $\text{C}_2\text{-C}_{30}$, a substituted or unsubstituted alkylcarboxyl group of $\text{C}_2\text{-C}_{30}$, a substituted or unsubstituted aryl group of $\text{C}_6\text{-C}_{30}$, a substituted or unsubstituted aralkyl group of $\text{C}_6\text{-C}_{30}$, a substituted or unsubstituted aralkyloxy group of $\text{C}_6\text{-C}_{30}$, a substituted or unsubstituted heteroaryl group of $\text{C}_2\text{-C}_{30}$, a substituted or unsubstituted

tuted heteroaryloxy group of C_2 - C_{30} , a substituted or unsubstituted aryloxy group of C_6 - C_{30} , a substituted or unsubstituted cycloalkyl group of C_4 - C_{30} , $-\text{N}(\text{R})(\text{R}')$ provided that R and R' are independently a hydrogen, an alkyl group of C_1 - C_{30} , an aryl group of C_6 - C_{30} , or a heteroaryl group of C_2 - C_{30} , cyano, hydroxy, or carboxyl, and at least an adjacent two of R_1 to R_{24} are connectable to form a ring.


2. The compound of claim 1, wherein n_1 and n_2 are 1.
3. The compound of claim 2, wherein the compound is further represented by Formula 2:

-continued


(5)



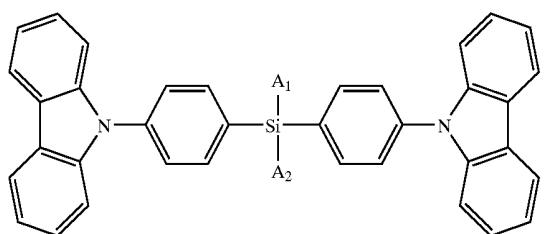
(2)



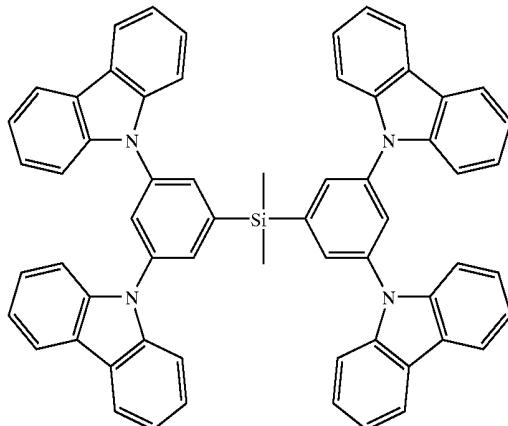
(6)



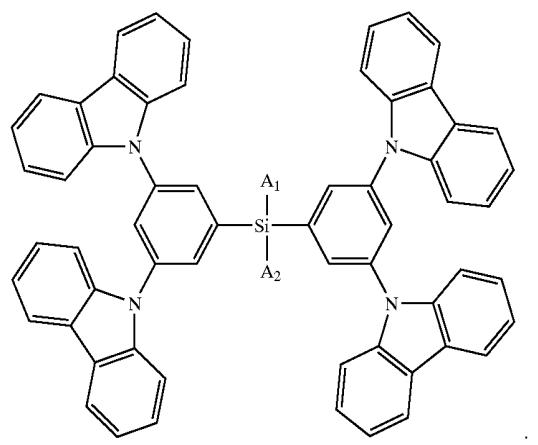
(3)



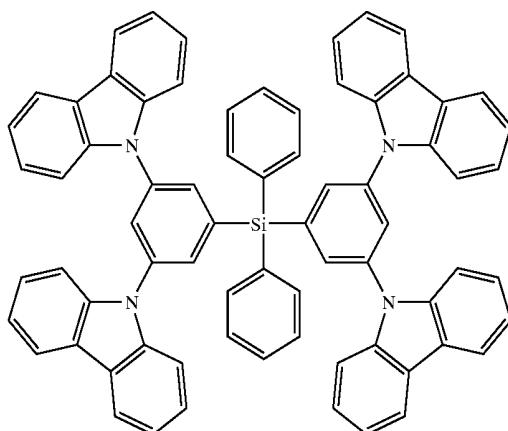(7)




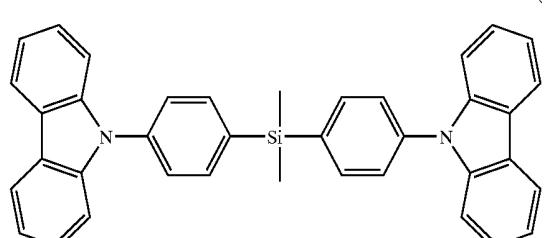4. The compound of claim 1, wherein n_1 and n_2 are 2.
5. The compound of claim 4, wherein the compound is further represented by Formula 3:




(4)

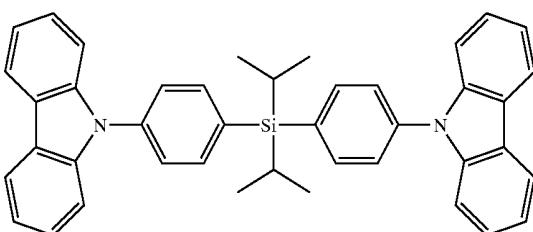(8)




-continued

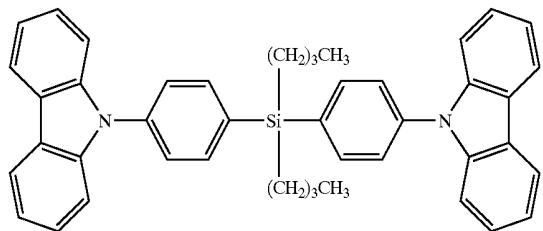
(9)



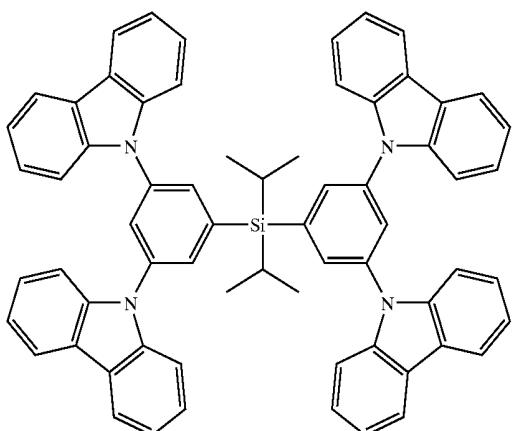
(10)



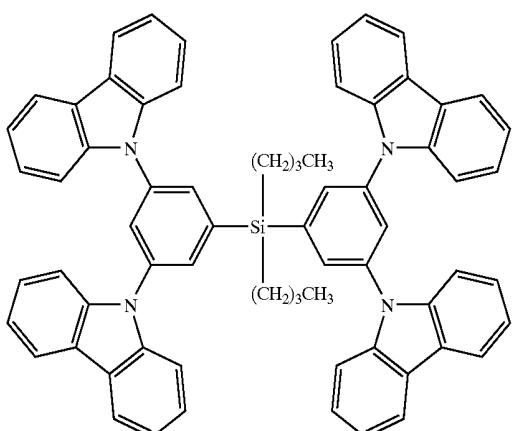(11)




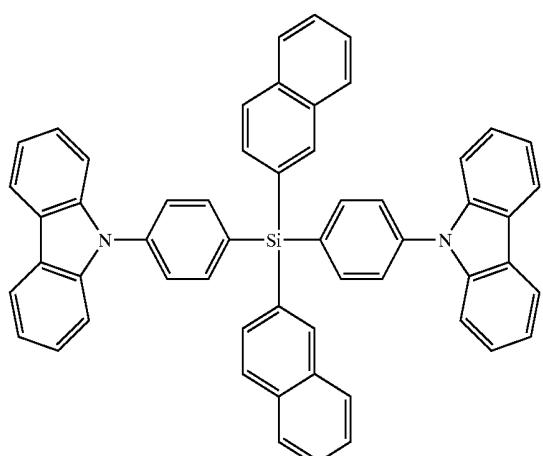(12)




-continued

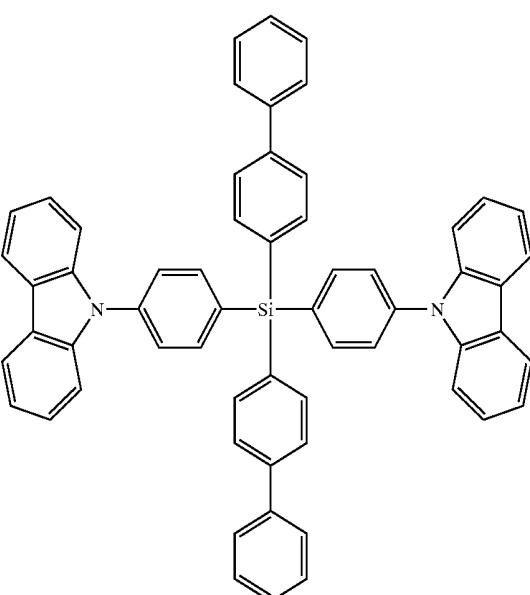
(13)



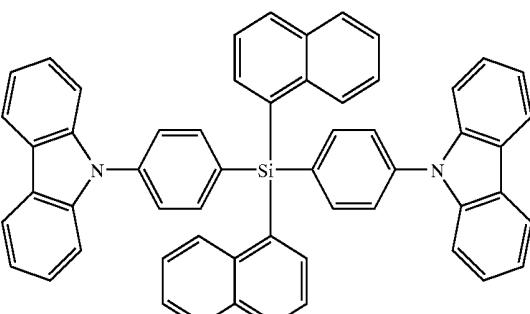(14)




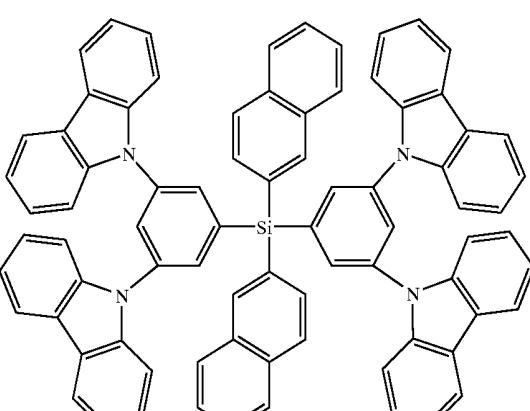(15)





-continued

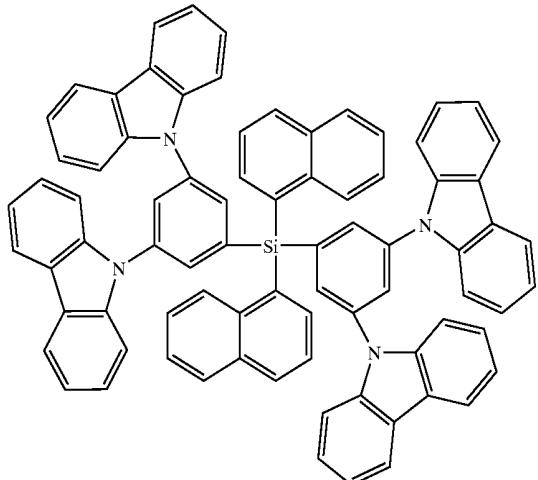
(16)



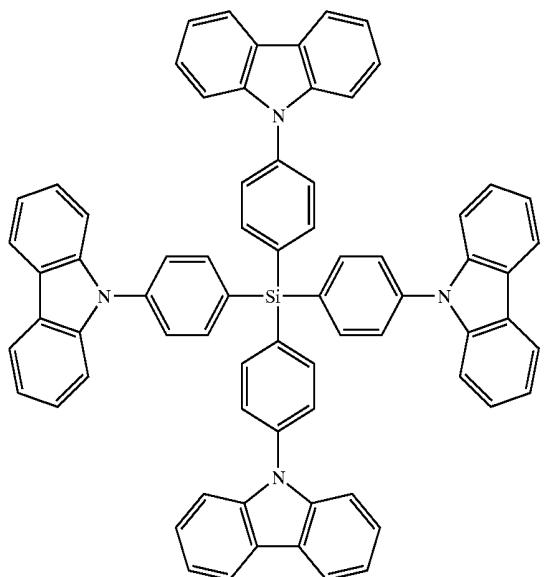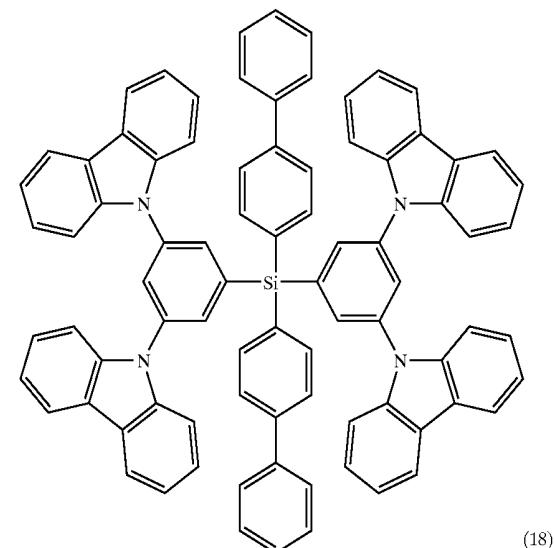(18)



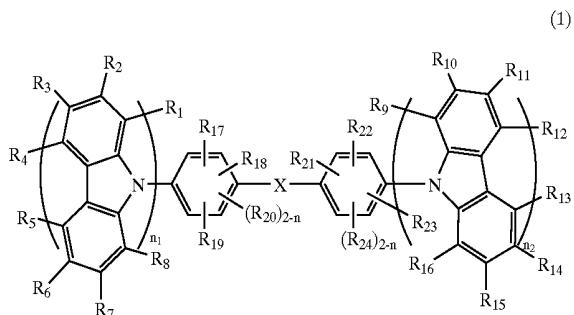7. An organic electroluminescent device comprising an organic film between a pair of electrodes, wherein the organic film comprises a compound represented by Formula 1:



wherein, n_1 and n_2 are independently 1 or 2,

X is $-\text{Si}(A_1)(A_2)-$ or Se , and

A_1, A_2, R_1 and R_{24} are independently a hydrogen atom, a substituted or unsubstituted alkyl group of C_1-C_{30} , a substituted or unsubstituted acyl group of C_1-C_{30} , a substituted or unsubstituted alkoxy carbonyl group of C_1-C_{30} , a substituted or unsubstituted alkoxy group of C_1-C_{30} , a substituted or unsubstituted alkynyl group of C_2-C_{30} , a substituted or unsubstituted alkylcarboxyl group of C_2-C_{30} , a substituted or unsubstituted aryl group of C_6-C_{30} , a substituted or unsubstituted aralkyl group of C_6-C_{30} , a substituted or unsubstituted heteroaryl group of C_2-C_{30} , a substituted or unsubstituted heteroaryloxy group of C_2-C_{30} , a substituted or unsubstituted aryloxy group of C_6-C_{30} , a substituted or unsubstituted cycloalkyl group of C_4-C_{30} , $-\text{N}(R)(R')$ provided that R and R' are independently a hydrogen, an alkyl group of C_1-C_{30} , an aryl group of C_6-C_{30} , or a heteroaryl group of C_2-C_{30}), cyano, hydroxy, or carboxyl, and at least an adjacent two of R_1 to R_{24} are connectable to form a ring.

8. The organic electroluminescent device of claim 7, wherein the organic film is a light-emitting layer.

9. The organic electroluminescent device of claim 8, wherein the light-emitting layer comprises a visible light phosphorescent or fluorescent dopant.

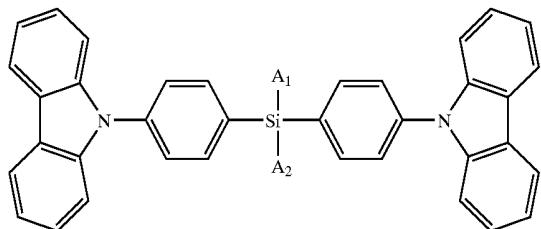
10. The organic electroluminescent device of claim 7, wherein the organic film is a hole injection layer or a hole transport layer.

11. The organic electroluminescent device of claim 7, wherein n_1 and n_2 of the compound are 1.

12. The organic electroluminescent device of claim 11, wherein the compound is further represented by Formula 2:

-continued


(2)



13. The organic electroluminescent device of claim 7, wherein n_1 and n_2 of the compound are 2.


14. The organic electroluminescent device of claim 13, wherein the compound is further represented by Formula 3:

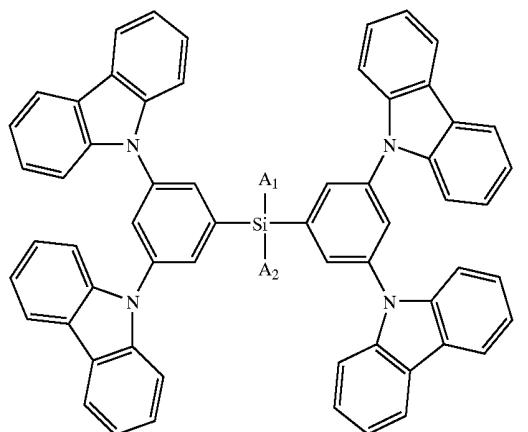(3)




15. The organic electroluminescent device of claim 7, wherein the compound is selected from the group consisting of compounds represented by Formulas 4 to 18:

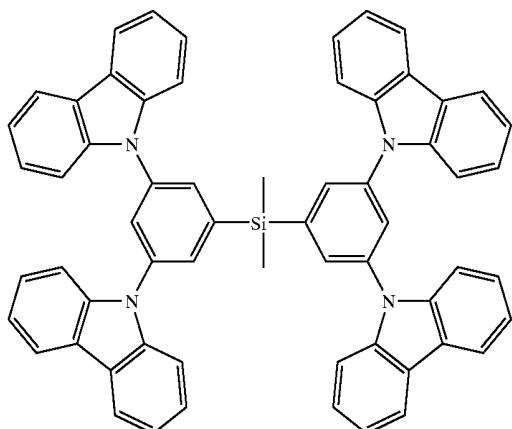
Formula 6




Formula 7

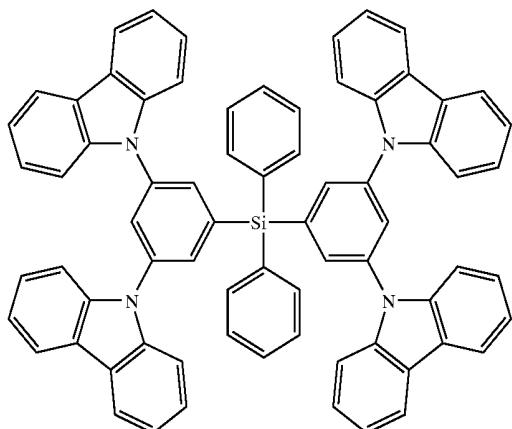


Formula 4

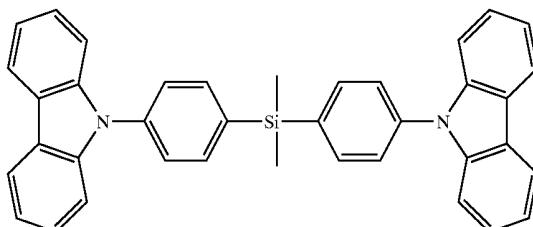


Formula 8

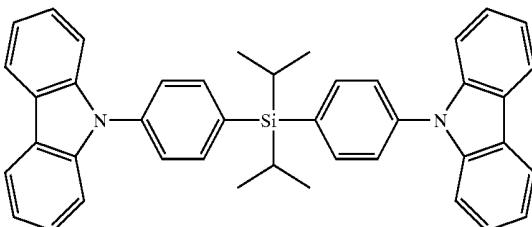

Formula 5

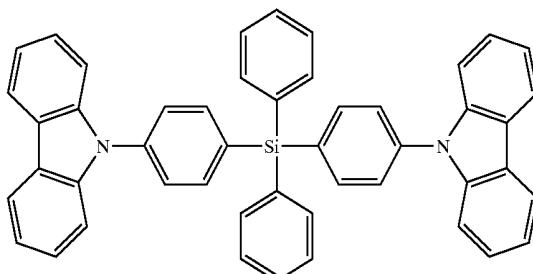


Formula 9

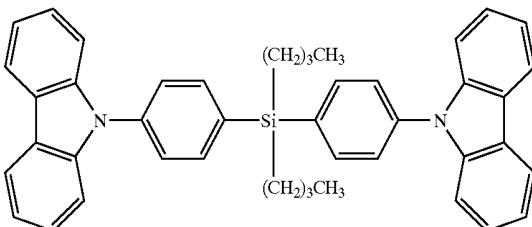


-continued

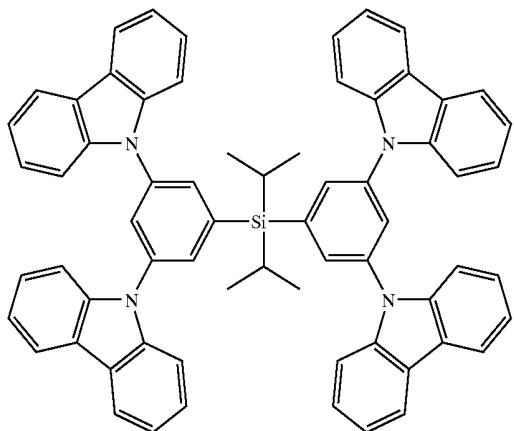Formula 10




-continued

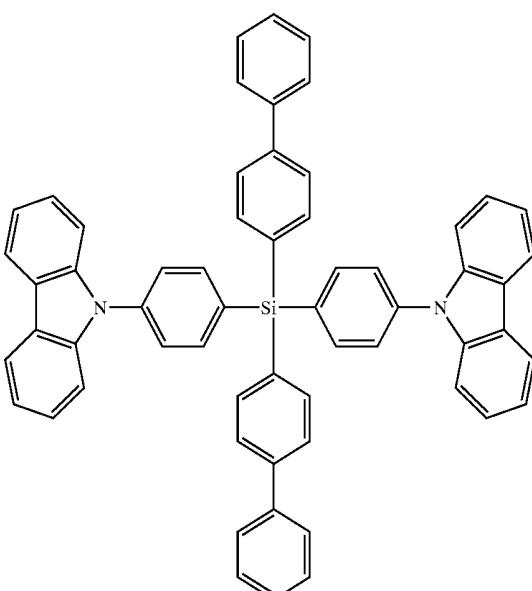
Formula 13




Formula 11

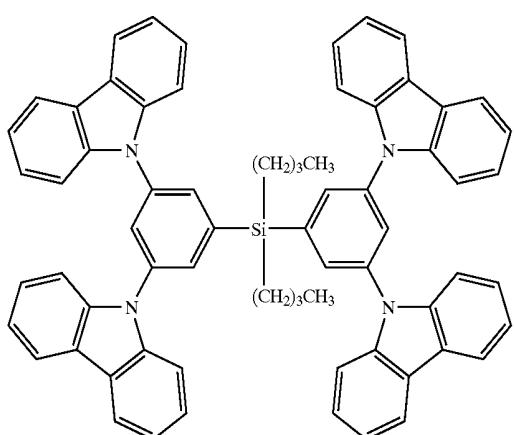


Formula 14

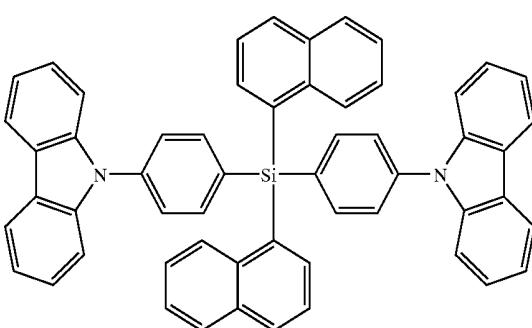

Formula 12

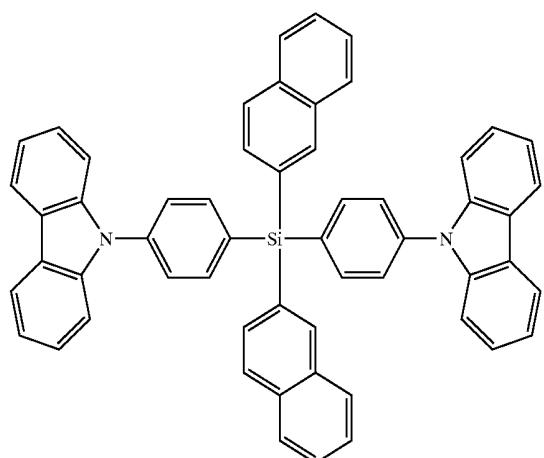


Formula 15

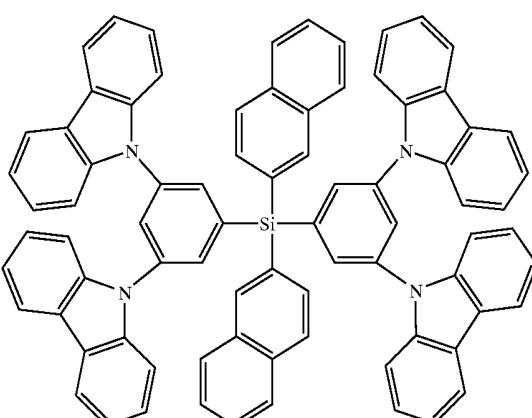


-continued

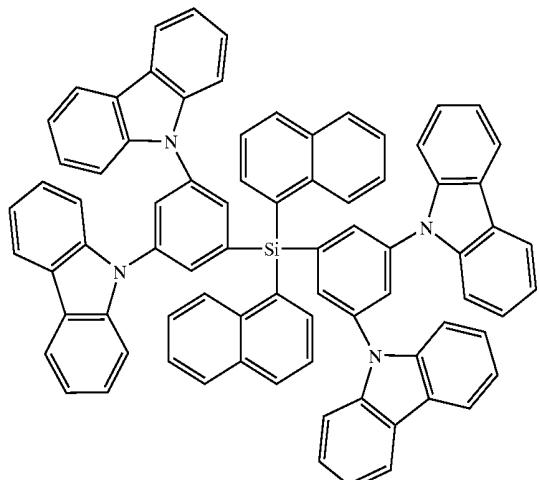Formula 16




Formula 17

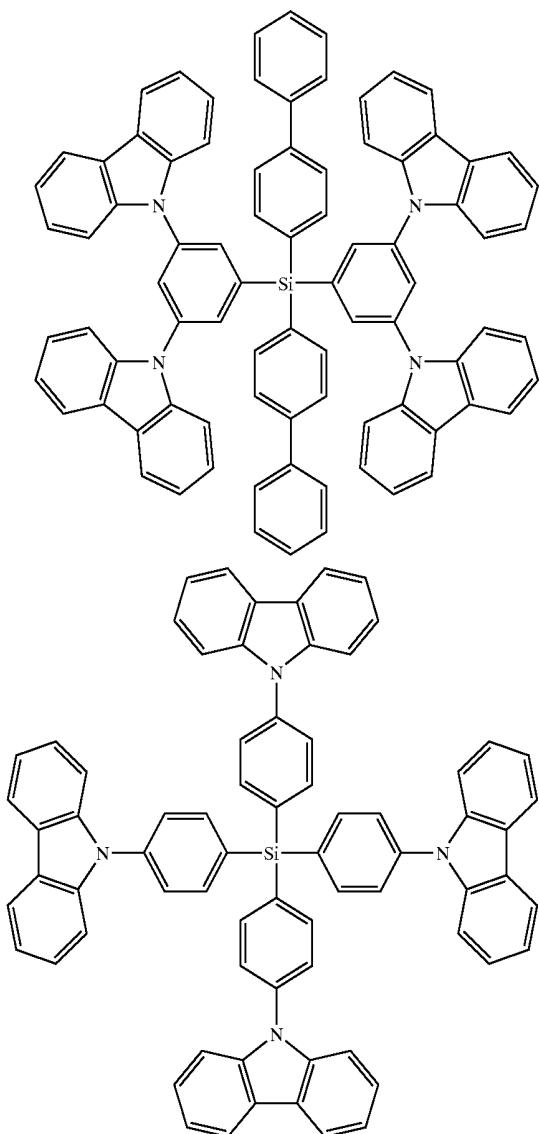

16. An organic electroluminescent device comprising a plurality of layers to facilitate emission of light between a pair of electrodes, wherein a light emitting layer of the plurality of layers comprises a compound represented by Formula 1:

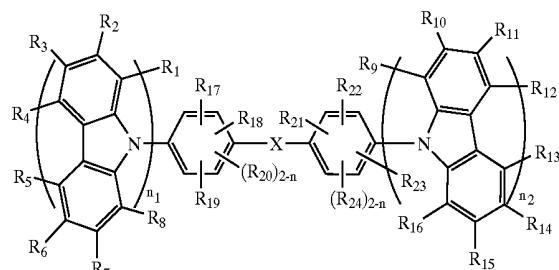(1)



wherein, n_1 and n_2 are independently 1 or 2,

X is $-\text{Si}(A_1)(A_2)-$ or Se , and

A_1 , A_2 , R_1 and R_{24} are independently a hydrogen atom, a substituted or unsubstituted alkyl group of C_1-C_{30} , a substituted or unsubstituted acyl group of C_1-C_{30} , a substituted or unsubstituted alkoxy carbonyl group of C_1-C_{30} , a substituted or unsubstituted alkoxy group of C_1-C_{30} , a substituted or unsubstituted alkynyl group of C_2-C_{30} , a substituted or unsubstituted alkylcarboxyl group of C_2-C_{30} , a substituted or unsubstituted aryl group of C_6-C_{30} , a substituted or unsubstituted aralkyl group of C_6-C_{30} , a substituted or unsubstituted aralkyloxy group of C_6-C_{30} , a substituted or unsubstituted heteroaryl group of C_2-C_{30} , a substituted or unsubstituted heteroaryloxy group of C_2-C_{30} , a substituted or unsubstituted aryloxy group of C_6-C_{30} , a substituted or unsubstituted cycloalkyl group of C_4-C_{30} , $-\text{N}(R)(R')$ provided that R and R' are independently a hydrogen, an alkyl group of C_1-C_{30} , an aryl group of C_6-C_{30} , or a heteroaryl group of C_2-C_{30} , cyano, hydroxy, or carboxyl, and at least an adjacent two of R_1 to R_{24} are connectable to form a ring.

17. The organic electroluminescent device of claim 16, wherein the light-emitting layer comprises a visible light phosphorescent or fluorescent dopant.

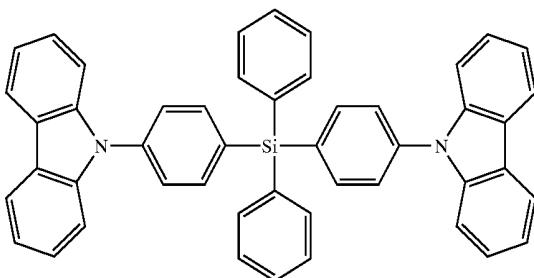
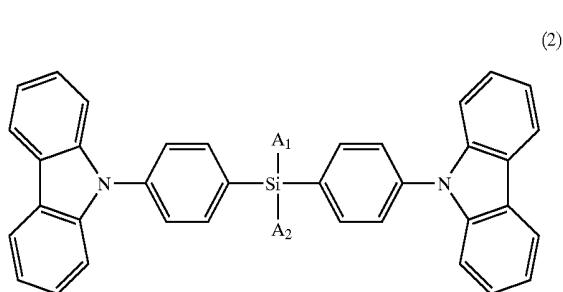
18. The organic electroluminescent device of claim 16, wherein the plurality of layers comprises: a hole injection layer, a hole transport layer, the light-emitting layer, a hole blocking layer, a electron transport layer, and a electron injection layer.

19. The organic electroluminescent device of claim 16, wherein n_1 and n_2 are 1.

20. The organic electroluminescent device of claim 16, wherein the compound is further represented by Formula 2:

-continued



(5)




21. The organic electroluminescent device of claim 16, wherein n_1 and n_2 are 2.

22. The organic electroluminescent device of claim 16, wherein the compound is further represented by Formula 3:

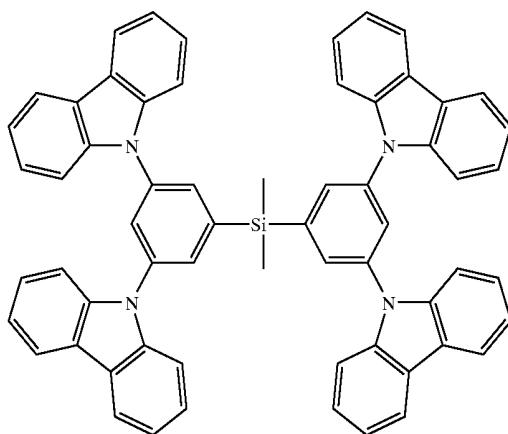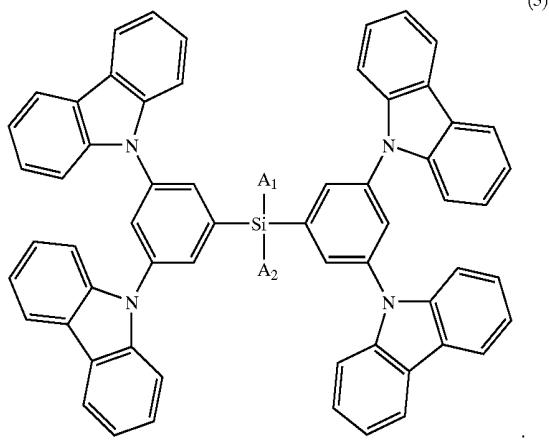
(3)



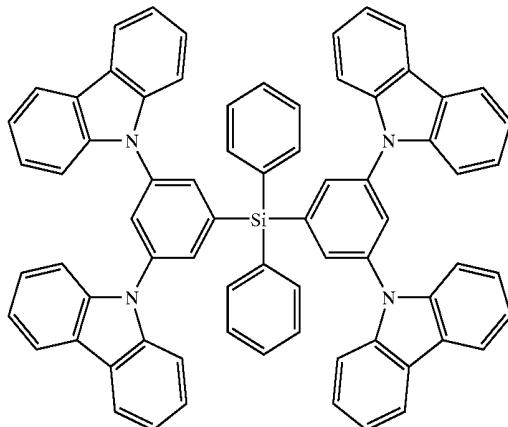
(7)



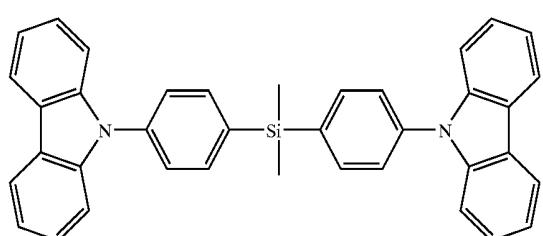(4)




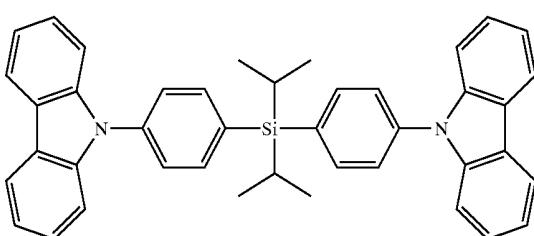
(8)







23. The organic electroluminescent device of claim 16, which is selected from the group consisting of compounds represented by Formulas 4 to 18:

-continued

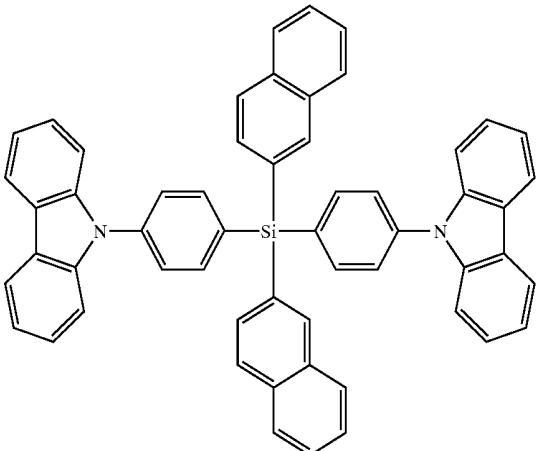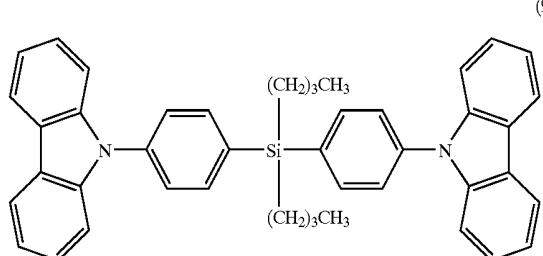-continued



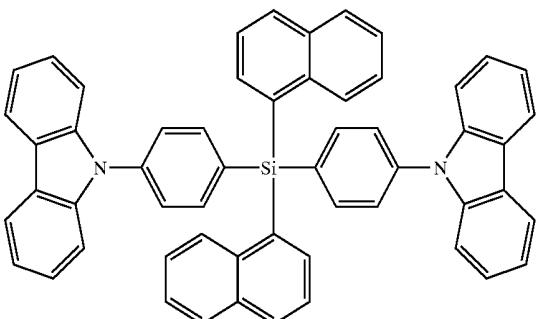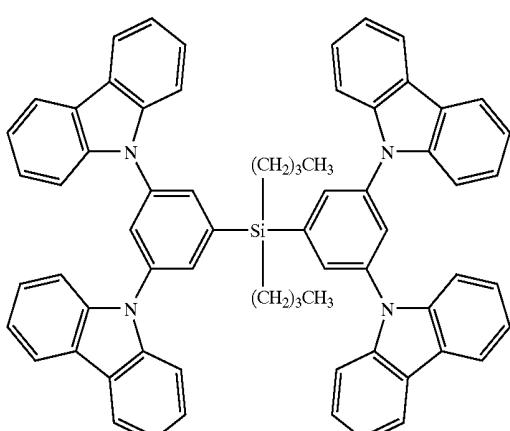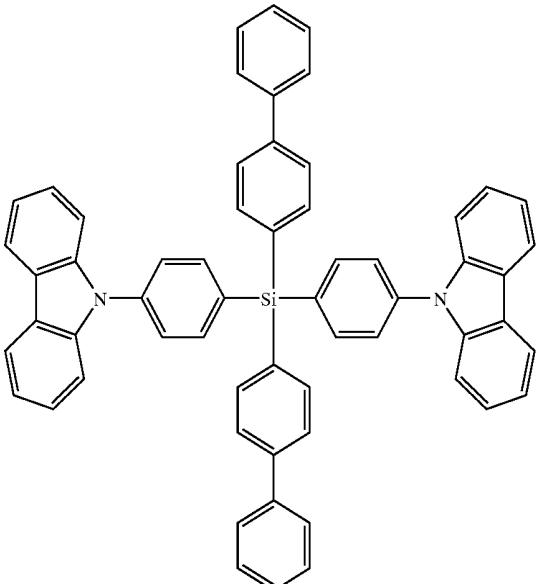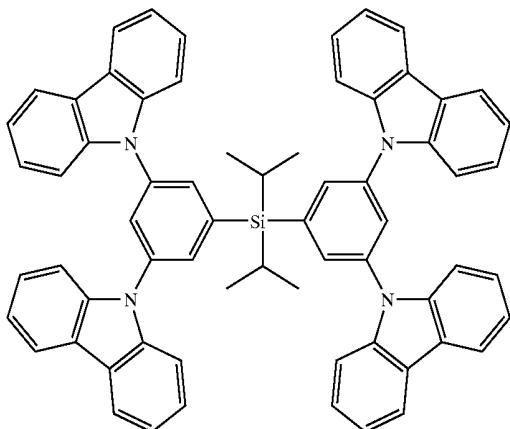(10)





-continued

-continued



(17)

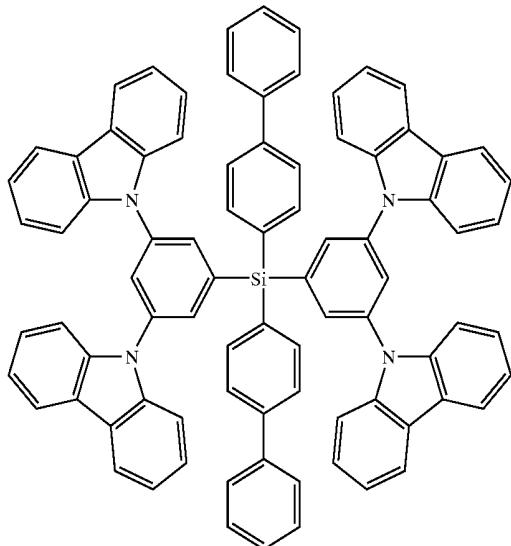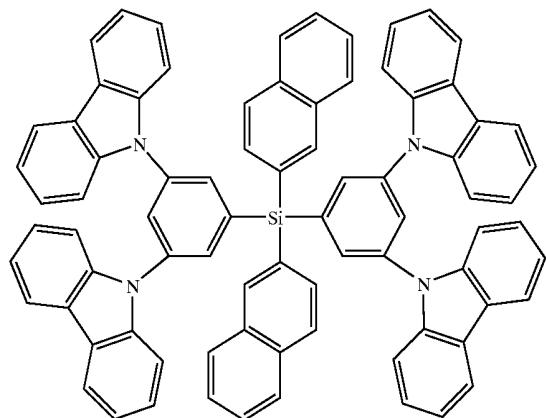(15)



(18(

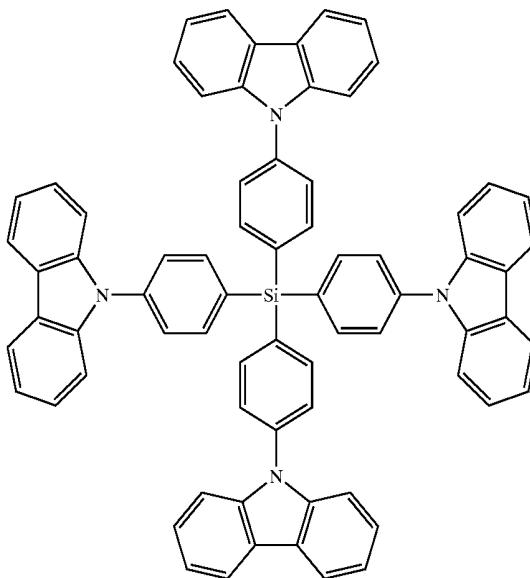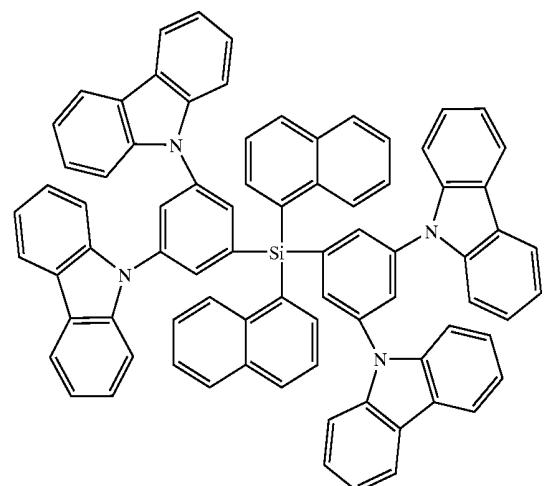(16)



* * * * *

专利名称(译)	4,4'-双(咔唑-9-基)-联苯基有机硅化合物和使用其的有机电致发光器件		
公开(公告)号	US20050064238A1	公开(公告)日	2005-03-24
申请号	US10/876843	申请日	2004-06-28
申请(专利权)人(译)	三星SDI CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	LEE SEOK JONG KIM YOUNG KOOK HWANG SEOK HWAN		
发明人	LEE, SEOK JONG KIM, YOUNG-KOOK HWANG, SEOK-HWAN		
IPC分类号	H01L51/50 C07D209/86 C07F7/08 C07F7/10 C09K11/06 H01L51/00 H05B33/14 H05B33/12 C07D209/82		
CPC分类号	C07F7/0812 C09K11/06 C09K2211/1029 H01L51/0071 Y02B20/181 H01L51/0094 H01L51/5012 H01L51/5016 H05B33/14 H01L51/0081 Y10S428/917		
优先权	1020030065538 2003-09-22 KR		
其他公开文献	US7413817		
外部链接	Espacenet USPTO		

摘要(译)

基于4,4'-双(咔唑-9-基)-联苯(CBP)的硅氧烷化合物和使用CBP基硅化合物的有机电致发光器件具有优异的蓝光发射特性和空穴传输能力。基于CBP的硅化合物可用作蓝光发射材料或用作发射红光,绿光,蓝光或白光的各种磷光或荧光掺杂剂的主体材料。因此,使用CBP基硅化合物的有机电致发光器件具有优异的特性,例如高效率,高亮度,长寿命和低功耗。

Formula 1

