



US 20030063078A1

(19) **United States**(12) **Patent Application Publication**
Hanari et al.(10) **Pub. No.: US 2003/0063078 A1**(43) **Pub. Date: Apr. 3, 2003**(54) **SELF-LUMINOUS DISPLAY DEVICE****Publication Classification**(76) Inventors: **Jun Hanari**, Yokohama-shi (JP); **Koji Mametsuka**, Ageo-shi (JP); **Manabu Watanabe**, Yokohama-shi (JP)(51) **Int. Cl.⁷** **G09G 5/00**(52) **U.S. Cl.** **345/204**

Correspondence Address:


OBLON, SPIVAK, MCCLELLAND, MAIER & NEUSTADT, P.C.**1940 DUKE STREET****ALEXANDRIA, VA 22314 (US)**(57) **ABSTRACT**

An organic EL display device includes display pixels forming a display screen, scanning lines disposed along rows of the display pixels, signal lines disposed along columns of the display pixels, and a power supply section which supplies a power-supply voltage to the display pixels. Each of the display pixels includes a luminous element, a pixel switch which receives a video signal in response to a scanning signal from a corresponding scanning line and a driving element which is connected between the luminous element and the power supply section to supply a driving current corresponding to the video signal from the pixel switch to the luminous element. Particularly, each luminous element is connected to the power supply section via a dimmer switch portion.

(21) Appl. No.: **10/259,478**(22) Filed: **Sep. 30, 2002**(30) **Foreign Application Priority Data**

Sep. 28, 2001 (JP) 2001-304723

Sep. 29, 2001 (JP) 2001-375002

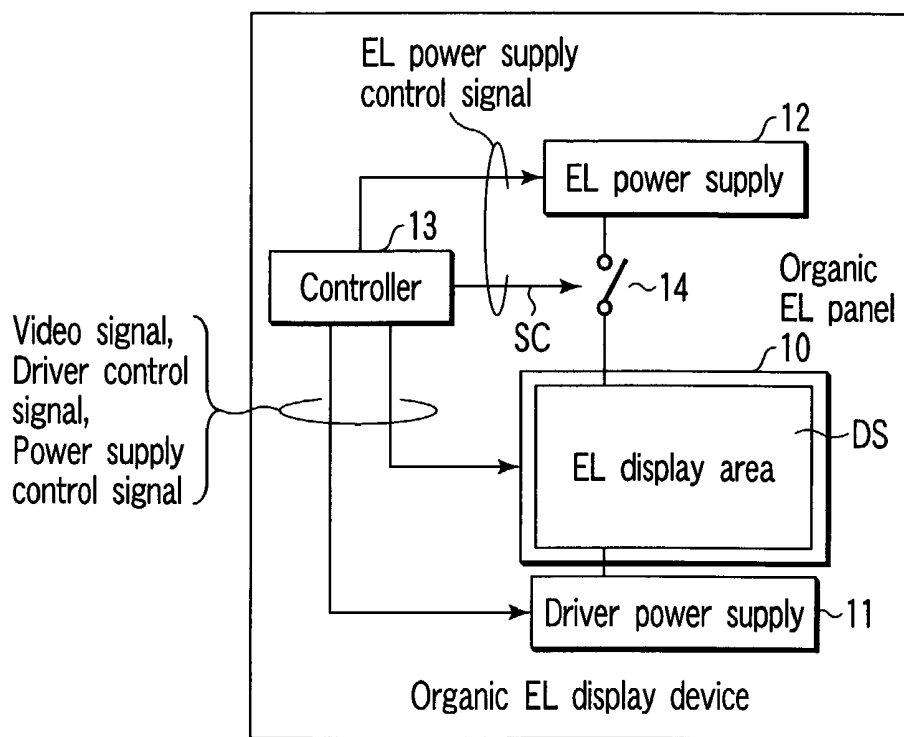

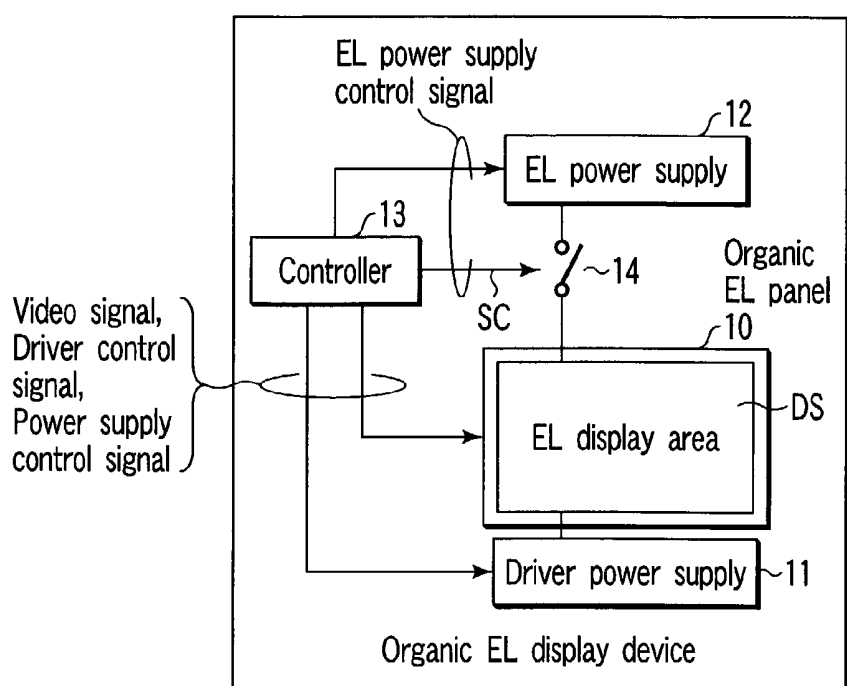


FIG. 1

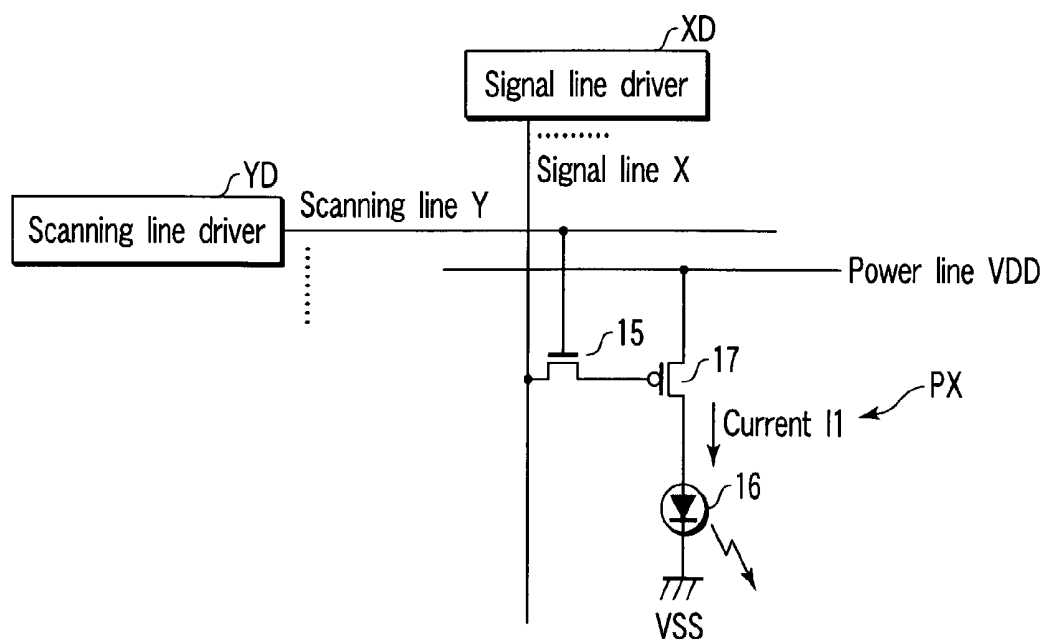


FIG. 2

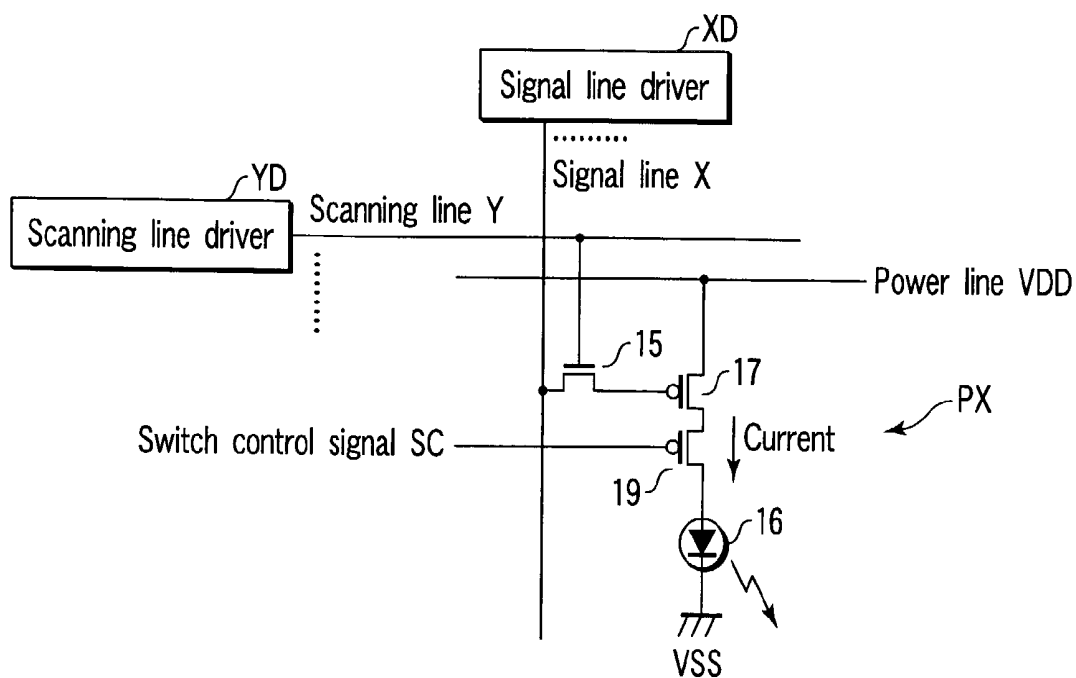


FIG. 3

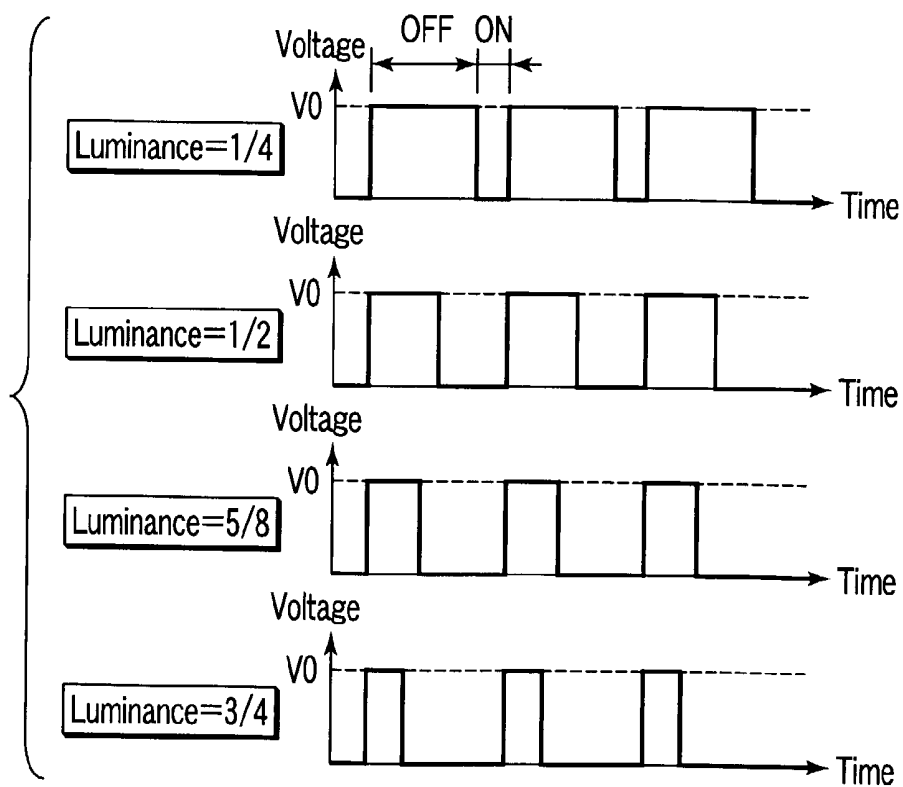
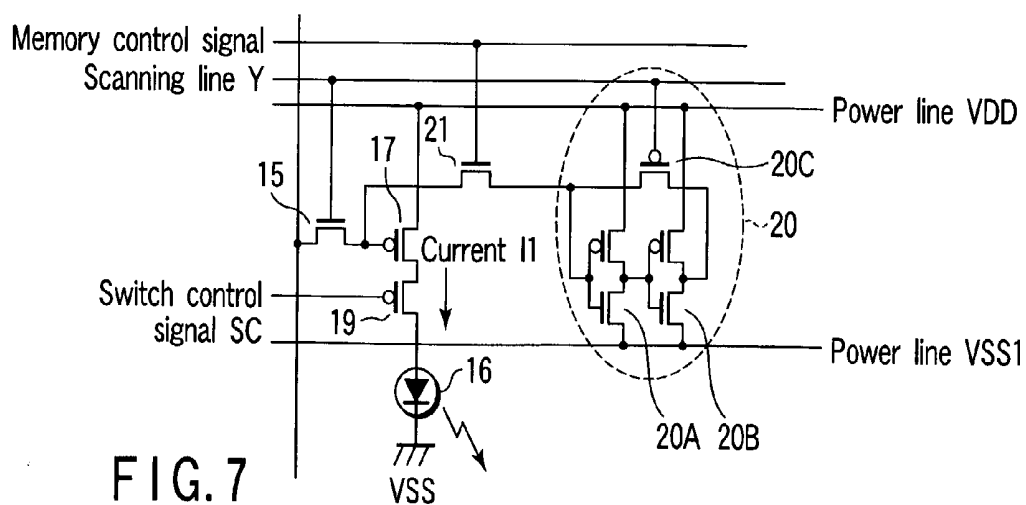
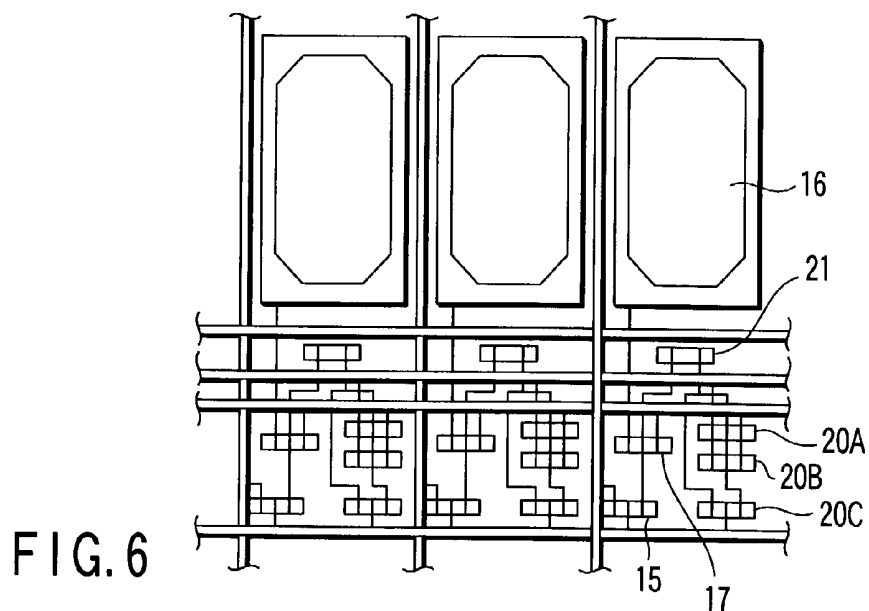
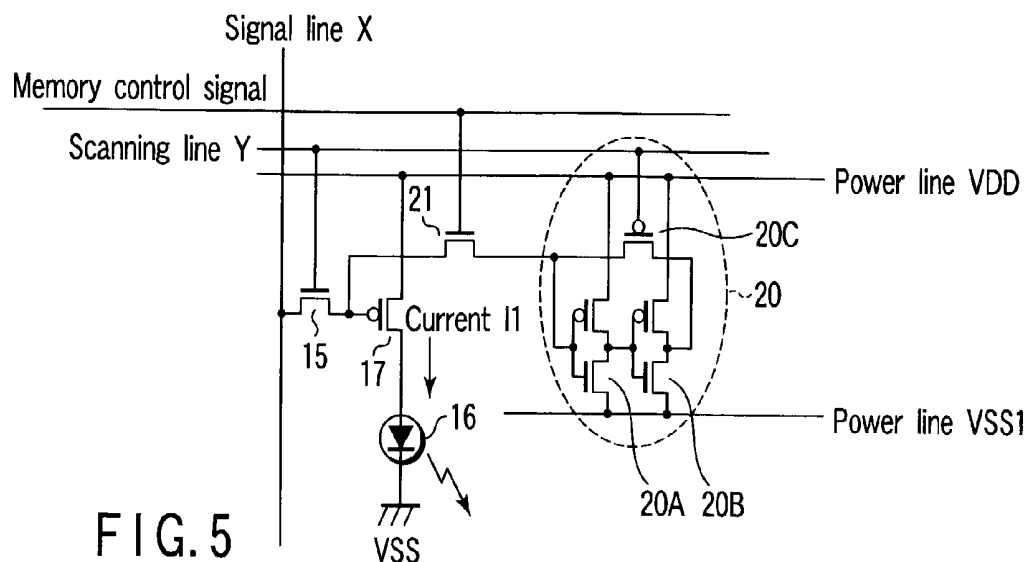


FIG. 4



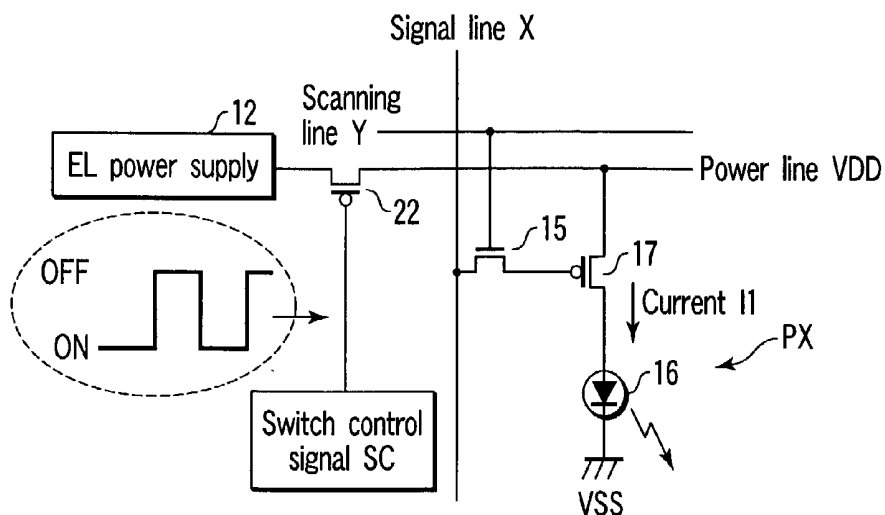


FIG. 8

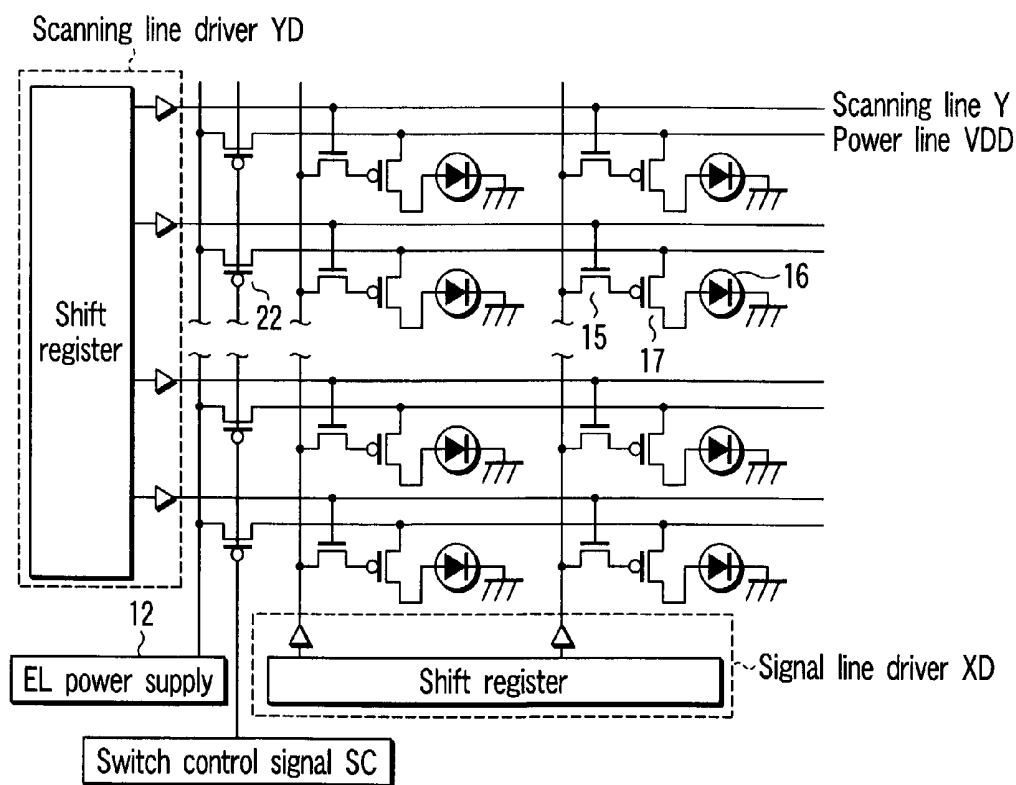


FIG. 9

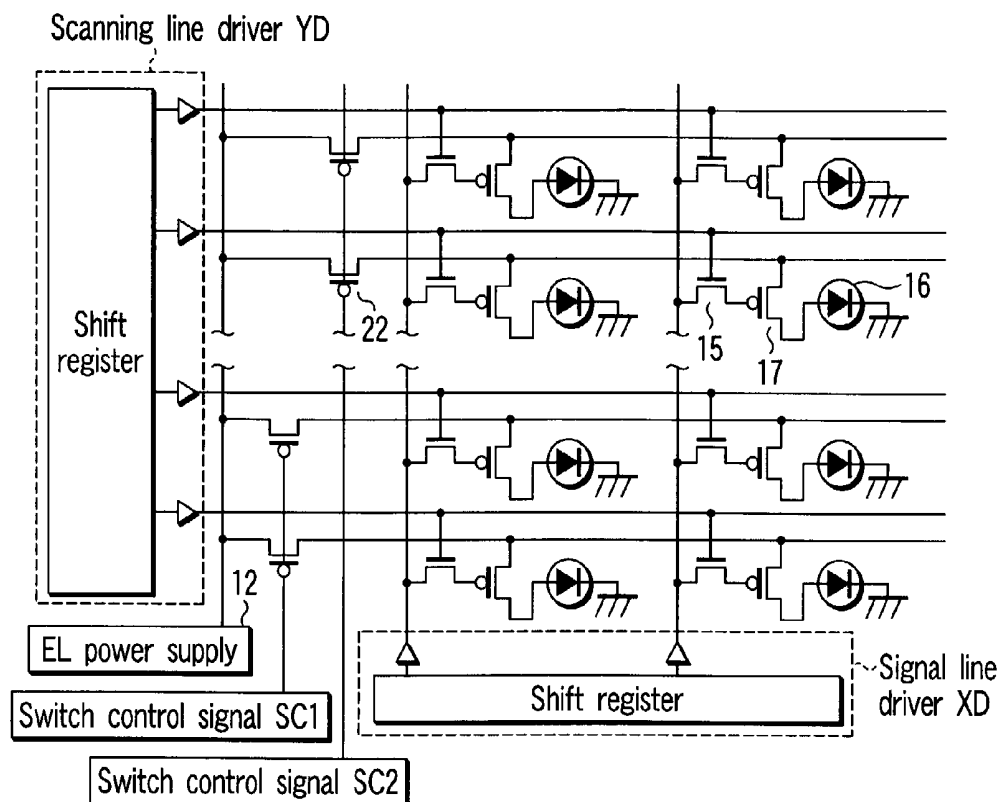


FIG. 10

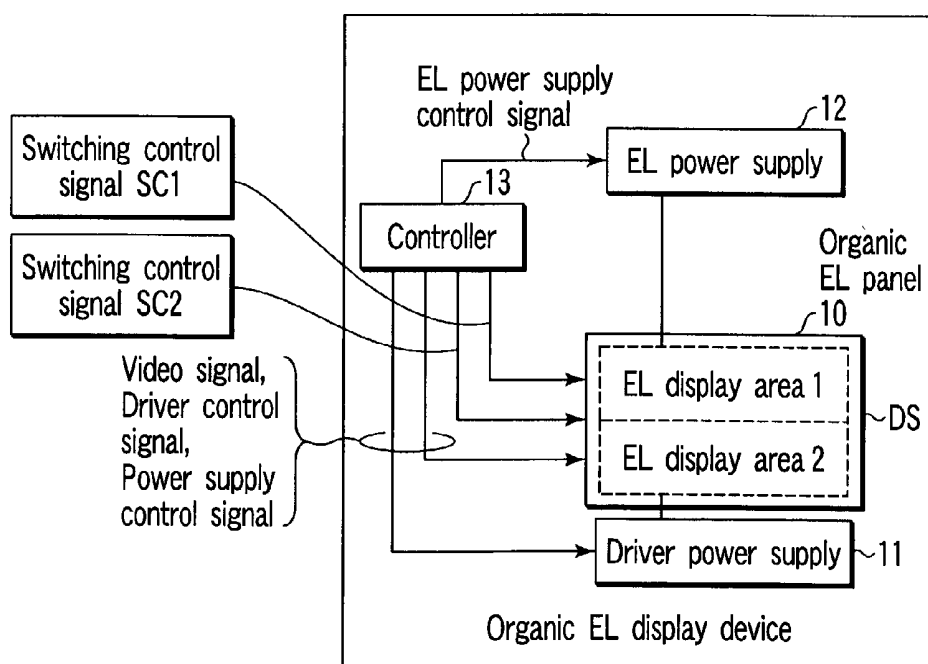


FIG. 11

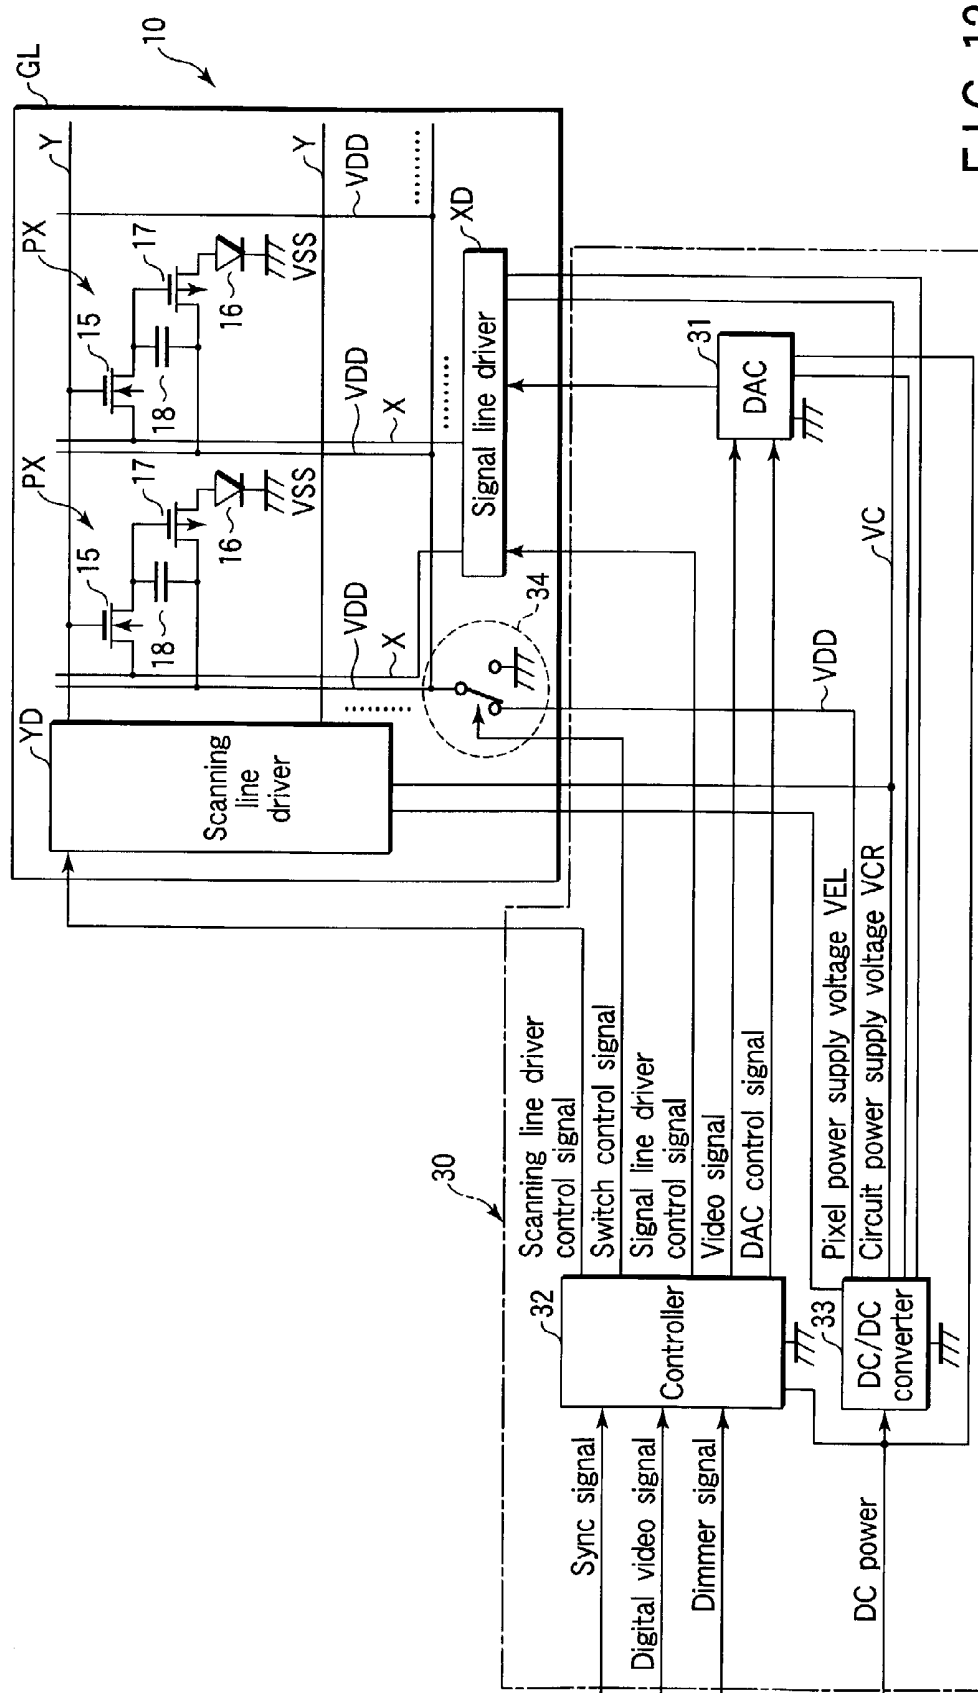


FIG. 12

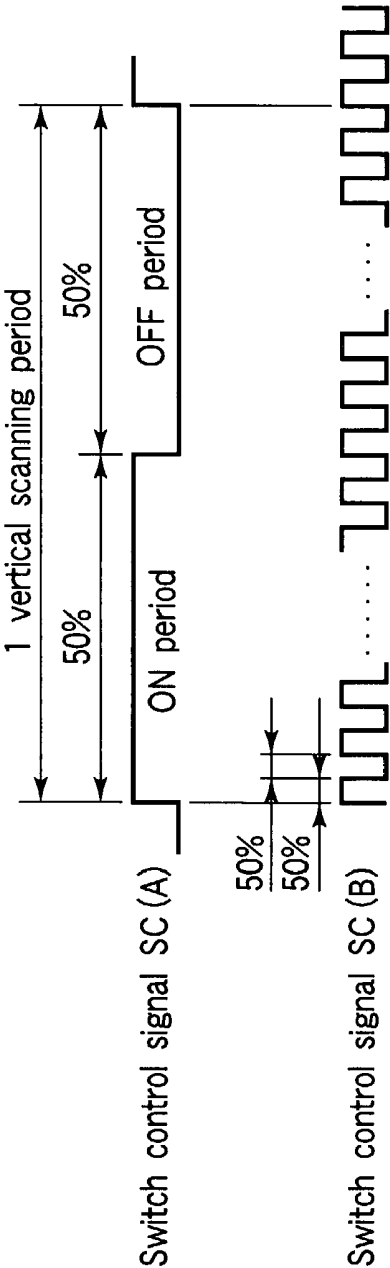


FIG. 13

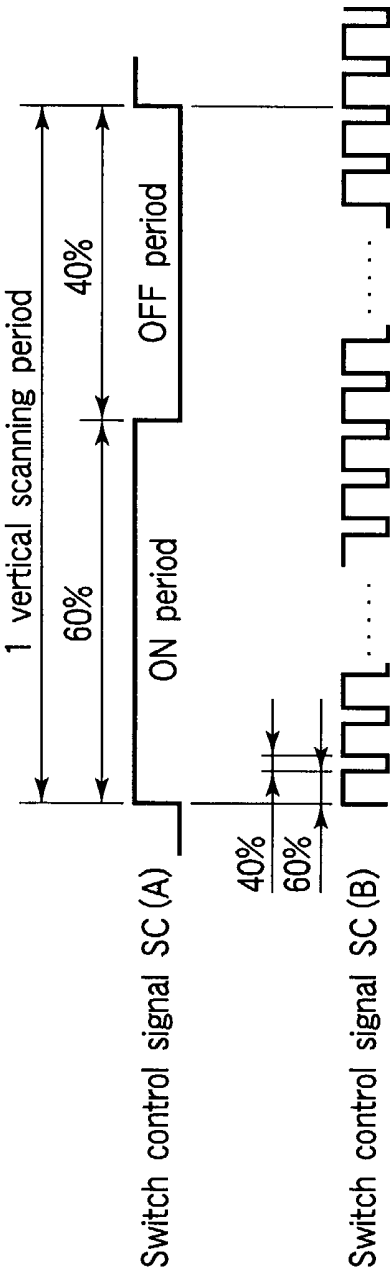


FIG. 14

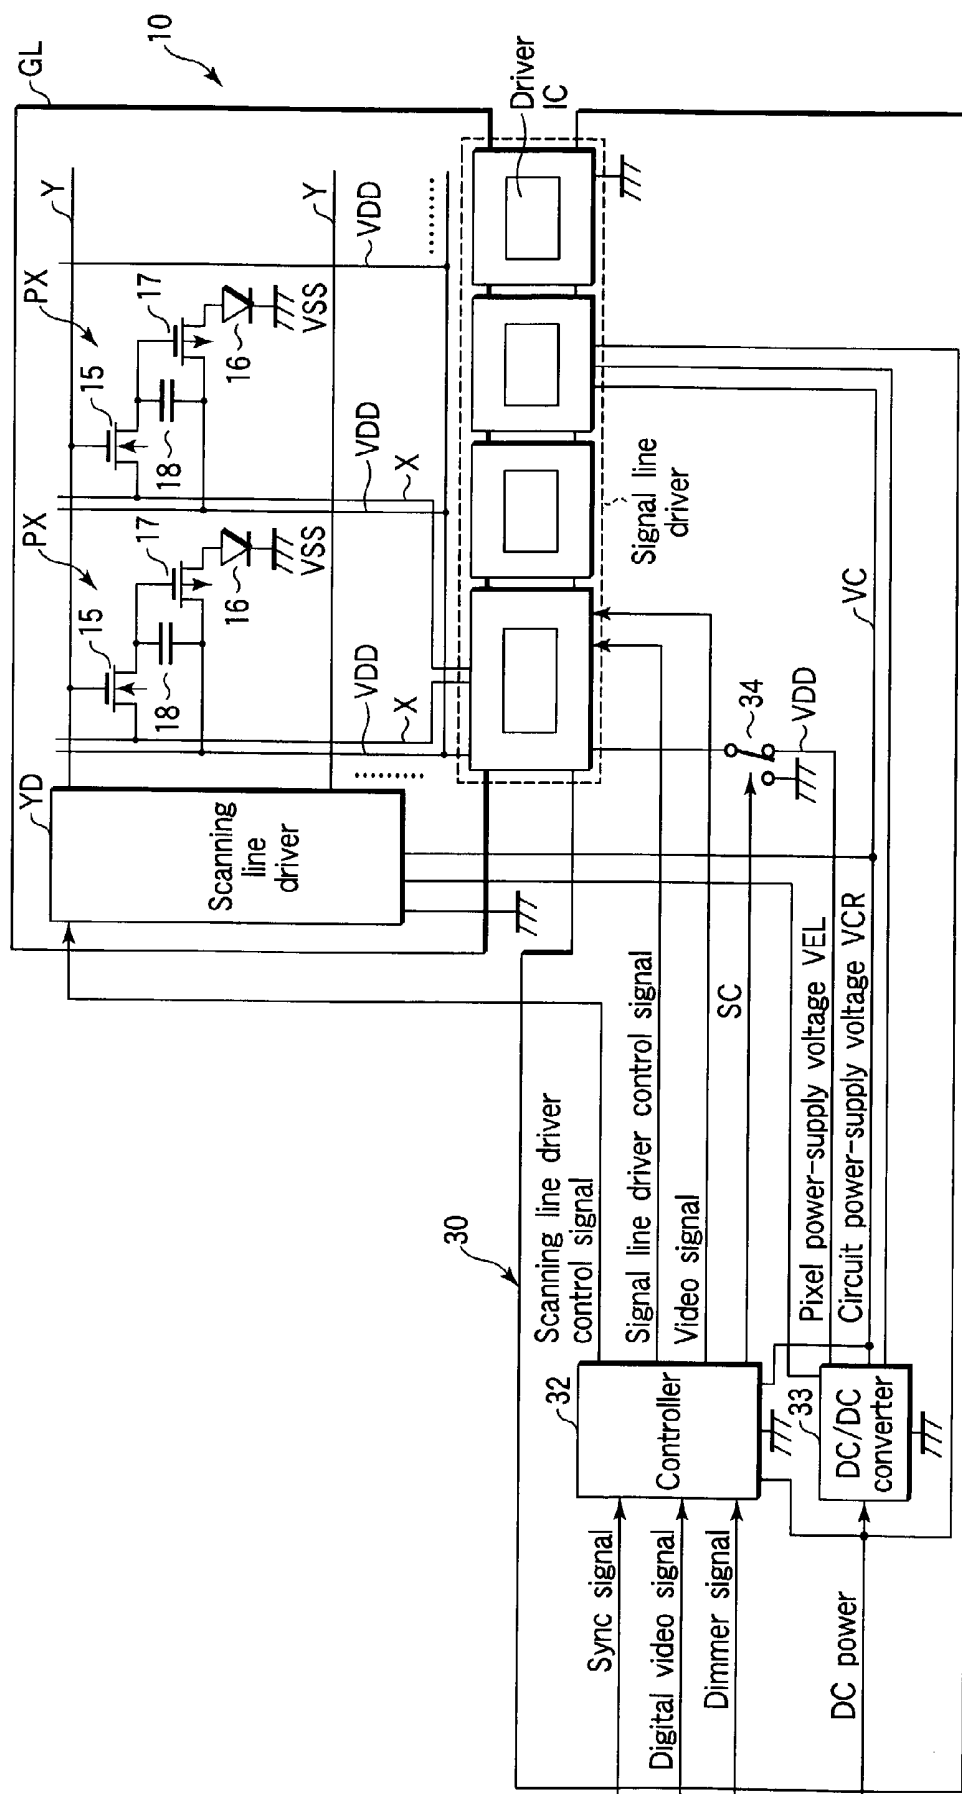


FIG. 15

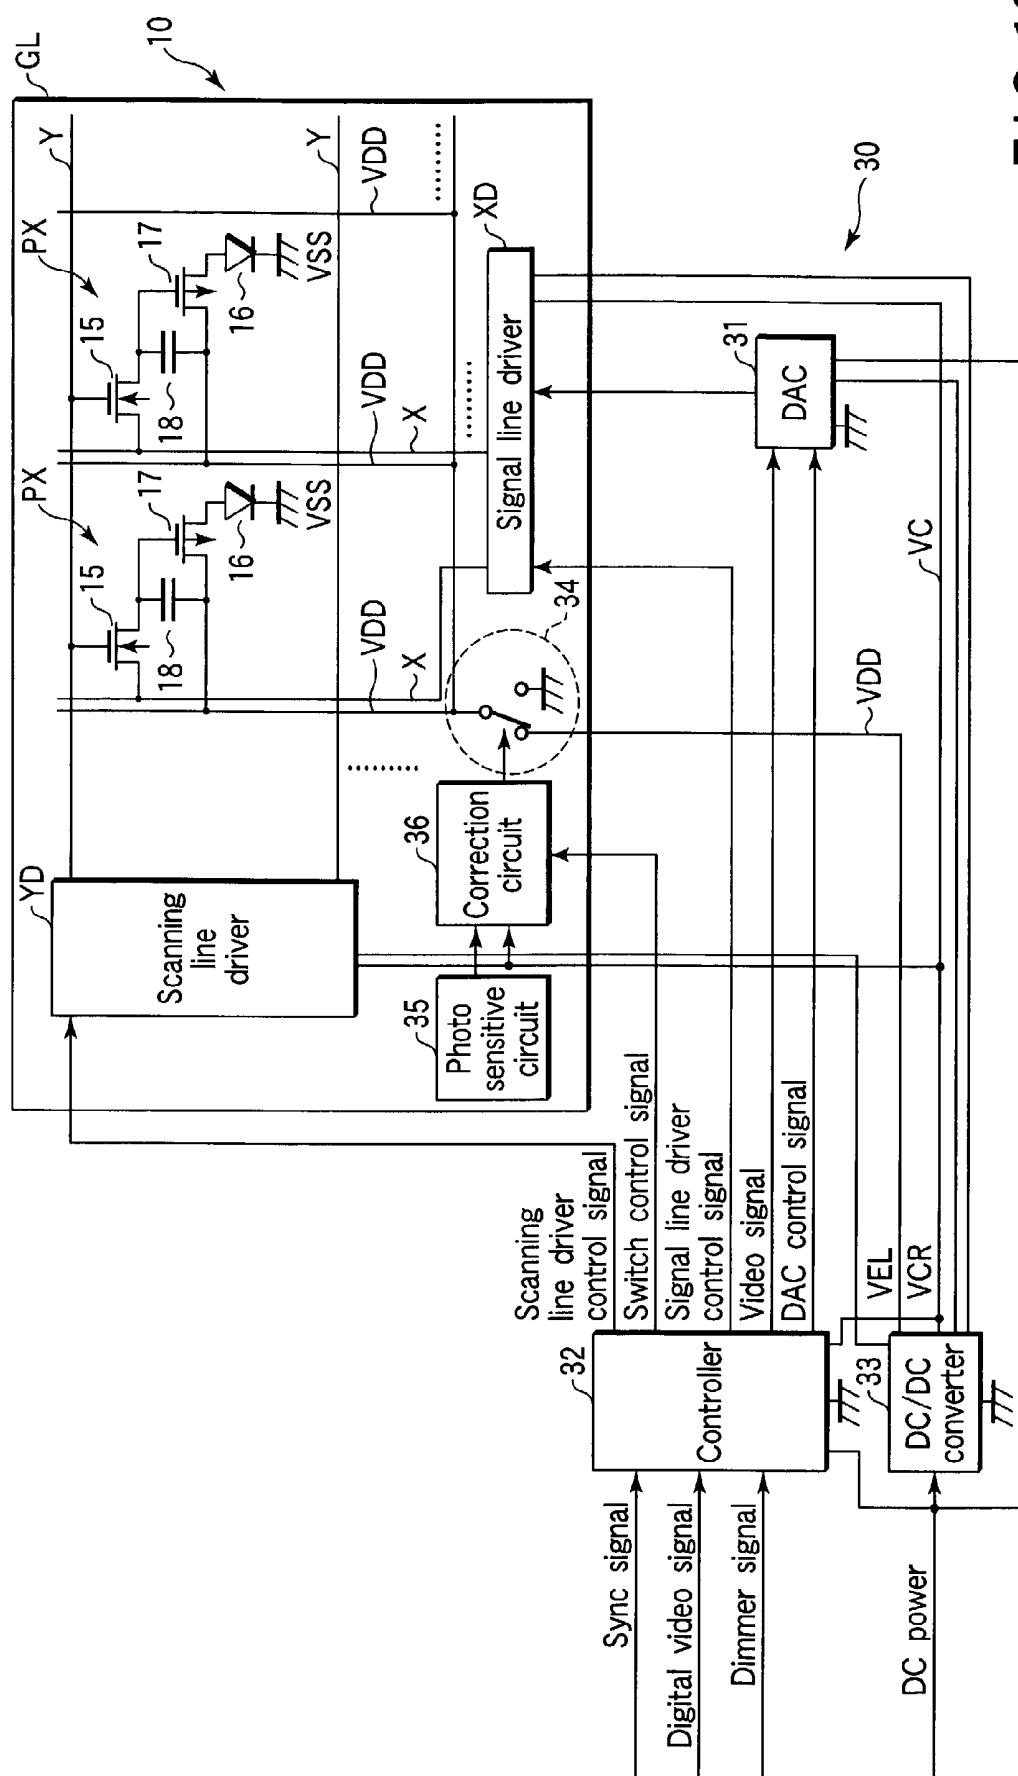


FIG. 16

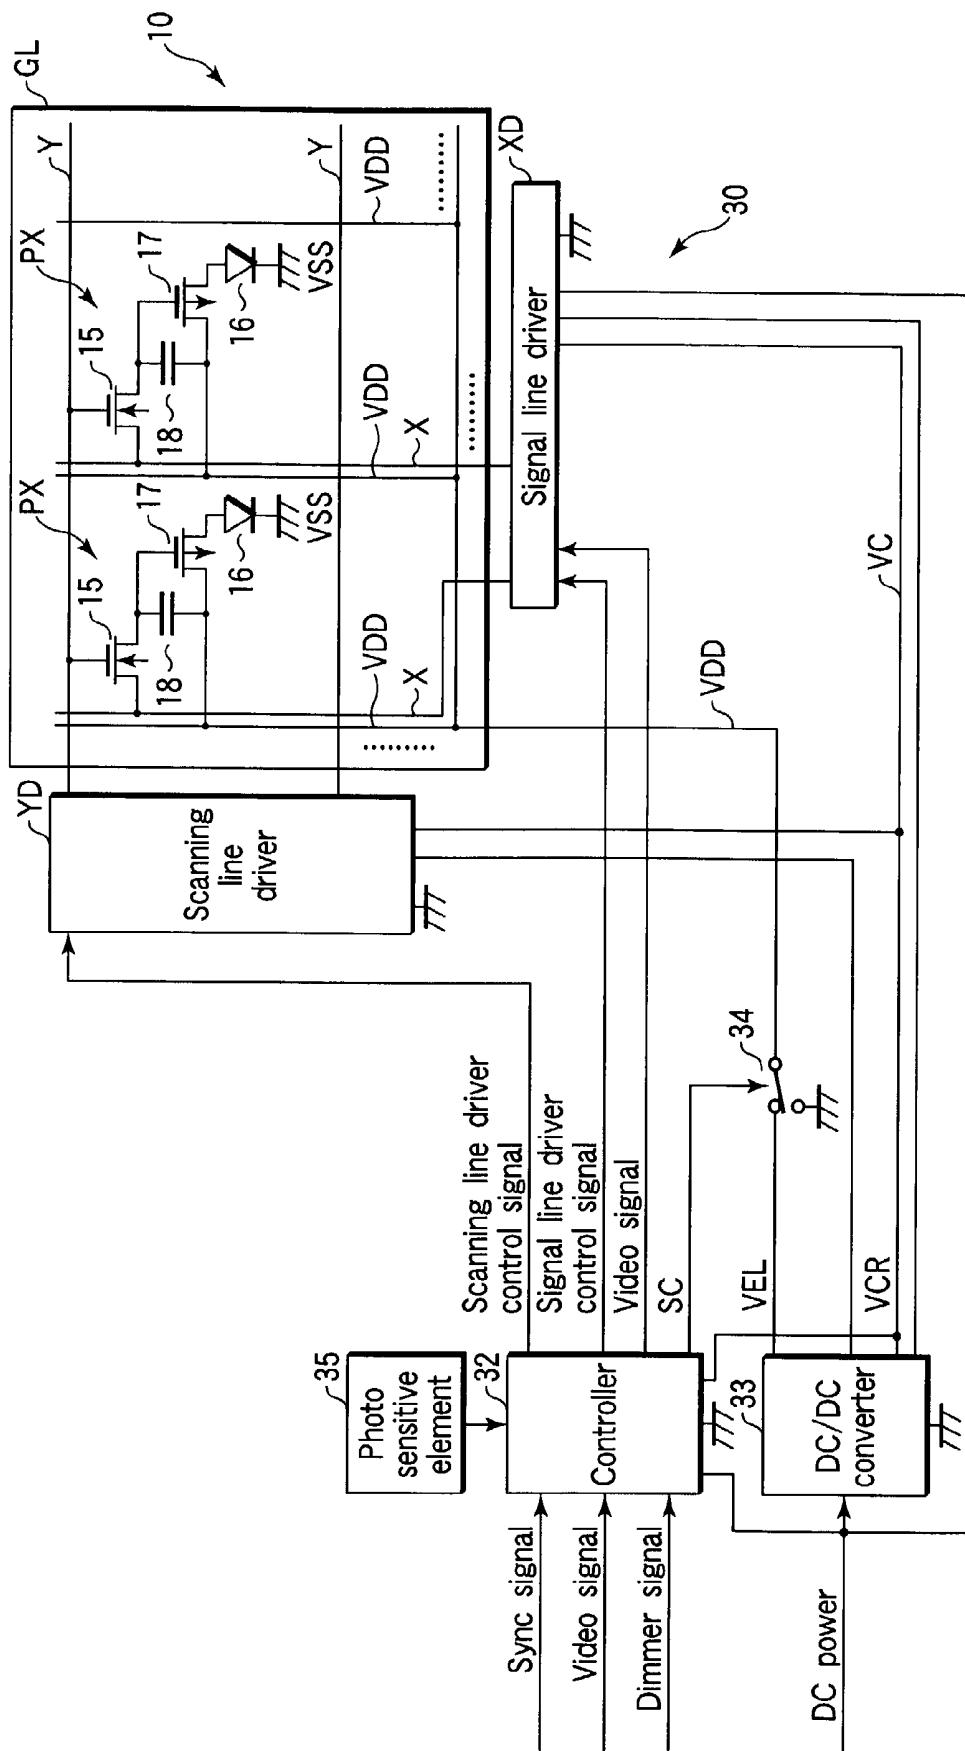


FIG. 17

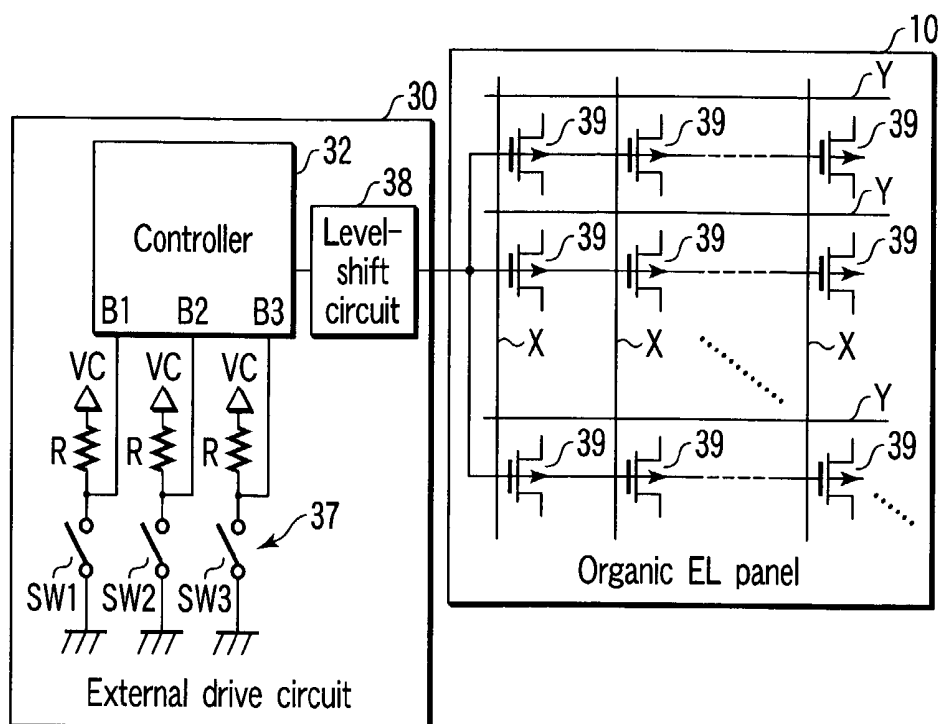


FIG. 18

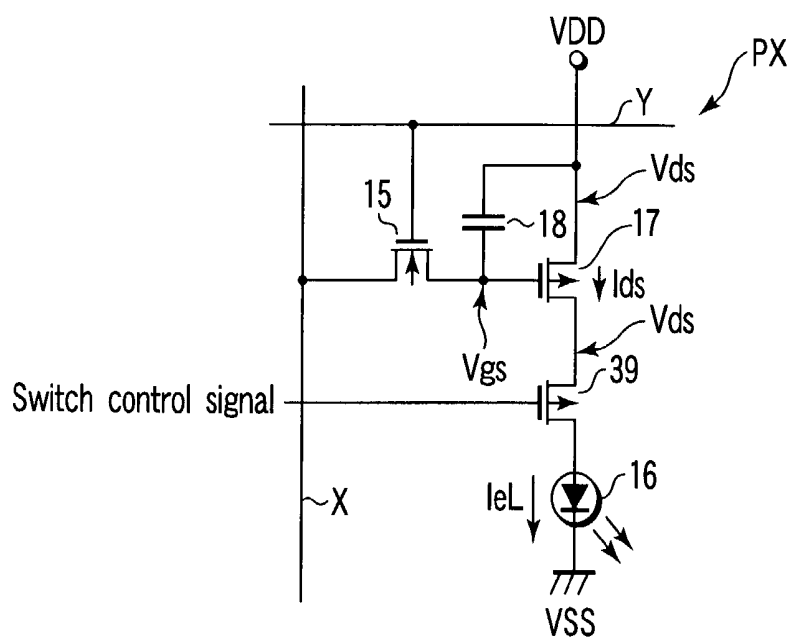


FIG. 19

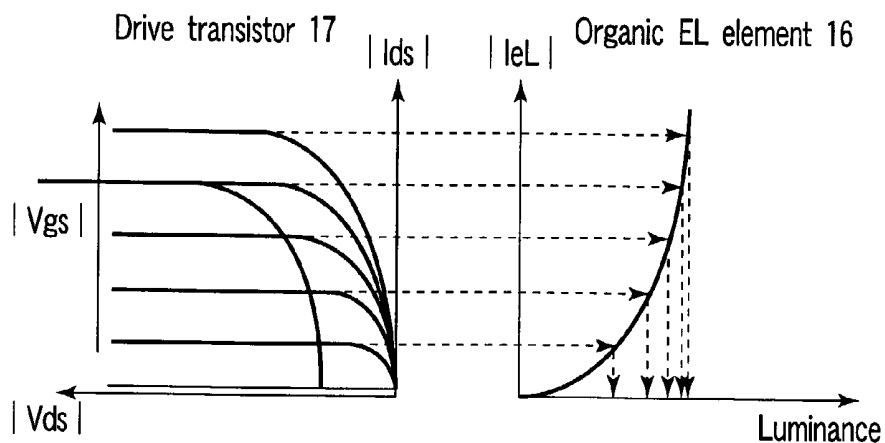


FIG. 20

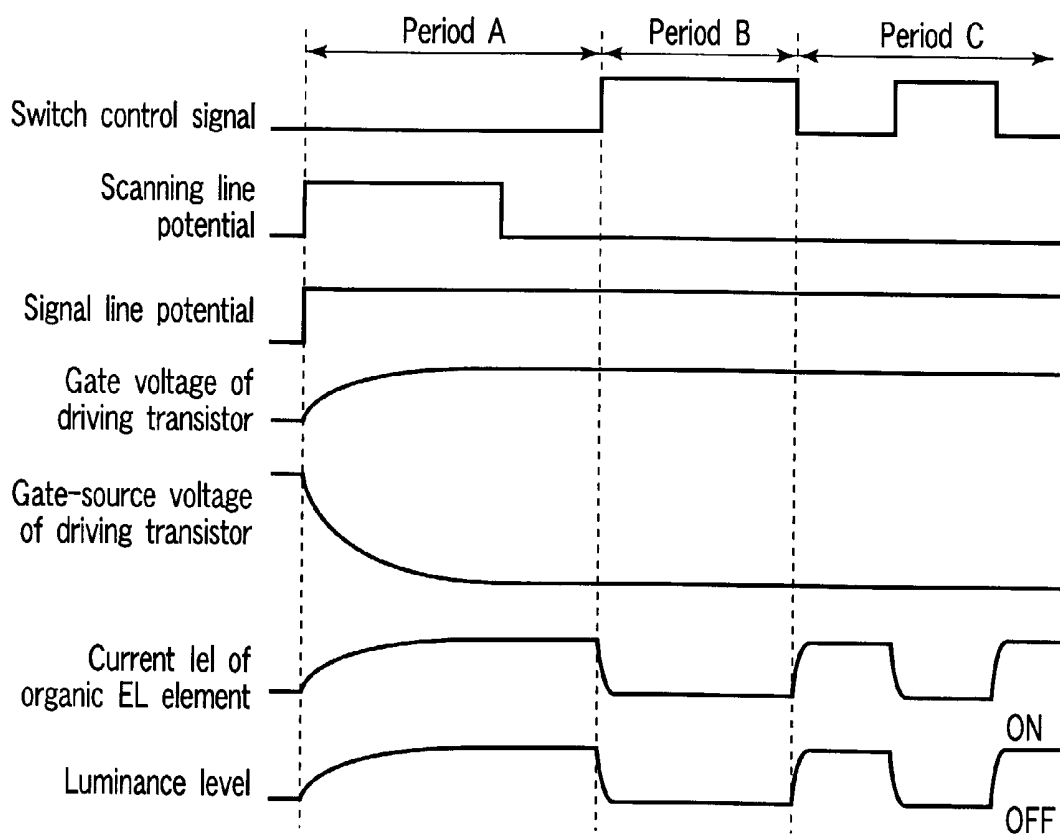


FIG. 21

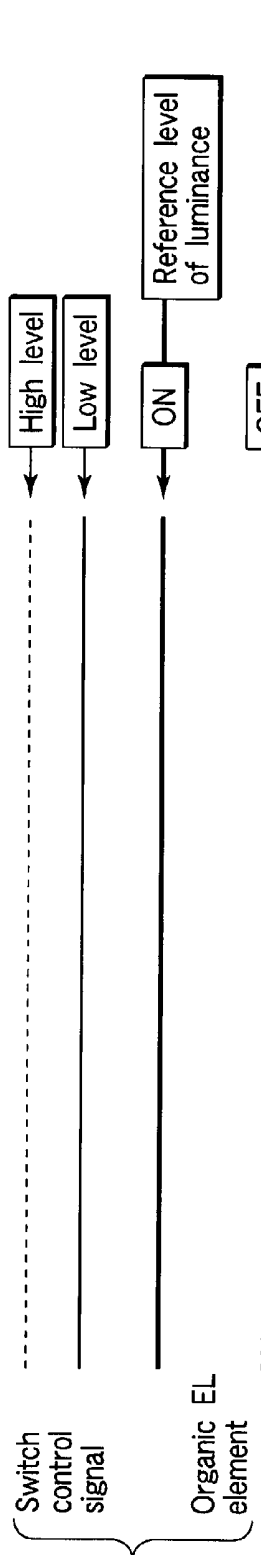


FIG. 22A

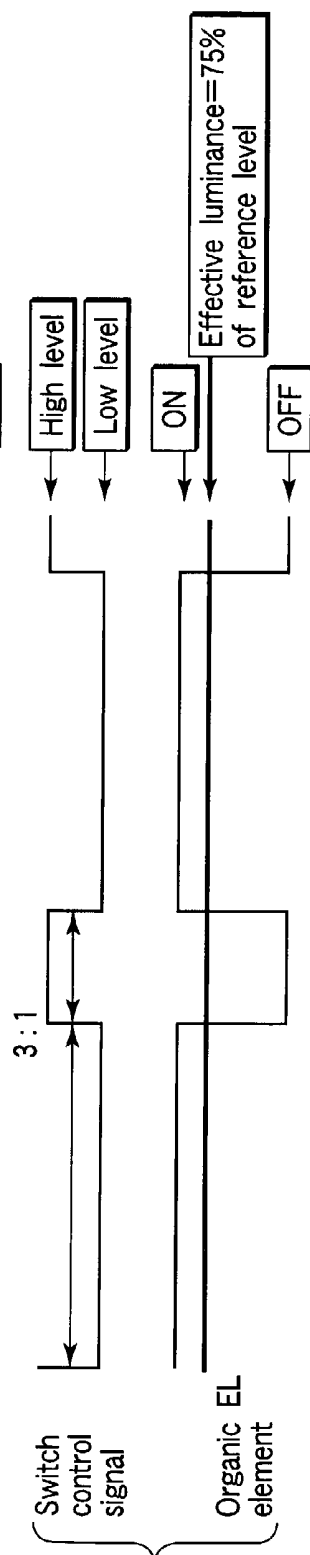


FIG. 22B

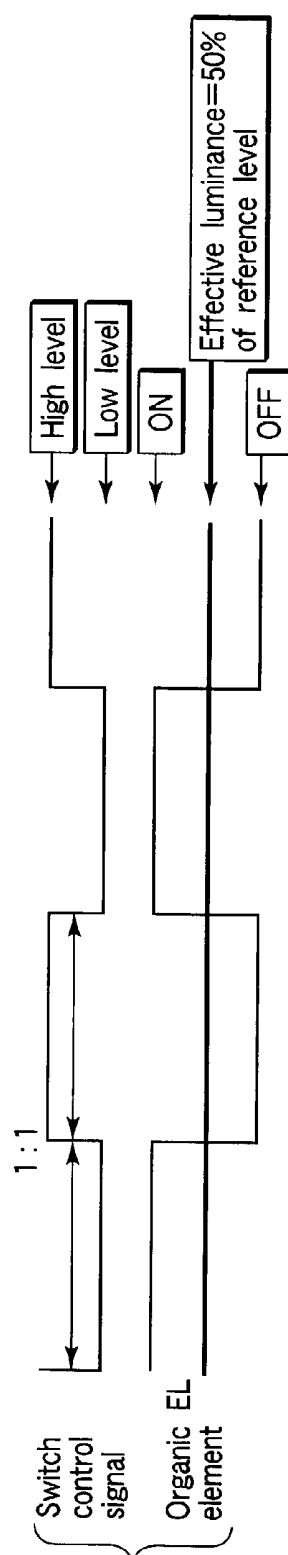


FIG. 22C

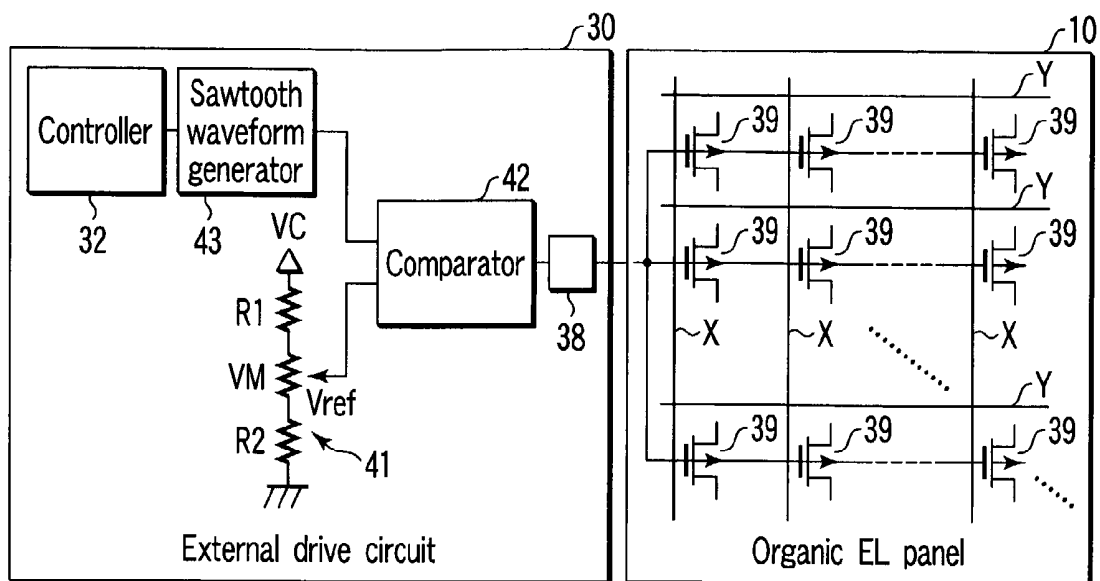


FIG. 23

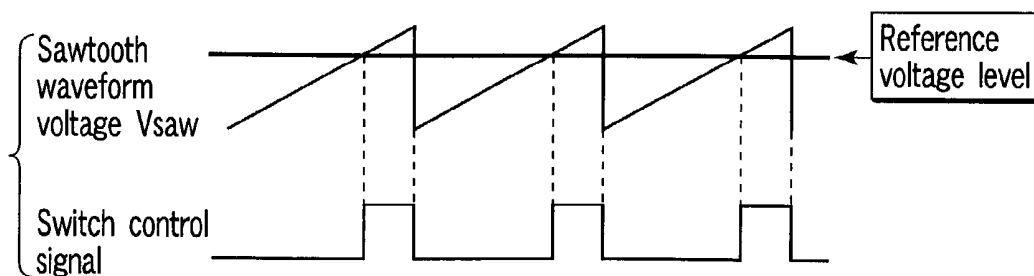


FIG. 24A

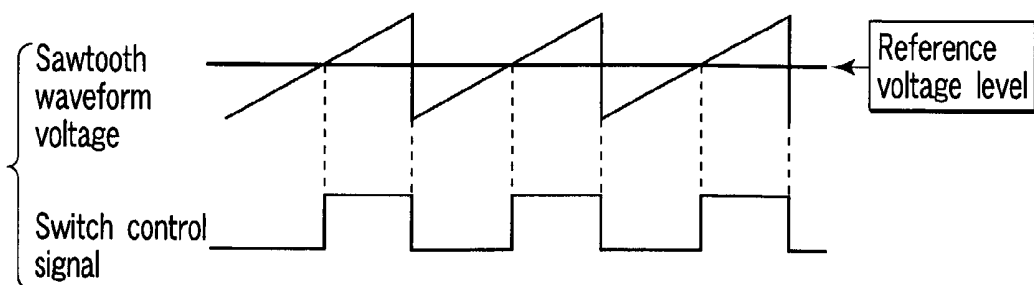


FIG. 24B

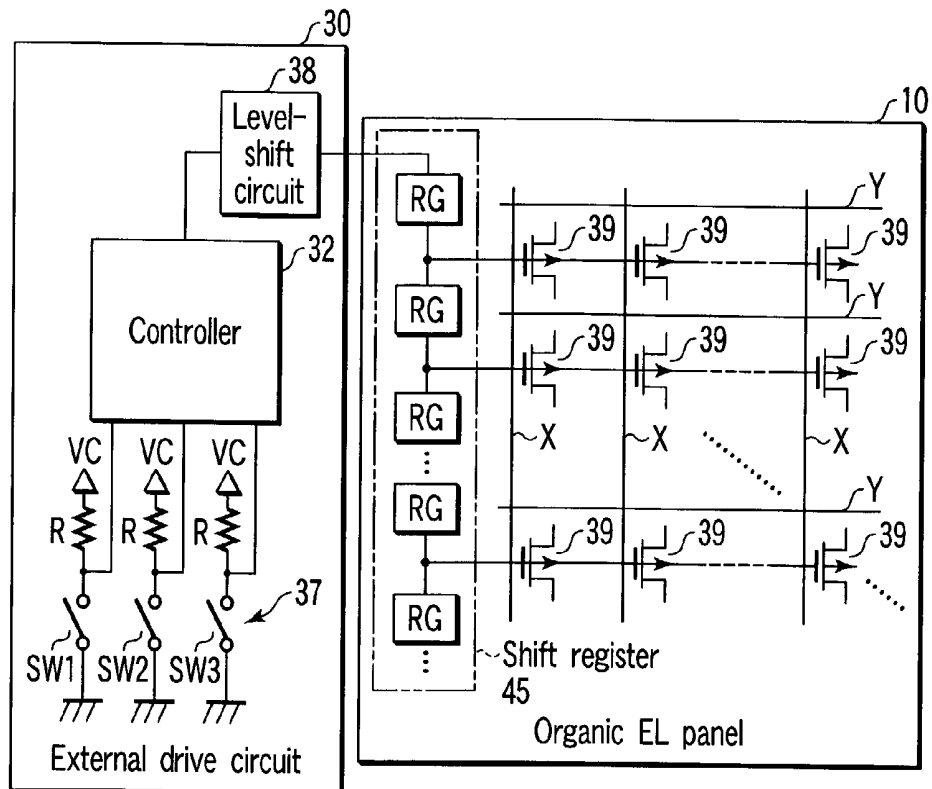


FIG. 25

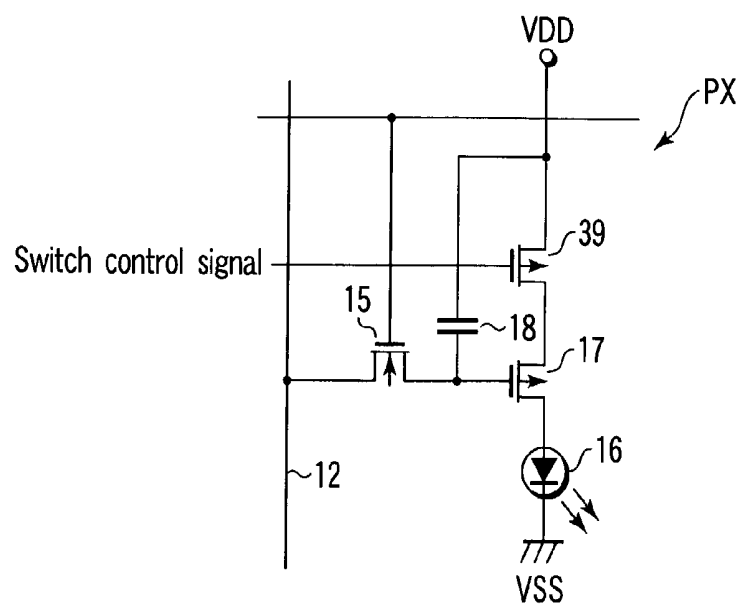


FIG. 26

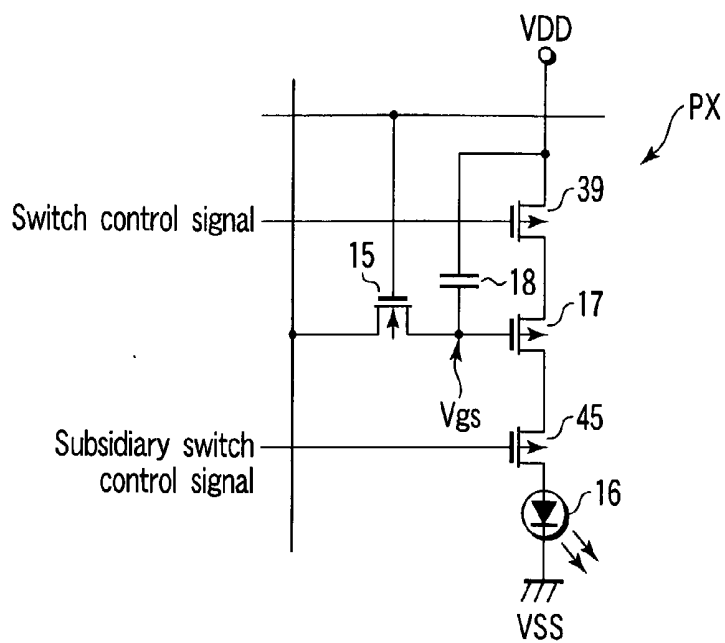


FIG. 27

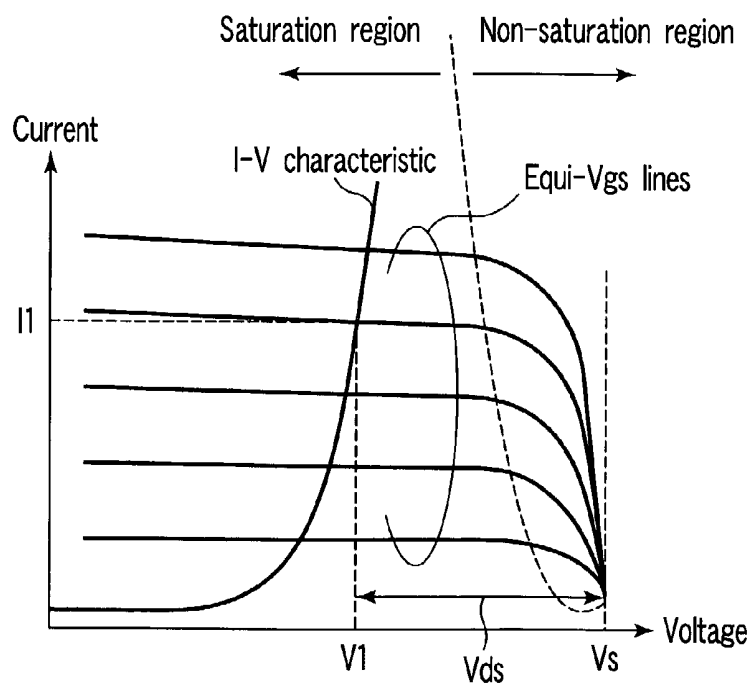


FIG. 28

SELF-LUMINOUS DISPLAY DEVICE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is based upon and claims the benefit of priority from the prior Japanese Patent Applications No. 2001-304723 filed Sep. 28, 2001; and No. 2001-375002, filed Sep. 29, 2001, the entire contents of both of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] This invention relates to a display device having a plurality of display pixels arrayed in a matrix form to display an image, to a driving method thereof and, for example, to a self-luminous display device in which each display pixel is configured by a self-luminous element such as an organic EL (Electro Luminescence) element.

[0004] 2. Description of the Related Art

[0005] In recent years, much attention has been focused on organic EL display devices as monitor displays for portable information terminals since the devices have such characteristics as lightness, thinness, and high luminance. A typical organic EL display device includes organic EL elements as self-luminous elements incorporated in display pixels which are arrayed in a matrix form to display an image. In this organic EL display device, a plurality of scanning lines are disposed along rows of the display pixels, a plurality of signal lines are disposed along columns of the display pixels, and a plurality of pixel switches are disposed near intersections of the scanning and signal lines.

[0006] Each display pixel includes a pixel switch, driving element and organic EL element. The pixel switch is connected to receive a video signal from a corresponding signal lines in response to a scanning signal from a corresponding scanning line. The driving element is connected in series with the organic EL element between a pair of power lines to supply a driving current corresponding to the video signal from the pixel switch. The driving element and pixel switch are formed of thin-film transistors disposed on a glass or synthetic resin substrate, a conductive substrate, or a semiconductor substrate having an insulating film of SiO_2 or SiN , for example.

[0007] The organic EL element has a structure in which a luminous layer is formed of a thin film containing fluorescent organic compounds of red, green or blue, and is held between the cathode and the anode so that holes and electrons are supplied and recombined in the luminous layer to produce excitons. The organic EL element outputs light radiated upon deactivation of the excitons. The anode is a transparent electrode formed of ITO or the like and the cathode is a reflective electrode formed of a metal such as aluminum. With the this structure, the organic EL element can provide a luminance of about 100 to 100000 cd/m^2 with an applied voltage of just 10 V or less.

[0008] The driving current of the organic EL element is controlled by utilizing the constant current characteristic of a driving thin-film transistor serving as the driving element. FIG. 28 shows the relation between the gate-source voltage V_{gs} and the driving current I_1 of the driving thin-film

transistor. If the voltage V_{gs} varies, the current I_1 flowing at this time is determined according to equi- V_{gs} lines as shown in FIG. 28. However, while the transistor is operated in a saturation region, the current I_1 can be kept substantially constant even if the drain-source voltage V_{ds} varies. In the I-V characteristic of the organic EL element shown in FIG. 28, if the voltage V_{ds} is determined at a certain value, the intersection between the equi- V_{gs} line and the I-V characteristic curve becomes an operating point of the organic EL element and the current I_1 flows when voltage V_1 is applied to the organic EL element. The current-luminance characteristic of the organic EL element is approximately linear, and if the current is constant, the luminance is also constant. Therefore, even if the I-V characteristic varies, the current or luminance is kept constant in so far as the transistor characteristic is kept unchanged.

[0009] Further, if the preset potential from the signal line X is applied to the gate of the driving thin-film transistor as the voltage V_{gs} by turning ON the pixel switch, the operating point of the organic EL element which is an intersection between the I-V characteristic curve and the equi- V_{gs} line of FIG. 28 can be selected so that multi-gradation display can be attained.

[0010] In a normal liquid crystal display device, the brightness of the backlight is generally adjusted to optimize the power consumption and ease of observation of an image depending on the service environment. For example, when the user carries around a portable information terminal which is battery-driven, electricity of the battery is saved by causing the user to select a low-power consumption operation in which the backlight is made dark or automatically changing the operation mode into the above operation when it is battery-driven. The brightness of the backlight can be made dark by lowering the power-supply voltage applied from the exterior.

[0011] On the other hand, the organic EL element is a self-luminous element whose luminance depends on a driving current thereof. Therefore, the luminance of the organic EL element cannot be adjusted by changing the power-supply voltage.

[0012] In a gradation display system in which a driving thin-film transistor turned ON/OFF in the non-saturation region is used, it is considered to adjust the ON-time of the thin-film transistor in order to attain desired luminance and gradation. However, extremely slight time adjustment is required and, as a result, it becomes difficult to adequately set either the luminance or gradation.

[0013] Further, it has been considered to change the video signal level in order to attain desired luminance which is half the maximum luminance, for example. However, if the currents flowing through all of the organic EL elements in the luminance adjusting system are equally reduced, the white balance cannot be maintained due to a difference in the luminance characteristics of the organic EL elements which depend on the luminescent colors of red, green and blue. If a correction circuit which corrects variation amounts of video signal levels for respective luminescent colors is used in order to solve the above problem, it cannot be avoided that the circuit configuration is complicated in comparison with that of the brightness adjusting system of the liquid crystal display device.

BRIEF SUMMARY OF THE INVENTION

[0014] An object of the present invention is to provide, as a solution to the above problem, a self-luminous display device which can adjust the luminance irrespective of gradation control.

[0015] According to the present invention, there is provided a self-luminous display device comprising a plurality of display pixels forming a display screen, a plurality of scanning lines disposed along rows of the display pixels, a plurality of signal lines disposed along columns of the display pixels, and a power-supply section which supplies a power-supply voltage to the display pixels, each of the display pixels including a luminous element, a pixel switch which receives a video signal from a corresponding signal lines in response to a scanning signal from a corresponding scanning line and a driving element which is connected between the luminous element and the power supply section to supply a driving current corresponding to the video signal from the pixel switch to the luminous element, and each luminous element being connected to the power supply section via a dimmer switch portion.

[0016] In the display device, the luminous element is connected to the power supply section via the dimmer switch portion which is independent of the driving element. Therefore, if the dimmer switch portion is turned ON at the rate of half a preset period, for example, the luminance of the luminous element can be equivalently reduced by half. That is, the luminance of the luminous element (or the luminance level for maximum gradation) can be set to a desired level irrespective of gradation control by adjusting the light emission rate of the luminous element for each unit time based on the ON time of the dimmer switch portion.

[0017] Additional objects and advantages of the invention will be set forth in the description which follows, and in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention may be realized and obtained by means of the instrumentalities and combinations particularly pointed out hereinafter.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

[0018] The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate embodiments of the invention, and together with the general description given above and the detailed description of the embodiments given below, serve to explain the principles of the invention.

[0019] FIG. 1 is a diagram showing the whole circuit configuration of an organic EL display device according to a first embodiment of the present invention;

[0020] FIG. 2 is a diagram showing the circuit configuration of a display pixel of the organic EL display device shown in FIG. 1;

[0021] FIG. 3 is a diagram showing the circuit configuration of a display pixel of an organic EL display device according to a second embodiment of the present invention;

[0022] FIG. 4 is a timing chart showing the relation between the ON/OFF state of a dimmer switch of the display pixel shown in FIG. 3 and the luminance of an organic EL element;

[0023] FIG. 5 is a diagram showing the circuit configuration of a modification of the display pixel shown in FIG. 2;

[0024] FIG. 6 is a view schematically showing the plane structure of the display pixel shown in FIG. 5;

[0025] FIG. 7 is a diagram showing the circuit configuration of a modification of the display pixel shown in FIG. 3;

[0026] FIG. 8 is a diagram schematically showing a luminance adjusting system of a display pixel of an organic EL display device according to a third embodiment of the present invention;

[0027] FIG. 9 is a diagram showing the whole circuit configuration of an organic EL panel using dimmer switches which are the same as a dimmer switch shown in FIG. 8;

[0028] FIG. 10 is a diagram showing the circuit configuration of an organic EL panel of an organic EL display device according to a fourth embodiment of the present invention;

[0029] FIG. 11 is a diagram showing the whole circuit configuration of the organic EL display device having dimmer switches of two blocks shown in FIG. 10;

[0030] FIG. 12 is a circuit diagram showing the configuration of an organic EL display device according to a fifth embodiment of the present invention;

[0031] FIG. 13 is a timing chart showing two types of switch control signals used to set the ratio of the ON period to the OFF period of a dimmer switch portion shown in FIGS. 12 to 50% : 50%;

[0032] FIG. 14 is a timing chart showing two types of switch control signals used to set the ratio of the ON period to the OFF period of the dimmer switch portion shown in FIGS. 12 to 60% : 40%;

[0033] FIG. 15 is a circuit diagram showing the configuration of an organic EL display device according to a sixth embodiment of the present invention;

[0034] FIG. 16 is a circuit diagram showing the configuration of an organic EL display device according to a seventh embodiment of the present invention;

[0035] FIG. 17 is a circuit diagram showing the configuration of an organic EL display device according to an eighth embodiment of the present invention;

[0036] FIG. 18 is a circuit diagram schematically showing the configuration of an organic EL display device according to a ninth embodiment of the present invention;

[0037] FIG. 19 is a circuit diagram showing the configuration of a display pixel around a dimmer switch shown in FIG. 18;

[0038] FIG. 20 is a graph showing the luminance characteristic of an organic EL element shown in FIG. 19 together with the operating characteristic of a driving transistor;

[0039] FIG. 21 is a waveform diagram showing the waveforms in the display pixel operated under control of a dimmer transistor shown in FIG. 19;

[0040] FIGS. 22A to 22C are timing charts for illustrating the luminance of the organic EL element controlled according to a switch control signal shown in FIG. 19;

[0041] FIG. 23 is a circuit diagram schematically showing the configuration of an organic EL display device according to a tenth embodiment of the present invention;

[0042] FIGS. 24A and 24B are waveform diagrams showing the waveforms of switch control signals generated based on the relation between sawtooth voltage and reference voltage which are input to a comparator shown in FIG. 23;

[0043] FIG. 25 is a circuit diagram schematically showing the configuration of an organic EL display device according to an eleventh embodiment of the present invention;

[0044] FIG. 26 is a circuit diagram showing a first modification of the display pixel shown in FIG. 19;

[0045] FIG. 27 is a circuit diagram showing a second modification of the display pixel shown in FIG. 19; and

[0046] FIG. 28 is a graph showing the relation between the driving current and the gate-source voltage of a driving thin-film transistor which is conventionally known.

DETAILED DESCRIPTION OF THE INVENTION

[0047] There will now be described an organic EL display device according to a first embodiment of the present invention with reference to the accompanying drawings.

[0048] FIG. 1 shows the whole circuit configuration of the organic EL display device and FIG. 2 shows the circuit configuration of a display pixel PX of the organic EL display device. The organic EL display device includes an organic EL panel 10 which displays an image, a driver power supply 11 which produces a driver power-supply voltage for the organic EL panel 10, an EL power supply 12 which produces an EL power-supply voltage for the organic EL panel 10, and a controller 13 which performs the control operation to operate the organic EL panel 10 in a normal mode and in a still image display mode. The organic EL panel 10 includes a plurality of display pixels PX forming an EL display area DS which serves as a display screen, a plurality of scanning lines Y disposed along respective rows of the display pixels PX, a plurality of signal lines X disposed along respective columns of the display pixels PX, a scanning line driver YD disposed outside the display area DS to drive the scanning lines Y, and a signal line driver XD disposed outside the display area DS to drive the signal lines X. Each of the display pixels PX includes a pixel switch 15, organic EL element 16 and driving element 17. The pixel switch 15 is disposed near one of the intersections between the scanning lines Y and the signal lines X and connected to receive a video signal from one of the signal lines X in response to a scanning signal from one of the scanning lines Y. The driving element 17 is connected in series with the organic EL element 16 between a driving power line VDD and a reference power line VSS to supply a driving current corresponding to the video signal from the pixel switch 15 to the organic EL element 16. The organic EL element 16 has one of three luminescent colors of red (R), green (G) and blue (B). The luminescent colors are sequentially assigned to the organic EL elements 16 of plural columns in a preset order. For example, the pixel switch 15 is an N-channel

thin-film transistor and the driving element 17 is a P-channel thin-film transistor. The scanning line driver YD and signal line driver XD include N-channel and P-channel thin-film transistors which are formed in the same process as the pixel switches 15 and driving elements 17 and integrally formed on the same insulating substrate.

[0049] The scanning line driver YD sequentially supplies a scanning signal to the scanning lines in one frame period (1F) under control of the controller 13. That is, each scanning line Y is driven by the scanning signal in a different one of horizontal scanning periods. The signal line driver XD sequentially converts a digital video signal into gradation voltages in each horizontal scanning period under control of the controller 13 and outputs the gradation voltages to the signal lines X as analog video signals.

[0050] The pixel switches 15 on each row are turned ON by a scanning signal supplied from a corresponding one of the scanning lines Y for one horizontal scanning period and are then kept turned OFF until the scanning signal is supplied again after one frame period. The driving elements 17 respectively supply those driving currents to the organic EL elements 16, which correspond to the analog video signals supplied via the respective pixel switches 15 and held by wiring capacitances.

[0051] The scanning line driver YD and signal line driver XD are connected to the driver power supply 11 so as to receive the driver power-supply voltage, and the display pixels PX are connected to the EL power supply 12 via the power lines VDD and VSS so as to receive the EL power-supply voltage.

[0052] The organic EL display device further includes a dimmer switch 14 which is inserted into the driving power line VDD between the EL power supply 12 and the display pixels PX. The dimmer switch 14 is controlled to be turned ON and OFF by a luminance adjusting switch control signal SC from the controller 13 in a preset cycle or at pseudo random. In this case, "pseudo random" indicates a state in which the ON time is equivalently set to a preset rate of a constant time period. The organic EL element 16 emits light when the dimmer switch 14 is turned ON. In the case where the organic EL element 16 is observed for a preset period of time and the total ON time period of the dimmer switch 14 is half the preset period of time, the luminance of the organic EL element 16 becomes equivalent to half the maximum level obtained when the dimmer switch 14 is kept ON for the preset period of time.

[0053] In the organic EL display device of the present embodiment, the organic EL element 16 is connected to the EL power supply 12 via the dimmer switch 14 which is independent of the driving element 17. Therefore, if the dimmer switch 14 is kept ON for half a preset period in each preset period, for example, the luminance of the organic EL element 16 can be equivalently reduced by half. That is, the luminance of the organic EL element 16 can be set to a desired level irrespective of gradation control, by adjusting the light emission rate for each unit time based on the ON time of the dimmer switch 14.

[0054] In the present embodiment, the dimmer switch 14 is disposed outside the organic EL panel 10, but it can be formed on a glass plate used as a circuit board of the organic EL panel 10. However, if a large amount of current flows in

the dimmer switch **14**, it is preferable that a plurality of thin-film transistors are formed as the dimmer switch **14** so as to prevent the current from being concentrated in one portion.

[0055] Next, an organic EL display device according to a second embodiment of the present invention is explained. **FIG. 3** shows the circuit configuration of a display pixel PX of the organic EL display device. The organic EL display device is similar to the organic EL display device shown in **FIG. 1**. Therefore, in **FIG. 3**, portions similar to those of the organic EL display device shown in **FIG. 1** are denoted by the same reference symbols. The dimmer switch **14** shown in **FIG. 1** is omitted in the present embodiment, but the whole configuration except the above point is the same as the configuration shown in **FIG. 1**. In the organic EL display device, each display pixel PX has a dimmer switch **19** which is used instead of the dimmer switch **14**, as shown in **FIG. 3**. The dimmer switch **19** is connected in series between an organic EL element **16** and a driving element **17** and controlled by a switch control signal SC from a controller **13**. For example, the dimmer switch **19** is formed of a P-channel thin-film transistor like the driving element **17**. In this case, when the switch control signal SC is set at a low level, the dimmer switch **19** is turned ON to cause the organic EL element **16** to emit light. For example, if the ON time is changed to periods which are respectively $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$, $\frac{1}{4}$ times the preset period as shown in **FIG. 4**, the luminance of the organic EL element **16** is also set to $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$, $\frac{1}{4}$ times the maximum level according to the above change.

[0056] Also, in the present embodiment, the luminance of the organic EL element can be set to a desired level irrespective of gradation control by adjusting the light emission rate for each unit time based on the ON time of the dimmer switch **19**, as in the first embodiment.

[0057] **FIG. 5** shows the circuit configuration of a modification of the display pixel PX shown in **FIG. 2** and **FIG. 6** schematically shows the plane structure of the display pixel PX shown in **FIG. 5**. In the modification, the display pixel PX includes a static memory section **20** and a memory control switch **21** as shown in **FIG. 5**. The memory control switch **21** is connected between the gate of the driving element **17** and the static memory section **20** and is controlled by a memory control signal from the controller **13**. For example, the memory control switch **21** is formed of an N-channel thin-film transistor like the pixel switch **15**. The static memory section **20** includes a first inverter **20A**, second inverter **20B** and switch element **20C**. Each of the inverters **20A** and **20B** is formed of P-channel and N-channel thin-film transistors which are connected in series between the power lines VDD and VSS1 and the switch element **20C** is formed of a P-channel thin-film transistor which is driven via the scanning line Y. The inverter **20A** receives a video signal from the gate of the driving element **17** via the memory control switch **21** and inverts the same, the inverter **20B** inverts the video signal output from the inverter **20A**, and the switch element **20C** outputs the video signal output from the inverter **20B** to the inverter **20A** and outputs the same to the gate of the driving element **17** via the memory control switch **21**.

[0058] The video signal is supplied to the gate of the driving element **17** from the signal line X via the pixel switch **15** when the scanning line Y is set at the high level.

The memory control switch **21** supplies the video signal to the static memory section **20** under control of the memory control signal. The switch element **20C** is set in the OFF state when the scanning line Y is set at the high level and it is set into the ON state if the scanning line Y is set at the low level. As a result, the video signal is held in the static memory section **20** in a digital form of a high or low potential.

[0059] Luminance adjustment made by use of the dimmer switch **14** shown in **FIG. 1** is also applicable to the case where each display pixel PX has the above-described static memory section **20**. Further, since a still image can be displayed by use of the static memory section **20**, the power consumption can be further lowered by suspending the operations of the signal line driver XD and scanning line driver YD. The static memory section **20** is connected to the power line VDD which is commonly used by the dimmer switch **14**, and therefore, the power line VSS1 is independently provided from the power line VSS so as not to make the memory operation unstable.

[0060] **FIG. 7** shows the circuit configuration of a modification of the display pixel PX shown in **FIG. 3**. In this modification, each display pixel PX has a dimmer switch **19** in addition to the static memory section **20** shown in **FIG. 5**. In this case, not only luminance adjustment of the display pixel PX can be made by use of the dimmer switch **19**, but also an unstable operation of the static memory section **20** caused by the dimmer switch **14** shown in **FIG. 1** can be eliminated without fail. Further, since a still image can be displayed by use of the static memory section **20**, as in the modification shown in **FIG. 5**, the power consumption can be further lowered by suspending the operations of the signal line driver XD and scanning line driver YD.

[0061] The static memory sections **20** shown in **FIGS. 5 and 7** are each configured by a one-bit digital memory to display an image in two luminance levels, but if it is configured to have a plural-bit configuration, intermediate levels between the two luminance levels are available.

[0062] Next, an organic EL display device according to a third embodiment of the present invention is explained. **FIG. 8** schematically shows a luminance adjusting system of a display pixel PX of the organic EL display device, and **FIG. 9** shows the circuit configuration of the organic EL panel **10**. The organic EL display device is similar to the organic EL display device shown in **FIG. 1**. Therefore, in **FIGS. 8 and 9**, portions which are similar to those of the organic EL display device shown in **FIG. 1** are denoted by the same reference symbols. The dimmer switch **14** shown in **FIG. 1** is omitted in the present embodiment and the remaining configuration is the same as that shown in **FIG. 1**. In the organic EL display device, a plurality of dimmer switches **22** are provided instead of the dimmer switch **14**. As shown in **FIG. 8**, each dimmer switch **22** is a P-channel thin-film transistor inserted into a power line VDD formed along the display pixels PX of one row on a glass plate which is used as a circuit board of the organic EL panel **10**.

[0063] In the whole portion of the organic EL panel **10**, the dimmer switches **22** are arranged in one column as shown in **FIG. 9** and assigned to the respective rows of the display pixels PX. The dimmer switches **22** are controlled to be turned ON and OFF by a luminance adjusting switch control signal SC from a controller **13** in a preset cycle or at pseudo

random. Each dimmer switch **22** equally switches driving currents flowing in organic EL elements **16** of the display pixels PX of one row connected to a corresponding one of the power lines VDD. The luminance of the organic EL element **16** becomes equivalent to half the maximum level which is obtained when the dimmer switch **22** is kept ON for a preset period of time in a case where the total ON time period of the dimmer switch **22** is half the preset period of time, for example.

[0064] In the organic EL display device of the present embodiment, the organic EL elements **16** are connected to an EL power supply **12** via the respective dimmer switches **22** which are provided independently of the driving elements **17**. Therefore, if the dimmer switch **22** is kept in the ON state for a half preset period, in each preset period, for example, the luminance of the organic EL element **16** can be equivalently reduced by half. That is, the luminance of the organic EL element **16** can be set to a desired level irrespective of gradation control, by adjusting the light emission rate for each unit time based on the ON time of the dimmer switch **22**.

[0065] Next, an organic EL display device according to a fourth embodiment of the present invention is explained. FIG. 10 shows the circuit configuration of an organic EL panel **10** of the organic EL display device and FIG. 11 shows the whole circuit configuration of the organic EL display device. The organic EL display device is similar to the organic EL display device shown in FIG. 9. Therefore, in FIGS. 10 and 11, portions which are similar to those of the organic EL display device shown in FIG. 9 are denoted by the same reference symbols. In the organic EL display device, as shown in FIG. 11, a plurality of display pixels PX are divided into two blocks forming EL display areas **1** and **2** in the upper and lower portions of the display screen DS. Further, as shown in FIG. 10, a plurality of dimmer switches **22** are divided into two blocks in correspondence to the EL display areas **1** and **2**, and the two divided blocks of the dimmer switches are respectively controlled by switch control signals SC1 and SC2 supplied from a controller **13**. The switch control signals SC1 and SC2 are substantially equivalent to the switch control signal SC used in the third embodiment. The display screen is not necessarily divided into plural blocks of the same size. Further, the blocks can be not only divided in the column direction of the display pixels PX, but also divided in the row direction. In this case, the power line VDD is also divided according to the divided blocks. The EL power supply **12** supplies an EL power-supply voltage to the dimmer switches **22** inserted into the power lines VDD divided in correspondence to the divided blocks. Since it is required that the dimmer switches **22** have a current-supply capacity adapted to the block size, the channel size of the thin-film transistor is determined according to the required current-supply capacity when a thin-film transistor is formed as the dimmer switch **22**.

[0066] The dimmer switch **22** is controlled to be turned ON and OFF in a preset cycle or at pseudo random under control of the switch control signals SC1 and SC2 from the controller **13**. Each dimmer switch **22** equally switches driving currents flowing in organic EL elements **16** of the display pixels PX of one block connected to a corresponding one of the power lines VDD. The luminance of the organic EL element **16** becomes equivalent to half the maximum level which is obtained when the dimmer switch **22** is kept

ON for a preset period of time in a case where the total ON time period of the dimmer switch **22** is half the preset period of time, for example.

[0067] In the organic EL display device of the present embodiment, the organic EL elements **16** are connected to the EL power supply **12** via the respective dimmer switches **22** which are commonly used for each block. Therefore, if the dimmer switch **22** is kept in the ON state for half a preset period, in each preset period, for example, the luminance of the organic EL element **16** can be equivalently reduced by half. That is, the luminance of the organic EL element **16** can be set to desired luminance irrespective of gradation control by adjusting the light emission rate for each unit time based on the ON time of the dimmer switch **22**. Further, since the luminance of the EL display areas **1** and **2** can be set to different luminance levels, the range of application thereof can be expanded.

[0068] In each of the above embodiments, the switch control signal SC, SC1 or SC2 is generated from the controller **13** and supplied to the dimmer switch **14**, **19** or **22**, but the switch control signal can be supplied from a host processing unit or the like disposed outside the organic EL display device to the dimmer switch **14**, **19** or **22**. Further, the controller **13** can be designed to generate a switch control signal SC which lowers the luminance of the organic EL element **16** in a dark place by referring to an output signal of a sensor which is provided to sense outside light. In addition, the controller **13** can be designed to refer to an output signal of a sensor which detects the remaining battery power, and generate a switch control signal SC for lowering the luminance of the organic EL element **16** when the remaining battery power is reduced to a predetermined amount.

[0069] Next, an organic EL display device according to a fifth embodiment of the present invention is explained with reference to the accompanying drawings. FIG. 12 shows the configuration of the organic EL display device. The organic EL display device includes an organic EL panel **10** and an external drive circuit **30** which drives the organic EL panel **10**.

[0070] The organic EL panel **10** includes a plurality of display pixels PX arrayed in a matrix form on an insulating substrate GL such as a glass plate to display an image, a plurality of scanning lines Y disposed along respective rows of the display pixels PX, a plurality of signal lines X disposed along respective columns of the display pixels PX, a plurality of pixel switches **15** disposed near the intersections between the scanning lines Y and the signal lines X, a scanning line driver YD which drives the scanning lines Y, and a signal line driver XD which drives the signal lines X. Each of the display pixels PX includes an organic EL element **16**, a driving transistor **17** connected in series with the organic EL element **16** between paired power lines VDD and VSS and a capacitor **18** which holds the gate voltage of the driving transistor **17**. The pixel switch **15** is formed of an N-channel thin-film transistor having a semiconductor layer of polycrystalline silicon, for example. The pixel switch permits the capacitor **18** to hold the voltage of a video signal supplied from a corresponding one of the signal lines X when it is driven by a scanning signal from a corresponding scanning line Y and supplies the thus held voltage to the driving transistor **17** as the gate voltage. The driving tran-

sistor **17** is formed of a P-channel thin-film transistor having a semiconductor layer of polycrystalline silicon, for example, and causes a driving current corresponding to the gate voltage to flow in the organic EL element **16**. The organic EL element **16** has a structure in which a luminous layer is formed of a thin film containing fluorescent organic compounds of red, green or blue, and is held between the cathode and the anode so that holes and electrons are supplied and recombined in the luminous layer to produce excitons. The organic EL element **16** outputs light radiated upon deactivation of the excitons. In the organic EL panel **10**, columns of organic EL elements **16** whose luminescent color is red, columns of organic EL elements **16** whose luminescent color is green and columns of organic EL elements **16** whose luminescent color is blue are repeatedly arranged in order of red, green and blue in the row direction.

[0071] The external drive circuit **30** is formed on an external drive circuit board disposed outside the organic EL panel **10**. The external drive circuit **30** comprises a DA converter circuit (DAC) **31** which has DA converters for converting a digital signal into analog signals, and supplies analog video signals for the signal lines to the signal line driver **XD** based on the analog signals. It further comprises a controller **32** which controls the scanning line driver **YD**, signal line driver **XD** and DAC **31**, and a DC/DC converter **33** which produces power-supply voltages such as a pixel power-supply voltage **VEL** and a circuit power-supply voltage **VCR**, based on a DC power-supply voltage supplied from the exterior and outputs the power-supply voltages to drive the organic EL panel **10**. Among the above power-supply voltages, the pixel power-supply voltage **VEL** is applied between the paired power lines **VDD** and **VSS** to operate the display pixels **PX**. The controller **32** receives a digital video signal and sync signal which are supplied from the exterior, and produces a vertical scanning control signal for controlling the vertical scanning timing, a horizontal scanning control signal for controlling the horizontal scanning timing, and a DAC control signal synchronized with the horizontal and vertical scanning timings, based on the sync signal. Further, the controller **32** respectively supplies the vertical scanning control signal, horizontal scanning control signal and DAC control signal to the scanning line driver **YD**, signal line driver **XD** and DAC **31**, and also supplies a digital video signal to the DAC **31** in synchronism with the horizontal and vertical scanning timings.

[0072] The DAC **31** is a converter IC disposed on the external drive circuit board and sequentially converts the digital video signal into an analog form under control of the DAC control signal. The signal line driver **XD** samples the analog video signals derived from the DAC **31** in each horizontal scanning period under control of the horizontal scanning control signal to supply the sampled signals to the signal lines **X** in parallel. Further, the scanning line driver **YD** sequentially supplies a scanning signal to the scanning lines **Y** in each vertical scanning period under control of the vertical scanning control signal. The pixel switches **15** on each row are turned ON for one horizontal scanning period by a scanning signal commonly supplied thereto from a corresponding one of the scanning lines **Y** and are then kept in the OFF state until the scanning signal is supplied again after one vertical scanning period. The driving transistors **17** of one row cause driving currents corresponding to voltages

of video signals supplied as gate voltages from the signal lines **X** by turn-ON of the pixel switches **15** to flow into the organic EL elements **16**.

[0073] Further, the organic EL display device includes a dimmer switch portion **34** which is formed on the insulating substrate **GL** of the organic EL panel **10** and controlled by a switch control signal **SC** from the controller **32**. The dimmer switch portion **34** is inserted between a node of the DC/DC converter **33** side and a node of the display pixel **PX** side serving as the power line **VDD** on the insulating substrate **GL**. It is set into a first state in which the display pixel **PX** side node is connected to the DC/DC converter **33** side node to cause all of the organic EL elements **16** to emit light when the switch control signal **SC** is set at the high level and set into a second state in which the display pixel **PX** side node is connected to the power line **VSS** to interrupt light emission of all of the organic EL elements **16** when the switch control signal **SC** is set at the low level. The controller **32** determines the luminance level based on a dimmer signal supplied from the exterior and changes the ratio of the high-level period to the low-level period of the switch control signal **SC** according to the luminance level in each vertical scanning period. The dimmer switch portion **34** equally switches currents which respectively flow in all of the organic EL elements **16** under control of the switch control signal **SC** to equally control the ratios of the luminous time to the non-luminous time of each of the organic EL elements **16**. In this case, the dimmer signal is a signal obtained as the result that desired luminance is selected by use of a luminance selection switch or the like which is operated by a user or an external computer.

[0074] In the luminance adjusting operation of setting the luminance of the screen to 50%, a switch control signal **SC(A)** as shown in FIG. 13 is supplied to the dimmer switch portion **34**. In the case of the switch control signal **SC(A)**, the front half portion of one vertical scanning period is set as an ON period for supply of a driving current and the latter half portion thereof is set as an OFF period for interruption of the driving current. The dimmer switch portion **34** performs a switching operation only once in one vertical scanning period under control of the switch control signal **SC(A)**. As a result, the ratio of the luminous time to the non-luminous time of all the organic EL elements **16** is set to 1:1 so as to set the luminance of the screen to 50% of the maximum luminance.

[0075] Further, in the luminance adjusting operation of setting the luminance of the screen to 60%, a switch control signal **SC(A)** as shown in FIG. 14 is supplied to the dimmer switch portion **34**. In the case of the switch control signal **SC(A)**, the preceding $\frac{3}{10}$ portion of one vertical scanning period is set as an ON period for supply of a driving current and the remaining $\frac{4}{10}$ portion thereof succeeding the above period is set as an OFF period for interruption of the driving current. The dimmer switch portion **34** performs a switching operation only once in one vertical scanning period under control of the switch control signal **SC(A)**. As a result, the ratio of the luminous time to the non-luminous time of all the organic EL elements **16** is set to 3:2 so as to set the luminance of the screen to 60% of the maximum luminance.

[0076] In the above embodiment, the switch control signal **SC(A)** which causes the dimmer switch portion **34** to perform the switching operation once in one vertical scan-

ning period is explained. However, as shown in **FIGS. 13 and 14**, a switch control signal SC(B) which causes the dimmer switch portion **34** to perform the switching operation plural times in one vertical scanning period can be used. Also, with the switch control signal SC(B), the ratio of the ON period to the OFF period can be controlled in the unit of one vertical scanning period.

[0077] In the organic EL display device of the embodiment, the dimmer switch portion **34** switches driving currents flowing in all of the organic EL elements **16** in each vertical scanning period under control of the switch control signal SC to control the ratio of the luminous time to the non-luminous time of the organic EL elements **16** to adjust the luminance of the screen. This system can avoid degradation in the white balance that occurs due to a difference between the luminance characteristics of the organic EL elements **16** depending on the luminescent colors when the driving currents flowing in all of the organic EL elements **16** are not interrupted and changed in each vertical scanning period to adjust the luminance of each organic EL element **16**. That is, the luminance of the display screen can be adjusted without degradation in the white balance. Further, since the controller **32** controls the switching operation of the single dimmer switch portion **34** to determine the ratio of the luminous time to the non-luminous time of all the organic EL elements **16**, the complicated structure such as a correction circuit for correcting a variation amount of a video signal level is not required to maintain the white balance.

[0078] The dimmer signal can be configured not only to reflect a selection result of a desired luminance but also to reflect the remaining battery power or the illuminance of incident light to the organic EL panel **10** from the exterior, for example. Further, the luminance of the screen can be controlled to be lowered when the video signal is kept unchanged for a preset period of time by interruption of the computer operation. Also, the above dimmer switch portion **34** is formed of a thin-film transistor using a polycrystalline silicon thin film and formed on the same insulating substrate GL at the same process as that of the pixel switches **15**, driving transistors **17**, and drivers YD, XD.

[0079] **FIG. 15** shows the configuration of an organic EL display device according to a sixth embodiment of the present invention. The organic EL display device is similar to the organic EL display device of the fifth embodiment except that the dimmer switch portion **34** is formed as an output enable switch of pixel power-supply voltage VEL on the board of the external drive circuit **30** disposed outside the organic EL panel **10**. In **FIG. 15**, portions which are similar to those of **FIG. 12** are denoted by the same reference symbols and the explanation thereof is omitted.

[0080] The dimmer switch portion **34** is inserted between an output node for pixel power-supply voltage VEL and a power line VDD and controlled by a switch control signal SC from a controller **32**, as in the fifth embodiment. That is, the dimmer switch portion **34** is set into a first state in which it connects the power line VDD to the output node for pixel power-supply voltage VEL to cause all of the organic EL elements **16** to emit light when the switch control signal SC is set at the high level, and set into a second state in which it connects the power line VDD to the power line VSS to interrupt light emission of all of the organic EL elements **16**

when the switch control signal SC is set at the low level. The controller **32** determines the luminance level based on a dimmer signal supplied from the exterior to change the ratio of the high-level period to the low-level period of the switch control signal SC in each vertical scanning period according to the luminance level. The dimmer switch portion **34** switches driving currents which respectively flow in all of the organic EL elements **16** under control of the switch control signal SC to equally control the ratios of the luminous time to the non-luminous time of all the organic EL elements **16** to adjust the luminance of the display screen.

[0081] In this case, the controller **32** receives a digital video signal and sync signal supplied from the exterior and produces a scanning line driver control signal for controlling the vertical scanning timing, a signal line driver control signal for controlling the horizontal scanning timing, and a DAC control signal synchronized with the horizontal and vertical scanning timings, based on the sync signal. Further, the controller **32** respectively supplies the scanning line driver control signal, signal line driver control signal and DAC control signal to the scanning line driver YD, signal line driver XD and DAC **31** and also supplies a digital video signal to the DAC **31** in synchronism with the horizontal and vertical scanning timings. The scanning line driver YD is formed on an insulating substrate GL and connected to the scanning lines Y which are integrally formed with the scanning line driver YD on the insulating substrate GL. Further, the signal line driver XD and DAC **31** are formed of driver ICs disposed on a flexible wiring board as a TCP (tape carrier package) and connected to the signal lines X formed on the insulating substrate GL. In the driver ICs, the DAC **31** sequentially converts a digital video signal into an analog form by control of the DAC control signal, and the signal line driver XD samples the analog video signals derived from the DAC **31** in each horizontal scanning period by control of the horizontal scanning control signal and supplies the sampled signals to corresponding ones of the signal lines X in parallel.

[0082] In the organic EL display device of the sixth embodiment, the dimmer switch portion **34** is disposed on the external drive circuit board, and switches driving currents flowing in all of the organic EL elements **16** in each vertical scanning period by control of the switch control signal SC, as in the first embodiment, to equally control the ratios of the luminous time to the non-luminous time of all the organic EL elements **16**. Therefore, the luminance of the display screen can be adjusted without degrading the white balance. Further, since the controller **32** controls the switching operation of the single dimmer switch portion **34** to determine the ratio of the luminous time to the non-luminous time of all the organic EL elements **16**, the complicated structure such as a correction circuit for correcting a variation amount of a video signal level is not required to maintain the white balance.

[0083] In this case, the arrangement of the DAC **31**, scanning line driver YD and signal line driver XD has no relation with respect to the configuration having the dimmer switch portion **34** formed on the board of the external drive circuit **30**, thus the configuration is applicable to the fifth embodiment.

[0084] **FIG. 16** shows the configuration of an organic EL display device according to a seventh embodiment of the

present invention. The organic EL display device is similar to the organic EL display device of the fifth embodiment except that a photosensitive element **35** and correction circuit **36** are further formed on an insulating substrate **GL** of an organic EL panel **10** in order to control a dimmer switch portion **34**. The organic EL display device is of an upper-surface luminescent type in which light is emitted from the organic EL element to the exterior on the upper-surface side of the insulating substrate **GL**. In **FIG. 16**, portions which are similar to those of **FIG. 12** are denoted by the same reference symbols and the explanation thereof is omitted.

[0085] The photosensitive element **35** receives light applied to the organic EL panel **10** from the exterior. The correction circuit **36** corrects a switch control signal **SC** from a controller **32** based on an output signal of the photosensitive element **35**, so that the dimmer switch portion **34** is controlled according to the switch control signal **SC** obtained as the result of correction.

[0086] In the organic EL display device of the seventh embodiment, it is possible to prevent a display image from becoming difficult to observe due to the illumination of the service environment of the organic EL panel **10** when the luminance level of the display screen is determined based on the dimmer signal.

[0087] In the above example, the correction circuit **36** can be configured to correct the switch control signal **SC** based on a desired signal supplied from a selection circuit which is operated by a user or an external computer, instead of a signal from the photosensitive element **35** which receives light applied to the organic EL panel **10** from the exterior.

[0088] **FIG. 17** shows the configuration of an organic EL display device according to an eighth embodiment of the present invention. The organic EL display device is similar to the organic EL display device of the sixth embodiment except that a photosensitive element **35** is formed as part of the external drive circuit **30**. In **FIG. 17**, portions which are similar to those of **FIG. 12** are denoted by the same reference symbols and the explanation thereof is omitted.

[0089] The photosensitive element **35** receives light applied to the organic EL panel **10** from the exterior. The correction circuit **36** corrects a switch control signal **SC** from a controller **32** based on an output signal of the photosensitive element **35**, so that the dimmer switch portion **34** is controlled according to the switch control signal **SC** obtained as the result of correction.

[0090] In the organic EL display device of the eighth embodiment, it is possible to prevent a display image from becoming difficult to observe due to the illumination of the service environment of the organic EL panel **10** when the luminance of the display screen is determined based on the dimmer signal.

[0091] In the above embodiment, the dimmer switch portion **34** performs the control operation of setting all of the organic EL elements **16** in one of the luminous and non-luminous states. If a node on the display pixel **PX** side forming the power line **VDD** on the insulating substrate **GL** is connected to a node on the DC/DC converter **33** side via the dimmer switch portion **34**, driving currents are supplied to the organic EL elements **16** to set them in the luminous state. On the other hand, if the node on the display pixel **PX**

side is connected to the power line **VSS** via the dimmer switch portion **34**, supply of driving currents is interrupted to set the organic EL elements **16** in the non-luminous state. The dimmer switch portion **34** is not limited to the above configuration and it can be so configured as to connect the node on the display pixel **PX** side to a second pixel power-supply voltage line which is provided to supply a minute current so as to maintain the organic EL elements **16** in the non-luminous state, for example.

[0092] **FIG. 18** schematically shows the configuration of an organic EL display device according to a ninth embodiment of the present invention. The organic EL display device is similar to the organic EL display device of the first embodiment except that the external drive circuit **30** is modified to digitally adjust the luminance of the display screen. Further, a plurality of dimmer transistors **39** are formed instead of the dimmer switch portion **34** in the display region. In **FIG. 18**, portions which are similar to those of **FIG. 12** are denoted by the same reference symbols and the explanation thereof is omitted. Further, the organic EL display device includes a DAC **31**, DC/DC converter **33**, scanning line driver **YD**, signal line driver **XD** which are the same as those of **FIG. 12** although they are not shown in **FIG. 18** for simplicity of the drawing.

[0093] In the organic EL display device, the external drive circuit **30** further includes a luminance selection section **37** and level-shift circuit **38**. A controller **32** and the level-shift circuit **38** are formed as an integrated circuit. The level-shift circuit **38** is used to convert the level of a switch control signal **SC** obtained from the controller **32** to a gate voltage which is required for the switching operation of the dimmer transistors **39**. The luminance selection section **37** includes manual switches **SW1** to **SW3** which are each connected to the power line **VSS** at one end and respectively connected to a power line **VC** at the other ends via pull-up resistors **R**. Nodes of the pull-up resistors **R** and manual switches **SW1** to **SW3** are respectively connected to luminance selection terminals **B1** to **B3** of the controller **32**. The manual switches **SW1** to **SW3** are closed when the luminance selection terminals **B1** to **B3** are set to a logic value "0" and opened when the luminance selection terminals **B1** to **B3** are set to a logic value "1". That is, the manual switches **SW1** to **SW3** are controlled by combinations of logic values of "000", "001", "010", "101", "111", "101", "110", "111" to create a switch control signal **SC** which can be used to select one of eight-step luminance levels. The controller **32** receives the combination of the logic values obtained from the luminance selection section **37** as a dimmer signal instead of the dimmer signal from the exterior. Then, it sets one of the eight-step luminance levels selected by the thus received dimmer signal and changes the ratio of the high-level period to the low-level period of the switch control signal **SC** in each vertical scanning period according to the thus set luminance level. When the switch control signal **SC** is received from the controller **32**, it is level-shifted by the level-shift circuit **38** and supplied to the gates of the dimmer transistors **39** of the organic EL panel **10**.

[0094] The plurality of dimmer transistors **39** are provided for the plurality of display pixels **PX** and commonly controlled by the switch control signal **SC** obtained from the controller **32** of the external drive circuit **30**. As shown in **FIG. 19**, each of the dimmer transistors **39** is connected in series with the organic EL element **16** and driving transistor

17 between the paired power lines VDD and VSS. In this example, a pixel switch **15** is formed of an N-channel thin-film transistor, and the driving transistor **17** and dimmer transistors **39** are each formed of a P-channel thin-film transistor. In this case, the dimmer transistors **39** are set into the ON state to cause all of the organic EL elements **16** to emit light when the switch control signal SC is an ON signal (low level), and set into the OFF state to interrupt light emission of all of the organic EL elements **16** when the switch control signal SC is an OFF signal (high level). The controller **32** determines a luminance level based on the dimmer signal supplied from the exterior to change the ratio of the high-level period to the low-level period of the switch control signal SC in each vertical scanning period according to the thus set luminance level. The dimmer transistors **39** switch driving currents flowing in all of the respective organic EL elements **16** under control of the switch control signal SC to equally control the ratios of the luminous time to the non-luminous time of the organic EL elements **16** and adjust the luminance of the screen.

[0095] Next, the operation of each display pixel PX is explained in detail. FIG. 20 shows the luminance characteristic of the organic EL element **16** together with the operating characteristic of the driving transistor **17**. In FIG. 20, the operating characteristic of the driving transistor **17** is shown with the drain-source voltage V_{ds} of the driving transistor **17** used as a parameter and it is understood that the drain-source current I_{ds} of the driving transistor **17** varies depending on the gate-source voltage V_{gs} of the driving transistor **17**. In this case, the drain-source voltage V_{ds} of the driving transistor **17** depends on video signal voltage and the drain-source current I_{ds} of the driving transistor **17** is equal to a current I_{eL} of the organic EL element **16**. Therefore, if the dimmer transistor **39** is set in the ON state, the organic EL element **16** emits light with a luminance level corresponding to the current I_{eL} which varies according to the video signal voltage.

[0096] FIG. 21 shows the operation waveforms in the display pixel PX by control of the dimmer transistor **39**. In order to attain 100% of the luminance of the display screen, the switch control signal SC is maintained at the low level to always keep the dimmer transistor **39** in the ON state in a period A, for example. If the pixel switch **15** is turned ON by the potential of a signal line Y which rises at the time of supply of the scanning signal in the period A, for example, the potential of a signal line X corresponding to the video signal of the maximum gradation level is supplied to the gate of the driving transistor **17** via the pixel switch **15**. As a result, the gate-source voltage V_{gs} of the driving transistor **17** is lowered with a rise of the gate voltage. During this time period, a driving current flows through the driving transistor **17**, dimmer transistor **39** and organic EL element **16** between the power lines VDD and VSS and increases to the maximum level so as to cause the organic EL element **16** to emit light at a luminance level which sets the luminance of the display screen to 100%. Since the gate voltage of the driving transistor **17** is held by a capacitor **18**, the driving current continuously flows through the organic EL element **16** even after the pixel switch **15** is turned OFF by a fall of the potential of the scanning line Y. That is, the dimmer transistor **39** will not totally interrupt the current I_{eL} flowing in the organic EL element **16** in the period A.

[0097] Further, in order to attain 0% of the luminance of the display screen, the switch control signal SC is maintained at the high level to always keep the dimmer transistor **39** in the OFF state in a period B, for example. Thus, the dimmer transistor **39** totally interrupts the current I_{eL} flowing in the organic EL element **16** in the period B irrespective of the driving transistor **17**.

[0098] Also, in order to attain 50% of the luminance of the display screen, the switch control signal SC is set to have a high-level period and low-level period of the ratio which is set to 1:1 to uniformly perform the operation of setting the dimmer transistor **39** in the ON state and the operation of setting the dimmer transistor **39** in the OFF state in a period C, for example. Thus, the dimmer transistor **39** interrupts the current I_{eL} flowing in the organic EL element **16** for a period which is half a period obtained as the sum of the high-level period and low-level period in the period C.

[0099] FIGS. 22A to 22C show the effective luminance level of the organic EL element **16** which is obtained according to the switch control signal SC used to determine the ratio of the ON period to the OFF period of the dimmer transistor **39**. As shown in FIG. 22A, when the switch control signal SC is maintained at the high level which causes the dimmer transistor **39** to be kept in the ON state, the organic EL element **16** always emits light at a luminance level corresponding to the current I_{eL} determined by the driving transistor **17**. The luminance level is used as a reference level to adjust the luminance of the display screen.

[0100] As shown in FIG. 22B, when the switch control signal SC is alternately set at the high and low levels so as to set the ratio of the ON time to the OFF time of the dimmer transistor **39** to 3:1, the organic EL element **16** intermittently emits light at a luminance level corresponding to the current I_{eL} determined by the driving transistor **17**. At this time, the ratio of the luminous time to the non-luminous time of the organic EL element **16** is set to 3:1 according to the switch control signal SC. However, since the sense of vision of an observer has an afterimage effect, it is observed as if the organic EL element **16** always emits light at a luminance level corresponding to 75% of the reference level according to the above time ratio. That is, the luminance of the display screen can be adjusted to 75% by commonly controlling the ratio of the ON period to the OFF period of all of the organic EL elements **16** according to the switch control signal SC as described above.

[0101] Further, as shown in FIG. 22C, when the switch control signal SC is alternately set at the high and low levels so as to set the ratio of the ON time to the OFF time of the dimmer transistor **39** to 1:1, the organic EL element **16** intermittently emits light at a luminance level corresponding to the current I_{eL} determined by the driving transistor **17**. At this time, the ratio of the luminous time to the non-luminous time of the organic EL element **16** is set to 1:1 according to the switch control signal SC. However, since the sense of vision of an observer has the afterimage effect, it is observed like the case of FIG. 22B as if the organic EL element **16** always emits light at a luminance level corresponding to 50% of the reference level according to the above time ratio. That is, the luminance of the display screen can be adjusted to 50% by commonly controlling the ratio of the ON period to the OFF period of all of the organic EL elements **16** according to the switch control signal SC.

[0102] In the ninth embodiment described above, the luminance of the display screen can be adjusted to a desired one of the eight-step levels by use of three or a relatively small number of manual switches.

[0103] FIG. 23 schematically shows the configuration of an organic EL display device according to a tenth embodiment of the present invention. The organic EL display device is similar to the organic EL display device of the fifth embodiment except that the external drive circuit 30 is modified to adjust the luminance of the display screen in an analog fashion. In FIG. 23, portions which are similar to those of FIG. 12 are denoted by the same reference symbols and the explanation thereof is omitted. Further, the organic EL display device includes a DAC 31, DC/DC converter 33, scanning line driver YD, signal line driver XD which are the same as those of FIG. 12 although they are not shown in FIG. 23 for simplicity of the drawing.

[0104] In the organic EL display device, the external drive circuit 30 further includes a level-shift circuit 38, luminance selection section 41, sawtooth waveform generator 43 and comparator 42. Like the ninth embodiment, a controller 32 and the level-shift circuit 38 are formed as an integrated circuit. The level-shift circuit 38 is used to convert the level of a switch control signal SC obtained from the controller 32 to a gate voltage which is required for the switching operation of dimmer transistors 39. The luminance selection section 41 has fixed resistors R1, R2 and a variable resistor VM to configure a voltage dividing circuit which divides power-supply voltage VCR. The variable resistor VM is connected to a power line VC at one end via the fixed resistor R1 and connected to a power line VSS at the other end via the resistor R2 and an intermediate tap of the variable resistor VM is connected to the reference input terminal of the comparator 42. The comparison input terminal of the comparator 42 is connected to the sawtooth waveform generator 43 which generates sawtooth voltage Vsaw. The sawtooth waveform generator 43 generates sawtooth voltage Vsaw in synchronism with at least one of a vertical scanning control signal and horizontal scanning control signal generated by the controller 32. In this case, the period of the sawtooth voltage Vsaw is shorter than the vertical scanning period. The comparator 42 compares the sawtooth voltage Vsaw generated from the sawtooth waveform generator 43 with divided voltage obtained from the intermediate tap of the variable resistor VM as comparison reference voltage Vref to generate a switch control signal SC. The switch control signal SC is set at the low level when $V_{ref} > V_{saw}$ and set at the high level when $V_{ref} < V_{saw}$.

[0105] For example, as shown in FIG. 24A, if the reference voltage Vref is set at the relatively high level, the high-level period becomes shorter than the low-level period in the switch control signal SC. On the other hand, for example, as shown in FIG. 24B, if the reference voltage Vref is set at the intermediate level, the high-level period becomes approximately equal to the low-level period in the switch control signal SC. The switch control signal SC is level-shifted by the level-shift circuit 38 and supplied to the gates of the dimmer transistors 39 of the organic EL panel 10.

[0106] In the tenth embodiment, the ratio of the high-level period to the low-level period of the switch control signal SC can be changed by continuously changing the reference

voltage Vref by the manual operation of the variable resistor VM. Therefore, the luminance of the display screen can be continuously adjusted.

[0107] FIG. 25 schematically shows the configuration of an organic EL display device according to an eleventh embodiment of the present invention. The organic EL display device is similar to the organic EL display device of the ninth embodiment except that the organic EL panel 10 is modified so that a plurality of dimmer transistors 39 will be driven for each row. In FIG. 25, portions which are similar to those of FIG. 18 are denoted by the same reference symbols and the explanation thereof is omitted. Further, the organic EL display device includes a DAC 31, DC/DC converter 33, scanning line driver YD, signal line driver XD which are the same as those of FIG. 12 although they are not shown in FIG. 25 for simplicity of the drawing.

[0108] In the organic EL display device, the organic EL panel 10 further includes a plurality of registers RG cascade-connected to configure a shift register 45 which shifts a switch control signal SC supplied from a controller 32 via a level-shift circuit 38. For example, the controller 32 is so configured as to change the level of the switch control signal SC at a timing synchronized with the horizontal scanning period. When the ratio of the high-level period to the low-level period of the switch control signal SC is set to 3:1, the controller 32 continuously sets the switch control signal SC at the high level for a period corresponding to three horizontal scanning periods and continuously sets the switch control signal SC at the low level for one horizontal scanning period following the above period. The shift register 45 shifts the switch control signal SC for each horizontal scanning period by control of the horizontal scanning control signal from the controller 32 and respectively supplies switch control signals SC from the registers RG to the dimmer transistors 39 of the corresponding rows.

[0109] In the above eleventh embodiment described above, since all of the dimmer transistors 39 are not simultaneously turned ON, a temporary increase in the power consumption can be prevented and the power supply ability of the DC/DC converter 33 can be lowered.

[0110] FIG. 26 shows a first modification of the display pixel PX shown in FIG. 19. In the first modification, the dimmer transistor 39 is connected between the power line VDD and the driving transistor 17. With this configuration, the dimmer transistor 39 switches a driving current flowing in the organic EL element 16 by control of the switch control signal SC so as to control the ratio of the luminous time to the non-luminous time of the organic EL element 16.

[0111] FIG. 27 shows a second modification of the display pixel PX shown in FIG. 19. In the second modification, the dimmer transistor 39 is connected between the power line VDD and the driving transistor 17 and a dimmer transistor 46 is connected between the driving transistor 17 and the anode of the organic EL element 16. The dimmer transistor 39 switches a driving current flowing in the organic EL element 16 by control of the switch control signal SC and the dimmer transistor 46 switches a driving current flowing in the organic EL element 16 by control of a subsidiary switch control signal SC'. With this configuration, the ratio of the luminous time to the non-luminous time of the organic EL element 16 controlled by the switch control signal SC can be further controlled by use of the subsidiary switch control

signal SC'. Thus, the dimmer transistor 46 can be controlled by the subsidiary switch control signal SC' so as to reflect the illumination of the service environment on the luminance of the display screen.

[0112] This invention is not limited to the above embodiments and can be variously modified without departing from the technical scope thereof. For example, a plurality of organic EL elements 16 can be replaced by other luminous elements such as self-luminous LEDs. Further, the present invention uses the dimmer switch portion 34 or dimmer transistors 39, 46 to maintain the relation between the white balances of the display pixels having different luminescent colors, but the configuration is also applicable to a case where the luminescent colors of the display pixels are the same.

[0113] In the above embodiments, a case wherein the DAC is formed on the external drive circuit board or formed in the TCP form as the driver IC is explained. However, it can be integrated on the insulating substrate on which the pixel transistors are formed and it can be formed in the same process of forming the pixel transistors and driving transistors.

[0114] Further, in the above embodiments, a case wherein the driving current amount is controlled based on the video signal to attain multi-gradation display is explained, but this is not limitative. For example, the present invention is applicable to a case of a pulse width modulation drive system in which a driving current flowing in the organic EL element is kept constant and time of supply of the driving current is controlled to perform gradation display. In the case of the pulse width modulation drive system, the ratio in the switch control signal is set so that the luminance can be adjusted at the time of minimum pulse width.

[0115] Additional advantages and modifications will readily occur to those skilled in the art. Therefore, the invention in its broader aspects is not limited to the specific details and representative embodiments shown and described herein. Accordingly, various modifications may be made without departing from the spirit or scope of the general inventive concept as defined by the appended claims and their equivalents.

What is claimed is:

1. A self-luminous display device comprising:

- a plurality of display pixels forming a display screen;
- a plurality of scanning lines disposed along rows of said display pixels;
- a plurality of signal lines disposed along columns of said display pixels; and
- a power-supply section which supplies a power-supply voltage to said display pixels; each of said display pixels including a luminous element, a pixel switch which receives a video signal from a corresponding signal lines in response to a scanning signal from a corresponding scanning line and a driving element which is connected between said luminous element and said power supply section to supply a driving current corresponding to the video signal from said pixel switch to the luminous element, and each luminous element being connected to said power supply section via a dimmer switch portion.

2. The self-luminous display device according to claim 1, wherein said dimmer switch portion includes at least one switch element provided outside said display screen and a control circuit which controls ON time of said switch element.

3. The self-luminous display device according to claim 1, wherein said dimmer switch portion includes a plurality of switch elements respectively provided in said display pixels and a control circuit which controls ON times of said switch elements.

4. The self-luminous display device according to claim 1, wherein said dimmer switch portion includes a plurality of switch elements each assigned to a preset number of display pixels arranged in one direction in the display screen and a control circuit which controls ON times of said switch elements.

5. The self-luminous display device according to claim 1, wherein said dimmer switch portion includes a plurality of switch elements respectively assigned to the display pixels of plural blocks by which the display screen is divided and a control circuit which controls ON times of said switch elements.

6. The self-luminous display device according to any one of claims 1 to 5, wherein said control circuit is configured to refer to an external signal.

7. A self-luminous display device comprising:

- a plurality of display pixels forming a display screen;
- a plurality of scanning lines disposed along rows of said display pixels;
- a plurality of signal lines disposed along columns of said display pixels; and
- a power supply section which supplies a power-supply voltage to said display pixels; each of said display pixels including a luminous element, a pixel switch which receives a video signal from a corresponding one of said signal lines in response to a scanning signal from a corresponding one of said scanning lines, a static memory section which holds the video signal received by the pixel switch and a driving element which is connected between the luminous element and said power supply section to supply a driving current corresponding to the video signal from said pixel switch and static memory section to said luminous element, and each luminous element being connected to said power supply section via a dimmer switch portion.

8. A self-luminous display device comprising:

- a plurality of luminous elements forming a display screen;
- a driving signal supply section which supplies driving signals to said luminous elements; and
- a luminance adjusting section which equally changes the ratios of luminous time to non-luminous time of said luminous elements by switching the driving signals from said driving signal supply section to adjust luminance of the display screen.

9. The self-luminous display device according to claim 8, wherein said driving signal supply section includes a plurality of element driving sections which respectively change the driving signals of said plurality of luminous elements according to a video signal, and said luminance adjusting section includes a dimmer switch portion which switches the

driving signal at least once in an updating period of the video signal to adjust the luminance of the display screen.

10. The self-luminous display device according to claim 9, wherein said luminous elements are formed together with said element driving sections on a single panel, and each of said element driving sections includes a driving transistor which is connected in series with a corresponding one of said luminous elements between paired power lines and causes a driving signal corresponding to the gate voltage thereof to flow through the corresponding luminous element, a pixel switch which applies a voltage of the video signal to the driving transistor as the gate voltage thereof, and a capacitor which holds the gate voltage of the driving transistor.

11. The self-luminous display device according to claim 10, further comprising an external drive circuit including a power supply circuit which supplies a power-supply voltage to the paired power lines and a switch control signal generator which generates a switch control signal used to determine ratios of luminous time to non-luminous time of said luminous elements.

12. The self-luminous display device according to claim 11, wherein said dimmer switch portion is a single switch inserted between said paired power lines on said panel and is controlled by a switch control signal from said switch control signal generator.

13. The self-luminous display device according to claim 11, wherein said dimmer switch portion is a single switch inserted between said paired power lines in said power supply circuit and is controlled by a switch control signal from said switch control signal generator.

14. The self-luminous display device according to claim 12, further comprising a photosensitive element which receives light applied to said panel from the exterior and a correction circuit which corrects the switch control signal from said switch control signal generator.

15. The self-luminous display device according to claim 12, wherein said switch control signal generator is configured to determine a luminance level based on a dimmer signal supplied from said exterior and change a ratio of a high-level period to a low-level period of the switch control signal according to the luminance level.

16. The self-luminous display device according to claim 15, wherein said switch control signal generator is configured to correct the luminance level determined based on a dimmer signal according to a signal depending on a service environment of said panel.

17. The self-luminous display device according to claim 10, wherein said dimmer switch portion includes a plurality of dimmer transistors which are respectively connected in series with said driving transistors and said luminous elements between said paired power lines on said panel and commonly controlled by a switch control signal.

18. The self-luminous display device according to claim 11, wherein said external drive circuit further includes a luminance selection section which has a plurality of manual switches and generates a luminance control signal which is a combination of logic values corresponding to the operation of the manual switches, and the switch control signal generator is configured to determine a luminance level based on a dimmer signal supplied from said luminance selection section and set a ratio of a high-level period to a low-level period of the switch control signal according to the luminance level.

19. The self-luminous display device according to claim 11, wherein said switch control signal generator includes a luminance selection section which generates a reference voltage varied by use of a variable resistor, a sawtooth waveform generating circuit which generates a sawtooth voltage, and a comparator which compares the sawtooth voltage generated from said sawtooth waveform generating circuit with the reference voltage to set a ratio of a high-level period to a low-level period of the switch control signal.

20. The self-luminous display device according to claim 11, wherein said switch control signal generator is configured to change a level of a switch control signal in a preset period shorter than the updating period of the video signal, said panel includes a plurality of registers cascade-connected to form a shift register which shifts the switch control signal from said switch control signal generator in the preset period, and said dimmer switch portion includes a plurality of dimmer switches which are respectively connected in series with said driving transistors and said luminous elements between said paired power lines on said panel and each controlled by a switch control signal from a corresponding one of said registers.

21. The self-luminous display device according to claim 10, wherein said dimmer switch portion includes a plurality of switch elements which are respectively connected between said driving transistors and said luminous elements on said panel.

22. The self-luminous display device according to claim 10, wherein said dimmer switch portion includes a plurality of switch elements which are respectively connected between said driving transistors and one of said power lines on said panel.

23. The self-luminous display device according to claim 10, wherein said dimmer switch portion includes a plurality of first switch elements which are respectively connected between said driving transistors and said luminous elements on said panel and a plurality of second switch elements which are respectively connected between said driving transistors and one of said power lines on said panel.

24. A driving method of a self-luminous display device including a plurality of luminous elements which form a display screen, comprising:

supplying driving signals to said luminous elements; and

adjusting luminance of the display screen by switching the driving signals to equally change ratios of luminous time to non-luminous time of said luminous elements.

25. The driving method according to claim 24, wherein adjusting the luminance of said display screen is performed by switching the driving signal at least once in an updating period of a video signal while respectively changing the driving signals of said luminous elements according to the video signal.

26. A self-luminous display device comprising:

a plurality of signal lines;

a plurality of scanning lines disposed to intersect said signal lines approximately at right angles;

a plurality of pixel switches which are disposed near intersections between said signal lines and said scanning lines and each output a video signal on a corresponding one of said signal lines when driven via a corresponding one of said scanning lines;

a plurality of capacitors which are respectively connected to said plurality of pixel switches and each hold a video signal output from a corresponding one of said pixel switches for a preset period of time;

a plurality of display pixels arrayed in a matrix form and each driven based on a video signal from a corresponding one of said pixel switches, and

a switch portion which equally controls driving times of said display pixels to adjust a whole luminance level, said signal lines, scanning lines, pixel switches, capacitors and display pixels being provided on an insulating substrate.

27. The self-luminous display device according to claim 26, wherein each of said display pixels includes a display element having a luminous layer formed between paired electrodes, and a driving transistor which supplies a driving signal to said display element based on the video signal.

28. The self-luminous display device according to claim 27, wherein said display element is an organic EL display pixel in which the luminous layer is formed of an organic EL layer.

29. The self-luminous display device according to claim 27, wherein the display element is configured to emit light in a supply period of the driving signal controlled by said switch portion.

30. The self-luminous display device according to claim 26, wherein said switch portion includes a plurality of driving transistors having the same multi-layered structure as said pixel switches and formed together with said pixel switches on said insulating substrate.

31. The self-luminous display device according to claim 26, further comprising a signal line driver which drives said signal lines and a scanning line driver which drives said scanning lines, wherein said signal line driver and scanning line driver are formed together on said insulating substrate.

32. The self-luminous display device according to claim 26, wherein said switch portion is disposed outside a display region including a matrix of said display pixels on said insulating substrate.

33. The self-luminous display device according to claim 26, wherein said switch portion includes a plurality of driving transistors separately incorporated into said display pixels.

34. The self-luminous display device according to claim 33, wherein said driving transistors are configured to control driving time for each row unit of said display pixels.

35. A self-luminous display device comprising:

a plurality of signal lines;

a plurality of scanning lines disposed to intersect said signal lines approximately at right angles;

a plurality of pixel switches which are disposed near intersections between said signal lines and said scanning lines and each output a video signal on a corresponding one of said signal lines when driven via a corresponding one of said scanning lines;

a plurality of capacitors which are respectively connected to said pixel switches and each hold a video signal output from a corresponding one of said pixel switches for a preset period of time;

a plurality of display pixels arrayed in a matrix form and each driven based on a video signal from a corresponding one of said pixel switches; and

a switch portion which equally controls driving currents of said display pixels to adjust a total luminance level; said signal lines, scanning lines, pixel switches, capacitors and display pixels being provided on an insulating substrate.

* * * * *

专利名称(译)	自发光显示装置		
公开(公告)号	US20030063078A1	公开(公告)日	2003-04-03
申请号	US10/259478	申请日	2002-09-30
[标]申请(专利权)人(译)	HANARI JUN MAMETSUKA KOJI 渡边MANABU		
申请(专利权)人(译)	HANARI JUN MAMETSUKA KOJI 渡边MANABU		
当前申请(专利权)人(译)	日本展示CENTRAL INC.		
[标]发明人	HANARI JUN MAMETSUKA KOJI WATANABE MANABU		
发明人	HANARI, JUN MAMETSUKA, KOJI WATANABE, MANABU		
IPC分类号	G09G3/30 G09G3/20 G09G3/22 G09G3/32 G09G5/00		
CPC分类号	G09G3/2081 G09G3/22 G09G3/3233 G09G2300/0417 G09G2300/0842 G09G2300/0857 G09G2340/0428 G09G2300/0866 G09G2310/0221 G09G2320/0606 G09G2320/0626 G09G2320/10 G09G2330/02 G09G2300/0861		
优先权	2001304723 2001-09-28 JP 2001375002 2001-09-29 JP		
其他公开文献	US7123220		
外部链接	Espacenet USPTO		

摘要(译)

有机EL显示装置包括形成显示屏的显示像素，沿显示像素的行设置的扫描线，沿显示像素的列设置的信号线，以及向显示像素提供电源电压的电源部分。每个显示像素包括发光元件，响应于来自相应扫描线的扫描信号从相应的一条信号线接收视频信号的像素开关和连接在发光元件和发光元件之间的驱动元件。电源部分提供对应于从像素开关到发光元件的视频信号的驱动电流。特别地，每个发光元件通过调光器开关部分连接到电源部分。

