



US008593379B2

(12) **United States Patent**
Knapp et al.

(10) **Patent No.:** **US 8,593,379 B2**
(45) **Date of Patent:** **Nov. 26, 2013**

(54) **SYSTEM AND METHOD FOR DETERMINING AN OVERALL BRIGHTNESS LEVEL OF AN IMAGE TO BE DISPLAYED IN A FRAME PERIOD IN ELECTROLUMINESCENT DISPLAY DEVICES**

(58) **Field of Classification Search**
USPC 345/76-77, 82, 83, 690
See application file for complete search history.

(75) Inventors: **Alan G. Knapp**, Crawley (GB); **David A. Fish**, Haywards Heath (GB); **Jurgen J. L. Hoppenbrouwers**, Eindhoven (NL); **Roel Van Woudenberg**, Eindhoven (NL); **Nijs C. Van Der Vaart**, Rosmalen (NL)

(56) **References Cited**
U.S. PATENT DOCUMENTS
6,191,534 B1 2/2001 Schuler et al.
6,229,506 B1 * 5/2001 Dawson et al. 345/82
6,462,735 B2 10/2002 Naito
6,518,962 B2 2/2003 Kimura et al.
6,582,980 B2 6/2003 Feldman et al.
6,593,934 B1 7/2003 Liaw et al.

(73) Assignee: **Koninklijke Philips N.V.**, Eindhoven (NL)

(Continued)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 156 days.

FOREIGN PATENT DOCUMENTS
EP 0717446 A2 12/1995
EP 0923067 A1 3/1998

(Continued)

(21) Appl. No.: **12/907,463**

Primary Examiner — Alison Walthall

(22) Filed: **Oct. 19, 2010**

(65) **Prior Publication Data**
US 2011/0043548 A1 Feb. 24, 2011

(57) **ABSTRACT**

Related U.S. Application Data

(62) Division of application No. 10/526,864, filed as application No. PCT/IB03/03803 on Aug. 22, 2003, now Pat. No. 7,839,365.

In an active matrix electroluminescent display device, comprising an array of display pixels, each pixel comprises an electroluminescent display element, active matrix circuitry including at least one drive transistor for driving a current through the display element, means for determining an overall brightness level of an image to be displayed in a frame period, means for controlling the at least one drive transistor of each pixel in dependence on, (1) a respective input signal providing a drive level for the pixel, and (2) the overall brightness level. The novel arrangement is capable of controlling the pixels to limit the maximum currents drawn by the pixels, thereby limiting cross-talk effects resulting from voltage drops along row or column conductors. If an image is bright, the pixel drive levels across the image, or at least part of the image, can be reduced, so that the maximum brightness is reduced.


(30) **Foreign Application Priority Data**

Sep. 4, 2002 (GB) 0220512.8
Jun. 13, 2003 (GB) 0313656.1

(51) **Int. Cl.**
G09G 3/30 (2006.01)

(52) **U.S. Cl.**
USPC 345/77

10 Claims, 5 Drawing Sheets

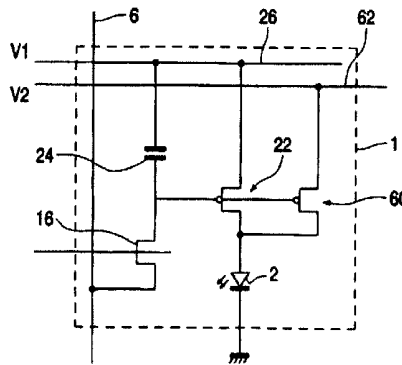

(56)

References Cited

2003/0052841 A1 3/2003 Tanaka et al.

U.S. PATENT DOCUMENTS

FOREIGN PATENT DOCUMENTS

6,603,104 B1* 8/2003 Lee 345/63
7,042,524 B2 5/2006 Onagawa
7,102,632 B2* 9/2006 Siwinski 345/212
2001/0035850 A1* 11/2001 Okamoto et al. 345/77
2002/0036716 A1 3/2002 Ito et al.
2002/0180680 A1 12/2002 Moon
2003/0016189 A1 1/2003 Abe et al.
2003/0025718 A1 2/2003 Mori

EP 1071070 A2 1/2001
EP 1314141 A2 10/2002
JP 09222871 A 8/1997
JP 2001305511 A 10/2001
WO 9636959 5/1996
WO 2004023446 A1 3/2004

* cited by examiner

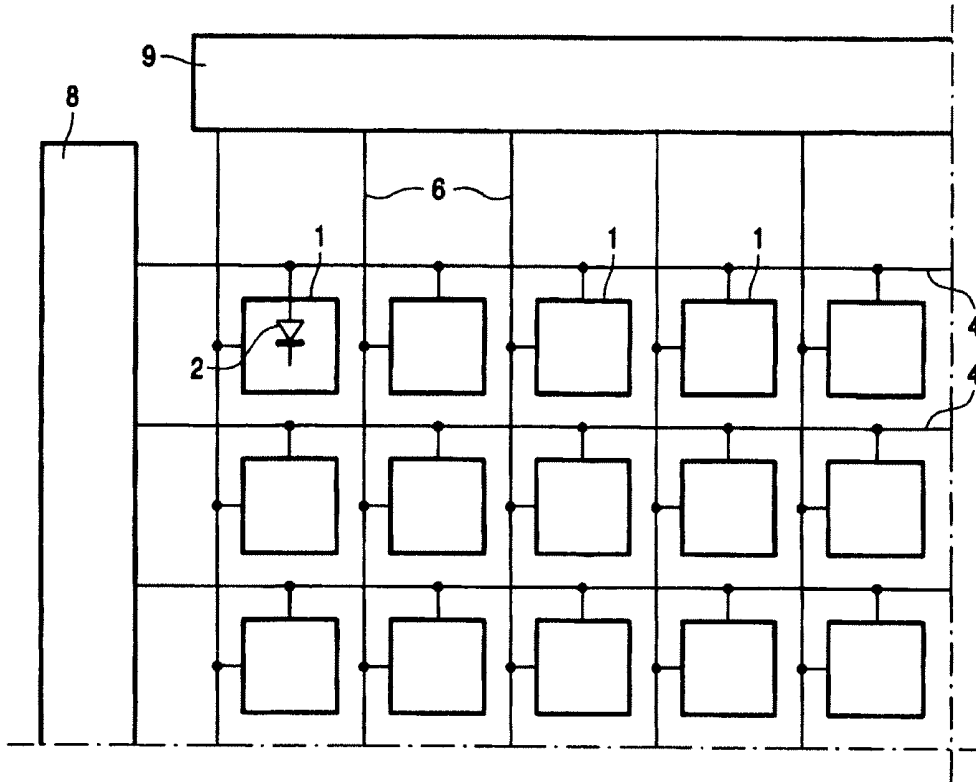


FIG. 1 PRIOR ART

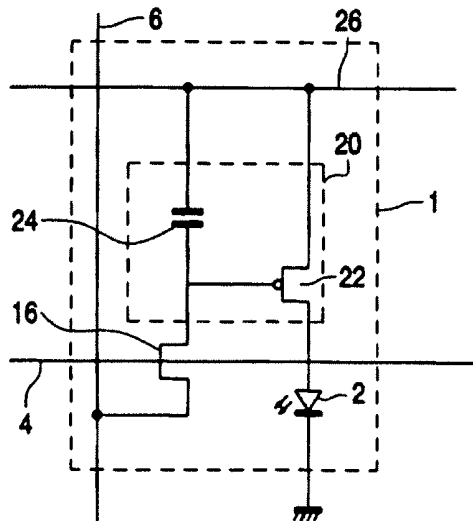


FIG. 2 PRIOR ART

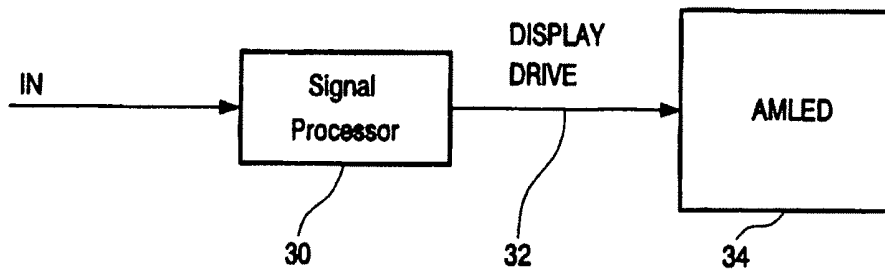


FIG.3

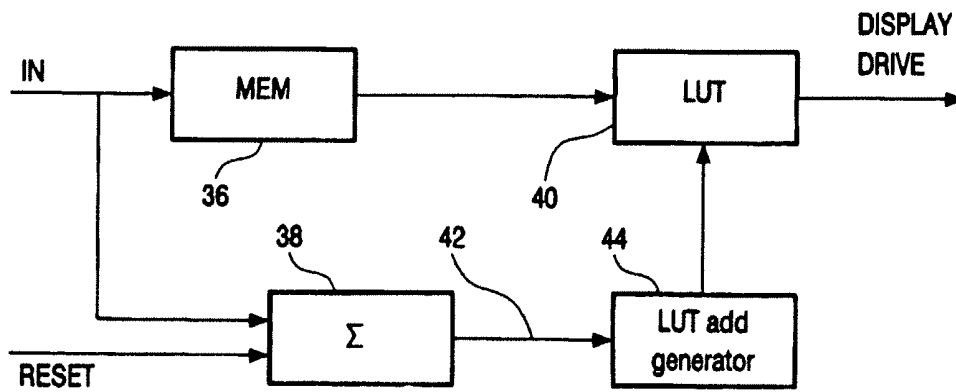


FIG.4

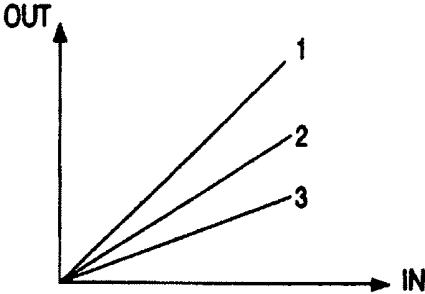


FIG. 5A

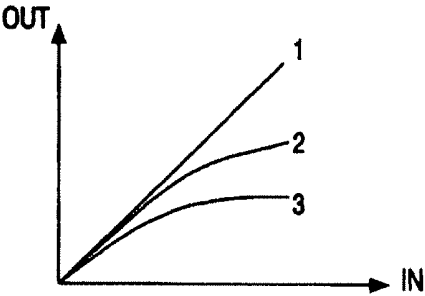


FIG. 5B

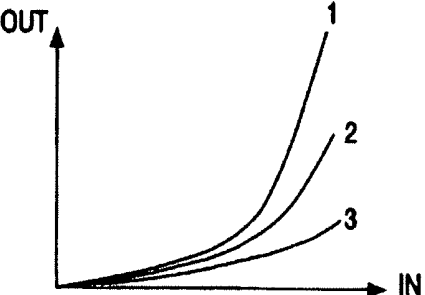


FIG. 5C

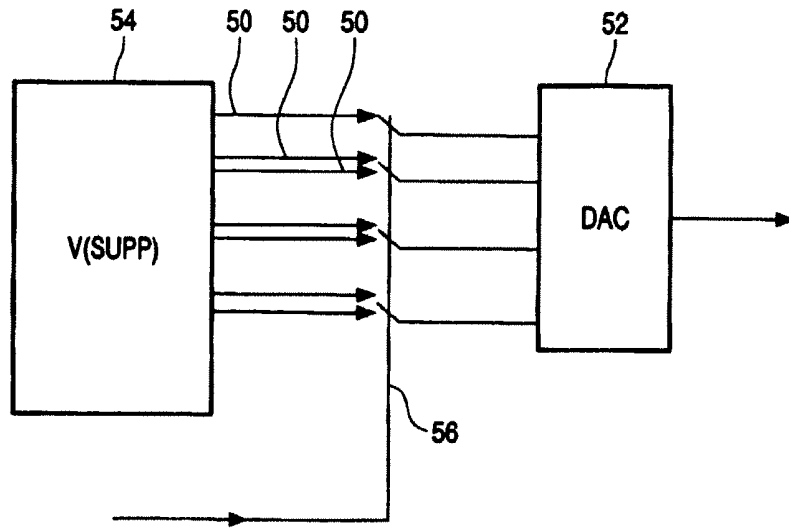


FIG.6

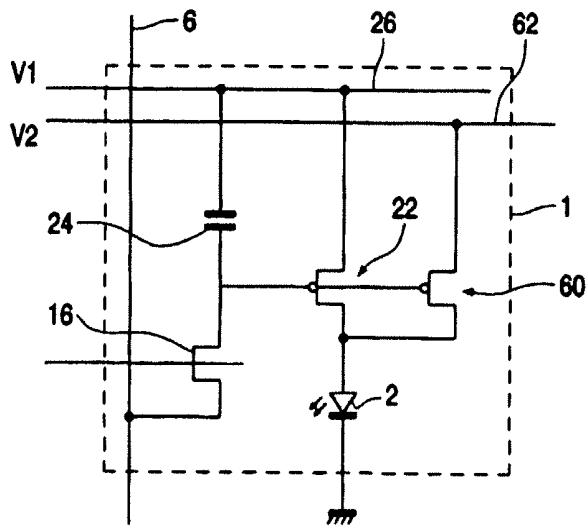


FIG.7

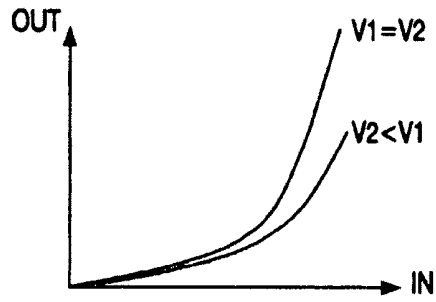


FIG.8

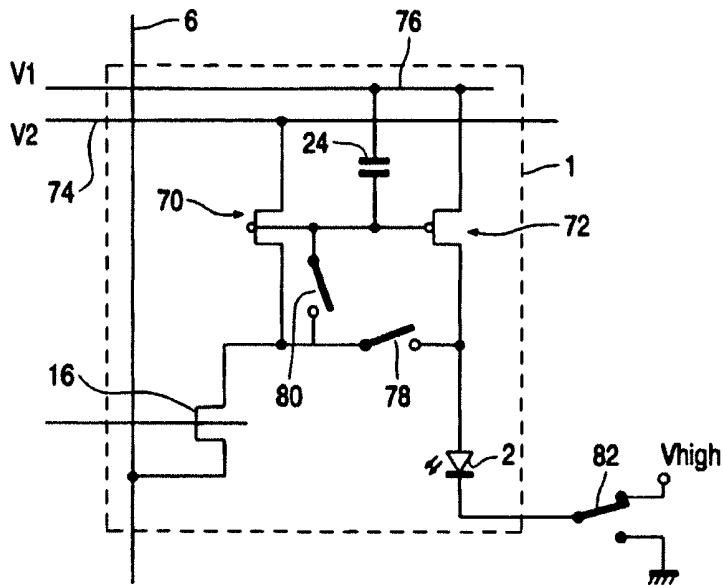


FIG.9

**SYSTEM AND METHOD FOR DETERMINING
AN OVERALL BRIGHTNESS LEVEL OF AN
IMAGE TO BE DISPLAYED IN A FRAME
PERIOD IN ELECTROLUMINESCENT
DISPLAY DEVICES**

This is a divisional of prior application Ser. No. 10/526,864 filed Mar. 4, 2005 and is incorporated by reference herein.

This invention relates to electroluminescent display devices, particularly active matrix display devices having thin film switching transistors associated with each pixel.

Matrix display devices employing electroluminescent, light-emitting, display elements are well known. The display elements may comprise organic thin film electroluminescent elements, for example using polymer materials, or else light emitting diodes (LEDs) using traditional III-V semiconductor compounds. Recent developments in organic electroluminescent materials, particularly polymer materials, have demonstrated their ability to be used practically for video display devices. These materials typically comprise one or more layers of a semiconducting conjugated polymer sandwiched between a pair of electrodes, one of which is transparent and the other of which is of a material suitable for injecting holes or electrons into the polymer layer. The polymer material can be fabricated using a CVD process, or simply by a spin coating technique using a solution of a soluble conjugated polymer. Ink-jet printing may also be used. Organic electroluminescent materials exhibit diode-like I-V properties, so that they are capable of providing both a display function and a switching function, and can therefore be used in passive type displays. Alternatively, these materials may be used for active matrix display devices, with each pixel comprising a display element and a switching device for controlling the current through the display element.

Display devices of this type have current-addressed display elements, so that a conventional, analogue drive scheme involves supplying a controllable current to the display element. It is known to provide a current source transistor as part of the pixel configuration, with the gate voltage supplied to the current source transistor determining the current through the display element. A storage capacitor holds the gate voltage after the addressing phase.

FIG. 1 shows a known pixel circuit for an active matrix addressed electroluminescent display device. The display device comprises a panel having a row and column matrix array of regularly-spaced pixels, denoted by the blocks 1 and comprising electroluminescent display elements 2 together with associated switching means, located at the intersections between crossing sets of row (selection) and column (data) address conductors 4 and 6. Only a few pixels are shown in the Figure for simplicity. In practice there may be several hundred rows and columns of pixels. The pixels 1 are addressed via the sets of row and column address conductors by a peripheral drive circuit comprising a row, scanning, driver circuit 8 and a column, data, driver circuit 9 connected to the ends of the respective sets of conductors.

The electroluminescent display element 2 comprises an organic light emitting diode, represented here as a diode element (LED) and comprising a pair of electrodes between which one or more active layers of organic electroluminescent material is sandwiched. The display elements of the array are carried together with the associated active matrix circuitry on one side of an insulating support. Either the cathodes or the anodes of the display elements are formed of transparent conductive material. The support is of transparent material such as glass and the electrodes of the display elements 2 closest to the substrate may consist of a transparent

conductive material such as ITO so that light generated by the electroluminescent layer is transmitted through these electrodes and the support so as to be visible to a viewer at the other side of the support. Typically, the thickness of the organic electroluminescent material layer is between 100 nm and 200 nm. Typical examples of suitable organic electroluminescent materials which can be used for the elements 2 are known and described in EP-A-0 717446. Conjugated polymer materials as described in WO96/36959 can also be used.

FIG. 2 shows in simplified schematic form a known pixel and drive circuitry arrangement for providing voltage-addressed operation. Each pixel 1 comprises the EL display element 2 and associated driver circuitry. The driver circuitry has an address transistor 16 which is turned on by a row address pulse on the row conductor 4. When the address transistor 16 is turned on, a voltage on the column conductor 6 can pass to the remainder of the pixel. In particular, the address transistor 16 supplies the column conductor voltage to a current source 20, which comprises a drive transistor 22 and a storage capacitor 24. The column voltage is provided to the gate of the drive transistor 22, and the gate is held at this voltage by the storage capacitor 24 even after the row address pulse has ended. The drive transistor 22 draws a current from the power supply line 26.

The drive transistor 22 in this circuit is implemented as a PMOS TFT, so that the storage capacitor 24 holds the gate-source voltage fixed. This results in a fixed source-drain current through the transistor, which therefore provides the desired current source operation of the pixel.

The above basic pixel circuit is a voltage-addressed pixel, and there are also current-addressed pixels which sample a drive current. However, all pixel configurations require current to be supplied to each pixel.

In a conventional pixel configuration, the power supply line 26 is a row conductor, and is typically long and narrow. The displays are typically backward-emitting, through the substrate carrying the active matrix circuitry. This is the preferred arrangement because the desired cathode material of the EL display element is opaque, so that the emission is from the anode side of the EL diode, and furthermore it is not desirable to place this preferred cathode material against the active matrix circuitry. Metal row conductors are formed, and for backward emitting displays they need to occupy the space between display areas, as they are opaque. For example, in a 12.5 cm (diameter) display, which is suitable for portable products, the row conductor may be approximately 11 cm long and 20 μm wide. For a typical metal sheet resistance of 0.2 Ω/square , this gives a line resistance for a metal row conductor of 1.1 k Ω . A bright pixel may draw around 8 μA , and the current drawn is distributed along the row. The voltage drops can be reduced to some extent by drawing current from both ends of the row, and improvements in efficiency of the EL materials can reduce the current drawn. Nevertheless significant voltage drops are still present. This problem is worsened for larger displays, even if the total line resistance can be kept the same. This is because there are more pixels per row, or alternatively larger pixels if the resolution is the same. The voltage variations along the power supply line alter the gate-source voltage on the drive transistors, and thereby affect the brightness of the display, in particular causing dimming in the center of the display (assuming the rows are sourced from both ends). Furthermore, as the currents drawn by the pixels in the row are image-dependent, it is difficult to correct the pixel drive levels by data correction techniques, and the distortion is essentially a cross talk between pixels in different columns.

According to the invention, there is provided an active matrix electroluminescent display device comprising an array of display pixels, each pixel comprising:

- an electroluminescent (EL) display element; and
- active matrix circuitry including at least one drive transistor for driving a current through the display element, wherein the device further comprises:
 - means for determining an overall brightness level of an image to be displayed in a frame period; and
 - means for controlling the at least one drive transistor of each pixel in dependence on a respective input signal providing a drive level for the pixel and in dependence on the overall brightness level.

This arrangement can control the pixels to limit the maximum currents drawn by the pixels, thereby limiting the cross talk effects described above. For example if an image is bright, the pixel drive levels across the image (or at least a part of the image) can be reduced, so that the maximum brightness is reduced. For a dark image, the maximum allowed pixel brightness can be increased. Of course, this is a distortion of the image. However, it has been recognized that a similar effect can be observed in CRT (cathode ray tube) display, where the brightness of an image is a function of the total light output. This in fact provides a realistic image. In particular, the increased brightness for small bright areas (such as reflections of sun from water) provides a realistic appearance. The implementation of this effect in an EL display enables the maximum current along the row conductors to be reduced, such that the voltage drops are not sufficient to cause noticeable non-uniformity or cross talk in the displayed image.

In one arrangement, a signal processing device determines an overall brightness level and processes the input signals for the pixels in dependence on the overall brightness level. This provides processing of the image data and requires no hardware modification. In this case a field store is preferably provided for storing the input signals for an image and the input signals for all pixels of the image in the field store are summed to determine the overall brightness.

A look up table can be used for modifying the input signals for the stored image in dependence on the overall brightness level.

In an embodiment of the invention gamma processing is used to control the peak brightness of the display. The gamma parameter is conventionally used in display or image technology indicating the display linearity in terms of e.g. input signal and output luminance. This may be done by recalculating or selecting a look-up table in dependence of the overall brightness level. As a result, for dark images the maximum allowed pixel brightness can be increased to provide the sparkling effect that is known for a CRT display.

In another arrangement, digital to analogue converter circuitry is used for converting digital inputs into the input signal, and the digital to analogue converter circuitry can then be controllable in dependence on the overall brightness level. In this case, the pixel drive signals are again modified before application to the pixels, but at the D/A conversion stage.

In other arrangements, the pixel configuration is used to provide the image modification.

In a first example, the active matrix circuitry can comprise first and second drive transistors in parallel each connected between a respective power supply line and the EL display element. The first drive transistor is supplied with a first supply voltage and the second drive transistor is supplied with a second supply voltage, with at least one of the supply voltages being variable in dependence on the overall brightness level. This enables the combined current supplied by the two drive transistors to be varied by setting the voltage

of one supply voltage. This pixel arrangement is a modification of a conventional voltage addressed pixel.

The first supply voltage may be fixed and the second supply voltage variable, and the range of variation can include the first and second supply voltages being equal.

In a second example with a current driven pixel, the active matrix circuitry comprises current sampling circuitry for sampling an input drive current, the current sampling circuitry having a current sampling transistor and a drive transistor in parallel each connected to a respective power supply line. Each of the current sampling transistor and the drive transistor can supply current to the display element, and at least one of the supply voltages of the power supply lines is variable in dependence on the overall brightness level. This pixel arrangement is a modification of a conventional current addressed pixel.

The invention also provides a method of addressing an active matrix electroluminescent display device comprising an array of display pixels, in which each pixel comprises an electroluminescent (EL) display element and active matrix circuitry including at least one drive transistor for driving a current through the display element, the method comprising:

- determining an overall brightness level of an image to be displayed in a frame period; and
- controlling the at least one drive transistor of each pixel in dependence on a respective input signal providing a drive level for the pixel and in dependence on the overall brightness level.

The overall brightness may be a measure of the total drive level for all pixels or an average value, and this depends on the specific implementation. This method enables the total current to be kept within limits by reducing the maximum brightness for generally bright images.

Controlling the at least one drive transistor may comprises processing the input signals for the pixels in dependence on the overall brightness level and then applying the processed input signals to the pixels. For example, the input signals may be modified using a look up table, the address of which is selected in dependence on the input signal and the overall brightness level.

If the input signals are in digital form, controlling the at least one drive transistor can comprise controlling the digital to analogue conversion of the digital input signal in dependence on the overall brightness level and then applying the analogue input signals to the pixels.

If the input signal comprises a current, controlling the at least one drive transistor may comprise sampling the input current using a sampling transistor, and supplying the display element with current from the sampling transistor and a drive transistor in parallel, wherein the supply voltage to at least one of the sampling transistor and the drive transistor is varied in dependence on the overall brightness level to vary the total current supplied to the display element.

The invention will now be described by way of example with reference to the accompanying drawings, in which:

FIG. 1 shows a known EL display device;

FIG. 2 is a simplified schematic diagram of a known pixel circuit for current-addressing the EL display pixel using an input drive voltage;

FIG. 3 shows a simplified schematic diagram of a first example of display device of the invention;

FIG. 4 shows in greater detail the implementation of FIG. 3;

FIGS. 5A to 5C show some possible drive schemes which can be implemented with the circuit of FIG. 4;

FIG. 6 shows a simplified schematic diagram of a second example of how to modify a display device in accordance with the invention;

FIG. 7 shows a first example of a modified pixel for a display device of the invention;

FIG. 8 shows possible drive schemes which can be implemented with the pixel circuit of FIG. 7; and

FIG. 9 shows a second example of a modified pixel for a display device of the invention.

It should be noted that these figures are diagrammatic and not drawn to scale. Relative dimensions and proportions of parts of these figures have been shown exaggerated or reduced in size, for the sake of clarity and convenience in the drawings.

The invention provides an active matrix electroluminescent display device in which an overall brightness level of an image to be displayed is determined, and the maximum pixel drive current within the field period corresponding to that image is controlled in dependence on the overall brightness level. In particular, the pixel drive levels for all pixels can be scaled in dependence on the overall brightness.

Limiting the maximum currents drawn by the pixels reduces cross talk. The resulting distortion of the image has been found to improve realism rather than detract from it.

FIG. 3 shows a first way of implementing the invention. The pixel drive signals are provided to signal processor 30 which modifies them in dependence on the combined (integrated) brightness of all pixels in the image. The modified drive signals 32 are used to drive the display 34 in conventional manner. The processor adjusts the pixel drive signals (which may be currents or voltages) so that the peak pixel current and therefore brightness is higher for images where only a small part is very bright than for images where a large part is bright. This provides processing of the image data and requires no hardware modification.

FIG. 4 shows one possible implementation of FIG. 3 in greater detail. A field store 36 is provided for storing the input signals for a complete image, and the input signals for all pixels of the image are summed at the same time in a summing unit 38 to determine the overall brightness of the image. The summing unit thus outputs the combined pixel drive signals for the image stored in the field store 36.

A look up table (LUT) 40 is used for modifying the stored image pixel drive levels in dependence on the overall brightness level at the output of the summing unit 38. In particular, a signal 42 proportional to the sum of the brightness values of the incoming signal over a full field period is passed to a look up table address generator 44, which generates an address of the look up table to which the pixel drive levels of the stored image are applied before being used to drive the display. The look up table 40 essentially comprises two or more tables which are provided with different characteristics, and the selection of which table is used to convert the data is dependent on the brightness input. The field store requires a one frame delay to be implemented.

By processing the pixel drive signals, many different drive schemes can be implemented, either in hardware (with look up tables for example) or in software.

FIG. 5 shows three possible drive schemes. In each of FIGS. 5A to 5C, the graphs show how an input pixel drive level drive is modified to provide the output. The input and output may simply be considered as the original brightness level and the modified brightness level.

In FIG. 5A the three characteristics 1 to 3 are different linear gain values. Plot 1 provides no modification and is used for low brightness images where the maximum brightness can

be tolerated. Plots 2 and 3 decrease the pixel brightness by different ratios, for images which are bright over progressively larger areas.

In FIG. 5B, plots 2 and 3 are non-linear and in FIG. 5C all three plots are non-linear. In each case, plot 1 is for the lowest brightness image and plot 3 is used for the highest brightness image.

The characteristic of FIG. 5C can be used for gamma processing in order to obtain the sparkling effect. This gamma correction is necessary because in current TV systems, the input video signals are processed to be displayed on a CRT display. On such a CRT display, the relation between the input signal and the output luminance L is of the form $L=(\text{input data})^\gamma$, with γ between 2 and 3, resulting in a non-linear shape as in FIG. 5C. If the employed display has a different relation, the input data should be corrected accordingly, which is usually done by means of a Look-Up-Table. This correction mechanism may be adapted to control the maximum brightness of the display pixels via the diagram shown in FIG. 4. The video data is stored in memory (36). The overall brightness level of the image is determined (38) and the gamma correction LUT (40) is altered by a LUT generator (44) to set a certain maximum brightness depending on the overall brightness level. The total relation between input data and displayed luminance should have the shape of FIG. 5C. Images with a low overall brightness level will have a higher maximum output (curve 1) value than images with a high overall brightness level (curve 2 or 3).

FIG. 5 shows three possible scaling values for the image, but of course there may be many more, to a limit where is a continuous change in drive characteristics with brightness level.

In FIG. 4, the image modification is performed with look up tables. Of course, the modification of the pixel drive signals may be under the control of an algorithm or other software implementation. For example, the linear case of FIG. 5A can be implemented simply with a multiplier with a gain control signal (i.e. a control input for the multiplier) being derived from the overall brightness.

In FIG. 4, the analogue drive signals are modified before being used to drive the display. The image data will typically originally be in digital form, and in this case it can be manipulated in software much more readily.

Another alternative is shown in FIG. 6, in which the digital to analogue converter circuitry used for converting the digital image data into the analogue drive signals inputs is modified. The control voltages 50 for the D/A converter 52 are generated by voltage supply circuitry 54. For example, the D/A converter can be a resistor chain, and the input voltages which define the voltages on the resistor chain can be switched (schematically shown at 56) to vary the output range and the way the output voltage varies across the range of digital input words. The control 56 is then dependent on the overall brightness of the image. Again, the pixel drive signals are modified before application to the pixels, but at the D/A conversion stage.

The manipulation of the image data provides the flexibility to implement numerous addition functions. These may optimize the system for particular display types or for particular types of image.

A timing controller can be incorporated which prevents sudden changes in gain from one field to the next. If small steps in gain are implemented, then when a change in overall brightness is detected, it may be desirable to step slowly from the current look up table (or algorithm, or D/A control) to the desired one in stages, so that sudden changes in the image are

avoided. The same rate of change may be applied for increases in gain as for decreases in gain, or they may be different.

The overall brightness may take account more of the certain parts of the image, for example the center of the image. This may be appropriate if connections to the row and column conductors are made all around the display, because the resistance to the edges is much lower for pixels near the display edge so that the currents drawn by these pixels have less effect on the cross talk problem. The "overall brightness" thus may be derived from a portion of the image in the center or else may comprise a weighted measure with parts of the image near the edge contributing less to the summation.

In the examples above, the image data is modified before being applied to a conventional display device in conventional manner. It is also possible for the pixel configuration to be modified to provide the image modification.

FIG. 7 shows an arrangement in which the voltage driven pixel arrangement of FIG. 2 is modified to provide control of the peak brightness in accordance with the invention. All of the circuit element in FIG. 2 are repeated in FIG. 7 with the same reference numbers. FIG. 8 shows the transfer characteristic of the circuit.

The circuit is modified by providing a second drive transistor **60** in parallel with the first drive transistor **22**, and connected between its own respective second power supply line **62** and the EL display element **2**. The first and second drive transistors can thus be supplied with different supply voltages. The power supply line **26** has a fixed voltage **V1** applied to it, but the voltage **V2** applied to the second power line **62** can be varied in dependence on the image content.

If the overall image brightness is low, then the supply voltages are made equal, $V1=V2$, and the transfer characteristic is steep (see the top plot in FIG. 8) because the two drive transistors are in parallel. If the overall brightness increases to a point where problems with excess voltage drops occur in the conductors, then the voltage **V2** is reduced to reduce the gate-source voltage. This means that the second drive transistor **60** is turned off at low values of input drive level (i.e. low gate-source voltages), and depending on the exact value of **V2**, the second drive transistor **60** starts to turn on for higher brightness level, but still operates at a lower current than when $V1=V2$. Thus, the transfer characteristic in FIG. 8 is less steep and the peak brightness is lower, hence the peak currents flowing.

In this arrangement, the combined current supplied by the two drive transistors is varied by setting the voltage of one supply voltage.

The circuits of FIGS. 2 and 7 are only example of voltage driven pixels, and other possibilities will be apparent to those skilled in the art.

FIG. 9 shows a current driven pixel layout modified in accordance with the invention.

The pixel **1** has current sampling circuitry for sampling an input drive current on the column conductor **6**. The current sampling circuitry has a current sampling transistor **70** and a drive transistor **72** in parallel, each connected to a respective power supply line **74**, **76**. The current sampling transistor **70** and the drive transistor **72** can supply current to the display element **2**.

The current to be sampled is supplied to the pixel through an address transistor **16**, and a storage capacitor **24** stores a gate source voltage of the drive transistor **72**, as in the pixel arrangement of FIG. 2.

To address the pixel circuit of FIG. 9, the voltages on the two power supply lines are equal, namely $V1=V2$. The address transistor **16** is turned on, and a first isolating switch

78 isolates the input current from the display element. A second isolating switch **80** is closed to allow charge to flow to the storage capacitor. When the circuit has reached a stable state, the current drawn by the column conductor **6** is sourced by the sampling transistor **70**, and the storage capacitor holds the corresponding gate-source voltage of the sampling transistor. If the two transistors **70**, **72** are matched, this also corresponds to the gate-source voltage of the drive transistor **72** for the same current.

The current mirror can however be asymmetric with the two transistors having different sizes—in this case the pixel itself provides some gain.

All pixels are programmed (i.e. the storage capacitors charged) with $V1=V2$. Furthermore, the cathode of the EL display element **2** is held high by switch **82** to reverse bias all the display elements. Once the average or combined brightness is known, the power level **V2** is reset according to overall brightness.

If the overall brightness is low, then power level **V2** is set just below **V1** so that bright pixels (at least) receive current from both the sampling transistor and the drive transistor. If the overall brightness is high, then power level **V2** is set lower to completely turn off the sampling transistor.

After the value of **V2** is set, the switch **82** switches to earth to turn on the display elements and the isolating switch **78** is closed and switch **70** open, so that both transistors can supply current to the display element **2**.

The pixel transfer characteristic is again modified by selection of **V2**, and the current mirror pixel has the advantage that non-uniformity of transistor characteristics is no longer an issue (as it is with the circuit of FIG. 2). A field store is not required in this case. Instead, an accumulator can sum the drive currents during the programming stage to enable the overall brightness to be evaluated. Thus, the field period is divided into two parts—a pixel programming part when the LEDs are off and an LED driving part where no pixels are programmed. The pixels thus act as the field store. Whilst the pixels are being programmed, hardware in the driver circuitry will be accumulating the data to find a total brightness figure by the time all pixels have been programmed. This allows the level of the second power line to be set and then the LEDs are driven.

The isolating switches are of course implemented as transistors.

Essentially, the invention involves determining an overall brightness level of an image to be displayed in a frame period; and controlling each pixel in dependence on the original pixel drive signal and in dependence on the overall brightness level. As will be apparent from the above, there are numerous ways in which this can be implemented, either in hardware or in software and either in the digital or analogue domain. The invention can be used for voltage or current addressing schemes.

Various modifications will be apparent to those skilled in the art. For example, the circuits above use PMOS drive transistors. There are also NMOS implementations.

The invention claimed is:

1. An active matrix electroluminescent display device comprising an array of display pixels, each pixel comprising:
 - an electroluminescent display element; and
 - active matrix circuitry including at least one drive transistor for driving a current through the display element, wherein the device further comprises:
 - means for determining an integrated brightness level of an image to be displayed by a plurality of pixels in a frame period; and

means for controlling the at least one drive transistor of each pixel, the controlling depending on a respective input signal providing a drive level for the pixel and depending on the integrated brightness level, wherein the active matrix circuitry comprises current sampling circuitry for sampling an input drive current, the current sampling circuitry having a current sampling transistor in parallel with the at least one drive transistor, each of the current sampling transistor and the at least one drive transistor connected to a respective power supply line, the circuitry being arranged such that each of the current sampling transistor and the at least one drive transistor can supply current to the display element, wherein at least one of the supply voltages of the power supply lines is variable in dependence on the integrated brightness level of the image to be displayed in the frame period.

2. A device as claimed in claim 1, wherein the current sampling circuitry is operable in two modes, a first mode in which the same voltage is applied to the two power supply lines and an input drive current is sampled and a second mode in which the voltage on at least one of the power supply lines is selected in dependence on the integrated brightness level.

3. An active matrix electroluminescent display device comprising an array of display pixels, each pixel comprising: an electroluminescent display element; and active matrix circuitry including at least one drive transistor for driving a current through the display element, wherein the device further comprises:

- means for determining an integrated brightness level of an image to be displayed in a frame period; and
- means for controlling the at least one drive transistor of each pixel, the controlling depending on a respective input signal providing a drive level for the pixel and depending on the integrated brightness level,

wherein the integrated brightness level is determined from the drive signals for the display elements of the central pixels of the display, and

wherein the integrated brightness level is the sum of input signals for all of the central pixels of the display, wherein the active matrix circuitry comprises current sampling circuitry for sampling an input drive current, the current sampling circuitry having a current sampling transistor in parallel with the at least one drive transistor, each of the current sampling transistor and the at least one drive transistor connected to a respective power supply line, the circuitry being arranged such that each of the current sampling transistor and the drive transistor can supply current to the display element,

wherein at least one of the supply voltages of the power supply lines is variable in dependence on the integrated brightness level.

4. An active matrix electroluminescent display device comprising an array of display pixels, each pixel comprising: an electroluminescent display element; and active matrix circuitry including at least one drive transistor for driving a current through the display element, wherein the device further comprises:

- means for determining an integrated brightness level of an image to be displayed in a frame period; and
- means for controlling the at least one drive transistor of each pixel, the controlling depending on a respective input signal providing a drive level for the pixel and depending on the integrated brightness level,

wherein the integrated brightness is determined from the drive signals for the display elements of a plurality of the pixels of the display comprising less than all of the pixels of the display; and

wherein the integrated brightness level is the sum of input signals for the less than all of the pixels of the display,

wherein the active matrix circuitry comprises current sampling circuitry for sampling an input drive current, the current sampling circuitry having a current sampling transistor in parallel with the at least one drive transistor, each of the current sampling transistor and the at least one drive transistor connected to a respective power supply line, the circuitry being arranged such that each of the current sampling transistor and the at least one drive transistor can supply current to the display element, wherein at least one of the supply voltages of the power supply lines is variable in dependence on the integrated brightness level.

5. An active matrix electroluminescent display device comprising an array of display pixels, each pixel comprising: an electroluminescent display element; and active matrix circuitry including at least one drive transistor for driving a current through the display element, wherein the device further comprises:

- means for determining an integrated brightness level of an image to be displayed in a frame period; and
- means for controlling the at least one drive transistor of each pixel, the controlling depending on a respective input signal providing a drive level for the pixel and depending on the integrated brightness level,

wherein the integrated brightness is determined from a weighted combination of the drive signals for the display elements of all pixels of the display, and

wherein the integrated brightness level is the weighted sum of input signals for all of the pixels,

wherein the active matrix circuitry comprises current sampling circuitry for sampling an input drive current, the current sampling circuitry having a current sampling transistor in parallel with the at least one drive transistor, each of the current sampling transistor and the at least one drive transistor connected to a respective power supply line, the circuitry being arranged such that each of the current sampling transistor and the at least one drive transistor can supply current to the display element,

wherein at least one of the supply voltages of the power supply lines is variable in dependence on the integrated brightness level.

6. A method of addressing an active matrix electroluminescent display device, the device including an array of display pixels, in which each pixel includes an electroluminescent display element and active matrix circuitry, the circuitry including at least one drive transistor for driving a current through the display element, the method comprising:

- determining an integrated brightness level of an image to be displayed by a plurality of pixels in a frame period; and
- controlling the at least one drive transistor of each pixel in dependence on a respective input signal providing a drive level for the pixel and in dependence on the integrated brightness level, wherein the input signal comprises a current, and wherein controlling the at least one drive transistor comprises sampling the input current using a sampling transistor, and supplying the display element with current from the sampling transistor and the at least one drive transistor in parallel,

wherein a supply voltage to at least one of the sampling transistor and the drive transistor is varied in dependence on the integrated brightness level of the image to be displayed in the frame period to vary the total current supplied to the display element

wherein the integrated brightness level is the sum of input signals for all of the pixels.

7. A method of addressing an active matrix electroluminescent display device, the device including an array of display pixels, in which each pixel includes an electroluminescent display element and active matrix circuitry, the circuitry including at least one drive transistor for driving a current through the display element, the method comprising:

determining an integrated brightness level of an image to be displayed in a frame period; and

controlling the at least one drive transistor of each pixel in dependence on a respective input signal providing a drive level for the pixel and in dependence on the integrated brightness level,

wherein current sampling circuitry is operable in two modes, a first mode in which the same supply voltage is applied to a sampling transistor and the at least one drive transistor and the input drive current is sampled and a second mode in which the supply voltage to at least one of the sampling transistor and the at least one drive transistor is selected in dependence on the integrated brightness level,

wherein the integrated brightness level is the sum the input signals for all of the pixels.

8. A method of addressing an active matrix electroluminescent display device, the device including an array of display pixels, in which each pixel includes an electroluminescent display element and active matrix circuitry, the circuitry including at least one drive transistor for driving a current through the display element, the method comprising:

determining an integrated brightness level of an image to be displayed in a frame period; and

controlling the at least one drive transistor of each pixel in dependence on a respective input signal providing a drive level for the pixel and in dependence on the integrated brightness level,

wherein the integrated brightness is determined from the drive signals for the display elements of the central pixels of the display

wherein the integrated brightness level is the sum of input signals for all of the central pixels of the display

wherein the active matrix circuitry comprises current sampling circuitry for sampling an input drive current, the current sampling circuitry having a current sampling transistor in parallel with the at least one drive transistor, each of the current sampling transistor and the at least one drive transistor connected to a respective power supply line, the circuitry being arranged such that each of the current sampling transistor and the at least one drive transistor can supply current to the display element,

wherein at least one of the supply voltages of the power supply lines is variable in dependence on the integrated brightness level.

9. A method of addressing an active matrix electroluminescent display device, the device including an array of display pixels, in which each pixel includes an electroluminescent

display element and active matrix circuitry, the circuitry including at least one drive transistor for driving a current through the display element, the method comprising:

determining an integrated brightness level of an image to be displayed in a frame period; and

controlling the at least one drive transistor of each pixel in dependence on a respective input signal providing a drive level for the pixel and in dependence on the integrated brightness level,

wherein the integrated brightness is determined from the drive signals for the display elements of a plurality of the pixels of the display comprising less than all of the pixels of the display, and

wherein the integrated brightness level is the sum of input signals for the less than all of the pixels of the display

wherein the active matrix circuitry comprises current sampling circuitry for sampling an input drive current, the current sampling circuitry having a current sampling transistor in parallel with the at least one drive transistor, each of the current sampling transistor and the at least one drive transistor connected to a respective power supply line, the circuitry being arranged such that each of the current sampling transistor and the at least one drive transistor can supply current to the display element,

wherein at least one of the supply voltages of the power supply lines is variable in dependence on the integrated brightness level.

10. A method of addressing an active matrix electroluminescent display device, the device including an array of display pixels, in which each pixel includes an electroluminescent display element and active matrix circuitry, the circuitry including at least one drive transistor for driving a current through the display element, the method comprising:

determining an integrated brightness level of an image to be displayed in a frame period; and

controlling the at least one drive transistor of each pixel in dependence on a respective input signal providing a drive level for the pixel and in dependence on the integrated brightness level,

wherein the integrated brightness is determined from a weighted combination of the drive signals for the display elements of all pixels of the display, and

wherein the integrated brightness level is the weighted sum of input signals for all of the pixels,

wherein the active matrix circuitry comprises current sampling circuitry for sampling an input drive current, the current sampling circuitry having a current sampling transistor in parallel with the at least one drive transistor, each of the current sampling transistor and the at least one drive transistor connected to a respective power supply line, the circuitry being arranged such that each of the current sampling transistor and the at least one drive transistor can supply current to the display element,

wherein at least one of the supply voltages of the power supply lines is variable in dependence on the integrated brightness level.

专利名称(译)	用于确定要在电致发光显示设备中的帧周期中显示的图像的整体亮度等级的系统和方法		
公开(公告)号	US8593379	公开(公告)日	2013-11-26
申请号	US12/907463	申请日	2010-10-19
[标]申请(专利权)人(译)	皇家飞利浦电子股份有限公司		
申请(专利权)人(译)	皇家飞利浦电子N.V.		
当前申请(专利权)人(译)	皇家飞利浦电子N.V.		
[标]发明人	KNAPP ALAN G FISH DAVID A HOPPENBROUWERS JURGEN J L VAN WOUDENBERG ROEL VAN DER VAART NIJS C		
发明人	KNAPP, ALAN G. FISH, DAVID A. HOPPENBROUWERS, JURGEN J. L. VAN WOUDENBERG, ROEL VAN DER VAART, NIJS C.		
IPC分类号	G09G3/30 H01L51/50 G09G3/20 G09G3/32		
CPC分类号	G09G3/3233 G09G3/3241 G09G2300/0809 G09G2300/0842 G09G2300/0866 G09G2310/027 G09G2320/0209 G09G2320/0223 G09G2320/0271 G09G2320/0276 G09G2320/0285 G09G2360/16		
优先权	2002020512 2002-09-04 GB 2003013656 2003-06-13 GB PCT/IB2003/003803 2003-08-22 WO		
其他公开文献	US20110043548A1		
外部链接	Espacenet USPTO		

摘要(译)

在包括显示像素阵列的有源矩阵电致发光显示装置中，每个像素包括电致发光显示元件，包括至少一个用于驱动电流通过显示元件的驱动晶体管的有源矩阵电路，用于确定电流的整体亮度等级的装置。在帧周期中显示的图像，用于根据每个像素控制至少一个驱动晶体管的装置，(1)为像素提供驱动电平的相应输入信号，以及(2)整体亮度电平。该新颖的装置能够控制像素以限制由像素汲取的最大电流，从而限制由沿行或列导体的电压降引起的串扰效应。如果图像是明亮的，则可以减小小图像上的像素驱动电平或至少部分图像，从而降低最大亮度。

