



US 20030003225A1

(19) **United States**

(12) **Patent Application Publication**

Choi et al.

(10) **Pub. No.: US 2003/0003225 A1**

(43) **Pub. Date:**

Jan. 2, 2003

(54) **METHOD OF MAKING ORGANIC
ELECTROLUMINESCENT DISPLAY**

Publication Classification

(76) Inventors: **Do-hyun Choi, Seoul (KR); Kyung-hee Choi, Seoul (KR)**

(51) **Int. Cl.⁷** **B05D 5/12**
(52) **U.S. Cl.** **427/66**

Correspondence Address:

**BIRCH STEWART KOLASCH & BIRCH
PO BOX 747
FALLS CHURCH, VA 22040-0747 (US)**

(57) **ABSTRACT**

(21) Appl. No.: **09/985,142**

Disclosed is a method of fabricating an organic electroluminescent display enabling to improve device characteristics and reliability by performing excimer laser annealing on a passivation layer locally. The present invention includes forming an anode layer, an organic electroluminescent layer, and a cathode layer successively on a transparent substrate, forming a passivation layer on the transparent substrate including the cathode layer, and performing heat treatment on the passivation layer locally.

(22) Filed: **Nov. 1, 2001**

(30) **Foreign Application Priority Data**

Jun. 16, 2001 (KR) 2001-34193
Aug. 16, 2001 (KR) 2001-49414
Sep. 18, 2001 (KR) 2001-57741

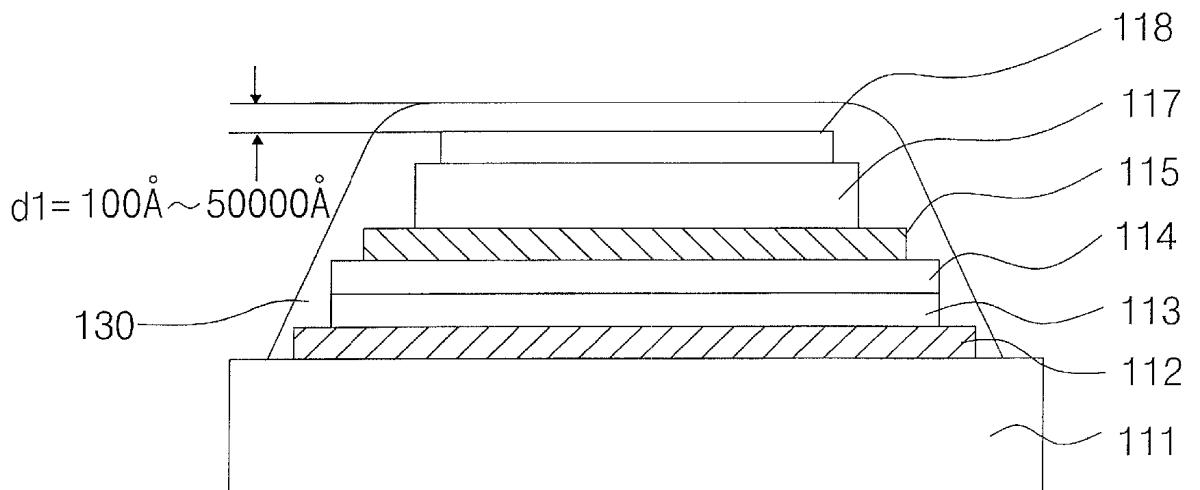


FIG. 1
RELATED ART

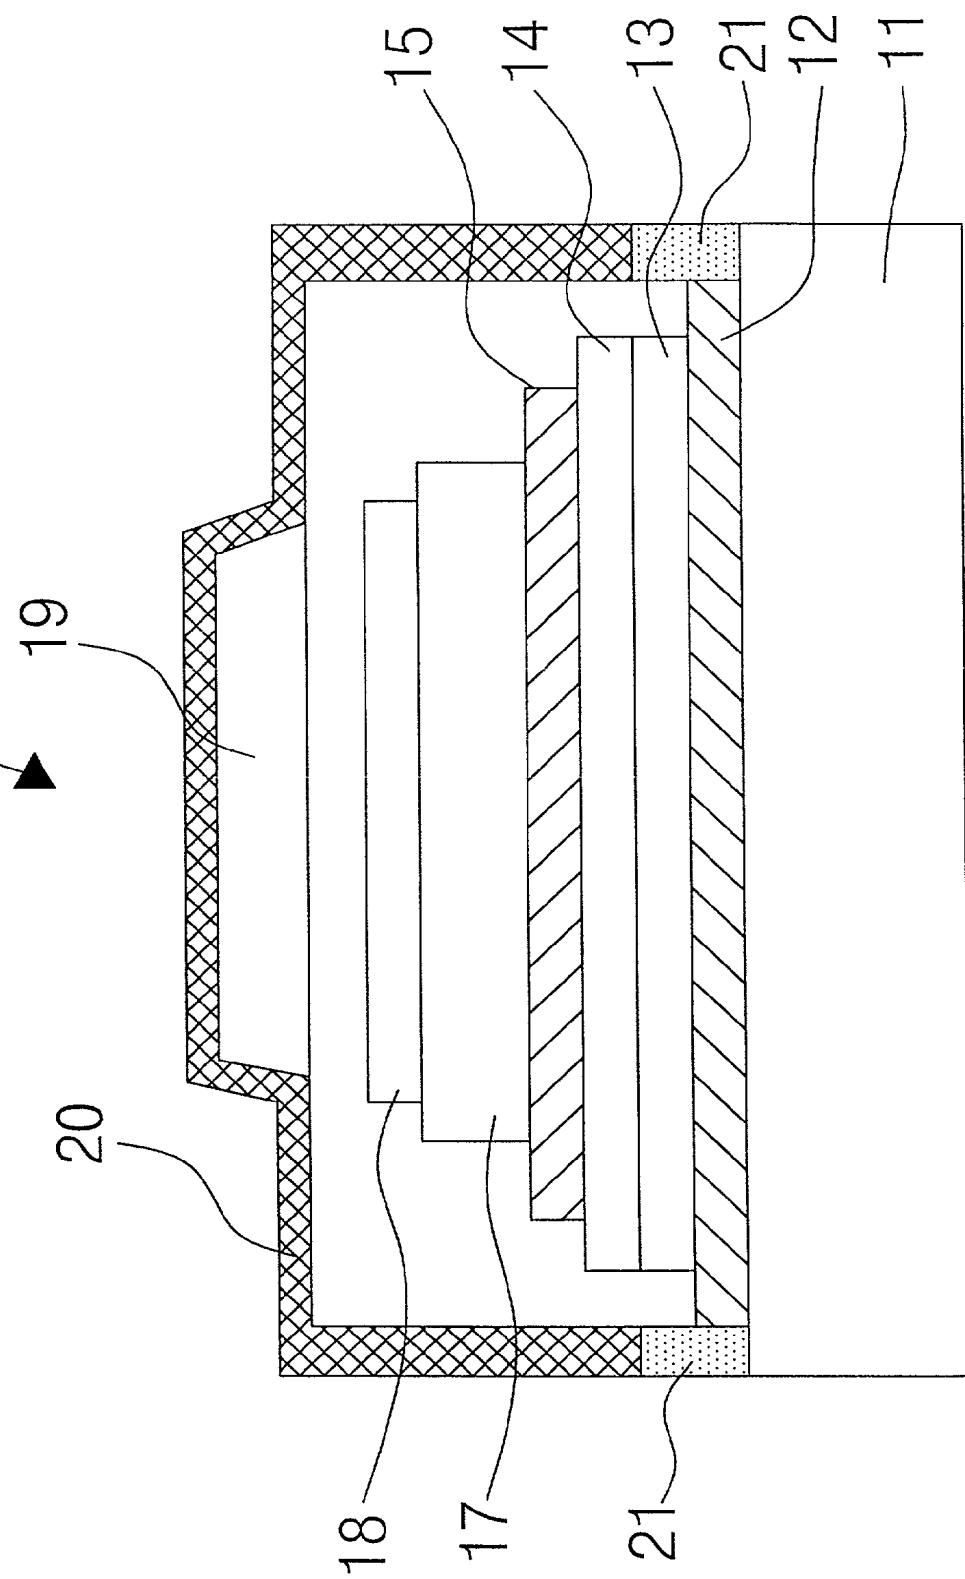


FIG. 2 100

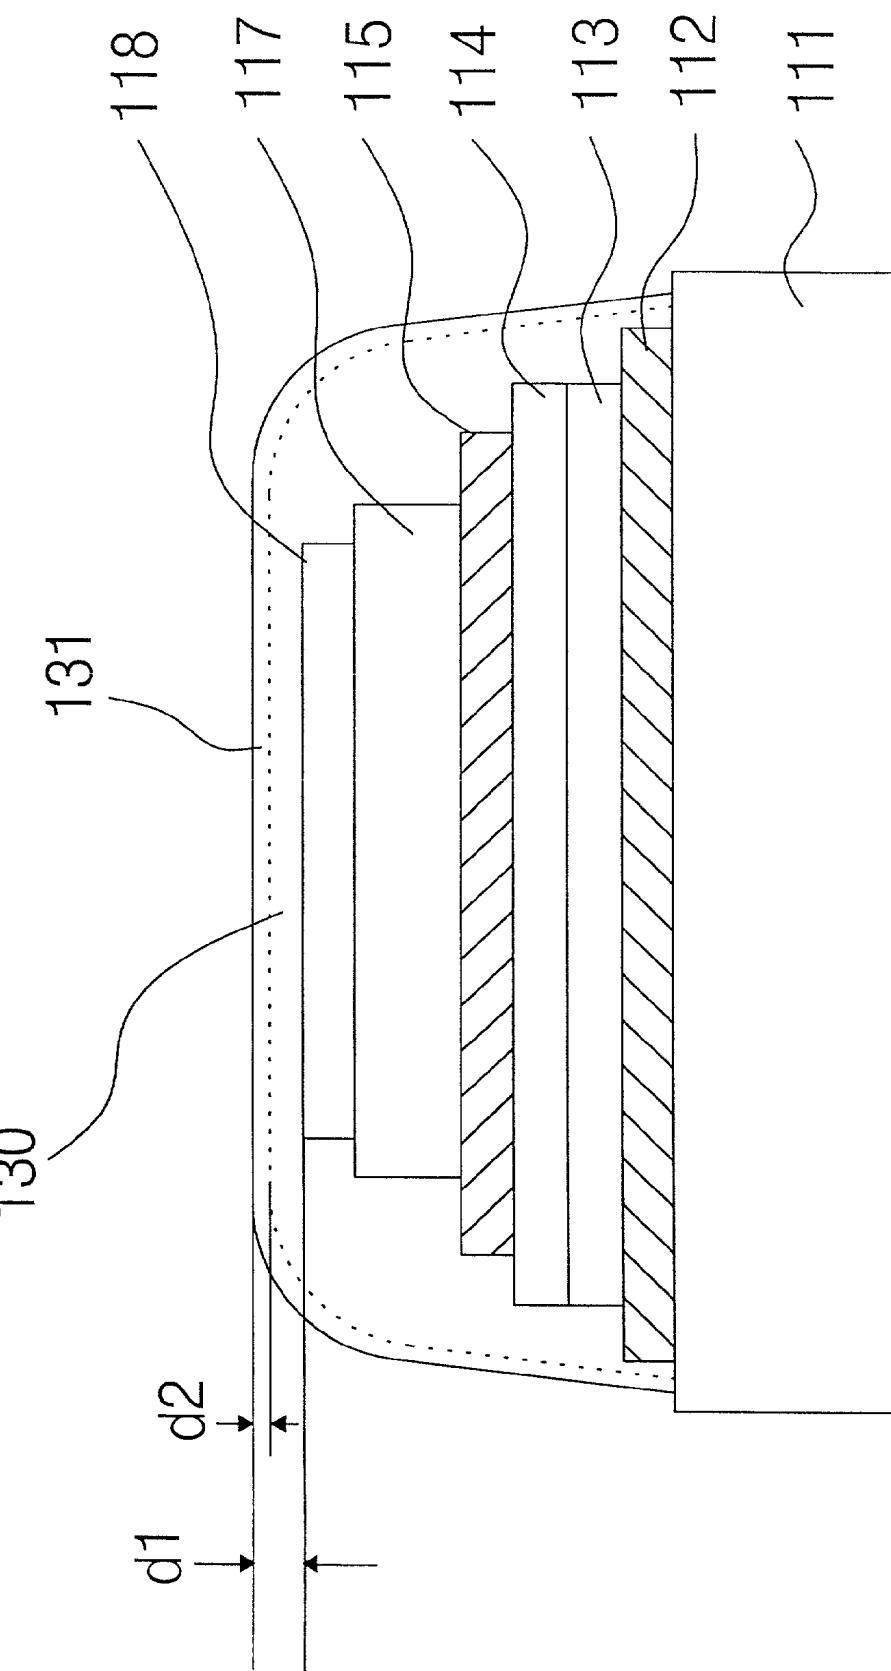


FIG. 3A

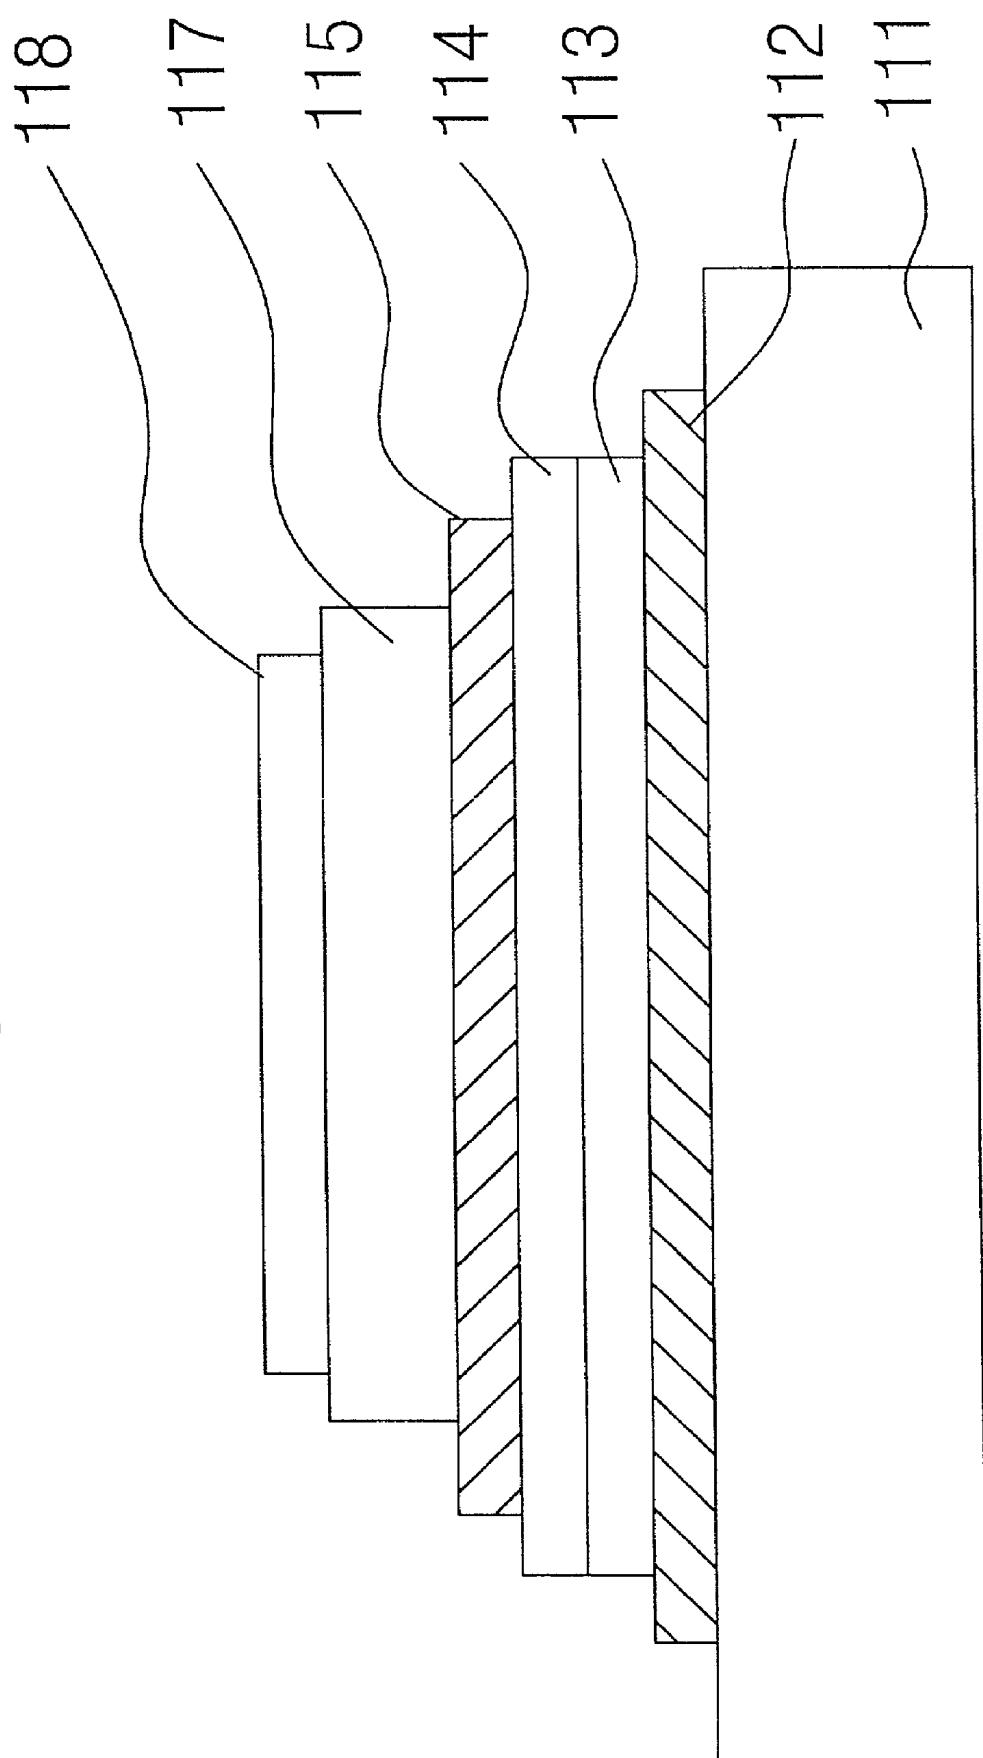
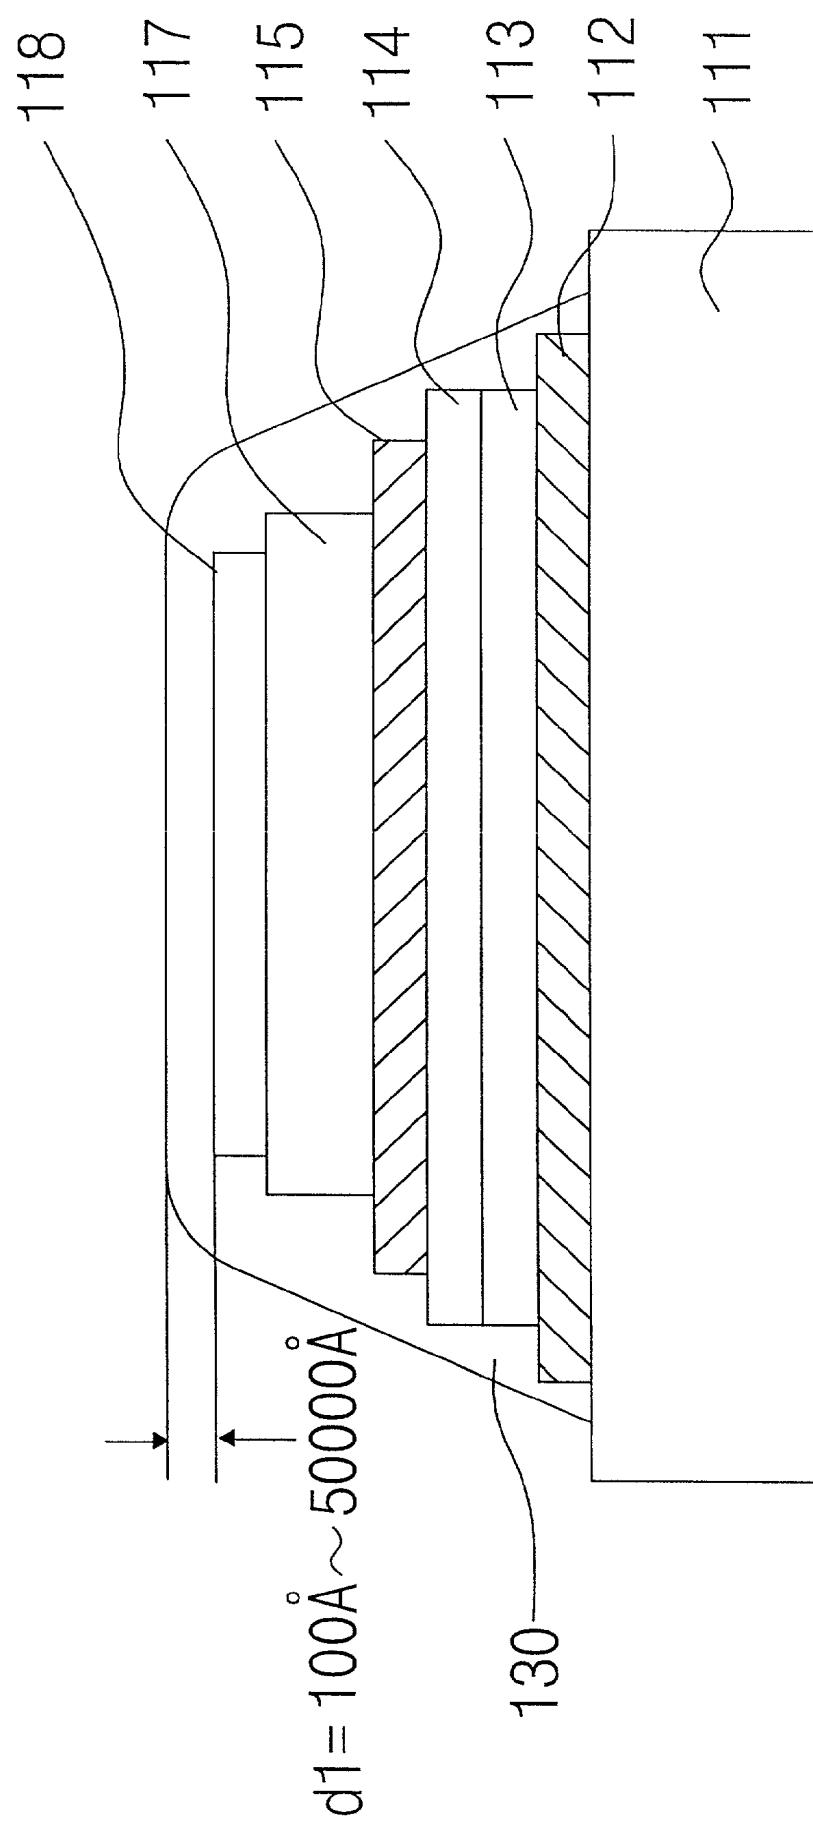


FIG. 3B



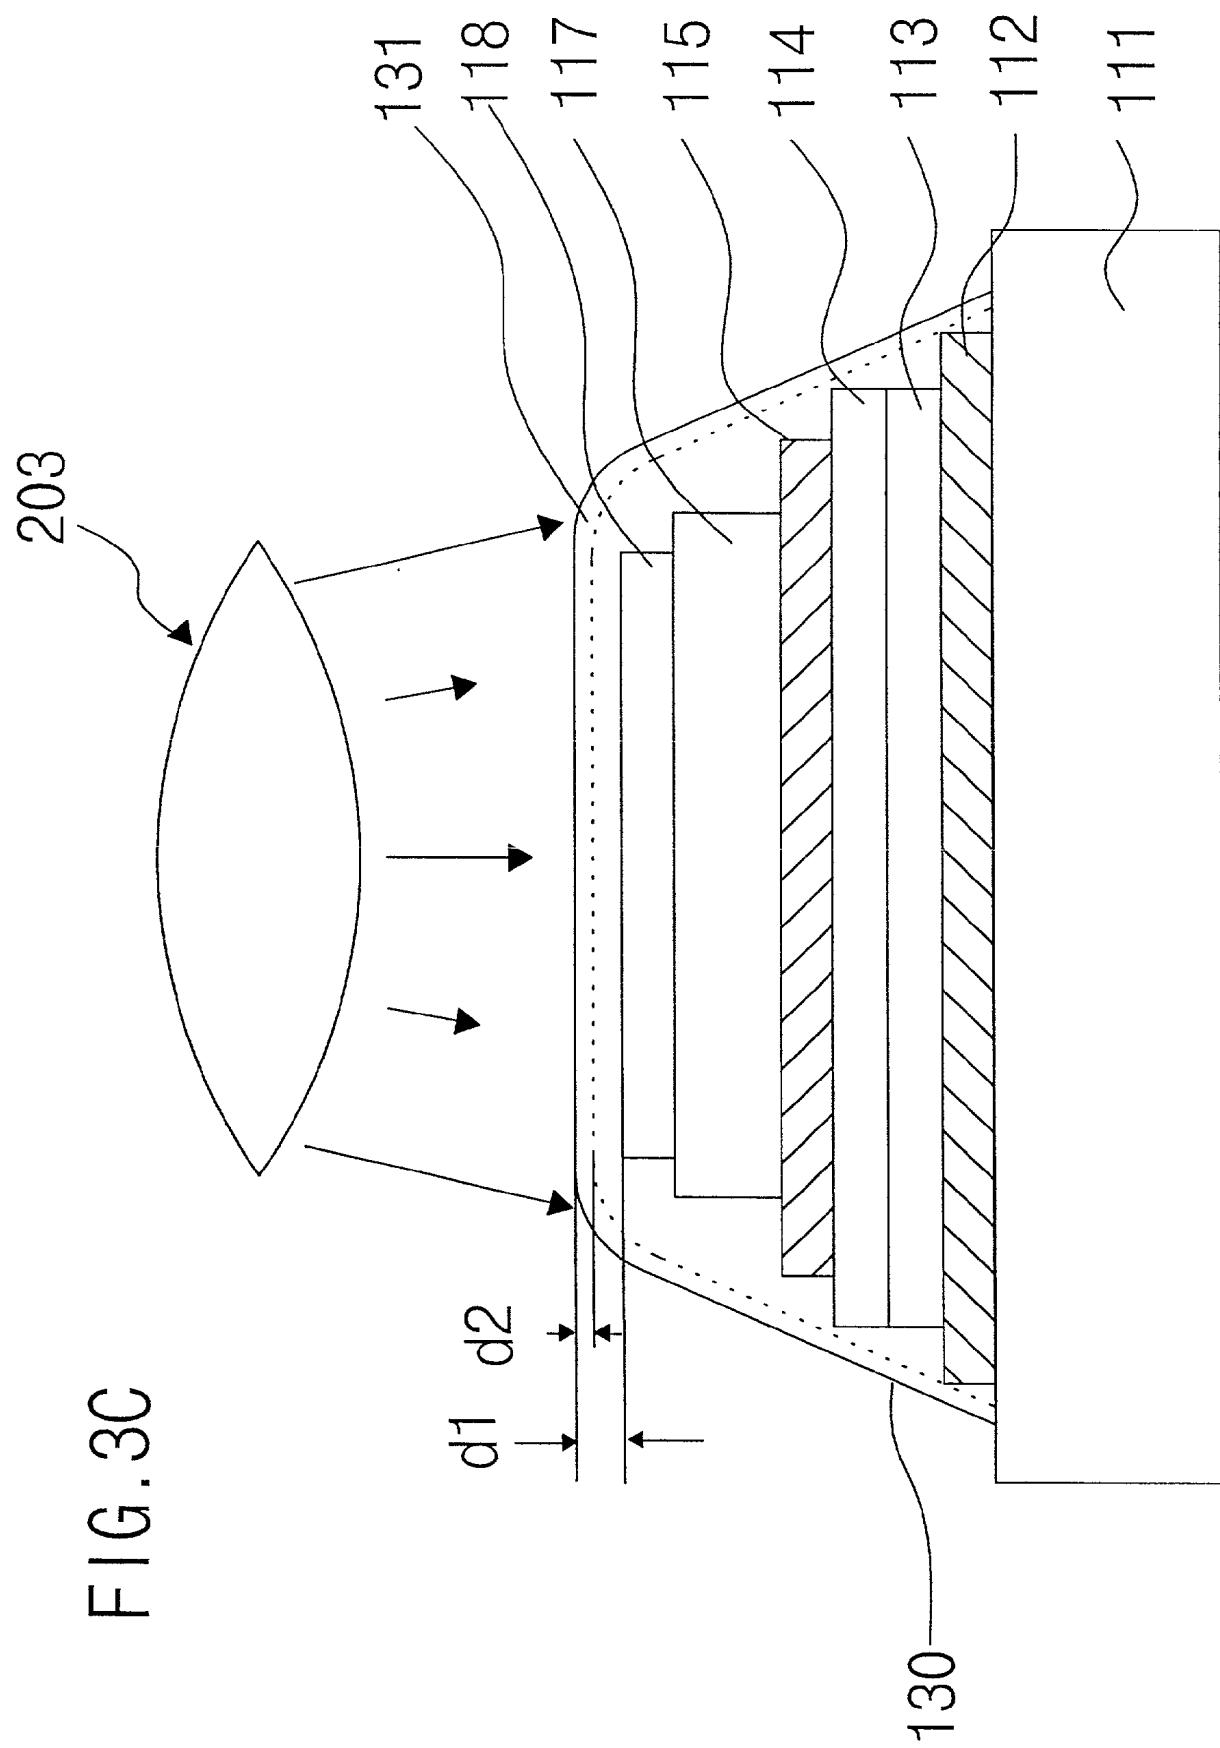


FIG. 4A


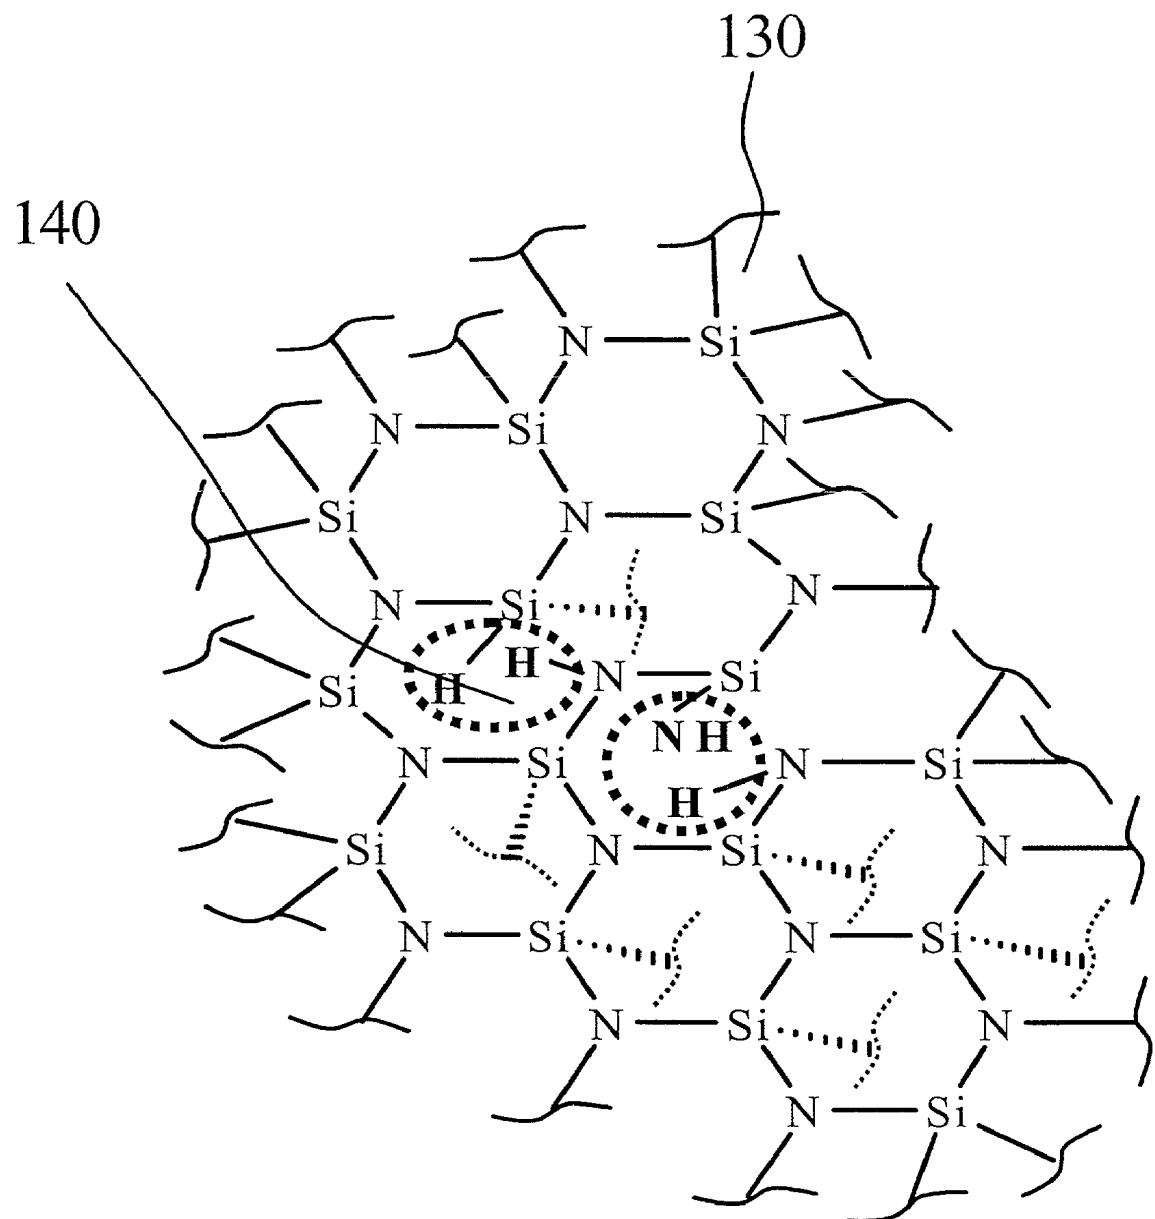


FIG. 4B

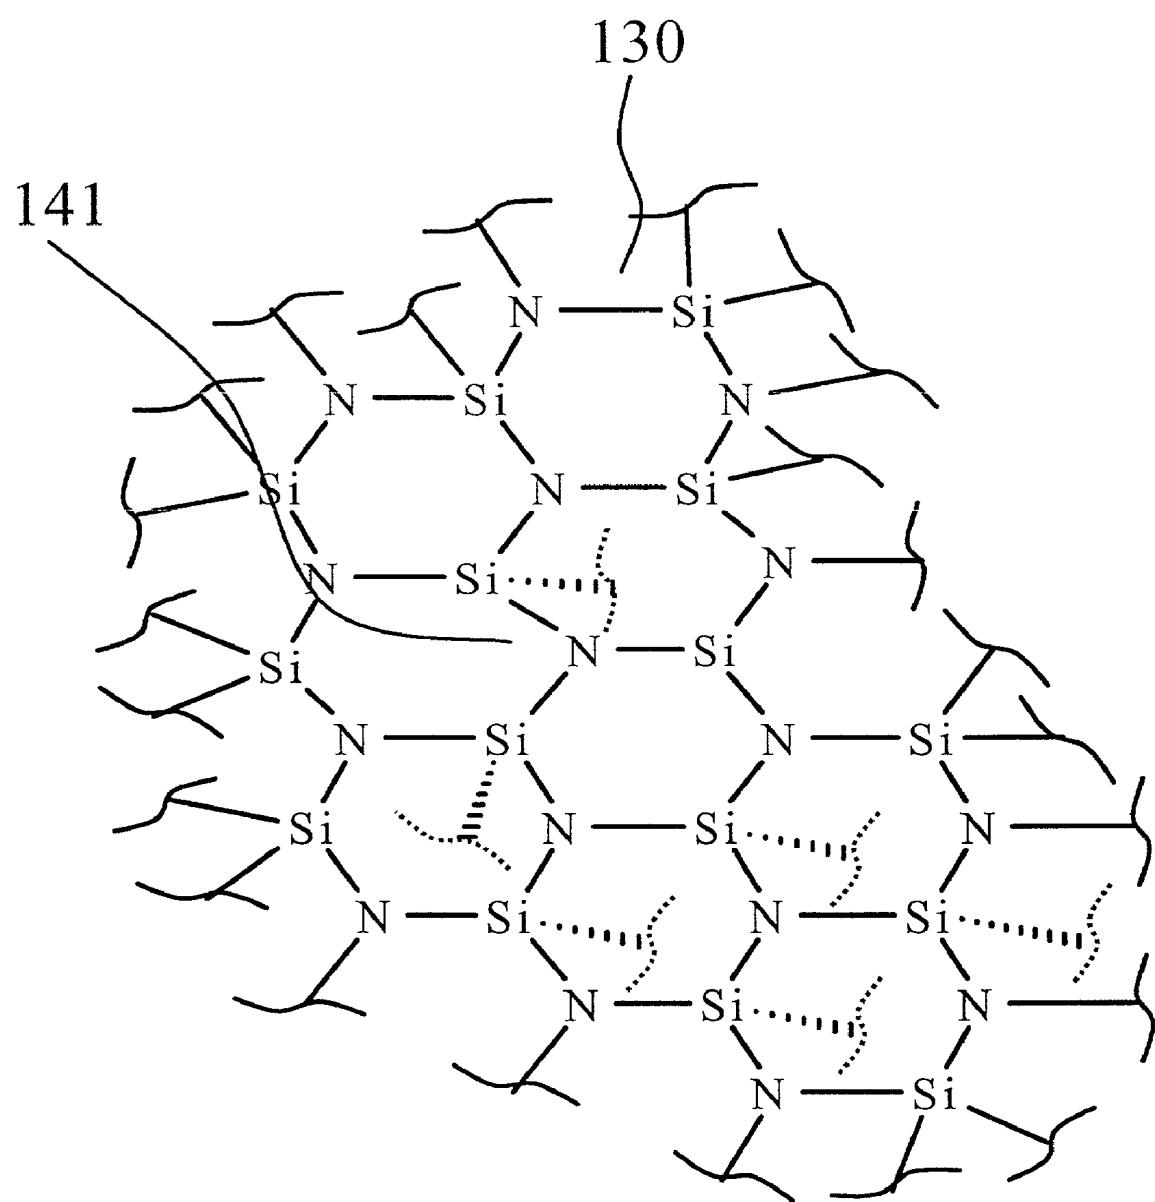

METHOD OF MAKING ORGANIC ELECTROLUMINESCENT DISPLAY

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a method of fabricating an organic electroluminescent display(hereinafter abbreviated OELD) enabling to improve device characteristics and reliability by performing excimer laser annealing on a passivation layer without affecting any other elements of the device.

[0003] 2. Background of the Related Art

[0004] As information communication technology is greatly developed, demands for electronic displaying means are highly increased in accordance with a variety of information societies. So does the demand for various displays. In order to meet the demands of the information society, for electronic display devices are required characteristics such as high-resolution, large-size, low-cost, high-performance, slim-dimension, and small-size and the like, for which new flat panel display(FPD) is developed as a substitution for the conventional cathode ray tube(CRT).

[0005] In the presently developed or used flat panel displays, there are Liquid Crystal Display(LCD), Light Emitting Display(LED), Plasma Display Panel(PDP), Vacuum Fluorescence Display(VFD), Electroluminescent Display(ELD) and the like.

[0006] Compared to the light-receiving device, ELD(electroluminescent display) attracts attention as a flat panel display having characteristics such as a response time faster than that of the light-receiving device such as LCD, an excellent brightness due to self-emission, an easy fabrication from a simple structure, and a light weight/slim design. ELD is applied to a new flat panel display(FPD) as a next-generation substitute. ELD is generally divided into two categories, i.e. an organic electroluminescent display(hereinafter abbreviated OELD) and an inorganic electroluminescent display(hereinafter abbreviated IELD) in accordance with materials used for luminescent layers.

[0007] In the above-mentioned OELD, a conductive transparent anode layer, a hole injection layer, a hole transport layer, an organic electroluminescent layer, an electron transport layer, and a cathode layer are stacked successively on a transparent substrate formed of glass, quartz or the like. In this case, an organic material constructing the organic electroluminescent layer is very sensitive to oxidation, moisture, and contamination due to impurities, thereby needing an airtight passivation layer. Specifically, the cathode layer is formed of a metal having a low work function in order to reduce a driving voltage and achieve efficient electron injection. Such a metal is very sensitive to external oxygen and moisture. Namely, the oxidation of the metal constructing the cathode layer degrades luminescent characteristics of the device such as luminescent brightness, uniformity of luminescence and the like badly, thereby reducing the lifetime of OELD.

[0008] Moreover, when defects such as pin holes and the like exist in a metal surface of the cathode layer, oxygen, moisture and the like penetrates into the organic electroluminescent layer through these pin holes so as to degrade the

organic electroluminescent layer. Therefore, the device characteristics are abruptly degraded. In order to secure the reliability of OELD, the organic electroluminescent layer as well as the pin holes in the cathode layer should be cut off from an ambient atmosphere so as to prevent the degradation.

[0009] One of the methods for shielding the organic electroluminescent layer of OELD from an external environment is using a metal cap.

[0010] FIG. 1 illustrates a cross-sectional view of an OELD using a metal cap according to a related art.

[0011] Referring to FIG. 1, an OELD 10 using a metal cap 20 is fabricated in a manner that an anode layer 12 formed of a conductive transparent material is stacked on a transparent substrate 11. And, on the anode layer 12 successively stacked are a hole injection layer 13, a hole transport layer 14, an organic electroluminescent layer 15, an electron transport layer 17, and a cathode layer 18. The anode, hole injection, hole transport, organic electroluminescent, electron transport, and cathode layers 12, 13, 14, 15, 17, and 18 stacked on the transparent substrate 11 are sealed using a metal cap 20 having a desiccant 19 at a center inside.

[0012] In the OELD 10 having the above-constructed metal cap 20, when a voltage is applied between the anode layer 12 and the cathode layer 18, holes move from the anode layer 12 into the organic electroluminescent layer 15 through the hole injection layer 13 and hole transport layer 14 while electrons move from the cathode layer 18 into the organic electroluminescent layer 15 through the electron transport layer 17. Thus, the organic electroluminescent layer 15, where the injected holes are combined with the injected electrons to generate the emission of light. In this case, the hole injection, hole transport, and electron transport layers 13, 14, and 17 play an auxiliary role in increasing an efficient luminescence of OELD.

[0013] Unfortunately, the metal cap having the desiccant is left apart from a surface of the cathode layer in the related art. When the passivation layer fails to secure 100% sealing by the metal cap, the organic electroluminescent and cathode layers become contacted with oxygen and moisture so as to cause the degradation. Thus, it is difficult to protect the device completely only with the desiccant existing in part. Moreover, steps of attaching the desiccant and metal cap to the OELD are very complicated.

SUMMARY OF THE INVENTION

[0014] Accordingly, the present invention is directed to a method of fabricating an organic electroluminescent display that substantially obviates one or more of the problems due to limitations and disadvantages of the related art.

[0015] An object of the present invention is to provide a method of fabricating an organic electroluminescent display(hereinafter abbreviated OELD) enabling to improve device characteristics and reliability by preventing organic electroluminescent and cathode layers from being contacted with oxygen, moisture and the like.

[0016] Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and

other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0017] To achieve these and other advantages, and in accordance with the purpose of the present invention as embodied and broadly described, a method of fabricating an organic electroluminescent display according to the present invention includes the steps of forming an anode layer, an organic electroluminescent layer, and a cathode layer successively on a transparent substrate, forming a passivation layer on the transparent substrate including the cathode layer, and performing local heat treatment on the passivation layer.

[0018] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

[0020] In the drawings:

[0021] **FIG. 1** illustrates a cross-sectional view of an OELD according to a related art;

[0022] **FIG. 2** illustrates a cross-sectional view of an OELD according to the present invention;

[0023] **FIGS. 3A** to **FIGS. 3C** illustrate cross-sectional views of fabricating an OELD according to the present invention; and

[0024] **FIG. 4A** and **FIG. 4B** illustrate network structure for chemical bonds of silicon nitride layers.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0025] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Where possible, the same reference numerals will be used to illustrate like elements throughout the specification.

[0026] **FIG. 2** illustrates a cross-sectional view of an OELD according to the present invention.

[0027] Referring to **FIG. 2**, an OELD **100** having a thin passivation layer according to the present invention is fabricated in a manner that an anode layer **112**, a hole injection layer **113**, a hole transport layer **114**, an organic electroluminescent layer **115**, an electron transport layer **117**, and a cathode layer **118** are stacked on a transparent substrate **111** successively. And, the OELD **100** according to the present invention further includes a thin passivation layer **130** deposited on the cathode layer **118** formed of a silicon based insulating material enabling to shield oxygen, moisture and the like.

[0028] **FIGS. 3A** to **FIGS. 3C** illustrate cross-sectional views of fabricating an OELD according to the present invention.

[0029] Referring to **FIG. 3A**, a plurality of anode layers **112** are formed on a transparent substrate **111**. In this case, the transparent substrate **111** is formed of one of glass, quartz glass, transparent plastic, and the like.

[0030] Preferably, the anode layer **112** is deposited by one of chemical vapor deposition, sputtering, thermal evaporation, and electron beam deposition, and is patterned by photolithography. And, the anode layer(s) is formed 100 to 10,000 Å thick, and preferably, 100 to 3,000 Å thick. A transmissivity of the anode layer **112** for visible rays is preferably close to 100%. And, at least 30% of the transmissivity is acceptable.

[0031] Preferably, the anode layer **112** is formed of one of metal, alloy, electrically conductive chemical compound and their mixtures, of which work function is at least 4.0 eV. For instance, the anode layer **112** is formed of one of ITO(indium-tin-oxide), IZO(indium-doped zinc oxide), TO(tin-oxide), Sn, Au, Pt, Pd, and their mixtures constructing a single layer or double layers.

[0032] On the anode layer **112** stacked successively as organic layers are a hole injection layer **113**, a hole transport layer **114**, an organic electroluminescent layer **115**, and an electron transport layer **117**.

[0033] When the organic layers are formed of a low molecule-based organic material, the hole injection, hole transport layer, organic electroluminescent layer, and electron transport layers **113**, **114**, **115**, and **117** are stacked 200~600 Å, 200~600 Å, 400~500 Å, and about 600 Å thick, respectively.

[0034] The hole injection layer **113** is formed of an organic material having star-burst type molecules such as metallophthalocyanine, metal-free-phthalocyanine, 4,4',4"-tris(di-p-methylphenylamino)triphenylamine or the like. The hole injection layer **113** injects holes of the anode layer **112** into the hole transport layer **114** when an electric field is applied thereto.

[0035] The hole transport layer **114** is formed of one of organic materials such as N,N'-diphenyl-N,N'-(4-methylphenyl)-1,1'-biphenyl4,41-diamine, and 4,4'-bis[N-(1-naphthyl)-N-phenylamino]biphenyl. And, the hole transport layer **114** moves the injected holes to the organic electroluminescent layer **115** by the electric field.

[0036] The organic electroluminescent layer **115** is formed of the organic material such as tris(8-hydroxyquinoline)aluminum, tris(4-methyl-8-hydroxyquinoline)aluminum, 3-(2'-benzothiazolyl)-7-N,N-diethylaminocoumarine, 9,18-dihydroxybenzo[h]benzo[8]quino[2,3-b]acrydyne-7,16-dione, 4,4'-bis(2,2'-diphenyl-ethene-4-yl)-diphenyl, perylene and the like. The organic electroluminescent layer **115** generates the emission of light due to the recombination between holes moved from the hole transport layer **114** and electrons moved from the electron transport layer **117**.

[0037] The electron transport layer **117** is formed of one of organic materials such as tris(8-hydroxyquinoline)aluminum, tris(8-hydroxyquinoline)gallium, 1,3-bis[5-(p-tertiary-biphenyl)-1,3,4-oxadiasole-2-yl]benzene and the like. And, the electron transport layer **117** moves the electrons

injected from the cathode layer **118** to the organic electroluminescent layer **115** when an electric field is applied thereto.

[0038] So far, low molecule-based organic materials are explained.

[0039] In the case of an electroluminescent device using polymer (high molecule-based) materials, stacked organic layers constructed with a buffer layer such as PEDOT, PSS or the like and a luminescent layer such as poly(phenylvinylene) derivatives, PPV or the like are formed using one of spin-coating, dipping, deposition and the like. In this case, the buffer and organic electroluminescent layers are formed 200~900 Å and 200~900 Å thick, respectively,

[0040] The cathode layer **118**, which is formed of a metal of which work function is lower than 4.0 eV such as magnesium, aluminum, indium, lithium, sodium, silver, is constructed with a single layer, double layers, or a layer of their mixtures. And, the cathode layer **118** is formed 100 to 10,000 Å, preferably, 100 to 3,000 Å thick using sputtering, thermal evaporation, electron beam deposition, or chemical vapor deposition(CVD).

[0041] In order to increase an electron injection efficiency, LiF, CsF, Li₂O, Li—Al alloy or the like may be formed 1 to 100 Å thick between the cathode and electron transport layers **118** and **117**.

[0042] Referring to FIG. 3B, a passivation layer **130** is deposited on the transparent substrate **111** including the cathode layer **118**. The passivation layer **130** is constructed with at least one layer using selectively one of SiO₂, SiO_xN_y, Si₃N₄, and SiN_x to a thickness d1 of 100 to 50,000 Å thick, preferably, 100 to 3,000 Å. Thus, the passivation layer **130** is formed of a silicon based insulating material enabling to shield the organic electroluminescent and cathode layers from being degraded by the penetration of oxygen, moisture and the like. The passivation layer **130** is formed or deposited by CVD, sputtering, thermal evaporation or E-beam deposition.

[0043] When the passivation layer **130** is deposited of the silicon based insulating material using CVD, a deposition temperature of layer is 25 to 300° C., inert gas is used as a carrier gas, SiN_x uses SiH₄, NH₃, and N₂ as reaction gases, SiNO uses SiH₄, N₂O, NH₃, and N₂ as reaction gases, and SiO₂ uses SiH₄ and O₂ as reaction gases.

[0044] When the passivation layer **130** is deposited of the silicon based insulating material using sputtering, a deposition temperature of layer is 25 to 300° C., inert gas is used as a carrier gas, and SiN_x, SiNO, and SiO₂ use targets of SiN_x, SiNO, and SiO₂, respectively.

[0045] Besides, a silicon based insulating inorganic material, a resin layer, and a silicon based inorganic material are successively deposited so as to form the passivation layer **130**. Alternatively, the passivation layer **130** is formed by depositing a resin layer, a silicon based insulating inorganic material, and a resin layer successively.

[0046] Referring to FIG. 3C, in order to remove the defect of the passivation layer **130**, heat treatment is performed. As the passivation layer **130** is not formed by a thermal growing method but deposited by CVD or sputtering, a plurality of incomplete chemical bonds between silicon and oxygen/nitrogen atoms occur. Such an incomplete bonds between atoms generates a plurality of dangling bonds and porosity,

thereby bringing about the defect of the passivation layer **130**. Namely, such a defect in the passivation layer provides paths through which oxygen and moisture pass. Thus, the defect should be removed therefrom through crystallization process.

[0047] A temperature of the thermal treatment to remove the defect of the passivation layer **130** deposited of the silicon based chemical compounds is 700 to 1100° C. Such a temperature is enough to affect other elements including the organic electroluminescent layer of the OELD fatally. Therefore, the present invention performs a local heat treatment process using excimer laser annealing method.

[0048] In this case, the heat treatment is performed using an excimer laser of Ar₂, Kr₂, Xe₂, ArF, KrF, XeCl, or F₂. Table 1 illustrates wavelengths of the respective excimer lasers, where annealing power of the excimer laser is 10~2000 mJ/cm², an ambient temperature is 25~300° C., and the annealing is performed for several minutes. And, an instant temperature of annealing the passivation layer **130** is a temperature enabling the crystallization. The annealing is performed out at least once.

[0049] As a result of the annealing having been performed, a high-density uniform layer **131** having a network structure consisting of silicon and oxygen(or nitrogen) is formed. In the high-density uniform layer **131**, a porosity and a hydrogen content coupled with the dangling bonds are minimized. In this case, the high-density uniform layer **131** is formed to have a thickness d2 of 10 to 10,000 Å, and preferably, 100 to 2000 Å, after the annealing. Therefore, the network structure and the reduced hydrogen content prevent the organic electroluminescent and cathode layers **115** and **118** from being degraded due to the penetration of moisture and oxygen from external environments.

[0050] The species and wavelengths of the excimer lasers used for annealing the surface of the passivation layer **130** are shown in Table 1, where the annealing may be performed at least once.

TABLE 1

Excimer laser	Wavelength
Ar ₂	126 nm
Kr ₂	146 nm
Xe ₂	172 nm
ArF	190 nm
XeF	193 nm
KrF	250 nm
XeCl	350 nm
F ₂	157 nm

[0051] Besides, in order to prevent the degradation caused by outgassing materials generated inside the device, a metal oxide layer(not shown in the drawing) as a desiccant layer, of which desiccating and adsorbing properties are excellent, may be inserted between the cathode and passivation layers **118** and **130** using one of CaO, Y₂O₃, MgO and the like. The metal oxide layer is formed 100~50,000 Å thick, more preferably, 200~10,000 Å thick.

[0052] Thereafter, an external encapsulation cap may be formed over ID the transparent substrate **111** by assembly/sealing so as to cover the above-described structure using one of glass, AS resin, ABS resin, poly(propylene)(PP),

poly(styrene)(HIPS), poly(methyl-meta-crylic acid) (PMMA), polycarbonate, metal and the like in order to strengthen the mechanical intensity of the passivation layer 130.

[0053] FIG. 4A and FIG. 4B illustrate network structure for chemical bonds of silicon nitride layers.

[0054] Referring to FIG. 4A, the passivation layer 130 formed of the silicon based insulating material is not formed by a thermal growing method but deposited by one of CVD, sputtering, and thermal evaporation. Thus, silicon and nitrogen atoms fail to complete their chemical bonds, thereby providing a plurality of dangling bonds 140 failing to be bonded to others. Therefore, a plurality of the dangling bonds 140 exist in the passivation layer 130 and a property of the passivation layer 130 becomes porous. Moreover, the dangling bonds 140 come into forming chemical bonds with hydrogen atoms so as to increase the hydrogen content in the passivation layer 130 as well. The dangling bonds 140 and porosity of the passivation layer cause the penetration of oxygen and moisture.

[0055] Referring to FIG. 4B, the passivation layer 130 is annealed using an excimer laser. The passivation layer 130 is abruptly crystallized so as to disconnect the chemical bonds between the dangling bonds and hydrogen atoms and form new chemical bonds 141 between silicon and nitrogen atoms. Thus, the removal of the dangling bonds 140 reduces the hydrogen content as well as minimizes the porosity of the passivation layer 130. Therefore, the uniform passivation layer 130 enabling to restrain the penetration of oxygen and moisture is attained.

[0056] Accordingly, the present invention provided with the network structure and the reduced hydrogen content enables to prevent the organic electroluminescent and cathode layers from being degraded due to the penetration of moisture and oxygen from outside by performing the excimer laser annealing locally on the passivation layer formed of silicon and nitrogen/oxygen without affecting other elements.

[0057] Moreover, considering the case of the related art requiring at least 2 to 5 hours for forming a layer enabling to exclude the external oxygen and moisture by CVD, the present invention enables to reduce a process time greatly using excimer laser annealing of which process time requires only several minutes which are relatively short.

[0058] The foregoing embodiments are merely exemplary and are not to be construed as limiting the present invention. The present teachings can be readily applied to other types of apparatuses. The description of the present invention is intended to be illustrative, and not to limit the scope of the claims. Many alternatives, modifications, and variations will be apparent to those skilled in the art.

What is claimed is:

1. A method of fabricating an organic electroluminescent display, comprising the steps of:

forming an anode layer, an organic electroluminescent layer, and a cathode layer successively on a transparent substrate;

forming a passivation layer on the transparent substrate including the cathode layer; and

performing heat treatment on the passivation layer locally.

2. The method of claim 1, wherein a hole injection layer and a hole transport layer are further laminated between the anode and organic electroluminescent layers.

3. The method of claim 1, wherein an electron transport layer is further laminated between the organic electroluminescent and cathode layers.

4. The method of claim 1, wherein a desiccant layer is further laminated between the cathode and passivation layers.

5. The method of claim 4, wherein the desiccant layer is formed using selectively one of one of CaO, Y₂O₃, and MgO.

6. The method of claim 1, wherein the passivation layer is formed of a silicon based insulating layer.

7. The method of claim 1, wherein the passivation layer is formed using selectively one of SiO_x, SiNO, and SiN_y to form a single layer or using selectively at least two of SiO_x, SiNO, and SiN_y to form at least double layers.

8. The method of claim 1, wherein the heat treatment is performed using excimer laser.

9. The method of claim 8, wherein an annealing power of the excimer laser is 10~2000 mJ/cm², an ambient temperature is 25~300° C., and the heat treatment is performed for several minutes.

10. The method of claim 8, wherein the excimer laser is one of lasers using Ar₂, Kr₂, Xe₂, ArF, KrF, XeCl, or F₂.

11. The method of claim 1, wherein the passivation layer is formed by stacking a first silicon based inorganic material layer, a resin layer, and a second silicon based inorganic material layer.

12. The method of claim 1, wherein the passivation layer is formed by stacking a first resin layer, a silicon based inorganic material layer, and a second resin layer.

13. The method of claim 1, wherein an external encapsulation cap is further formed on the passivation layer by assembly/sealing.

14. The method of claim 13, wherein the external encapsulation cap is formed using one of glass, AS resin, ABS resin, polypropylene(PP), polystyrene(HIPS), polymethylmeta-crylic acid(PMMA), polycarbonate, and a metal.

* * * * *

专利名称(译)	制造有机电致发光显示器的方法		
公开(公告)号	US20030003225A1	公开(公告)日	2003-01-02
申请号	US09/985142	申请日	2001-11-01
[标]申请(专利权)人(译)	CHOI DO HYUN 崔庆熙		
申请(专利权)人(译)	崔DO-HYUN 崔京姬		
当前申请(专利权)人(译)	崔DO-HYUN 崔京姬		
[标]发明人	CHOI DO HYUN CHOI KYUNG HEE		
发明人	CHOI, DO-HYUN CHOI, KYUNG-HEE		
IPC分类号	H05B33/04 H01L51/50 H01L51/52 H05B33/10 B05D5/12		
CPC分类号	H01L51/5237		
优先权	1020010049414 2001-08-16 KR 1020010034193 2001-06-16 KR 1020010057741 2001-09-18 KR		
其他公开文献	US6692326		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种制造有机电致发光显示器的方法，该有机电致发光显示器能够通过局部地在钝化层上执行准分子激光退火来改善器件特性和可靠性。本发明包括在透明基板上依次形成阳极层，有机电致发光层和阴极层，在包括阴极层的透明基板上形成钝化层，并在局部地对钝化层进行热处理。

