



US 20030203235A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2003/0203235 A1**
Ishii et al. (43) **Pub. Date:** **Oct. 30, 2003**

(54) **ORGANIC EL PANEL AND FILTER FOR SAME**

(30) **Foreign Application Priority Data**

(76) Inventors: **Ikuko Ishii**, Tokyo (JP); **Yoshikazu Sakaguchi**, Tokyo (JP)

Jul. 21, 1999 (JP) 206530/1999

Correspondence Address:

Norman P. Soloway
HAYES SOLOWAY P.C.
130 W. Cushing Street
Tucson, AZ 85701 (US)

(51) **Int. Cl. 7** **H05B 33/02; B32B 9/00**
(52) **U.S. Cl.** **428/690; 428/411.1; 428/917; 313/112; 257/98**

(21) Appl. No.: **10/400,862**

(57) **ABSTRACT**

(22) Filed: **Mar. 27, 2003**

Related U.S. Application Data

(63) Continuation of application No. 09/619,826, filed on Jul. 20, 2000.

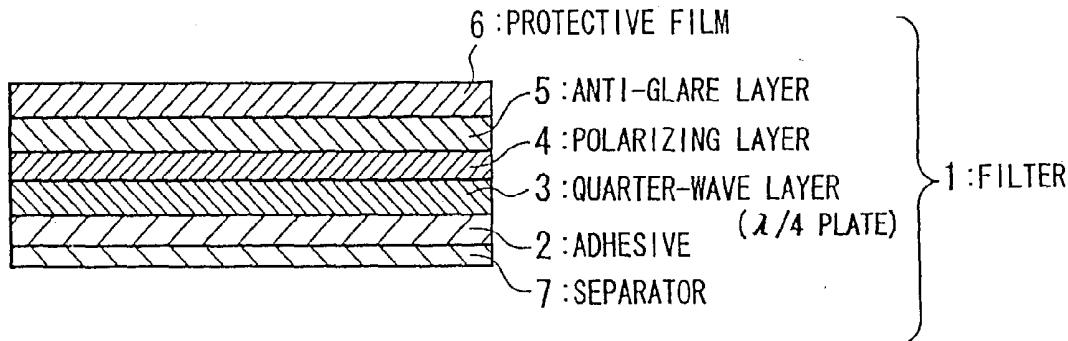


Fig. 1

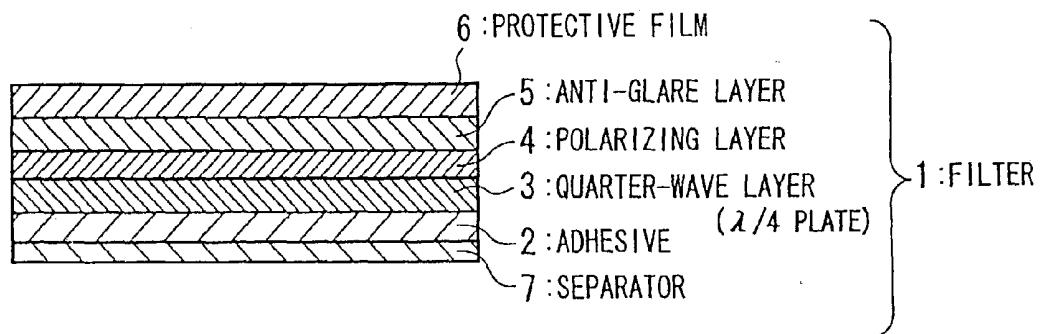


Fig. 2


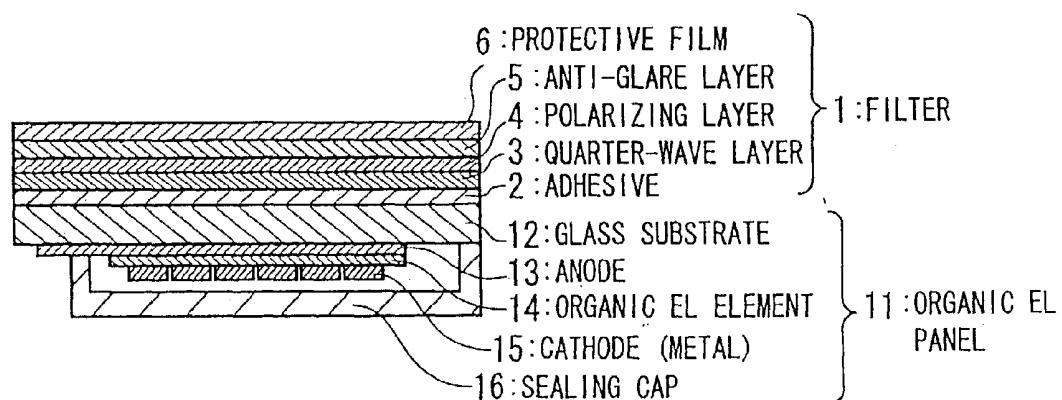


Fig. 3

	CONTRAST	LUMINANCE WITH VOLTAGE APPLIED (cd/m ²)	LUMINANCE WITH NO VOLTAGE APPLIED (cd/m ²)	APPLIED VOLTAGE (V)
EMBODIMENT	154	100.1	0.65	12
COMPARATIVE EXAMPLE 1	22	154.1	6.87	12
COMPARATIVE EXAMPLE 2	70	44.9	0.64	12

Fig. 4

PRIOR ART

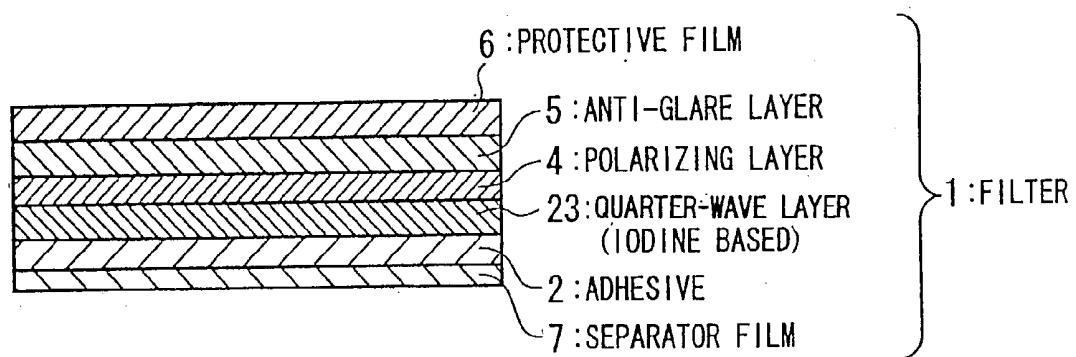

ORGANIC EL PANEL AND FILTER FOR SAME

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to an organic EL panel and a filter thereof, and more particularly to an organic EL panel and filter thereof which enable the achievement of a clear, sharp image.

[0003] 2. Related Art

[0004] An organic EL element is formed by an organic solid-state luminescent layer made of a phosphor such as anthracene and a positive hole-injection layer made of a triphenylamine dielectric, or a luminescent layer and an electron-injection layer made of a perylene, or a positive hole-injection layer, a luminescent layer and an electron-injection layer sandwiched between two electrodes, which is generally formed on a substrate.

[0005] In an organic EL element such as noted above, light is emitted when electrons that are injected from a cathode into the luminescent layer recombine with positive holes that are injected from an anode into the luminescent layer. For this reason, an organic EL element can be driven with a low voltage such as 4 V by making the luminescent layer thin, and also has the advantage of fast response. Because it emits light itself, it also has an advantage of a wide viewing angle.

[0006] However, the above-mentioned two electrodes made of the metal thin films have a high reflectivity with respect to visible light, and regardless of whether or not the organic EL element is emitting light, reflected light of external light striking them exits from the light-extraction surface. For this reason, the contrast of an organic EL panel in the past was relatively low.

[0007] Given the above, a filter for transmission-type LCDs is disposed on the outside of the light-extraction surface. FIG. 4 shows a filter of the past. This filter (for example, the Nitto Denko type NPF-F1228DU) is formed by a polarizing layer 4 having a polarization of approximately 95% and a quarter-wave layer ($\lambda/4$ plate) 23. However, an organic EL display is characterized in self-emission of light, so that it does not require as much polarization as an LCD.

[0008] In the Japanese Patent No. 2,761,453, there is indicated technology in which, for fabricating an organic EL element in which the transmittance of an electrode positioned on the light-extracting surface is 10% or greater over the wavelength region from 400 to 600 nm, and the reflectivity of the electrode positioned on the opposite side from the light-extracting surface is 50% or greater over the wavelength region from 400 to 600 nm, a polarizing film is combined with a retardation layer or film ($\lambda/4$ plate) and disposed on the light-extracting surface. Although the cited invention causes some improvement in the contrast, it does not yet achieve a satisfactory level.

[0009] The Japanese Unexamined Patent Publication (KOKAI) No. 10-508979 (International Publication Number WO 99/10179) discloses an EL panel, however this EL panel is different from the present invention in terms of problem to be solved and constitution.

[0010] Accordingly, an object of the present invention is to improve on the above-noted problem with the prior art, and

to obtain an organic EL panel having a clear and sharp image, by specifying the polarization and haze value of the filter.

SUMMARY OF THE INVENTION

[0011] In order to achieve the above-noted object, the present invention has the following basic technical constitution.

[0012] Specifically, a first aspect of the present invention is a filter for an organic EL panel formed by a $\lambda/4$ plate, a polarizing layer and an anti-glare layer, wherein the polarization of the polarizing layer is between 50% and 70%.

[0013] In a second aspect of the present invention, the haze value of the anti-glare layer is between 5% and 15%.

[0014] In a third aspect of the present invention, the $\lambda/4$ plate layer is laminated onto a glass substrate of the organic EL panel, and onto the $\lambda/4$ plate layer is laminated on the polarizing layer.

[0015] In a fourth aspect of the present invention, the polarizing layer is laminated onto the glass substrate of the organic EL glass, and onto the polarizing layer is laminated the $\lambda/4$ plate layer.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] FIG. 1 is a cross-sectional view of a filter of an organic EL panel according to the present invention.

[0017] FIG. 2 is a cross-sectional view of an organic EL panel with a filter assembled thereto according to the present invention.

[0018] FIG. 3 is a table showing the results of measuring the effect of the present invention.

[0019] FIG. 4 is a cross-sectional view of a filter according to an example of prior art.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0020] Embodiments of an organic EL panel and filter therefore according to the present invention are described in detail below, with references being made to relevant accompanying drawings.

[0021] FIG. 1 through FIG. 3 show an organic EL panel according to the present invention, in which is shown a filter for an organic EL panel formed by a quarter-wave layer, a polarizing layer and an anti-glare layer, wherein the polarization of the polarizing layer is between 50% and 70%, and the haze value of the anti-glare layer is between 5% and 15%.

[0022] This embodiment is described in further detail below.

[0023] The construction of an organic EL panel according to the present invention is described herein with reference to the cross-sectional view of FIG. 1. In this drawing, various parts are shown with dimensions that make them more visible, which are different from the dimensions of the actual thin films.

[0024] The filter according to the present invention is formed by a separator film 7, an adhesive 2, a $\lambda/4$ plate (dye-based) 3, a polarizing layer 4 with a polarization of 60%, an anti-glare layer (AG) with a haze value of 10%, and

a protective film **6**, and the separator film **7**. The adhesive **2**, the quarter-wave layer **3**, the polarizing layer **4**, the anti-glare layer (AG) **5**, and a protective film **6** are laminated. The dye-based $\lambda/4$ plate **3** has better durability than an iodine-based layer.

[0025] The organic EL panel **11** to which the filter **1** according to the present invention is to be adhered was fabricated by a method described below.

[0026] First, on a 1.1-mm-thick non-alkaline glass substrate **12**, an ITO film was sputtered to a thickness of 100 nm as an anode **13**, thereby forming a transparent substrate. Next, the transparent substrate was held onto a substrate holder in a vacuum deposition chamber, with the ITO film facing downward, and N,N'-diphenyl-N,N'-bis(α -naphthyl)-1,1'-biphenyl-4,4'diamine (hereinafter abbreviated α -NPD) as a positive hole injection material and positive hole carrier material was put in a resistive heating boat, and tris (8-quinolinolate) aluminum complex (hereinafter abbreviated Alq₃) as a luminescent material was put in another resistive heating boat, a vacuum pump being used to exhaust this vacuum deposition chamber to approximately 1×10E-4 Pa or lower. After this was done, a shadow mask with a cutout for forming the positive hole carrier layer and the EL luminescent layer was fixed on the anode side of the transparent substrate, after which current is driven through the resistive heating boat filled with α -NPD, and α -NPD is heated. An α -NPD layer was deposited to a film thickness of 50 nm, and a positive hole carrier layer was formed, after which current is driven through the resistive heating boat filled with Alq₃ so as to apply heat and to form a green luminescent layer with a film thickness of 50 nm. This green luminescent layer is an organic EL element **14**.

[0027] After the above, for example, magnesium and silver were deposited to a film thickness of 200 nm, so as to form a cathode **15**. The size of the luminescent layer viewed as a plane is 0.3×0.3 mm for one pixel, these pixels being arranged in a 16×16 matrix. To protect this organic EL panel from moisture in the air, the organic EL panel is sealed within a glass cap **16** filling with nitrogen.

[0028] By scanning the cathode **15** of an organic EL panel **11** fabricated as described above by applying a pulse voltage, and by applying a pulse voltage to a selected anode **13** in synchronization with scanning the cathode **15**, it is possible to obtain a desired display pattern. In FIG. 2, cathode **15** is perpendicular to the anode **13**.

[0029] Because the organic thin film fabricated as described above is not only thin, but has transparency to light, external light is reflected on the mirror-surface metal cathode film. For preventing reflections and improving contrast, a filter **1** is disposed on the light-extracting surface of the organic EL panel **11** which is sealed with a glass cap. This filter **1** is configured as shown in FIG. 1. The filter **1** has a polarization of 62%, a haze value of 11.8%, a transmittance of 59.0%, and a neutral gray color. The anti-glare processing is done by hard coating. After removing the separator film **7**, an adhesive surface is affixed to the light-extraction surface of the organic EL panel **11**.

[0030] Comparative example 1 is one in which a filter is affixed to the organic EL panel, and comparison example 2 is one in which a transparent LCD filter (Nitto Denko type NPF-F1228DU, with a transmittance of 48.2% and polarization of 84.7%) is fixed.

[0031] The contrast and luminance of organic EL panels fabricated as described above were measured. For this

measurement, the contrast was defined as the luminance with a voltage applied (luminescent condition) with respect to the luminance with no voltage applied (non-luminescent condition), under an illumination of 300 luxes.

[0032] FIG. 3 shows the results of measuring the contrast and luminance of the above-noted embodiment and the comparative examples. From this table, it can be seen that the present invention provides an organic EL panel with high visibility, which achieves both a sharp image and prevention of glare.

[0033] When the polarization of the polarizing layer exceeds 70%, the luminance passing through the filter **4** is decreased in comparison with the luminance without a filter. That is, if the desired intensity is to be obtained through a filter, it is necessary to further increase the luminance of an EL panel, the result being an increase in the current consumption. On the other hand, if the polarization is below 50%, the circular polarization function of $\lambda/4$ plate is lost, resulting in reflection and glare of external light. Therefore, the polarization range is ideally between 50% and 70%.

[0034] If the haze value of the anti-glare layer exceeds 15% of the light from the panel, the proportion of scattered light becomes large, thereby sacrificing screen sharpness, and if the haze value is below 5%, it was found that the anti-glare layer fails to function. Therefore, the haze value range is ideally between 5% and 15%.

[0035] In the foregoing description, a $\lambda/4$ plate is laminated onto a glass substrate of an organic EL panel, and a polarizing layer is laminated over the $\lambda/4$ plate, it is alternately possible to achieve the object of the present invention by laminating a polarizing layer onto the glass substrate of an organic EL panel, and then laminating the $\lambda/4$ plate over the polarizing layer.

[0036] By adopting the configurations described in detail above, an organic EL panel and associated filter according to the present invention provide a highly visible organic EL panel that achieves both prevention of glare and a sharp image.

What is claimed is:

1. A filter of an organic EL panel formed by a quarter-wave layer ($\lambda/4$ plate), a polarizing layer and an anti-glare layer, wherein a polarization of said polarizing layer is between 50% and 70%.
2. A filter of an organic EL panel according to claim 1, wherein a haze value of said anti-glare layer is between 5% and 15%.
3. An organic EL panel provided with a filter formed by a quarter-wave layer, a polarizing layer and an anti-glare layer on a light-exiting surface thereof, wherein a polarization of said polarizing layer is between 50% and 70%.
4. An organic EL panel according to claim 3, wherein a haze value of said anti-glare layer is between 5% and 15%.
5. An organic EL panel according to claim 3, wherein said quarter-wave layer is laminated onto a glass substrate of said organic EL panel, and said polarizing layer is laminated onto said quarter-wave layer ($\lambda/4$ plate).
6. An organic EL panel according to claim 3, wherein said polarizing layer is laminated onto a glass substrate of said organic EL panel, and said quarter-wave layer ($\lambda/4$ plate) is laminated onto said polarizing layer.

专利名称(译)	有机EL面板和过滤器		
公开(公告)号	US20030203235A1	公开(公告)日	2003-10-30
申请号	US10/400862	申请日	2003-03-27
[标]申请(专利权)人(译)	石井育子 SAKAGUCHI YOSHIKAZU		
申请(专利权)人(译)	石井育子 SAKAGUCHI YOSHIKAZU		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	ISHII IKUKO SAKAGUCHI YOSHIKAZU		
发明人	ISHII, IKUKO SAKAGUCHI, YOSHIKAZU		
IPC分类号	H05B33/02 G02B5/30 H01L51/50 H01L51/52 H05B33/00 H05B33/12 H05B33/14 B32B9/00		
CPC分类号	G02B5/3033 Y10S428/917 H01L51/5281 Y10T428/31504		
优先权	1999206530 1999-07-21 JP		
其他公开文献	US6706425		
外部链接	Espacenet USPTO		

摘要(译)

在由四分之一波长层 ($\lambda/4$ 板) , 偏振层和防眩光层形成的有机EL面板的滤光器中 , 偏振层的偏振在50%和70%之间 , 并且雾度值防眩光层的含量为5%至15%。

