



US 20050052350A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0052350 A1**

Mizukoshi et al.

(43) **Pub. Date:** **Mar. 10, 2005**

(54) **SETTING BLACK LEVELS IN ORGANIC EL DISPLAY DEVICES**

(30) **Foreign Application Priority Data**

Mar. 6, 2003 (JP) ..... 2003-60541

(75) Inventors: **Seiichi Mizukoshi, Kanagawa (JP); Nobuyuki Mori, Saitama (JP); Kouichi Onomura, Kanagawa (JP); Makoto Kohno, Kanagawa (JP)**

**Publication Classification**

(51) **Int. Cl. 7** ..... **G09G 3/20**

(52) **U.S. Cl.** ..... **345/55**

Correspondence Address:

**Pamela R. Crocker  
Patent Legal Staff  
Eastman Kodak Company  
343 State Street  
Rochester, NY 14650-2201 (US)**


(73) **Assignee: Eastman Kodak Company**


(21) **Appl. No.: 10/767,288**

(22) **Filed: Jan. 28, 2004**


**ABSTRACT**

To appropriately adjust luminance and a black level even when characteristics of an organic EL display element should be changed due to an environmental change or heat self-generation, to display a stable image. A current detector detects a level of a total panel current flowing in an organic EL panel. The detected level is subjected to A/D conversion before being supplied to an adder. Meanwhile, a video signal is supplied to a current calculator 24 to be converted into data corresponding to the level of a total panel current, before being supplied to the adder. The adder then compares an average total panel current level, estimated based on a video signal, and an actual total panel current level, to obtain a difference so that a black level for image data to be supplied to the panel is adjusted according to the difference.

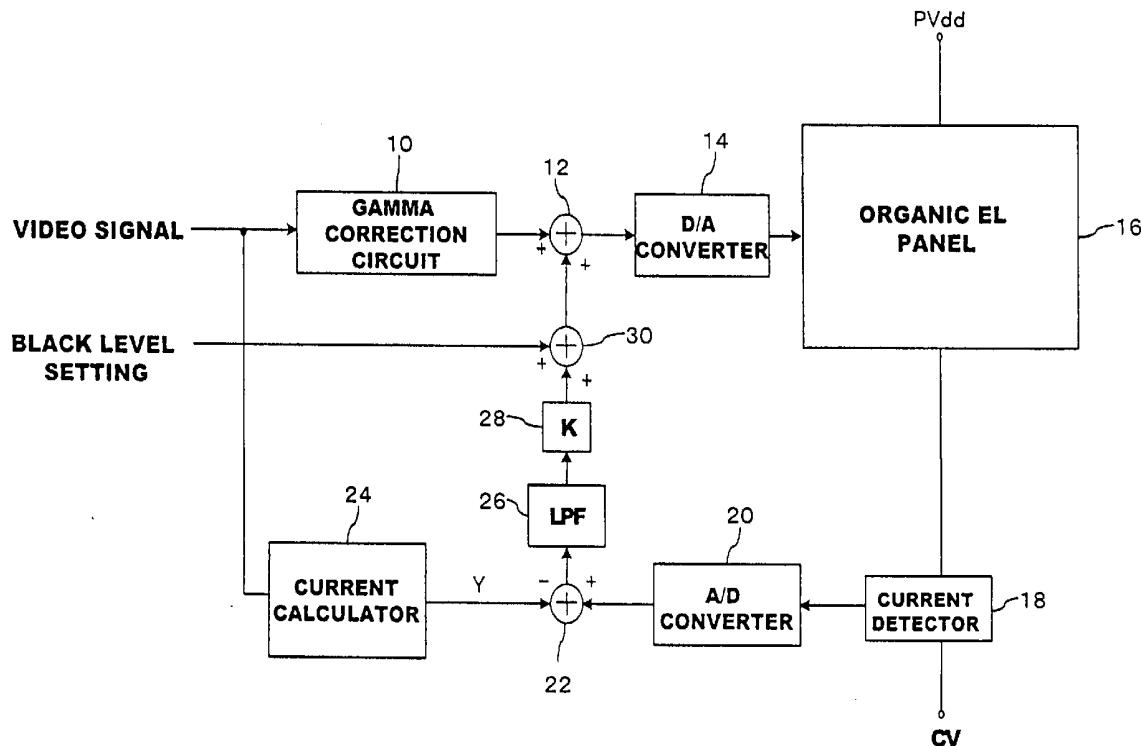


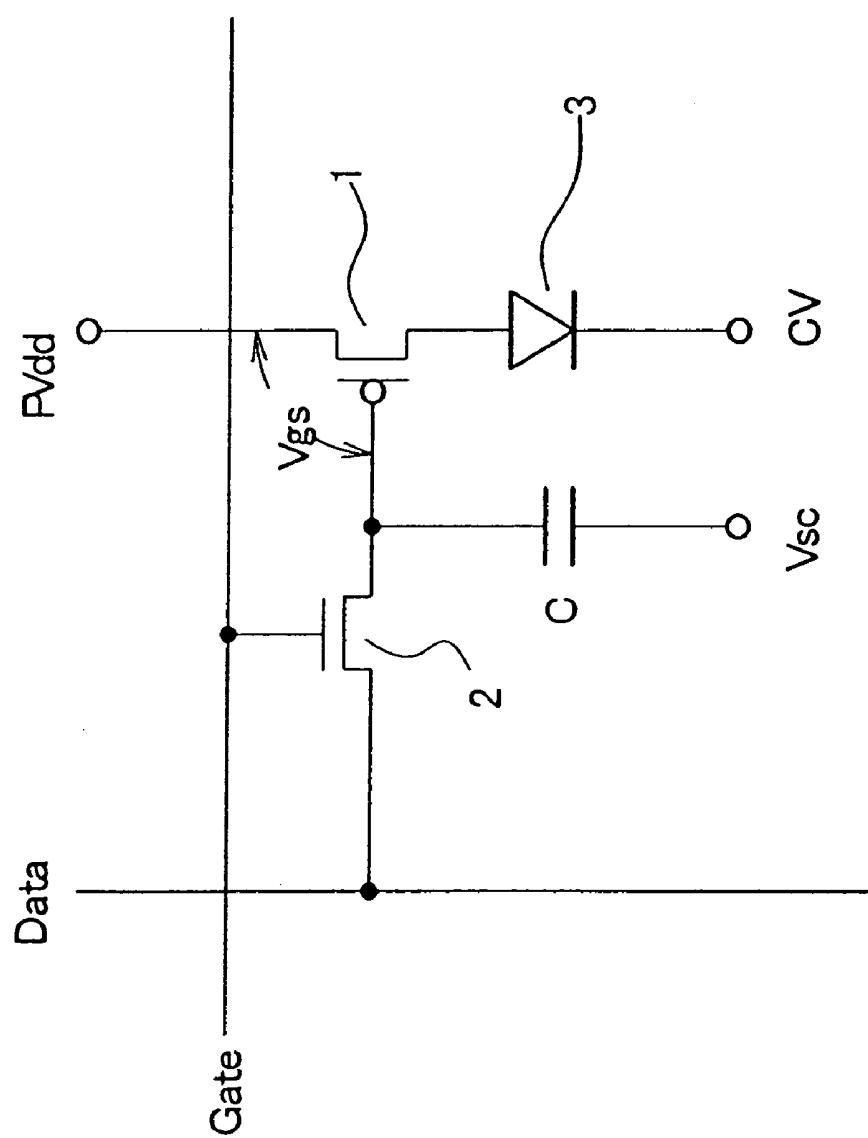

**FIG. 1**  
(PRIOR ART)

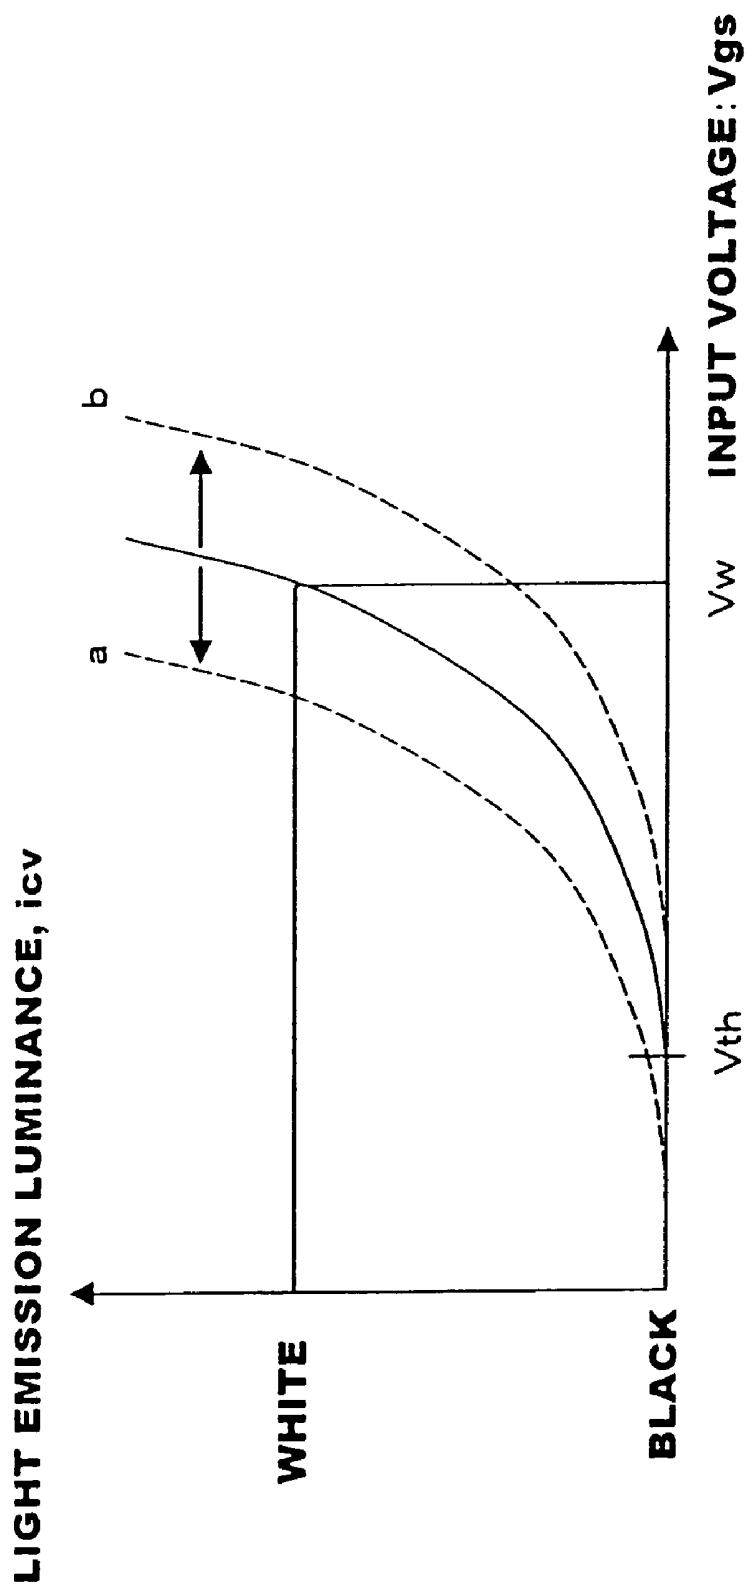

**Fig. 2**  
(Prior Art)

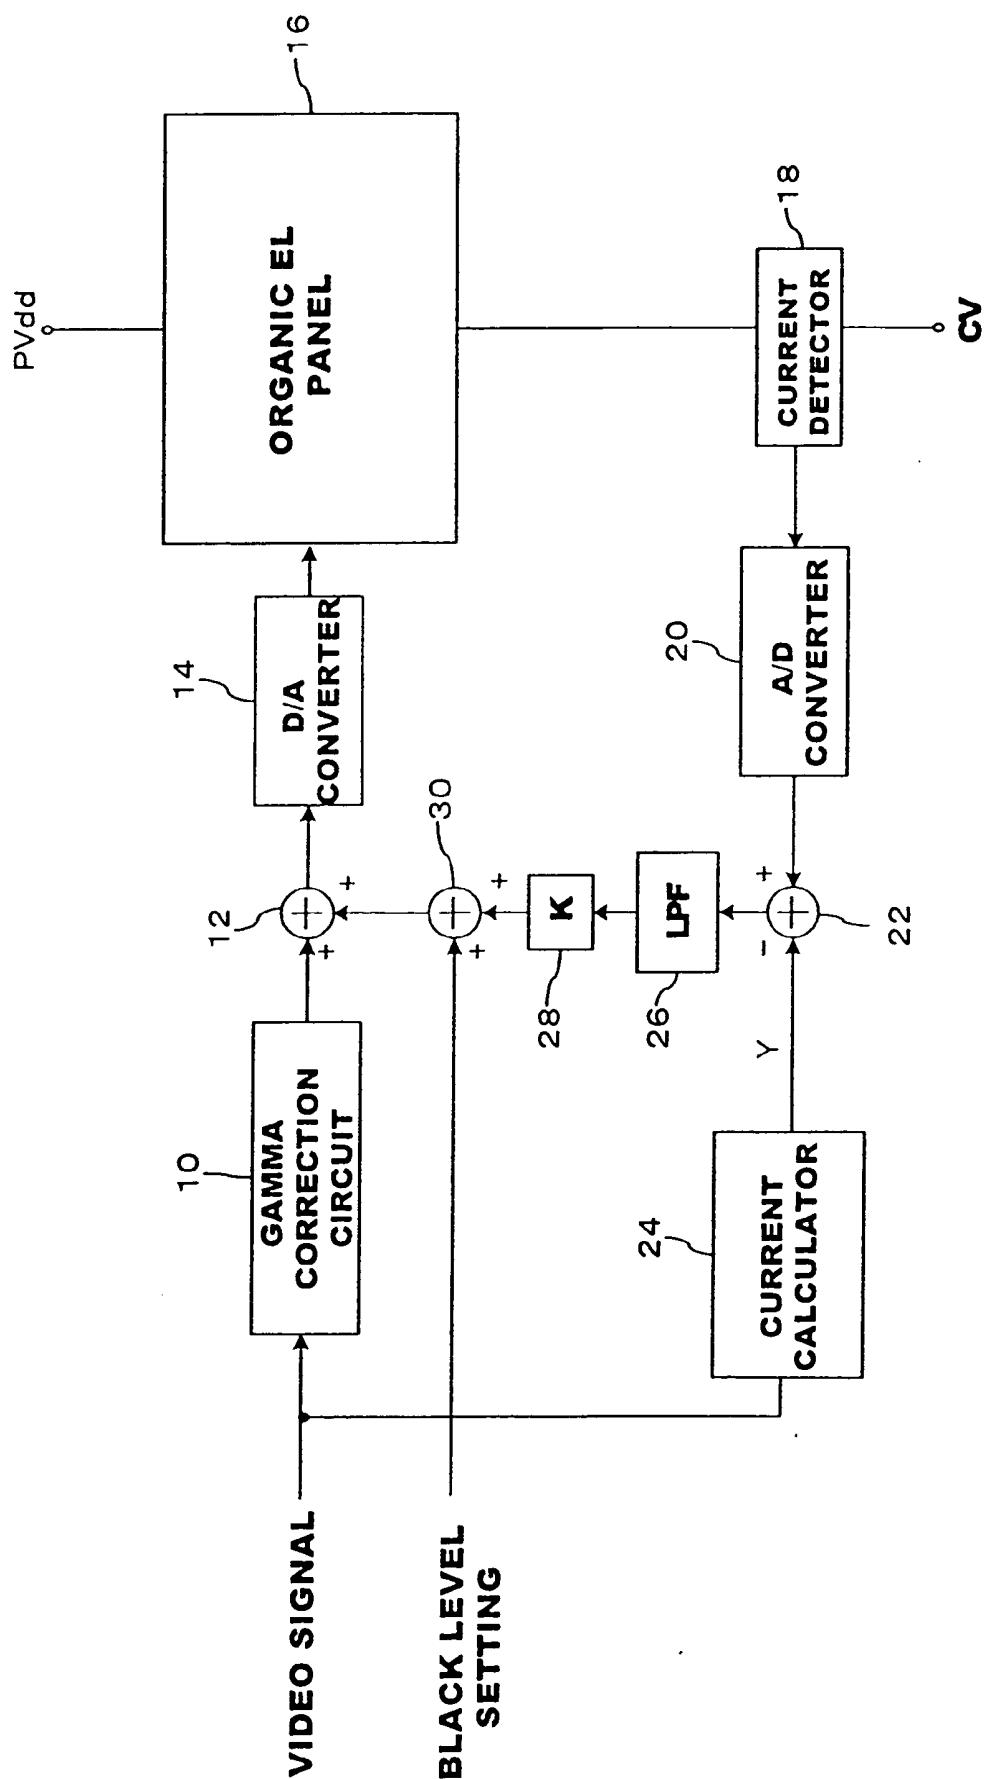**Fig. 3**



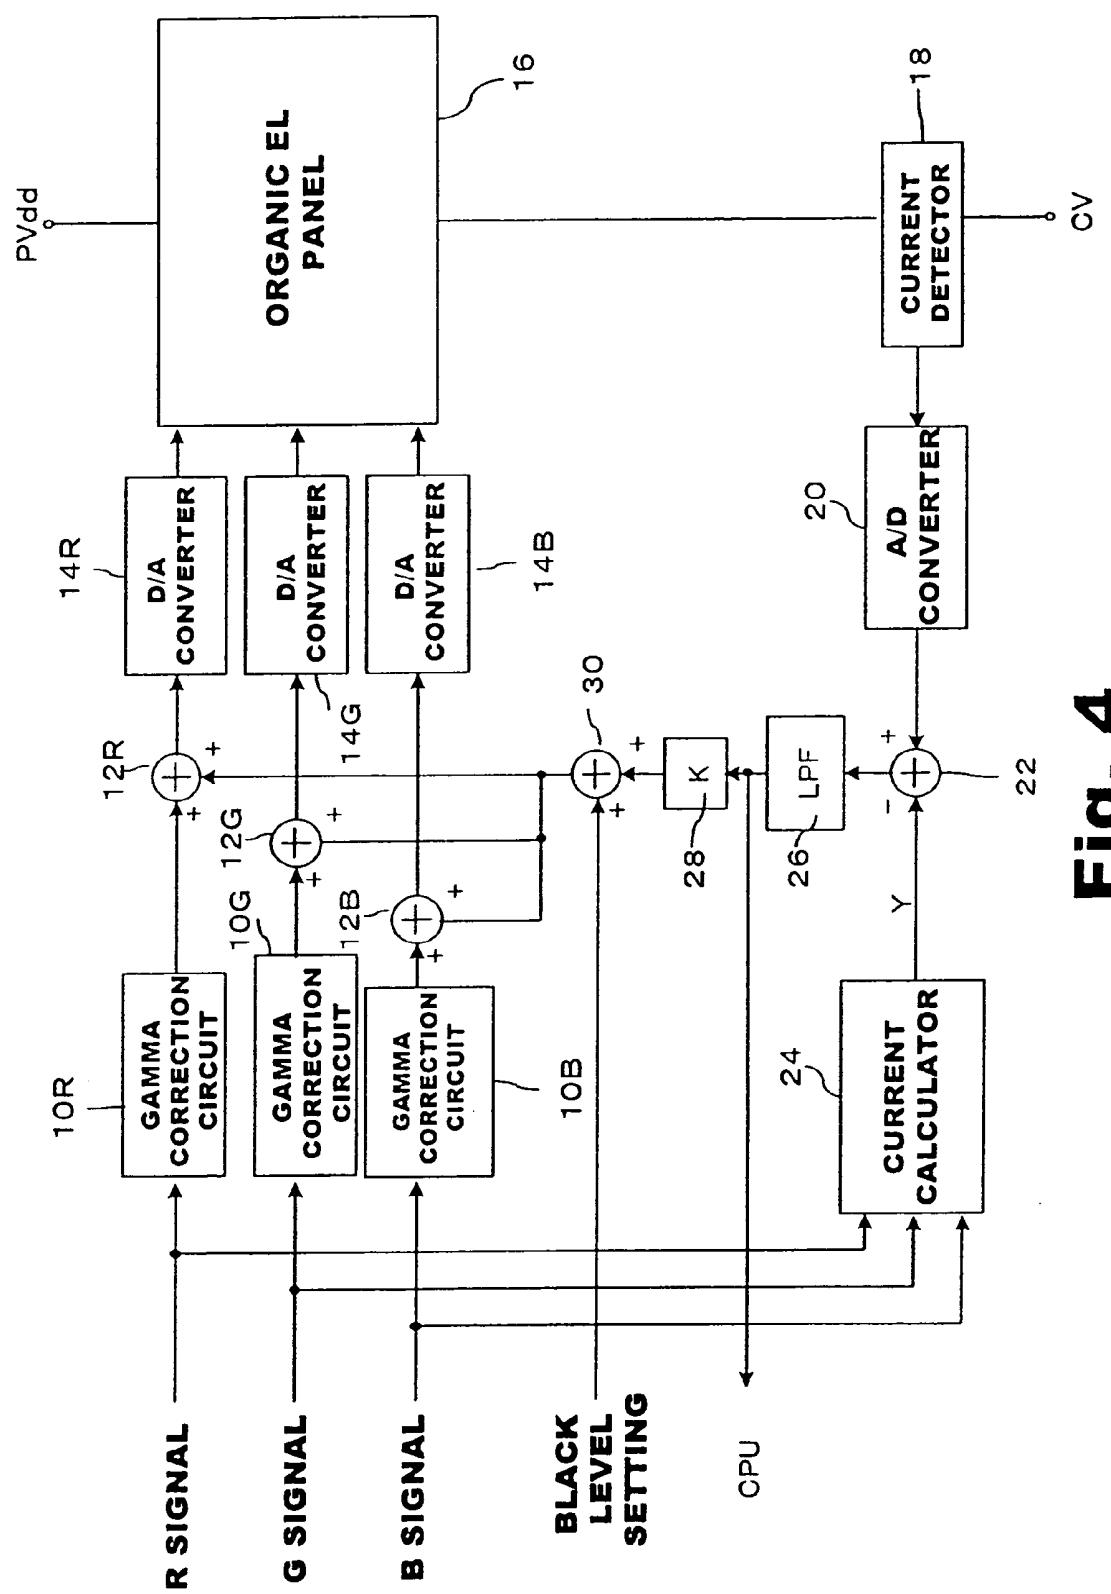



Fig. 4

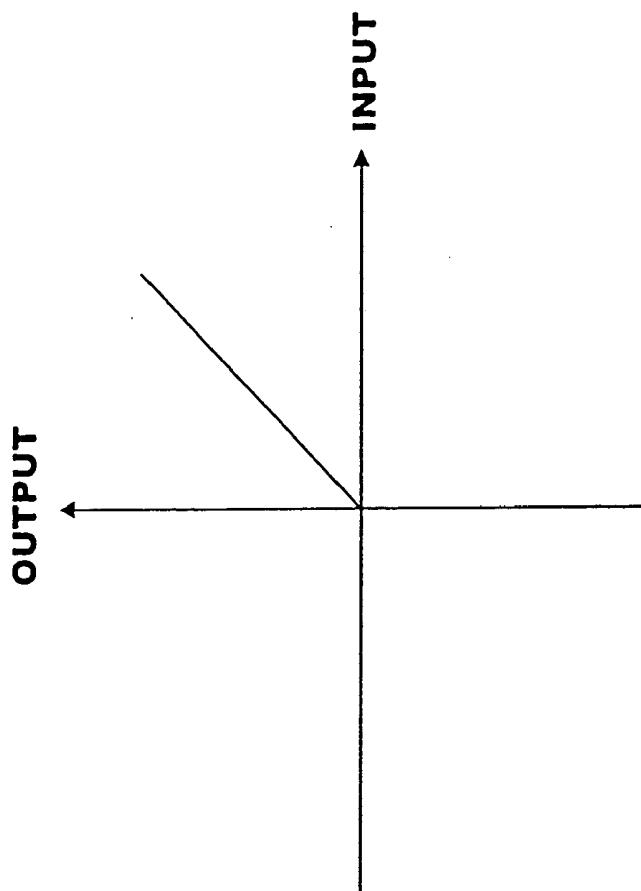

**Fig. 5B**

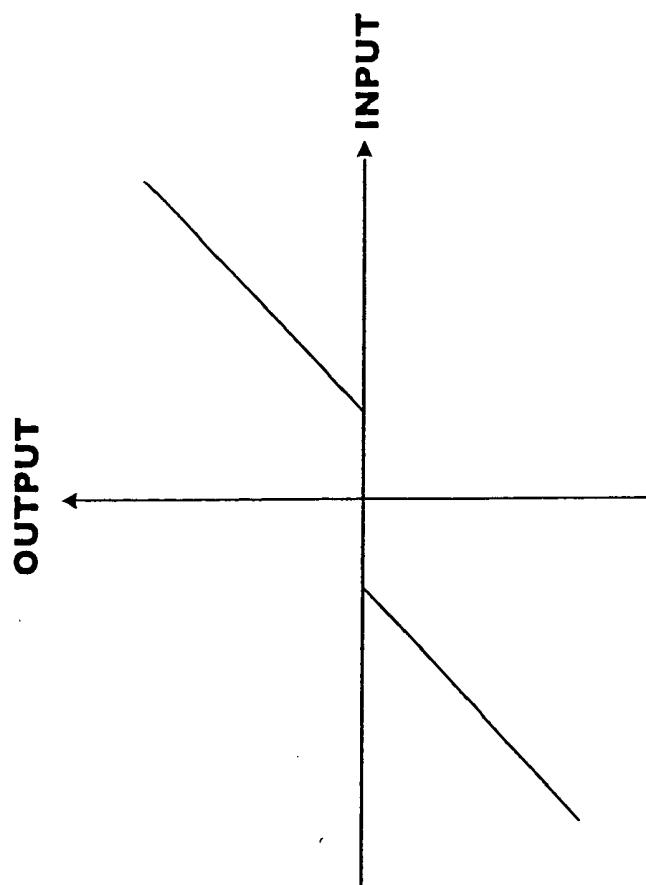

**Fig. 5A**

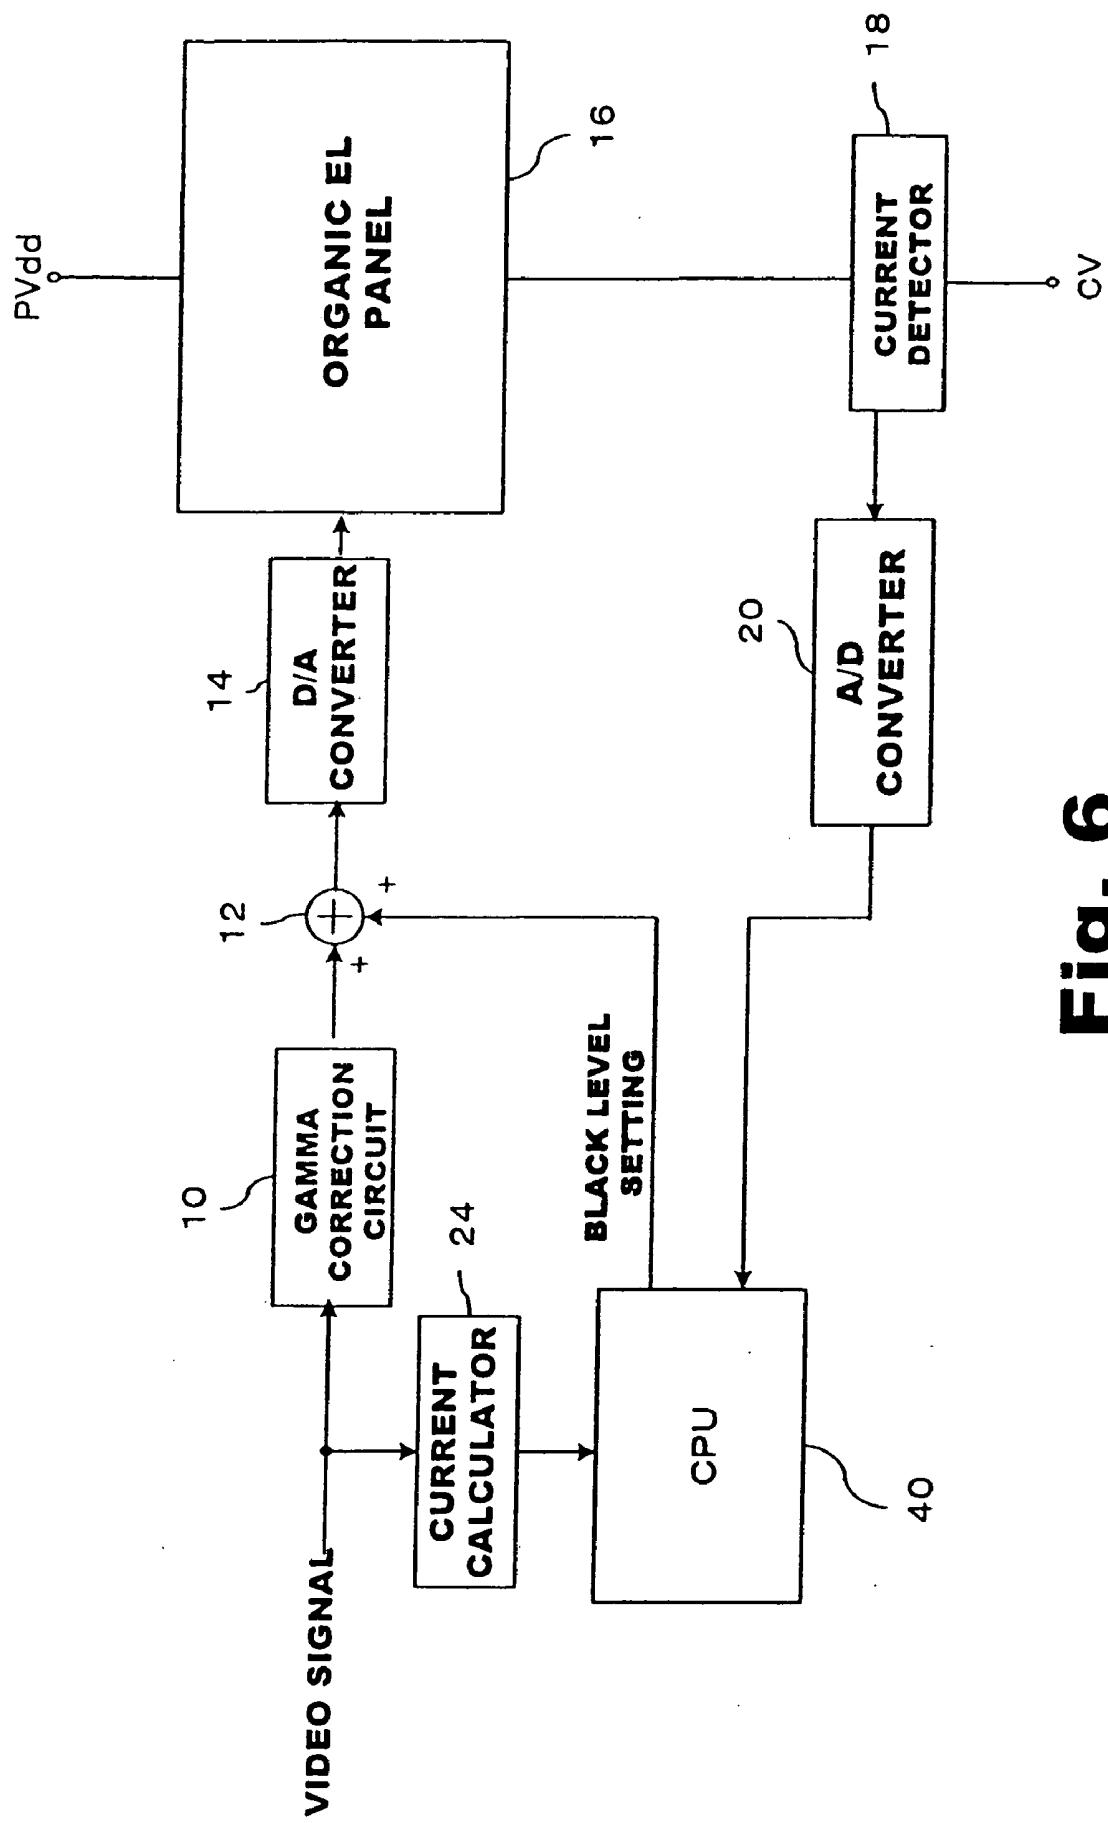**Fig. 6**

## SETTING BLACK LEVELS IN ORGANIC EL DISPLAY DEVICES

### FIELD OF THE INVENTION

[0001] The present invention relates to setting of a black level in an organic electroluminescent (EL) device.

### BACKGROUND OF THE INVENTION

[0002] FIG. 1 shows an example of a circuit structure for one pixel of an active-type organic EL display device (a pixel circuit). In this structure, a driving thin film transistor (TFT 1) of a P-channel type is connected, via its drain, to an anode of an organic EL element 3, via its source, to a power source line PVdd, and, via its gate, to a source of a selecting thin film transistor (TFT 2) of an N-channel type. The organic EL element 3 is further connected, via its cathode, to a cathode power source CV. The selected TFT 2 is further connected, via its drain, to a data line Data and, via its gate, to a gate line Gate. The gate of the driving TFT 1 is also connected to one end of a holding capacitor C, which is further connected, on its other end, to a capacitor power source line Vsc.

[0003] The gate line, which runs in the horizontal direction, is made an H level to thereby turn on the selected TFT 2. With the selected TFT 2 remaining in an ON state, a data signal having a voltage corresponding to a display luminance value is applied to the data line Data, which runs in a vertical direction, so that the data signal is held in the holding capacitor C. Then, the driving TFT 1 supplies a driving current according to the data signal to the organic EL element 3, which is thereby caused to emit light. The amount of light emission is substantially proportional to that of the driving current.

[0004] Here, in general, such a voltage Vth that causes a drain current to begin flowing at around a black level of an image is applied to between the gate of the driving TFT 1 and the power source line PVdd, and an image signal is given such an amplitude that can realize a predetermined level of luminance at around a white level.

[0005] FIG. 2 shows the relationship between a gate-source voltage Vgs of the driving TFT 1 (a voltage difference between the data line Data and a power source Pvdd) and a current icv flowing in the organic EL element 3 (corresponding to luminance). By determining a data signal such that a voltage Vth is given as a black level voltage and a voltage Vw is given as a white level voltage, color tones for the organic EL element 3 can be appropriately controlled.

[0006] The voltage Vth, however, is likely to change due to a change in temperature or external light. That is, upon change in an environment in which the panel is used or generation of heat by the panel itself, image luminance may change and flat black or shallow black may be caused. Moreover, an excessive current may flow into the panel, which may accelerate deterioration of an OLED element.

[0007] In view of the above, there has been disclosed a method for detecting total panel current to change contrast and/or a luminance level of an input signal based on a detection result in order to limit a current flowing into the display panel (See Japanese Patent Laid-open Publication No. 2002-251167).

[0008] This method, however, cannot compensate for a change in a black and/or white level caused due to an environmental change, as it can only limit a current flowing in the display panel. Thus, an appropriate display cannot be maintained should an environmental condition be changed.

### SUMMARY OF THE PRESENT INVENTION

[0009] It is an object of the present invention to display a stable image through appropriate adjustment of luminance and/or a black level even in the case where characteristics of an organic EL display element are changed due to an environmental change or self-generated heat.

[0010] This object is achieved by an organic EL display device having a display panel where a plurality of organic EL elements responsive to the display panel are arranged, comprising:

[0011] black level setting means for creating a driving command for each organic EL element, by shifting display data for each pixel relevant to an display-image to be displayed on a display panel, according to a black level voltage setting level;

[0012] display data calculating means for calculating a level of estimated current which corresponds to a current which flows in the display panel, based on the display data supplied to the display panel;

[0013] panel current detecting means for detecting the panel current flowing through all pixels of the display panel;

[0014] comparing means for comparing the value of the estimated current calculated by the display data calculating means and the level of panel current for corresponding display, which is detected by the panel current detecting means, to obtain a difference; and

[0015] adjusting means for adjusting the black level voltage setting value based on a result of the comparison by the comparing means.

[0016] As described above, according to the present invention, the level of an estimated panel current based on display data is compared with the level of an actually flowing panel current so that a black level voltage setting level or value is adjusted based on the comparison result.

[0017] In the above organic EL display device, preferably, the display data calculating means may calculate the level of an estimated current based on a current which would flow in the display panel upon ideal image data display, based on a total or average level of the display data, and the adjusting means may adjust the black level based on a difference obtained by the comparing means.

[0018] Preferably, the above organic EL display device may further include: environment estimating means for estimating an environment in which the organic EL display device is installed, according to a result of the comparison by the comparing means.

[0019] Environment to be estimated may include temperature and incident light. Estimation of such environmental condition makes it possible to apply adequate processing depending on the environmental condition. For example, should temperature increase, a cooling means may be acti-

vated and/or display luminance may be reduced. Moreover, should incident light be caused, image luminance may be increased.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0020] **FIG. 1** is a diagram showing a structure of a prior art pixel circuit;

[0021] **FIG. 2** is a diagram depicting a relationship between an input voltage relative to a driving TFT and a light emission luminance;

[0022] **FIG. 3** is a diagram showing a structure of an embodiment of the present invention;

[0023] **FIG. 4** is diagram showing a structure of another embodiment of the present invention;

[0024] **FIGS. 5A and 5B** are diagrams depicting an example of a loop gain; and

[0025] **FIG. 6** is a diagram showing a structure of still another embodiment of the present invention.

#### DETAILED DESCRIPTION OF THE INVENTION

[0026] In the following, preferred embodiments of the present invention will be described with reference to the following drawings.

[0027] **FIG. 3** shows a structure of a device of a preferred embodiment of the present invention. In this device, a video signal including image data for each pixel is input to a gamma correction circuit **10** for correcting a video signal according to predetermined gamma property so that the resultant image data has linear relationship with an amount of a current flowing in a pixel. A video signal subjected to gamma correction is supplied to an adder **12** for addition of a black level setting level, so that an output of the adder **12** resultantly constitutes data concerning a driving current for each pixel.

[0028] The output of the adder **12** is supplied to a D/A converter **14** for conversion into an analog signal, which is supplied to an organic EL panel **16**, which includes pixel circuits, as shown in **FIG. 1**, arranged in a matrix.

[0029] Note that a signal from the D/A converter **14** is tentatively stored in a peripheral driving circuit of the organic EL panel **16**, and that a driving TFT for each pixel is driven based on each pixel signal stored, whereby a corresponding organic EL element is caused to emit light.

[0030] The organic EL panel **16** is also connected to a power source PVdd to receive a driving current for all of the organic EL elements **16** constituting the organic EL panel **16**, and further to a current detector **18** which detects the entire current flowing in the organic EL panel **16**. That is, a current from the power source PVdd is supplied into each of the organic EL elements according to the received display data, and the total of the current, or a total panel current, is detected by the current detector **18**. As each of the pixel circuits of the organic EL panel **16** has holding capacitor and continues light emission for substantially one frame, a total panel current for one frame can be detected by the current detector **18**. It should be noted that, as data is written in dot sequence, the detection of a total panel current may prefer-

ably be applied during a vertical blinking period subsequent to completion of writing of all data into the organic EL panel **16**.

[0031] Also note that, instead of a total panel current for one frame, as described above, an accumulated current throughout a few frames may be detected, and an average current may be calculated from the accumulated current. Alternatively, an average or accumulated current for a predetermined period within one frame may be detected.

[0032] A detection result by the current detector **18** is converted into digital data in an A/D converter **20** and supplied to an adder **22**, which is also supplied with estimated current data for an input video signal as minus data from a current calculator **24**. The adder **22** then compares the estimated current data for an input video signal, which corresponds to panel current flowing in the organic EL panel **16**, and current level data (a total panel current) corresponding to emission luminance in the organic EL panel **16** and detected by the current detector **18**, to obtain a difference.

[0033] Here, it should be noted that a level detected by the current detector **18** corresponds to estimated current data for an input video signal for one frame because, where the estimated current data for an input video signal corresponds to a panel current flowing in the organic EL panel **16**, a level detected by the current detector **18** concerns a current based on luminance data for each pixel given gamma correction and black level adjustment and supplied to the organic EL panel **16**.

[0034] Estimated current data for a video signal is obtained by the current calculator **24** as follows. That is, using  $A=I_{yo}/yo$ , for example, the current calculator **24** multiplies average image data for one frame by  $A$  to obtain  $Y$  to use as an input to the adder **22**, that is, estimated current data for a video signal. In the above,  $I_{yo}$  indicates a total current flowing in a pixel section (a total panel current) when displaying an image of an average  $y_0$  level (luminance data for all pixels being  $y_0$ ) with adjustment so as to attain the optimum black level and the optimum maximum luminance under normal using condition. That is,  $I_{yo}$  indicates a total panel current subjected to gamma correction and black level adjustment.

[0035] Therefore, an output from the current calculator **24** indicates a level of the total panel current subjected to gamma correction and black level adjustment, which flows during a period when image data of a video signal is displayed for one frame on the organic EL panel **16**.

[0036] Note that, in the case where the current detector **18** detects a current level, such as an accumulated or average current level for a few frames, other than a level of a total panel current for one frame, the level calculated by the current calculator **24** must be compatible with the level.

[0037] As described above, a difference between a total current (an estimated current) which should flow through the organic EL panel **16** in view of the luminance of a video signal for one frame in order to achieve appropriate display and a detected total panel current actually flowing through the organic EL panel **16** is obtained by the adder **22**. The difference is supplied to a low pass filter (LPF) **26** to be smoothed to thereby remove a large variation so that instability due to abrupt response can be prevented. The LPF **26** supplies an output to a K multiplier **28** for multiplication by

a loop gain K before the resultant output is supplied to an adder 30. Note that a loop gain K determines an extent of adjustment. Specifically, a larger loop gain K can attain a level closer to a setting level (i.e., an initial adjustment level).

[0038] The adder 30, which is also supplied with a black level setting level, adds the black level setting level to an output from the K multiplier 28. Here, note that the black level setting level is data in association with the optimum black level achieved under normal using condition, corresponding to a voltage  $V_{th}$  in FIG. 2. That is, data on the optimum black level is adjusted based on the data from the adder 22, as described above, and a result is supplied to the adder 12.

[0039] Therefore, should the relationship between the pixel luminance and the input voltage be changed from the characteristic indicated by the solid line in FIG. 2 to that by the dot line a or b due to a change in an operating or environmental condition, a black level is automatically adjusted accordingly.

[0040] That is, when a voltage  $V_{th}$  is changed due to a change in temperature or external light, a total panel current detected by the current detector 18 is changed accordingly, and the amount of the change is extracted as a difference by the adder 22. After being multiplied by a predetermined gain K, the difference is added to display data via the adders 30 and 12. As a result, change in image luminance, as well as flat black or shallow black phenomenon, due to a change of a voltage  $V_{th}$  can be effectively prevented.

[0041] Although a monochrome panel has been described in the above, identical control can be applied to a color panel if a current for each color can be individually detected. In actuality, however, it is often a case with a color panel that a current for each color cannot be individually measured from outside. In order to address this problem, a device of the present invention for use with a color panel comprises gamma correction circuits 10R, 10G, 10B, adders 12R, 12G, 12B, and D/A converters 14R, 14G, 14B, as shown in FIG. 4, and receives a red (R) signal, a green (G) signal, and a blue (B) signal, separately.

[0042] Specifically, an R signal, a G signal, and a B signal are input to the gamma correction circuit 10R, 10G, 10B, respectively, and given gamma correction. Outputs from the gamma correction circuits 10R, 10G, 10B are input to the adders 12R, 12G, 12B for addition of respective adjusted black level adjustment levels supplied from the adder 30. Outputs from the adders 12R, 12G, 12B are converted into analog signals in the D/A converters 14R, 14G, 14B, and supplied to the organic EL panel 16. The organic EL panel 16 has separate RGB display pixels, which are controlled for light emission according to the respective RGB luminance signals to achieve the color display.

[0043] Here, the current calculator 24 in this device applies  $Y = R \times Ar + G \times Ag + B \times Ab$ , wherein R, G, B are luminance data of RGB signals input, respectively, and  $Ar = Ir_0 / r_0$ ,  $Ag = Ig_0 / g_0$ ,  $Ab = Ib_0 / b_0$ . Further,

[0044]  $Ir_0$  indicates a total panel current flowing when displaying a red pixel with an average level  $r_0$  with adjustment so as to attain the optimum black level and the optimum maximum luminance under normal using condition;

[0045]  $r_0$  indicates an average level for red still image data for one frame, which is used in  $Ir_0$  measurement;

[0046]  $Ig_0$  indicates a total panel current flowing when displaying a green pixel with an average level  $g_0$  with adjustment so as to attain the optimum black level and the optimum maximum luminance under normal using condition;

[0047]  $g_0$  indicates an average level for green still image data for one frame, which is used in  $Ig_0$  measurement;

[0048]  $Ib_0$  indicates a total panel current flowing when displaying a blue pixel with an average level  $b_0$  with adjustment so as to attain the optimum black level and the optimum maximum luminance under normal using condition; and

[0049]  $b_0$  indicates an average level for blue still image data for one frame, which is used in  $Ib_0$  measurement.

[0050] That is, a total of the levels of currents for displaying RGB colors, each being determined according to a luminance level of each of the RGB signals, is obtained and compared with a level of total panel current actually flowing in the panel, and the adder 22 outputs a difference. Therefore, a change in the actual flowing total panel current can be compensated for based on a difference between an average total panel current based on the input RGB signals and an actually flowing total panel current. This makes it possible to attain appropriate display all the time.

[0051] Alternatively, as shown in FIG. 4, a smoothed difference signal output from the LPF 26 may preferably be supplied to the CPU 40, so that the CPU 40 can read a level of an output from the LPF 26 or the adder 22 when displaying a particular image, to thereby know occurrence of a change, if any, in environmental condition.

[0052] For example, when the panel characteristic is vulnerable only to a temperature change or when a change in environmental condition other than temperature and a resultant change on the panel characteristic are known, occurrence of a change in temperature can be known with reference to this value. Similarly, in the case where a change in temperature or in other environmental condition that is caused other than presence of light incident into the panel is known, it is also possible to know presence of light incident to the panel.

[0053] When such an environmental change is known, appropriate processing can be taken. For example, to suppress heat generation by reducing luminance or ceasing display. For another example, to cool the device by using a fan or a cooling element. Moreover, to display in an appropriate manner with the presence of an incident light by increasing luminance. Alternatively, a message may be displayed, suggesting a measurement needs to be taken for heat increase or light incidence.

[0054] FIG. 5 shows an example of characteristics of a device which can be used in the place of an K-multiplier. That is, as shown in FIG. 5a, no adjustment is made, that is,  $K=0$ , while a voltage  $V_{th}$  varies within a predetermined range, and once a voltage  $V_{th}$  varies to exceed a predetermined value, a voltage  $V_{th}$  is adjusted using K of a prede-

terminated level, so that an adjustment amount which is determined to be proportional to the difference is output.

[0055] Alternatively, as shown in FIG. 5b, an adjustment amount 0 may be output in response to an input of a negative value, whereby a shallow black phenomenon alone can be corrected. As a further alternative, an adjustment amount 0 may be output in response to an input of a positive value, whereby a flat black phenomenon alone can be corrected.

[0056] FIG. 6 shows a structure of another device which is used for the present invention. With this structure, an output of the A/D converter 20 is supplied to the CPU 40, which also receives an output from the current calculator 24, so that the CPU 40 outputs an adjusted black level setting level to the adder 12.

[0057] Specifically, the CPU 40 regularly receives a total panel current value from the A/D converter 20, compares the level with a level of a current which should flow in the panel in order to attain appropriate display for a currently displayed image, to estimate variation in a voltage  $V_{th}$ , and adjusts a black level setting level accordingly. That is, the CPU 40 performs operations of all of the adder 22, the LPF 26, the K multiplier 28, and the adder 30, shown in FIG. 3. The CPU 40 may be able to additionally perform an operation of the current calculator 24.

[0058] Note that this structure can also accommodate full-color (RGB) display, similar to the structure of FIG. 4.

[0059] Alternatively, a dummy pixel may be provided on the panel so that the characteristic of the pixel is monitored while operating the panel, so as to apply the above-described control. Specifically, a dummy pixel is provided in an area which is covered so as not to emit light or where no displayed image is shown, and desired display data is supplied to the dummy pixel for detection of a current then flowing in the dummy pixel. A value of the detected, actually flowing current is compared with a value of an estimated current so that any change in environmental conditions in which the panel is installed can be reliably detected.

[0060] As described above, according to this embodiment, a difference between a total or average of image data for one or more frames of an image which drives a panel and a total panel current flowing through all of the pixels of the panel is fed back to be reflected in a black level voltage correction value to be input to the panel so that the optimum black input voltage can be applied to the panel even when a voltage  $V_{th}$  should be changed.

[0061] As described above, with an active-type organic EL panel, generally, data for each pixel is held for one frame by a capacitor connected to the gate of a pixel driving TFT. Therefore, with a structure in which a current of an amount proportional to image data is supplied to a pixel, a total amount of panel current held in a pixel section of an OLED panel as of a particular moment must be proportional to the total amount of image data having been supplied to the OLED panel by a moment prior to the particular moment by one frame. When the proportional constant is measured in advance, a total amount of current in the pixel section for each frame can be estimated based on image data.

[0062] When the total amount of the panel current is larger than the estimated level, it is assumed that a voltage  $V_{th}$  has been shifted in the direction a in FIG. 2. Therefore, a black

level for a signal to be input to the panel is shifted in the same direction. On the contrary, when the total amount of the panel current is smaller than the estimated value, it is assumed that a voltage  $V_{th}$  has been shifted in the direction b in FIG. 2. Therefore, a black level for a signal is shifted in the same direction.

[0063] This arrangement can effectively prevent an image luminance change, as well as flat black or shallow black phenomenon, due to a change of a voltage  $V_{th}$ . This can achieve stable image display without a change in luminance and/or a black level even when the characteristic of the organic EL display element should be changed due to an environmental change or heat self-generation.

[0064] As described above, according to the present invention, a panel current estimated based on display data is compared with an actually flowing panel current, so that a black level voltage setting value is adjusted based on a result of the comparison. This makes compensation possible for a change in characteristic of an organic EL element, if such a change occurs, due to an environmental change or any other reason, and enables maintenance of appropriate display.

[0065] The invention has been described in detail with particular reference to certain preferred embodiments thereof, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention.

#### [0066] Parts List

- [0067] 1 driving TFT
- [0068] 2 TFT
- [0069] 3 organic EL element
- [0070] 10 correction circuit
- [0071] 10R red correction circuit
- [0072] 10G green correction circuit
- [0073] 10B blue correction circuit
- [0074] 12 adder
- [0075] 12R red adder
- [0076] 12G green adder
- [0077] 12B blue adder
- [0078] 14 converter
- [0079] 14R red converter
- [0080] 14G green converter
- [0081] 14B blue converter
- [0082] 16 EL panel
- [0083] 18 current detector
- [0084] 20 A/D converter
- [0085] 22 adder
- [0086] 24 calculator
- [0087] 26 low pass filter
- [0088] 28 K multiplier
- [0089] 30 adder
- [0090] 40 CPU

What is claimed is:

1. An organic EL display device having a display panel where a plurality of organic EL elements responsive to the display panel are arranged, comprising:

black level setting means for creating a driving command for each organic EL element, by shifting display data for each pixel relevant to an display image to be displayed on a display panel, according to a black level voltage setting level;

display data calculating means for calculating a level of estimated current which corresponds to a current which flows in the display panel, based on the display data supplied to the display panel;

panel current detecting means for detecting the panel current flowing through all pixels of the display panel;

comparing means for comparing the value of the estimated current calculated by the display data calculating means and the level of panel current for corresponding display, which is detected by the panel current detecting means, to obtain a difference; and

adjusting means for adjusting the black level voltage setting value based on a result of the comparison by the comparing means.

2. The organic EL display device according to claim 1, wherein

the display data calculating means calculates the value of an estimated current based on the current which would flow in the display panel upon ideal image data display, based on a total or average value of the display data; and

the adjusting means adjusts the black level based on a difference obtained by the comparing means.

3. The organic EL display device according to claim 1, further comprising:

environment estimating means for estimating an environment in which the organic EL display device is installed, according to a result of the comparison by the comparing means.

\* \* \* \* \*

专利名称(译)	在有机EL显示设备中设置黑电平		
公开(公告)号	<a href="#">US20050052350A1</a>	公开(公告)日	2005-03-10
申请号	US10/767288	申请日	2004-01-28
[标]申请(专利权)人(译)	伊斯曼柯达公司		
申请(专利权)人(译)	伊士曼柯达公司		
当前申请(专利权)人(译)	全球OLED科技有限责任公司		
[标]发明人	MIZUKOSHI SEIICHI MORI NOBUYUKI ONOMURA KOUICHI KOHNO MAKOTO		
发明人	MIZUKOSHI, SEIICHI MORI, NOBUYUKI ONOMURA, KOUICHI KOHNO, MAKOTO		
IPC分类号	H01L51/50 G09G3/20 G09G3/30 G09G3/32 H05B33/14		
CPC分类号	G09G3/3233 G09G3/3291 G09G2300/0809 G09G2300/0842 G09G2310/027 G09G2360/16 G09G2320/029 G09G2320/04 G09G2320/041 G09G2320/0626 G09G2360/144 G09G2320/0238		
优先权	2003060541 2003-03-06 JP		
其他公开文献	US7164400		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

### 摘要(译)

即使当由于环境变化或热量自发生而改变有机EL显示元件的特性时，为了适当地调节亮度和黑电平，以显示稳定的图像。电流检测器检测在有机EL面板中流动的总面板电流的水平。检测到的电平在提供给加法器之前进行A / D转换。同时，视频信号被提供给电流计算器24，以便被提供给加法器之前被转换成与总面板电流的电平相对应的数据。然后，加法器比较基于视频信号估计的平均总面板电流水平和实际的总面板电流水平，以获得差异，从而根据差异调整要提供给面板的图像数据的黑色水平。。

