



US 20050093466A1

(19) **United States**

(12) **Patent Application Publication**
Matsumoto

(10) **Pub. No.: US 2005/0093466 A1**
(43) **Pub. Date: May 5, 2005**

(54) **ELECTROLUMINESCENT DISPLAY DEVICE**

Publication Classification

(75) Inventor: **Shoichiro Matsumoto, Ogaki-shi (JP)**

(51) **Int. Cl. 7** G09G 3/10

(52) **U.S. Cl.** 315/169.3

Correspondence Address:
Barry E. Bretschneider
Morrison & Foerster LLP
Suite 300
1650 Tysons Boulevard
McLean, VA 22102 (US)

(73) Assignee: **Sanyo Electric Co., Ltd., Moriguchi-city (JP)**

(21) Appl. No.: **10/948,742**

(22) Filed: **Sep. 24, 2004**

(30) **Foreign Application Priority Data**

Sep. 30, 2003 (JP) 2003-340650

(57) **ABSTRACT**

This invention provides an organic EL display device having a touch panel function and improves accuracy in positional detection on a display portion. A display panel is formed of first and second light source portions disposed along first and second sides of a display portion, and first and second light detecting portions disposed in sides opposite from the first and second sides respectively. A plurality of display pixels having organic EL elements for display is disposed in a matrix on the display portion. A plurality of organic EL elements for light sources is disposed in a row in each of the first and second light source portions. A plurality of detection light sensors and a reference light sensor are disposed in a row in each of the first and second light detecting portions. A comparator for comparing an output of each of the detection light sensors and an output of the reference light sensor is provided.

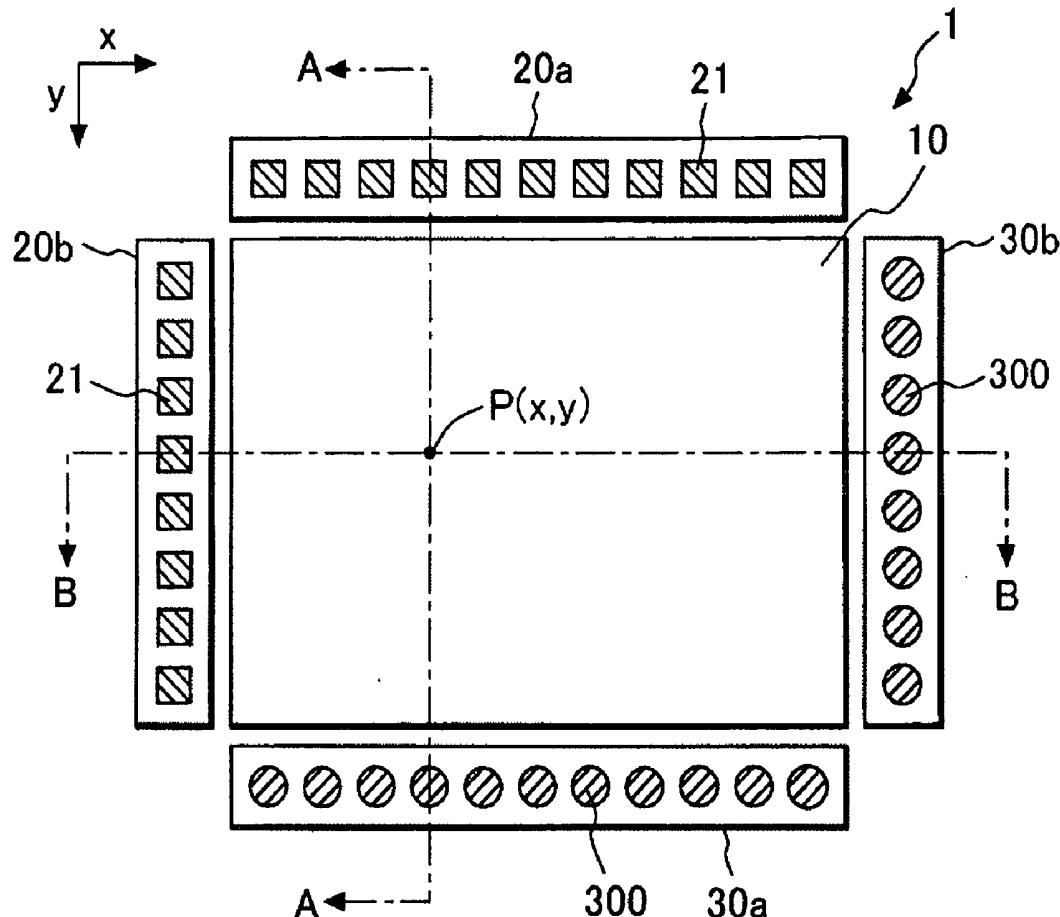





FIG. 1A**FIG. 1B****FIG. 1C**



FIG.2A**FIG.2B**

FIG.3A




FIG.3B

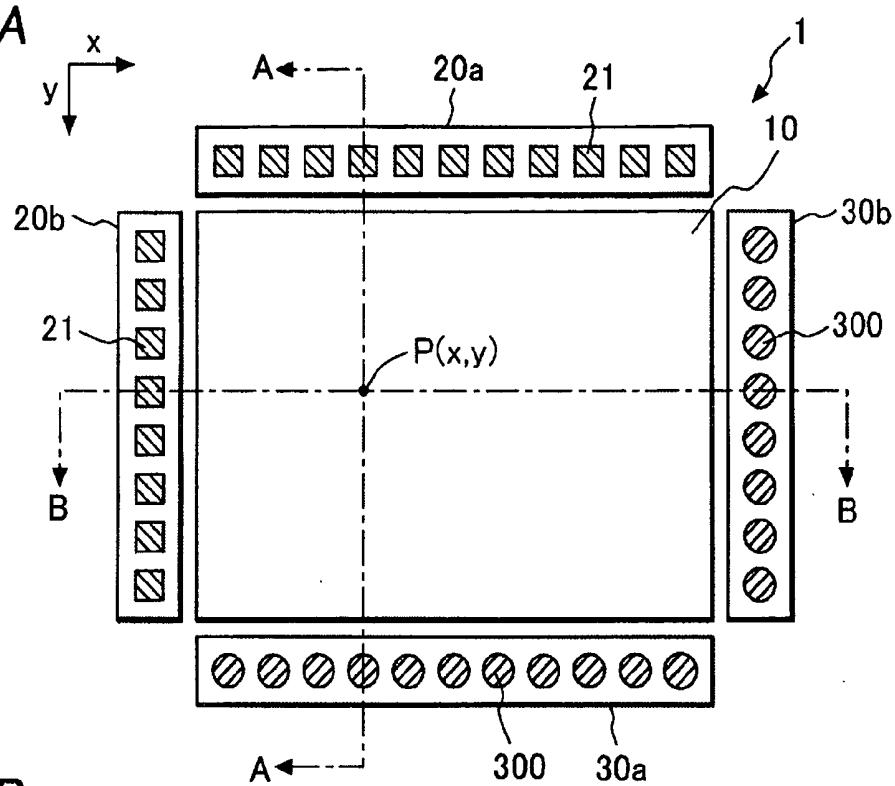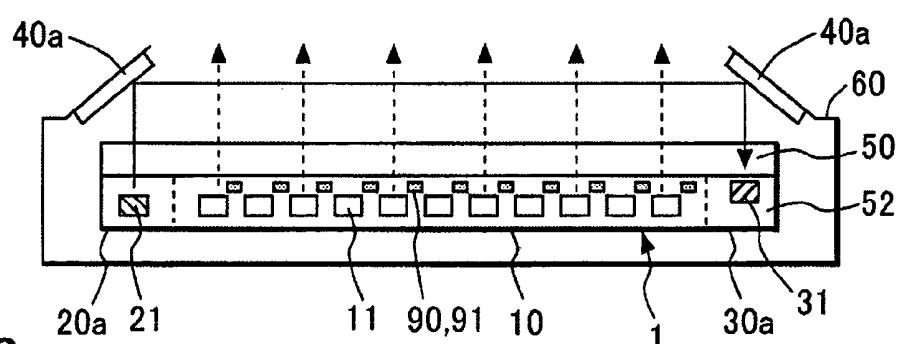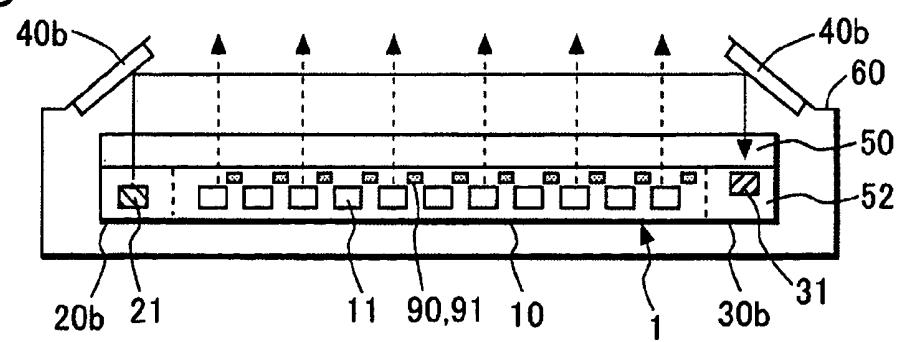


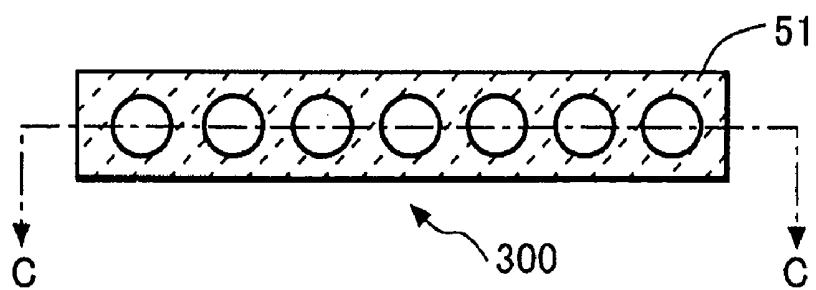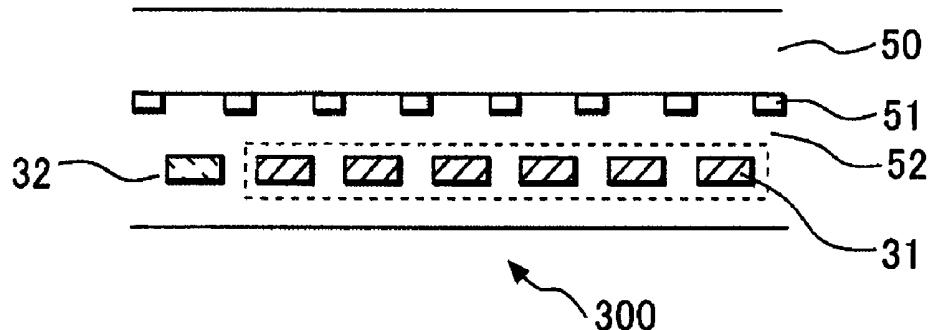FIG.3C

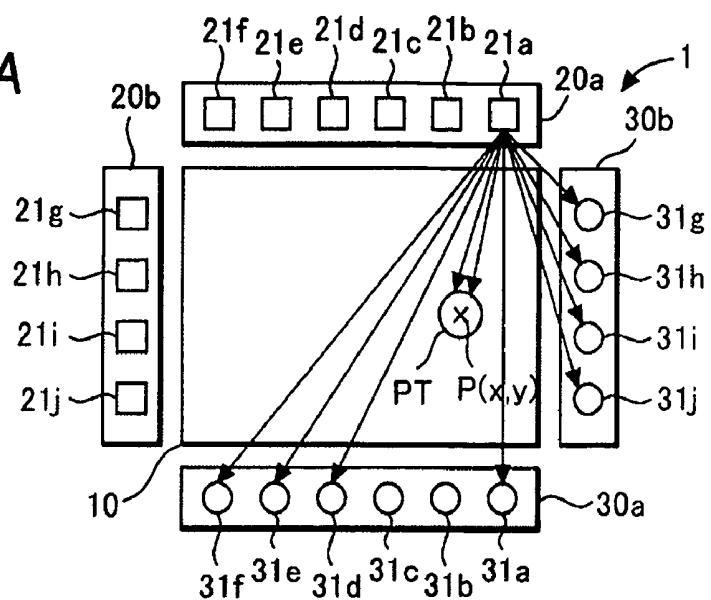


FIG.4

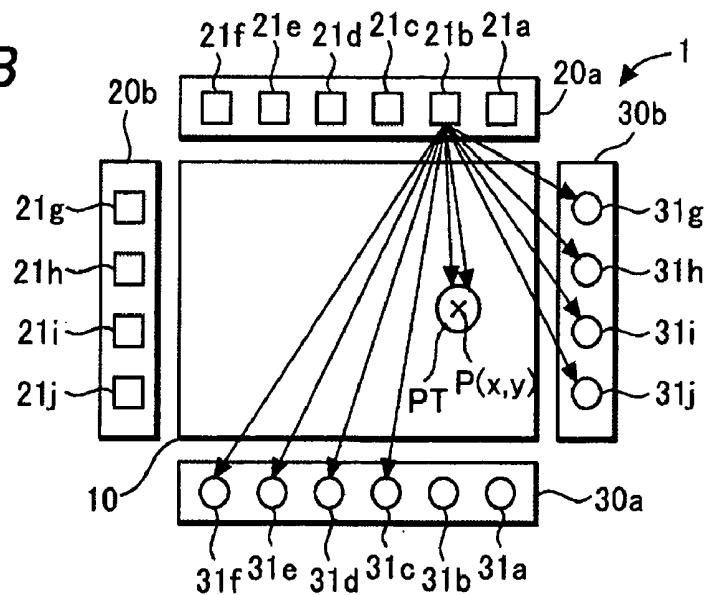


FIG.5


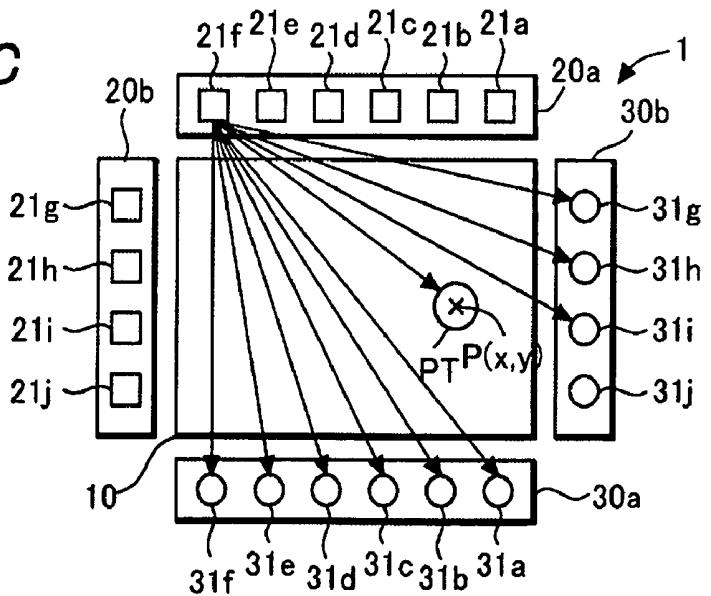


FIG.6

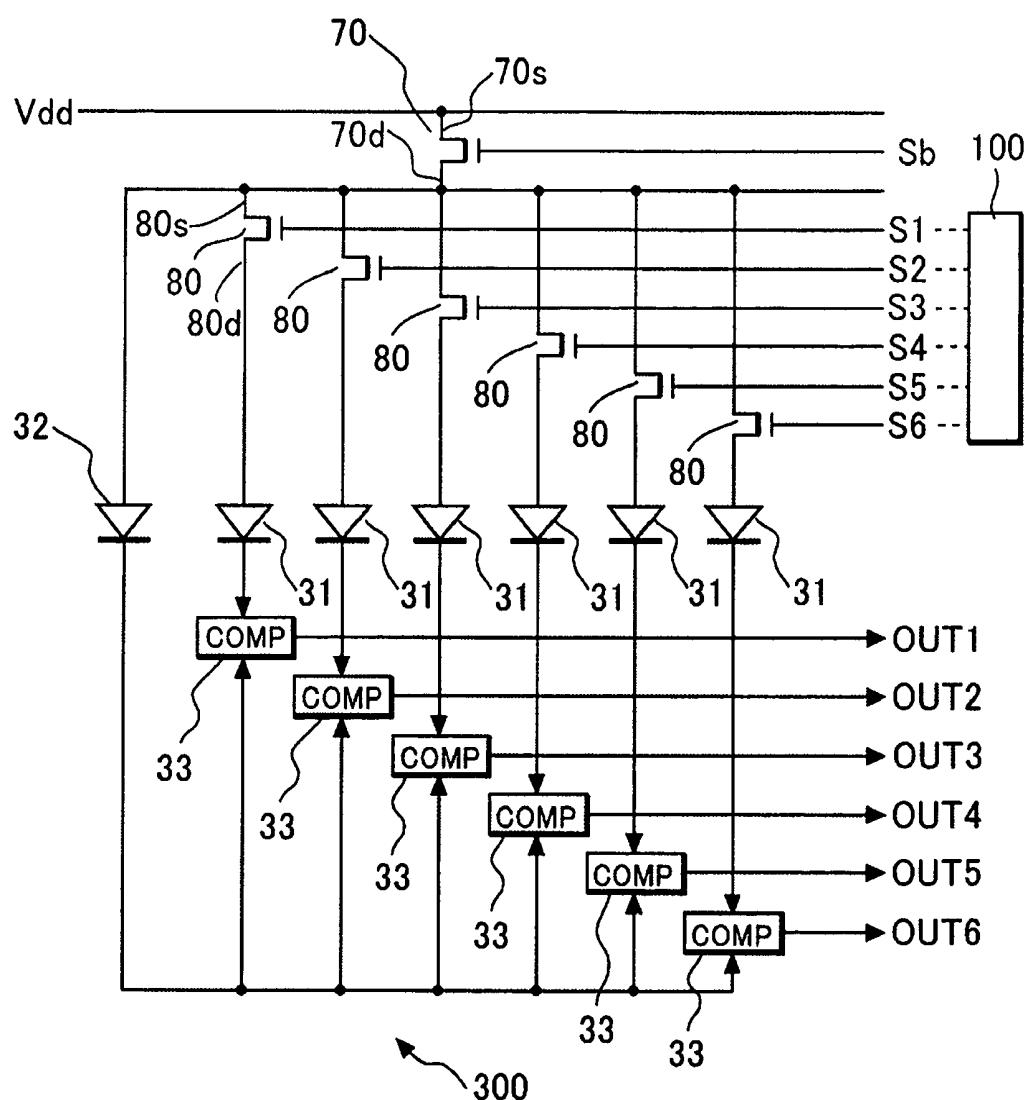

ELECTROLUMINESCENT DISPLAY DEVICE

CROSS-REFERENCE OF THE INVENTION

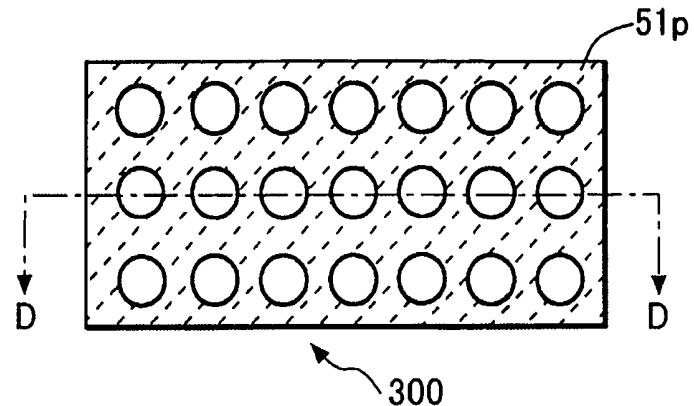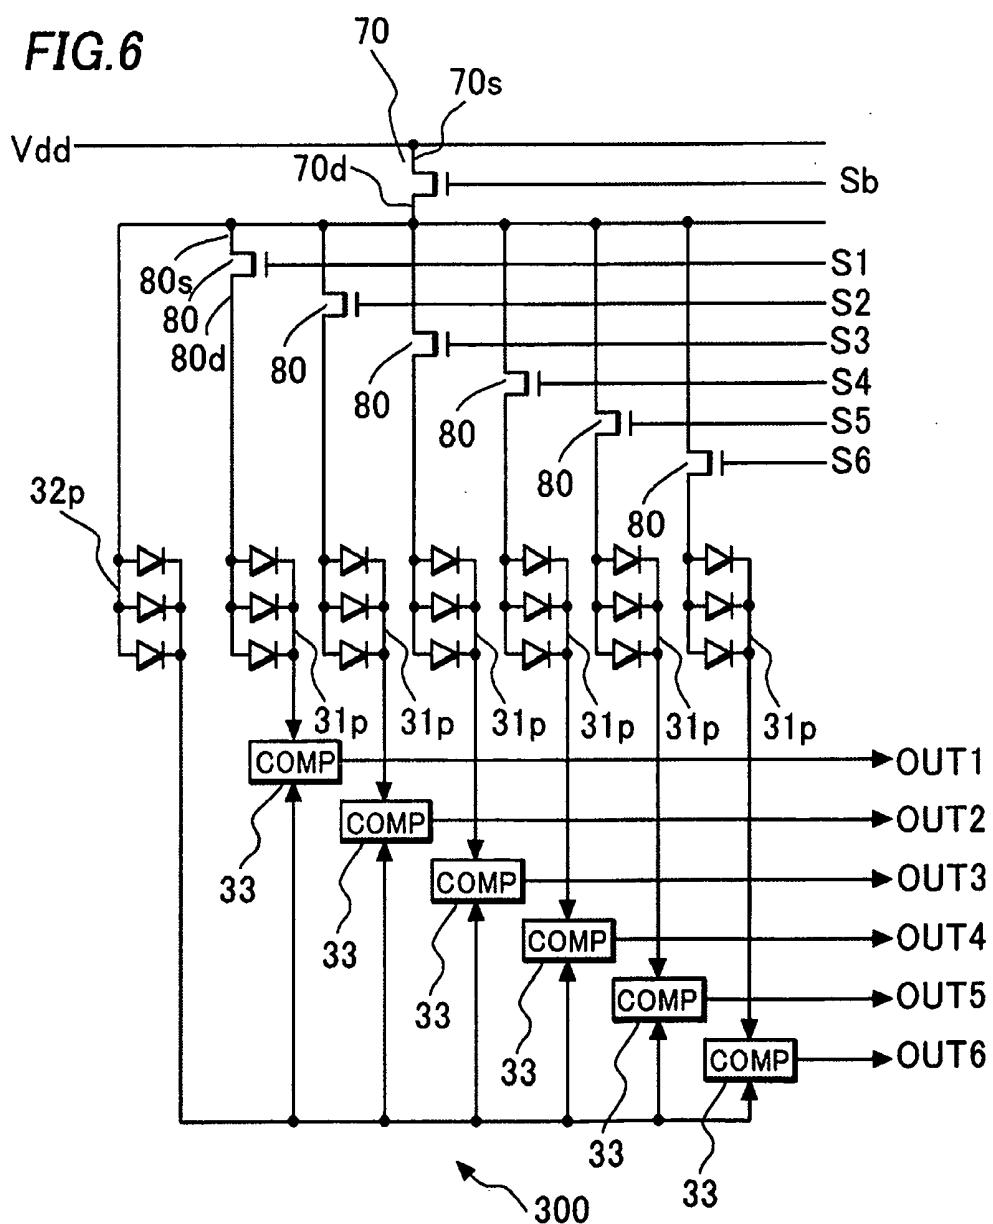[0001] This invention is based on Japanese Patent Application No. 2003-340650, the content of which is incorporated by reference in its entirety.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] This invention relates to an electroluminescent display device, particularly to an electroluminescent display device having a touch panel function.

[0004] 2. Description of the Related Art

[0005] In recent years, organic electroluminescent (hereafter, referred to as EL) display devices using EL elements have been receiving attention as a display device substituting for a CRT or an LCD. Particularly, organic EL display devices having thin film transistors (hereafter, referred to as TFTs) as switching elements for driving the organic EL elements have been developed.

[0006] The LCD has a wide range of applications, for example, from displays for cellular phones to those for personal digital assistants. Furthermore, a touch panel used with a finger or a pen-type pointing device has been developed. Such technologies are disclosed in Japanese Patent Application Publication Nos. 2002-175029 and 2002-214583.

[0007] However, the organic EL display device has not been applied to touch panels used with the finger or the pen-type pointing device.

SUMMARY OF THE INVENTION

[0008] This invention provides an organic EL display device having a touch panel function, and is directed to improving accuracy in positional detection on a display portion of such an organic EL display device. An organic EL display device of the invention is formed with a display portion by disposing display pixels each having a display organic EL element in a matrix. A first light source portion having a plurality of light source organic EL elements is provided, being disposed along a first side of the display portion. A first light detecting portion having a plurality of detection light sensors is provided, being disposed along a side opposite from the first side. Similarly, a second light source portion having a plurality of light source organic EL elements is provided, being disposed along a second side of the display portion. A second light detecting portion having a plurality of detection light sensors is provided, being disposed along a side opposite from the second side.

[0009] Reference light sensors are provided in the first and second light detecting portions. Furthermore, comparators for comparing outputs of the reference light sensors and outputs of the detection light sensors are provided in the first and second light detecting portions. The display portion, the first and second light source portions, and the first and second light detecting portions are formed on the same substrate.

[0010] In this invention, an organic EL display device having a touch panel function can be realized in one display

panel. This reduces the number of components in the display device, and the display device can be miniaturized. Furthermore, detection of an x coordinate and a y coordinate of a point P on the display portion is performed by comparing outputs of the detection light sensors and outputs of the reference light sensors in the light detecting portions by the comparators so that accuracy in the detection of the x and y coordinates improves.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] FIG. 1A is a plan view of an organic EL display device of an embodiment of the invention, FIG. 1B is a cross-sectional view of FIG. 1A along line A-A, and FIG. 1C is a cross-sectional view of FIG. 1A along line B-B.

[0012] FIG. 2A shows an upper surface of one of blocks in first and second light detecting portions of FIGS. 1A, 1B and 1C, and FIG. 2B is a cross-sectional view of FIG. 2A along line C-C.

[0013] FIGS. 3A, 3B and 3C are schematic plan views of a display panel showing an operation of the organic EL display device of FIGS. 1A, 1B, and 1C.

[0014] FIG. 4 is an equivalent circuit diagram of one of the blocks in the first and second light detecting portions of FIGS. 2A and 2B.

[0015] FIG. 5 shows an upper surface of one of the blocks in the first and second light detecting portions of FIGS. 1A, 1B and 1C.

[0016] FIG. 6 is an equivalent circuit diagram of one of the blocks in the first and second light detecting portions of FIG. 5.

DETAILED DESCRIPTION OF THE INVENTION

[0017] A structure of an organic EL display device of one embodiment of the invention will be described with reference to the drawings. FIG. 1A is a plan view of the organic EL display device of this embodiment. FIG. 1B is a cross-sectional view of FIG. 1A along line A-A. FIG. 1C is a cross-sectional view of FIG. 1A along line B-B. FIG. 2A shows an upper surface of one of blocks 300 in first and second light detecting portions 30a and 30b, and FIG. 2B is a cross-sectional view of FIG. 2A along line C-C. A block 300 of the light detecting portions 30a and 30b is a segment of a corresponding light detecting portion that includes a plurality of detection light sensors 31 and a reference light sensor 32, as explained below. FIG. 4 is an equivalent circuit diagram of one of blocks 300 in the first and second light detecting portions 30a and 30b.

[0018] In this embodiment, in a display portion 10 of a display panel 1, a plurality of display pixels (not shown) is disposed in a matrix. Each of the display pixels includes a display organic EL element 11, a pixel selecting TFT 90 (thin film transistor), a driving TFT 91 for driving the display organic EL element 11, and so on.

[0019] As shown in FIG. 1A, the display portion 10 has a rectangle shape in the plan view, and provided with a first light source portion 20a along a first side of the display portion 10. A plurality of light source organic EL elements 21 is aligned in the first light source portion 20a.

[0020] Furthermore, a first light detecting portion **30a** is provided along a side opposite from the first side of the display portion **10**. The first light detecting portion **30a** is divided in a plurality of blocks **300** along the side opposite from the first side of the display portion **10**, and a plurality of detection light sensors **31** (e.g. photodiodes) is arranged in each of the blocks **300**. These detection light sensors **31** generate predetermined currents or voltages as outputs when receiving light, and the currents or the voltages are electrically detected so that the light can be detected.

[0021] The plurality of the detection light sensors **31** in each of the blocks **300** is respectively connected with a plurality of comparators **33** provided as many pieces as the number of the detection light sensors **31** (FIG. 4). An output (current or voltage) of each of the detection light sensors **31** is inputted to each of the comparators **33**.

[0022] Furthermore, a reference light sensor **32** (e.g. photodiode) is provided in an end of a row of the detection light sensors **31** in each of the blocks **300** of the first light detecting portion **30a**. This reference light sensor **32** generates a predetermined current or voltage as an output when receiving light, and the current or the voltage is electrically detected so that the light can be detected.

[0023] The reference light sensor **32** is connected with all the comparators **33** in the block **300** (FIG. 4). An output (current or voltage) of the reference light sensor **32** is commonly inputted to all the comparators **33**.

[0024] Similarly, a second light source portion **20b** is placed along a second side of the display portion **10**. A plurality of light source organic EL elements **21** is aligned in the second light source portion **20b**.

[0025] A second light detecting portion **30b** is provided along a side opposite from the second side of the display portion **10**. The second light detecting portion **30b** is divided in a plurality of blocks **300** along the side opposite from the second side of the display portion **10**, and a plurality of detection light sensors **31** (e.g. photodiodes) is aligned in each of the blocks **300**. The plurality of the detection light sensors **31** in each of the blocks **300** is respectively connected with a plurality of comparators **33** provided as many pieces as the number of the detection light sensors **31** (FIG. 4). An output (current or voltage) of each of the detection light sensors **31** is inputted to each of the comparators **33**.

[0026] Furthermore, a reference light sensor **32** (e.g. photodiode) is provided in an end of a row of the detection light sensors **31** in each of the blocks **300** of the second light detecting portion **30b**. The reference light sensor **32** is connected with all the comparators **33** in the block **300** (FIG. 4). An output (current or voltage) of the reference light sensor **32** is commonly inputted to all the comparators **33**.

[0027] A pair of first light reflecting boards **40a** is provided above the first light source portion **20a** and the first light detecting portion **30a** (FIG. 1B).

[0028] One of these first light reflecting boards **40a** reflects light, which is emitted in a vertical direction through a glass substrate **50** from the light source organic EL element **21** of the first light source portion **20a**, in a horizontal direction along the glass substrate **50**.

[0029] When this light is not blocked by a pointing object PT (FIGS. 3A-3C) such as a pen or a finger which touches or is placed close to the display portion **10**, another of the first light reflecting boards **40a** then reflects the light in a vertical direction through the glass substrate **50**, and the reflected light enters the first light detecting portion **30a**.

[0030] A pair of second light reflecting boards **40b** is provided above the second light source portion **20b** and the second light detecting portion **30b** (FIG. 1C).

[0031] One of these second light reflecting boards **40b** reflects light, which is emitted in a vertical direction through the glass substrate **50** from the light source organic EL element **21** of the second light source portion **20b**, in a horizontal direction along the glass substrate **50**.

[0032] When this light is not blocked by the pointing object PT, which touches or is placed close to the display portion **10**, another of the second light reflecting boards **40b** then reflects the light in a vertical direction through the glass substrate **50**, and the reflected light enters the second light detecting portion **30b**.

[0033] Here, the display portion **10** provided with the plurality of the display organic EL elements **11**, the first and second light source portions **20a** and **20b** and the first and second light detecting portions **30a** and **30b** are placed in an insulating film **52** on the same glass substrate **50**, being integrally formed in a display panel 1.

[0034] That is, the light source organic EL elements **21** of the first and second light source portions **20a** and **20b** have the same structure as that of the display organic EL elements **11** of the display portion **10** so that the light source organic EL elements **21** and the display organic EL elements **11** are formed by the same manufacturing steps. Furthermore, the detection light sensors **31** and the reference light sensors **32** of the first and second light detecting portions **30a** and **30b** can be formed of TFTs so that the detection light sensors **31** and the reference light sensors **32** can be formed by the same manufacturing steps as the steps for manufacturing the pixel selecting TFTs **90** and the driving TFTs **91** in the display portion **10**.

[0035] Furthermore, when a drive circuit is provided in the display panel 1, i.e. on the glass substrate **50**, to supply signals to the pixel selecting TFTs **90** and the driving TFTs **91**, the detection light sensors **31** and the reference light sensors **32** are also simultaneously formed by the same manufacturing steps as the steps for manufacturing the TFTs in the drive circuit.

[0036] This display panel 1 is stored in a storage container **60**, and the display portion **10** is exposed through an opening of the storage container **60**. This display panel 1 is thus configured to emit display light of the display portion **10** outside.

[0037] Next, description will be made on a typical structure (not shown) of the display organic EL element **11** of the display portion **10** and the light source organic EL element **21** of the first and second light source portions **20a** and **20b**.

[0038] For a so-called bottom emission type, in which an EL element emits light through the substrate formed with an EL element, the display organic EL element **11** and the light source organic EL element **21** include a first electrode, a hole transport layer, an emissive layer, an electron transport layer

and a second electrode in this order. The first electrode is a transparent electrode made of ITO (indium tin oxide) and so on. The hole transport layer is formed of a first hole transport layer made of MTDATA (4,4-bis (3-methylphenylphenylamino) biphenyl) and a second hole transport layer made of TPD (4,4,4-tris (3-methylphenylphenylamino) triphenylamine). The emissive layer is made of Bebq2(bis(10-hydroxybenzo[h]quinolinato)beryllium) containing quinacridone, and the electron transport layer is made of Bebq2. The second electrode is made of magnesium indium alloy, aluminum or aluminum alloy.

[0039] In these display organic EL element 11 and the light source organic EL element 21, holes injected from the first electrode and electrons injected from the second electrode are recombined inside the emissive layer. These recombined holes and electrons activate organic molecules forming the emissive layer to generate excitons. Light is emitted from the emissive layer in a process of radiation of the excitons, and then released outside after going through the transparent first electrode to the glass substrate 50, thereby completing light-emission.

[0040] Next, a structure of the first and second light detecting portions 30a and 30b is described with reference to FIGS. 2A and 2B. FIG. 2A shows an upper surface of one of the blocks 300 in the first and second light detecting portions 30a and 30b. FIG. 2B is a cross-sectional view of FIG. 2A along line C-C.

[0041] As shown in FIG. 2A, in each of the blocks 300 in the first and second light detecting portions 30a and 30b, a light shielding film 51 having openings in positions corresponding to the plurality of detection light sensors 31 and the reference light sensor 32 is formed.

[0042] That is, as shown in FIG. 2B, the light shielding films 51 are formed on the glass substrate 50. The light shielding films 51 are formed only between the adjacent detection light sensors 31 and reference light sensor 32.

[0043] An insulating film 52 is further formed, and the plurality of the detection light sensors 31 and the reference light sensor 32 are formed in the insulating film 52. Although exterior light enters the first and second light detecting portions 30a and 30b from an outside of the display panel 1, these light shielding films 51 can block (or reduce) the exterior light from reaching the detection light sensors 31 and the reference light sensor 32. This can improve accuracy in detection by the plurality of the detection light sensors 31 and the reference light sensor 32.

[0044] Next, a detection process of a point P corresponding to a position where the pointing object PT touches or is placed close to the display portion 10 will be described with reference to FIGS. 1A, 1B, 1C, 2A, 2B, 3A, 3B and 3C.

[0045] The coordinates (x, y) of this point P are determined as follows. Assume that the x coordinate corresponds to the first side of the display portion 10, and the y coordinate corresponds to the second side of the display portion 10. Furthermore, light emitted from each of the light source organic EL elements 21 of the first and second light source portions 20a and 20b has directivity similar to those of laser beams.

[0046] First, the x coordinate of the point P is determined as described below. Light emitted in a vertical direction

through the glass substrate 50 from each of the light source organic EL elements 21 of the first light source portion 20a is reflected in a horizontal direction along the glass substrate 50 by one of the first light reflecting boards 40a. When the light is not blocked by the pointing object PT, the light is then reflected in a vertical direction through the glass substrate 50 by another of the first light reflecting boards 40a to enter the first light detecting portion 30a.

[0047] The light entering the first light detecting portion 30a is detected by the detection light sensors 31 corresponding to the position where the light enters. Each of the outputs of the detection light sensors 31 is compared with the output of the reference light sensor 32 by each of the comparators 33.

[0048] The reference light sensor 32 is kept being irradiated with light from the light source organic EL element 21 when the display device is in operation. Therefore, the output (current or voltage) of the detection light sensor 31 and the output (current or voltage) of the reference light sensor 32 are substantially equal. The comparator 33 outputs a predetermined voltage (high level) so as to indicate that light is detected at the detection light sensor 31 in this position.

[0049] On the other hand, light emitted by the light source organic EL element 21 is blocked by the pointing object PT in a position where the pointing object PT touches or is placed close to the display portion 10. Therefore, the intensity of light detected by the detection light sensor 31 in this position is lower than the intensity of light detected by the reference light sensor 32.

[0050] The output (current or voltage) of the detection light sensor 31 in this position is compared with the output (current or voltage) of the reference light sensor 32 by the comparator 33 connected with this detection light sensor 31.

[0051] Since the output of the detection light sensor 31 in this position is lower than the output of the reference light sensor 32, the comparator 33 outputs a predetermined voltage (low level). The position of the detection light sensor 31 connected with this comparator 33 is the x coordinate of the point P on the display portion 10.

[0052] In a similar manner, the y coordinate of the point P is determined as described below. Light emitted in a vertical direction through the glass substrate 50 from each of the light source organic EL elements 21 of the second light source portion 20b is reflected in a horizontal direction along the glass substrate 50 by one of the second light reflecting boards 40b. When the light is not blocked by the pointing object PT, the light is then reflected in a vertical direction through the glass substrate 50 by another of the second light reflecting boards 40b to enter the second light detecting portion 30b.

[0053] The light entering the second light detecting portion 30b is detected by the detection light sensors 31 corresponding to the positions where the light enters. Each of outputs of the detection light sensors 31 is compared with an output of the reference light sensor 32 by each of the comparators 33.

[0054] The reference light sensor 32 is kept being irradiated with light from the light source organic EL element 21. Therefore, the output (current or voltage) of the detection

light sensor **31** and the output (current or voltage) of the reference light sensor **32** are substantially equal. At this time, the comparator **33** outputs a predetermined voltage (high level) so as to indicate that light is detected at the detection light sensor **31** in this position.

[0055] On the other hand, light emitted by the light source organic EL element **21** is blocked by the pointing object PT in a position where the pointing object PT touches or is placed close to the display portion **10**. Therefore, the intensity of light detected by the detection light sensor **31** in this position is lower than the intensity of light detected by the reference light sensor **32**.

[0056] The output (current or voltage) of the detection light sensor **31** in this position is compared with the output (current or voltage) of the reference light sensor **32** by the comparator **33** connected with this detection light sensor **31**.

[0057] Since the output of the detection light sensor **31** in this position is lower than the output of the reference light sensor **32**, the comparator **33** outputs a predetermined voltage (low level). The position of the detection light sensor **31** connected with this comparator **33** is the y coordinate of the point P on the display portion **10**.

[0058] When light emitted from each of the light source organic EL elements **21** of the first and second light source portions **20a** and **20b** does not have a directivity similar to those of laser beams, the x and y coordinates of the point P (x, y) can be determined as described below.

[0059] That is, the x and y coordinates of the point P (x, y) are determined by sequentially switching the light source organic EL elements for emitting light, and by monitoring the positions of the detection light sensors which do not detect the light each time. A process of determining the x and y coordinates of the point P (x, y) in this case will be described with reference to FIGS. **3A**, **3B** and **3C**.

[0060] FIGS. **3A**, **3B** and **3C** are schematic plan views of the display panel **1** explaining an example of a process of determining the x and y coordinates of the point P (x, y) under the divergent light source. In FIGS. **3A**, **3B** and **3C**, the number of the light source organic EL elements and the detection light sensors is reduced from the number shown in FIG. **1A** for simplifying description.

[0061] As shown in FIG. **3A**, light is emitted in a vertical direction through the glass substrate **50** (not shown) from a light source organic EL element **21a** provided in one end of the first light source portion **20a**. This light is reflected in a horizontal direction along the glass substrate **50** by the first light reflecting board **40a** (not shown) provided above the first light source portion **20a**. When the light reflected in a horizontal direction is not blocked by the pointing object PT, the light is then reflected in a backside direction of the display panel **1** by the first light reflecting board **40a** (not shown) provided above the first light detecting portion **30a** to enter the first light detecting portion **30a**.

[0062] Furthermore, the light is reflected in the backside direction of the display panel **1** by the second light reflecting board **40b** (not shown) provided above the second light detecting portion **30b** to enter the second light detecting portion **30b**. The light entering the first and second light detecting portions **30a** and **30b** is detected by the detection light sensors corresponding to positions where the light

enters (detection light sensors **31a**, **31d**, **31e**, **31f**, **31g**, **31h**, **31i**, and **31j** in an example of FIG. **3A**).

[0063] On the other hand, when the light reflected in a horizontal direction is blocked by the pointing object PT, the light is blocked by the pointing object PT so that the light does not enter the first and second light detecting portions **30a** and **30b**. That is, the detection light sensors (detection light sensors **31b** and **31c** in an example of FIG. **3A**) corresponding to positions where the light does not enter do not detect the light.

[0064] Accordingly, the detection light sensors which do not detect the light are searched among the detection light sensors of the first and second light detecting portions **30a** and **30b**, and x coordinates or y coordinates of those light sensors are stored in a storage medium (not shown) such as a memory. When this operation is completed, the light source organic EL element **21a** is turned off the light.

[0065] Next, as shown in FIG. **3B**, light is emitted from a light source organic EL element **21b** adjacent the light source organic EL elements **21a**. Then, x coordinates or y coordinates of the detection light sensors (detection light sensors **31a** and **31b** in an example of FIG. **3B**) which do not detect the light among the detection light sensors of the first and second light detecting portions **30a** and **30b** are stored in the memory (not shown) and so on. When this operation is completed, the light source organic EL element **21b** is turned off.

[0066] Similarly, light source organic EL elements **21c**, **21d**, **21e** and **21f** placed adjacent each other in the first light source portion **20a** are sequentially switched to emit light and turn off the light. The detection light sensors which do not detect the light are searched each time, and x coordinates or y coordinates of the detection light sensors are stored in the memory (not shown) and so on. As shown in FIG. **2C**, when light is emitted from the light source organic EL element **21f**, an x coordinate or a y coordinate of the detection light sensor (detection light sensor **31j** in an example of FIG. **2C**) which does not detect the light is stored in the memory (not shown) and so on.

[0067] After a sequence of light emission and turn-off is completed from the light source organic EL element **21a** provided on one end of the first light source portion **20a** to the light source organic EL element **21f** provided on another end thereof, the light emission and turn-off in the second light source portion **20b** are sequentially performed from the light source organic EL element **21g** provided on one end thereof to the light source organic EL element **21j** provided on another end thereof. At each time of this operation, the detection light sensors which do not detect the light are searched in the first and second light detecting portions **30a** and **30b**, and x or y coordinates corresponding to the detection light sensors are monitored and stored in the memory and so on (not shown).

[0068] As described above, the detection light sensors of the first and second light detecting portions **30a** and **30b**, which do not detect the light emitted from the first and second light source portions **20a** and **20b**, are searched. The x coordinate or the y coordinate corresponding to each of the detected detection light sensors is monitored each time, and stored in the memory (not shown) and so on.

[0069] Then, the x or y coordinates of the detection light sensors which do not detect the light, which are monitored

and stored each time, are used to determine the x and y coordinates of the point P(x, y) representing the location of the pointing object PT that touches or is placed close to the display portion 10. Then, the data stored in the memory and so on are initialized for next detection of the point P(x, y).

[0070] It is noted that the reference light sensor 32 can be prevented from being kept irradiated with light by shielding the light with the light shielding film 51.

[0071] The detection of the x and y coordinates of the point P described above is performed in each of the blocks 300 of the first and second light detecting portions 30a and 30b. Such detection will be described below with reference to FIG. 4.

[0072] A block switching signal line Sb to be supplied with a signal for selecting the blocks 300 (e.g. high level or low level) is connected with a gate of a block selecting TFT (thin film transistor) 70. A source 70s of the block selecting TFT 70 is connected with a power supply voltage Vdd for supplying power to the detection light sensors 31 and the reference light sensor 32. A drain 70d of the block selecting TFT 70 is connected with a plurality of sources 80s of light sensor selecting TFTs 80 and also connected with the reference light sensor 32 (e.g. photodiode) provided in the same block 300.

[0073] The gates of the light sensor selecting TFTs 80 are respectively connected with switching signal lines S1, S2, S3, S4, S5 and S6 for supplying a signal for switching on each of the detection light sensors 31 in order. The drains 80d of the light sensor selecting TFTs 80 are respectively connected with the plurality of the detection light sensors 31 (e.g. photodiode).

[0074] The detection light sensors 31 are respectively connected with the input terminals on one sides of the comparators 33. The input terminals on another sides of the comparators 33 are commonly connected with the reference light sensor 32. Output lines OUT1, OUT2, OUT3, OUT4, OUT5, and OUT6 extend from the comparators 33 respectively.

[0075] Next, a switching operation of the blocks 300 and the detection light sensors 31 in each of the first and second light detecting portions 30a and 30b will be described. It is noted that the block selecting TFT 70 and the light sensor selecting TFTs 80 are of N-channel type in this embodiment.

[0076] In one of the blocks 300 of the first light detecting portion 30a and the second light detecting portions 30b, which is selected first, when the block switching signal line Sb becomes high level, the block selecting TFT 70 turns on. Then, the power supply voltage Vdd is supplied to the sources 80s of the light sensor selecting TFTs 80.

[0077] At the same time, the power supply voltage Vdd is also supplied to the reference light sensor 32. Therefore, the reference light sensor 32 keeps outputting a voltage corresponding to an amount of received light while the block switching signal line Sb is being high level.

[0078] All the switching signal lines S1 to S6 are low level, first. No power supply voltage Vdd is supplied to all the detection light sensors 31 at this time, so that outputs of all the detection light sensors 31 are low level. Therefore, in all the comparators 33, the outputs of the reference light

sensor 32 are higher than the outputs of the detection light sensors 31, so that outputs of all the output lines OUT1 to 6 are low level.

[0079] Next, the switching signal line S1 of the first light sensor selecting TFT 80 becomes high level, and the detection light sensor 31 corresponding to the light sensor selecting TFT 80 connected thereto is selected.

[0080] Then, an output of the detection light sensor 31 and an output of the reference light sensor 32 are compared by the comparator 33 to detect the x and y coordinates of the point P described above. A predetermined voltage (high level or low level) is outputted as a result of the comparison by the comparator 33 by the output line OUT 1.

[0081] For example, when the selected detection light sensor 31 does not receive the emitted light and the reference light sensor 32 receives the light, the output voltage of the detection light sensor 31 lowers so that the output of the comparator 33 becomes low level. When the selected detection light sensor 31 receives the light, the output of the comparator 33 becomes high level.

[0082] Then, the switching signal line S1 becomes low level, and the light sensor selecting TFT 80 thereof turns off. The next switching signal line S2 adjacent to the switching signal line S1 becomes high level, and thus the light sensor selecting TFT 80 connected to the switching signal line S2 turns on.

[0083] Switching of the light sensor selecting TFTs 80 and detection of the x and y coordinates of the point P described above are repeated until the switching signal line S6 is operated on to activate the corresponding sensor. After the completion, the block switching signal line Sb in this block 300 becomes low level, and the next block 300 adjacent thereto is selected.

[0084] That is, the block switching signal line Sb in the next block 300 becomes high level, the reference light sensor 31 in this block 300 turns on, and the plurality of the drains of the light sensor selecting TFTs 80 is supplied with a current from the power supply voltage Vdd.

[0085] The switching of the light sensor selecting TFTs 80 and detection of the x and y coordinates of the point P to be performed hereafter are the same as in the first block 300. The block switching operation described above is repeated until the last block 300.

[0086] The switching of the light sensor selecting TFTs 80 described above can be performed by supplying a signal to the switching signal lines S1 to S6 in order by using a shift resistor 100 connected with the switching signal lines S1 to S6 so that the detection light sensors 31 can be activated in this order.

[0087] In the embodiment described above, the detection light sensors 31 and the reference light sensor 32 are photodiodes. However, each of the detection light sensors 31 or (and) the reference light sensor 32 can be formed of a plurality of photodiodes connected in parallel. A structure of the first and second light detecting portions 30a and 30b in this case will be described with reference to drawings in FIG. 5.

[0088] FIG. 5 is a view showing an upper surface of one of the blocks 300 in the first and second light detecting

portions **30a** and **30b** when the detection light sensors **31** and the reference light sensor **32** include a plurality of the photodiodes connected in parallel. **FIG. 6** is an equivalent circuit diagram of one of the blocks **300** in the first and second light detecting portions **30a** and **30b**.

[0089] As shown in **FIG. 5**, a light shielding film **51p** is provided, having openings in a position corresponding to the detection light sensors **31p** and the reference light sensor **32p**, each having the plurality of photodiodes connected in parallel. A cross-sectional view of **FIG. 5** along line D-D is similar to **FIG. 2B**.

[0090] As shown in **FIG. 6**, each of the detection light sensors **31p** and the reference light sensor **32p** is formed of the photodiodes connected in parallel. This increases each of signals of the detection light sensors **31p** and the reference light sensor **32p** so that accuracy in light detection improves and thus accuracy in detection of the x and y coordinates of the point P described above improves.

[0091] In the embodiment described above, each of the detection light sensors **31** and **31p** and the reference light sensors **32** and **32p** has a plurality of photodiodes. However, each of the detection light sensors **31** and **31p** or (and) the reference light sensors **32** and **32p** can include photoelectric devices other than photodiodes.

[0092] Although the display device of the above embodiment is an active matrix display device in which TFTs are formed in each of pixels, the invention is not limited to this but the display device can be a passive matrix display device in which TFTs are not formed in each of pixels.

[0093] The above embodiment can be applied to an EL display device of bottom emission type in which light emitted from an EL element is released outside through the glass substrate **50** formed with an EL element. Furthermore, the embodiment can be applied to an EL display device of top emission type, in which light emitted from an EL element is released through the glass substrate opposite from the glass substrate having TFTs thereon.

[0094] Although the openings formed in the light shielding films **51** and **51P** are shaped in a circle, the invention is not limited to this but the openings can have other shapes as long as the openings can transmit light from the light source organic EL element **21** and block external light.

[0095] As described above, the light source for detecting the pointing object includes the same organic EL element as that used for the display organic EL element **11**. Therefore, it is unnecessary to form the light source for detecting the pointing objects separately using other element. Accordingly, both the display and light source organic EL elements can be formed simultaneously. It is noted that the light source organic EL elements may also be formed separately from the display organic EL elements, for example, when different light intensities are required for the two different types of organic EL elements.

[0096] Since the light sensors (detection light sensors **31** and **31p** and reference light sensors **32** and **32p**) include TFTs, the light sensors and the pixel can be formed simultaneously in the active matrix EL display device having TFTs in each of pixels.

[0097] Furthermore, the above embodiment can be applied to a non-organic EL element having an emissive layer made of non-organic materials.

[0098] Accordingly, the EL display device having the described touch panel function can be realized without increasing the number of steps.

What is claimed is:

1. An electroluminescent display device comprising:
 - a display portion comprising a plurality of display electroluminescent elements disposed in a matrix;
 - a first light source portion comprising a plurality of light source electroluminescent elements disposed along a first side of the display portion;
 - a first light detecting portion comprising a plurality of detection light sensors disposed along a side opposite from the first side;
 - a second light source portion comprising a plurality of light source electroluminescent elements disposed along a second side of the display portion;
 - a second light detecting portion comprising a plurality of detection light sensors disposed along a side opposite from the second side;
 - a reference light sensor disposed in the first light detecting portion or the second light detecting portion; and
 - a comparator connected to the reference light sensor and at least two of the detection light sensors of a corresponding light detecting portion in which the reference light sensor is disposed.
2. The electroluminescent display device of claim 1, wherein the display portion, the first and second light source portions and the first and second light detecting portions are disposed on a substrate.
3. The electroluminescent display device of claim 1, wherein each of the detection light sensors and the reference light sensor comprises a photodiode.
4. The electroluminescent display device of claim 1, wherein each of the detection light sensors and the reference light sensor comprises a plurality of photodiodes connected in parallel.
5. The electroluminescent display device of claim 1, wherein the electroluminescent display device is of active type having a switching element in each of the display electroluminescent elements, and the switching elements and the detection light sensors have a same structure.
6. The electroluminescent display device of claim 1, wherein the display electroluminescent elements and the light source electroluminescent elements have a same structure.
7. The electroluminescent display device of claim 1, wherein the detection light sensors and the reference light sensor have a same structure.
8. The electroluminescent display device of claim 1, further comprising a shift resistor that activates the detection light sensors sequentially.
9. An electroluminescent display device comprising:
 - a display portion comprising a plurality of display electroluminescent elements disposed in a matrix;
 - a first light source portion comprising a plurality of light source electroluminescent elements disposed along a first side of the display portion;

- a first light detecting portion comprising a plurality of detection light sensors disposed along a side opposite from the first side;
- a second light source portion comprising a plurality of light source electroluminescent elements disposed along a second side of the display portion;
- a second light detecting portion comprising a plurality of detection light sensors disposed along a side opposite from the second side;
- a pair of first light reflecting boards for leading light emitted by the first light source portion to the first light detecting portion;
- a pair of second light reflecting boards for leading light emitted by the second light source portion to the second light detecting portion;
- a reference light sensor disposed in the first light detecting portion or the second light detecting portion; and
- a comparator connected to the reference light sensor and at least two of the detection light sensors of a corresponding light detecting portion in which the reference light sensor is disposed.
- 10.** The electroluminescent display device of claim 9, wherein the display portion, the first and second light source portions and the first and second light detecting portions are disposed on a substrate.
- 11.** The electroluminescent display device of claim 9, wherein each of the detection light sensors and the reference light sensor comprises a photodiode.
- 12.** The electroluminescent display device of claim 9, wherein each of the detection light sensors and the reference light sensor comprises a plurality of photodiodes connected in parallel.
- 13.** The electroluminescent display device of claim 9, wherein the electroluminescent display device is of active type having a switching element in each of the display electroluminescent elements, and the switching elements and the detection light sensors have a same structure.
- 14.** The electroluminescent display device of claim 9, wherein the display electroluminescent elements and the light source electroluminescent elements have a same structure.
- 15.** The electroluminescent display device of claim 9, wherein the detection light sensors and the reference light sensor have a same structure.
- 16.** The electroluminescent display device of claim 9, further comprising a shift resistor that activates the detection light sensors sequentially.

* * * * *

专利名称(译)	电致发光显示装置		
公开(公告)号	US20050093466A1	公开(公告)日	2005-05-05
申请号	US10/948742	申请日	2004-09-24
[标]申请(专利权)人(译)	三洋电机株式会社		
申请(专利权)人(译)	SANYO ELECTRIC CO. , LTD.		
当前申请(专利权)人(译)	SANYO ELECTRIC CO. , LTD.		
[标]发明人	MATSUMOTO SHOICHIRO		
发明人	MATSUMOTO, SHOICHIRO		
IPC分类号	H05B33/12 G06F3/03 G06F3/033 G06F3/041 G06F3/042 G09F9/00 G09G3/10 H01L51/50 H05B33/14		
CPC分类号	G06F3/0421		
优先权	2003340650 2003-09-30 JP		
其他公开文献	US7289088		
外部链接	Espacenet USPTO		

摘要(译)

本发明提供一种具有触摸面板功能的有机EL显示装置，并且提高了显示部分上的位置检测的精度。显示面板由沿显示部分的第一和第二侧设置的第一和第二光源部分以及分别设置在与第一和第二侧面相对的侧面中的第一和第二光检测部分形成。具有用于显示的有机EL元件的多个显示像素以矩阵形式设置在显示部分上。用于光源的多个有机EL元件在第一和第二光源部分的每一个中布置成一排。多个检测光传感器和参考光传感器在第一和第二光检测部分的每一个中布置成一排。提供了一种比较器，用于比较每个检测光传感器的输出和参考光传感器的输出。

