



US 20040051451A1

(19) **United States**

(12) **Patent Application Publication**

Kawase et al.

(10) **Pub. No.: US 2004/0051451 A1**

(43) **Pub. Date: Mar. 18, 2004**

(54) **DISPLAY UNIT**

(76) Inventors: **Kimitaka Kawase, Kanagawa (JP);
Yasunori Kijima, Tokyo (JP); Yukio
Sato, Kanagawa (JP); Hitoshi
Tamashiro, Kanagawa (JP)**

Correspondence Address:

**ROBERT J. DEPKE LEWIS T. STEADMAN
HOLLAND & KNIGHT LLC
131 SOUTH DEARBORN
30TH FLOOR
CHICAGO, IL 60603 (US)**

(21) Appl. No.: **10/655,146**

(22) Filed: **Sep. 4, 2003**

(30) **Foreign Application Priority Data**

Sep. 13, 2002 (JP) P2002-267847

Publication Classification

(51) **Int. Cl.⁷ H05B 33/04**

(52) **U.S. Cl. 313/512**

(57) **ABSTRACT**

A display unit includes a plurality of panels joined to each other into one display screen. Each of the panels is formed by using organic EL devices. In this display unit, a seal material is applied to a joint portion between adjacent two of the panels in such a manner as to cover the joint portion, to thereby suppress permeation of moisture, air, and the like in the organic EL devices.

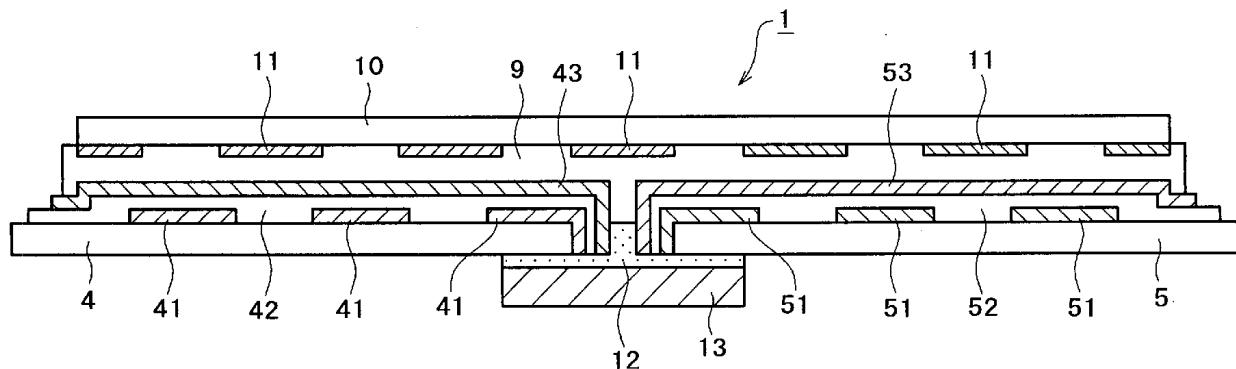


FIG. 1

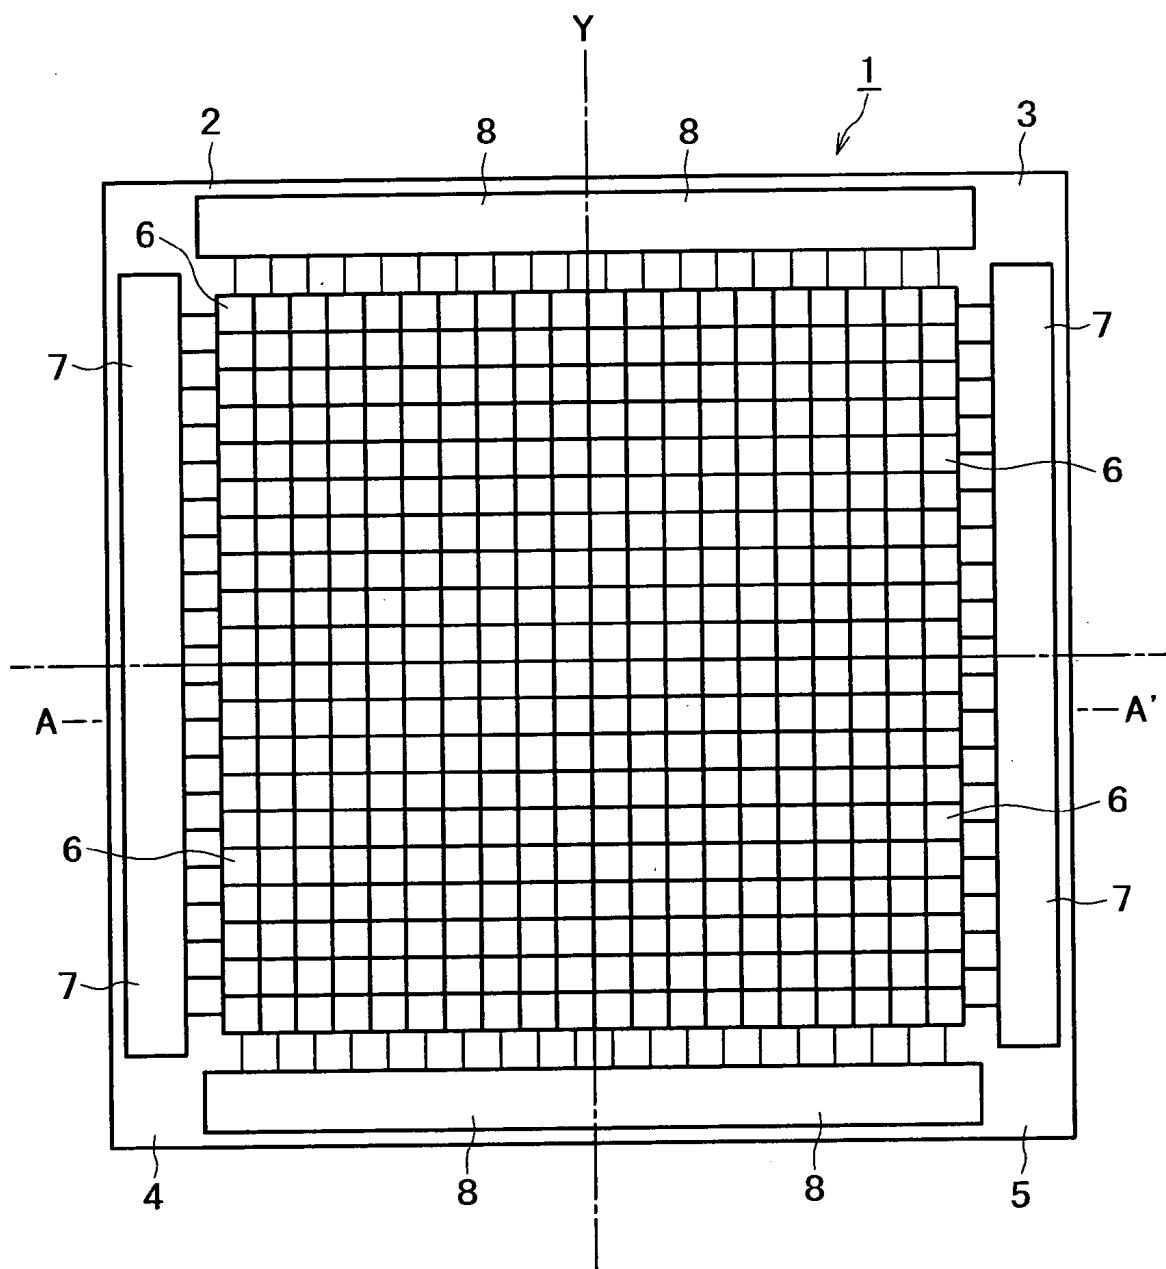


FIG. 2


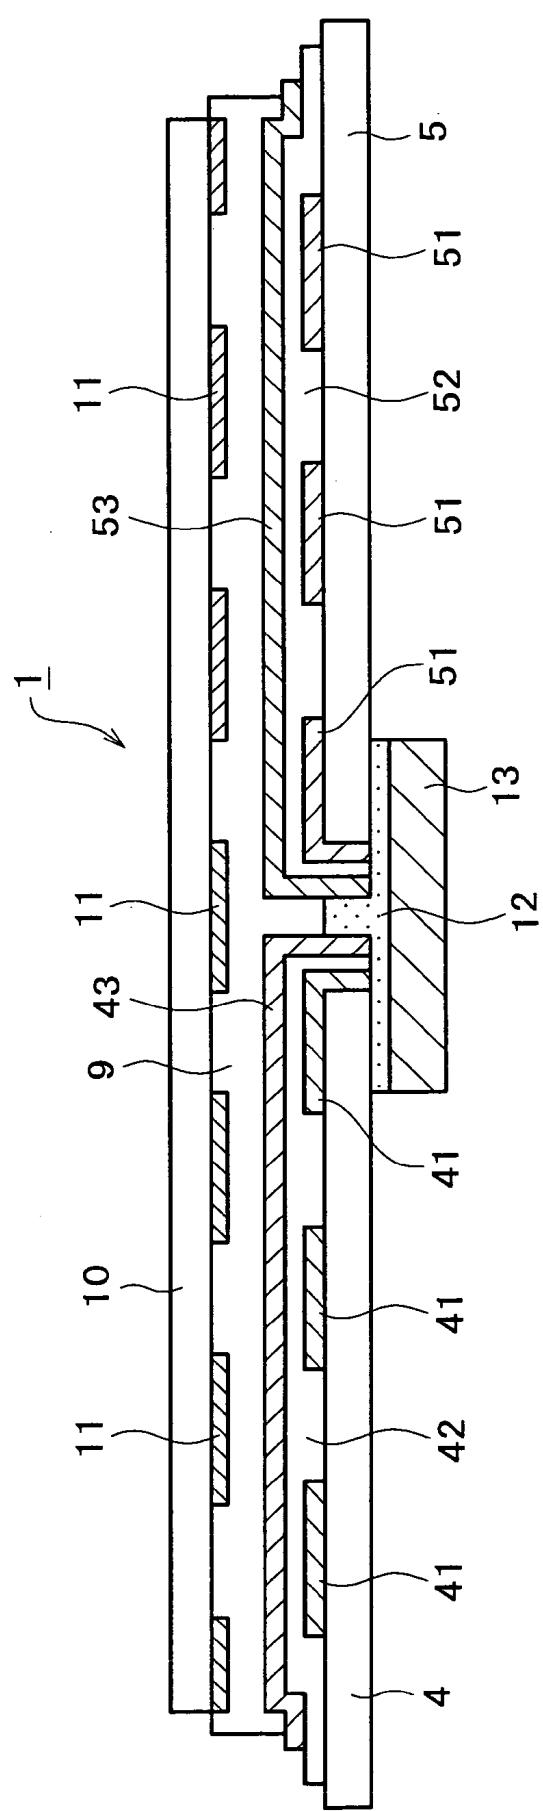


FIG. 3

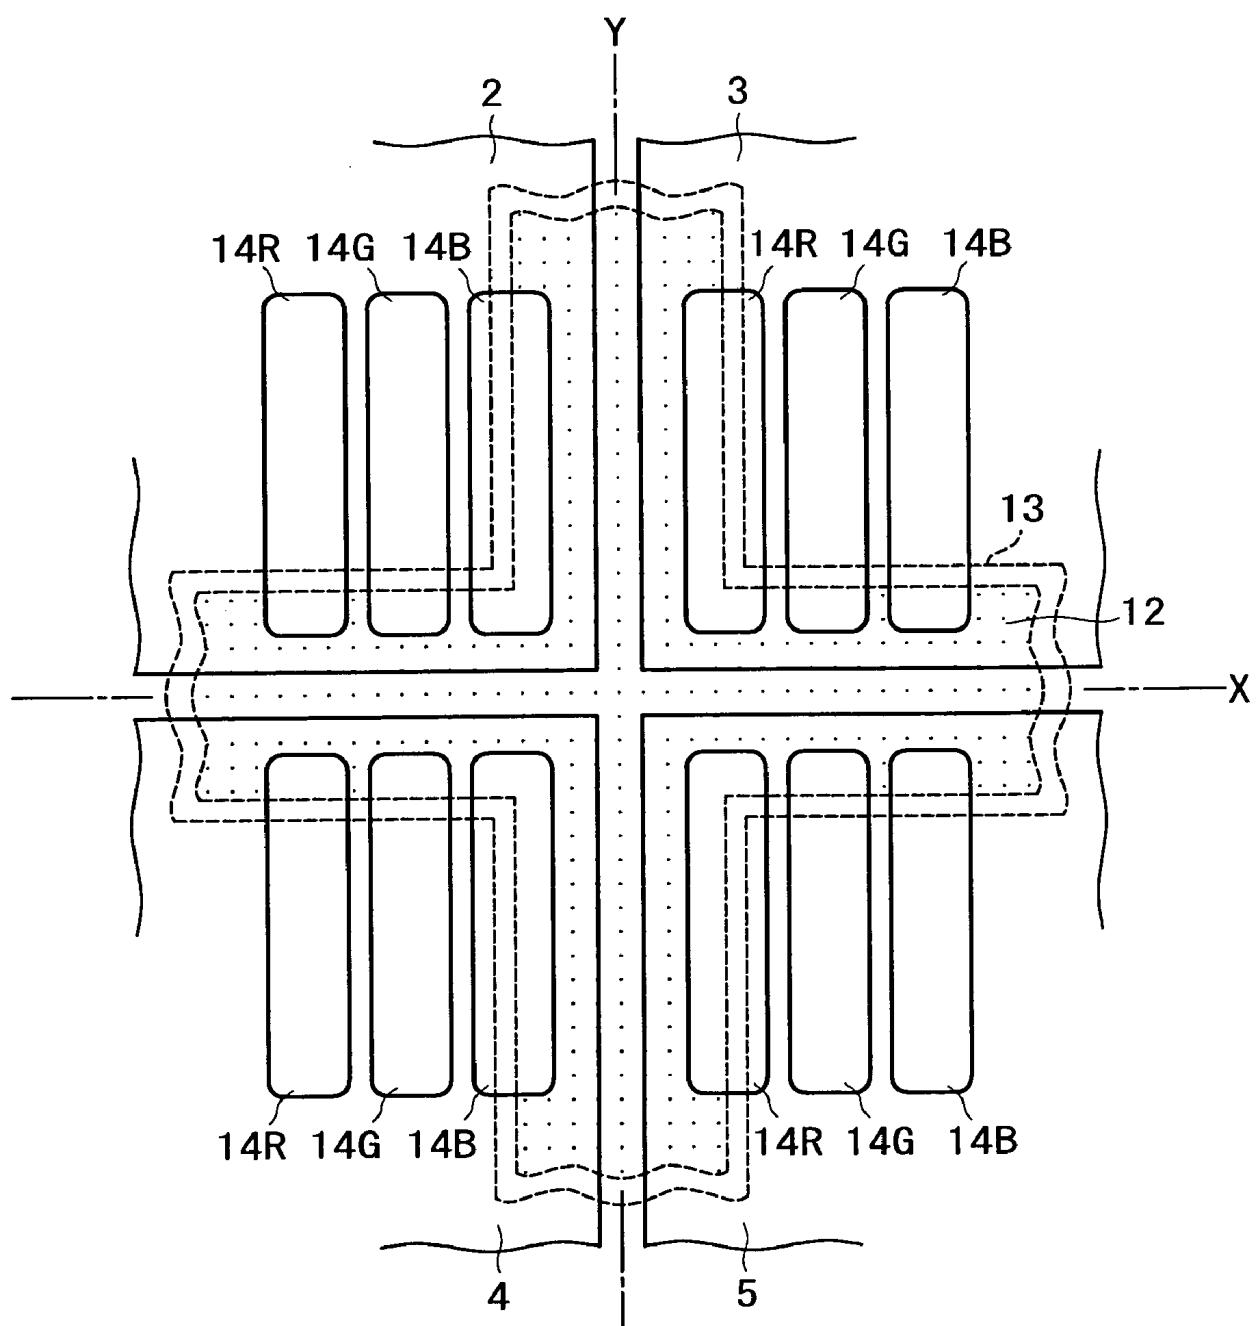

F I G. 4

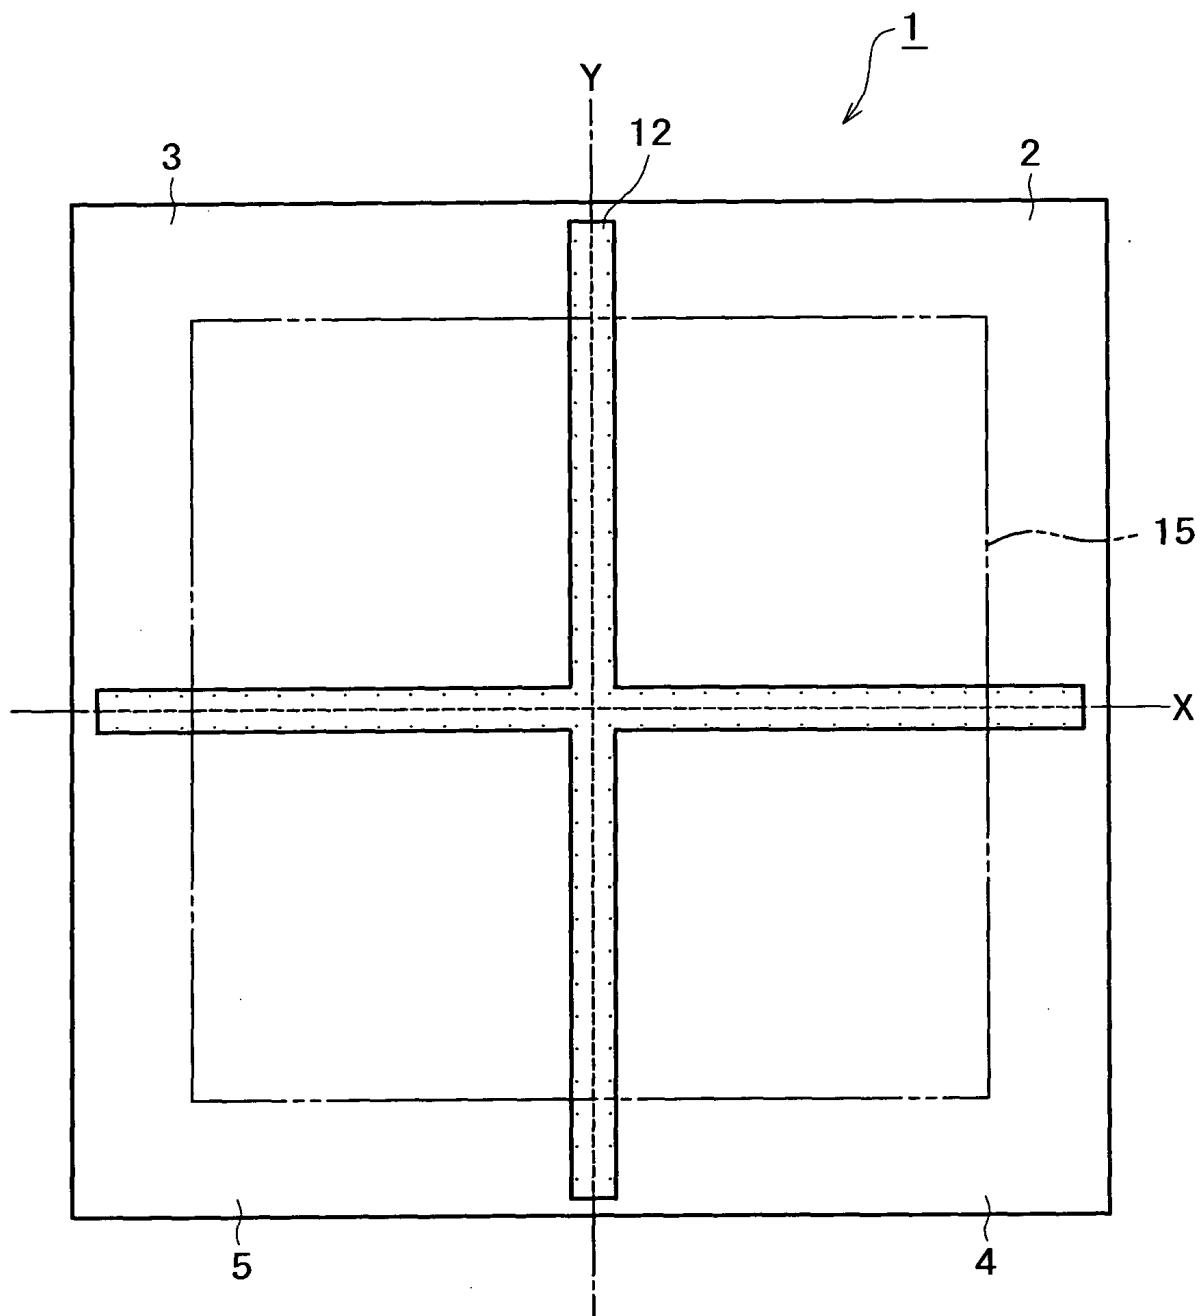


FIG. 5



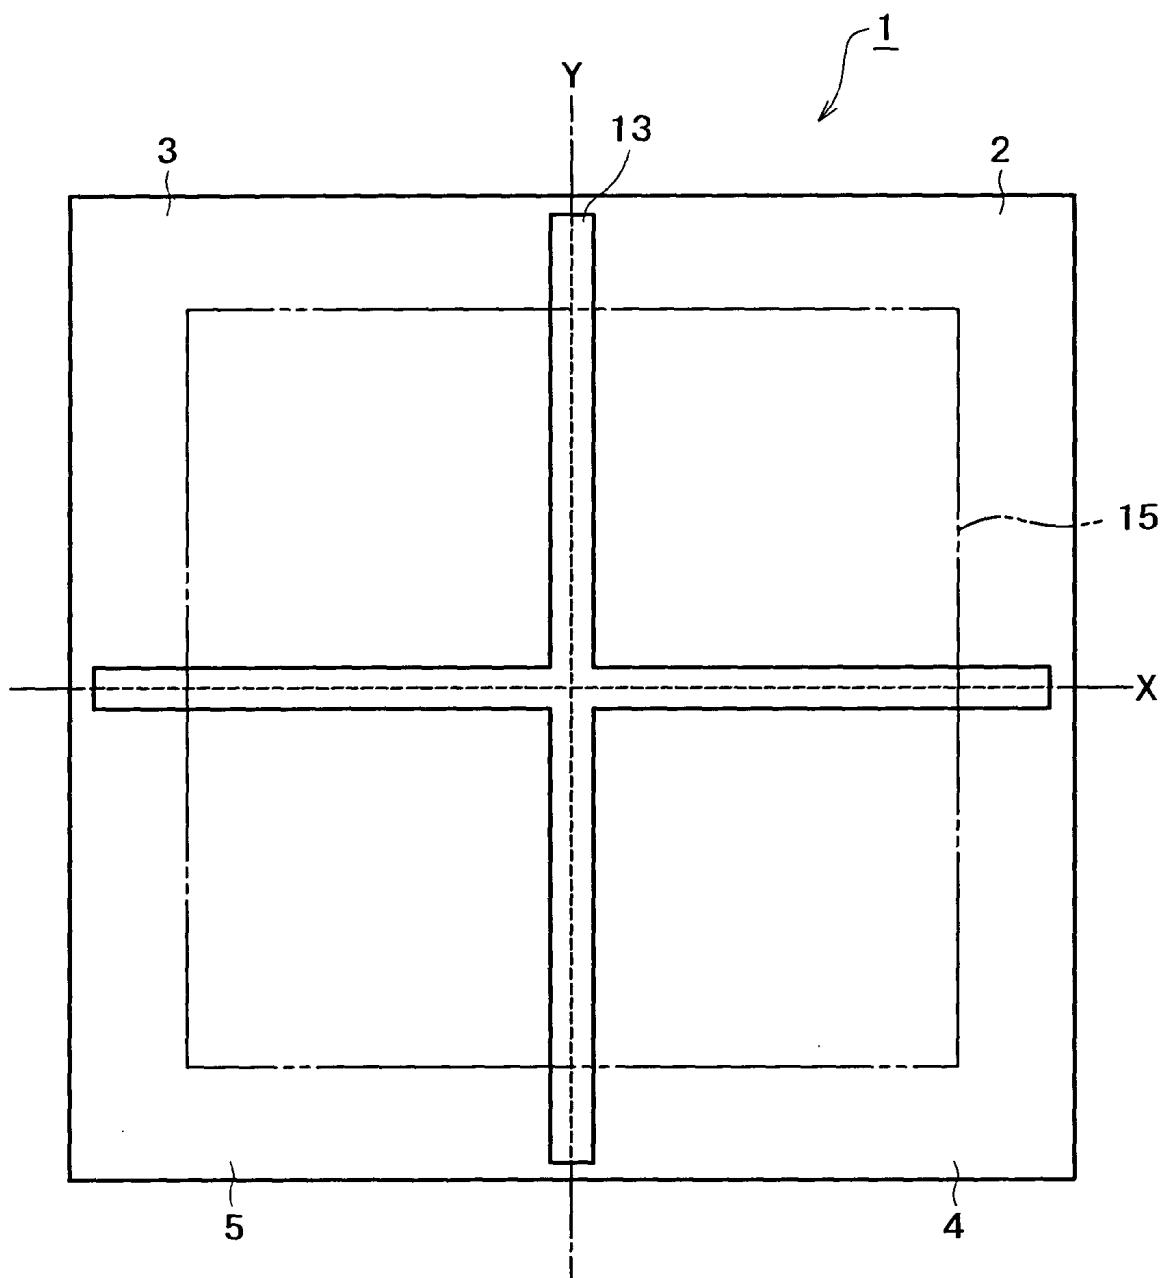



FIG. 6

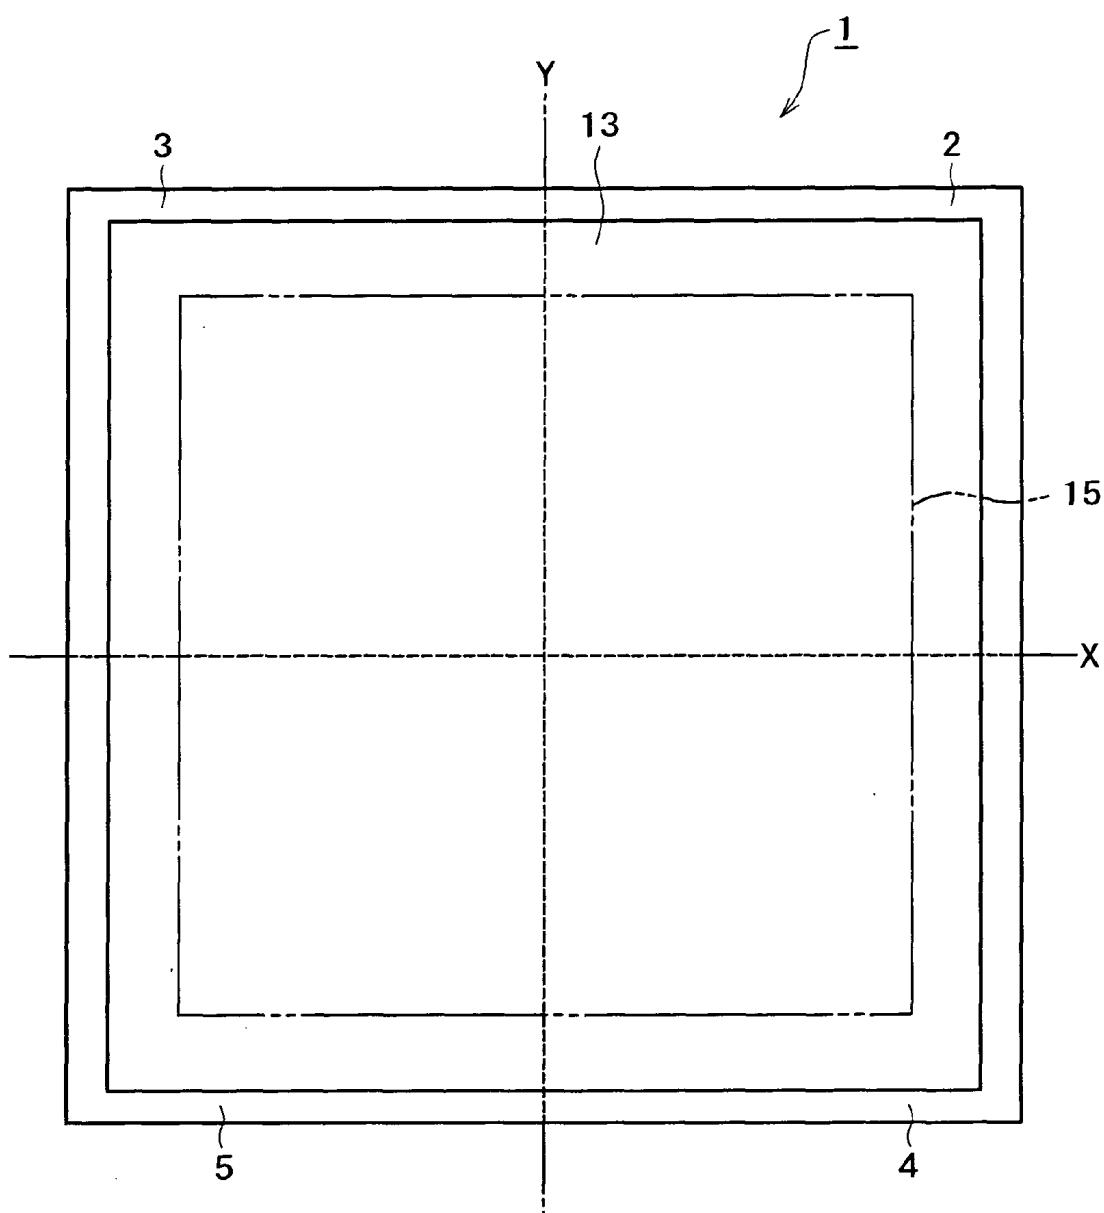


F I G. 7 A

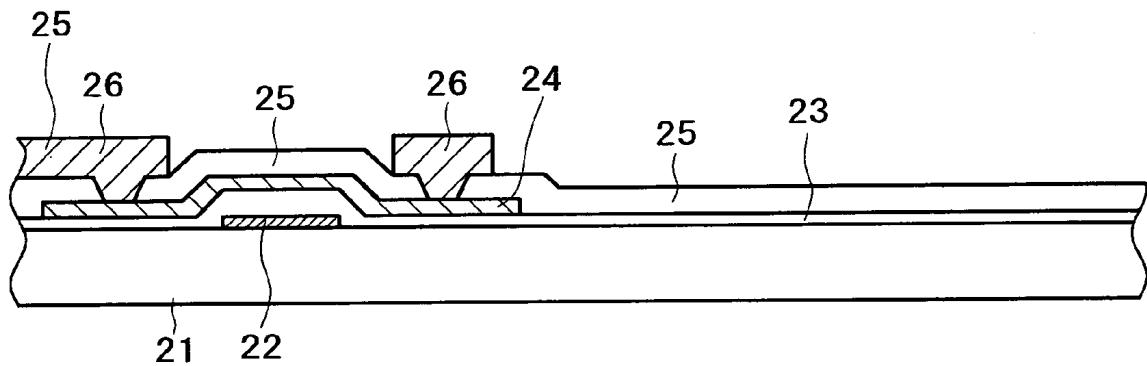

F I G. 7 B

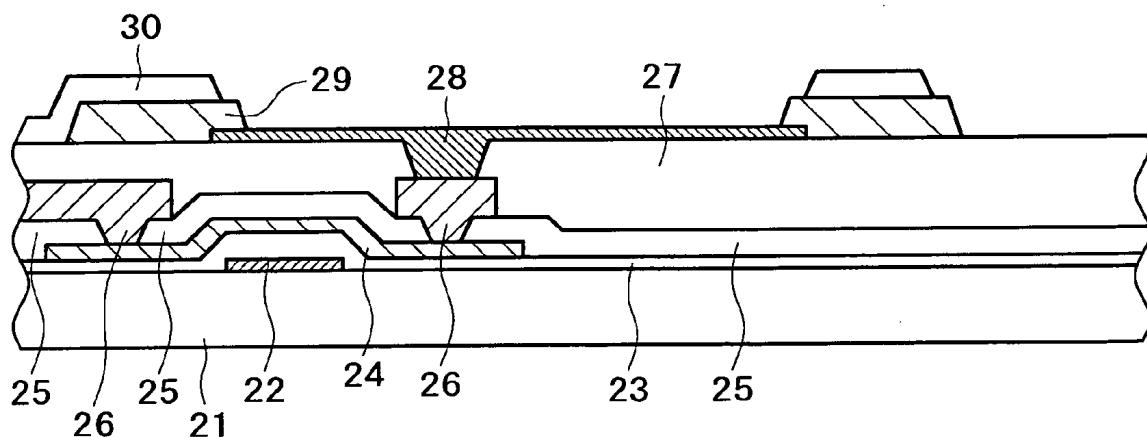

F I G. 7 C

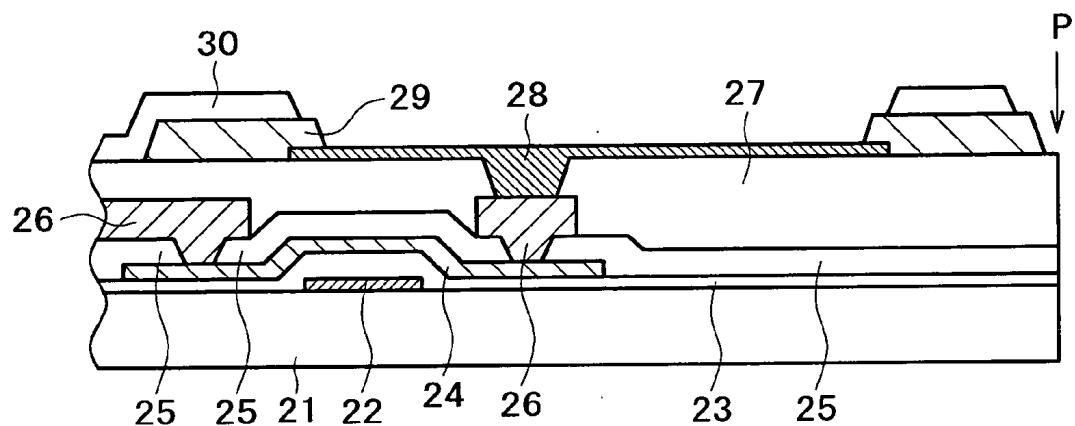

F I G. 7 D

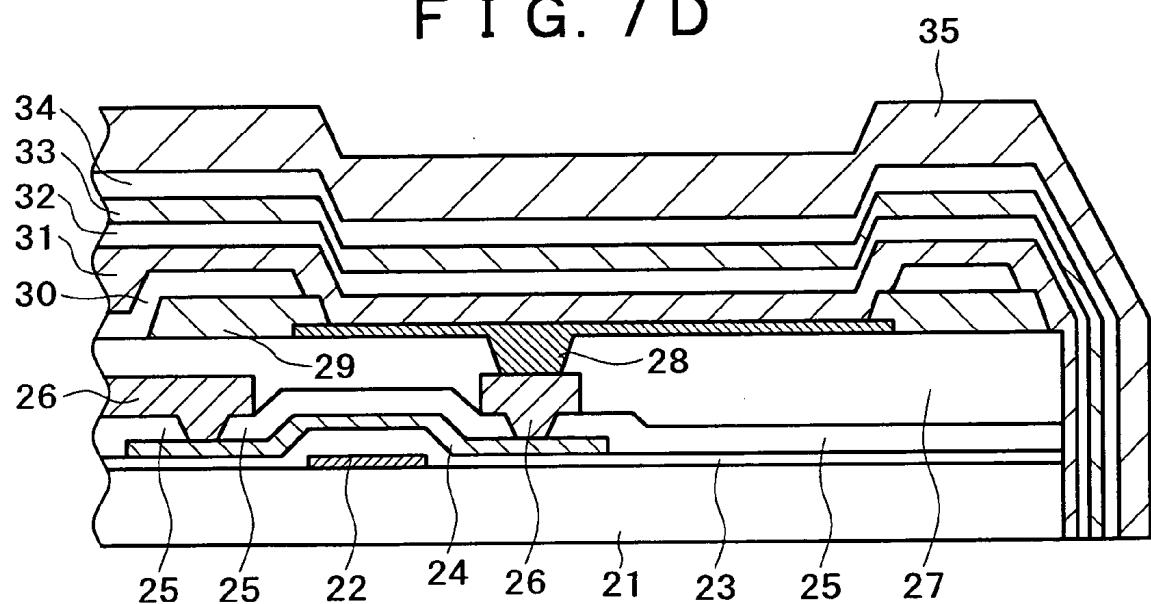


FIG. 7E



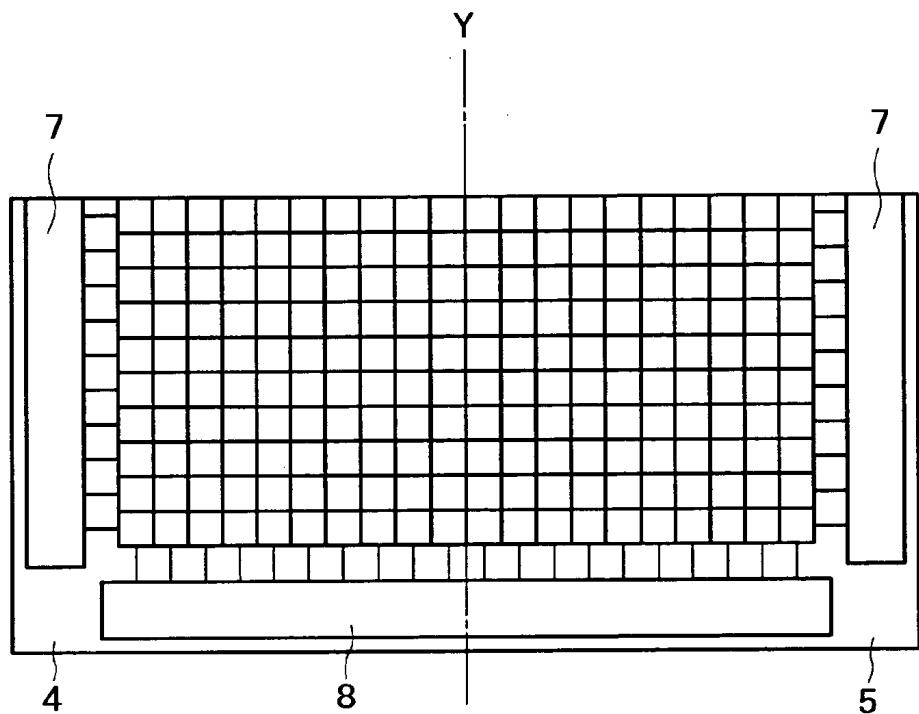


FIG. 8

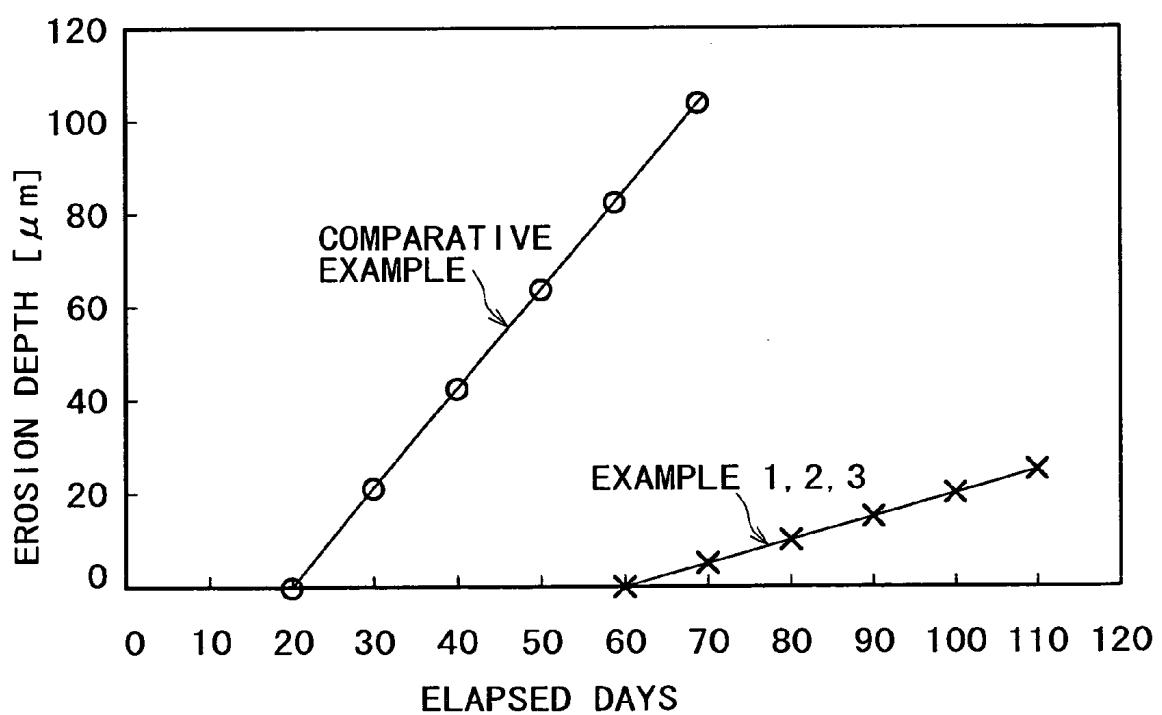

F I G. 9

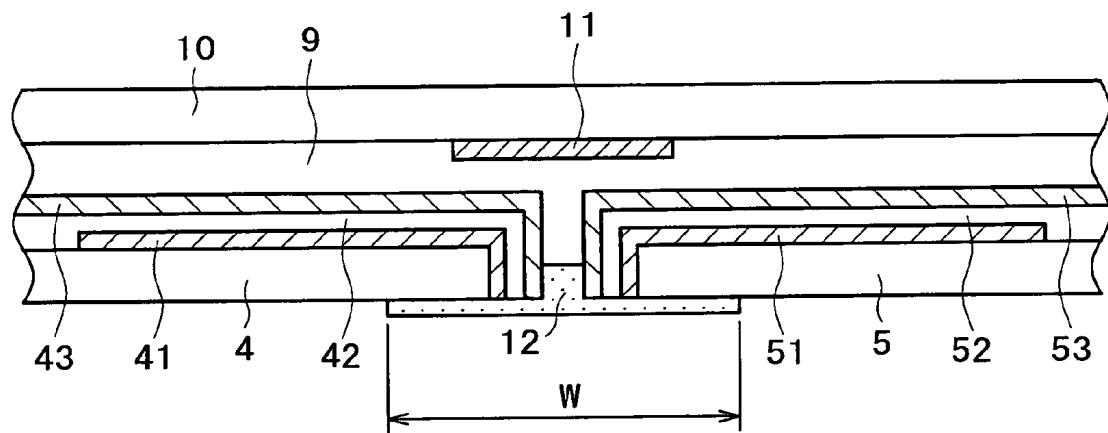

F I G. 10

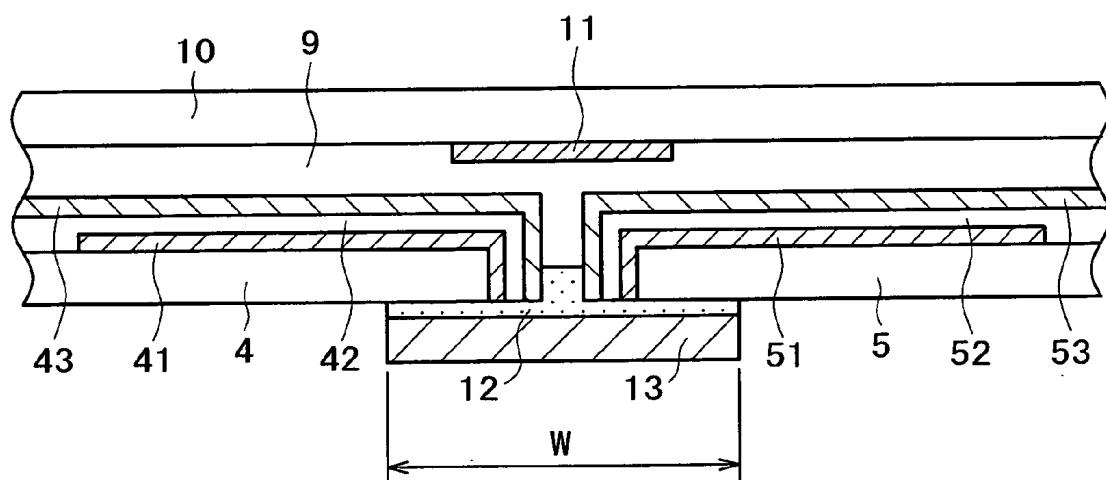


FIG. 11


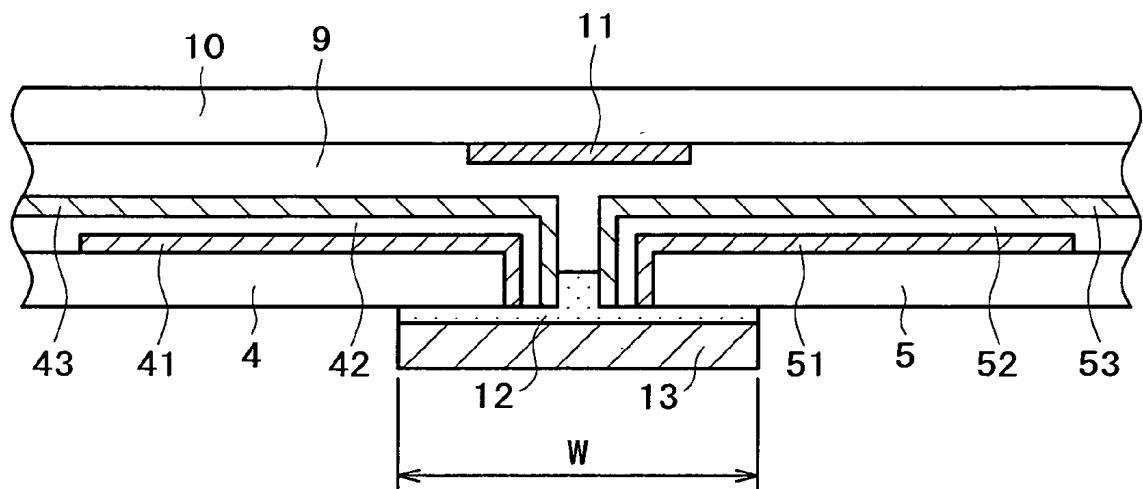


FIG. 12

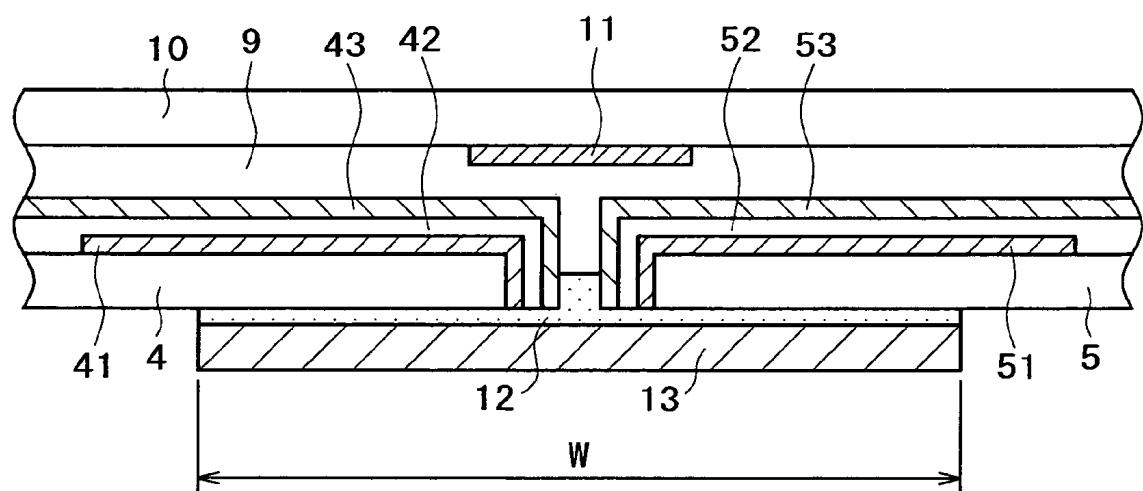

DISPLAY UNIT

BACKGROUND OF THE INVENTION

[0001] The present invention relates to a display unit using organic electroluminescence devices (hereinafter, referred to often as "organic EL devices").

[0002] Recently, in studies and developments for display units coping with the tendency toward higher speed of information, there have been demands toward enlargement of display units such as televisions and monitors not only for use in public locations (railroad stations, buildings, and antechambers and business rooms of hotels) but also for use in general households.

[0003] If the screens of display units are enlarged, however, CRTs (Cathode-Ray Tubes) or monitors such as liquid crystal projectors cause a problem that since the weight and size become large with the increased screen size, the handling becomes inconvenient and the occupied area becomes large.

[0004] For this reason, flat display units being thin and lightweight have been required. A display unit using organic EL devices excellent in high efficiency, thinning, light-weightness, and low dependency on viewing angle has become a focus as one of these flat display units, and has been actively studied and developed.

[0005] Display units using organic EL devices are now being applied to small-sized display units such as digital cameras and cellular telephones. On the other hand, such display units have been regarded as difficult to be applied to medium/large-sized display units such as monitors for personal computers and televisions and large-sized display units for home theaters. For example, as the size of a substrate of such a display unit using organic EL devices becomes large, the equipment scale becomes large to thereby raise the production cost, and it becomes difficult to uniformly form an organic EL film on the large screen and to obtain uniform brightness over the large screen.

[0006] If a panel is of an active matrix type, one or more TFTs (Thin Film Transistors) are provided in pixels for driving the organic EL devices. In this case, as the screen size of the panel becomes larger, the production yield of the TFTs becomes lower due to pixel failures or the like, and thereby it fails to ensure high productivity. Also, if a p-channel transistor is required to be provided in each pixel, or if a CMOS (Complementary Metal Oxide Semiconductor) circuit is formed around a screen for driving the pixel, low-temperature polycrystalline TFTs must be provided. In this case, it is difficult to form the polycrystalline TFTs at once on a large screen by polycrystallization of amorphous silicon by irradiation with laser beams such as excimer laser beams because of the limitation of the width of the laser beams used for polycrystallization. In the case of repeating the laser irradiation by a plurality of times, it is difficult to keep the equalization of TFT characteristics at a joint between laser beams, with a result that portions corresponding to the joints between laser beams form a stripe pattern.

[0007] To solve such a problem, in the field of display units using organic EL devices, there has been known a technique of forming one large screen by joining a plurality of small-sized panels to each other on the same plane, as

disclosed in Japanese Patent Laid-open Nos. Hei 5-205875, 2001-22293, 2001-100668, 2002-6779, and 2002-108253.

[0008] With respect to such a technique, although it is required to make a distance between pixels as small as possible for realizing high-definition of a display screen, it is generally difficult to form patterns of pixel circuits, wiring lines, pixel electrodes in such a manner that the patterns extend to an end face of a substrate of each panel. Accordingly, a large display screen is actually produced by forming patterns of pixel circuits, wiring lines, and pixel electrodes on a raw substrate larger than a finish substrate of a small-sized panel forming part of the large screen, highly accurately cutting the raw substrate at the vicinity of an end face (which is taken as a joint face) by a substrate cutter such as a laser cutter or a dicer, and joining the panels thus obtained to each other.

[0009] By the way, in the case of producing one display screen (large screen) by joining a plurality of panels to each other as described above, at a joint portion between adjacent two of the panels, it is required to make a distance between the outermost pixels on both the panels as small as possible in order to make the joint portion inconspicuous. Accordingly, a distance from a cut end face of each panel to an end of the outermost one of pixels on the panel becomes very short. This may cause an inconvenience. In particular, if organic EL devices are formed by low-molecular EL devices, a film of the EL devices, which is formed by a vacuum vapor-deposition process using an opening mask, becomes larger than the opening, to be thereby close to or in contact with the cutting end face. In this case, when panels are joined to each other, the end of the outermost organic EL device is exposed at a joint portion between the adjacent two of the panels. As a result, there occurs a problem associated with erosion of the organic EL devices by permeation of moisture, air, and the like from the exposed portion of the outermost organic EL device.

SUMMARY OF THE INVENTION

[0010] An object of the present invention is to provide a display unit including a plurality of panels joined to each other into one display screen, which display unit is intended to effectively suppress erosion of organic EL devices.

[0011] To achieve the above object, according to the present invention, there is provided a display unit including a plurality of panels joined to each other into one display screen, each of the panels being formed by using organic electroluminescence devices, wherein a seal material is applied to a joint portion between adjacent two of the plurality of panels in such a manner as to cover the joint portion.

[0012] With this configuration, since the seal material is applied to the joint portion between adjacent two of the plurality of panels, it is possible to suppress permeation of moisture, air, and the like to the organic EL devices by the seal material.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] These and other objects, features, and advantages of the present invention will become more apparent from the following detailed description in conjunction with the accompanying drawings, wherein:

[0014] FIG. 1 is a plan view showing a configuration of a display according to an embodiment of the present invention;

[0015] FIG. 2 is a sectional view taken on line A-A' of FIG. 1;

[0016] FIG. 3 is an enlarged view of a crossing point between an X-axis and a Y-axis in FIG. 1 and its neighborhood;

[0017] FIG. 4 is a view showing a state that a seal material is applied to all joint portions, at each of which adjacent two of panels are joined to each other;

[0018] FIG. 5 is a view showing a state that a plate-like member is stuck on the joint portions via the seal material;

[0019] FIG. 6 is a view showing another shape example of the plate-like member;

[0020] FIGS. 7A to 7E are views illustrating steps of producing a panel structure according to Comparative Example;

[0021] FIG. 8 is a graph illustrating the result of observing erosion deterioration of organic EL devices;

[0022] FIG. 9 is a view illustrating a panel structure according to Example 1;

[0023] FIG. 10 is a view illustrating a panel structure according to Example 2;

[0024] FIG. 11 is a view illustrating a panel structure according to Example 3; and

[0025] FIG. 12 is a view illustrating a panel structure according to each of Examples 4 and 5.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0026] Hereinafter, a preferred embodiment of the present invention will be described in detail with reference to the drawings.

[0027] FIG. 1 is a plan view showing a configuration of a display unit according to an embodiment of the present invention. The illustrated display unit 1 is of an active matrix type, which includes a plurality (four, in this embodiment) of panels 2, 3, 4 and 5 joined to each other on the same plane into one display screen, wherein each of the panels 2, 3, 4, and 5 is formed by using organic EL devices. Adjacent two of the panels 2, 3, 4 and 5 are joined to each other in such a manner that ends thereof are butted to each other on either of an X-axis and a Y-axis perpendicular to each other at the center of the display unit 1 with a micro-gap kept therebetween. A plurality of pixels 6 are arrayed in a matrix pattern in a display area of the display unit 1. Two vertical scanning drive circuits 7 and two horizontal scanning drive circuits 8 are disposed in such a manner as to surround the display area of the display device 1.

[0028] FIG. 2 is a sectional view taken on line A-A' of FIG. 1, and FIG. 3 is an enlarged view of an intersection between the X-axis and Y-axis and its neighborhood. As shown in FIG. 2, a plurality of organic EL devices 41 are arrayed in a matrix pattern on one surface of the panel 4. A light translucent cathode electrode layer 42 and a passivation film 43 are sequentially stacked on the organic EL devices

41. Similarly, a plurality of organic EL devices 51 are formed in a matrix pattern on one plane of the panel 5, and a light translucent cathode electrode layer 52 and a passivation film 53 are sequentially stacked on the organic EL devices 51. While not shown, a plurality of organic EL devices and a cathode electrode layer and a passivation film are similarly provided on each of the panels 2 and 3.

[0029] The two panels 4 and 5 are adjacently disposed on the same plane, and in this state, a common seal glass member 10 is stuck on the upper surface sides of the panels 4 and 5 via a transparent sealing adhesive material 9. The seal glass member 10 is common to the four panels 2, 3, 4, and 5. The outer size of the seal glass member 10 is set to be nearly equal to the outer size of a panel structure composed of the four panels 2, 3, 4 and 5 joined to each other. Black matrixes 11 are formed on one surface, opposed to the panels 4 and 5, of the seal glass member 10 in such a manner as to be each disposed between adjacent two of the organic EL devices 41 and 51. The display unit 1 configured as described above is of a top emission type allowing emergence of light from the upper surface sides, on which the organic EL devices 41 and 51 are provided, of the panels 4 and 5.

[0030] A seal material 12 is applied on a joint portion between the panels 4 and 5 in such a manner as to cover the joint portion. The seal material 12 may be a thermosetting resin, a UV-curable resin, or the like. To be more specific, from the back surface side (non-display screen side) of the panel structure composed of the panels 4 and 5, the seal material 12 is applied to bury the joint portion between the panels 4 and 5. It is to be noted that the joint portion is formed as a fine groove when the panels 4 and 5 are joined to each other. As shown in the figure, the seal material 12 is formed into a stripe shape which extends along the joint portion between the panels 4 and 5 and which has a specific width wider than a width of the joint portion (or gap) between the panels 4 and 5. In addition, at the joint portion between the panels 4 and 5, the seal material 12 is applied to cover the end of the outermost organic EL device 41 on the panel 4 side (leftmost organic EL device 41 in FIG. 2) and also cover the end of the outermost organic EL device 51 on the panel 5 side (rightmost organic EL device 51 in FIG. 2).

[0031] A plate-like member 13 is stuck on the back surface sides of the panels 4 and 5 in such a manner as to cover the joint portion. The plate-like member 13, which may be made from glass, metal, or the like, is adhesively bonded to the back surfaces of the panels 4 and 5 by making use of the adhesive force of the seal material 12. As shown in FIG. 3, the seal material 12 and the plate-like member 13 are similarly provided for each of the other joint portions, that is, for each of a joint portion between the panels 2 and 3, a joint portion between the panels 2 and 4, and a joint portion between the panels 3 and 4. In addition, as shown in FIG. 3, one set of a sub-pixel portion 14R for emission of light of red, a sub-pixel portion 14G for emission of light of green, and a sub-pixel portion 14B for emission of light of blue, which are adjacent to each other, form one pixel 6 (see FIG. 1).

[0032] On the back surface side of the display unit 1, as shown in FIG. 4, the seal material 12 is formed in a cruciform along the four joint portions each extending

between adjacent two of the panels **2**, **3**, **4**, and **5**. On the back surface side of the display unit **1**, as shown in **FIG. 5**, the plate-like member **13** having the shape of a cruciform is stuck on the four joint portions in such a manner as to be overlapped to the seal material **12**.

[0033] After the four panels **2**, **3**, **4** and **5** are arranged on the same plane, a suitable amount of the sealing adhesive material **9** is applied on the panels **2**, **3**, **4**, and **5**, and the seal glass member **10** is stuck thereon. After that, the seal material **12** is applied on the back surface sides (bottom surface sides) of the panels **2**, **3**, **4**, and **5** by using a dispenser or the like. After the seal material **12** is applied, the plate-like member **13** is pressed on the seal material **12**.

[0034] Since the four panels **2**, **3**, **4**, and **5** are joined to each other into one display screen, a display area for image display can be enlarged. At this time, since the seal material **12** is applied on the joint portion between adjacent two of the panels **2**, **3**, **4** and **5**, it is possible to cover the ends of the outermost organic EL devices **41** and **51** at the joint portion, and hence to suppress permeation of moisture, air, and the like thereto; and since the plate-like member **13** is stuck on the joint portion between adjacent two of the panels **2**, **3**, **4**, and **5**, it is possible to reinforce the joint portion and hence to enhance the mechanical strength of the display unit **1**.

[0035] The plate-like material **13** is preferably made from a material having high thermal conductivity, for example, a metal such as aluminum. With this configuration, it is possible to efficiently release heat caused upon drive of the display unit **1** through the plate-like member **13**, and hence to enhance the heat dissipation characteristic of the display unit **1**. Further, the surface of the plate-like member **13** is preferably colored into black, for example, by a blackening treatment. With this configuration, it is possible to prevent scattering of light incident from the upper surface side (seal glass member **10** side) of the display unit **1**, and hence to make the joint portion between adjacent two of the panels **2**, **3**, **4** and **5** inconspicuous from external.

[0036] As shown in **FIG. 6**, the plate-line member **13** may be formed into a rectangular shape similar to that of the outer shape of the display unit **1**. At this time, the outer dimension of the plate-like member **13** is preferably smaller than that of the display unit **1** and larger than that of the display area **15**. With this configuration, since the plate-like member **13** is stuck on the entire back surface sides of the panels **2**, **3**, **4** and **5**, it is possible to further enhance both the heat dissipation and the mechanical strength of the display unit **1**.

[0037] The present invention will be more apparent by way of the following examples. In the examples, parts corresponding to those in the above-described display unit **1** are denoted by the same reference numerals and the overlapped description thereof is omitted.

Comparative Example

[0038] In this comparative example, an active matrix type display unit, which includes two panels joined to each other, wherein no seal material is applied to a joint portion between the panels, is prepared, and erosion deterioration of organic EL devices in this display unit is examined. In this display unit, a pixel circuit composed of low-temperature polycrystalline silicon TFTs arrayed with a pitch of $330 \mu\text{m}$ is formed on a panel substrate having a display area of $50 \text{ mm} \times 50 \text{ mm}$.

[0039] As shown in **FIG. 7A**, a gate electrode **22** made from a high-melting point metal such as chromium (Cr) or molybdenum (Mo) was formed on a panel substrate **21** made from glass. A gate insulating film **23** made from SiN (silicon nitride)/SiO₂ (silicon oxide), and an active layer **24** made from poly-silicon were sequentially stacked on the gate electrode **22**. An interlayer insulating film **25** was formed so as to cover the gate insulating film **23** and the active layer **24**, and then contact holes communicated to the active layer **24** were formed in the interlayer insulating film **25**. A low-resistance metal layer **26** made from aluminum (Al) was stacked in such a manner as to bury the contact holes.

[0040] As shown in **FIG. 7B**, a planarization film **27** having a thickness of $2 \mu\text{m}$ and an anode electrode **28** made from Cr and having a thickness of 220 nm , an insulating film **29** made from SiO₂ for forming a light emission opening portion, and a low-resistance metal layer **30** having a thickness of 200 nm for forming a cathode extraction electrode were formed on the interlayer insulating film **25** and the low-resistance metal layer **26**, followed by patterning.

[0041] As shown in **FIG. 7C**, an end portion (cutting point) P, offset outwardly from the outermost pixel on the display area by $30 \mu\text{m}$, of the panel substrate **21** was cut by a glass cutter. Two pieces of the panel substrates **21**, each of which was cut at the cutting point P, were thus prepared.

[0042] As shown in **FIG. 7D**, a 2-TNATA (4,4',4"-tris(2-naphthylphenylamino)triphenylamine). Layer (thickness: 50 nm) was formed as a hole-injection layer **31** on each panel substrate **21** at a deposition rate of 0.1 nm/sec in vacuum by a vacuum vapor-deposition process. An α -NPD (naphthylphenyldiamine) layer (thickness: $30 \mu\text{m}$) was formed as a hole-transfer layer **32** on the hole-injection layer **31** at a deposition rate of 0.1 nm/sec in vacuum by a vacuum vapor-deposition process. An Alq₃ (8-hydroxy quinoline aluminum) layer (thickness: $40 \mu\text{m}$) was formed as a light-emitting layer **33** on the hole-transfer layer **32** by vapor-deposition. An MgAg (composition: 9:1) layer (thickness: 20 nm) was formed as a cathode electrode **34** on the light-emitting layer **33** in vacuum by a vacuum vapor-deposition process. In this case, a vapor-deposition mask was used, which was set so as to cover the entire light-emitting area while being not in contact with the anode electrode **28** but in contact with the Al extraction electrode. An SiNx film (thickness: $2 \mu\text{m}$) was formed as an inorganic seal layer **35** on the cathode surface by a plasma CVD process. In this case, an area mask was used, which was set so as not to cover contact portions being in contact with the anode electrode and the cathode electrode.

[0043] Two panels **4** and **5** were thus obtained and joined to each other as follows. As shown in **FIG. 7E**, the two panels **4** and **5** were arranged such that the cut surfaces thereof were opposed to each other with a gap of $50 \mu\text{m}$ kept therebetween. In this state, a thermosetting resin as a seal material was applied on the area covered with the SiNx film, and a seal glass member having a size not to cover the electrode contact portions was stuck on the seal material. The two panels **4** and **5** were then heated at 60°C . for 4 hr, to be joined to each other. A panel structure was thus produced.

[0044] The panel structure was left in atmospheric air and was driven to cause light emission from the organic EL devices at an interval of a specific period of time, and an

erosion degree of the organic EL devices due to permeation of moisture, air, and the like was observed with elapsed days using an erosion distance from the cut end of each panel to the light-emitting region as a parameter. As a result, it was confirmed that in Comparative Example, as shown in **FIG. 8**, erosion to the light-emitting portion begins after an elapse of 20 days since start of observation, and proceeds at an erosion rate of about $2 \mu\text{m}$ per one day.

EXAMPLE 1

[0045] In this example, an active matrix type display unit, which includes two panels joined to each other, wherein a seal material is applied to a joint portion between the panels, is prepared, and erosion deterioration of organic EL devices in this display unit is examined.

[0046] In this example, two panels were produced and joined to each other into one panel structure in the same manner as that described in Comparative Example.

[0047] Next, as shown in **FIG. 9**, from the back surface side of the panel structure composed of the panels **4** and **5**, a seal material **12** made from a thermosetting resin was applied on a joint portion between the panels **4** and **5**. To cover a portion separated from the cut end of each of the panels **4** and **5** by a distance of 5 mm with the seal material **12**, an applying width W of the seal material **12** was set to about 10 mm. The panel structure was then heated at 60°C . for 4 hr.

[0048] The panel structure was left in atmospheric air and was driven to cause light emission from the organic EL devices at an interval of a specific period of time, and an erosion degree of the organic EL devices due to permeation of moisture, air, and the like was observed with elapsed days using an erosion distance from the cut end of each panel to the light-emitting region as a parameter. As a result, it was confirmed that in Example 1, as shown in **FIG. 8**, erosion to the light-emitting portion begins after an elapse of 60 days since start of observation, and proceeds at an erosion rate of about $0.5 \mu\text{m}$ per one day. This shows that the erosion degree to the organic EL devices in Example 1 becomes smaller than that in Comparative Example.

EXAMPLE 2

[0049] In this example, an active matrix type display unit, which includes two panels joined to each other, wherein a seal material is applied to a joint portion between the panels and a plate-like member made from glass and having a width of 10 mm is stuck on the seal material, is prepared, and erosion deterioration of organic EL devices in this display unit is examined.

[0050] In this example, two panels were produced and joined to each other into one panel structure in the same manner as that described in Comparative Example.

[0051] As shown in **FIG. 10**, from the back surface side of the panel structure composed of the two panels **4** and **5**, a seal material **12** made from a thermosetting resin was applied on a joint portion between the panels **4** and **5**. To cover a portion separated from the cut end of each of the panels **4** and **5** by a distance of 5 mm with the seal material **12**, an applying width W of the seal material **12** was set to about 10 mm. A plate-like member **13** made from glass and having a width of 10 mm (the same width as that of the seal material **12**) was stuck on the seal material **12**. The panel structure was then heated at 60°C . for 4 hr.

material **12**) was stuck on the seal material **12**. The panel structure was then heated at 60°C . for 4 hr.

[0052] The panel structure was left in atmospheric air and was driven to cause light emission from the organic EL devices at an interval of a specific period of time, and an erosion degree of the organic EL devices due to permeation of moisture, air, and the like was observed with elapsed days using an erosion distance from the cut end of each panel to the light-emitting region as a parameter. As a result, it was confirmed that in Example 2, as shown in **FIG. 8**, erosion to the light-emitting portion begins after an elapse of 60 days since start of observation, and proceeds at an erosion rate of about $0.5 \mu\text{m}$ per one day.

EXAMPLE 3

[0053] In this example, an active matrix type display unit, which includes two panels joined to each other, wherein a seal material is applied to a joint portion between the panels and a plate-like member made from aluminum (which has been subjected to a blackening treatment) and having a width of 10 mm is stuck on the seal material, is prepared, and erosion deterioration of organic EL devices in this display unit is examined.

[0054] In this example, two panels were produced and joined to each other, to obtain one panel structure in the same manner as that described in Comparative Example.

[0055] As shown in **FIG. 11**, from the back surface side of the panel structure composed of the two panels **4** and **5**, a seal material **12** made from a thermosetting resin was applied on a joint portion between the panels **4** and **5**. To cover a portion separated from the cut end of each of the panels **4** and **5** by a distance of 5 mm with the seal material **12**, an applying width W of the seal material **12** was set to about 10 mm. A plate-like member **13** made from aluminum (which has been subjected to a blackening treatment) having a width of 10 mm (the same width as that of the seal material **12**) was stuck on the seal material **12**. The panel structure was then heated at 60°C . for 4 hr.

[0056] The panel structure was left in atmospheric air and was driven to cause light emission from the organic EL devices at an interval of a specific period of time, and an erosion degree of the organic EL devices due to permeation of moisture, air, and the like was observed with elapsed days using an erosion distance from the cut end of each panel to the light-emitting region as a parameter. As a result, it was confirmed that in Example 3, as shown in **FIG. 8**, erosion to the light-emitting portion begins after an elapse of 60 days since start of observation, and proceeds at an erosion rate of about $0.5 \mu\text{m}$ per one day, and the mechanical strength of the joint portion is increased.

EXAMPLE 4

[0057] In this example, an active matrix type display unit, which includes two panels joined to each other, wherein a seal material is applied to a joint portion between the panels and a plate-like member made from aluminum (which has been subjected to a blackening treatment) and having a width of 20 mm is stuck on the seal material, is prepared, and erosion deterioration of organic EL devices in this display unit is examined.

[0058] In this example, two panels were produced and joined to each other, to obtain one panel structure in the same manner as that described in Comparative Example.

[0059] As shown in **FIG. 12**, from the back surface side of the panel structure composed of the two panels **4** and **5**, a seal material **12** made from a thermosetting resin was applied on a joint portion between the panels **4** and **5**. To cover a portion separated from the cut end of each of the panels **4** and **5** by a distance of 10 mm with the seal material **12**, an applying width **W** of the seal material **12** was set to about 20 mm. A plate-like member **13** made from aluminum (which has been subjected to a blackening treatment) having a width of 20 mm (the same width as that of the seal material **12**) was stuck on the seal material **12**. The panel structure was then heated at 60° C. for 4 hr.

[0060] The panel structure was left in atmospheric air and was driven to cause light emission from the organic EL devices at an interval of a specific period of time, and an erosion degree of the organic EL devices due to permeation of moisture, air, and the like was observed with elapsed days using an erosion distance from the cut end of each panel to the light-emitting region as a parameter. As a result, it was confirmed that in Example 4, erosion to the light-emitting portion does not appear even after an elapse of 100 days since start of observation.

EXAMPLE 5

[0061] In this example, an active matrix type display unit, which includes four panels joined to each other, wherein a seal material is applied to a joint portion between adjacent two of the panels and a plate-like member made from aluminum (which has been subjected to a blackening treatment) having a width of 20 mm is stuck on the seal material, is prepared, and erosion deterioration of organic EL devices in this display unit is examined.

[0062] In this example, four panels **2**, **3**, **4**, and **5** shown in **FIG. 1** were produced and joined to each other into one panel structure in the same manner as that described in Comparative Example.

[0063] Like the manner described in Example 4 (see **FIG. 12**), from the back surface side of the panel structure composed of the four panels **2**, **3**, **4** and **5**, a seal material **12** made from a thermosetting resin was applied on a joint portion between adjacent two of the panels **2**, **3**, **4** and **5**. To cover a portion separated from the cut end of each of the panels **2**, **3**, **4** and **5** by a distance of 10 mm with the seal material **12**, an applying width **W** of the seal material **12** was set to about 20 mm. A cruciform plate-like member **13** (see **FIG. 5**), made from aluminum (which has been subjected to

a blackening treatment) having a width of 20 mm (the same width as that of the seal material **12**), was stuck on the seal material **12**. The panel structure was then heated at 60° C. for 4 hr.

[0064] The panel structure was left in atmospheric air and was driven to cause light emission from the organic EL devices at an interval of a specific period of time, and an erosion degree of the organic EL devices due to permeation of moisture, air, and the like was observed with elapsed days using an erosion distance from the cut end of each panel to the light-emitting region as a parameter. As a result, it was confirmed that in Example 5, erosion to the light-emitting portion does not appear even after an elapse of 100 days since start of observation.

[0065] As described above, the display unit produced according to the present invention is configured such that a plurality of panels are joined to each other into one display screen and a seal material is applied to the joint portion between adjacent two of the plurality of panels. As a result, the display unit makes it possible to effectively suppress erosion of organic EL devices and hence to prevent deterioration of characteristics of the display unit.

[0066] While the preferred embodiment and examples have been described using specific terms, such description is for illustrative purposes only, and it is to be understood that changes and variations may be made without departing from the spirit or scope of the following claims.

What is claimed is:

1. A display unit comprising:
 - a plurality of panels joined to each other into one display screen, each of said panels being formed by using organic electroluminescence devices;
 - wherein a seal material is applied to a joint portion between adjacent two of said plurality of panels in such a manner as to cover said joint portion.
2. A display unit according to claim 1, wherein a plate-like member is stuck on said joint portion via said seal material.
3. A display unit according to claim 2, wherein said plate-like member is made from a material having a high thermal conductivity.
4. A display unit according to claim 2, wherein a surface of said plate-like member is colored into black.

* * * * *

专利名称(译)	显示单元		
公开(公告)号	US20040051451A1	公开(公告)日	2004-03-18
申请号	US10/655146	申请日	2003-09-04
[标]申请(专利权)人(译)	KAWASE KIMITAKA 木岛安则 佐藤由纪夫 TAMASHIRO仁		
申请(专利权)人(译)	KAWASE KIMITAKA 木岛安则 佐藤由纪夫 TAMASHIRO仁		
当前申请(专利权)人(译)	JOLED INC.		
[标]发明人	KAWASE KIMITAKA KIJIMA YASUNORI SATO YUKIO TAMASHIRO HITOSHI		
发明人	KAWASE, KIMITAKA KIJIMA, YASUNORI SATO, YUKIO TAMASHIRO, HITOSHI		
IPC分类号	H01L51/50 G09F9/40 H01L27/32 H01L51/52 H05B33/04		
CPC分类号	H01L27/3244 H05B33/04 H01L51/5237 H01L27/3293 H01L51/5243 H01L51/5246 H01L51/5253		
优先权	2002267847 2002-09-13 JP		
其他公开文献	US7045951		
外部链接	Espacenet USPTO		

摘要(译)

显示单元包括彼此连接成一个显示屏的多个面板。每个面板通过使用有机EL器件形成。在该显示单元中，密封材料以覆盖接合部分的方式施加到相邻的两个面板之间的接合部分，从而抑制有机EL装置中的水分，空气等的渗透。

