



US009858866B2

(12) **United States Patent**  
**Kim et al.**

(10) **Patent No.:** **US 9,858,866 B2**  
(45) **Date of Patent:** **Jan. 2, 2018**

(54) **ORGANIC LIGHT-EMITTING DISPLAY DEVICE**

(71) Applicant: **LG Display Co., Ltd.**, Seoul (KR)

(72) Inventors: **Jin Hyoung Kim**, Goyang-si (KR);  
**Seung Tae Kim**, Goyang-si (KR);  
**Kyoung Sik Choi**, Daejeon (KR);  
**UiTaek Jeong**, Seoul (KR)

(73) Assignee: **LG DISPLAY CO., LTD.**, Seoul (KR)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/389,135**

(22) Filed: **Dec. 22, 2016**

(65) **Prior Publication Data**

US 2017/0103708 A1 Apr. 13, 2017

**Related U.S. Application Data**

(63) Continuation of application No. 13/649,230, filed on Oct. 11, 2012, now Pat. No. 9,548,020.

(30) **Foreign Application Priority Data**

Oct. 12, 2011 (KR) ..... 10-2011-0104184

(51) **Int. Cl.**

**G09G 3/30** (2006.01)  
**G09G 3/3291** (2016.01)

(Continued)

(52) **U.S. Cl.**

CPC ..... **G09G 3/3291** (2013.01); **G09G 3/3233** (2013.01); **G09G 3/3266** (2013.01);  
(Continued)

(58) **Field of Classification Search**

CPC .. G09G 3/3208; G09G 3/30; G09G 2320/045;  
G09G 3/3266; G09G 3/3674; G09G  
3/3677

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,977,470 B2 12/2005 Tseng  
7,345,660 B2 3/2008 Mizukoshi et al.  
(Continued)

FOREIGN PATENT DOCUMENTS

CN 101859536 A 10/2010  
CN 201010530854 10/2010  
(Continued)

OTHER PUBLICATIONS

Kanicki, "100 dpi 4-a-Si:H TFTs Active-Matrix Organic Polymer Light-Emitting Display", IEEE Journal of Selected Topics in Quantum Electronics, vol. 10, No. 1, 2004, p. 16-25.\*

(Continued)


*Primary Examiner* — Yuzhen Shen

(74) *Attorney, Agent, or Firm* — Seed Intellectual Property Law Group LLP

(57) **ABSTRACT**

An organic light-emitting display device includes: an organic light-emitting panel comprising a plurality of pixel regions, each pixel region comprising a scan line and a data line crossing each other, each pixel region further comprising an organic light-emission element and a drive transistor configured to drive the organic light emission element; and a circuit configured to sense a threshold voltage of the drive transistor in a sensing interval and control a light emission of the organic light emission element within the pixel region in a display interval.

**20 Claims, 10 Drawing Sheets**

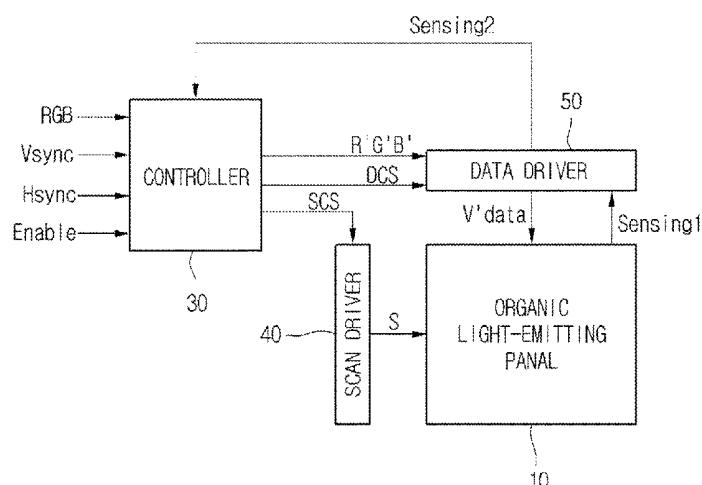

(51)	<b>Int. Cl.</b>		2011/0006191 A1*	1/2011	Watanabe .....	H04N 5/232
	<i>G09G 3/3266</i>	(2016.01)				250/208.1
	<i>G09G 3/3233</i>	(2016.01)	2011/0122119 A1*	5/2011	Bae .....	G09G 3/3233
	<i>G09G 3/3208</i>	(2016.01)				345/211
(52)	<b>U.S. Cl.</b>		2011/0157134 A1*	6/2011	Ogura .....	G09G 3/20
	CPC ... <i>G09G 3/3208</i> (2013.01); <i>G09G 2300/0465</i> (2013.01); <i>G09G 2300/0814</i> (2013.01); <i>G09G 2300/0819</i> (2013.01); <i>G09G 2310/027</i> (2013.01); <i>G09G 2310/0297</i> (2013.01); <i>G09G 2320/0233</i> (2013.01); <i>G09G 2320/045</i> (2013.01)					345/211

(56) **References Cited**

## U.S. PATENT DOCUMENTS

7,535,442 B2	5/2009	Yamashita et al.
7,884,786 B2	2/2011	Kim et al.
7,932,877 B2	4/2011	Tanada et al.
8,115,707 B2	2/2012	Nathan et al.
8,427,397 B2	4/2013	Kwon et al.
8,791,887 B2	7/2014	Smith et al.
8,836,691 B2	9/2014	Ryu et al.
9,548,020 B2 *	1/2017	Kim .....
2005/0156837 A1 *	7/2005	Kasai .....
		G09G 3/3275
		345/77
2007/0040770 A1 *	2/2007	Kim .....
		G09G 3/3233
		345/76
2008/0074413 A1 *	3/2008	Ogura .....
		G09G 3/3233
		345/212
2008/0191976 A1	8/2008	Nathan et al.
2008/0303754 A1	12/2008	Murata et al.
2009/0140959 A1	6/2009	Nam et al.

## FOREIGN PATENT DOCUMENTS

CN	102074189 A	5/2011
CN	102163402 A	8/2011
DE	102010061736 A1	6/2011
KR	1020110061772 A	6/2011
KR	20120045252 A	5/2012
KR	20130036661 A	4/2013
KR	20130037081 A	4/2013

## OTHER PUBLICATIONS

Office Action issued in corresponding Chinese Patent Application No. 201210384765.0, dated Jun. 24, 2014, 20 pages.  
 Office Action issued in corresponding Korean Patent Application No. 10-2011-0104184, dated Feb. 28, 2014, 4 pages.  
 Office Action issued in corresponding Korean Patent Application No. 10-2011-0104184, dated Sep. 30, 2014, 6 pages.  
 Office Action issued in corresponding German Patent Application No. 102012109738.0, dated May 13, 2014, 16 pages.

\* cited by examiner

Fig.1

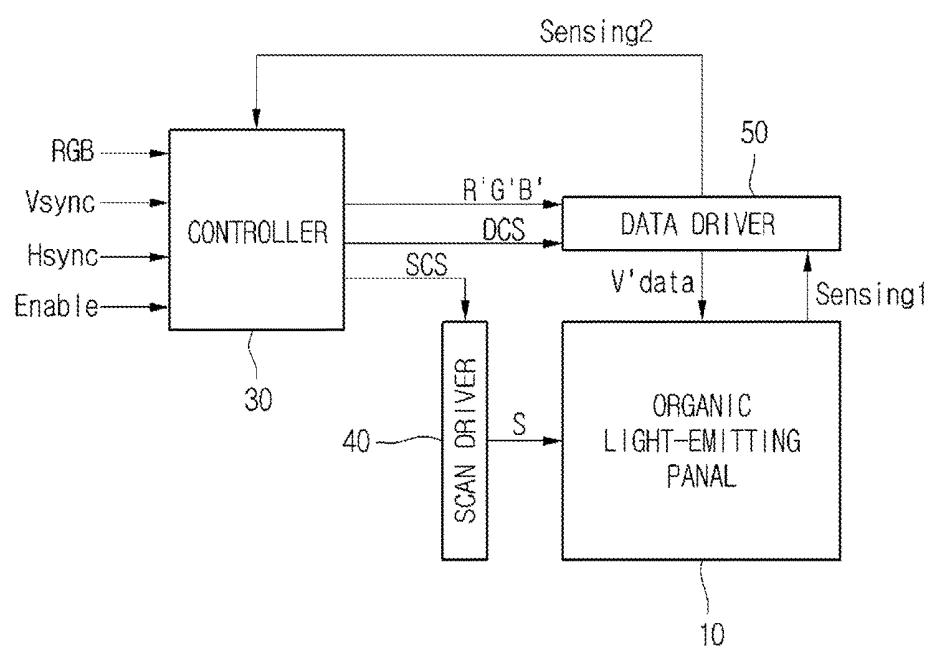


Fig. 2

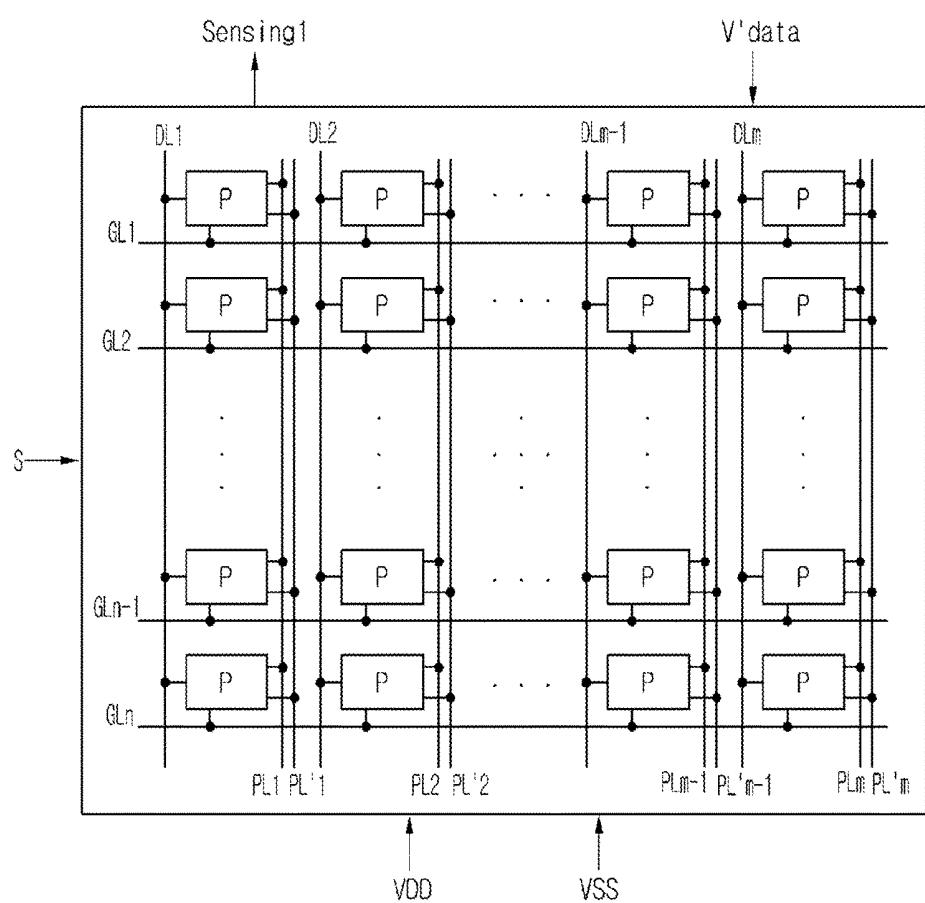


Fig. 3

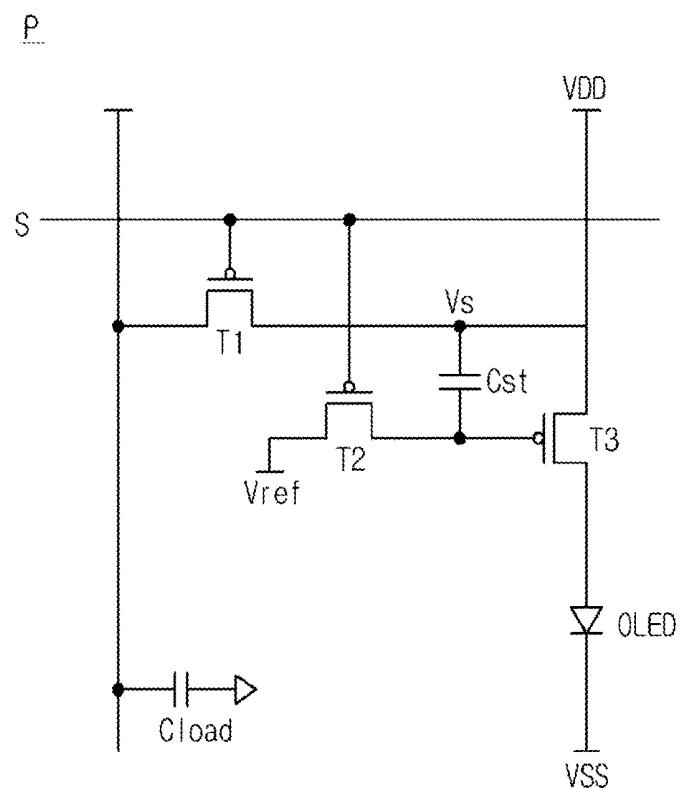


Fig. 4

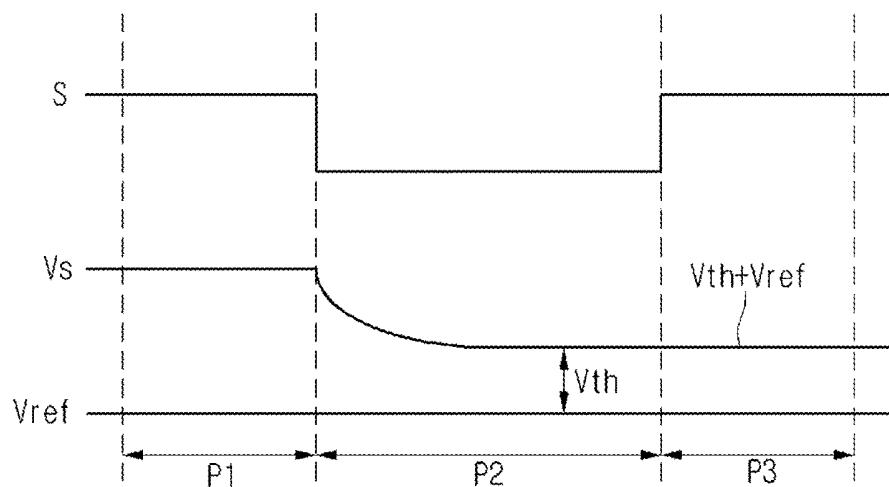


Fig. 5A

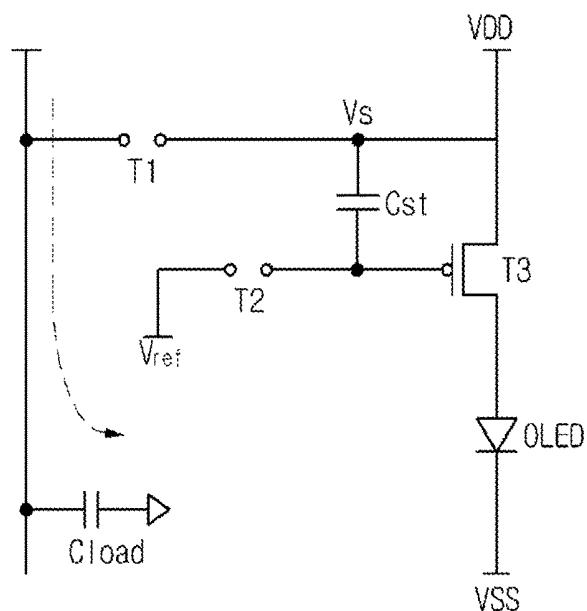


Fig. 5B

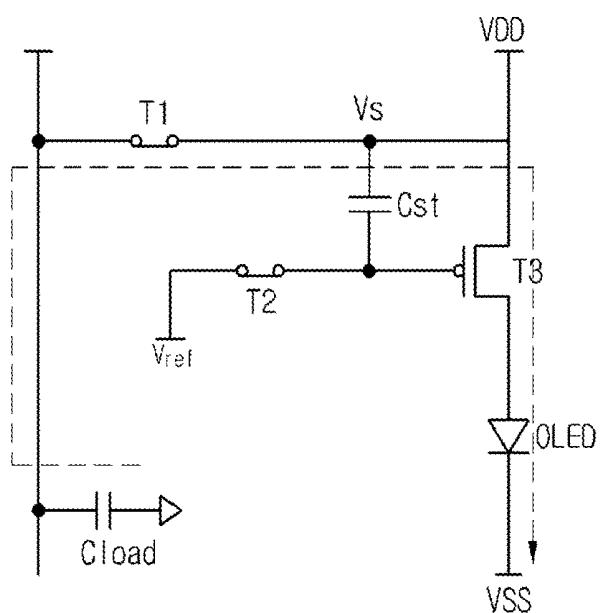


Fig.5C

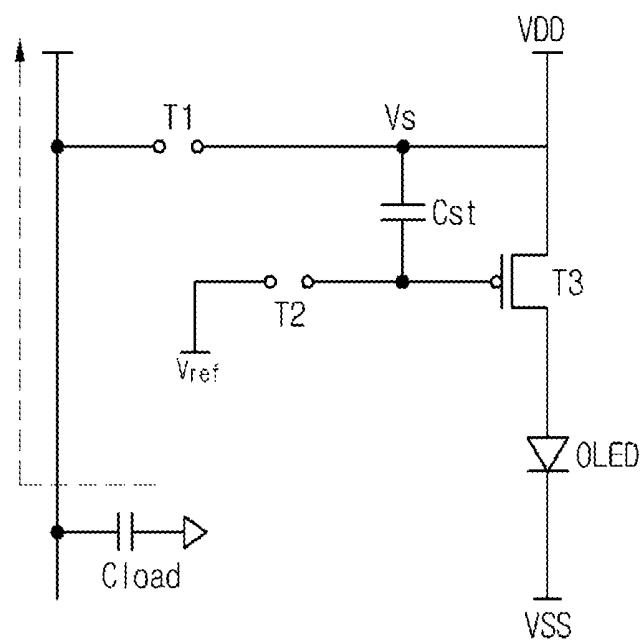


Fig. 6

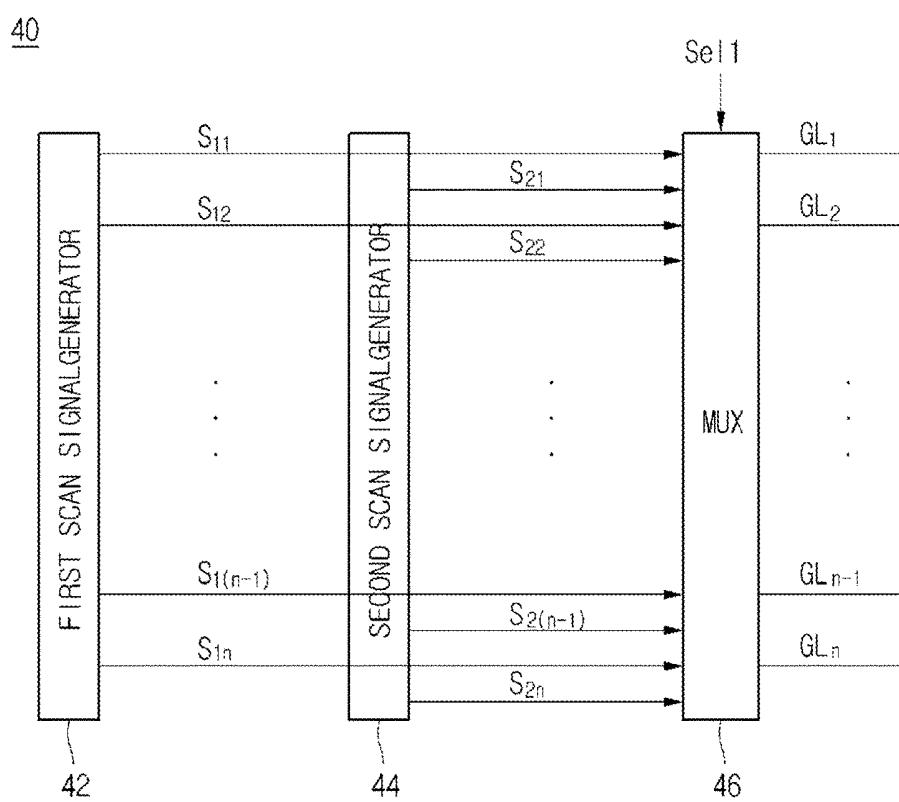


Fig. 7

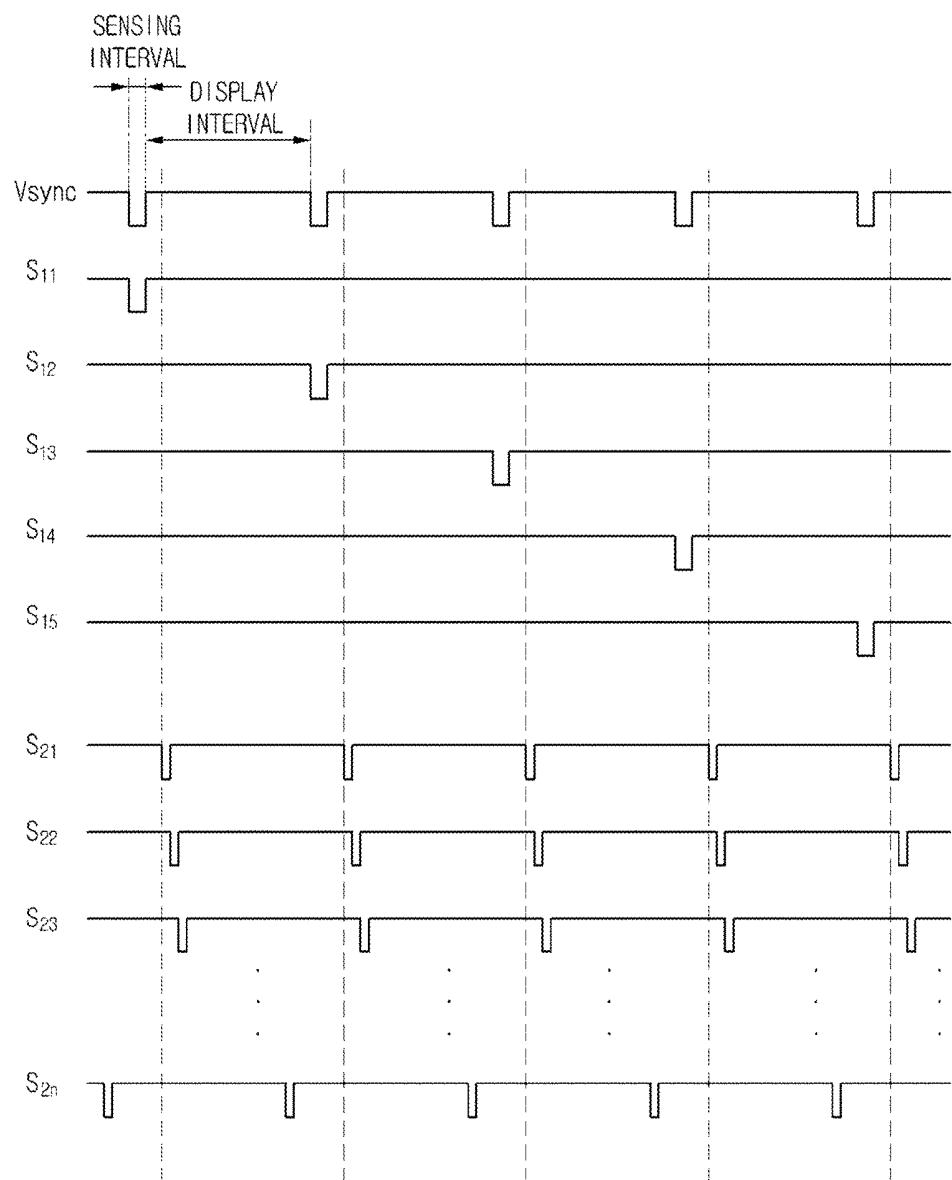


Fig. 8

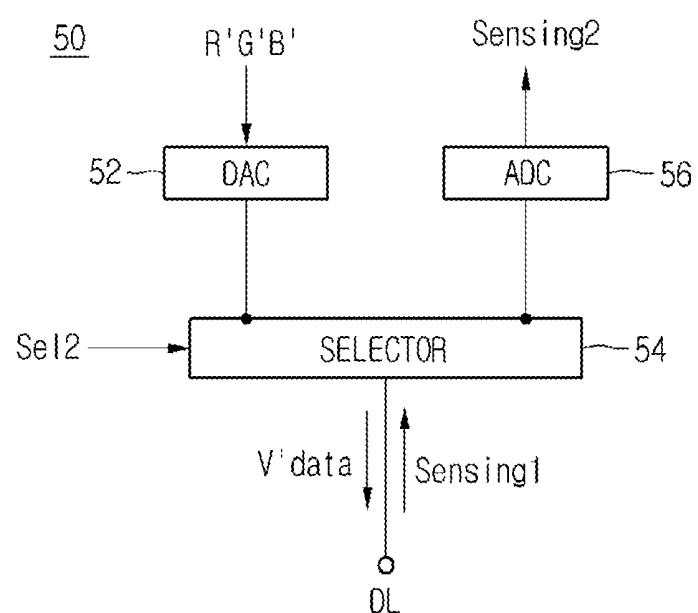


Fig. 9


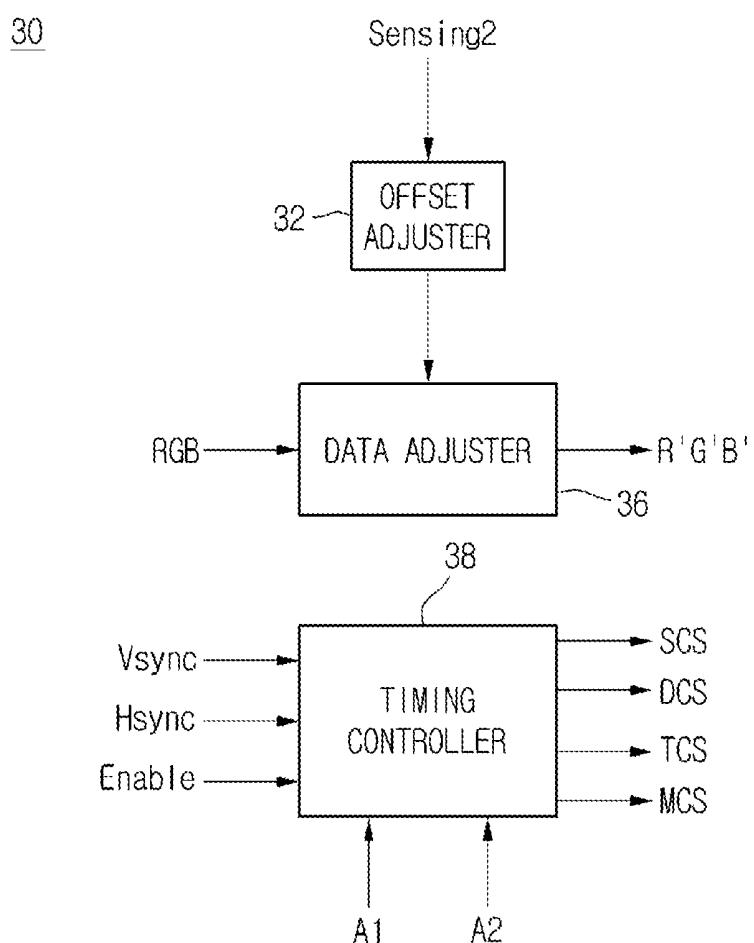


Fig. 10

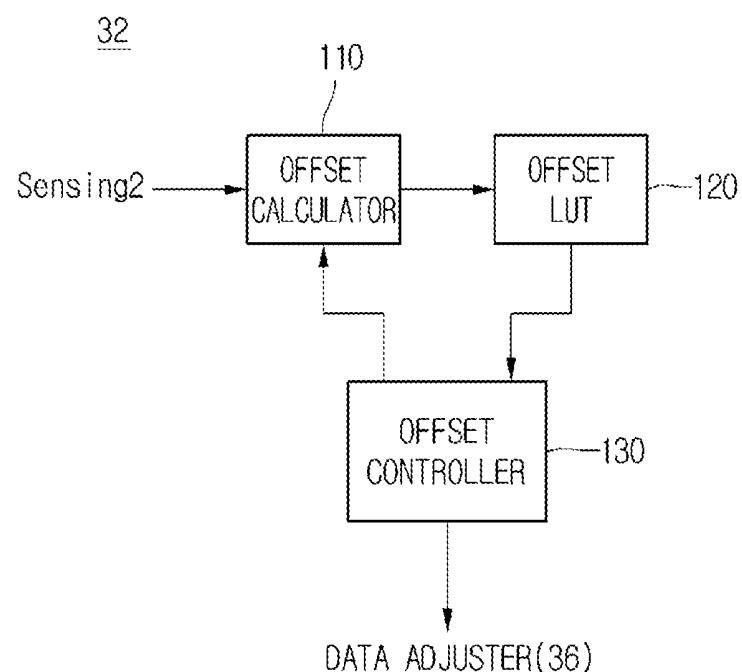

## ORGANIC LIGHT-EMITTING DISPLAY DEVICE

The present application is a Continuation of U.S. patent application Ser. No. 13/649,230 filed on Oct. 11, 2012, which claims benefit of priority under 35 U.S.C. §119(a) of Korean Patent Application No. 10-2011-0104184 filed on Oct. 12, 2011, which is hereby incorporated by reference in its entirety.

### BACKGROUND

#### Field of the Invention

Devices for displaying information are being widely developed. The display devices include liquid crystal display (LCD) devices, organic light-emitting display (OLED) devices, electrophoresis display devices, field emission display (FED) devices, and plasma display devices.

#### Discussion of the Related Art

Among these display devices, OLED devices have the features of lower power consumption, wider viewing angle, lighter weight and higher brightness compared to LCD devices. As such, the OLED device is considered to be next generation display devices.

Thin film transistors used in the organic light-emitting display device can be driven in high speed. To this end, the thin film transistors increase carrier mobility using a semiconductor layer, which is formed from polysilicon. Polysilicon can be derived from amorphous silicon through a crystallizing process.

A laser scanning mode is widely used in the crystallizing process. During such a crystallizing process, the power of a laser beam can be unstable. As such, the thin film transistors formed on the scanned line, which is scanned by the laser beam, can have different threshold voltages from each other. This can cause image quality to be non-uniform between pixel regions.

To address this matter, a technology detecting the threshold voltages of pixel regions and compensating for the threshold voltages of thin film transistors had been proposed.

However, in order to realize such threshold voltage compensation, not only a transistor for detecting the threshold voltage must be added into the pixel region but also signal lines used for controlling the thin film transistors must be added. Due to this, the pixel region becomes complex, and furthermore an aperture of the pixel region decreases.

### BRIEF SUMMARY

According to a general aspect of the present embodiment, an organic light-emitting display device includes: an organic light-emitting panel comprising a plurality of pixel regions, each pixel region comprising a scan line and a data line crossing each other, each pixel region further comprising an organic light-emission element and a drive transistor configured to drive the organic light emission element; and a circuit configured to sense a threshold voltage of the drive transistor in a sensing interval and control a light emission of the organic light emission element within the pixel region in a display interval.

According to a general aspect of the present embodiment, in a method for operating an organic light-emitting display device, the organic light-emitting display device may include: an organic light-emitting panel including a plurality of pixel regions, each pixel region including a scan line and a data line crossing each other, each pixel region further

including an organic light-emission element and a drive transistor configured to drive the organic light emission element. The method may include: sensing a threshold voltage of the drive transistor in a sensing interval, and controlling a light emission of the organic light emission element within the pixel region in a display interval.

Other systems, methods, features and advantages will be, or will become, apparent to one with skill in the art upon examination of the following figures and detailed description. It is intended that all such additional systems, methods, features and advantages be included within this description, be within the scope of the present disclosure, and be protected by the following claims. Nothing in this section should be taken as a limitation on those claims. Further aspects and advantages are discussed below in conjunction with the embodiments. It is to be understood that both the foregoing general description and the following detailed description of the present disclosure are exemplary and explanatory and are intended to provide further explanation of the disclosure as claimed.

### BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the embodiments and are incorporated herein and constitute a part of this application, illustrate embodiment(s) of the present disclosure and together with the description serve to explain the disclosure. In the drawings:

FIG. 1 is a block diagram showing an organic light-emitting display device according to an embodiment of the present disclosure;

FIG. 2 is a circuit diagram showing an organic light-emitting panel of FIG. 1;

FIG. 3 is a circuit diagram showing a pixel region in FIG. 2;

FIG. 4 is a waveform diagram illustrating signals used for detecting a sensing voltage;

FIGS. 5A through 5C are circuit diagrams showing switching states of transistors when the pixel region is driven in time intervals;

FIG. 6 is a block diagram showing a scan driver of FIG. 1;

FIG. 7 is a waveform diagram illustrating signals, which are used for driving the scan driver of FIG. 1;

FIG. 8 is a block diagram schematically showing a data driver of FIG. 1;

FIG. 9 is a block diagram schematically showing a controller of FIG. 1; and

FIG. 10 is a block diagram showing an off-set adjuster of FIG. 9.

### DETAILED DESCRIPTION OF THE DRAWINGS AND THE PRESENTLY PREFERRED EMBODIMENTS

In the present disclosure, it will be understood that when an element, such as a substrate, a layer, a region, a film, or an electrode, is referred to as being formed “on” or “under” another element in the embodiments, it may be directly on or under the other element, or intervening elements (indirectly) may be present. The term “on” or “under” of an element will be determined based on the drawings.

Reference will now be made in detail to the present embodiments, examples of which are illustrated in the accompanying drawings. In the drawings, the sizes and thicknesses of elements can be exaggerated, omitted or

simplified for clarity and convenience of explanation, but they do not mean the practical sizes of elements.

FIG. 1 is a block diagram showing an organic light-emitting display device according to an embodiment of the present disclosure.

Referring to FIG. 1, the organic light-emitting display device according to an embodiment of the present disclosure can include an organic light-emitting panel 10, a controller 30, a scan driver 40 and a data driver 50.

The scan driver 40 can apply a scan signal including first and second scan signals S to the organic light-emitting panel 10.

The data driver 50 can apply data voltages V'data to the organic light-emitting panel 10.

The organic light-emitting panel 10 can include a plurality of scan lines GL1~GLn, a plurality of data lines DL1~DLm, a plurality of first power lines PL1 through PLm and a plurality of second power lines PL'1 through PL'm, as shown in FIG. 2.

Although it is not shown in the drawings, the organic light-emitting panel 10 can further include a plurality of signal lines.

A plurality of pixel regions P can be defined by the scan lines GL1 through GLn and data lines DL1 through DLm which are crossed with each other. These pixel regions P can be arranged in a matrix shape. Each of the pixel regions P can be electrically connected to the scan line GL1 through GLn, the data line DL1 through DLm, the first power line PL1 through PLm, and the second power line PL'1 through PL'm.

For example, the scan line GL1 through GLn can be electrically connected to the plurality of pixel regions P in a horizontal direction. The data line DL1 through DLm can be electrically connected to the plurality of pixel regions P in a vertical direction.

Such a pixel region P can receive a scan signal S, a data voltage V'data and first and second power supply voltages VDD and VSS. More specifically, the scan signal S can be applied to the pixel region P through the scan line GL1 through GLn, and the data voltage V'data can be applied to the pixel region P via the data line DL1 through DLm. Also, the first and second power supply voltages VDD and VSS can be applied to the pixel region P each through the first and second power supply lines PL1~PLm and PL'1~PL'm.

Meanwhile, sensing information Sensing1 including a threshold voltage Vth of the pixel region can be obtained from the pixel region P. The sensing information Sensing1 may be applied from the pixel region P to the exterior, for example the data driver 50 of FIG. 1, through the data line DL1~DLm, or to an individual sensing controller separate from the data driver 50.

First through third transistors T1~T3, a storage capacitor Cst, a load capacitor Cload, and an organic light emission element OLED can be formed in each of the pixel regions P, but it is not limited to this. In other words, the number of transistors and a connection structure therebetween within each of the pixel regions can be modified in a variety of shapes by a designer. As such, this embodiment can be applied to every circuit structure of the pixel region, which can be modified by designers.

The first and second transistors T1 and T2 can be switching transistors used to transfer signals. The third transistor T3 can be a drive transistor used to generate a drive current for driving the organic light emission element OLED.

The storage capacitor Cst can function to maintain the data voltage Vdata for one frame period.

The load capacitor Cload can charge a pre-charge data voltage Vpre applied from the exterior and apply the charged pre-charge data voltage Vpre to the organic light emission element OLED. Also, the load capacitor Cload can provide the sensing information Sensing1, which includes the threshold voltage Vth of the third transistor T3 and the mobility  $\mu$ , to the exterior.

The organic light emission element OLED emits light. The organic light emission element OLED can emit light having brightness varying with intensity of the drive current. Such an organic light emission element OLED can include a red organic light emission element OLED configured to emit red light, a green organic light emission element OLED configured to emit green light, and a blue organic light emission element OLED configured to emit blue light.

The first through third transistors T1~T3 can be PMOS-type thin film transistors, but it is not limited to this. The first through third transistors T1~T3 can be turned-on by a low level signal and turned-off by a high level signal.

The high level can become a ground voltage or a voltage approaching the ground voltage. The low level can become a lower voltage than the ground voltage. For example, the low and high levels can be -10V and 0V, respectively, but it is not limited to this.

The first power supply voltage VDD can be a high level signal. The second power supply voltage VSS can be a low level signal. The first and second power supply voltages VDD and VSS can be DC (Direct Current) voltages maintaining fixed levels, respectively.

In FIG. 3, the scan line GL is disclosed. Also, FIG. 3 shows that a scan signal S is applied to the scan line GL.

However, the scan signal S is generated in substantially same waveform. As such, the same scan signal can be applied to the first and second transistors T1 and T2. In accordance therewith, the scan line GL can be formed in a single line shape and a single scan signal can be transferred through the single scan line. In alternative embodiments, two scan lines may be provided.

The load capacitor Cload can be connected to the data line DL. As such, the load capacitor Cload can charge the pre-charge data voltage Vpre and the data voltage which are applied from the data line DL. Additionally, the load capacitor Cload can charge the sensing information Sensing1 including the threshold voltage Vth when the sensing information Sensing1 is detected. The sensing information Sensing1 charged in the load capacitor Cload can be provided to the exterior through the data line DL. In alternative embodiments, the sensing information Sensing1 may be charged into an additional capacitor which may be connected to an additional sensing line.

A gate electrode of the first transistor T1 can be connected to the scan line GL to which the scan signal S is applied. A source electrode of the first transistor T1 can be connected to the data line DL. A drain electrode of the first transistor T1 can be connected to a first node.

Such a first transistor T1 can be turned-on by the scan signal S of a low level, which is applied to the scan line GL, and enable the data voltage V'data, which is used for display an image, on the data line DL to be charged into the first node.

The first node can be commonly connected to the drain electrode of the first transistor T1, the storage capacitor Cst, a source electrode of the third transistor T3, and the first power line PL.

A gate electrode of the second transistor T2 can be connected to the scan line GL to which the scan signal S is applied. A source electrode of the second transistor T2 can

be connected to the reference line to which a reference voltage  $V_{ref}$  is applied. A drain electrode of the second transistor  $T_2$  can be connected to a second node.

Such a second transistor  $T_2$  can be turned-on by the scan signal  $S$  of the low level, which is applied to the scan line  $GL$ , and enable the second node to be discharged to the reference voltage.

The second node can be commonly connected to the drain electrode of the second transistor  $T_2$  and a gate electrode of the third transistor  $T_3$ .

The storage capacitor  $C_{st}$  can be connected between the first node and the second node. The storage capacitor  $C_{st}$  can enable the voltage at the second node to be varied with voltage variation of the first node.

The gate electrode of the third transistor  $T_3$  can be connected to the second node. The source electrode of the third transistor  $T_3$  can be connected to the first power line  $PL$ .

The third transistor  $T_3$  can generate a drive current varying with the voltage on the second node. Also, the third transistor  $T_3$  can apply the drive current to the organic light emission element OLED.

The organic light emission element OLED can emit light by the drive current from the third transistor  $T_3$ .

Although it is not shown in FIG. 3, another transistor being switched by a light emission signal can be disposed between the first power line  $PL$  and the third transistor  $T_3$ .

Such a circuit configuration of the pixel region shown in FIG. 3 can be driven by signals with waveforms shown in FIG. 4.

As shown in FIG. 4, the circuit configuration within the pixel region can be driven according to three individual intervals.

A first interval  $P_1$  is a period used to charge the data voltage  $V_{data}$  into the load capacitor  $C_{load}$ . A second interval  $P_2$  corresponds to another period used to either sense the threshold voltage of the third transistor  $T_3$ , that is a drive transistor, or drive the organic light emission diode OLED. A third interval  $P_3$  is still another period used to apply the sensed threshold voltage to the exterior.

The operation of the circuit configuration of the pixel region will now be described in detail in each of the first through third intervals referring to FIGS. 5A through 5D.

<First Interval>

As shown in FIG. 5A, the scan signal  $S$  with a high level can be applied to the scan line  $GL$  in the first interval  $P_1$ .

As such, the first and second transistor  $T_1$  and  $T_2$  can be turned-off by the scan signal  $S$  having the high level. Also, the data voltage  $V_{data}$  can be charged into the load capacitor  $C_{load}$  during the first interval  $P_1$ . At this time, the source voltage on the first node can maintain the previous data voltage, which is charged in a previous frame.

<Second Interval>

In the second interval  $P_2$ , the scan signal  $S$  having a low level can be applied to the scan line  $GL$ , as shown in FIG. 5B.

The scan signal  $S$  with the low level can enable the first and second transistors  $T_1$  and  $T_2$  to be turned-on. As such, the data voltage  $V_{data}$  charged into the load capacitor  $C_{load}$  can be charged into the first node through the first transistor  $T_1$ , and the reference voltage  $V_{ref}$  can be charged into the second node through the second transistor  $T_2$ . In accordance therewith, a drive current can be applied from the third transistor  $T_3$  to the organic light emission element OLED, and allow the organic light emission diode OLED to emit light.

During the second interval  $P_2$ , the voltage  $V_s$  on the first node can be discharged as a threshold voltage of the third transistor  $T_3$ . The threshold voltage  $V_{th}$  can be charged into the load capacitor  $C_{load}$  through the first transistor  $T_1$ . In other words, the threshold voltage  $V_{th}$  of the third transistor  $T_3$  can be sensed during the second interval  $P_2$ .

Meanwhile, the organic light emission element OLED can emit light until the voltage  $V_s$  on the first node becomes the threshold voltage  $V_{th}$  of the third transistor  $T_3$ . In various embodiments, at least one of the first transistor  $T_1$  and the second transistor  $T_2$  remain turned-on until the threshold voltage  $V_{th}$  of the third transistor  $T_3$  is reached.

<Third Interval>

As shown in FIG. 5C, the scan signal  $S$  with the high level can be applied to the scan line  $GL$  in the third interval  $P_3$ .

The scan signal  $S$  with the high level can force the first and second transistors  $T_1$  and  $T_2$  to be turned-off. Also, in the third interval  $P_3$ , the threshold voltage  $V_{th}$  charged into the load capacitor  $C_{load}$  can be applied to the exterior, i.e., a selector  $54$  shown in FIG. 8, through the data line  $DL$  as sensing information.

In the embodiment, such first through third intervals  $P_1$  through  $P_3$  can allow the sensing information including the threshold voltage  $V_{th}$  to be provided to the exterior.

As shown in FIG. 6, the scan driver  $40$  can include a first scan signal generator  $42$ , a second scan signal generator  $44$  and a multiplexer  $46$ .

The first scan signal generator  $42$  can generate a first scan signal for a sensing interval in each frame. The first scan signal can be applied to any one of the plural scan lines  $GL_1$ ~ $GL_n$ .

The second scan signal generator  $44$  can generate second scan signals for a display interval in each frame. The second scan signals are sequentially applied to the scan lines  $GL_1$ ~ $GL_n$  on the organic light-emitting panel  $10$ .

A single frame can be defined into the sensing interval and the display interval. The sensing interval can correspond to a vertical blank period of a vertical synchronous signal  $V_{sync}$ , but it is not limited to this. The display interval can also correspond to a period between the vertical blank periods of the vertical synchronous signal  $V_{sync}$ , but it is not limited to this.

The sensing interval and the display interval may be varied according to a brightness resolution of the organic light emitting panel.

For instance, if the organic light emitting panel have FHD (full high definition) in a frequency of 120 hz, the sensing interval include about 400  $\mu$ s, and the display interval includes about 8 ms.

As such, the first scan signal can be generated by only one in each frame, as shown in FIG. 7. The first scan signal can be applied to any one of the plural scan lines  $GL_1$ ~ $GL_n$  on the organic light-emitting panel  $10$  in each frame.

The second scan signals can be generated by the number of the scan lines within the organic light-emitting panel  $10$  and sequentially applied to the scan lines  $GL_1$ ~ $GL_n$ , in each frame. In this case, the second scan signal can correspond to a pulse width of a horizontal synchronous signal, but it is not limited to this.

For example, the first scan signal can be generated and applied to the first scan line  $GL_1$  of the organic light-emitting panel  $10$ , in the vertical blank period of the vertical synchronous signal  $V_{sync}$  within a single frame. As such, the threshold voltages  $V_{th}$  of the third transistors  $T_3$ , i.e., the drive transistors can be sensed in the pixel regions connected to the first scan line  $GL_1$ , respectively. Also, in the vertical blank period of the vertical synchronous signal within the

next frame, the first scan signal can be generated and applied to the second scan line GL2 of the organic light-emitting panel 10. Therefore, the first scan signal being generated one time every frame can be applied to the scan lines GL1~GLn during the period of frames corresponding to the number of scan lines GL1~GLn.

For a period except the vertical blank period of the vertical synchronous single of each frame, that is the display interval, the second scan signals can be sequentially generated and applied to the scan lines GL1~GLn of the organic light-emitting panel 10. The organic light emission elements OLED within the pixel regions P connected to each of the scan lines GL1~GLn can emit light by the drive currents of the respective drive transistors.

The data voltage V'data can be charged into the load capacitor Cload before the second scan signal is applied. In other words, the data voltage V'data can be charged into the load capacitor Cload in the first interval P1 of FIG. 4.

Alternatively, the data voltage V'data can be simultaneously charged into the load capacitor Cload when the second scan signal is applied. In other words, the data voltage V'data can be charged into the second interval P2. At the same time, the third transistor T3 can be driven and the organic light emission element OLED can emit light.

As such, a time point when the data voltage V'data is applied is not limited to the above-mentioned intervals.

For example, if a second scan signal is applied to the first scan line GL1 of the organic light-emitting panel 10, each of the organic light emission elements OLED within the respective pixel regions connected to the first scan line GL1 can emit light.

Another second scan signal delay-generated with a time delay of one horizontal period of the horizontal synchronous signal Hsync can be applied to the second scan line GL2 of the organic light-emitting panel 10. As such, each of the organic light emission elements OLED within the respective pixel regions P connected to the second scan line GL2 can emit light.

In this manner, the second scan signals can be applied to each scan line of the organic light-emitting panel 10 during the display interval.

The multiplexer 46 can selectively output any one of the first scan signal of the first scan signal generator 42 and the second scan signal of the second scan signal generator 44. The multiplexer 46 can be controlled by a first selection signal Sel1.

For example, the first selection signal Sel1 can have a pulse of the low level in the sensing interval corresponding to the vertical blank period. Also, the first selection signal Sel1 can have another pulse of the high level in the display interval. However, the first selection signal Sel1 is not limited to this.

As shown in FIG. 8, the data driver 50 can include a DAC (Digital-to-Analog Converter) 52, an ADC (Analog-to-Digital Converter) 54, and a selector 54.

The DAC 52 can generate the data voltage V'data. To this end, the DAC 52 can convert a data signal R', G' or B' corresponding to a digital signal into the data voltage V'data of an analog signal.

The ADC 56 can convert the sensing signal Sensing1 of an analog signal obtained from the pixel region P into the sensing information Sensing2 of a digital signal.

The selector 54 can electrically connect the data lines DL1~DLm of the organic light-emitting panel 10 to either the DAC 52 or the ADC 56. The selector 54 can be controlled by a second selection signal Sel1.

For example, the selector 54 can reply to the second selection signal Sel2 having a low level and electrically connect the data lines DL1~DLm to the DAC 52. Also, the selector 54 can reply to the second selection signal Sel2 having a high level and electrically connect the data lines DL1~DLm to the ADC 56.

The data signals R', G' and B' corresponding to the digital signals can be converted into the data voltages V'data corresponding to the analog signals by means of the DAC 52 in the first interval P1 of FIG. 4. Also, the selector 54 can reply to the second selection signal Sel2 with the low level and electrically connect the data lines DL1~DLm to the DAC 52. As such, the data voltages V'data can be applied from the DAC 52 to the respective pixel regions P through the respective data lines DL1~DLm. In accordance therewith, the data voltages V'data can be charged into the load capacitors Cload of the respective pixel regions P.

In the third interval P3 of FIG. 4, the sensing information Sensing1 including analog signals, which are charged into the load capacitors Cload within the respective pixel regions P, can be applied to the selector 54 through the respective data lines DL1~DLm. The selector 54 can reply to the second selection signal Sel2 with the high level and electrically connect the data lines DL1~DLm to the ADC 56. As such, the sensing information Sensing1 including the analog signals can be applied to the ADC 56. Furthermore, the sensing information Sensing1 with the analog signals can be converted into sensing information Sensing2 including digital signals. The converted sensing information Sensing2 including the digital signals can be applied to the controller 30 of FIG. 1.

Although it is not shown in FIG. 7, the data driver 50 can further include a shift register, a sampling circuit, first and second latches and so on, in order to process the data signals R', G' and B' for displaying an image. Furthermore, the data driver 50 can include a buffer for buffering the data voltages V'data corresponding to the analog signals.

As shown in FIG. 9, the controller 30 can include an offset adjuster 32, a data adjuster 36, and a timing controller 38.

The offset adjuster 32 can include an offset calculator 110, an offset LUT (Look-Up table) 120, and an offset controller 130, as shown in FIG. 10.

The offset calculator 110 can receive the sensing information Sensing2 including the threshold voltages Vth which are generated in the organic light-emitting panel 10 and transferred through the data driver 50. Also, the offset calculator 110 can obtain an offset value from the threshold voltage, which is included in the sensing information Sensing2, under control of the offset adjuster 32.

The offset adjuster 110 of an embodiment can directly obtain the offset value from the threshold voltage. Also, the offset calculator 110 can store the obtained offset value in the offset LUT 120.

According to another embodiment, offset information in accordance with a plurality of threshold voltages is stored in a table form in the offset LUT 120. In this case, the offset calculator 110 can read out an offset value corresponding to the threshold voltage Vth, which is included in the sensing information Sensing2, from the offset LUT 120 using the threshold voltage Vth of the sensing information Sensing2.

It is possible that the sensing information Sensing1 generated in each of the pixel regions P within the organic light-emitting panel 10 of FIG. 1 is applied to the offset calculator 110. As such, the offset calculator 110 can calculate the offset values for all the pixel regions P. Also, the

calculated offset values can be set out or stored into the offset LUT 120 in such a manner as to correspond to the respective pixel regions P.

The offset value can be used to increase and decrease the data voltage for displaying an image, later. As such, the offset values corresponding to digital signals can be used to separately increase or decrease values of the pixel data signals R', G' and B' so that the pixel data signals R', G' and B' including an image signal are suitably set for the respective pixels.

For convenience of explanation, the offset value can be explained in an analog signal shape. For example, an offset value of 0.5V or another offset value of -0.7 can be added to a data voltage of 5V.

A range of the offset value can be varied along a design specification of a designer, but it is not limited to this.

For example, the offset LUT 120 can store offset values of a single frame.

Referring to FIG. 9, the data adjuster 36 can adjust the image signal R', G' and B on the basis of the offset information which is obtained by the offset adjuster 32.

For example, offset information of a single frame can be applied from the offset adjuster 32 to the data adjuster 36. As such, the data adjuster 36 can reflect the offset information to a first image signal R, G and B and output a second image signal R', G' and B'. The second image signal R', G' and B' is applied to the organic light-emitting panel 10 through the data driver 50. As such, an image being compensated for the threshold voltage Vth can be displayed. Thus, non-uniformity of brightness does not generate.

As an embodiment, the offset information can be calculated or updated every frame.

Alternatively, the offset information can be calculated or updated every fixed frame periods. In this case, the fixed frame periods can become one of 5 frame periods, 10 frame periods and 20 frame periods, but it is not limited to these.

Meanwhile, the timing controller 38 can derive timing signals from a vertical synchronous signal Vsync, a horizontal synchronous signal Hsync and an enable signal Enable. The timing signals can be used to drive the organic light-emitting panel 10. Also, the timing signals can include SCS and DCS. The SCS is scan control signals and the DCS is data control signals.

Also, the timing controller 38 can generate and output TCS and MCS using selection signals A1 and A2.

The TCS can become a control signal. The TCS can be used to control not only the sensing information Sensing1 to be obtained from each of pixel regions P but also the offset information to be calculated.

The MCS can also become a control signal. The MCS can be used to control not only the image signal R, G and B to be compensated for the offset information but also an image to be displayed by the compensated image signal R', G' and B'.

In accordance therewith, when the offset information is calculated, all the components within the system can be controlled by the TCS. Also, all the components within the system can be controlled by the MCS when the image is displayed.

Although it is not shown in the drawings, the timing controller 38 can generate the selection signal which is applied to the selector 54 of FIG. 7. However, the timing controller 38 is not limited to this.

The present embodiment does not compensate for the threshold voltage Vth of the pixel region P within the pixel region P. Alternatively, in the present embodiment, the sensing information Sensing1 about the threshold voltage

Vth of the drive transistor with the pixel region P is applied to the controller 30, the offset information used to compensate for the threshold voltage Vth is calculated by the controller 30 and reflected into the image signal R, G and B, and an image is displayed in the organic light-emitting panel 10 by the image signal reflected with the offset information. Therefore, the circuit configuration of the pixel region P can be simplified, and furthermore the aperture ratio of the pixel region P can be maximized.

10 The present embodiment does not compensate for the threshold voltage of the pixel region within the pixel region. Alternatively, in the present embodiment, the sensing information about the threshold voltage of the drive transistor with the pixel region is applied to the exterior, i.e. the controller, the offset information used to compensate for the threshold voltage is calculated by the controller and reflected into the image signal, and an image is displayed in the organic light-emitting panel by the image signal reflected with the offset information. In accordance therewith, the circuit configuration of the pixel region can be simplified, and furthermore the aperture ratio of the pixel region can be maximized.

20 Any reference in this specification to "one embodiment," "an embodiment," "example embodiment," etc., means that 25 a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the invention. The appearances of such phrases in various places in the specification are not necessarily all referring to the same embodiment. Further, when a 30 particular feature, structure, or characteristic is described in connection with any embodiment, it is submitted that it is within the purview of one skilled in the art to effect such feature, structure, or characteristic in connection with other ones of the embodiments.

35 Although embodiments have been described with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the spirit and scope of the principles of this disclosure. More particularly, various variations and modifications are possible in the component parts and/or arrangements of the subject combination arrangement within the scope of the disclosure, the drawings and the appended 40 claims. In addition to variations and modifications in the component parts and/or arrangements, alternative uses will 45 also be apparent to those skilled in the art.

The invention claimed is:

1. An organic light-emitting display device comprising:  
an organic light-emitting panel comprising a plurality of pixel regions, each pixel region comprising a scan line to provide a first scan signal and a data line to provide a data voltage, the scan line and the data line crossing each other, each pixel region further comprising an organic light-emission element, a storage capacitor, a load capacitor and a drive transistor, wherein a source electrode of the drive transistor is biased by a power supply voltage, and a drain electrode is configured to connect directly to drive only the organic light-emission element, wherein a first terminal of the storage capacitor is connected to the data line and the load capacitor through a first switching transistor, and is connected to the source electrode of the drive transistor, and a second terminal of the storage capacitor is connected to a gate electrode of the drive transistor and a second switching transistor, wherein the first and second switching transistors are connected to the same

## 11

scan line and are simultaneously turned on or off in response to the first scan signal from the same scan line; and

a circuit comprising a data driver configured to apply a data voltage to each pixel region, configured to sense a threshold voltage of the drive transistor in a sensing interval and control a light emission of the organic light-emission element within the pixel region in a display interval,

wherein the load capacitor is charged with the data voltage from the data driver during a first period of the sensing interval, and

wherein the load capacitor is connected to the data line and is charged with the sensed threshold voltage of the drive transistor during a second period of the sensing interval when the threshold voltage is detected in order to output the sensed threshold voltage of the drive transistor through the data line,

wherein the first switching transistor has a gate electrode connected to the scan line, a source electrode connected to the data line, and a drain electrode connected to the source electrode of the drive transistor, and

wherein the second switching transistor has a gate electrode connected to the scan line, a source electrode connected to a reference line to which only a reference voltage is applied, wherein the reference voltage is different from the power supply voltage and a drain electrode connected to the gate electrode of the drive transistor, the second switching transistor configured to transfer the reference voltage to the gate electrode of the drive transistor.

2. The organic light-emitting display device of claim 1, wherein the sensing interval and the display interval are included in a single frame.

3. The organic light-emitting display device of claim 2, wherein the sensing interval and the display interval is varied according to a brightness resolution of the organic light-emitting panel.

4. The organic light-emitting display device of claim 1, wherein the sensing interval corresponds to a vertical blank period of a vertical synchronous signal.

5. The organic light-emitting display device of claim 4, wherein the display interval corresponds to a period between two successive vertical blank periods.

6. The organic light-emitting display device of claim 1, further comprising a scan driver configured to generate the first scan signal and a plurality of second scan signals and selectively apply the first and second scan signals to the organic light-emitting panel.

7. The organic light-emitting display device of claim 6, wherein the scan driver includes:

a first scan signal generator configured to generate the first scan signal in the sensing interval;

a second scan signal generator configured to generate the second scan signals in the display interval; and

a multiplexer configured to selectively apply the first and second scan signals to the organic light-emitting panel.

8. The organic light-emitting display device of claim 7, wherein the multiplexer is configured to selectively output the first scan signal every frame to any one of scan lines and selectively output the second scan signals to the scan lines on the organic light-emitting panel in the display interval.

9. The organic light-emitting display device of claim 6, wherein the data voltage is charged into the load capacitor before a second scan signal is applied.

## 12

10. The organic light-emitting display device of claim 6, wherein the data voltage is simultaneously charged into the load capacitor when a second scan signal is applied.

11. The organic light-emitting display device of claim 1, wherein the circuit is configured to calculate offset information on a basis of the threshold voltage and generate a second image signal by reflecting the offset information on a first image signal.

12. The organic light-emitting display device of claim 11, wherein the data driver is configured to detect the threshold voltage in the organic light-emitting panel and apply data voltages corresponding to the second image signal to the organic light-emitting panel.

13. The organic light-emitting display device of claim 12, wherein the data driver includes:

a digital-to-analog converter (DAC) configured to convert the second image signal into data voltages corresponding to analog signals;

an analog-to-digital converter (ADC) configured to convert a first sensing information, including the threshold voltage corresponding to an analog signal, into a second sensing information corresponding a digital signal; and

a selector configured to switching-control to selectively connect data lines on the organic light-emitting panel to one of the DAC and the ADC.

14. The organic light-emitting display device of claim 1, wherein the circuit includes:

an offset adjuster configured to calculate offset information on a basis of the sensed threshold voltage and store the offset information; and

a data adjuster configured to generate a second image signal by reflecting the offset information on a first image signal.

15. The organic light-emitting display device of claim 14, wherein the offset adjuster includes an offset LUT in which the offset information in accordance with a plurality of threshold voltages is stored in a table form,

wherein the offset adjuster obtains the offset information corresponding to the sensed threshold voltage from the offset LUT.

16. An organic light-emitting display device comprising: a first scan signal generator configured to generate a first scan signal in a sensing interval in each frame;

a second scan signal generator configured to generate a plurality of second scan signals in a display interval in each frame, wherein said each frame is divided into the sensing interval and the display interval; and

a multiplexer configured to receive the first scan signal and the plurality of second scan signals and selectively output the first scan signal and the plurality of second scan signals in response to a selection signal, wherein the first scan signal is selectively output to only one of a plurality of scan lines on an organic light-emitting panel in the sensing interval in each frame and the second scan signals are selectively and sequentially output to the plurality of scan lines on the organic light-emitting panel in the display interval in each frame such that the second scan signals outputted to the scan lines are more than the first scan signal output to the scan lines in each frame, wherein the one of the plurality of scan lines receives both the first scan signal and one of the second scan signals in one frame and the others of the plurality of scan lines receive only remaining second scan signals in the one frame,

wherein the organic light-emitting panel comprises a plurality of pixel regions defined by the plurality of

## 13

scan lines and a plurality of data lines, each pixel region comprises a load capacitor operatively connected with an adjacent one of the data lines and a drive transistor, and

wherein the load capacitor is charged with a data voltage from a data driver during a first period of the sensing interval, and the load capacitor is connected to the data line and is charged with a sensed threshold voltage of the drive transistor during a second period of the sensing interval.

17. The organic light-emitting display device of claim 16, wherein the sensing interval corresponds to a vertical blank period of a vertical synchronous signal and the display interval corresponds to a period between vertical blank periods of the vertical synchronous signal, whereby at least one of the sensing interval and the display interval is varied according to a brightness resolution of the organic light-emitting panel.

18. An organic light-emitting panel comprising:  
a plurality of scan lines and data lines; and  
an array of pixel regions, each pixel region operatively connected with a scan line and a data line, and each pixel region comprising an organic light-emission element, a storage capacitor, a load capacitor, and a drive transistor, wherein a source electrode of the drive transistor is biased by a power supply voltage, and a drain electrode of the drive transistor is configured to connect directly and drive only the organic light-emission element, wherein a first terminal of the storage capacitor is connected to the data line and the load capacitor through a first switching transistor and is connected to the source electrode of the drive transistor, and a second terminal of the storage capacitor is connected to a gate electrode of the drive transistor and a second switching transistor, the first and second switching transistors are directly connected to the same scan line,

## 14

wherein the load capacitor connected to the data line is charged with a data voltage from a data driver during a first period when the first and second switching transistors are simultaneously turned off and is capable of being charged with a threshold voltage of the drive transistor during a second period when the first and second switching transistors are simultaneously turned on, the threshold voltage being considered in threshold voltage compensation with respect to the drive transistor in each pixel region in order to minimize image quality non-uniformity across the array of pixel regions,

wherein the first switching transistor has a gate electrode connected to the scan line, a source electrode connected to the data line, and a drain electrode connected to the source electrode of the drive transistor, and

wherein the second switching transistor has a gate electrode connected to the scan line, a source electrode connected to a reference line to which a reference voltage is applied, wherein the reference voltage is different from the power supply voltage, and a drain electrode connected to the gate electrode of the drive transistor, the second switching transistor configured to transfer the reference voltage to the gate electrode of the drive transistor.

19. The organic light-emitting panel of claim 18, wherein the threshold voltage compensation is not performed within the pixel region, but performed by a controller outside of the pixel region, which results in a circuit configuration within the pixel region being minimized while aperture ratio of the pixel region being maximized.

20. The organic light-emitting panel of claim 19, wherein the controller is configured to calculate offset information on a basis of the threshold voltage and to generate a compensated image signal by reflecting the offset information on an original image signal.

\* \* \* \* \*

专利名称(译)	有机发光显示装置		
公开(公告)号	<a href="#">US9858866</a>	公开(公告)日	2018-01-02
申请号	US15/389135	申请日	2016-12-22
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	KIM JIN HYOUNG KIM SEUNG TAE CHOI KYOUNG SIK JEONG UITAEK		
发明人	KIM, JIN HYOUNG KIM, SEUNG TAE CHOI, KYOUNG SIK JEONG, UITAEK		
IPC分类号	G09G3/30 G09G3/3266 G09G3/3233 G09G3/3291 G09G3/3208		
CPC分类号	G09G3/3291 G09G3/3233 G09G3/3266 G09G3/3208 G09G2300/0465 G09G2320/045 G09G2300/0819 G09G2310/027 G09G2310/0297 G09G2320/0233 G09G2300/0814 G09G2320/0295		
优先权	1020110104184 2011-10-12 KR		
其他公开文献	US20170103708A1		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

### 摘要(译)

一种有机发光显示装置，包括：有机发光面板，包括多个像素区域，每个像素区域包括扫描线和彼此交叉的数据线，每个像素区域还包括有机发光元件和驱动晶体管，用于驱动有机发光元件;电路，被配置为在感测间隔中感测驱动晶体管的阈值电压，并在显示间隔中控制像素区域内的有机发光元件的发光。

