



US 20200203440A1

(19) **United States**

(12) **Patent Application Publication**
WANG

(10) **Pub. No.: US 2020/0203440 A1**

(43) **Pub. Date: Jun. 25, 2020**

(54) **PIXEL ARRANGEMENT STRUCTURE AND ORGANIC LIGHT-EMITTING DIODE DISPLAY DEVICE**

Publication Classification

(51) **Int. Cl.**
H01L 27/32 (2006.01)

(71) Applicant: **Wuhan China Star Optoelectronics Semiconductor Display Technology Co., Ltd.**, Wuhan (CN)

(52) **U.S. Cl.**
CPC *H01L 27/3218* (2013.01); *G09G 3/3208* (2013.01); *G09G 2310/0278* (2013.01); *G09G 2300/0465* (2013.01)

(72) Inventor: **Zheng WANG**, Wuhan (CN)

(57) **ABSTRACT**

(73) Assignee: **Wuhan China Star Optoelectronics Semiconductor Display Technology Co., Ltd.**, Wuhan (CN)

A pixel arrangement structure includes a plurality of pixel rows. Two adjacent ones of the pixel rows are disposed to be misaligned with each other. Each of the pixel rows includes a plurality of pixels. Each of the pixels includes a first sub pixel; a second sub pixel; and a third sub pixel. The first sub pixel in an N+1-th pixel row is disposed adjacent to the first sub pixel of one of the pixels in an N+2-th pixel row, the second sub pixel in an N-th pixel row is disposed adjacent to the second sub pixel of one of the pixels in the N+1-th pixel row, and N is a positive odd number greater than or equal to 1. An organic light-emitting diode display device is further provided.


(21) Appl. No.: **16/323,778**

(22) PCT Filed: **Dec. 20, 2018**

(86) PCT No.: **PCT/CN2018/122461**

§ 371 (c)(1),

(2) Date: **Feb. 7, 2019**

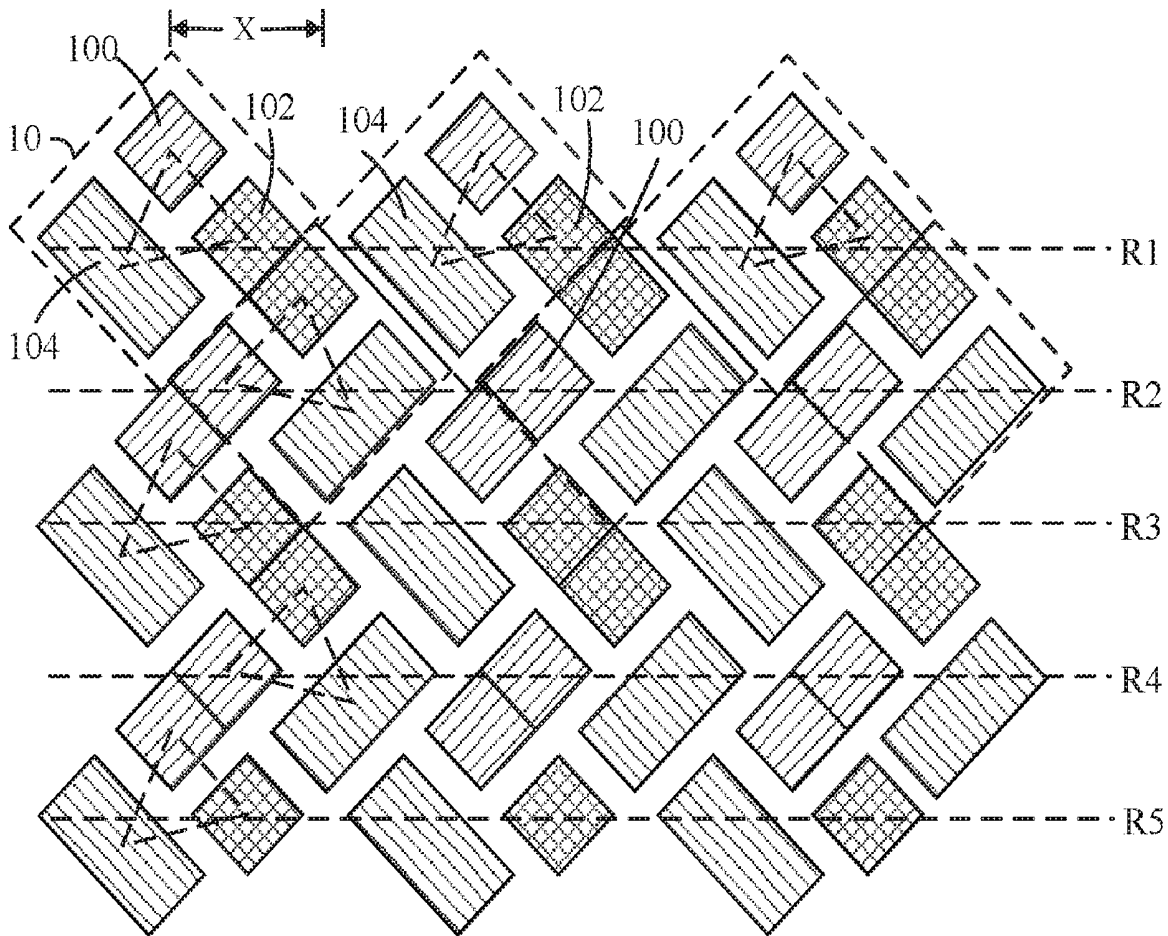

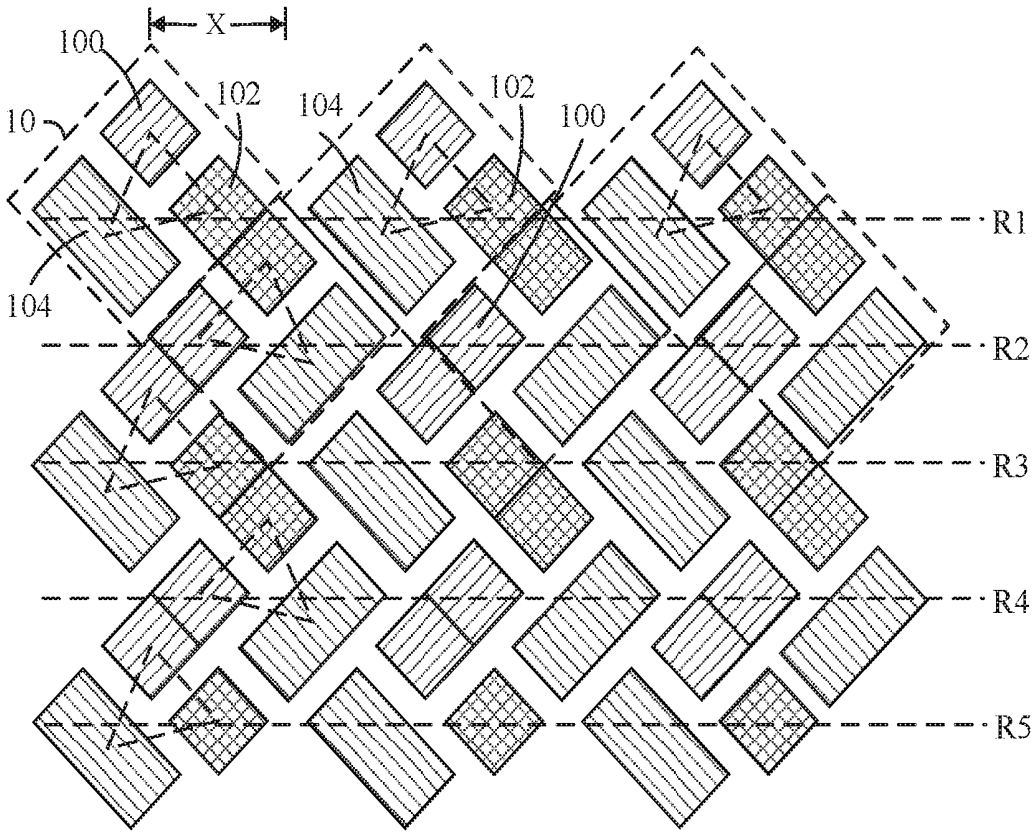


FIG. 1

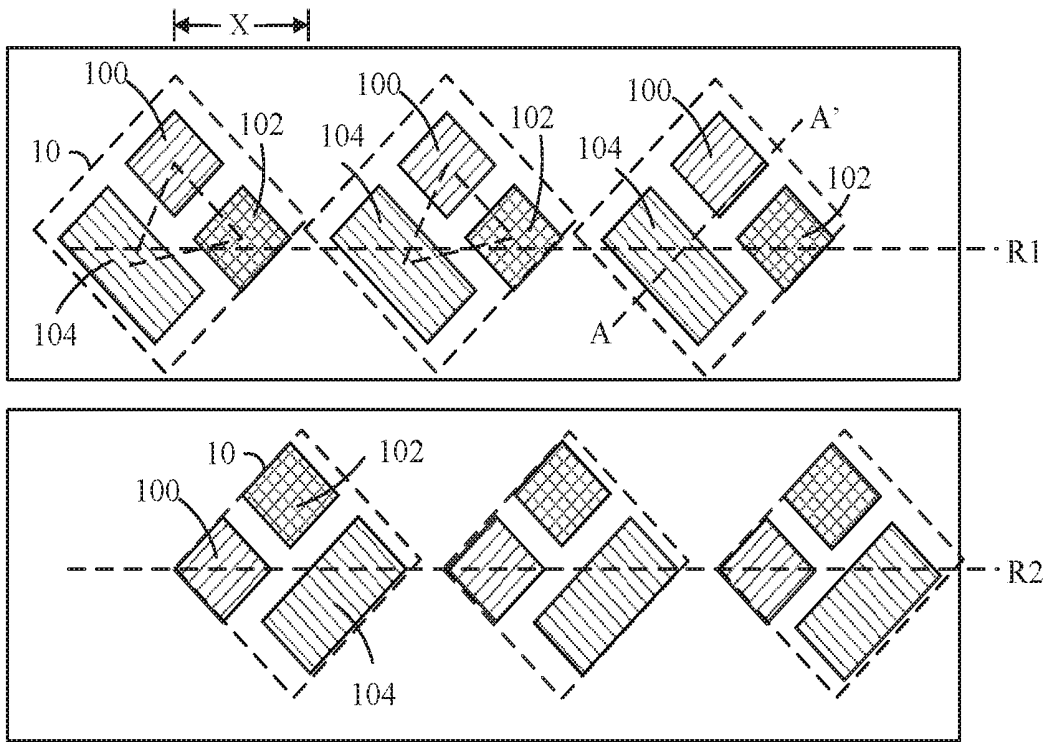


FIG. 2

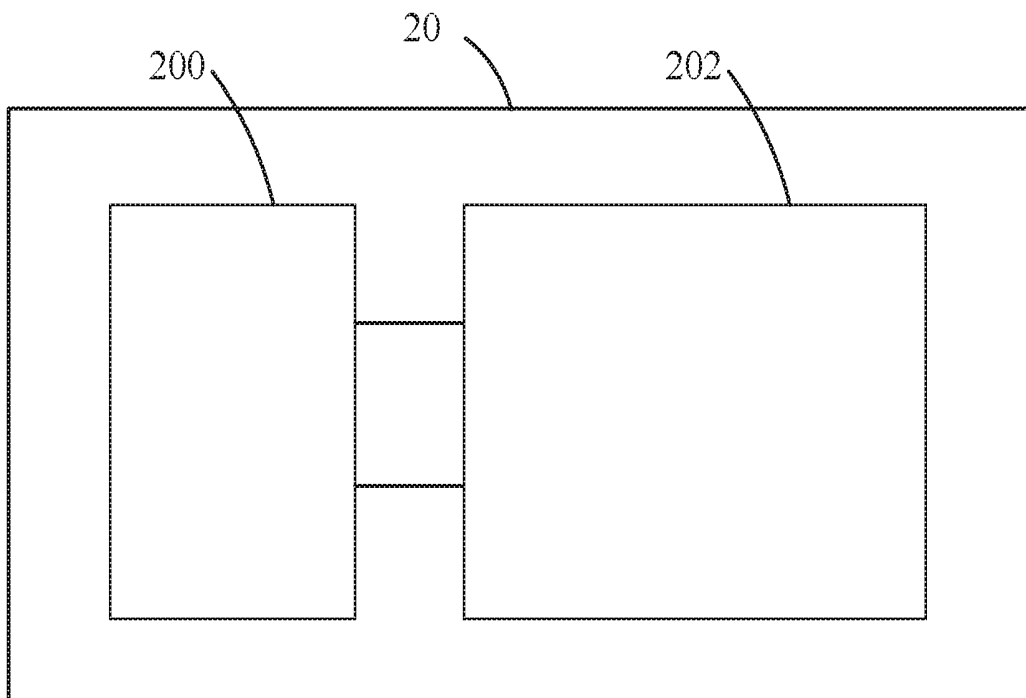


FIG. 3

**PIXEL ARRANGEMENT STRUCTURE AND
ORGANIC LIGHT-EMITTING DIODE
DISPLAY DEVICE**

BACKGROUND

Field

[0001] The present disclosure relates to a pixel arrangement, and more particularly to a pixel arrangement structure and an organic light-emitting diode display device.

BACKGROUND

[0002] Organic light-emitting diode display devices have advantages of light weight, emitting light actively, fast response speed, a large view angle, wide gamut, high brightness and low power consumption and have become developing display technologies after liquid crystal display devices. Currently, people's requirements for a resolution of a display device are high. However, manufacturing organic light-emitting diode display devices having high quality and a high resolution still faces many challenges.

[0003] In the sub-pixel rendering (SPR) technologies, adjacent pixels share a part of sub pixels to implement the increasing of a sense resolution. As such, display devices can have a higher sense resolution when the density of a sub pixel arrangement is not changed. Alternatively, a requirement for the density of a sub pixel arrangement is lowered when the sense resolution is not changed. Accordingly, the sub-pixel rendering technologies provide a scheme to solve the above-mentioned problem.

[0004] In another aspect, fine metal mask (FMM) technologies are one of key technologies of limiting the development of the organic light-emitting diode display device. With the increasing of the requirement for the resolution, it is more difficult to manufacture the fine metal masks. In the mainstream RGB stripe arrangement and the PenTile arrangement, each sub pixel corresponds to one opening of a fine metal mask. To prevent colors from being mixed, a distance between openings corresponding to sub pixels having different colors has a minimum limitation, and thus the increasing of the resolution is limited.

[0005] Consequently, there is a need to solve the above-mentioned problems in the prior art.

SUMMARY OF THE DISCLOSURE

[0006] An objective of the present disclosure is to provide a pixel arrangement structure and an organic light-emitting diode display device capable of solving the problems in the prior art.

[0007] To solve the above problems, a pixel arrangement structure provided by the present disclosure includes a plurality of pixel rows. Two adjacent ones of the pixel rows are disposed to be misaligned with each other. Each of the pixel rows includes a plurality of pixels. Each of the pixels includes a first sub pixel; a second sub pixel; and a third sub pixel. The first sub pixel in an N+1-th pixel row is disposed adjacent to the first sub pixel of one of the pixels in an N+2-th pixel row, the second sub pixel in an N-th pixel row is disposed adjacent to the second sub pixel of one of the pixels in the N+1-th pixel row, and N is a positive odd number greater than or equal to 1. The first sub pixel in the N+1-th pixel row and the first sub pixel of the one of the pixels in the N+2-th pixel row have same color, and the

second sub pixel in the N-th pixel row and the second sub pixel of the one of the pixels in the N+1-th pixel row have same color.

[0008] In one embodiment, a center of the first sub pixel, a center of the second sub pixel and a center of the third sub pixel of each of the pixels are arranged in a triangle.

[0009] In one embodiment, the first sub pixel and the second sub pixel of each of the pixels are disposed at a first side of each of the pixels, and the third sub pixel of each of the pixels is disposed at a second side of each of the pixels opposite to the first side.

[0010] In one embodiment, one of the first sub pixel and the second sub pixel of each of the pixels overlaps a center line of a long side of the third sub pixel of each of the pixels.

[0011] In one embodiment, an arrangement of the first sub pixel, the second sub pixel and the third sub pixel in odd pixel rows is different from an arrangement of the first sub pixel, the second sub pixel and the third sub pixel in even pixel rows.

[0012] To solve the above problems, a pixel arrangement structure provided by the present disclosure includes a plurality of pixel rows. Two adjacent ones of the pixel rows are disposed to be misaligned with each other. Each of the pixel rows includes a plurality of pixels. Each of the pixels includes a first sub pixel; a second sub pixel; and a third sub pixel. The first sub pixel in an N+1-th pixel row is disposed adjacent to the first sub pixel of one of the pixels in an N+2-th pixel row, the second sub pixel in an N-th pixel row is disposed adjacent to the second sub pixel of one of the pixels in the N+1-th pixel row, and N is a positive odd number greater than or equal to 1.

[0013] In one embodiment, a center of the first sub pixel, a center of the second sub pixel and a center of the third sub pixel of each of the pixels are arranged in a triangle.

[0014] In one embodiment, the first sub pixel and the second sub pixel of each of the pixels are disposed at a first side of each of the pixels, and the third sub pixel of each of the pixels is disposed at a second side of each of the pixels opposite to the first side.

[0015] In one embodiment, one of the first sub pixel and the second sub pixel of each of the pixels overlaps a center line of a long side of the third sub pixel of each of the pixels.

[0016] In one embodiment, an arrangement of the first sub pixel, the second sub pixel and the third sub pixel in odd pixel rows is different from an arrangement of the first sub pixel, the second sub pixel and the third sub pixel in even pixel rows.

[0017] An organic light-emitting diode display device provided by the present disclosure includes a pixel arrangement structure; and a driving circuit electrically coupled to the pixel arrangement structure and configured to provide scan signals and data signals for the pixel arrangement structure. The pixel arrangement structure includes a plurality of pixel rows. Two adjacent ones of the pixel rows are disposed to be misaligned with each other. Each of the pixel rows includes a plurality of pixels. Each of the pixels includes a first sub pixel; a second sub pixel; and a third sub pixel. The first sub pixel in an N+1-th pixel row is disposed adjacent to the first sub pixel of one of the pixels in an N+2-th pixel row, the second sub pixel in an N-th pixel row is disposed adjacent to the second sub pixel of one of the pixels in the N+1-th pixel row, and N is a positive odd number greater than or equal to 1.

[0018] In one embodiment, a center of the first sub pixel, a center of the second sub pixel and a center of the third sub pixel of each of the pixels are arranged in a triangle.

[0019] In one embodiment, the first sub pixel and the second sub pixel of each of the pixels are disposed at a first side of each of the pixels, and the third sub pixel of each of the pixels is disposed at a second side of each of the pixels opposite to the first side.

[0020] In one embodiment, one of the first sub pixel and the second sub pixel of each of the pixels overlaps a center line of a long side of the third sub pixel of each of the pixels.

[0021] In one embodiment, an arrangement of the first sub pixel, the second sub pixel and the third sub pixel in odd pixel rows is different from an arrangement of the first sub pixel, the second sub pixel and the third sub pixel in even pixel rows.

[0022] Compared to the prior art, in the pixel arrangement structure and the organic light-emitting diode display device, since the two first sub pixels which are disposed adjacent to each other may share one first opening of the fine metal mask, the problem of color mixing can be avoided. The resolution of the organic light-emitting diode display device can be increased when the manufacturing process is not changed. Alternatively, the difficulty of the manufacturing process can be decreased when the resolution is not changed. Furthermore, since the two second sub pixels which are disposed adjacent to each other may share one second opening of the fine metal mask, the problem of color mixing can be avoided. The resolution of the organic light-emitting diode display device can be increased when the manufacturing process is not changed. Alternatively, the difficulty of the manufacturing process can be decreased when the resolution is not changed. Moreover, a number of the sub pixels in the pixel arrangement structure of the present disclosure can be decreased, when compared to the RGB stripe arrangement in the prior art.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] FIG. 1 illustrates a pixel arrangement structure of an organic light-emitting diode display device in accordance with an embodiment of the present disclosure.

[0024] FIG. 2 illustrates a pixel row R1 and a pixel row R2 in FIG. 1.

[0025] FIG. 3 illustrates an organic light-emitting diode display device in accordance with an embodiment of the present disclosure.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0026] Hereinafter, exemplary embodiments of the present disclosure will be described with reference to the accompanying drawings for illustrating specific embodiments which can be carried out by the present disclosure.

[0027] Please refer to FIG. 1 and FIG. 2. FIG. 1 illustrates a pixel arrangement structure of an organic light-emitting diode display device in accordance with an embodiment of the present disclosure. FIG. 2 illustrates a pixel row R1 and a pixel row R2 in FIG. 1.

[0028] The organic light-emitting diode display device includes a plurality of pixel rows R1-R5. Each of the pixel rows R1-R5 includes a plurality of pixels 10. Each of the pixels 10 includes a first sub pixel 100, a second sub pixel 102 and a third sub pixel 104.

[0029] The first sub pixel 100, the second sub pixel 102 and the third sub pixel 104 may be any one of a red sub pixel, a green sub pixel and a blue sub pixel. The first sub pixel 100, the second sub pixel 102 and the third sub pixel 104 have different colors.

[0030] A center of the first sub pixel 100, a center of the second sub pixel 102 and a center of the third sub pixel 104 of each of the pixels 10 are arranged in a triangle.

[0031] In the present embodiment, two adjacent ones of the pixel rows R1-R5 are disposed to be misaligned with each other. In detail, even pixel rows including the pixel rows R2 and R4 are shifted by a distance X in a horizontal direction with respect to odd pixel rows including the pixel rows R1, R3 and R5. The distance X may be designed adequately according to requirements.

[0032] The first sub pixel 100 of each of the pixels 10 is disposed adjacent to the first sub pixel 100 of one of the pixels 10 in an adjacent one of the pixel rows R1-R5, and/or the second sub pixel 102 of each of the pixels 10 is disposed adjacent to the second sub pixel 102 of one of the pixels 10 in an adjacent one of the pixel rows R1-R5.

[0033] That is, the second sub pixel 102 in the pixel row R1 is disposed adjacent to the second sub pixel 102 of one of the pixels 10 in the pixel row R2 (an adjacent pixel row of the pixel row R1). The second sub pixel 102 in the pixel row R3 is disposed adjacent to the second sub pixel 102 of one of the pixels 10 in the pixel row R4 (an adjacent pixel row of the pixel row R3). It can be understood from the above that the second sub pixel 102 in an N-th pixel row is disposed adjacent to the second sub pixel 102 of one of the pixels 10 in an N+1-th pixel row (an adjacent pixel row of the N-th pixel row). N is a positive odd number greater than or equal to 1.

[0034] The first sub pixel 100 in the pixel row R2 is disposed adjacent to the first sub pixel 100 of one of the pixels 10 in the pixel row R3 (an adjacent pixel row of the pixel row R2). The first sub pixel 100 in the pixel row R4 is disposed adjacent to the first sub pixel 100 of one of the pixels 10 in the pixel row R5 (an adjacent pixel row of the pixel row R4). It can be understood from the above that the first sub pixel 100 in the N+1-th pixel row is disposed adjacent to the first sub pixel 100 of one of the pixels 10 in an N+2-th pixel row (an adjacent pixel row of the N-th+1 pixel row).

[0035] The two first sub pixels 100 which are disposed adjacent to each other may share one first opening of a fine metal mask in an evaporation process. That is, a shape and an area of the two first sub pixels 100 which are disposed adjacent to each other correspond to a shape and area of one first opening of the fine metal mask.

[0036] The two second sub pixels 102 which are disposed adjacent to each other may share one second opening of a fine metal mask in an evaporation process. That is, a shape and an area of the two second sub pixels 102 which are disposed adjacent to each other correspond to a shape and area of one second opening of the fine metal mask.

[0037] Since the two first sub pixels 100 (i.e., having the same color) which are disposed adjacent to each other may share one first opening of the fine metal mask, the problem of color mixing can be avoided. A resolution of the organic light-emitting diode display device can be increased when a manufacturing process is not changed. Alternatively, difficulty of the manufacturing process can be decreased when the resolution is not changed. Furthermore, since the two

second sub pixels **102** (i.e., having the same color) which are disposed adjacent to each other may share one second opening of the fine metal mask, the problem of color mixing can be avoided. The resolution of the organic light-emitting diode display device can be increased when the manufacturing process is not changed. Alternatively, the difficulty of the manufacturing process can be decreased when the resolution is not changed.

[0038] A shape and an area of the third second sub pixel **104** correspond to a shape and area of one third opening of the fine metal mask.

[0039] The two first sub pixels **100** which are disposed adjacent to each other may be driven by two driving circuits or may be driven by one driving circuit. The two second sub pixels **102** which are disposed adjacent to each other may be driven by two driving circuits or may be driven by one driving circuit.

[0040] Furthermore, the first sub pixel **100** and the second sub pixel **102** of each of the pixels **10** are disposed at a first side of each of the pixels **10**. The third sub pixel **104** of each of the pixels **10** is disposed at a second side of each of the pixels **10** opposite to the first side.

[0041] One of the first sub pixel **100** and the second sub pixel **102** of each of the pixels **10** overlaps a center line AA' (in FIG. 2) of a long side of the third sub pixel **104** of each of the pixels **10**.

[0042] Furthermore, an arrangement of the first sub pixel **100**, the second sub pixel **102** and the third sub pixel **104** in the odd pixel rows including the pixel rows **R1**, **R3** and **R5** is different from an arrangement of the first sub pixel **100**, the second sub pixel **102** and the third sub pixel **104** in the even pixel rows including the pixel rows **R2** and **R4**. For example, the arrangement of the first sub pixel **100**, the second sub pixel **102** and the third sub pixel **104** in the even pixel rows including the pixel rows **R2** and **R4** may be the same as the arrangement of the first sub pixel **100**, the second sub pixel **102** and the third sub pixel **104** in the odd pixel rows including the pixel rows **R1**, **R3** and **R5** by counterclockwise rotating the arrangement of the first sub pixel **100**, the second sub pixel **102** and the third sub pixel **104** in the odd pixel rows including the pixel rows **R1**, **R3** and **R5** by an angle. The angle may be one angle greater than 0 degree and smaller than 180 degrees.

[0043] Please refer to FIG. 3. FIG. 3 illustrates an organic light-emitting diode display device **20** in accordance with an embodiment of the present disclosure.

[0044] The organic light-emitting diode display device **20** includes a driving circuit **200** and the pixel arrangement structure **202** as shown in FIG. 1.

[0045] The driving circuit **200** is electrically coupled to the pixel arrangement structure **202** and may include a scan driving circuit and a data driving circuit. The driving circuit **200** is configured to provide scan signals (the scan driving circuit) for the pixel arrangement structure **202** and is configured to provide data signals (the data driving circuit) for the pixel arrangement structure **202**.

[0046] In the pixel arrangement structure and the organic light-emitting diode display device, since the two first sub pixels which are disposed adjacent to each other may share one first opening of the fine metal mask, the problem of color mixing can be avoided. The resolution of the organic light-emitting diode display device can be increased when the manufacturing process is not changed. Alternatively, the difficulty of the manufacturing process can be decreased

when the resolution is not changed. Furthermore, since the two second sub pixels which are disposed adjacent to each other may share one second opening of the fine metal mask, the problem of color mixing can be avoided. The resolution of the organic light-emitting diode display device can be increased when the manufacturing process is not changed. Alternatively, the difficulty of the manufacturing process can be decreased when the resolution is not changed. Moreover, a number of the sub pixels in the pixel arrangement structure of the present disclosure can be decreased, when compared to the RGB stripe arrangement in the prior art.

[0047] In summary, although the present disclosure has been provided in the preferred embodiments described above, the foregoing preferred embodiments are not intended to limit the present disclosure. Those skilled in the art, without departing from the spirit and scope of the present disclosure, may make modifications and variations, so the scope of the protection of the present disclosure is defined by the claims.

What is claimed is:

1. A pixel arrangement structure, comprising a plurality of pixel rows, two adjacent ones of the pixel rows disposed to be misaligned with each other, each of the pixel rows comprising a plurality of pixels, each of the pixels comprising:

- a first sub pixel;
- a second sub pixel; and
- a third sub pixel,

wherein the first sub pixel in an N+1-th pixel row is disposed adjacent to the first sub pixel of one of the pixels in an N+2-th pixel row, the second sub pixel in an N-th pixel row is disposed adjacent to the second sub pixel of one of the pixels in the N+1-th pixel row, and N is a positive odd number greater than or equal to 1, wherein the first sub pixel in the N+1-th pixel row and the first sub pixel of the one of the pixels in the N+2-th pixel row have same color, and the second sub pixel in the N-th pixel row and the second sub pixel of the one of the pixels in the N+1-th pixel row have same color.

2. The pixel arrangement structure of claim 1, wherein a center of the first sub pixel, a center of the second sub pixel and a center of the third sub pixel of each of the pixels are arranged in a triangle.

3. The pixel arrangement structure of claim 1, wherein the first sub pixel and the second sub pixel of each of the pixels are disposed at a first side of each of the pixels, and the third sub pixel of each of the pixels is disposed at a second side of each of the pixels opposite to the first side.

4. The pixel arrangement structure of claim 3, wherein one of the first sub pixel and the second sub pixel of each of the pixels overlaps a center line of a long side of the third sub pixel of each of the pixels.

5. The pixel arrangement structure of claim 4, wherein an arrangement of the first sub pixel, the second sub pixel and the third sub pixel in odd pixel rows is different from an arrangement of the first sub pixel, the second sub pixel and the third sub pixel in even pixel rows.

6. A pixel arrangement structure, comprising a plurality of pixel rows, two adjacent ones of the pixel rows disposed to be misaligned with each other, each of the pixel rows comprising a plurality of pixels, each of the pixels comprising:

- a first sub pixel;
- a second sub pixel; and
- a third sub pixel,

wherein the first sub pixel in an N+1-th pixel row is disposed adjacent to the first sub pixel of one of the pixels in an N+2-th pixel row, the second sub pixel in an N-th pixel row is disposed adjacent to the second sub pixel of one of the pixels in the N+1-th pixel row, and N is a positive odd number greater than or equal to 1.

7. The pixel arrangement structure of claim 6, wherein a center of the first sub pixel, a center of the second sub pixel and a center of the third sub pixel of each of the pixels are arranged in a triangle.

8. The pixel arrangement structure of claim 6, wherein the first sub pixel and the second sub pixel of each of the pixels are disposed at a first side of each of the pixels, and the third sub pixel of each of the pixels is disposed at a second side of each of the pixels opposite to the first side.

9. The pixel arrangement structure of claim 8, wherein one of the first sub pixel and the second sub pixel of each of the pixels overlaps a center line of a long side of the third sub pixel of each of the pixels.

10. The pixel arrangement structure of claim 9, wherein an arrangement of the first sub pixel, the second sub pixel and the third sub pixel in odd pixel rows is different from an arrangement of the first sub pixel, the second sub pixel and the third sub pixel in even pixel rows.

11. An organic light-emitting diode display device, comprising:

a pixel arrangement structure; and

a driving circuit electrically coupled to the pixel arrangement structure and configured to provide scan signals and data signals for the pixel arrangement structure,

the pixel arrangement structure comprising a plurality of pixel rows, two adjacent ones of the pixel rows disposed to be misaligned with each other, each of the pixel rows comprising a plurality of pixels, each of the pixels comprising:

a first sub pixel;

a second sub pixel; and

a third sub pixel,

wherein the first sub pixel in an N+1-th pixel row is disposed adjacent to the first sub pixel of one of the pixels in an N+2-th pixel row, the second sub pixel in an N-th pixel row is disposed adjacent to the second sub pixel of one of the pixels in the N+1-th pixel row, and N is a positive odd number greater than or equal to 1.

12. The organic light-emitting diode display device of claim 11, wherein a center of the first sub pixel, a center of the second sub pixel and a center of the third sub pixel of each of the pixels are arranged in a triangle.

13. The organic light-emitting diode display device of claim 11, wherein the first sub pixel and the second sub pixel of each of the pixels are disposed at a first side of each of the pixels, and the third sub pixel of each of the pixels is disposed at a second side of each of the pixels opposite to the first side.

14. The organic light-emitting diode display device of claim 13, wherein one of the first sub pixel and the second sub pixel of each of the pixels overlaps a center line of a long side of the third sub pixel of each of the pixels.

15. The organic light-emitting diode display device of claim 14, wherein an arrangement of the first sub pixel, the second sub pixel and the third sub pixel in odd pixel rows is different from an arrangement of the first sub pixel, the second sub pixel and the third sub pixel in even pixel rows.

* * * * *

专利名称(译)	像素排列结构及有机发光二极管显示装置		
公开(公告)号	US20200203440A1	公开(公告)日	2020-06-25
申请号	US16/323778	申请日	2018-12-20
[标]发明人	WANG ZHENG		
发明人	WANG, ZHENG		
IPC分类号	H01L27/32		
CPC分类号	G09G3/3208 G09G2300/0465 H01L27/3218 G09G2310/0278 H01L27/3216 H01L27/3246 H01L27/326 G09G3/3225 G09G2300/0426 G09G2300/0439 G09G2340/0457		
外部链接	Espacenet USPTO		

摘要(译)

像素布置结构包括多个像素行。像素行中的两个相邻的像素行被布置为彼此未对准。每个像素行包括多个像素。每个像素包括第一子像素、第二子像素；和第三子像素。N + 1中的第一个子像素。第N像素行与N + 2中的一个像素的第一子像素相邻。在第n个像素行中，第N个像素行中的第二子像素与N + 1中的像素之一的第二子像素相邻。-第n个像素行，并且N是大于或等于1的正奇数。还提供了一种有机发光二极管显示装置。

