




US 20140292736A1

(19) **United States**(12) **Patent Application Publication**
TSENG et al.(10) **Pub. No.: US 2014/0292736 A1**(43) **Pub. Date: Oct. 2, 2014**(54) **PIXEL CIRCUIT AND DRIVING METHOD
AND DISPLAY DEVICE THEREOF****Publication Classification**(71) Applicant: **InnoLux Corporation**, Miao-Li County
(TW)(51) **Int. Cl.**
G09G 3/32 (2006.01)(72) Inventors: **Ming Chun TSENG**, Miao-Li County
(TW); **Yi Hua HSU**, Miao-Li County
(TW); **Kung-Chen KUO**, Miao-Li
County (TW); **Lien-Hsiang CHEN**,
Miao-Li County (TW)(52) **U.S. Cl.**
CPC **G09G 3/3291** (2013.01)
USPC **345/211**(73) Assignee: **InnoLux Corporation**, Miao-Li County
(TW)(57) **ABSTRACT**(21) Appl. No.: **14/260,341**(22) Filed: **Apr. 24, 2014****Related U.S. Application Data**(63) Continuation-in-part of application No. 14/044,993,
filed on Oct. 3, 2013.

A pixel circuit includes an OLED, a driving transistor, first and second transistors, a storage capacitor and a coupling capacitor. The OLED includes an anode and a cathode connected to a first voltage source. The driving transistor includes a first node connected to a second voltage source, a second node, and a third node connected to the anode. The first transistor includes first, second and third terminals connected to a data driving line, a first control signal source, and the second node, respectively. The second transistor includes a first terminal, a second terminal connected to a second control signal source, and a third terminal connected to the anode and the third node. The storage capacitor includes first and second terminals connected to a third voltage source and the second transistor, respectively. The coupling capacitor includes first and second terminals connected to the second transistor and the second node, respectively.

(30) **Foreign Application Priority Data**

Mar. 28, 2013 (TW) 102111099

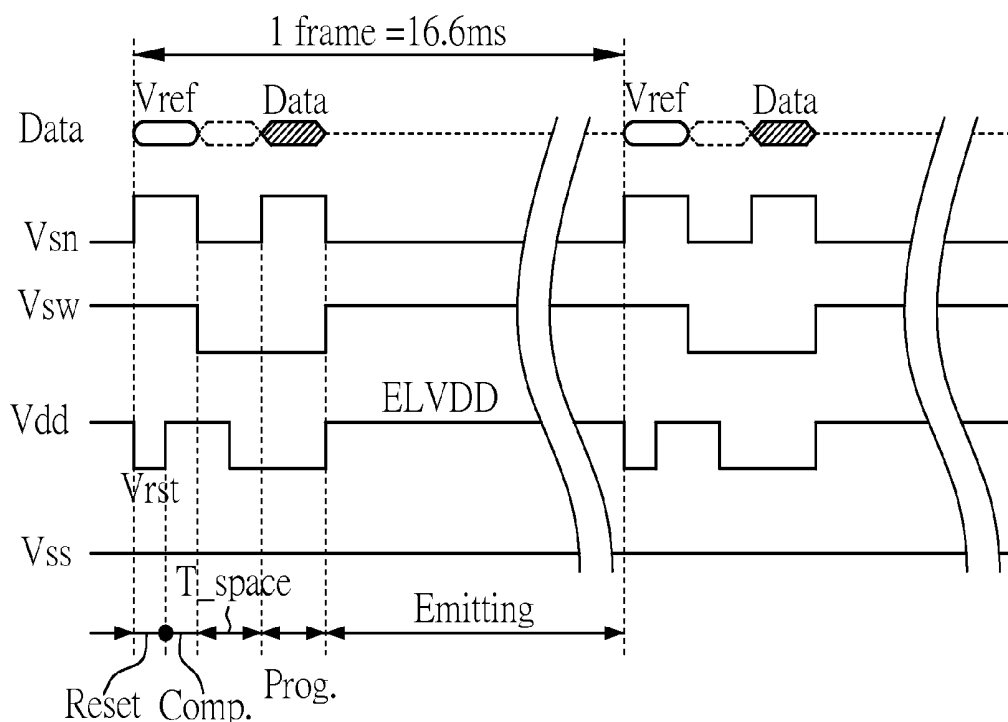

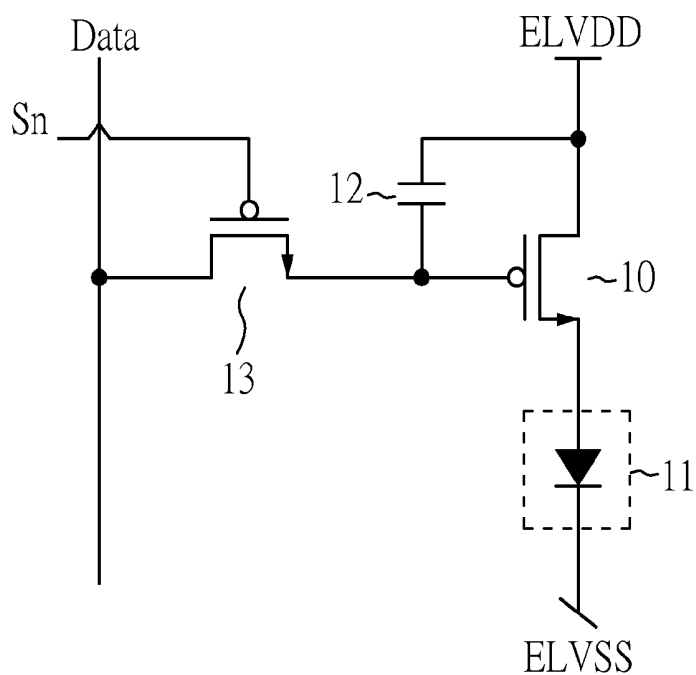


FIG. 1 (PRIOR ART)

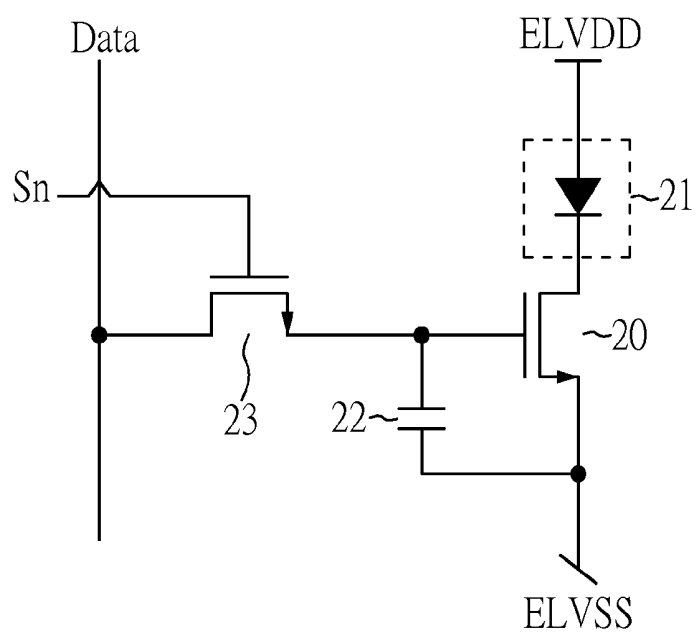


FIG. 2 (PRIOR ART)

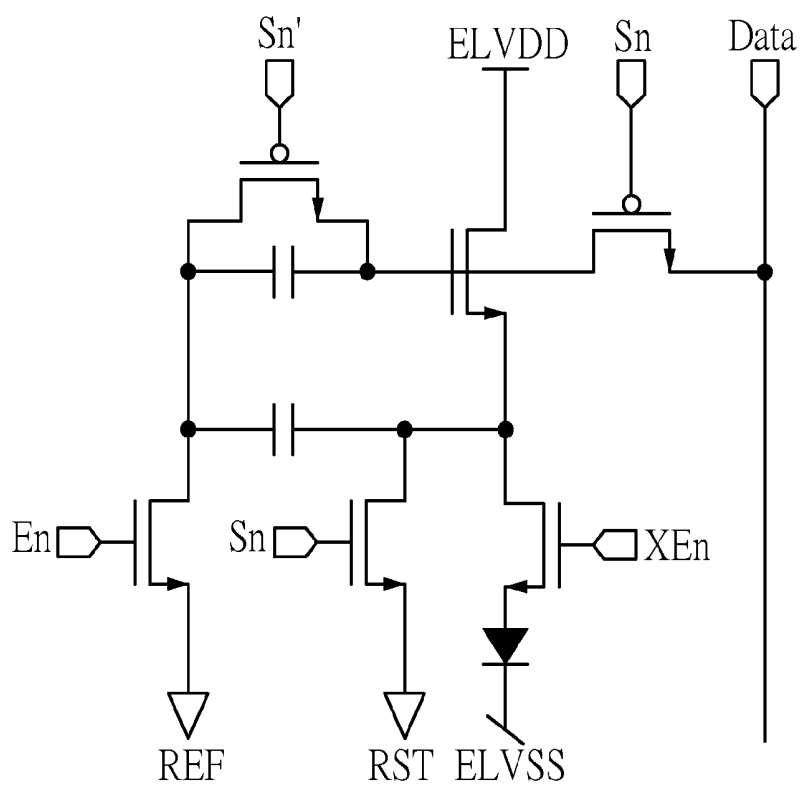


FIG. 3(PRIOR ART)

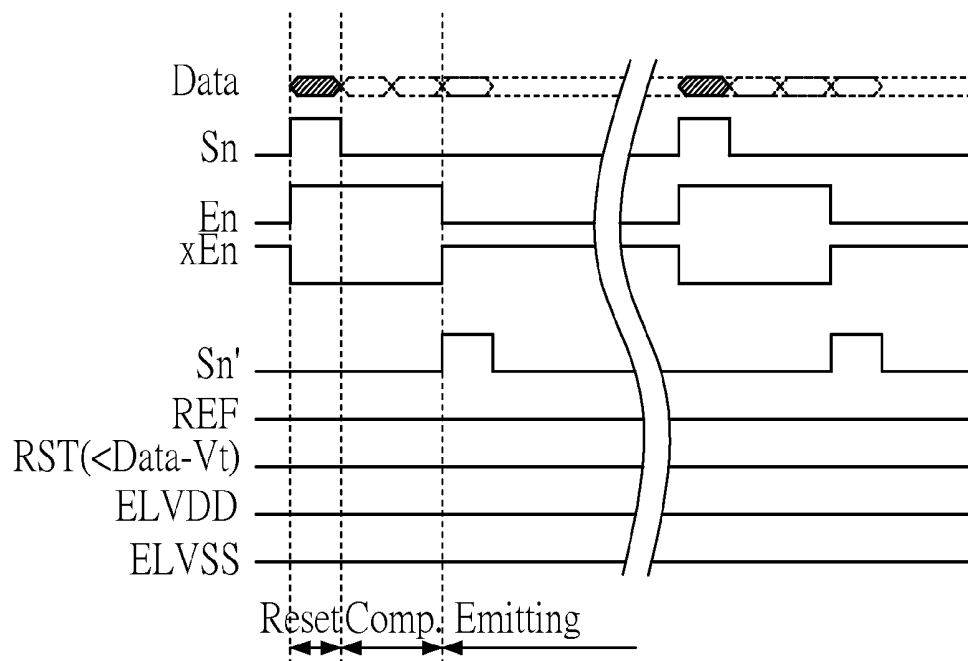


FIG. 4 (PRIOR ART)

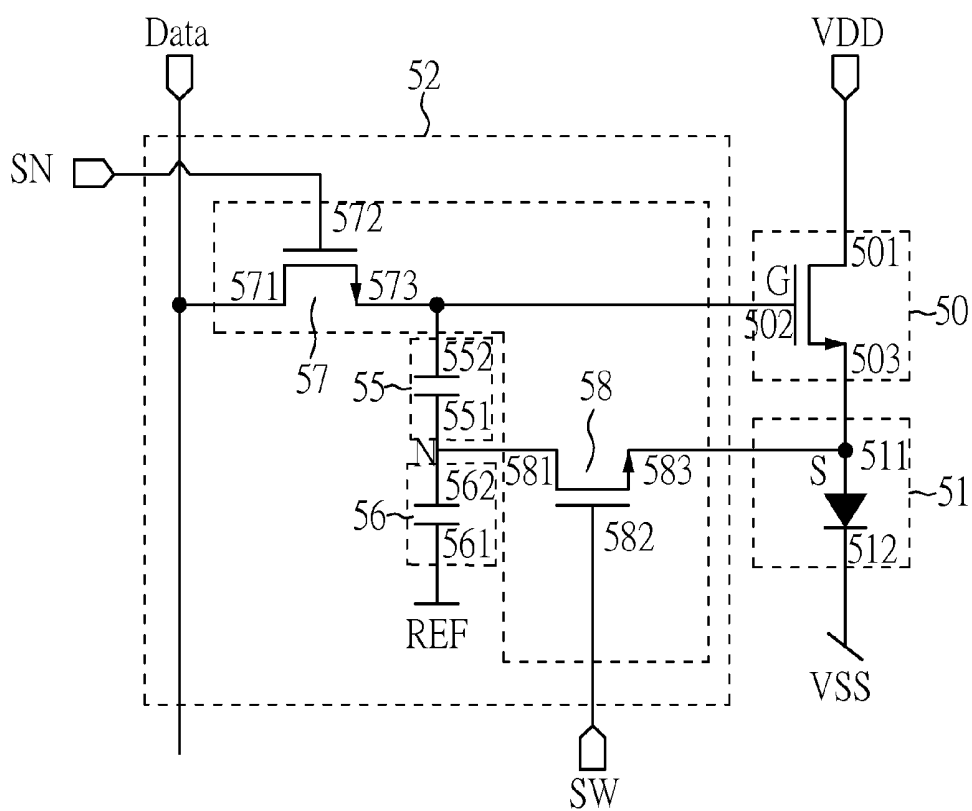


FIG. 5

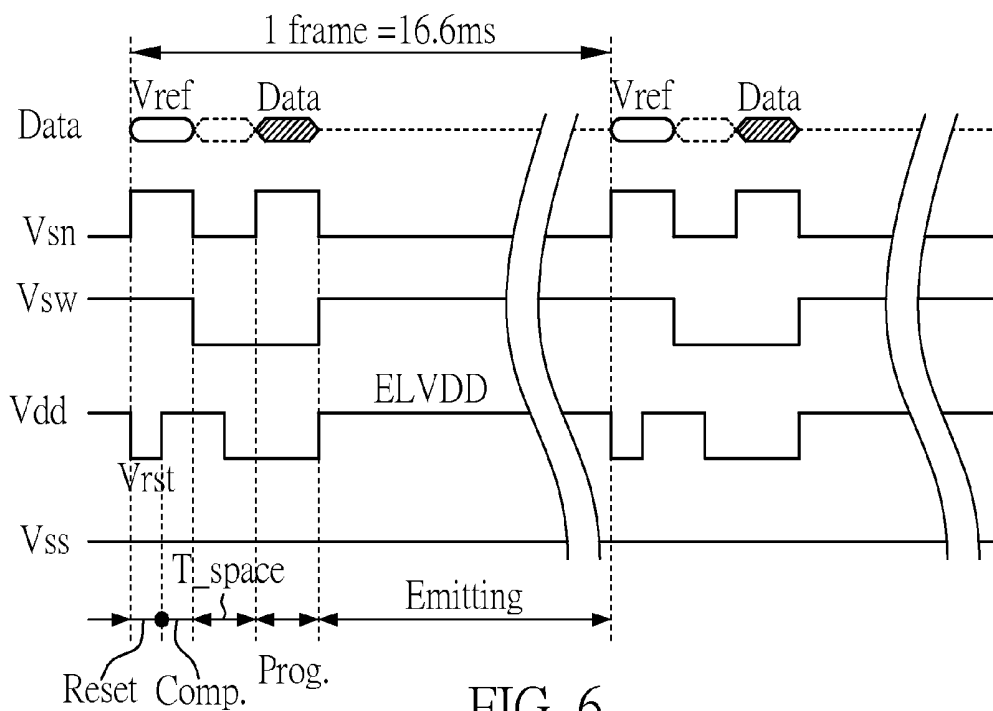


FIG. 6

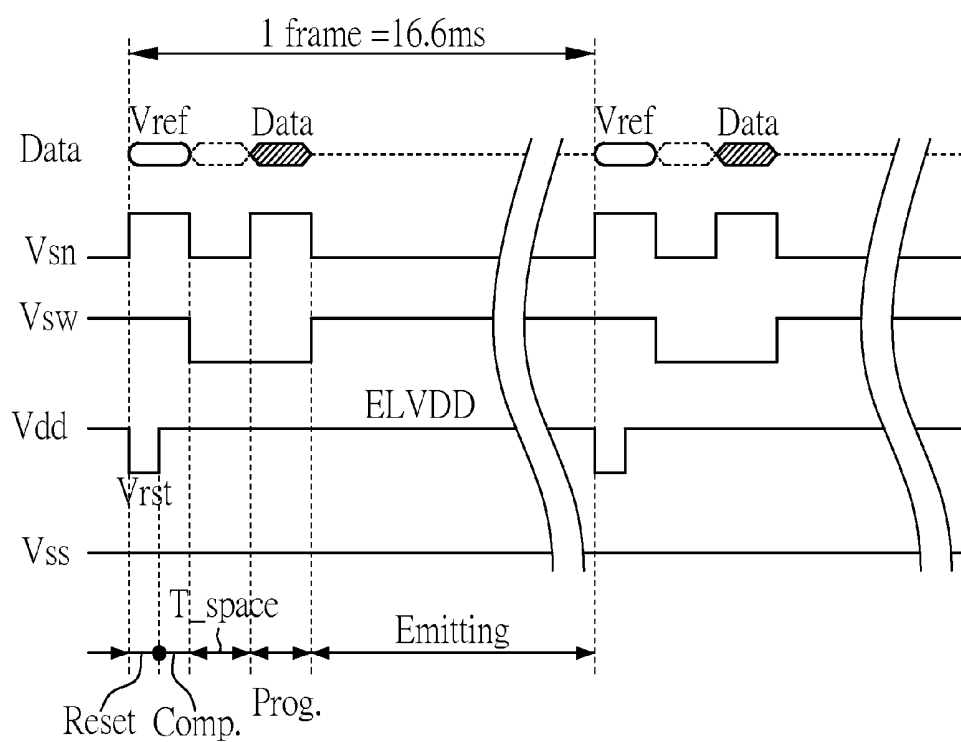


FIG. 7

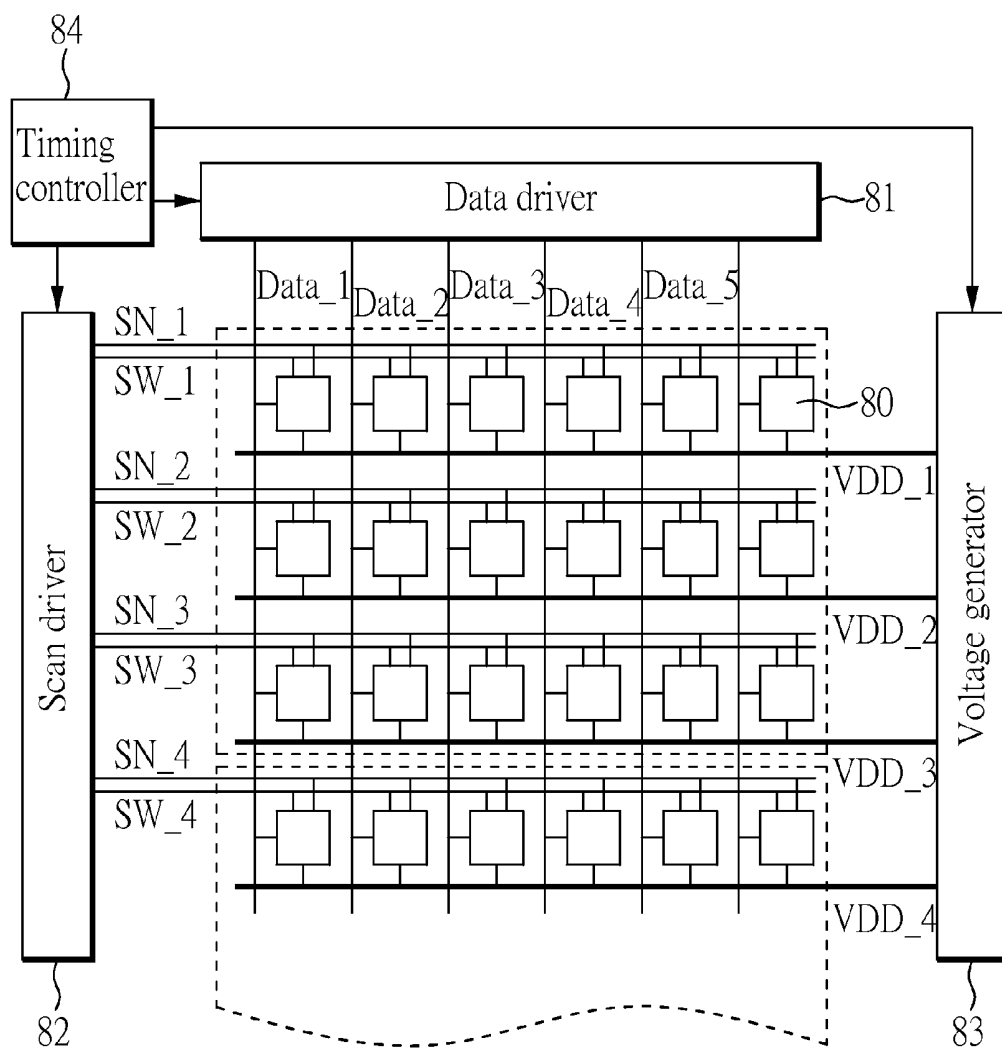


FIG. 8

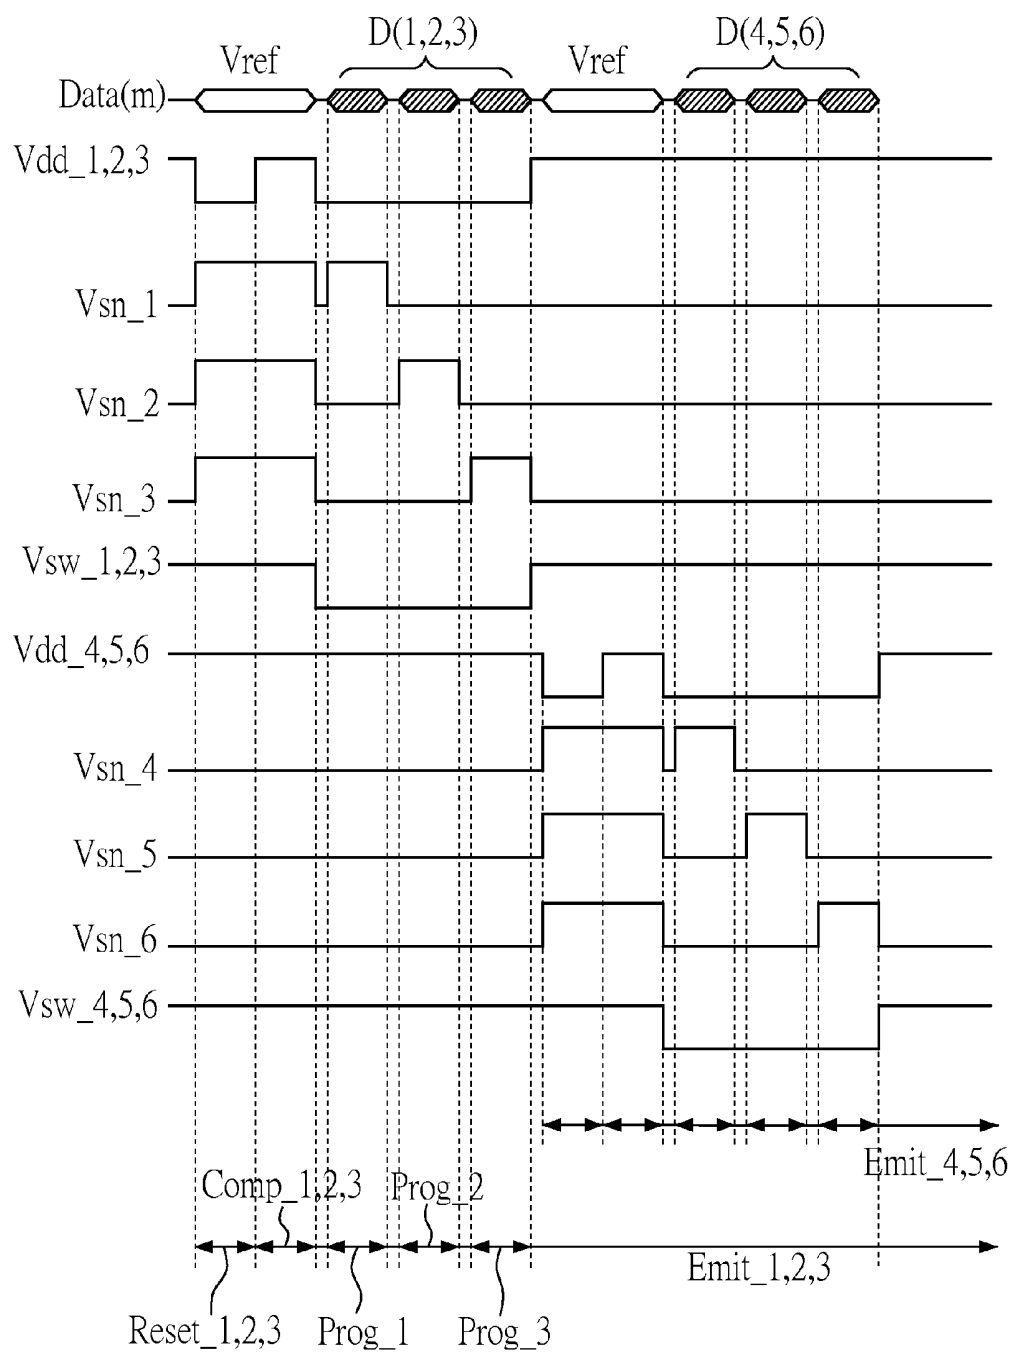


FIG. 9

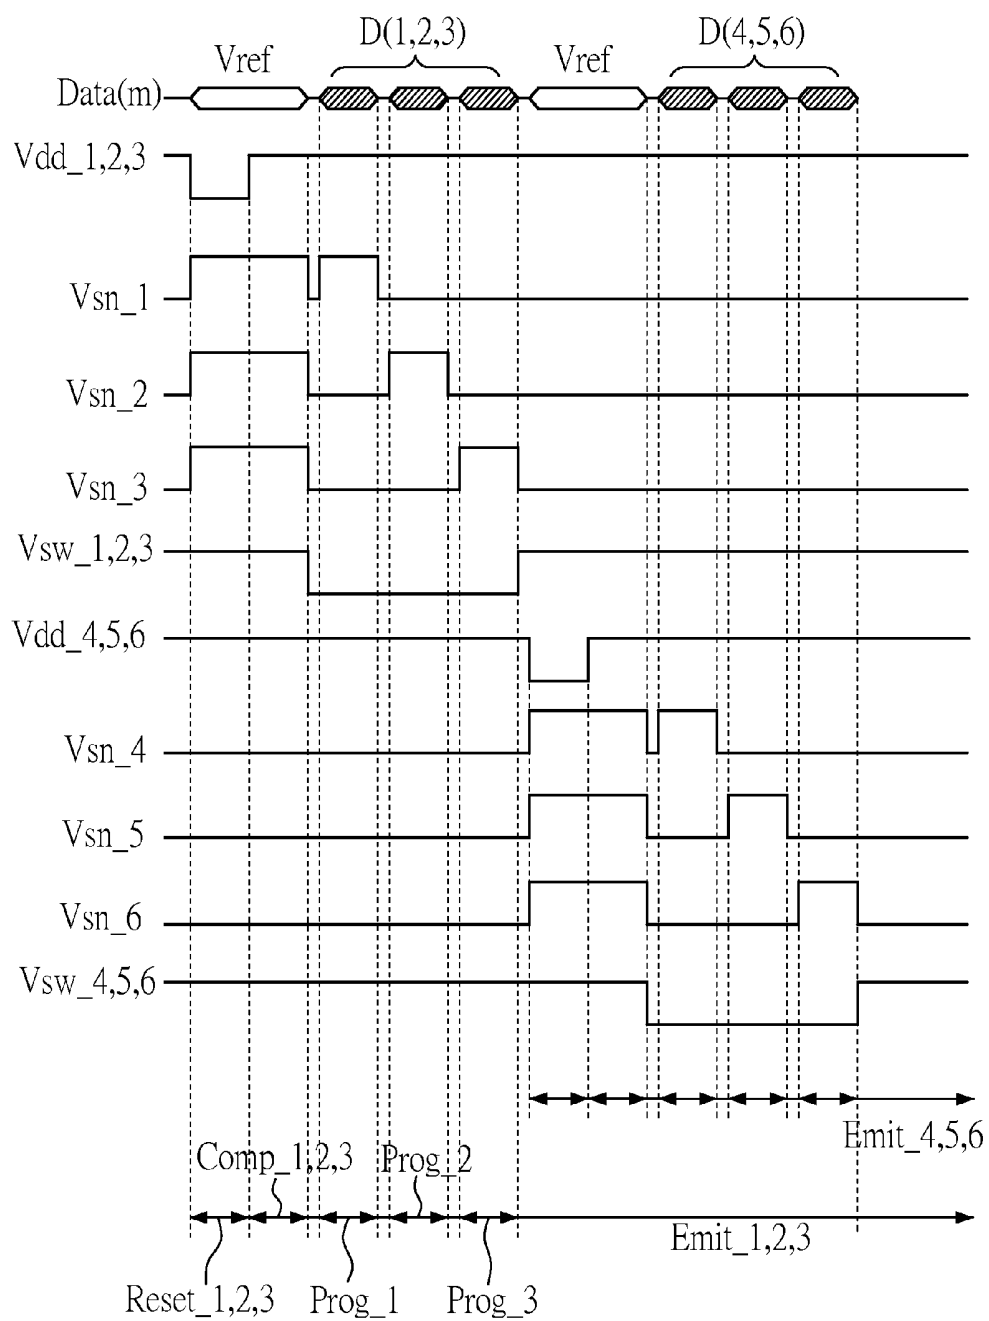


FIG. 10

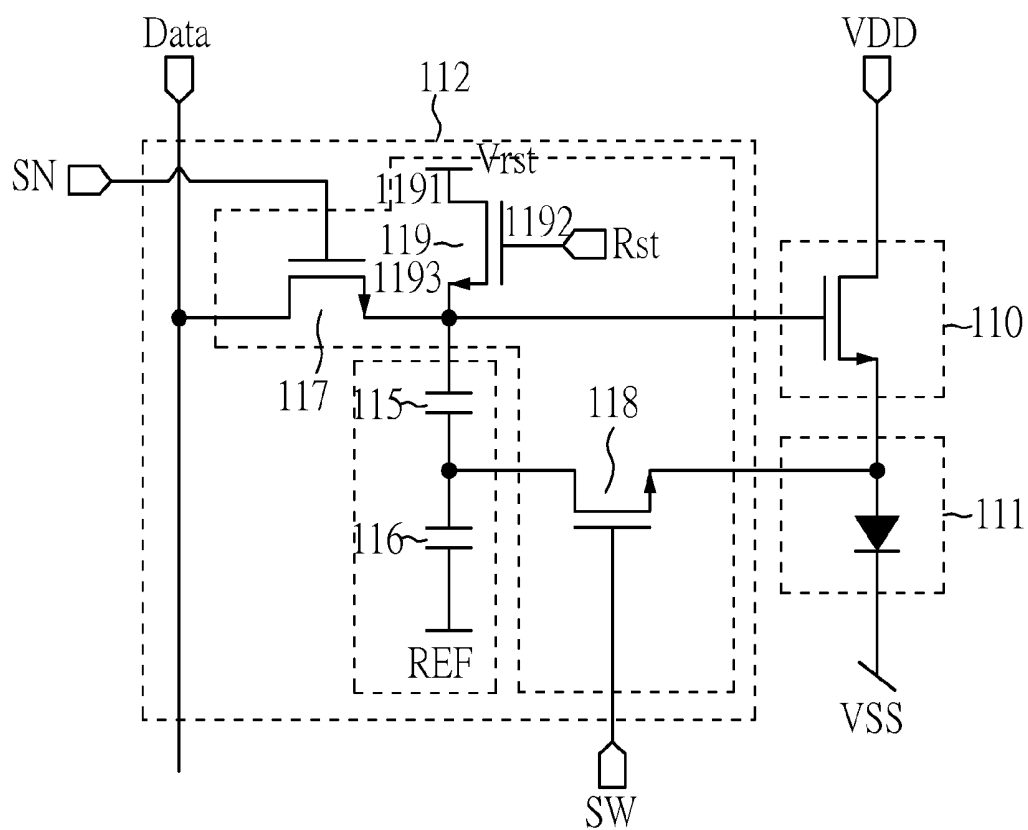


FIG. 11

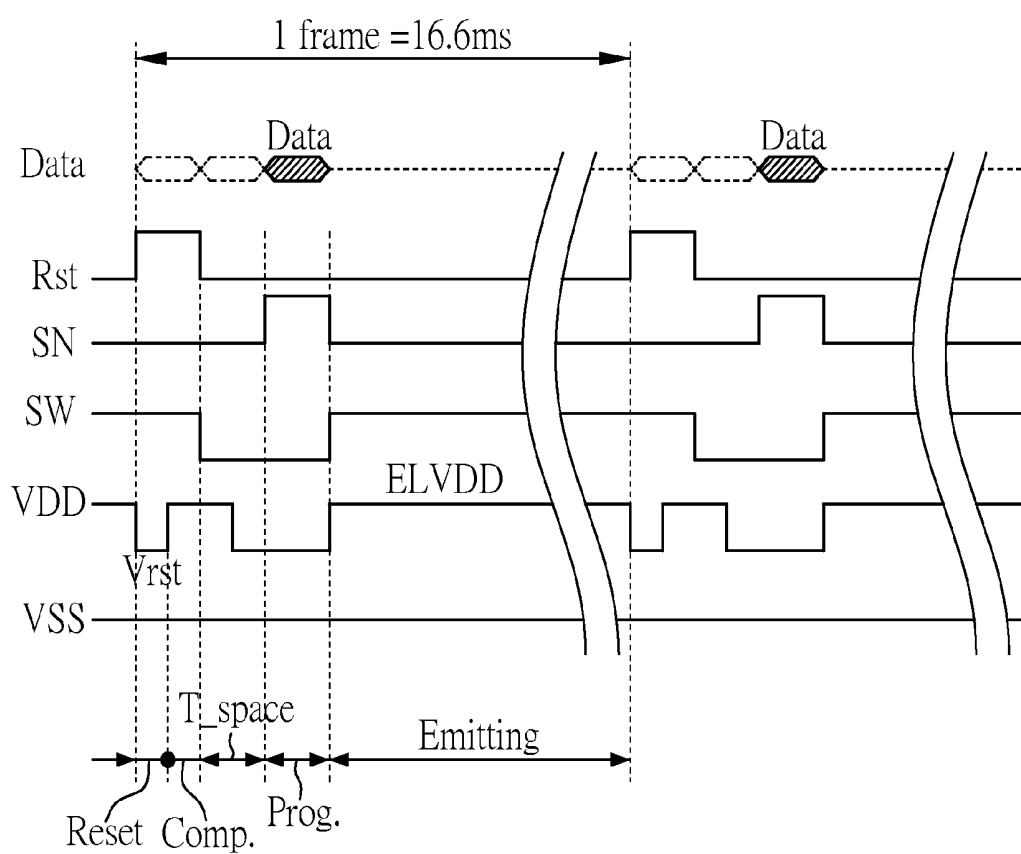


FIG. 12

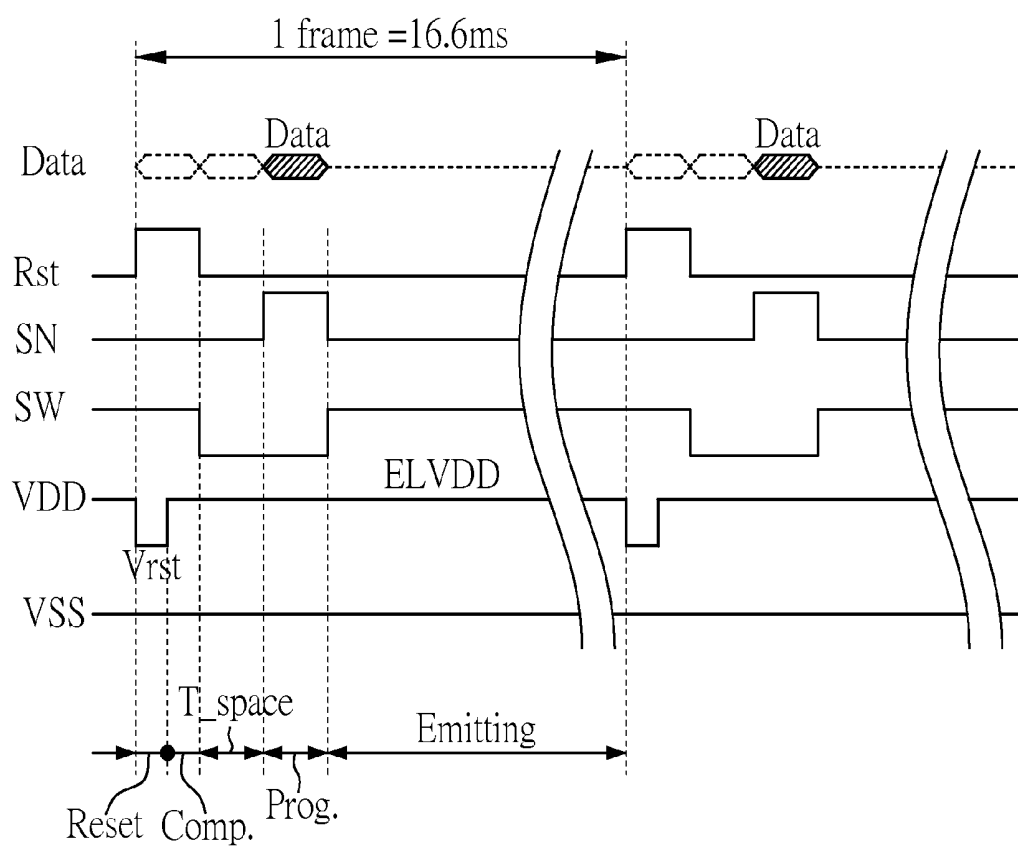
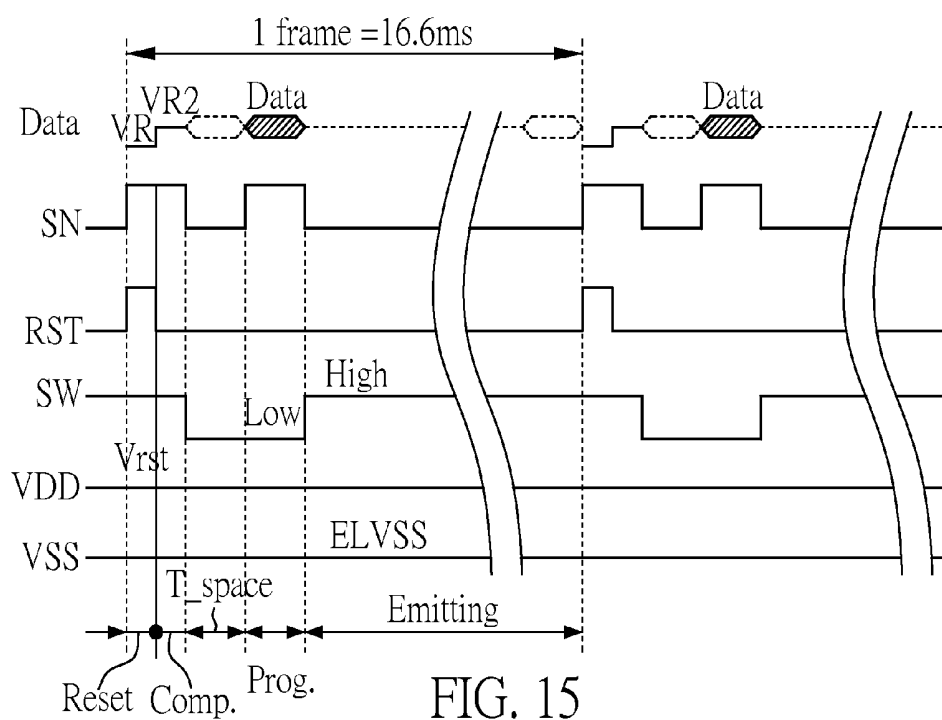
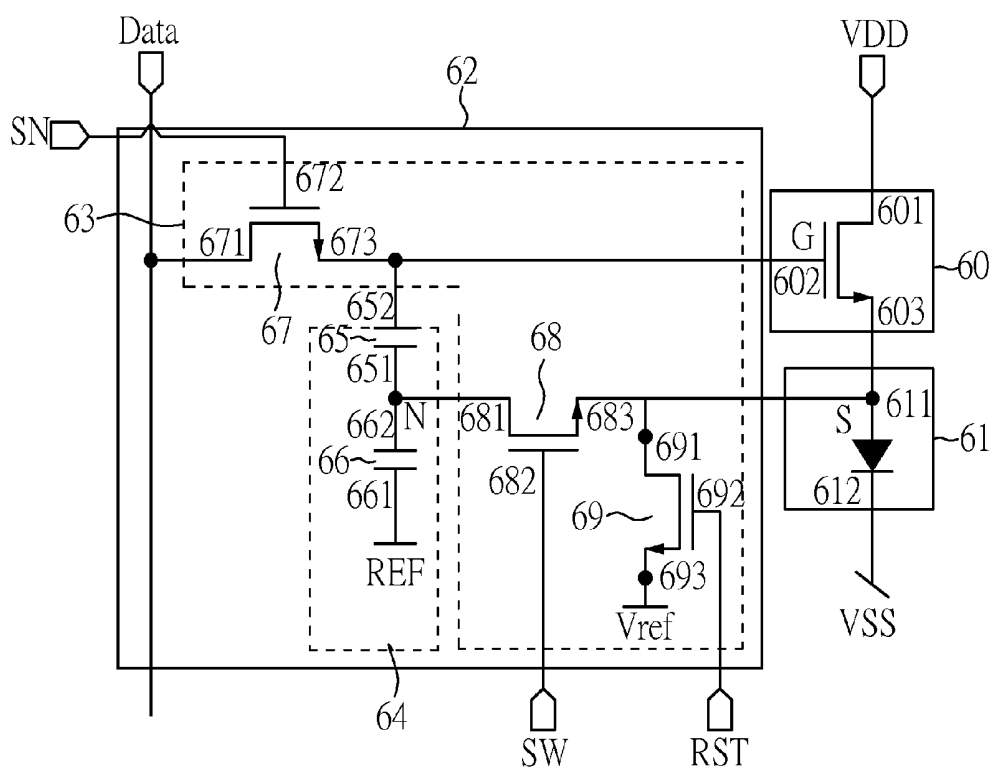


FIG.13



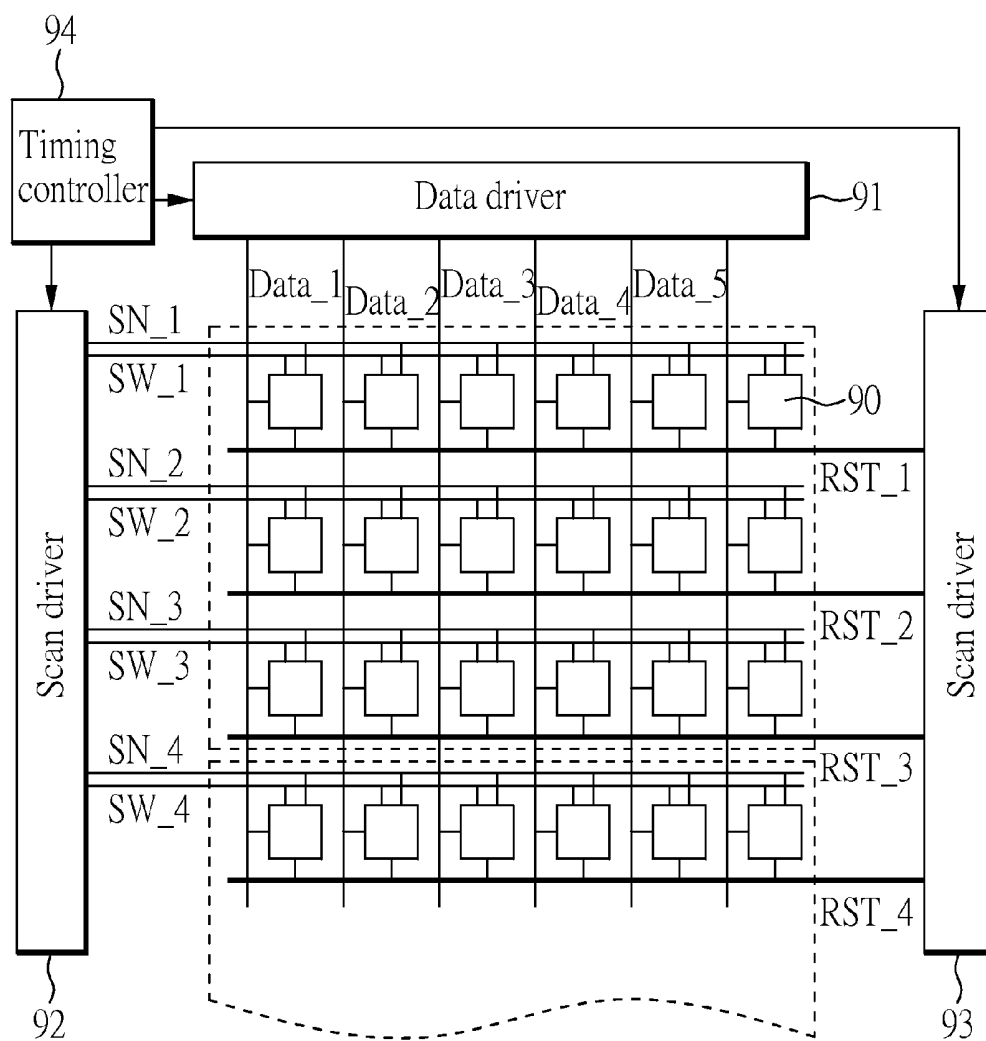


FIG. 16

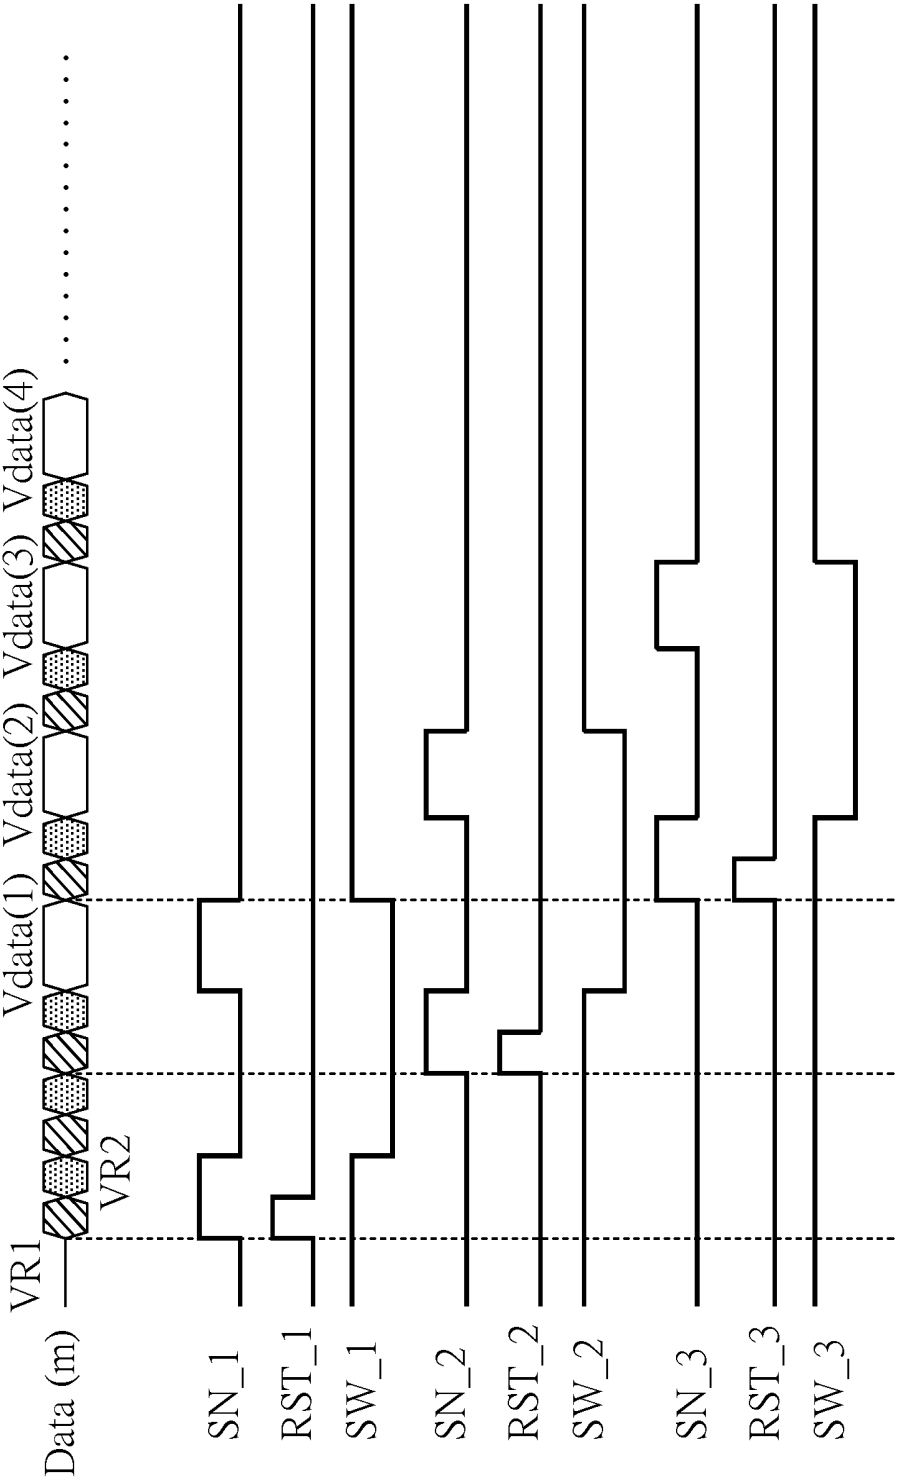


FIG. 17

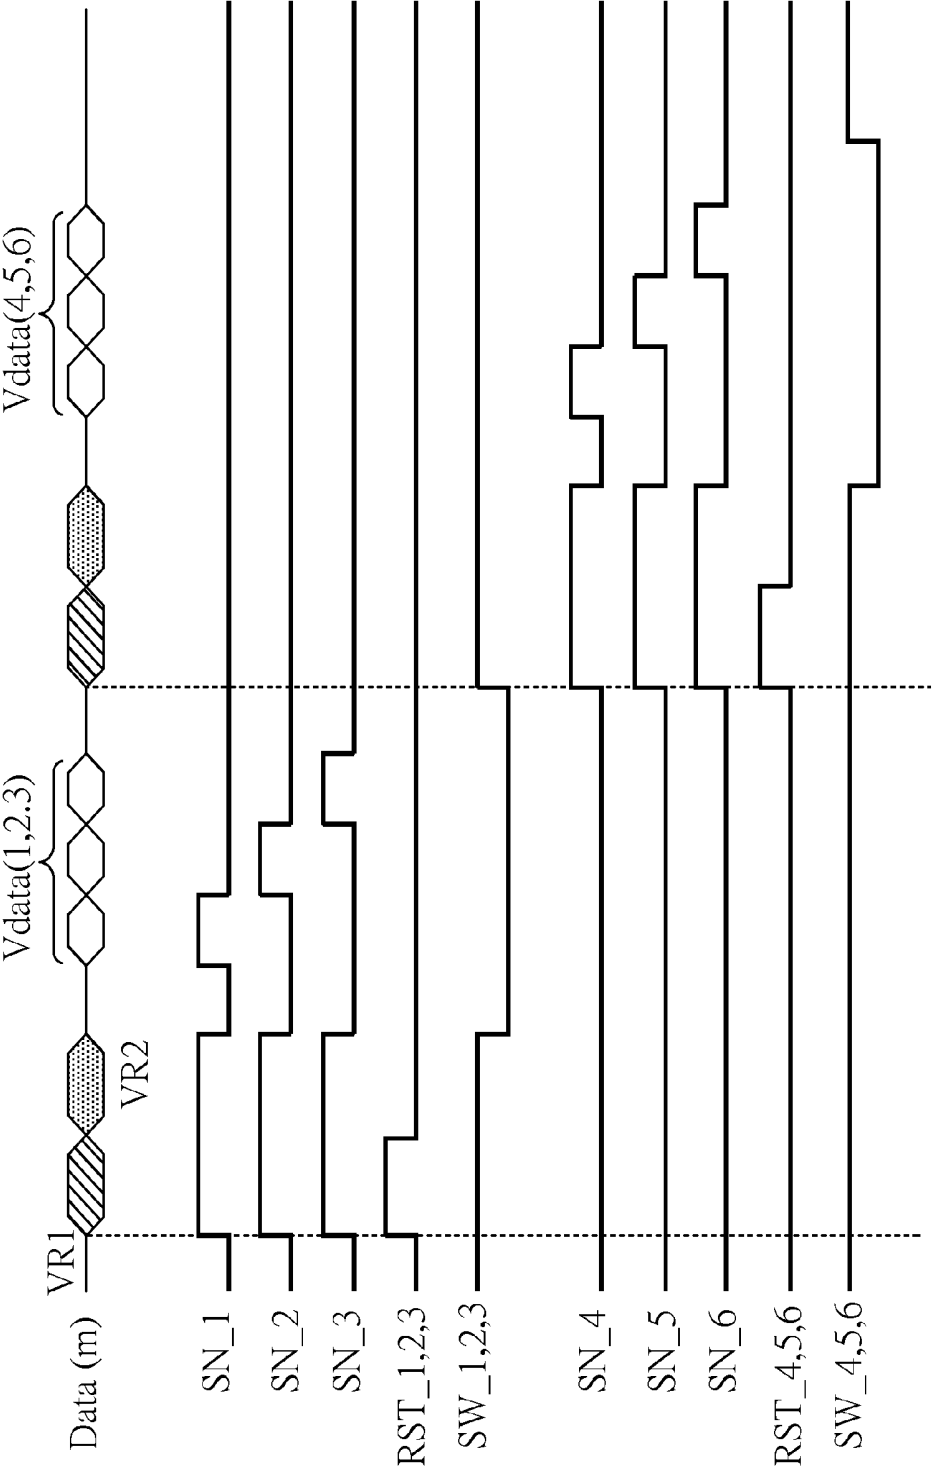


FIG. 18

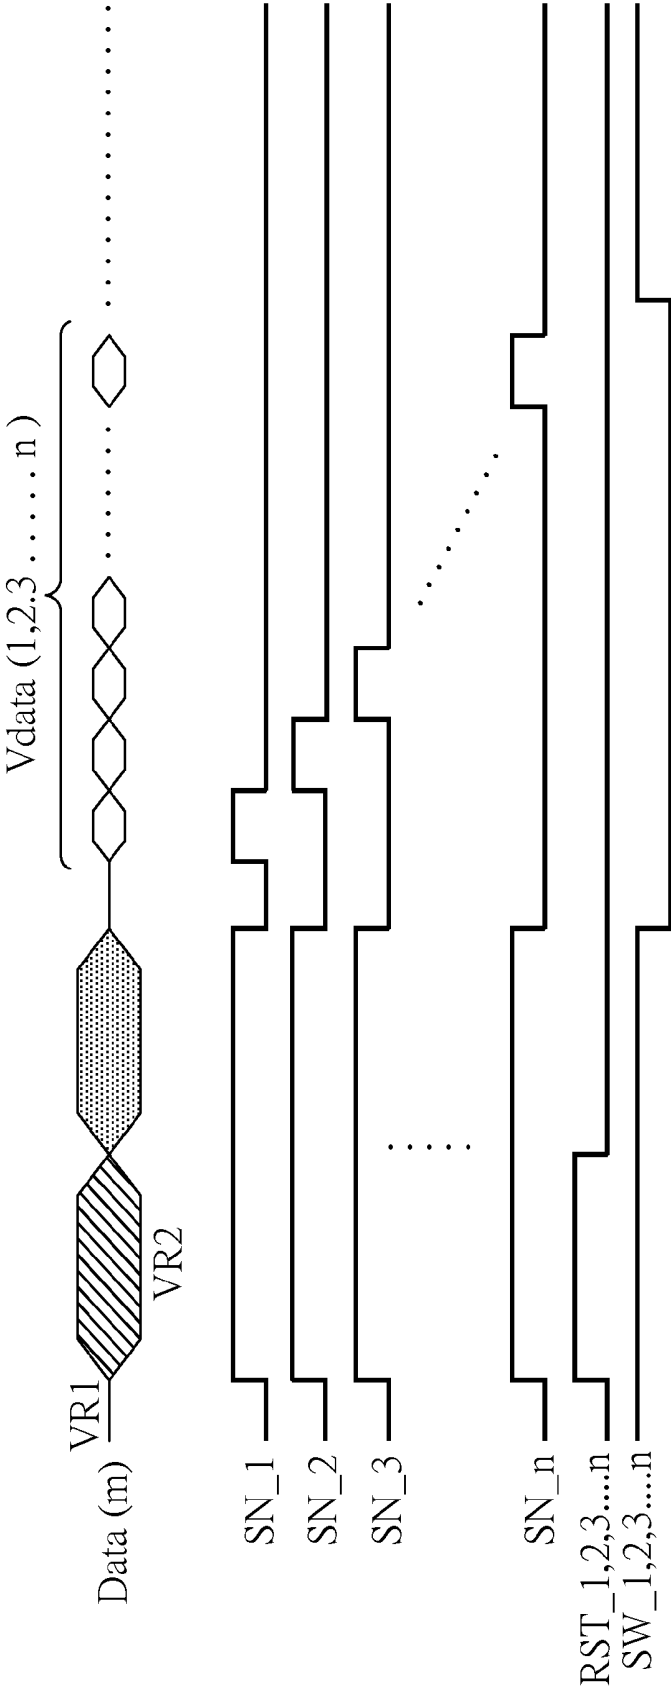


FIG. 19

PIXEL CIRCUIT AND DRIVING METHOD AND DISPLAY DEVICE THEREOF

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a pixel circuit and its driving method and, more particularly, to an active matrix OLED pixel circuit and its driving method suitable for compensating transistor threshold voltage and OLED voltage.

[0003] 2. Description of Related Art

[0004] Driving transistors of active matrix OLED (AMOLED) can be classified to P-type transistors and N-type transistors according to its back plate manufacture technologies. Please refer to FIG. 1 and FIG. 2, which are prior P-type and N-type driving circuits of AMOLED, respectively. As shown in FIG. 2, for the N-type driving circuit, there is a problem in that the threshold voltage of the N-type transistor may be shifted. This threshold voltage shift is caused by the generation of degradation due to the manufacture variation and long-time operation, resulting in being unable to output a current same as the initial current and thus producing mura or brightness decay. Moreover, due to that the OLED is operated for a long time, the operating voltage is increased following the increase of the time. Thus, to solve the aforementioned problem, an N-type compensation circuit is proposed. With reference to both FIG. 3 and FIG. 4, there are a schematic diagram of N-type AMOLED compensation driving circuit and a timing diagram of N-type compensation driving circuit. As shown in FIG. 3 and FIG. 4, it can be seen that the number of components (6T2C) in the pixel circuit design is too many and the driving signals (Sn, Sn', En, Xen) become too complicated, resulting in being unable to satisfy the requirements of high precision and high aspect ratio.

[0005] Therefore, it is desirable to provide an improved pixel circuit and its driving method, in which N-type driving transistors are used to drive the OLED, and combined with a plurality of transistors and capacitors to compensate the threshold voltage of the N-type transistor and the voltage of the AMOLED, so as to satisfy the requirements of high precision and high aspect ratio.

SUMMARY OF THE INVENTION

[0006] The invention provides a pixel circuit, which comprises: an OLED including an anode, and a cathode connected to a first voltage source; a driving transistor for driving the OLED including a first node connected to a second voltage source, a second node, and a third node connected to the anode; a first transistor including a first terminal connected to a data driving line, a second terminal connected to a first control signal source, and a third terminal connected to the second node; a second transistor including a first terminal, a second terminal connected to a second control signal source, and a third terminal connected to the anode and the third node; a storage capacitor including a first terminal connected to a third voltage source and a second terminal connected to the first terminal of the second transistor; a reset transistor including a first terminal connected to the anode and the third node, a second terminal connected to a reset control signal source, and a third terminal connected to a reference voltage source or the data driving line; and a coupling capacitor including a first terminal connected to the first terminal of the second transistor and a second terminal connected to the second node.

[0007] Moreover, the driving transistor, first transistor, second transistor and reset transistor are N-type transistors.

[0008] Moreover, in a reset stage, the first control signal source provides a first control signal to turn the first transistor on, the second control signal source provides a second control signal to turn the second transistor on, the reset control signal source provides a reset control signal to turn the reset transistor on, the data driving line inputs a first reference voltage to the driving transistor to reset the second node, and the reference voltage source provides a second reference voltage or the data driving line provides the first reference voltage to the reset transistor to reset the third node and the first terminal of the coupling capacitor; in a compensating stage, the data driving line inputs a third reference voltage to the second node, the third node and the storage capacitor store a difference between the third reference voltage and the threshold voltage of the driving transistor, and the driving transistor is transited from on state to off state; in a programming stage, the data driving line inputs a data voltage to the driving transistor, and a difference between the third reference voltage and the data voltage is coupled to the first terminal of the coupling capacitor; in a light emitting stage, the threshold voltage and a voltage of the OLED are coupled to the second node.

[0009] Furthermore, the invention provides a method for driving a pixel circuit, wherein the pixel circuit comprises an OLED including an anode and a cathode connected to a first voltage source; a driving transistor for driving the OLED, the driving transistor including a first node connected to a second voltage source, a second node and a third node connected to the anode; a first transistor including a first terminal connected to a data driving line, a second terminal connected to a first control signal source and a third terminal connected to the second node; a second transistor including a first terminal, a second terminal connected to a second control signal source and a third terminal connected to the anode and the third node; a storage capacitor including a first terminal connected to a third voltage source and a second terminal connected to the first terminal of the second transistor; a coupling capacitor including a first terminal connected to the first terminal of the second transistor and a second terminal connected to the second node; and a reset transistor including a first terminal connected to the anode and the third node, a second terminal connected to a reset control signal source and a third terminal connected to a reference voltage source or the data driving line. The method comprises the steps of: (A) in a reset stage, the data driving line inputting a first reference voltage to the driving transistor to reset the second node, and the reference voltage source providing a second reference voltage or the data driving line providing the first reference voltage to the reset transistor to reset the third node and the first terminal of the coupling capacitor; (B) in a compensating stage, the data driving line inputting a third reference voltage to the second node, the third node and the storage capacitor storing a difference between the third reference voltage and the threshold voltage of the driving transistor, and the driving transistor being transited from on state to off state; (C) in a programming stage, the data driving line inputting a data voltage to the driving transistor, and a difference between the third reference voltage and the data voltage being coupled to the first terminal of the coupling capacitor; and (D) in a light emitting stage, the threshold voltage and a voltage of the OLED being coupled to the second node.

[0010] In addition, the invention provides a display panel, which comprises: a plurality of pixel circuits arranged as a pixel circuit matrix according a plurality of columns and rows; a data driver having a plurality of data driving lines connected to the pixel circuits on the columns of the pixel circuit matrix for providing at least an input voltage; a scan driver having a plurality of scan driving lines vertically intersected with the data driving lines for being connected to the pixel circuits on the rows of the pixel circuit matrix for providing at least a switching voltage; and a timing controller connected to the data driver and the scan driver for controlling the data driver and the scan driver.

[0011] Other objects, advantages, and novel features of the invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] FIG. 1 is a schematic diagram of a prior P-type driving circuit of an AMOLED;

[0013] FIG. 2 is a schematic diagram of a prior N-type driving circuit of an AMOLED;

[0014] FIG. 3 is a schematic diagram of a prior N-type compensation driving circuit of an AMOLED;

[0015] FIG. 4 is a timing diagram of the compensation driving circuit shown in FIG. 3;

[0016] FIG. 5 is a schematic diagram of the pixel circuit in accordance with a preferred embodiment of the invention;

[0017] FIG. 6 is a timing diagram of the pixel circuit shown in FIG. 5;

[0018] FIG. 7 is another timing diagram of the pixel circuit shown in FIG. 5;

[0019] FIG. 8 is a schematic diagram of the display panel in accordance with a preferred embodiment of the invention;

[0020] FIG. 9 is a timing diagram for the display panel using three rows of the pixel circuit matrix as a display unit in accordance with the invention;

[0021] FIG. 10 is another timing diagram for the display panel using three rows of the pixel circuit as a display unit in accordance with the invention;

[0022] FIG. 11 is a schematic diagram of the pixel circuit in accordance with another preferred embodiment of the invention;

[0023] FIG. 12 is a timing diagram of the pixel circuit shown in FIG. 11;

[0024] FIG. 13 is another timing diagram of the pixel circuit shown in FIG. 11;

[0025] FIG. 14 is a schematic diagram of the pixel circuit in accordance with another preferred embodiment of the invention;

[0026] FIG. 15 is a timing diagram of the pixel circuit shown in FIG. 14;

[0027] FIG. 16 is a schematic diagram of the display panel in accordance with another preferred embodiment of the invention;

[0028] FIG. 17 is a timing diagram for the display panel using one row of the pixel circuit matrix as a display unit shown in FIG. 16;

[0029] FIG. 18 is a timing diagram for the display panel using three rows of the pixel circuit matrix as a display unit shown in FIG. 16; and

[0030] FIG. 19 is a timing diagram for the display panel using n rows of the pixel circuit matrix as a display unit shown in FIG. 16.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0031] With reference to FIG. 5, there is shown a schematic diagram of a pixel circuit in accordance with a preferred embodiment of the invention. As shown, the pixel circuit includes: a driving transistor 50, an OLED 51, and a voltage control unit 52. The OLED 51 includes an anode 511 and a cathode 512, wherein the cathode 512 is connected to a first voltage source VSS that provides a first voltage Vss. The driving transistor 50 is preferred to be an N-type transistor including a first node 501, a second node 502 and a third node 503, wherein the first node 501 is a drain electrically connected to a second voltage source VDD that provides a second voltage Vdd, the second node 502 is a gate, and the third node 503 is a source electrically connected to the anode 511.

[0032] The aforementioned voltage control unit 52 includes a first transistor 57, a second transistor 58, a storage capacitor 56 and a coupling capacitor 55. The first transistor 57 has a first terminal 571 connected to a data driving line (Data), a second terminal 572 connected to a first control signal source SN that provides a first control signal, and a third terminal 573 connected to the second node 502. The second transistor 58 has a first terminal 581, a second terminal 582 connected to a second control signal source SW that provides a second control signal, and a third terminal 583 connected to the anode 511 and the third node 503. The first and second transistors 57, 58 are preferred to be N-type transistors. The storage capacitor 56 has a first terminal 561 connected to a third voltage source REF, and a second terminal 562 connected to the first terminal 581 of the second transistor 58. The coupling capacitor 55 has a first terminal 551 connected to the first terminal 581 of the second transistor 58, and a second terminal 552 connected to the second node 502. Accordingly, when the pixel circuit is in a reset stage, the first transistor 57 is turned on by the first control signal, and a reference voltage Vref is inputted to the driving transistor 50 to reset the second node 502, the third node 503 and the first terminal 581 of the second transistor 58. When the pixel circuit is in a compensation stage, a threshold voltage V_t of the driving transistor 50 is stored into the third node 503 and the storage capacitor 56, and then the driving transistor 50 is transited from on state to off state. When the pixel circuit is in a programming stage, the second transistor 58 is turned off by the second control signal, a data voltage is inputted to the driving transistor 50, and a voltage of the coupling capacitor 55 is coupled to the first terminal 581 of the second transistor 58. When the pixel circuit is in a light emitting stage, the threshold voltage V_t and a voltage V_{oled} of the OLED 51 are coupled to the second node 502. The aforementioned reset stage, compensation stage, programming stage and light emitting stage are executed repeatedly in sequence.

[0033] With reference to FIG. 6, which is a timing diagram of the pixel circuit shown in FIG. 5, the circuit operation can be divided into the reset stage (Reset), compensation stage (Comp.), programming stage (Prog.) and light emitting stage (Emitting). The on/off states of the driving transistor 50, the first transistor 57, the second transistor 58 and the OLED 51 corresponding those stages are illustrated in Table 1, and a voltage (V_G) of the second node 502 of the driving transistor 50, a voltage (V_S) of the anode 511 of the OLED 51, a voltage (V_N) of the first terminal 551 of the coupling capacitor 55, a voltage difference (V_{GS}) between the second node 502 and the anode 511, and a voltage difference (V_{GN}) between the

second node **502** and the first terminal **551** of the coupling capacitor **55** are illustrated in Table 2.

TABLE 1

Cycle	Driving transistor	First transistor	Second transistor	OLED
Reset stage	ON	ON	ON	OFF
Comp. stage	OFF	ON	ON	OFF
Prog. stage	ON	ON	OFF	OFF
Emitting stage	ON	OFF	ON	ON

TABLE 2

	Reset stage	Comp. stage	Prog. stage	Emitting stage
Second node of the driving transistor (V_G)	Vref	Vref	Vdata	$(Vdata - Vref) * (1 - f1) + Vt + Voled$
Anode of the OLED (V_{GS})	Vrst	Vref - Vt	Vrst	Voled
First terminal of the coupling capacitor (V_N)	Vrst	Vref - Vt	$Vref * (1 - f1) + Vdata * f1 - Vt$	Voled
Voltage difference between the second node and the anode (V_{GS})	Vref - Vrst	Vt	Vdata - Vrst	$(Vdata - Vref) * (1 - f1) + Vt$
Second node and the first terminal of the coupling capacitor (V_{GN})	Vref - Vrst	Vt	$(Vdata - Vref) * (1 - f1) + Vt$	$(Vdata - Vref) * (1 - f1) + Vt$

[0034] As a result, in the reset stage, the driving transistor **50**, first transistor **57**, and second transistor **58** are in on state, and the OLED **51** is in off state. The data driving line (Data) inputs a reference voltage Vref to the first terminal **571** of the first transistor **57**, and then to the third terminal **573** of the first transistor **57** so as to reset the second node **502** to be the reference voltage Vref, and the second voltage Vdd is a reset voltage Vrst at the same time, satisfying the relation of $Vref > Vrst + Vt$, such that the third node **503** is reset to be the reset voltage Vrst, and thus the first terminal **551** of the coupling capacitor **55** is reset to be the reset voltage Vrst.

[0035] In the compensation stage, the first transistor **57** and the second transistor **58** are in on state, and the OLED **51** is in off state. The second node **502** is still the reference voltage Vref, and the second voltage Vdd is transited to a high potential voltage ELVDD at the same time, such that the driving transistor **50** is turned gradually from on to off by discharging, and the anode **511** of the OLED **51** is discharged to Vref-Vt, so as to measure the threshold voltage Vt of the driving transistor **50** and then store it into the storage capacitor **56**.

[0036] As shown in FIG. 6, after the compensation stage, there is a space time (T_{space}), which is a period of time between the compensation stage and the programming stage, and the space time is greater than or equal to 0.

[0037] In the programming stage, the driving transistor **50** and the first transistor **57** are in on state, and the second

transistor **58** and the OLED **51** are in off state. The data driving line (Data) inputs a data voltage Vdata to the first terminal **571** of the first transistor **57**, and then to the third terminal **573** of the first transistor **57** so as to allow the second node **502** to be the data voltage Vdata, and the second voltage Vdd is the reset voltage Vrst at the same time, such that the voltage V_N of the first terminal **551** of the coupling capacitor **55** is coupled, via the coupling capacitor **55**, to:

$$V_N = Vref - Vt + (Vdata - Vref) * f1 \quad (1)$$

$$= Vref * (1 - f1) + Vdata * f1 - Vt,$$

and the voltage difference between the second node **502** and the first terminal **551** of the coupling capacitor **55** is:

$$V_{GN} = Vdata - (Vref * (1 - f1) + Vdata * f1 - Vt) \quad (2)$$

$$= (Vdata - Vref) * (1 - f1) + Vt,$$

wherein $f1 = C_{cp} / (C_{cp} + C_{st})$, C_{cp} is capacitance value of the coupling capacitor **55**, and C_{st} is capacitance value of the storage capacitor **56**. The storage capacitor **56** has both the threshold voltage Vt and data voltage Vdata in the previous stage, such that the voltage difference V_{GN} between the second node **502** and the first terminal **551** of the coupling capacitor **55** is greater than or equal to the threshold voltage Vt. Meanwhile, the OLED **51** cannot be turned on, and thus the following conditions have to be satisfied:

$$Vrst \leq V_{ss} + Voled(0), \quad (3)$$

wherein Voled(0) is a turn-on voltage of the OLED **51**.

[0038] In the light emitting stage, the driving transistor **50**, second transistor **58** and OLED **51** are in on state, and the first transistor **57** is in off state. The anode **511** and the first terminal **551** of the coupling capacitor **55** are both the voltage Voled of the OLED **51**, and the coupling capacitor **55** couples the voltage Voled of the OLED **51** to the second node **502**:

$$V_G = Vdata + (Voled - (Vref * (1 - f1) + Vdata * f1 - Vt)) \quad (4)$$

$$= (Vdata - Vref) * (1 - f1) + Vt + Voled,$$

while the voltage difference between the second node **502** and the anode **511** is:

$$V_{GS} = (Vdata - Vref) * (1 - f1) + Vt, \quad (5)$$

so that the output current I_{oled} of the driving transistor **50** can be expressed as:

$$I_{oled} = Kp * (V_{GS} - Vt)^2 \quad (6)$$

$$= Kp * [(Vdata - Vref) * (1 - f1)]^2,$$

where $Kp = 1/2(\mu * COX)(W/L)$, μ is carrier mobility of the driving transistor **50**, COX is a per area capacitance of the driving transistor, and (W/L) is a width to length ratio of the driving transistor **50**. From equation (6), it can be known that the output current of the driving transistor **50** is not related with

the threshold voltage V_t and the voltage of the OLED **51** (V_{oled}), thereby not only compensating the threshold voltage of the transistor and the voltage of the AMOLED, but also satisfying the requirements of high precision and high aspect ratio.

[0039] It is noted that, in the light emitting stage, there are charges distributed into the first terminal **551** of the coupling capacitor **55** and the third node **503** due to the second transistor **58** being turned on instantaneously. In the moment of turning on the second transistor **58**, the first terminal **551** of the coupling capacitor **55** can be expressed as:

$$V_N = V_{N_pro} * C_{st} + V_{S_pro} * C_{oled} / (C_{st} + C_{oled}), \quad (7)$$

where C_{oled} is a capacitance value of the OLED **51**, V_{N_pro} is the voltage of the first terminal **551** of the coupling capacitor **55** in the program stage (i.e. $V_{ref} * (1 - f_1) + V_{data} * f_1 - V_t$), and V_{S_pro} is the voltage of the third node **503** in the program stage. If the capacitance value can be ignored (i.e. the C_{oled} is much smaller than the capacitance value of the storage capacitor **56** (C_{st})), the equation (7) can be simplified as:

$$V_N = V_{ref} * (1 - f_1) + V_{data} * f_1 - V_t. \quad (8)$$

It is thus known that the voltage of the first terminal **551** of the coupling capacitor **55** is maintained to be unchanged, i.e., it still stores the threshold voltage V_t and the voltage of the OLED **51** (V_{oled}). However, if the capacitance value C_{oled} cannot be ignored, the stored threshold voltage V_t of the first terminal **551** of the coupling capacitor **55** may be lost due to the charges distributed between it and the third node **503**.

[0040] With reference to both FIG. 5 and FIG. 7, FIG. 7 is another timing diagram of the pixel circuit shown in FIG. 5. The timing diagram of FIG. 7 is similar to that of FIG. 6 except that, in the programming stage, the second voltage is the high potential voltage ELVDD and the driving transistor **50** is not reset. The timing diagram shown in FIG. 7 is preferred to be used in the situation that the capacitor C_{oled} of the OLED **51** cannot be ignored (i.e., C_{oled} is not much smaller than the capacitance value C_{st} of the storage capacitor **56**). In the programming stage, the third node **503** is reset to $V_{data} - V_t$. In the moment of turning on the second transistor **58**, the voltage V_N of the first terminal **551** of the coupling capacitor **55** is transited as:

$$\begin{aligned} V_N &= \left\{ \frac{[V_{ref} * (1 - f_1) + V_{data} * f_1 - V_t] * C_{st} + [V_{data} - V_t] * C_{oled}}{C_{st} + C_{oled}} \right\} / (C_{st} + C_{oled}) \quad (9) \\ &= \left\{ \frac{[V_{ref} * (1 - f_1) + V_{data} * f_1] * C_{st} + (V_{data} * C_{oled})}{C_{st} + (V_{data} * C_{oled})} \right\} / (C_{st} + C_{oled}) - V_t \\ &= \text{Func}(V_{ref}, V_{data}, C_{cp}, C_{st}, C_{oled}) - V_t, \end{aligned}$$

where $\text{Func}(V_{ref}, V_{data}, C_{cp}, C_{st}, C_{oled})$ is a function of V_{ref} , V_{data} , C_{cp} , C_{st} and C_{oled} . From equation (9), it can be known that, in the moment of turning on the second transistor **58**, the threshold voltage stored by the first terminal **551** of the coupling capacitor **55** is not lost. Under the timing diagram shown in FIG. 7, the second node **502** voltage (V_G), the anode **511** voltage (V_S) of the OLED **51**, the voltage (V_N) of the first terminal **551** of the coupling capacitor **55**, the voltage difference (V_{GS}) between the second node **502** and the anode **511**, and the voltage difference (V_{GN}) between the second node **502** of the driving transistor **50** and the first terminal **551** of the coupling capacitor **55** are illustrated in Table 3.

TABLE 3

	Reset stage	Comp. stage	Prog. stage	Emitting stage
Second node of the driving transistor (V_G)	V_{ref}	V_{ref}	V_{data}	$\text{Func}(V_{ref}, V_{data}, C_{cp}, C_{st}, C_{oled}) + V_t + V_{oled}$
Anode of the OLED (V_S)	V_{rst}	$V_{ref} - V_t$	$V_{data} - V_t$	V_{oled}
First terminal of the coupled capacitor (V_N)	V_{rst}	$V_{ref} - V_t$	$V_{ref} * (1 - f_1) + V_{data} * f_1 - V_t$	V_{oled}
Voltage difference between the second node and the anode (V_{GS})	$V_{ref} - V_{rst}$	V_t	V_t	$\text{Func}(V_{ref}, V_{data}, C_{cp}, C_{st}, C_{oled}) + V_t$
Voltage difference between the second node and the first terminal of the coupling capacitor (V_{GN})	$V_{ref} - V_{rst}$	V_t	$(V_{data} - V_{ref}) * (1 - f_1) + V_t$	$\text{Func}(V_{ref}, V_{data}, C_{cp}, C_{st}, C_{oled}) + V_t$

[0041] The invention also provides a method for driving a pixel circuit. Also with reference to the pixel circuit shown in FIG. 5, the method includes the steps of: (A) in the reset stage, using the first control signal SN to turn on the first transistor **57**, and inputting the reference voltage V_{ref} to the driving transistor **50** for resetting the second node **502**, the third node **503** and the first terminal **581** of the second transistor **58**; (B) in the compensating stage, storing a threshold voltage V_t of the driving transistor **50** to the third node **503** and the storage capacitor **56**, and the driving transistor **50** being transited from on state to off state; (C) in a programming stage, using the second control signal to turn off the second transistor **58**, inputting the data voltage V_{data} to the driving transistor **50**, and coupling a voltage of the coupling capacitor **55** to the first terminal **551** of the coupling capacitor **55**; and (D) in the light emitting stage, coupling the threshold voltage V_t and a voltage V_{oled} of the OLED **51** to the second node **502**.

[0042] With reference to FIG. 8, there is shown a schematic diagram of the display panel using the aforementioned pixel circuit in accordance with a preferred embodiment of the invention, which includes: a plurality of pixel circuits **80**, a data driver **81**, a scan driver **82**, a voltage generator **83**, and a timing controller **84**. The pixel circuits **80** are arranged as a pixel circuit matrix according to a plurality of columns and rows. The data driver **81** has a plurality of data driving lines ($\text{Data}_1, \text{Data}_2, \text{Data}_3, \dots$) connected to the pixel circuits **80** on the columns of the pixel circuit matrix for providing at least an input voltage. The scan driver **82** has a plurality of scan driving lines ($\text{SN}_1, \text{SN}_2, \text{SN}_3, \dots$) vertically intersected with the data driving lines for being connected to the pixel circuits **80** on the rows of the pixel circuit matrix for providing at least a switching voltage. The voltage generator **83** has a plurality of voltage supply lines respectively arranged between the scan driving lines for being connected to the pixel circuits **80** so as to supply at least a voltage source. The timing controller **84** is

connected to the data driver **81**, the scan driver **82**, and the voltage generator **83**, respectively, for controlling the data driver **81**, the scan driver **82**, and the voltage generator **83**. In one embodiment, the display panel configures three rows of the pixel circuit matrix as a display unit. The reset stage, compensation stage, programming stage and light emitting stage of each display unit are executed sequentially, and the display units are performed sequentially.

[0043] With reference to FIG. 9, there is shown a timing diagram for the display panel using three rows of the pixel circuit matrix, shown in FIG. 8, as a display unit in accordance with the invention. The embodiment shown in FIG. 9 is similar to that in FIG. 6 except that, in the programming stage, the scan driver **82** sequentially turns on the first transistors **57** of the pixel circuits **80** of each row for the display unit via the scan driving lines (SN₁, SN₂, SN₃) and, at the same time, the data driving line Data(m) inputs a set of data voltage Vdata(1,2,3). The set of data voltage Vdata(1,2,3) sequentially inputs a data voltage to the first transistors **57** of the pixel circuits **80** of each column, corresponding to the scan driving lines (SN₁, SN₂, SN₃) sequentially turning on the first transistors **57** of the pixel circuits **80** of each row. The remaining is operated in the same manner. When the display unit completes the reset stage, the compensation stage, the programming stage and the light emitting stage, the next display unit is then performed sequentially.

[0044] With reference to both FIG. 8 and FIG. 10, FIG. 10 is another timing diagram for the display panel using three rows of the pixel circuit matrix, shown in FIG. 8, as a display unit in accordance with the invention. As shown in FIG. 10, this embodiment is similar to that in FIG. 7 except that, in programming stage, the scan driver **82** sequentially turns on the first transistors **57** of the pixel circuits **80** of each of three rows for the pixel circuit matrix via the scan driving lines (SN₁, SN₂, SN₃) and, at the same time, the data driving line Data(m) inputs a set of data voltage Vdata(1,2,3). The set of data voltage Vdata(1,2,3) sequentially inputs a data voltage to the first transistors **57** of the pixel circuits **80** of each row corresponding to the scan driving lines (SN₁, SN₂, SN₃) sequentially turning on the first transistors **57** of the pixel circuits **80** of each row. The remaining is operated in the same manner. This embodiment is different from FIG. 9 only in that, in the programming stage, the second voltage Vdd_{1,2,3} provided by the voltage supply lines of the voltage generator **83** is maintained at a high voltage ELVDD and the driving transistor **50** is not reset, while the remaining is the same.

[0045] With reference to FIG. 11, there is shown a schematic diagram of the pixel circuit in accordance with another preferred embodiment of the invention. This embodiment is different from FIG. 5 only in that a third transistor **119** is added. The third transistor **119** has a first terminal **1191** connected to a fourth voltage source (Vrst), a second terminal **1192** connected to a third control signal source Rst that provides a third control signal, and a third terminal **1193** connected to the second node **502**, wherein the fourth voltage source is used to provide the reference voltage Vref. Please also refer to FIG. 12, which is a timing diagram of the pixel circuit shown in FIG. 11. It is proposed to reduce the turn-on frequency of the first control signal in FIG. 6, and to turn on the third transistor **119** by the third control signal so as to input the reference voltage Vref, while the remaining is the same.

[0046] With reference to both FIG. 11 and FIG. 13, FIG. 13 is another timing diagram of the pixel circuit shown in FIG. 11. As shown in FIG. 13, this embodiment is different from FIG. 7 only in that the turn-on frequency of the first control signal Vsn in FIG. 7 is decreased, and the third transistor **119** is turned on by the third control signal so as to input the reference voltage Vref, while the remaining is the same. Further, this embodiment is different from FIG. 12 only in that, in the programming stage, the second voltage Vdd provided by the voltage supply lines of the voltage generator **83** is maintained at a high voltage ELVDD and the driving transistor **50** is not reset, while the remaining is the same.

[0047] With reference to FIG. 14, there is shown a schematic diagram of a pixel circuit in accordance with another preferred embodiment of the invention. This pixel circuit is implemented for large-scale panel and mesh routing, and efficiently alleviating the problems of signal delay and IR drop. As shown, the pixel circuit includes: a driving transistor **60**, an OLED **61**, and a voltage control unit **62**. The OLED **61** includes an anode **611** and a cathode **612**, wherein the cathode **612** is connected to a first voltage source VSS that provides a first voltage Vss. The driving transistor **60** is preferred to be an N-type transistor including a first node **601**, a second node **602** and a third node **603**, wherein the first node **601** is a drain electrically connected to a second voltage source VDD that provides a second voltage Vdd, the second node **602** is a gate, and the third node **603** is a source electrically connected to the anode **611**.

[0048] The aforementioned voltage control unit **62** includes a first transistor **67**, a second transistor **68**, a reset transistor **69**, a storage capacitor **66** and a coupling capacitor **65**. The first transistor **67** has a first terminal **671** connected to a data driving line (Data), a second terminal **672** connected to a first control signal source SN that provides a first control signal, and a third terminal **673** connected to the second node **602**. The second transistor **68** has a first terminal **681**, a second terminal **682** connected to a second control signal source SW that provides a second control signal, and a third terminal **683** connected to the anode **611** and the third node **603**. The storage capacitor **66** has a first terminal **661** connected to a third voltage source REF that can be replaced by any kind of DC voltage source such as VDD, VSS for compact layout considering, and a second terminal **662** connected to the first terminal **681** of the second transistor **68**. The coupling capacitor **65** has a first terminal **651** connected to the first terminal **681** of the second transistor **68**, and a second terminal **652** connected to the second node **602**. The reset transistor **69** has a first terminal **691** connected to the anode **611** and the third node **603**, a second terminal **692** connected to a reset control signal source RST, and a third terminal **693** connected to a reference voltage source (Vref) or the data driving line (Data). The first, second, and reset transistors **67**, **68**, **69** are preferred to be N-type transistors. Accordingly, when the pixel circuit is in a reset stage, the first control signal source SN provides a first control signal to turn the first transistor **67** on, the second control signal source SW provides a second control signal to turn the second transistor **68** on, the reset control signal source RST provides a reset control signal to turn the reset transistor **69** on, the data driving line (Data) inputs a first reference voltage VR1 to the driving transistor **60** to reset the second node **602**, and the reference voltage source provides a second reference voltage Vref or the data driving line (Data) provides the first reference voltage VR1 to the reset transistor **69** to reset the third node **603** and the first

terminal **651** of the coupling capacitor **65**. When the pixel circuit is in a compensating stage, the data driving line (Data) inputs a third reference voltage VR2 to the second node **602**, the third node **603** and the storage capacitor **66** store a voltage difference between the third reference voltage VR2 and the threshold voltage V_t of the driving transistor **60**, and the driving transistor **60** is transited from on state to off state. When the pixel circuit is in a programming stage, the data driving line (Data) inputs a data voltage to the driving transistor **60**, and a voltage difference between the third reference voltage VR2 and the data voltage is coupled to the first terminal **651** of the coupling capacitor **65**. When the pixel circuit is in a light emitting stage, the threshold voltage V_t and a voltage of the OLED **61** are coupled to the second node **602**. The aforementioned reset stage, compensation stage, programming stage and light emitting stage are executed repeatedly in sequence.

[0049] With reference to FIG. 15, which is a timing diagram of the pixel circuit shown in FIG. 14, the circuit operation can be divided into the reset stage (Reset), compensation stage (Comp.), programming stage (Prog.) and light emitting stage (Emitting). The on/off states of the driving transistor **60**, the first transistor **67**, the second transistor **68**, the reset transistor **69** and the OLED **61** corresponding those stages are illustrated in Table 4, and a voltage (V_G) of the second node **602** of the driving transistor **60**, a voltage (V_S) of the anode **611** of the OLED **61**, a voltage (V_N) of the first terminal **651** of the coupling capacitor **65**, a voltage difference (V_{GS}) between the second node **602** and the anode **611**, and a voltage difference (V_{GN}) between the second node **602** and the first terminal **651** of the coupling capacitor **65** are illustrated in Table 5.

TABLE 4

Cycle	Driving transistor	First transistor	Second transistor	Reset transistor	OLED
Reset stage	OFF	ON	ON	ON	OFF
Comp. stage	OFF	ON	ON	OFF	OFF
Prog. stage	OFF	ON	OFF	OFF	OFF
Emitting stage	ON	OFF	ON	OFF	ON

TABLE 5

	Reset stage	Comp. stage	Prog. stage	Emitting stage
Second node of the driving transistor (V_G)	VR1	VR2	Vdata	(Vdata - VR2) * (1 - f1) + V_t + Voled
Anode of the OLED (V_S)	Vref	VR2 - V_t	Vdata - V_t	Voled
First terminal of the coupling capacitor (V_N)	Vref	VR2 - V_t	VR2 * (1 - f1) + Vdata * f1 - V_t	Voled
Voltage difference between the second node	VR1 - Vref	V_t	V_t	(Vdata - VR2) * (1 - f1) + V_t

TABLE 5-continued

	Reset stage	Comp. stage	Prog. stage	Emitting stage
and the anode (V_{GS})	VR1 - V_t	V_t	(Vdata - VR2) * (1 - f1) + V_t	(Vdata - VR2) * (1 - f1) + V_t
Second node and the first terminal of the coupling capacitor (V_{GN})	Vref			

[0050] As a result, in the reset stage, the first transistor **67**, second transistor **68**, and reset transistor **69** are in on state, and the driving transistor **60** and OLED **61** are in off state. The data driving line (Data) inputs a first reference voltage VR1 to the first terminal **671** of the first transistor **67**, and then to the third terminal **673** of the first transistor **67** so as to reset the second node **602** to be the reference voltage VR1, and the reference voltage source inputs a second reference voltage Vref (or the data driving line (Data) inputs the first reference voltage VR1) to the third terminal **693** of the reset transistor **69**, and then to the first terminal **691** of the reset transistor **69** so as to reset the third node **603** and the first terminal **651** of the coupling capacitor **65** at the same time, satisfying the relation of $VR1 < Vref + V_t$, such that there is not any direct current path to be produced in the reset stage.

[0051] In the compensation stage, the first transistor **67** and the second transistor **68** are in on state, and the driving transistor **60**, reset transistor **69** and OLED **61** are in off state. The data driving line (Data) inputs a third reference voltage VR2 to the first terminal **671** of the first transistor **67**, and then to the third terminal **673** of the first transistor **67** so as to reset the second node **602** to be the third reference voltage VR2, such that the driving transistor **60** is turned gradually from on to off by discharging, and the anode **611** of the OLED **61** is discharged to $VR2 - V_t$, so as to measure the threshold voltage V_t of the driving transistor **60**. Further, the storage capacitor **66** stores the voltage difference between the third reference voltage VR2 and the threshold voltage V_t of the driving transistor **60**.

[0052] As shown in FIG. 15, after the compensation stage, there is a space time (T_{space}), which is a period of time between the compensation stage and the programming stage, and the space time is greater than or equal to 0.

[0053] In the programming stage, the first transistor **67** is in on state, and the driving transistor **60**, second transistor **68**, reset transistor **69**, and the OLED **61** are in off state. The data driving line (Data) inputs a data voltage Vdata to the first terminal **671** of the first transistor **67**, and then to the third terminal **673** of the first transistor **67** so as to allow the second node **602** to be the data voltage Vdata, such that the voltage V_N of the first terminal **651** of the coupling capacitor **65** is coupled, via the coupling capacitor **65**, to:

$$V_N = VR2 - V_t + (Vdata - VR2) * f1 \quad (10)$$

$$= VR2 * (1 - f1) + Vdata * f1 - V_t,$$

and the voltage difference between the second node 602 and the first terminal 651 of the coupling capacitor 65 is:

$$\begin{aligned} V_{GN} &= Vdata - (VR2(1 - f1) + Vdata * f1 - Vt) \\ &= (Vdata - VR2) * (1 - f1) + Vt, \end{aligned} \quad (11)$$

wherein $f1 = Ccp / (Ccp + Cst)$, Ccp is capacitance value of the coupling capacitor 65, and Cst is capacitance value of the storage capacitor 66. The OLED 61 cannot be turned on, the voltage (Vs) of the anode of the OLED 61 is smaller than a turn-on voltage ($Voled$) of the OLED 61, the voltage (Vn) of the first terminal of the coupling capacitor 65 is smaller than the voltage (Vs) of the anode of the OLED 61, and thus the following conditions have to be satisfied:

$$Voled(0) + Vt > Vdata > VR2, \quad (12)$$

wherein $Voled(0)$ is a turn-on voltage of the OLED 61.

[0054] In the light emitting stage, the driving transistor 60, second transistor 68 and OLED 61 are in on state, and the first transistor 67 and reset transistor 69 are in off state. The anode 611 and the first terminal 651 of the coupling capacitor 65 are both the voltage $Voled$ of the OLED 61, and the coupling capacitor 65 couples the voltage $Voled$ of the OLED 61 to the second node 602:

$$\begin{aligned} V_G &= Vdata + (Voled - (VR2 * (1 - f1) + Vdata * f1 - Vt)) \\ &= (Vdata - VR2) * (1 - f1) + Vt + Voled, \end{aligned} \quad (13)$$

while the voltage difference between the second node 602 and the anode 611 is:

$$V_{GS} = (Vdata - VR2) * (1 - f1) + Vt, \quad (14)$$

so that the output current I_{oled} of the driving transistor 60 can be expressed as:

$$\begin{aligned} I_{oled} &= Kp * (V_{GS} - Vt)^2 \\ &= Kp * [(Vdata - Vref) * (1 - f1)]^2, \end{aligned} \quad (15)$$

where $Kp = 1/2(\mu * COX)(W/L)$, μ is carrier mobility of the driving transistor 60, COX is a per area capacitance of the driving transistor 60, and (W/L) is a width to length ratio of the driving transistor 60. From equation (15), it can be known that the output current of the driving transistor 60 is not related with the threshold voltage Vt and the voltage of the OLED 61 ($Voled$), thereby not only compensating the threshold voltage of the transistor and the voltage of the AMOLED, but also satisfying the requirements of high precision and high aspect ratio.

[0055] The invention also provides another method for driving a pixel circuit. Also with reference to the pixel circuit shown in FIG. 14, the method includes the following steps: (A) in a reset stage, the data driving line (Data) inputs a first reference voltage $VR1$ to the driving transistor 60 to reset the second node 602, and the reference voltage source provides a second reference voltage $Vref$ or the data driving line (Data) provides the first reference voltage $VR1$ to the reset transistor 69 to reset the third node 603 and the first terminal 651 of the

coupling capacitor 65; (B) in a compensating stage, the data driving line (Data) inputs a third reference voltage $VR2$ to the driving transistor 60 to reset the second node 602, the third node 603 and the storage capacitor 66 store a voltage difference between the third reference voltage $VR2$ and the threshold voltage Vt of the driving transistor 60, and the driving transistor 60 is transited from on state to off state; (C) in a programming stage, the data driving line (Data) inputs a data voltage $Vdata$ to the driving transistor 60, and a voltage difference between the third reference voltage $VR2$ and the data voltage is coupled to the first terminal 651 of the coupling capacitor 65; and (D) in a light emitting stage, the threshold voltage Vt and a voltage of the OLED 61 are coupled to the second node 602.

[0056] With reference to FIG. 16, there is shown a schematic diagram of the display panel using the aforementioned pixel circuit in accordance with another preferred embodiment of the invention, which includes: a plurality of pixel circuits 90, a data driver 91, two scan drivers 92, 93, and a timing controller 94. The pixel circuits 90 are arranged as a pixel circuit matrix according a plurality of columns and rows. The data driver 91 has a plurality of data driving lines (Data_1, Data_2, Data_3, ...) connected to the pixel circuits 90 on the columns of the pixel circuit matrix for providing at least an input voltage. The scan driver 92 has a plurality of scan driving lines (SN_1, SW_1, SN_2, SW_2, SN_3, SW_3, ...) vertically intersected with the data driving lines for being connected to the pixel circuits 90 on the rows of the pixel circuit matrix for providing at least a switching voltage. The scan driver 93 has a plurality of scan driving lines (RST_1, RST_2, RST_3, ...) vertically intersected with the data driving lines for being connected to the pixel circuits 90 on the rows of the pixel circuit matrix for providing at least a switching voltage. The timing controller 94 is connected to the data driver 91 and the two scan drivers 92, 93, respectively, for controlling the data driver 91 and the two scan drivers 92, 93. In one embodiment, the two scan driver 92, 93 can be integrated into one scan driver to have a plurality of scan driving lines (SN_1, SW_1, SN_2, SW_2, SN_3, SW_3, RST_1, RST_2, RST_3, ...) for providing at least a switching voltage. With reference to FIG. 17, there is shown a timing diagram for the display panel, as shown in FIG. 16, using one row of the pixel circuit matrix as a display unit in accordance with the invention. The reset stage, compensation stage, programming stage and light emitting stage of each display unit are executed sequentially, and the display units are performed sequentially.

[0057] With reference to FIG. 18, there is shown a timing diagram for the display panel, as shown in FIG. 16, using three rows of the pixel circuit matrix as a display unit in accordance with the invention. The embodiment shown in FIG. 18 is similar to that in FIG. 15 except that, in the programming stage, the scan driver 92 sequentially turns on the first transistors 97 of the pixel circuits 90 of each row for the display unit via the scan driving lines (SN_1, SN_2, SN_3) and, at the same time, the data driving line Data(m) inputs a set of data voltage $Vdata(1,2,3)$. The set of data voltage $Vdata(1,2,3)$ sequentially inputs a data voltage to the first transistors 67 of the pixel circuits 90 of each column, corresponding to the scan driving lines (SN_1, SN_2, SN_3) sequentially turning on the first transistors 67 of the pixel circuits 90 of each row. The remaining is operated in the same manner. When the display unit completes the reset stage, the compen-

sation stage, the programming stage and the light emitting stage, the next display unit is then performed sequentially.

[0058] With reference to FIG. 19, there is shown a timing diagram for the display panel, as shown in FIG. 16, using n rows of the pixel circuit matrix as a display unit. As shown in FIG. 19, this embodiment is similar to that shown in FIG. 18 except that, the number of rows of the pixel circuit matrix used by the display panel as a display unit is changed from 3 to n . The remaining is operated in the same manner.

[0059] Although the present invention has been explained in relation to its preferred embodiment, it is to be understood that many other possible modifications and variations can be made without departing from the spirit and scope of the invention as hereinafter claimed.

What is claimed is:

1. A pixel circuit, comprising:

an OLED including an anode and a cathode connected to a first voltage source;

a driving transistor for driving the OLED, the driving transistor including a first node connected to a second voltage source, a second node, and a third node connected to the anode;

a first transistor including a first terminal connected to a data driving line, a second terminal connected to a first control signal source, and a third terminal connected to the second node;

a second transistor including a first terminal, a second terminal connected to a second control signal source, and a third terminal connected to the anode and the third node;

a storage capacitor including a first terminal connected to a third voltage source and a second terminal connected to the first terminal of the second transistor;

a reset transistor including a first terminal connected to the anode and the third node, a second terminal connected to a reset control signal source, and a third terminal connected to a reference voltage source or the data driving line; and

a coupling capacitor including a first terminal connected to the first terminal of the second transistor and a second terminal connected to the second node.

2. The pixel circuit as claimed in claim 1, wherein the driving transistor, the first transistor, the second transistor and the reset transistor are N-type transistors.

3. The pixel circuit as claimed in claim 1, wherein, in a reset stage, the first control signal source provides a first control signal to turn the first transistor on, the second control signal source provides a second control signal to turn the second transistor on, the reset control signal source provides a reset control signal to turn the reset transistor on, the data driving line inputs a first reference voltage to the driving transistor to reset the second node, and the reference voltage source provides a second reference voltage or the data driving line provides the first reference voltage to the reset transistor to reset the third node and the first terminal of the coupling capacitor; in a compensating stage, the data driving line inputs a third reference voltage to the second node, the third node and the storage capacitor store a difference between the third reference voltage and the threshold voltage of the driving transistor, and the driving transistor is transited from on state to off state; in a programming stage, the data driving line inputs a data voltage to the driving transistor, and a difference between the third reference voltage and the data voltage is coupled to the first terminal of the coupling capacitor; in a

light emitting stage, the threshold voltage and a voltage of the OLED are coupled to the second node.

4. A method for driving a pixel circuit, the pixel circuit comprising an OLED including an anode and a cathode connected to a first voltage source; a driving transistor for driving the OLED, the driving transistor including a first node connected to a second voltage source, a second node and a third node connected to the anode; a first transistor including a first terminal connected to a data driving line, a second terminal connected to a first control signal source and a third terminal connected to the second node; a second transistor including a first terminal, a second terminal connected to a second control signal source and a third terminal connected to the anode and the third node; a storage capacitor including a first terminal connected to a third voltage source and a second terminal connected to the first terminal of the second transistor; a coupling capacitor including a first terminal connected to the first terminal of the second transistor and a second terminal connected to the second node; and a reset transistor including a first terminal connected to the anode and the third node, a second terminal connected to a reset control signal source and a third terminal connected to a reference voltage source or the data driving line. The method comprises the steps of:

(A) in a reset stage, the data driving line inputting a first reference voltage to the driving transistor to reset the second node, and the reference voltage source providing a second reference voltage or the data driving line providing the first reference voltage to the reset transistor to reset the third node and the first terminal of the coupling capacitor;

(B) in a compensating stage, the data driving line inputting a third reference voltage to the second node, the third node and the storage capacitor storing a difference between the third reference voltage and the threshold voltage of the driving transistor, and the driving transistor being transited from on state to off state;

(C) in a programming stage, the data driving line inputting a data voltage to the driving transistor, and a difference between the third reference voltage and the data voltage being coupled to the first terminal of the coupling capacitor; and

(D) in a light emitting stage, the threshold voltage and a voltage of the OLED being coupled to the second node.

5. The method as claimed in claim 4, wherein, in step (A), the first reference voltage is lower than a sum of the second reference voltage and the threshold voltage.

6. The method as claimed in claim 4, wherein, in step (C), the data voltage is lower than a sum of the threshold voltage and an initial voltage of the OLED.

7. The method as claimed in claim 4, wherein the driving transistor, the first transistor, the second transistor and the reset transistor are N-type transistors.

8. A display panel, comprising:

a plurality of pixel circuits arranged as a pixel circuit matrix according to a plurality of columns and rows;

a data driver having a plurality of data driving lines connected to the pixel circuits on the columns of the pixel circuit matrix for providing at least an input voltage;

a scan driver having a plurality of scan driving lines vertically intersected with the data driving lines for being connected to the pixel circuits on the rows of the pixel circuit matrix for providing at least a switching voltage; and

a timing controller connected to the data driver and the scan driver for controlling the data driver and the scan driver, wherein each of the pixel circuits comprises:

- an OLED including an anode and a cathode connected to a first voltage source;
- a driving transistor for driving the OLED, the driving transistor including a first node connected to a second voltage source, a second node, and a third node connected to the anode;
- a first transistor including a first terminal connected to a data driving line, a second terminal connected to a first control signal source, and a third terminal connected to the second node;
- a second transistor including a first terminal, a second terminal connected to a second control signal source, and a third terminal connected to the anode and the third node;
- a storage capacitor including a first terminal connected to a third voltage source and a second terminal connected to the first terminal of the second transistor;
- a reset transistor including a first terminal connected to the anode and the third node, a second terminal connected to a reset control signal source, and a third terminal connected to a reference voltage source or the data driving line; and
- a coupling capacitor including a first terminal connected to the first terminal of the second transistor and a second terminal connected to the second node.

* * * * *

专利名称(译)	像素电路及其驱动方法和显示装置		
公开(公告)号	US20140292736A1	公开(公告)日	2014-10-02
申请号	US14/260341	申请日	2014-04-24
[标]申请(专利权)人(译)	群创光电股份有限公司		
申请(专利权)人(译)	群创光电		
当前申请(专利权)人(译)	群创光电		
[标]发明人	TSENG MING CHUN HSU YI HUA KUO KUNG CHEN CHEN LIEN HSIANG		
发明人	TSENG, MING CHUN HSU, YI HUA KUO, KUNG-CHEN CHEN, LIEN-HSIANG		
IPC分类号	G09G3/32		
CPC分类号	G09G3/3291 G09G3/3241 G09G2300/0814 G09G2300/0819 G09G2300/0861 G09G2310/0243 G09G2310/0251		
优先权	102111099 2013-03-28 TW		
其他公开文献	US9230483		
外部链接	Espacenet USPTO		

摘要(译)

像素电路包括OLED，驱动晶体管，第一和第二晶体管，存储电容器和耦合电容器。OLED包括连接到第一电压源的阳极和阴极。驱动晶体管包括连接到第二电压源的第一节点，第二节点和连接到阳极的第三节点。第一晶体管包括分别连接到数据驱动线，第一控制信号源和第二节点的第一，第二和第三端子。第二晶体管包括第一端子，连接到第二控制信号源的第二端子，以及连接到阳极和第三节点的第三端子。存储电容器包括分别连接到第三电压源和第二晶体管的第一和第二端子。耦合电容器包括分别连接到第二晶体管和第二节点的第一和第二端子。

