



US 20200111851A1

(19) **United States**

(12) **Patent Application Publication**
PARK et al.

(10) **Pub. No.: US 2020/0111851 A1**

(43) **Pub. Date: Apr. 9, 2020**

(54) **VISIBLE LIGHT SENSOR EMBEDDED
ORGANIC LIGHT EMITTING DIODE
DISPLAY PANELS AND DISPLAY DEVICES
INCLUDING THE SAME**

Publication Classification

(51) **Int. Cl.**
H01L 27/32 (2006.01)
H01L 31/105 (2006.01)
(52) **U.S. Cl.**
CPC *H01L 27/3234* (2013.01); *H01L 27/3211*
(2013.01); *H01L 31/105* (2013.01); *H01L*
27/323 (2013.01)

(71) Applicant: **Samsung Electronics Co., Ltd.**,
Suwon-si (KR)

(72) Inventors: **Kyung Bae PARK**, Hwaseong-si (KR);
Sung Young YUN, Suwon-si (KR);
Gae Hwang LEE, Seongnam-si (KR);
Yong Wan JIN, Seoul (KR); **Chul**
Joon HEO, Busan (KR)

(73) Assignee: **Samsung Electronics Co., Ltd.**,
Suwon-si (KR)

(21) Appl. No.: **16/590,886**

(22) Filed: **Oct. 2, 2019**

(30) **Foreign Application Priority Data**

Oct. 8, 2018 (KR) 10-2018-0120055

(57) **ABSTRACT**
An OLED display panel may include a substrate, an OLED light emitter on the substrate and configured to emit light, and a visible light sensor on the substrate and configured to detect at least a portion of the emitted light based on reflection of the portion of the emitted light from a recognition target. The visible light sensor is in a non-light emitting region adjacent to the OLED light emitter so as to be horizontally aligned with the OLED light emitter in a horizontal direction extending parallel to an upper surface of the substrate, or between the substrate and a non-light emitting region adjacent to the OLED light emitter such that the visible light sensor is vertically aligned with the non-light emitting region in a vertical direction extending perpendicular to the upper surface of the substrate.

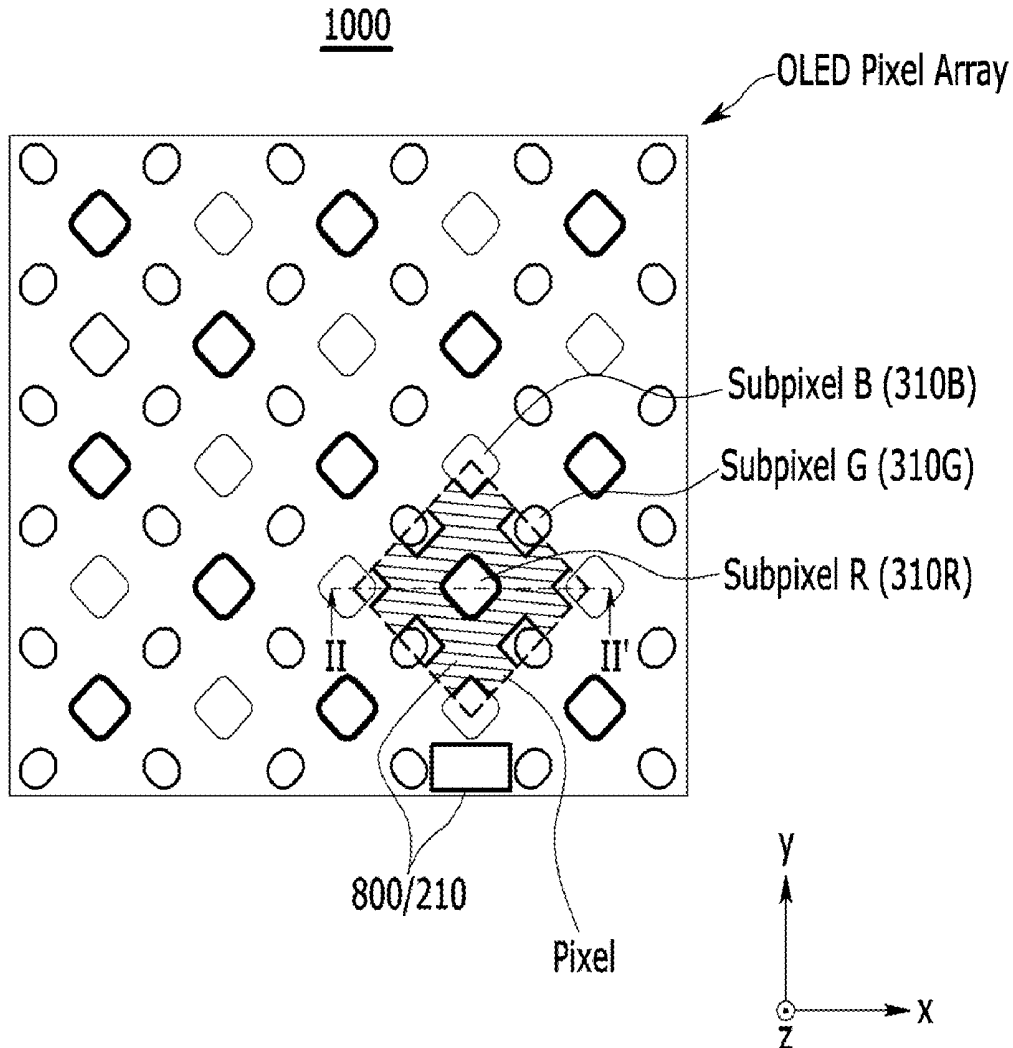


FIG. 1

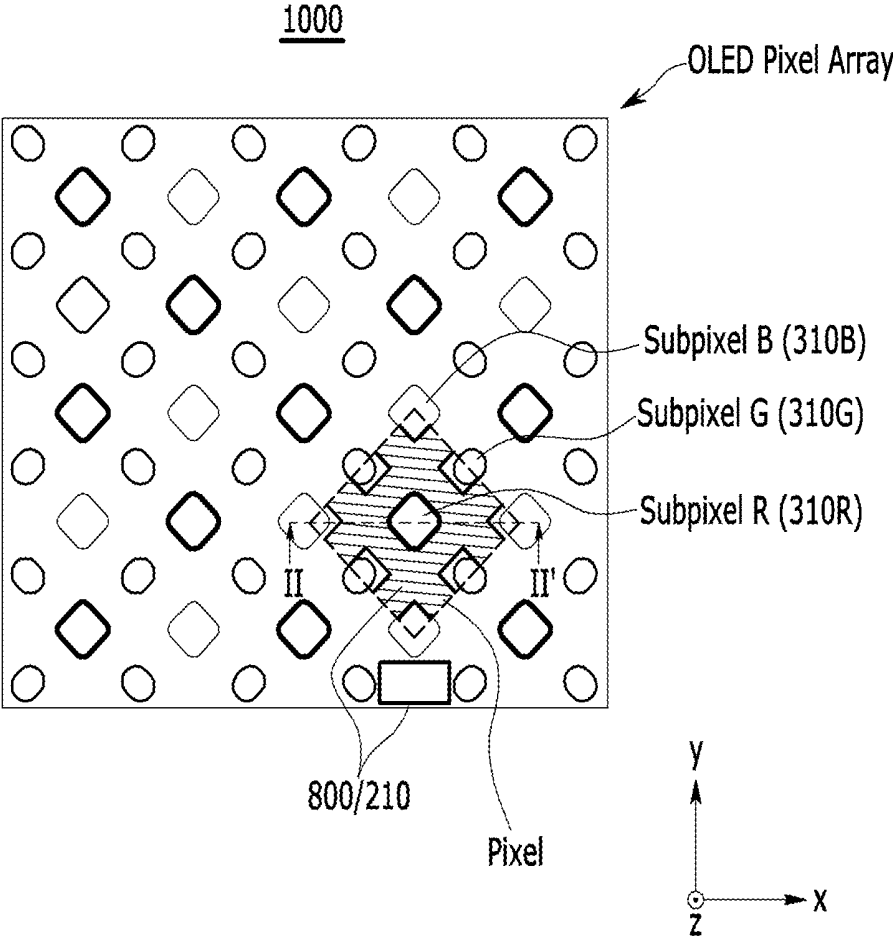


FIG. 3

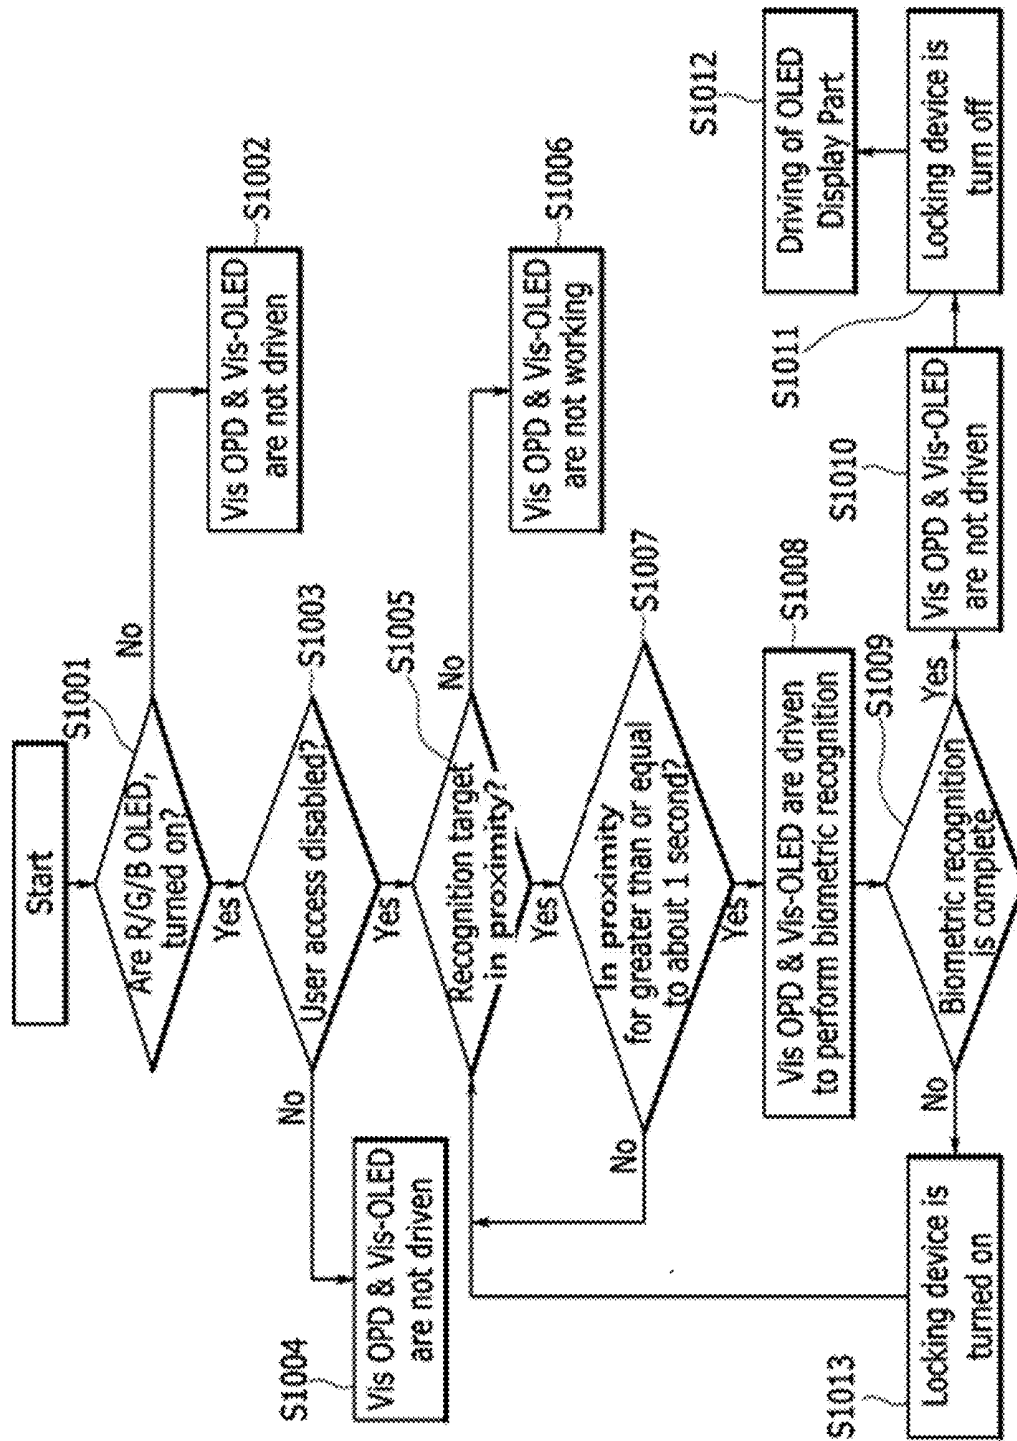


FIG. 4

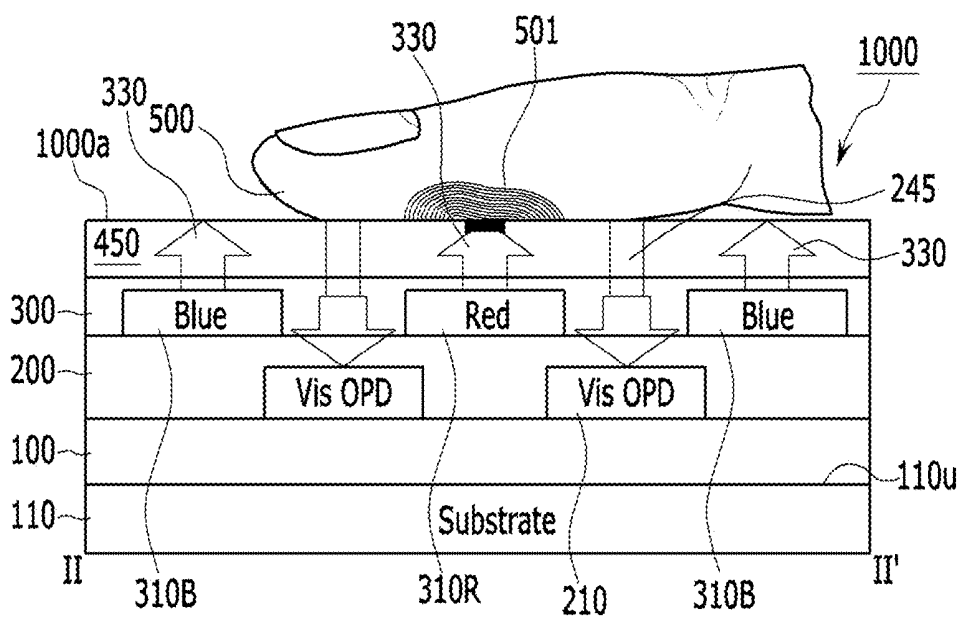


FIG. 5

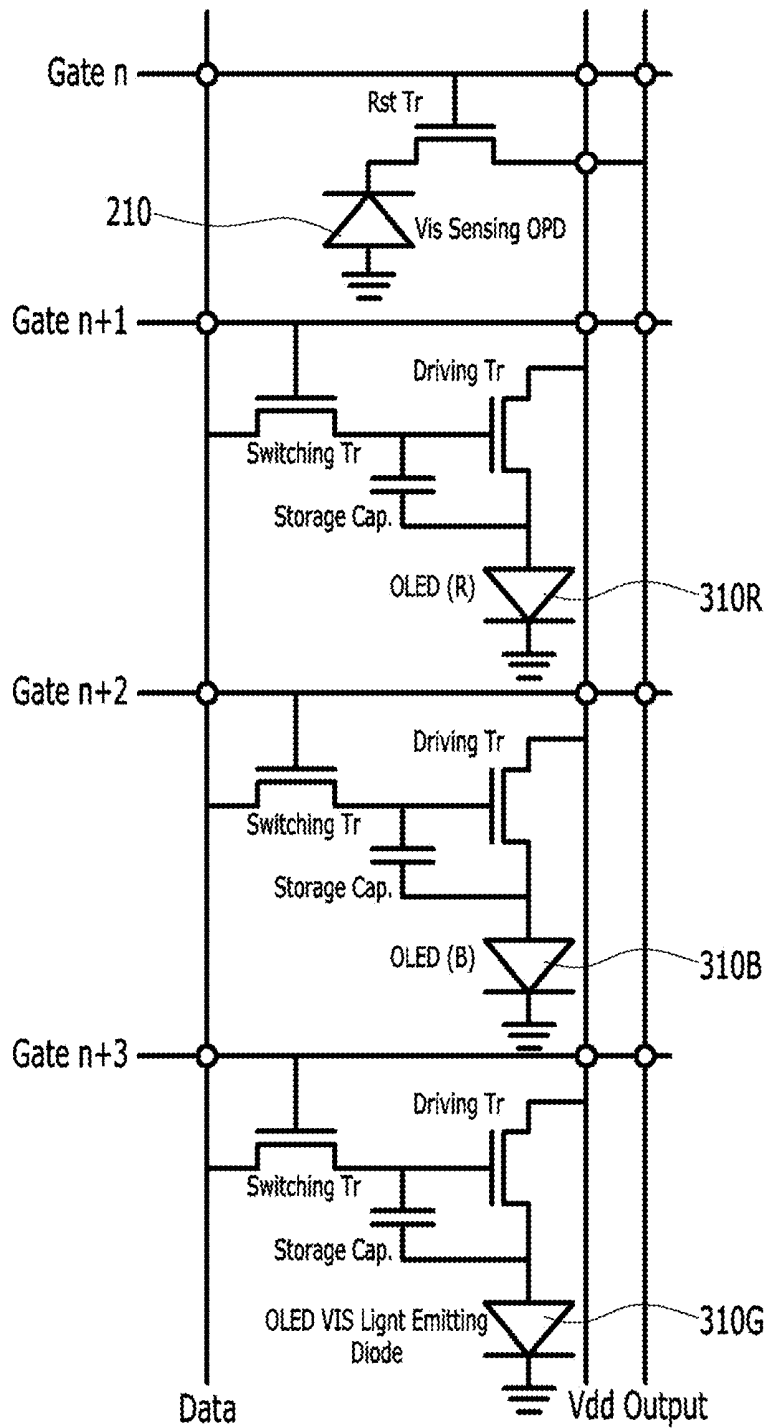


FIG. 6

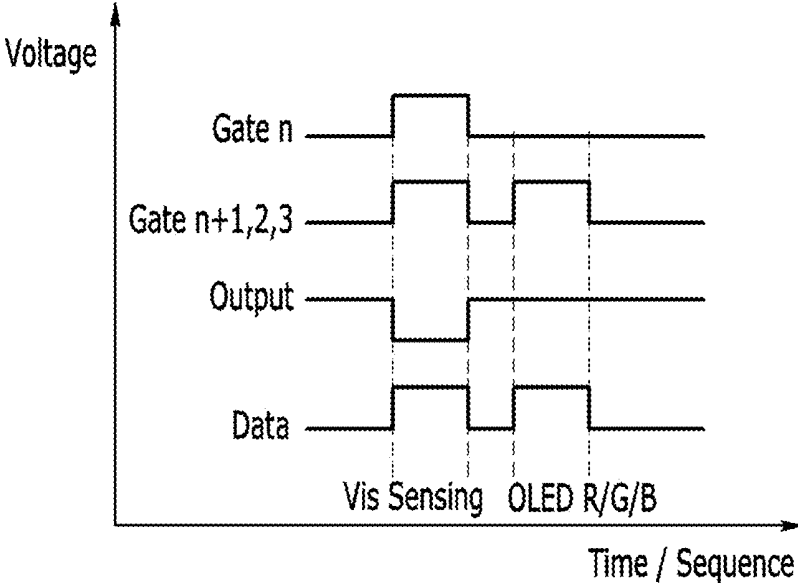


FIG. 8

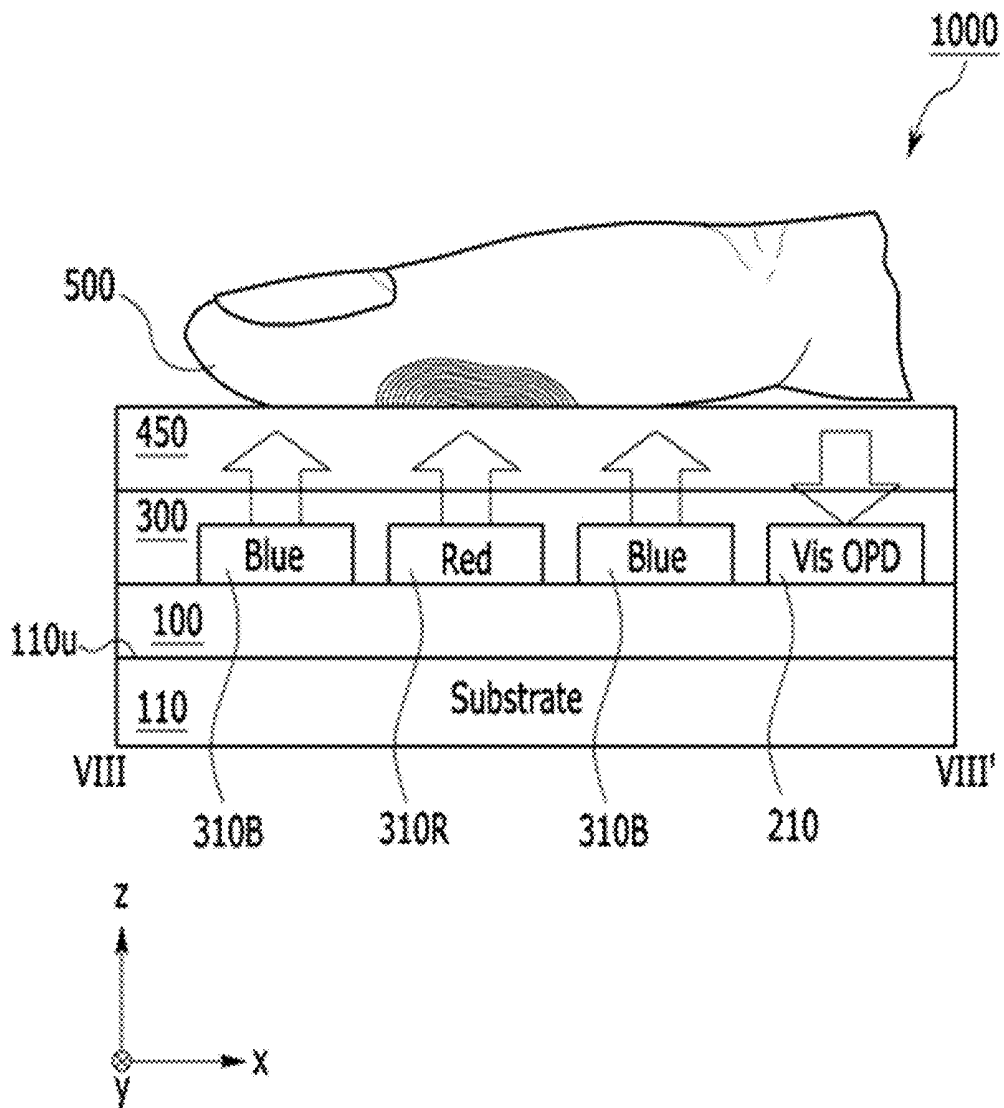


FIG. 9A

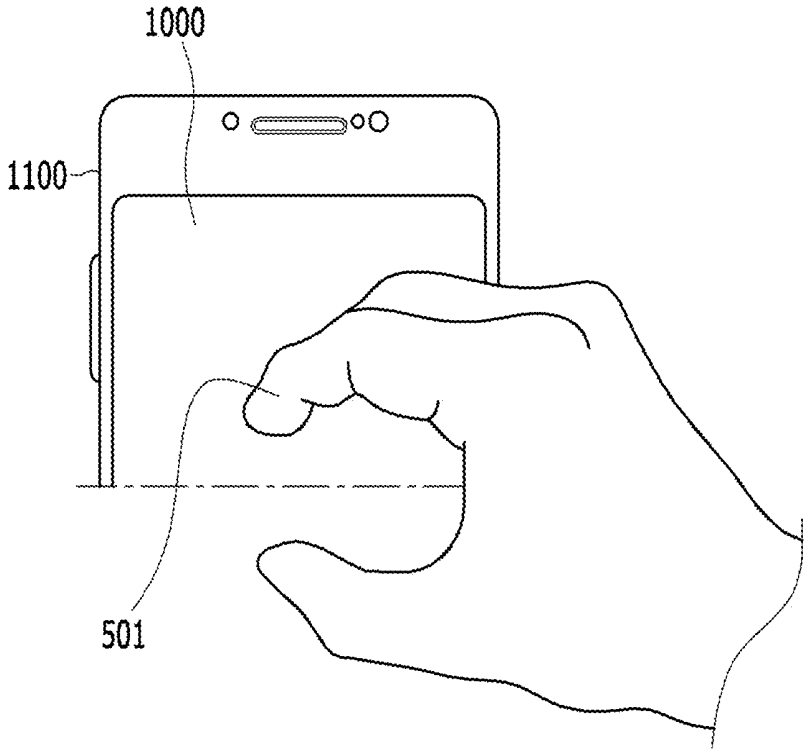


FIG. 9B

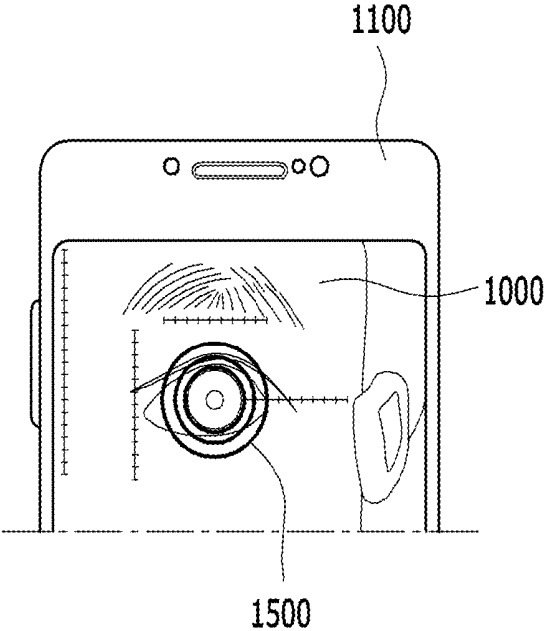


FIG. 9C

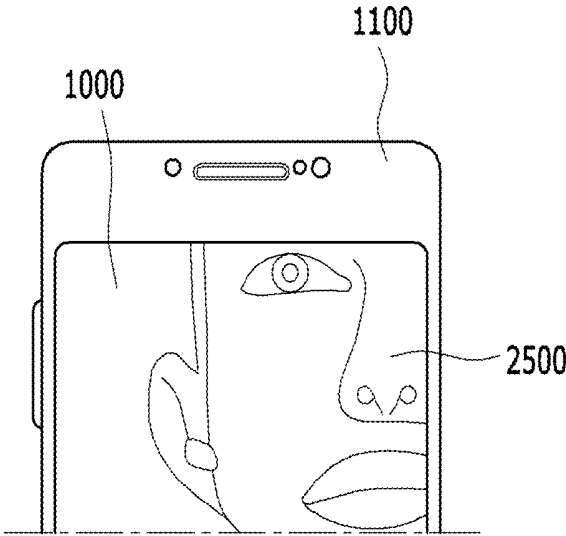


FIG. 10

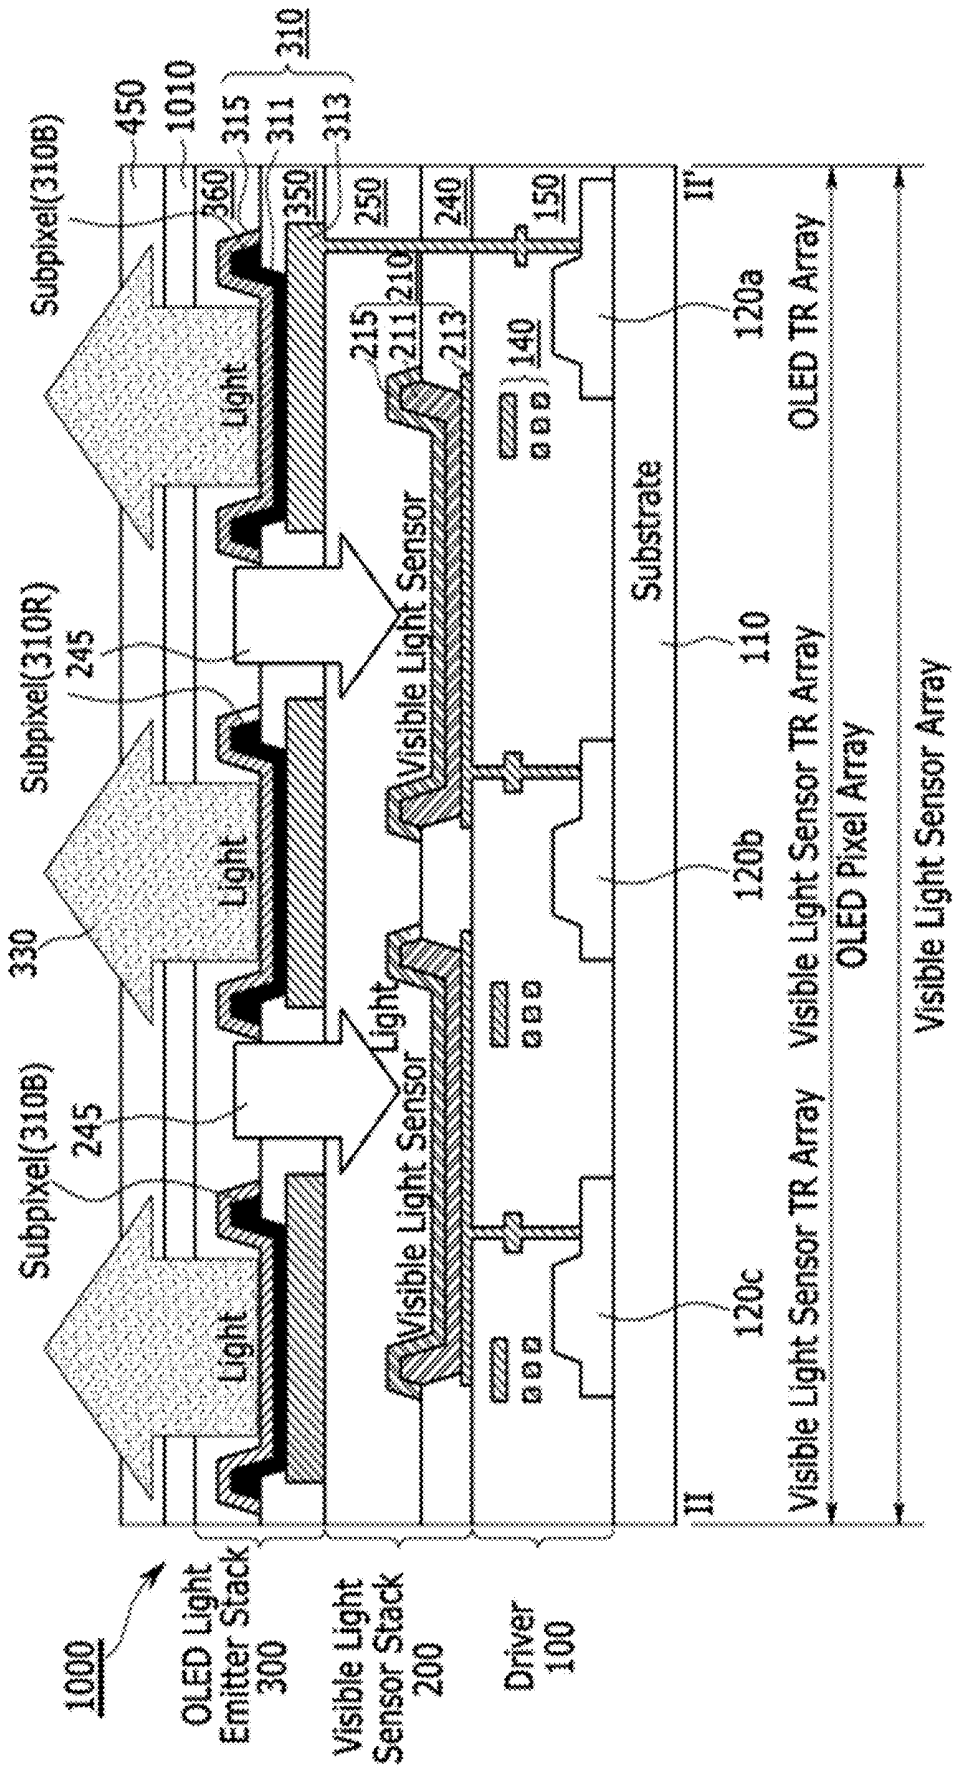


FIG. 11A

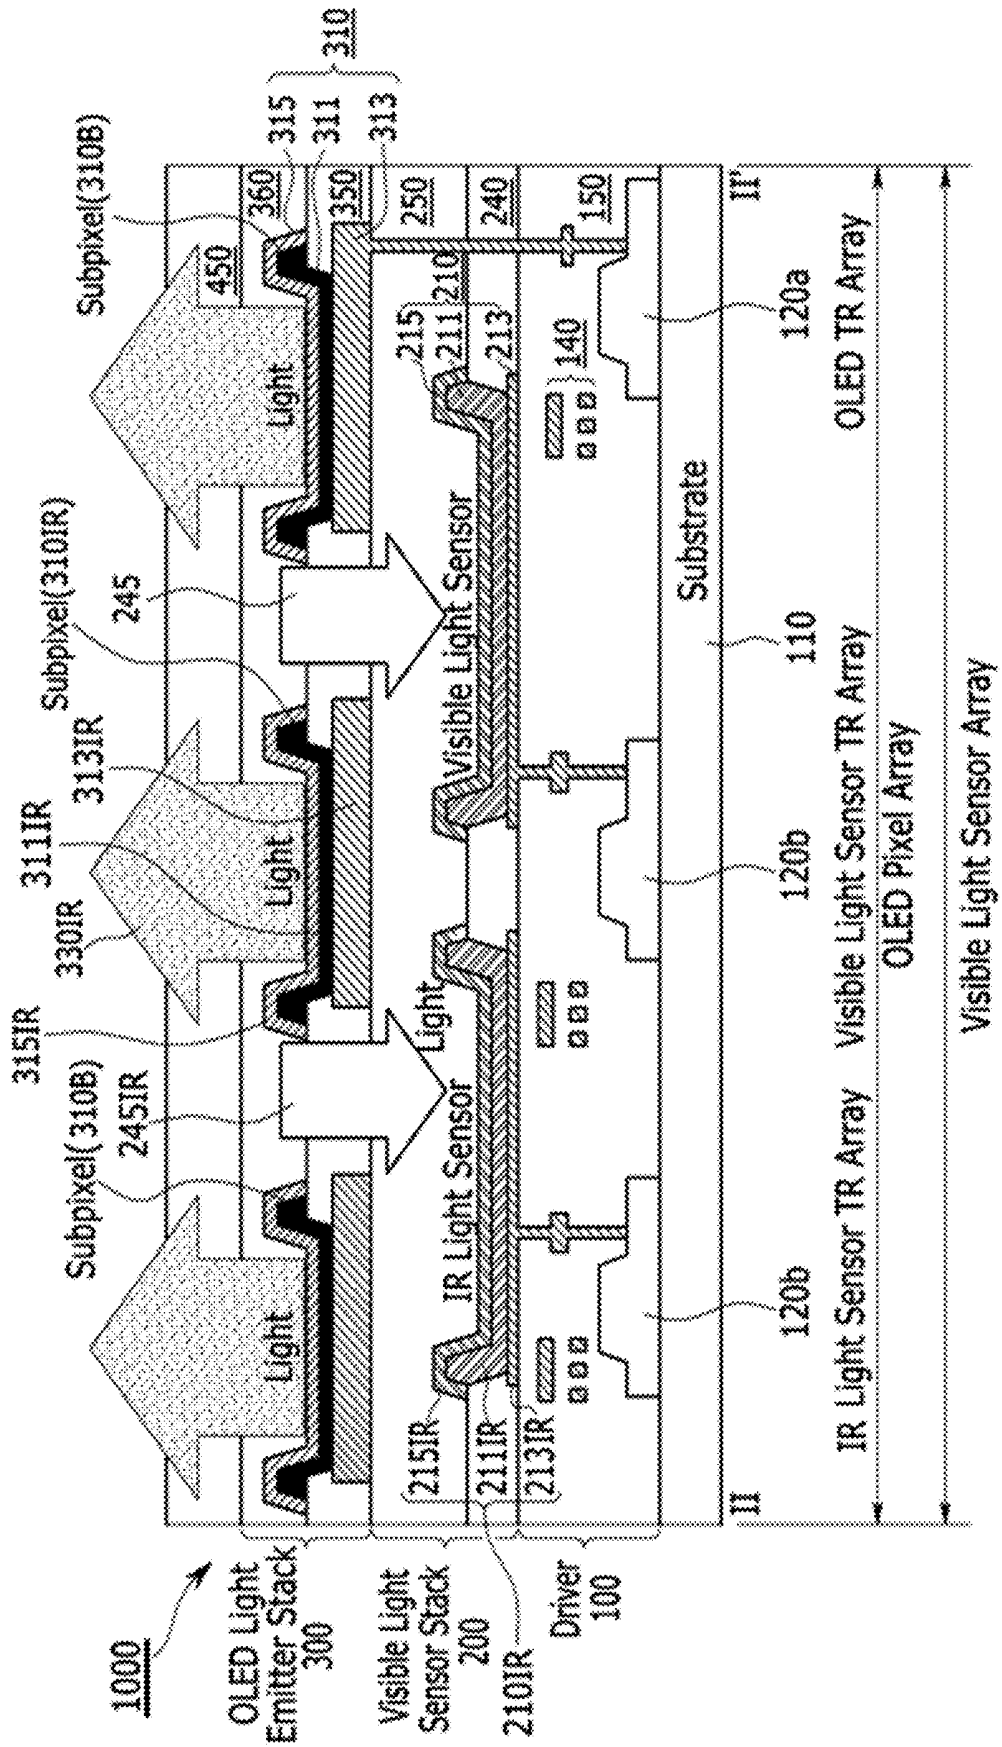


FIG. 11C

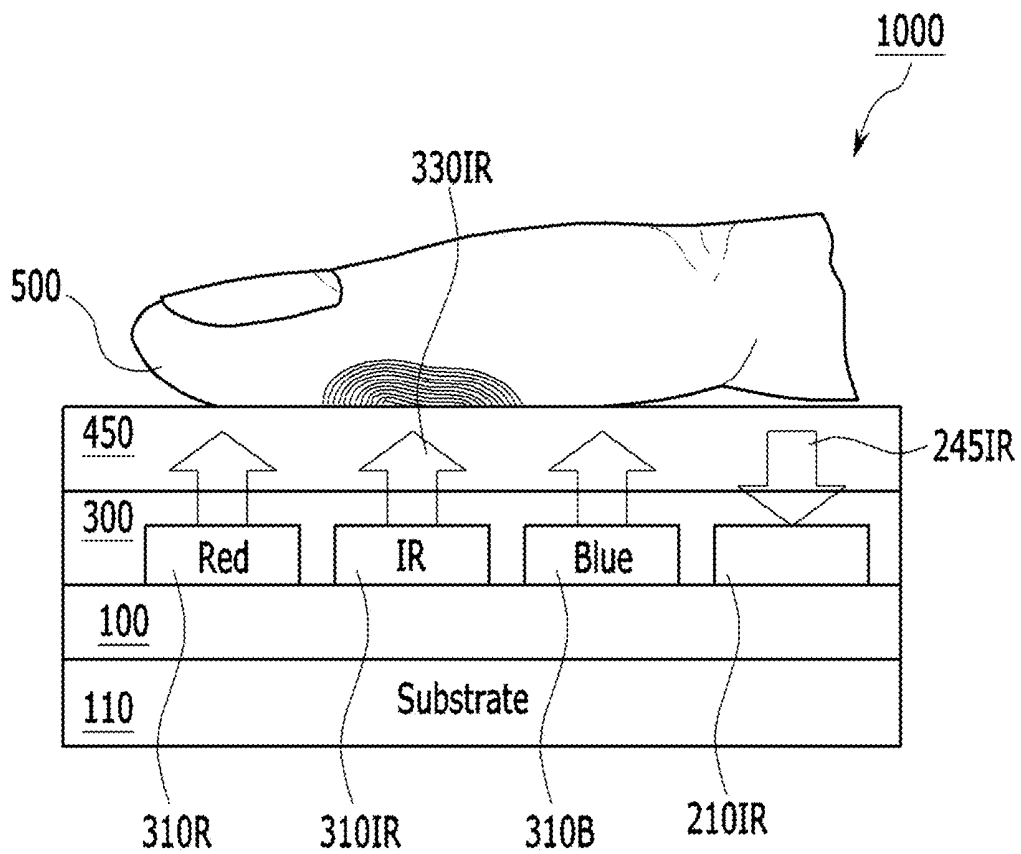


FIG. 12


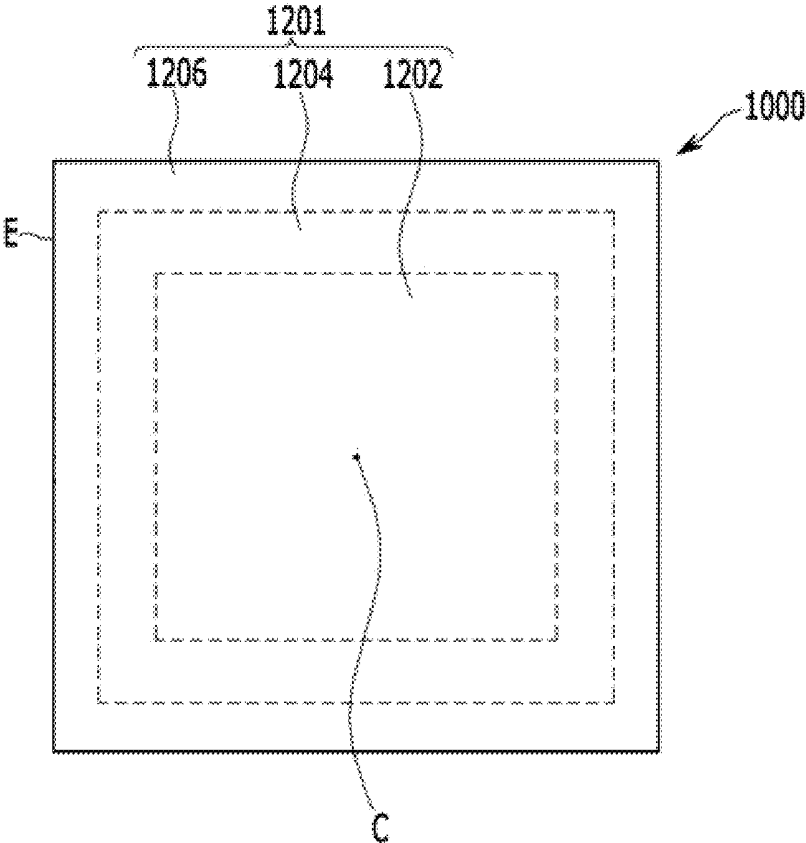


FIG. 13

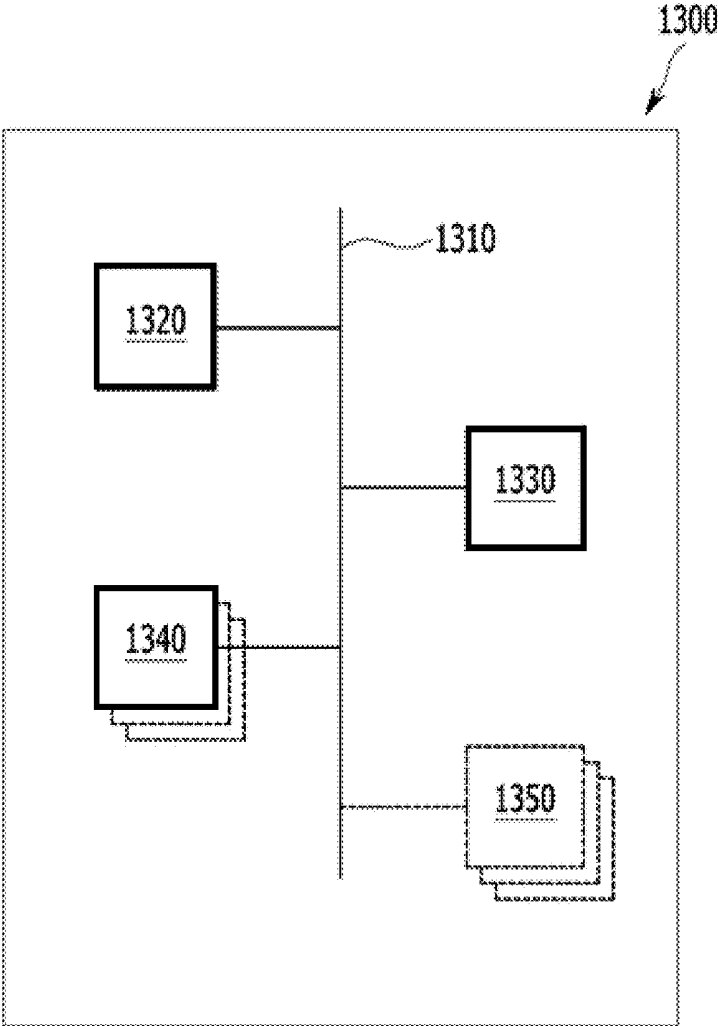

**VISIBLE LIGHT SENSOR EMBEDDED
ORGANIC LIGHT EMITTING DIODE
DISPLAY PANELS AND DISPLAY DEVICES
INCLUDING THE SAME**

CROSS-REFERENCE TO RELATED
APPLICATION

[0001] This application claims priority to and the benefit of Korean Patent Application No. 10-2018-0120055 filed in the Korean Intellectual Property Office on Oct. 8, 2018, the entire contents of which are incorporated herein by reference.

BACKGROUND

1. Field

[0002] This disclosure relates to organic light emitting diode display panels and display devices including the same, and more particularly to visible light sensor embedded organic light emitting diode display panels configured to implement biometric recognition and devices including the same.

2. Description of the Related Art

[0003] Organic light emitting diode (OLED) display panels have merits of excellent luminance, driving voltage, and response rate characteristics and implementing color images, so they are being employed for various display devices.

[0004] Meanwhile, recently, display devices have increasingly implemented biometric recognition technologies via which certain biometric information or gesture information is extracted by one or more devices to authenticate a person in financial, health care, and mobile fields. Particularly, leading smartphone companies are focusing on adapting fingerprint and iris recognition technologies.

[0005] Since Apple Inc. took over AuthenTech, which was a manufacturer of semiconductive sensors for finger scans, Apple Inc. have been consistently mounting fingerprint sensors in iPhones® and iPads®. US 2015-0331508 also discloses technologies of forming a near-infrared sensor for fingerprint recognition on the same plane as an OLED emitter. That is, a separate near-infrared emitter and near-infrared detector are utilized for fingerprint recognition.

[0006] Since the near-infrared emitter and the near-infrared detector are formed on the same plane as the OLED emitter in US 2015-0331508, an aperture ratio of the OLED emitter including such near-infrared emitter and the near-infrared detector may be decreased compared with a conventional OLED emitter having no near-infrared emitter and near-infrared detector. The aperture ratio decrease of the OLED emitter may have a large influence on display characteristics of a mobile display device including the OLED emitter, particularly, a smart phone having a small display area.

SUMMARY

[0007] Some example embodiments provide a visible light sensor embedded OLED display panel (also referred to herein as simply an “OLED display panel”) configured to implement biometric recognition without an effect on an aperture ratio of an OLED emitter or reducing or minimizing the effect, thereby improving performance of the OLED

display panel, for example improving the display characteristics of a display device including the OLED display panel.

[0008] Some example embodiments provide a display device that includes a visible light sensor embedded OLED display panel configured to implement biometric recognition without an effect on an aperture ratio of an OLED display part or reducing or minimizing the effect, thereby improving performance of the OLED display panel, for example improving the display characteristics of a display device including the OLED display panel.

[0009] An OLED display panel according to some example embodiments includes a substrate; an OLED light emitter on the substrate, the OLED light emitter being configured to display images and to emit light for biometric recognition; and a visible light sensor configured to detect light reflected by a recognition target after being emitted by the OLED light emitter, wherein the visible light sensor is positioned in or under a non-light emitting region of the OLED light emitter.

[0010] By employing the OLED light emitter as a light source for the visible light sensor, the OLED display panel may be configured to perform biometric recognition without a separate light source other than the OLED light emitter, so as to prevent an aperture ratio decrease of the OLED light emitter.

[0011] The OLED display panel may maintain the aperture ratio of the OLED light emitter at about 100% or may reduce or minimize the aperture ratio decrease by forming the visible light sensor in a non-light emitting region that does not affect the aperture ratio of the OLED light emitter based on the location of the visible light sensor, or by forming the visible light sensor in a stack structure under the non-light emitting region (e.g., between the non-light emitting region of the OLED light emitter and a substrate) or by forming the visible light sensor in a green pixel region of the OLED light emitter (e.g., replacing one or more green OLED light emitters in a pattern or array of green OLED light emitters of the OLED light emitter of the OLED display panel).

[0012] Accuracy or efficiency of biometric recognition provided by the aforementioned OLED display panels may be improved since the amount or intensity of the light emitted to perform biometric recognition is increased or maximized based on employing the biometric recognition sensor as a visible light sensor.

[0013] The visible light sensor may be formed of (e.g., may at least partially comprise) an organic material and thus may be bent or stretchable. Accordingly, the visible light sensor may contribute to easily realizing a flexible display device and thus improve portability and versatility of a display device that includes the OLED display panel.

[0014] According to some example embodiments, an OLED display panel may include a substrate, an OLED light emitter on the substrate, the OLED light emitter configured to emit light, and a visible light sensor on the substrate, the visible light sensor configured to detect at least a portion of the emitted light based on reflection of the portion of the emitted light from a recognition target. The visible light sensor may be in a non-light emitting region adjacent to the OLED light emitter so as to be horizontally aligned with the OLED light emitter in a horizontal direction extending parallel to an upper surface of the substrate, or between the substrate and a non-light emitting region that is adjacent to the OLED light emitter such that the visible light sensor is

vertically aligned with the non-light emitting region in a vertical direction extending perpendicular to the upper surface of the substrate.

[0015] The visible light sensor may be configured to absorb light in an entirety of a wavelength spectrum of visible light.

[0016] The visible light sensor may include an organic photodiode including an organic material.

[0017] The visible light sensor may include an a-Si-based P-I-N photodiode, a poly-Si-based P-I-N photodiode, a CIGS (Cu—In—Ga—Se) photodiode, or a Cd—Te photodiode.

[0018] A display device may include the OLED display panel.

[0019] A method for performing biometric recognition of a user of a display device, the display device including the OLED display panel, may include driving the OLED light emitter to emit light and further driving the visible light sensor to detect at least a portion of the emitted light based on reflection of the portion of the emitted light from a recognition target that is a portion of the user, in response to a determination that the OLED light emitter is turned on, user access to the display device is disabled, and the recognition target is in a certain proximity to the OLED display panel. The method may include turning off the visible light sensor, granting user access to the display device, and driving the OLED light emitter to display an image, in response to a determination that recognition of the recognition target is completed via comparison of a reference recognition target image with an image of the recognition target generated based on an output signal of the visible light sensor in response to detecting the reflected portion of the emitted light.

[0020] The determination that the recognition target is in the certain proximity to the OLED display panel may be based on receiving a signal from a touch sensor of the OLED display panel.

[0021] The driving the OLED light emitter may include selectively driving a particular limited set of OLED light emitters of an array of OLED light emitters of the OLED display panel. The further driving the visible light sensor may include selectively driving a particular limited set of visible light sensors of an array of visible light sensors of the OLED display panel.

[0022] The determination that the recognition target is in the certain proximity to the OLED display panel may be based on receiving a signal from a touch sensor of the OLED display panel, the signal indicating a limited area, of a total area of a surface of the OLED display panel, that is in contact with the recognition target. The driving the OLED light emitter may include selectively driving the particular limited set of OLED light emitters that are a limited portion of the array of OLED light emitters that vertically overlap with the limited area in response to a determination that the recognition target is in contact with the limited area. The further driving the visible light sensor may include selectively the particular limited set of visible light sensors that are a limited portion of the array of visible light sensors that vertically overlap with the limited area in response to the determination that the recognition target is in contact with the limited area.

[0023] The OLED display panel may further include an infrared light emitter on the substrate, the infrared light emitter configured to emit infrared light, and an infrared

light sensor on the substrate, the infrared light sensor configured to detect at least a portion of the emitted infrared light based on reflection of the portion of the emitted infrared light from a recognition target. The infrared light sensor may be in a separate non-light emitting region adjacent to the OLED light emitter, or between the substrate and a separate non-light emitting region that is adjacent to the OLED light emitter.

[0024] The OLED display panel may further include an array of OLED light emitters on the substrate, the array of OLED light emitters including the OLED light emitter; and an array of visible light sensors on the substrate, the array of visible light sensors including the visible light sensor. The array of OLED light emitters may extend through a first region of the OLED display panel, and the array of visible light sensors extends through a second region of the OLED display panel, the second region being smaller than the first region, such that the array of visible light sensors do not extend through at least a third region of the OLED display panel that includes at least one OLED light emitter of the array of OLED light emitters, and no visible light sensors.

[0025] The first region may extend over a total area of the OLED display panel, the second region may extend over a limited area of the OLED display panel, and the third region may extend between at least one side of the second region and at least one edge of the OLED display panel.

[0026] The third region may completely surround the second region and may be between all sides of the second region and all edges of the OLED display panel.

[0027] The OLED display panel may further include an array of infrared light emitters on the substrate, the array of infrared light emitters configured to emit infrared light; and an array of infrared light sensors on the substrate, the array of infrared light sensors configured to detect at least a portion of the emitted infrared light based on reflection of the portion of the emitted infrared light from a recognition target. The array of infrared light emitters and the array of infrared light sensors may extend through at least a portion of the first region.

[0028] The array of infrared light emitters and the array of infrared light sensors may not extend through the second region.

[0029] The array of infrared light emitters and the array of infrared light sensors may not extend through the third region.

[0030] According to some example embodiments, an OLED display panel may include a substrate, an OLED light emitter stack on the substrate, the OLED light emitter stack including a plurality of sub-pixels, including a red OLED sub-pixel, a green OLED sub-pixel, and a blue OLED sub-pixel, each of the red, green, and blue OLED sub-pixels configured to emit light; and a visible light sensor on the substrate, the visible light sensor configured to detect at least a portion of the emitted light based on reflection of the portion of the emitted light from a recognition target. The visible light sensor may be in a non-light emitting region of the OLED light emitter stack so as to be horizontally aligned with at least one adjacent OLED sub-pixel of the OLED light emitter stack in a horizontal direction extending parallel to an upper surface of the substrate, or between the substrate and a non-light emitting region of the OLED light emitter stack such that the visible light sensor is vertically aligned with the non-light emitting region of the OLED light

emitter stack in a vertical direction extending perpendicular to the upper surface of the substrate.

[0031] The visible light sensor may be configured to absorb light in an entirety of a wavelength spectrum of visible light.

[0032] The visible light sensor may include an organic photodiode including an organic material.

[0033] The visible light sensor may include an a-Si-based P-I-N photodiode, a poly-Si-based P-I-N photodiode, a CIGS (Cu—In—Ga—Se) photodiode, or a Cd—Te photodiode.

[0034] The visible light sensor may be partially overlapped with at least one OLED sub-pixel of the OLED light emitter stack in the vertical direction.

[0035] The visible light sensor may include an organic photodiode including a lower electrode, an upper electrode, and a visible light absorption layer between the lower and upper electrodes. The lower electrode may be a reflecting electrode. The upper electrode may be a transparent electrode.

[0036] A display device may include the OLED display panel.

[0037] According to some example embodiments, an OLED display panel may include a substrate, a driver stack on the substrate, and an OLED light emitter stack on the driver stack. The OLED light emitter stack may include a plurality of sub-pixels configured to emit light and a visible light sensor, the plurality of sub-pixels including a red OLED sub-pixel, a green OLED sub-pixel, and a blue OLED sub-pixel, the visible light sensor configured to detect at least a portion of the emitted light based on reflection of the portion of the emitted light from a recognition target. The visible light sensor may be in a non-light emitting region of the OLED light emitter stack so as to be horizontally aligned with at least one adjacent OLED sub-pixel of the OLED light emitter stack in a horizontal direction extending parallel to an upper surface of the substrate, or in the green OLED sub-pixel.

[0038] The visible light sensor may be configured to absorb light in an entirety of a wavelength spectrum of visible light.

[0039] The visible light sensor may include an organic photodiode including an organic material.

[0040] The visible light sensor may include an a-Si-based photodiode, a poly-Si-based P-I-N photodiode, a CIGS (Cu—In—Ga—Se) photodiode, or a Cd—Te photodiode.

[0041] The visible light sensor may include an organic photodiode including a lower electrode, an upper electrode, and a visible light absorption layer between the lower and upper electrodes. The lower electrode may be a reflecting electrode. The upper electrode may be a transfective electrode.

[0042] A display device may include the OLED display panel.

BRIEF DESCRIPTION OF THE DRAWINGS

[0043] FIG. 1 is a schematic view showing a pixel layout of light emitters of a visible light sensor embedded organic light emitting diode (OLED) display panel according to some example embodiments,

[0044] FIG. 2 is a cross-sectional view showing a visible light sensor embedded OLED display panel according to some example embodiments,

[0045] FIG. 3 is a flowchart for illustrating a motion algorithm of a visible light sensor embedded display panel,

[0046] FIG. 4 is a schematic view illustrating an operation of biometric recognition, specifically, fingerprint recognition by using a visible light sensor embedded organic light emitting diode display panel according to some example embodiments,

[0047] FIG. 5 shows a read out circuit of an OLED sub-pixel and a visible light sensor,

[0048] FIG. 6 is a timing diagram for a fingerprint recognition operation and a display signal,

[0049] FIG. 7 is a schematic view showing a pixel layout of a light emitter of a visible light sensor embedded organic light emitting diode display panel according to some example embodiments,

[0050] FIG. 8 is a cross-sectional view of a visible light sensor embedded OLED display panel according to some example embodiments,

[0051] FIGS. 9A-9C are schematic views showing mobile display devices including visible light sensor embedded OLED display panels according to some example embodiments,

[0052] FIG. 10 is a cross-sectional view showing a visible light sensor embedded OLED display panel that includes a touch sensor according to some example embodiments,

[0053] FIGS. 11A-11C are cross-sectional views showing visible light sensor embedded OLED display panels that include an infrared light emitter and an infrared light sensor according to some example embodiments,

[0054] FIG. 12 is a schematic view showing various regions of a visible light sensor embedded OLED display panel having different light sensor configurations according to some example embodiments, and

[0055] FIG. 13 is a diagram illustrating a display device that includes one or more visible light sensor embedded OLED display panels according to some example embodiments.

DETAILED DESCRIPTION

[0056] Hereinafter, example embodiments of the present inventive concepts will be described in detail so that a person skilled in the art would understand the same. This disclosure may, however, be embodied in many different forms and is not construed as limited to the example embodiments set forth herein.

[0057] Regarding the reference numerals assigned to the elements in the drawings, it should be noted that the same elements will be designated by the same reference numerals, wherever possible, even though they are shown in different drawings

[0058] Hereinafter, visible light sensor embedded organic light emitting diode (OLED) display panels according to some example embodiments is described with reference to the drawings.

[0059] FIGS. 1 and 2 show a pixel layout of visible light sensors embedded OLED display panel 1000 according to some example embodiments and a cross-sectional view thereof, respectively. The cross-sectional view shown in FIG. 2 may be a cross-sectional view of the OLED display panel 1000 shown in FIG. 1 along view line II-II'.

[0060] Referring to FIGS. 1 and 2, a visible light sensor embedded OLED display panel 1000 according to some example embodiments is a stack-type display panel that includes a visible light sensor stack 200 that is stacked under

an OLED light emitter stack **300**. Accordingly, as shown in FIGS. **1** and **2**, and as further shown in at least FIGS. **4** and **7-8**, an OLED display panel **1000** may include a substrate **110**, an OLED light emitter stack **300** on the substrate **110**, and at least one visible light sensor **210** on the substrate **110**. The OLED light emitter stack **300** may include one or more OLEDs **310** configured to emit light **330**. Each OLED **310** may be referred to herein as simply an OLED light emitter that is configured to emit light **330**. The visible light sensor **210** may be configured to detect at least a portion of the emitted light **330** (e.g., light **245**) based on reflection of the portion of the emitted light **330** from a recognition target.

[0061] In the OLED light emitter stack **300**, sub-pixels **310R**, **310G**, and **310B** are grouped to provide a unit pixel (Px), where a unit pixel (Px) as described herein may be referred to as simply a pixel (Px), and the unit pixel (Px) is repeated and arranged in a pattern, also referred to herein as a matrix. The sub-pixels **310R**, **310G**, and **310B** may include and/or may be defined by separate OLEDs **310** that may be configured to emit light of different wavelength spectra, such that the sub-pixels **310R**, **310G**, and **310B** may be understood to be configured to emit light of different wavelength spectra. For example, sub-pixel **310R** may be defined by an OLED **310** that is configured to emit light **330** in a red wavelength spectrum (“red light”), sub-pixel **310G** may be defined by an OLED **310** that is configured to emit light **330** in a green wavelength spectrum (“green light”), and sub-pixel **310B** may be defined by an OLED **310** that is configured to emit light **330** in a blue wavelength spectrum (“blue light”).

[0062] FIG. **1** shows a pentile matrix type layout in which one pixel (Px) comprises two green sub-pixels **310G**, one red sub-pixel **310R**, and one blue sub-pixel **310B** (e.g., RGBG). As described herein, sub-pixel **310R** may be referred to as a red OLED sub-pixel, sub-pixel **310G** may be referred to as a green OLED sub-pixel, and sub-pixel **310B** may be referred to as a blue OLED sub-pixel.

[0063] In the array shown in FIG. **1**, the pixel array of the OLED display panel **1000** includes an array of red sub-pixels **310R**, an array of blue sub-pixels **310B**, and an array of green sub-pixels **310G**. As shown, each array defines a separate pattern of the respective sub-pixels **310R**, **310B**, **310G**, where some or all of the sub-pixels in a given pattern of sub-pixels may include a particular type of sub-pixel **310R**, **310B**, **310G**. It will be understood that a given sub-pixel **310R**, **310G**, **310B** that is defined by a pattern of respective OLEDs may not include an OLED **310** that corresponds to the sub-pixel. For example, as described further below with reference to FIGS. **7-8**, a visible light sensor **210** may replace an OLED **310** in a given sub-pixel that corresponds to a pattern of OLEDs **310** (e.g., the visible light sensor **210** may be in a position at which an OLED **310** should otherwise be located based on a pattern of other OLEDs configured to emit the same wavelength spectrum of light) such that the visible light sensor **210** may be referred to as being “in” the given sub-pixel.

[0064] As further shown in FIGS. **1** and **2**, the OLEDs **310** are spaced apart from each other in a horizontal direction that is parallel to the upper surface **110u** of the substrate **110** (e.g., an x-direction and/or a y-direction). The regions adjacent to the OLEDs **310** in the OLED light emitter stack **300** may be referred to as non-light emitting regions **800** of the OLED light emitter stack **300**, and thus each unit pixel (Px) may include one or more OLEDs **310** and a non-light

emitting region **800** adjacent to the one or more OLEDs **310**. As shown, the non-light-emitting region of a unit pixel (Px) may be a continuous region that surrounds the OLEDs **310** of the pixels (Px) of the OLED display panel **1000** in the pixel array of the OLED display panel **1000**. As shown, the non-light emitting region(s) of the OLED display panel **1000** may include insulating layers **350** and **360**, which may be at least partially transparent to light **330** that may be emitted by the OLEDs **310** and reflected back into and through the OLED light emitter stack **300** from a recognition target. Accordingly, reflected light **245** may pass through the OLED light emitter stack **300** via the non-light emitting region(s) of the unit pixels (Px) of the OLED display panel **1000**.

[0065] It will be understood that, because the unit pixels (Px) of the OLED display panel **1000** may have the same horizontal boundaries (e.g., in the x and y directions) as the corresponding unit pixels (Px) of the OLED light emitter stack **300**, where the unit pixels (Px) of the OLED light emitter stack **300** are defined by a particular grouping of the sub-pixels **310R**, **310G**, **310B** of the OLED light emitter stack **300**, the unit pixels (Px) of the OLED display panel **1000** and the corresponding unit pixels (Px) of the OLED light emitter stack **300** may be collectively referred to herein as simply unit pixels (Px) or simply pixels (Px).

[0066] It will be understood that, in some example embodiments, some or all of the pixels (Px) and/or sub-pixels in the OLED display panel **1000** and/or OLED light emitter stack **300** may be arranged according to one or more other patterns, or matrices, including a strip structure pattern.

[0067] It will be understood that the OLED display panel **1000** may be described as including an array of pixels (Px), where each pixel (Px) of the OLED display panel **1000** may be considered to correspond to a separate pixel (Px) of the OLED light emitter stack **300**. Additionally, each pixel (Px) of the OLED display panel **1000** may include one or more sub-pixels (Sub-Px), where each sub-pixel (Sub-Px) of a pixel (Px) of the OLED display panel **1000** may be considered to correspond to a separate sub-pixel **310R**, **310G**, **310B** of the OLED light emitter stack **300**. For example, as shown in FIG. **2**, a given pixel (Px) of the OLED light emitter stack **300** includes a certain set of sub-pixels **310R**, **310G**, and **310B** that are configured to emit light having different wavelength spectra (e.g., one red sub-pixel **310R**, one blue sub-pixel **310B**, and two green sub-pixels **310G** may define a pixel (Px) of the OLED light emitter stack **300**), and a given pixel (Px) of the OLED display panel **1000** encompasses (and is defined by) the given pixel (Px) of the OLED light emitter stack **300**, such that the given pixel (Px) of the OLED display panel includes (and is defined by) the given pixel of the OLED light emitter stack **300** and the portions of the visible light sensor stack **200**, driver **100**, substrate **110**, and cover glass **450** that overlap the pixel (Px) of the OLED light emitter stack **300**. Similarly, as shown in FIG. **2**, each separate sub-pixel (Sub-Px) of the given pixel (Px) of the OLED display panel **1000** includes (and is defined by) a separate sub-pixel **310R**, **310B**, **310G** of the pixel (Px) of the OLED light emitter stack **300** and further includes the portions of the visible light sensor stack **200**, driver **100**, substrate **110**, and cover glass **450** that overlap the respective sub-pixel of the OLED light emitter stack **300**.

[0068] As further shown, the boundaries of the sub-pixels (Sub-Px) and pixels (Px) of the OLED display panel **1000**, while defined by the respective sub-pixels **310R**, **310G**,

310B and pixels (Px) of the OLED light emitter stack **300**, may not exactly be the same as the boundaries of the respective sub-pixels **310R**, **310G**, **310B** and pixels (Px) of the OLED light emitter stack **300**. For example, as shown in FIG. 2, each sub-pixel of the OLED display panel **1000** includes a respective sub-pixel of the OLED light emitter stack **300** and also includes a portion (e.g., half) of the non-light emitting region **800** extending between the respective sub-pixel of the OLED light emitter stack **300** and one or more adjacent sub-pixels of the OLED light emitter stack **300**. OLED display panel **1000** includes a given pixel (Px) of the OLED light emitting stack.

[0069] Herein, where OLED sub-pixels are referenced, it will be understood that said OLED sub-pixels are referring to sub-pixels of the OLED light emitter stack **300** (e.g., **310R**, **310G**, **310B**), instead of sub-pixels of the OLED display panel **1000**.

[0070] In FIGS. 1 and 2, a visible light sensor **210** is disposed under the non-light emitting region **800** to implement the detection of the visible light **245** received at the visible light sensor **210** through the non-light emitting region **800** between respective OLED sub-pixels (Sub-Px). FIG. 2 shows one example that the sub-pixels **310R**, **310G**, and **310B** and the visible light sensor **210** are partially overlapped in the vertical direction (z-direction). Accordingly, as shown in FIGS. 1-2, a visible light sensor **210** may be between a non-light emitting region **800** of the OLED light emitter stack **300** and the substrate **110** so as to be vertically aligned with the non-light emitting region **800** of the OLED light emitter stack **300** in a vertical direction (e.g., z-direction) extending perpendicular to the upper surface **110u** of the substrate **110**.

[0071] It will be understood that, as described herein, an element that is “above” or “below” another element may be referred to as being “on” the other element. Similarly, an element that is described herein to be “on” another element may be “above” or “below” the other element. Furthermore, an element that is described to be “between” two other elements may be separately “on” each of the two other elements. It will be understood that an element that is “on” another element may be “directly” on the other element so as to be in direct contact with the other element or may be “indirectly” on the other element so as to be isolated from direct contact with the other element by one or more interposing spaces and/or structures.

[0072] It will be understood that an element and/or direction that is described herein as being parallel with a reference surface may be substantially parallel with the reference surface such that the element and/or direction is parallel with the reference surface within manufacturing tolerances and/or material tolerances. It will be understood that an element and/or direction that is described herein as being perpendicular with a reference surface may be substantially perpendicular with the reference surface such that the element and/or direction is perpendicular with the reference surface within manufacturing tolerances and/or material tolerances.

[0073] The OLED display panel **1000** shown in FIGS. 1 and 2 may be suitable for a high resolution display panel having a display resolution of greater than or equal to about 2960x1440 (WQHD) and an aperture ratio between sub-pixels (Sub-Px) of about 4%. But the present disclosure is not necessarily limited to the resolution and the aperture ratio.

[0074] When the terms “about” or “substantially” are used in this specification in connection with a numerical value, it is intended that the associated numerical value include a tolerance of $\pm 10\%$ around the stated numerical value. When ranges are specified, the range includes all values therebetween such as increments of 0.1%.

[0075] The OLED light emitter stack **300** is a region configured to emit light, and therefore is configured to emit light to display an image and also to emit light for biometric recognition, simultaneously or separately. The OLED light emitter stack **300** includes OLEDs **310** (also referred to herein as OLED light emitters), each OLED **310** including an organic emission layer **311**, and a first electrode **313** and a second electrode **315** formed under and on the organic emission layer **311**. As shown, the OLED light emitter stack **300** includes insulation layers **350** and **360**, where portions of the OLEDs **310** may be formed on insulation layer **350**, in gaps in the insulation layer **350**, and/or between separate instances of insulation layer **350**, and insulation layer **360** may be formed on both insulation layer **350** and the OLEDs **310** to cover the OLEDs **310**.

[0076] The organic emission layer **311** may be formed of (may at least partially comprise) various organic materials inherently configured to emit light **330** of any one of red R, green G, and blue B colors (wavelength spectra) away from an upper surface **110u** of the substrate **110**, that is, in an opposite direction from the visible light sensor stack **200**. Accordingly, and as shown in FIG. 1, each separate OLED **310** in a unit pixel (Px) of the OLED light emitter stack **300** (and thus a unit pixel (Px) of the OLED display panel **1000**) may be considered to be, and thus may define, a separate sub-pixel **310R**, **310B**, **310G** of the OLED light emitter stack **300** (OLED sub-pixel).

[0077] Either one of the first electrode **313** and the second electrode **315** is connected to a driving voltage line (Vdd) and an output terminal (Out Put) to function as an anode, and the other is connected to a common voltage (Vss) to function as a cathode. In order to well express light emitted from the organic emission layer **311**, the second electrode **315** may be formed as a light-transmitting electrode with a thickness of less than or equal to about 100 nm. For example, the second electrode **315** may be formed of MgAg, Ag, Mg, Al, Mo, Ti, TiN, Ni, ITO, IZO, AlZO, AITO, or the like. The first electrode **313** may be formed with a reflecting electrode. As described above, luminous efficiency of the OLED **310** may be improved based on the first electrode **313** being a reflecting electrode. For example, the first electrode **313** may be formed of Al, Ag, Mo, AlNd, Mo/Al/Mo, TiN, ITO/Ag/ITO, ITO/Al/ITO, ITO/Mo/ITO, or the like. It may be formed with a light transmitting electrode to fluently enter light toward the lower visible light sensor stack **200**. The light-transmitting electrode may have a transmittance of greater than or equal to about 80%. For example, the first electrode **313** may be formed of ITO, IZO, AlZO, AITO, or the like.

[0078] The visible light sensor stack **200** may include a visible light sensor **210** that is an organic photodiode including a visible light absorption layer **211**, a lower first electrode **213** and an upper second electrode **215**. Particularly, the visible light absorption layer **211** may be formed with (may at least partially comprise) an organic material which may absorb visible light through the whole region of visible light (e.g., may absorb visible light at any wavelength within the entire wavelength spectrum of visible light, for example

between about 380 nm to about 740 nm). For example, it may include any material suitable for absorbing visible light, for example, squaraine based, D- π -A based, Bodipy based, phthalocyanine based materials, and the like. For example, the visible light absorption layer **211** may include any well-known OLED material configured to emit visible light of any wavelength spectrum, including, for example, any one of phosphorescent materials, fluorescent materials, and TADF. Well-known materials that may at least partially comprise one or more visible light absorption layers **211** of the one or more visible light sensors **210** may include metal complexes such as Ir complex, Pt complex, Os complex, and Pd complex, anthracene (blue), Alq₃ (green), DCM (red), any combination thereof, or the like. It will be understood that, in some example embodiments, a visible light sensor **210** may be other than an organic photodiode, for example the visible light sensor **210** may be a silicon photodiode, a quantum dot photodiode, or the like.

[0079] As shown, the visible light sensor stack **200** includes insulation layers **240** and **250**, where portions of the visible light sensors **210** may be formed on insulation layer **240**, in gaps in the insulation layer **240**, and/or between separate instances of insulation layer **240**, and insulation layer **250** may be formed on both insulation layer **240** and the visible light sensors **210** to cover the visible light sensors **210**.

[0080] As shown in FIG. 2, a given unit pixel (Px) may include multiple visible light sensors that are vertically aligned with separate non-light emitting regions **800** of the OLED light emitter stack **300** or separate portions of a same non-light emitting region of the OLED light emitter stack **300**.

[0081] Referring to FIG. 1, in some example embodiments a visible light sensor stack **200** may include an individual visible light sensor **210** that extends continuously in vertical alignment with (“vertically overlapping”) a continuous non-light emitting region **800** that extends continuously between adjacent OLEDs **310** of the OLED light emitter stack **300** of the unit pixel (Px). As shown in FIG. 1, where the OLEDs **310** are arranged in a pentile matrix in the OLED display panel **1000**, the non-light emitting region **800** of the unit pixel (Px) may have a hatch shape (#), and the visible light sensor stack **200** may include an individual visible light sensor **210** that has a hatch shape (#) so as to be vertically aligned with (e.g., overlap in the Z-direction) the hatch-shaped non-light emitting region **800**.

[0082] Separate unit pixels (Px) may include separate visible light sensors **210**, such that visible light sensors **210** of adjacent unit pixels (Px) are isolated from direct contact with each other in a horizontal direction. As shown, a hatch-shaped visible light sensor **210** may include gaps that vertically overlap with at least a portion of one or more OLEDs **310**. Referring to FIG. 2, which shows two separate visible light sensors **210** under a given unit pixel (Px) of the OLED light emitter stack **300**, in some example embodiments, a unit pixel (Px) of the OLED display panel **1000** may include an individual visible light sensor **210** instead of multiple visible light sensors **210** under the unit pixel (Px) of the OLED light emitter stack **300**. At least a portion of one or more visible light sensors **210** may extend horizontally, beyond vertically overlapping with one or more non-light emitting regions **800**, such that the one or more visible light sensors **210** at least partially vertically overlap with (e.g.,

overlap in the Z-direction with) one or more OLEDs **310** of the OLED light emitter stack **300**.

[0083] In some example embodiments, a visible light sensor **210** in a given unit pixel (Px) (e.g., under a given unit pixel (Px) of the OLED light emitter stack **300** and within a corresponding given unit pixel (Px) of the OLED display panel **1000**) may have a shape with no internal horizontal gap spaces such that the visible light sensor **210** may extend continuously under, and thus vertically overlap with, both some or all of the one or more OLEDs **310** and the one or more non-light emitting regions **800** of the OLED light emitter stack **300**. For example, while the cross-sectional view of FIG. 2 provides the appearance of a unit pixel (Px) that includes two separate visible light sensors **210**, or an individual visible light sensor **210** that includes a gap space under the sub-pixel **310R** and extending continuously out of plane of the cross-sectional view (e.g., in the Y-direction), in some example embodiments, the cross-sectional view of the unit pixel (Px) of FIG. 2 may show an individual visible light sensor **210** that extends continuously under at least the sub-pixel **310R** and under at least a portion of the non-light emitting regions **800** at opposite sides of the sub-pixel **310R**.

[0084] While a greater quantity of visible light sensors **210** in a unit pixel (Px) and/or a visible light sensor **210** that has reduced or no vertical overlap with the one or more OLEDs **310** of the unit pixel (Px) may provide improved resolution of images generated by the visible light sensors **210** of the OLED display panel **1000**, larger visible light sensors **210** that extend continuously under some or all of the OLEDs in a unit pixel (Px), in addition to the non-light emitting region(s) in the unit pixel (Px), may be fabricated more easily and with reduced cost due to reduced complexity of the shape of the visible light sensor **210**.

[0085] While FIGS. 1-2 may illustrate that each unit pixel (Px) of the OLED display panel **1000** may include one or more visible light sensors **210**, and may in some example embodiments include multiple visible light sensors **210** such that the quantity of visible light sensors **210** in an OLED display panel **1000** is greater than the quantity of unit pixels (Px) of the OLED display panel **1000** (and thus greater than the quantity of corresponding unit pixels (Px) of the OLED light emitter stack **300**), it will be understood that, in some example embodiments, an OLED display panel **1000** may include a visible light sensor stack **200** that includes one or more visible light sensors **210** that extend between multiple (e.g., adjacent) unit pixels (Px) (e.g., under multiple unit pixels of the OLED light emitter stack **300**) such that one or more visible light sensors may be “shared” by multiple (e.g., two or more) unit pixels (Px). In some example embodiments, the ratio of the quantity of unit pixels (Px) (which may be either of the unit pixels of the OLED display panel **1000** or the corresponding unit pixels of the OLED light emitter stack **300**) to visible light sensors **210** in an OLED display panel may be between about 2:1 to about 1:0.1. In some example embodiments, the pixel density (e.g., density of unit pixels (Px)) in an OLED display panel **1000** may be about 550 pixels per inch (ppi) and the sensor density (e.g., density of visible light sensors **210**) in the OLED display panel **1000** may be about 200 dots per inch (dpi).

[0086] Referring back to FIG. 1, in some example embodiments an OLED display panel **1000** may include one or more visible light sensors **210** that are not arranged in a pattern or position that is based on the patterns of OLEDs/sub-pixels of the OLED light emitter stack **300** but is instead

are located at one or more particular positions in the OLED display panel 1000, for example at an edge of the OLED display panel 1000 as shown in FIG. 1. Such visible light sensors 210 may be repeatedly arranged in or under one or more non-light emitting regions 800 in the OLED display panel 1000.

[0087] At least one of the first electrode 213 and the second electrode 215 is connected to a driving voltage line (Vdd) and an output terminal (Out Put) and functions as an anode, and the other is connected to a common voltage (Vss) and functions as a cathode. As the first electrode (lower electrode, 213) is formed with the reflecting electrode, it may further improve sensing efficiency of the visible light sensor 210. For example, the first electrode (lower electrode, 213) may be formed of Al, Ag, Mo, AlNd, Mo/Al/Mo, TiN, ITO/Ag/ITO, ITO/Al/ITO, ITO/Mo/ITO, and the like. The second electrode (upper electrode, 215) may be formed with the transparent electrode, so that incident light may be absorbed into the visible light absorption layer 211 as much as possible. For example, the second electrode (upper electrode, 215) may be formed of ITO, IZO, AlZO, Ag nanowire, graphene, CNT, and the like.

[0088] The driver 100, also referred to herein as simply a “driver stack,” may be disposed between the substrate 110 and the visible light sensor stack 200 not to deteriorate light-emitting function and light-receiving function of the OLED light emitter stack 300 and the visible light sensor stack 200.

[0089] The driver 100 is formed on the substrate 110 and includes various transistor arrays 120a, 120b, and 120c (see FIG. 11A) configured to input (receive) and output (transmit) electrical signals from/to the visible light sensor stack 200 and the OLED light emitter stack 300 which are on the upper part and an interlayer insulating layer 150 in which a multi-layered wire layer 140 is formed.

[0090] The OLED transistor array 120a and a visible light sensor transistor array 120b may be formed on the same plane. While FIG. 2 only illustrates an OLED transistor array 120a and wire extending between the OLED transistor array 120a and a single OLED 310 of the OLEDs 310 of sub-pixels 310R, 310B, and 310G in the cross-sectional view of FIG. 2, it will be understood that the driver 100 includes additional transistor arrays 120a that are each separately connected to a separate one of the OLEDs 310 of sub-pixels 310R and 310G, and said additional transistor arrays 120a are positioned out of plane of the cross-sectional view of FIG. 2 (e.g., in the Y-direction). When the transistor arrays 120a, 120b, 120c are formed on the same plane, each process of forming the OLED transistor array 120a and a visible light sensor transistor array 120b may be simultaneously carried out so it is not needed to prepare an additional process mask, compared to the case of forming them on different planes, so the number of process steps may be reduced. In addition, the thickness of the display panel may be thinner than the case of forming the transistor arrays in different planes, so it may be more suitable for embodying a flexible display panel.

[0091] The substrate 110 may be formed with various materials such as glass or plastic. In a case of plastic, it may be formed with a transparent and flexible material.

[0092] A cover glass 450 attached by an adhesive (not shown) is disposed on the OLED light emitter stack 300 and may protect the lower structure to provide a display surface and a biometric recognition surface.

[0093] While not shown in FIG. 2, it will be understood, for example as shown in FIG. 10, that the OLED display panel 1000 may include a touch sensor 1010.

[0094] In some example embodiments, the OLED display panel 1000 may have reduced thickness, and thus reduced device volume, improved flexibility, or any combination thereof due to the visible light sensors 210 being included “in-cell” as shown in FIG. 2 (and further as shown in FIG. 8 as described below). As a result, the amount of light transmission by the OLEDs 310 of the OLED light emitter stack 300 may be improved, which may improve sensitivity of the visible light sensors 210 when the OLEDs 310 are used to emit light and the visible light sensors 210 are used to detect reflections of the emitted light from a recognition target to perform biometric recognition operations. Accordingly, the OLED display panel 1000 may be configured to enable improved biometric recognition accuracy. In addition, because the visible light sensors 210 are included “in-cell” with the OLEDs 310 as shown in FIG. 2 (and further as shown in FIG. 8 as described below), fabrication of the OLED display panel 1000 may be simplified (e.g., by omitting bonding of separate stacks that include a separate element of the visible light sensors 210 and the OLEDs 310 and include separate, respective substrates on which separate elements are formed prior to the bonding). Additionally, power consumption in a display device that includes the OLED display panel 1000 may be improved based on reducing or omitting separate light sources for biometric recognition operations beyond the OLEDs 310 that are already included in the OLED display panel 1000 and can be used as light sources for the visible light sensors 210 during a biometric recognition operation.

[0095] FIG. 3 is a flowchart illustrating an operation algorithm of a display panel 1000 embedded with the visible light sensor 210; FIG. 4 is a schematic view showing operations of biometric recognition, specifically, fingerprint recognition by using of the visible light sensor embedded organic light emitting diode (OLED) display panel according to some example embodiments; FIG. 5 shows a read out circuit of each sub-pixel 310R, 310G, and 310B and a visible light sensor 210; and FIG. 6 is a timing diagram for expressing a fingerprint recognition operation and a display signal. FIG. 3 exemplifies an organic visible light sensor (Vis OPD) as a visible light sensor. It will be understood that the operation algorithm shown in FIG. 3 may be partially or entirely implemented by processing circuitry as described herein with reference to FIG. 13 and may be implemented with regard to any of the example embodiments of the OLED display panel 1000, including example embodiments illustrated in FIGS. 7-8. The cross-sectional view shown in FIG. 4 may be a cross-sectional view of the OLED display panel 1000 shown in FIG. 1 along view line II-II'.

[0096] As shown in FIGS. 3-6, a method for performing biometric recognition with regard to a portion of a user of a display device, such portion being referred to as a recognition target (e.g., face, hand, iris, fingerprint, etc.) where the display device includes any of the example embodiments of OLED display panels 1000, may include driving an OLED 310 to emit light 330 and further driving a visible light sensor 210 to detect at least a portion 245 of the emitted light 330 based on reflection of the portion 245 of the emitted light 330 from a recognition target, in response to a determination that the OLED 310 is turned on, user access to the display device is disabled, and a recognition target that is a

portion of the user is in a certain proximity to the OLED display panel; and turning off the visible light sensor **210**, granting user access to the display device, and driving the OLED **310** to cause the OLED display panel **1000** to display an image, in response to a determination that recognition of the recognition target is completed via comparison of a reference recognition target image with an image of the recognition target generated based on an output signal of the visible light sensor **210** in response to detecting the reflected portion **245** of the emitted light **330**.

[0097] First, it is determined whether R/G/B OLEDs (e.g., the OLEDs **310** of sub-pixels **310R**, **310G**, and **310B**) are turned on (**S1001**). The turning on of the R/G/B OLEDs **310** means a state of screen mode transition after switching a start power (e.g., initializing the supply of electrical power to the OLEDs **310** of the OLED display panel **1000**). If the R/G/B OLEDs (e.g., the OLEDs **310** of sub-pixels **310R**, **310G**, and **310B**) are turned off (e.g., power is not being supplied to the OLEDs **310**), a visible light sensor **210** (Vis OPD) and R/G/B OLEDs **310** (Vis-OLEDs) are not driven (**S1002**). Restated, if the OLEDs **310** are turned off at **S1001**, then signals are not supplied to the OLEDs **310** and/or the visible light sensors **210** to drive same and/or cause same to generate output signals. In the case when R/G/B OLEDs (e.g., the OLEDs **310** of sub-pixels **310R**, **310G**, and **310B**) are determined to be turned on (e.g., electrical power is being supplied to the OLEDs **310**), it is determined whether a locking device is turned on or off (**S1003**).

[0098] The locking device may be a functionality that is implemented by processing circuitry as described with reference to FIG. **13** to enable (“grant”) or disable (“deny”) user access to the display device and/or functionality of the display device, for example by selectively enabling or disabling functionality to display images to the user via the OLED display panel **1000**. Restated, a determination is made whether user access to a display device that includes the OLED display panel **1000** is enabled (“unlocked”). Such user access may be enabled based on user interaction with one or more interfaces of the display device (e.g., contact of a fingerprint with a particular portion of the OLED display panel **1000**, user interaction with a button of the display device that is separate from the OLED display panel **1000**, any combination thereof, or the like). In some example embodiments, user access may be enabled/disabled separately from the operational algorithm of FIG. **3**, such that the display device may grant unrestricted access to any user interacting with the display device via the OLED display panel **1000**; in such cases the user access functionality of the display device (e.g., the “locking device”) may be considered to be turned off, such that biometric recognition of a user may not be necessary. If the locking device is determined to be turned off at **S1003** (e.g., user access is enabled), the visible light sensor **210** (Vis OPD) and R/G/B OLEDs (Vis-OLEDs, e.g., the OLEDs **310** of sub-pixels **310R**, **310G**, and **310B**), which are one of the locking devices, are not driven (**S1004**), similarly to at **S1002**. In the case when the locking device is turned on (e.g., user access to the display device via the OLED display panel **1000** is presently disabled), it is determined whether a recognition target is in a certain proximity to the OLED display panel **1000** (**S1005**). As described below with reference to FIG. **10**, an OLED display panel **1000** may include one or more touch sensors **1010** that may generate output signals based on contact between a recognition target that is a portion of the

user (e.g., a fingerprint) with at least a portion of the OLED display panel **1000**. A touch sensor of the OLED display panel **1000** may be considered to be turned on when the touch sensor generates an output signal that indicates that a recognition target is in contact with at least a portion of the OLED display panel **1000**. A recognition target may be determined to be within a certain proximity of the OLED display panel **1000** (**S1005**=yes) if an output signal is received from the touch sensor in response to the recognition target being in contact with the OLED display panel.

[0099] If the recognition target is not in the certain proximity to the OLED display panel (e.g., no signal is received from the touch sensor), the visible light sensor **210** (Vis OPD) and R/G/B OLEDs (Vis-OLEDs, e.g., the OLEDs **310** of sub-pixels **310R**, **310G**, and **310B**) are not driven (**S1006**), similarly to **S1002** and **S1004**. In some example embodiments, where the biometric recognition operation of FIG. **3** involves performing biometric recognition of a recognition target that is not in contact with the OLED display panel (e.g., face recognition, iris recognition, or the like), the determination at **S1005** may include driving one or more visible light sensors **210** (e.g., a particular limited selection of the visible light sensors **210** of the OLED display panel **1000**) to generate output signals that may be processed to generate an image of a field of view of the OLED display panel **1000** to determine whether a recognition target (e.g., user iris, user face, or the like) is within the field of view and thus is in proximity to the OLED display panel. Thereby, power consumption more than required for biometric recognition operations may be reduced or prevented by inhibiting the use of power to drive the OLEDs **310** and visible light sensors **210** except in response to a determination that the OLEDs **310** are turned on (and thus the OLED light emitter stack **300** is turned on), user access to the display device is disabled, and a recognition target is in a proximity to the OLED display panel (e.g., in contact with the OLED display panel **1000** and/or within the field of view of the OLED display panel **1000**). In the case when the touch sensor is turned on and the locking device is turned on, it is determined whether a finger **500** is contacted on the surface of the display panel **1000** for a threshold period of time or longer (e.g., greater than or equal to about 1 second) as shown in FIG. **4** (**S1007**), or whether a recognition target within the field of view of the OLED display panel **1000** is within the field of view for at least a threshold period of time (e.g., greater than or equal to about 1 second).

[0100] One or more visible light sensor **210** (Vis OPD) and R/G/B OLEDs (Vis-OLEDs, e.g., the OLEDs **310** of sub-pixels **310R**, **310G**, and **310B**) are selectively operated (driven) in the case when the recognition target is determined to be in the proximity to the OLED display panel for at least the threshold period of time or longer (**S1008**). In other words, as shown in FIGS. **5** and **6**, driving the OLEDs **310** may include turning on the gate lines (Gate n+1, Gate n+2, Gate n+3) connected to red OLED sub-pixel **310R**, blue OLED sub-pixel **310B**, green OLED sub-pixel **310G** which causes red OLED sub-pixel **310R**, blue OLED sub-pixel **310B**, green OLED sub-pixel **310G** to emit light **330**, so that visible detecting light **330** may be reflected or scattered on a surface of a recognition target (e.g., the finger **500** surface, also referred to as a fingerprint **501**, as shown in FIG. **4**).

[0101] It will be understood that, in some example embodiments, operation **S1008** includes driving a particular limited set of the visible light sensors **210** and OLEDs **310**

of the OLED display panel **1000**. For example, where the recognition target is a fingerprint in contact with a particular limited area of the total area of a surface **1000a** of the OLED display panel **1000**, as indicated by one or more touch sensors of the OLED display panel **1000**, operation **S1008** may include selectively driving only a limited portion of visible light sensors **210** that are in a limited portion of an array of visible light sensors **210** and OLEDs **310** that are in a limited portion of an array of OLEDs **310** that vertically overlap with the limited area.

[0102] As shown in FIGS. **5** and **6**, when the reflected or scattered light is received (detected, absorbed, or the like) by a visible light sensor **210** (Vis sensing OPD), the gate line (Gate *n*) connected to the visible light sensor **210** (Vis sensing OPD) turns on (e.g., the visible light sensor **210** is driven), and a output line turns on, the signal accumulated in the visible light sensor **210** (Vis sensing OPD) is output through the output line (Output) as an output signal. The output signals generated by an array of visible light sensors **210** in some or all of the OLED display panel **1000** may be processed to generate an image of the recognition target (e.g., a fingerprint image of the finger **500**) through an image generation process, which may include any well-known process for image generation based on output signals generated by an array of visible light sensors **210**, thereby performing fingerprint recognition. A light emitter (e.g., OLEDs **310**) emits each of red, green and blue light **330**, but the visible light sensor **210** (Vis sensing OPD) may be configured to absorb light in an entire visible light wavelength spectrum (e.g., may absorb visible light at any wavelength within the entire wavelength spectrum of visible light), such that the output signal does not specifically indicate the specific wavelength of the incident light **245** within the visible wavelength spectrum. Accordingly, output signals by an array of visible light sensors **210** in the OLED display panel **1000** may be processed to generate a monochromatic image. Even if carrying out Fourier transform at a low frequency, an OLED display panel **1000** that includes visible light sensors **210** that are each configured to absorb the same wavelength spectrum of light, and that extends over some or all of the entire visible wavelength spectrum, may provide merits of producing clearer digital image process results than the case of absorbing each of red, green, and blue. Restated, an OLED display panel **1000** that includes unit pixels (Px) with one or more (or sharing one or more) visible light sensors **210** that are each configured to absorb the same wavelength spectrum of light **245**, where the wavelength spectrum extends over some or all of the entire visible wavelength spectrum, may be configured to generate a monochromatic image (based on output signals generated by the visible light sensors **210** in response to incident light **245**) that has greater resolution than a color image generated based on output signals generated by an array of RGB light sensors having similar size, sensor quantity, and pattern properties. This may be because a visible light sensor **210** that absorbs light across the entire visible wavelength spectrum may have more photocurrent than a visible light sensor **210** that only absorbs one of red, blue, or green light during rising time and fall time for generation of each frame (e.g., image).

[0103] It will be understood that the gate lines shown in FIGS. **5** and **6** may be turned on based on certain visible light sensors **210** and OLEDs **310** being driven according to signals generated and/or transmitted by one or more

instances of processing circuitry as described herein to supply power to the respective gate lines. As shown in FIGS. **5** and **6**, such signals may be supplied to the gate lines via the “data” line; such signals may be referred to herein as “data” signals.

[0104] Subsequently, it is determined whether the biometric recognition is complete (**S1009**), and when the fingerprint recognition is completed, the driving of the visible light sensor **210** (Vis OPD) and R/G/B OLEDs (Vis-OLEDs, e.g., the OLEDs **310** of sub-pixels **310R**, **310G**, and **310B**) that are driven starting at **S1008** is ended (**S1010**), and the locking device is also turned off (i.e., user access to the display device is granted) (**S1011**). It will be understood that biometric recognition may include comparing the generated image of the recognition target with one or more stored reference images of recognition targets that are associated with authorized users for which access to the display device is pre-granted, and where recognition may be determined to be completed if the image generated based on processing output signals from the one or more visible light sensors **210** matches a stored reference recognition target image within at least a threshold confidence level (e.g., at least 90% confidence match). Where the recognition target is a fingerprint, the reference recognition target images may be stored fingerprint images of fingerprints of authorized users. Similarly, where the recognition target is a face or iris, the reference images may be stored face images or iris images, respectively.

[0105] In some example embodiments, an OLED display panel **1000** may include one or more infrared light emitters **310IR** and one or more infrared light sensors **210IR**, and where the recognition target is not in contact with the OLED display panel **1000** (e.g., an iris or face), the driving at **S1008** may include selectively driving at least one or more infrared light emitters **310IR** and at least one or more infrared light sensors **210IR** to cause an image of the recognition target to be generated based at least in part on reflected infrared light being received by the one or more infrared light sensors **210IR**.

[0106] Then gate lines (Gate *n*+1, Gate *n*+2, Gate *n*+3) connected to red OLED sub-pixel **310R**, blue OLED sub-pixel **310B**, green OLED sub-pixel **310G** are turned on and a general display is performed through the driving of a display signal part that turns on red OLED sub-pixel **310R**, blue OLED sub-pixel **310B**, green OLED sub-pixel **310G** (**S1012**). Restated, at **S1012**, the OLED light emitter stack **300** is driven to emit light to display one or more images. Unless and until the biometric recognition is completed at **S1009**, the locking device is turned on again or maintained on (**S1013**) and Step (**S1005**) is operated again.

[0107] Although FIG. **3** exemplifies a fingerprint of a finger **500** as a biometric subject, it may be applied for various biometric subjects (“recognition targets”) such as a palm print, an iris, a retina, and a face.

[0108] The visible light sensor embedded OLED display panel illustrated referring to FIGS. **1** to **6** employs the OLEDs **310** as a light source as it is with no additional light source for the biometric recognition, so that it may prevent an aperture ratio decrease of the OLED(s) **310** in the array of OLEDs **310** in the OLED display panel **1000**. Accordingly, the utilization of the OLEDs **310** as a light source for the visible light sensors **210** during a biometric recognition operation enables the OLED display panel **1000** to be configured to enable performance of the biometric recogni-

tion operation without any reduction in the quantity, spacing, or emission power of the OLEDs, thereby preventing a reduction in the cumulative light transmission area of the OLED display panel (e.g., the “aperture ratio” of the OLED display panel **1000**).

[0109] In addition, as the visible light sensor **210** is formed in a stack structure under the non-light emitting region which does not have an effect on the aperture ratio of the OLED(s) **310**, it may maintain the aperture ratio of the OLED light emitter(s) **310** as it is. In addition, the biometric recognition sensor is used as a visible light sensor to maximize the incident light dose, so that it may improve accuracy and efficiency of biometric recognition.

[0110] The visible light sensor **210** is formed of an organic material and thus may be bent or stretchable. Accordingly, the visible light sensor **210** may contribute to easily realizing a flexible display device and thus improve portability and versatility of a display device.

[0111] FIG. 7 is a schematic view showing a pixel layout of a light emitter of a visible light sensor embedded organic light emitting diode (OLED) display panel according to some example embodiments, and FIG. 8 is a cross-sectional view of a visible light sensor embedded OLED display panel according to some example embodiments. The cross-sectional view shown in FIG. 8 may be a cross-sectional view of the OLED display panel **1000** shown in FIG. 7 along view line VIII-VIII'.

[0112] A visible light sensor embedded OLED display panel **1000** according to some example embodiments illustrated in FIGS. 7 and 8 includes an OLED light emitter stack **300** and a visible light sensor **2210** disposed on the same plane as the OLED light emitter stack **300**, such that the visible light sensor **2210** is in the non-light emitting region **800** of the OLED light emitter stack **300** (e.g., the non-light emitting region **800** that is adjacent to one or more OLEDs **310** of the OLED light emitter stack **300**) and is aligned with at least one adjacent OLED **310** (e.g., at least one OLED **310** of the OLED sub-pixels **310R**, **310G**, or **310B**) of the OLED light emitter stack **300** in a horizontal direction extending in parallel to an upper surface **110u** of the substrate **110** (e.g., an x-direction). It will be understood that the visible light sensor **2210** shown in FIG. 8, horizontally aligned with at least one adjacent OLED light emitter (e.g., sub-pixel **310B**) may be understood to be included in the OLED light emitter stack **300** along with the sub-pixels **310R**, **310G**, and **310B**. As shown in FIG. 7, the visible light sensor **2210** in the non-light emitting region **800** of the OLED light emitter stack **300** may have a shape and size so as to extend continuously along and around one or more OLEDs **310** of a unit pixel (Px) and/or between two or more adjacent OLEDs **310** of a unit pixel (Px), or may simply occupy a portion of the non-light emitting region **800** that is bounded by proximate OLEDs **310**.

[0113] The OLED display panel **1000** is a structure in which the OLED light emitter stack **300** and the driver **100** are stacked. In the OLED light emitter stack **300**, one unit pixel (Px) is formed with sub-pixels **310R**, **310G**, and **310B** emitting lights R, G, B having different wavelengths from each other, and the unit pixels (Px) are repeated and arranged in a matrix. Thus, the visible light sensor **2210** may be formed in a non-light emitting region **800** between each OLED sub-pixels or a part of green OLED region **900**.

[0114] For example, where a OLED display panel **1000** includes a pattern of red OLED sub-pixels **310R**, a pattern

of green OLED sub-pixels **310G**, and a pattern of blue OLED sub-pixels **310B**, one or more of the green OLEDs **310** in the pattern of green sub-pixels **310G** may be replaced (“substituted”) with one or more visible light sensors **2210**, such that the one or more visible light sensors **2210** occupy a location in the OLED light emitter stack **300** that corresponds to a location of a green OLED sub-pixel **310G** in the pattern of green OLED sub-pixels **310G** in the OLED display panel **1000**. The visible light sensor **2210** that replaces a green OLED **310** in the OLED display panel may be referred to as being “in” a green sub-pixel **310G** of the OLED display panel **1000**/OLED light emitter stack **300**. It will be understood that one or more visible light sensors **2210** may, in addition or in alternative to being “in” a green sub-pixel **310G**, be “in” a red sub-pixel **310R** and/or a blue sub-pixel **310B**.

[0115] The OLED display panel **1000** illustrated in FIGS. 7 and 8 is a display panel having a display resolution of less than or equal to about 2220×1080 (FHD), which is appropriate in the case of an aperture ratio between sub-pixels (Sub-Px) of less than or equal to about 40%. But the present disclosure is not necessarily limited to the resolution and the aperture ratio.

[0116] The OLED light emitter stack **300** is a region for displaying an image and also a region for emitting light for biometric recognition, simultaneously. The visible light sensor **2210** may include an organic photodiode as in the OLED **310** for the OLED light emitter stack **300**. In this case, the upper electrode of the OLED **310** and the upper electrode of the visible light sensor **2210** may be formed with a trans-reflective electrode, and the lower electrode of the OLED **310** and the lower electrode of the visible light sensor **2210** may be formed with a reflective electrode. For example, the upper electrode of the OLED **310** and the upper electrode of the visible light sensor **2210** may be formed of MgAg, Ag, Mg, Al, and the like. The lower electrode of the OLED **310** and the lower electrode of the visible light sensor **2210** may be formed of Al, Ag, Mo, AlNd, Mo/Al/Mo, TiN, ITO/Ag/ITO, ITO/Al/ITO, ITO/Mo/ITO, and the like.

[0117] In addition, the visible light absorption layer for the visible light sensor **2210** may be formed of an organic material configured to absorb visible light through the whole region of the visible light, as in some example embodiments. For example, it may include any materials suitable for absorbing visible light such as squaraine based, D- π -A based, Bodipy based, phthalocyanine based materials, and the like.

[0118] The fingerprint recognition of the OLED display panel **1000** illustrated in FIGS. 7 and 8 is performed according to the same process as described with references to FIGS. 3 to 6, so the descriptions thereof are omitted.

[0119] In the visible light sensors **210/2210** illustrated in FIGS. 1 to 8, an organic photodiode configured to absorb visible light is exemplified, but the visible light sensors **210/2210** may be embodied by (“may include”) a-Si based P-I-N photodiode, a poly-Si based P-I-N photodiode, a CIGS (Cu, In, Ga, Se) photodiode (III-V photodiode), or a Cd—Te photodiode (II-VI photodiode).

[0120] FIGS. 9A-9C are schematic views of smart phones **1100** including the visible light sensor embedded OLED display panel **1000**.

[0121] FIG. 9A shows that the visible light sensor embedded OLED display panel **1000** recognizes a fingerprint **501**, FIG. 9B shows the case of recognizing an iris **1500**, and FIG.

9C shows the case of recognizing a face **2500**. As shown in FIG. 9B, the OLED display panel **1000** may display an image of the recognition target (e.g., iris) and may further display an icon that highlights and/or overlays the image of the recognition target, for example to provide an observable indication of the recognition target for which a biometric recognition operation is being performed.

[0122] FIGS. 9A-9C show a smart phone **1100** as one example of the display device, but it may be applied to a screen such as a TV as well as for a multi-media player, a tablet PC, or the like that are capable of employing the visible light sensor embedded OLED display panel **1000**, in addition to the smart phone **1100**.

[0123] FIG. 10 is a cross-sectional view showing a visible light sensor embedded OLED display panel that includes a touch sensor according to some example embodiments. The cross-sectional view shown in FIG. 10 may be a cross-sectional view of the OLED display panel **1000** shown in FIG. 1 along view line II-II'.

[0124] Referring to FIG. 10, in some example embodiments, an OLED display panel **1000** may include a touch sensor **1010**. As shown in the cross-sectional view of FIG. 10, the touch sensor **1010** may extend between the cover glass **450** and the OLED light emitter stack **300**, but example embodiments are not limited thereto. For example, in some example embodiments, the cover glass **450** may be between the touch sensor **1010** and the OLED light emitter stack **300**, the OLED light emitter stack **300** may be between the cover glass **450** and the touch sensor **1010**, or the like.

[0125] A touch sensor **1010** may include one or more sensor electrodes in a mold layer and may be electrically connected, via one or more electrical wire with a device (e.g., a transistor) in the driver **100**. The one or more sensor electrodes may be, for example, a transparent electrode, which may be formed of or include indium tin oxide (ITO), zinc oxide (ZnO), indium zinc oxide (IZO), cadmium tin oxide (CTO), graphene, carbon nanotube (CNT), and so forth, an opaque electrode, which may be formed of or include a metal (e.g., copper (Cu), silver (Ag), and aluminum (Al)), or any combination thereof.

[0126] In some example embodiments, the touch sensor **1010** is configured to generate one or more signals based on a recognition target (e.g., finger **500**) contacting a particular pixel (Px) of the OLED display panel **1000**, where separate signals may be generated for different pixels (Px) contacted by the recognition target. Accordingly, particular pixels (Px) in contact with the recognition target may be determined based on processing of said one or more signals generated by the touch sensor **1010**. Such processing and determination may be implemented by processing circuitry as described further herein with reference to FIG. 13.

[0127] While FIG. 10 illustrates example embodiments of the touch sensor **1010** being included in an OLED display panel **1000** featuring a visible light sensor stack **200** between the OLED light emitter stack **300** and the substrate **110**, it will be understood that the touch sensor **1010** may be included in any of the example embodiments of OLED display panels, including OLED display panels that include a visible light sensor in a non-light emitting region of the OLED light emitter stack, as described herein with reference to at least FIGS. 7-8.

[0128] It will be understood that the touch sensor **1010** shown in FIG. 10 is an example: in some example embodiments, the touch sensor **1010** may be any touch sensor known in the art.

[0129] FIGS. 11A-11C are cross-sectional views showing visible light sensor embedded OLED display panels that include an infrared light emitter and an infrared light sensor according to some example embodiments.

[0130] Referring to FIGS. 11A-11C, in some example embodiments, an OLED display panel **1000** may include, in addition to an OLED **310** and a visible light sensor **210**, an infrared photosensor embedded in the OLED display panel **1000**, including an infrared light emitter **310IR** and an infrared light sensor **210IR**. It will be understood that an infrared light emitter **310IR** may be a near infrared (NIR) light emitter, and an infrared light sensor **210IR** may be an NIR light sensor. Accordingly, the OLED display panel **1000** may include an infrared light emitter **310IR** on the substrate **110**, where the infrared light emitter **310IR** is configured to emit infrared light **330IR**, and an infrared light sensor **210IR** on the substrate, where the infrared light sensor **210IR** is configured to detect at least a portion **245IR** of the emitted infrared light **330IR** based on reflection of the portion **245IR** of the emitted infrared light **330IR** from a recognition target. As shown in FIGS. 11A-11C, the infrared light emitter **310IR** may be configured to emit infrared light **330IR** out of the OLED display panel in a same direction as the light **330** emitted by the OLEDs **310**, and the infrared light sensor **210IR** may be configured to detect light **245IR** received at the infrared light sensor **210IR** from the same direction (e.g., light **245IR** is received at the infrared light sensor **210IR** through a same surface through which both the OLEDs **310** and the infrared light emitter **310IR** may emit light).

[0131] As shown in FIGS. 11A-11C, the infrared light emitter **310IR** and the infrared light sensor **210IR** may be embedded in the OLED display panel **1000** according to the same configurations of OLEDs **310** and visible light sensors **210/2210** as described herein with reference to at least FIGS. 1-8. For example, as shown in FIGS. 11A-11C, the infrared light emitter **310IR** may be included in the OLED light emitter stack **300** in one or more particular pixels (Px) of the OLED display panel **1000**, and the infrared light sensor **210IR** may be between one or more non-light emitting regions **800** of the OLED light emitter stack **300** and the substrate **110** (FIGS. 11A-11B) and/or in one or more non-light emitting regions of the OLED light emitter stack **300** that are adjacent to one or more OLEDs **310** of the OLED light emitter stack **300** (FIG. 11C).

[0132] It will be understood that, as shown in FIGS. 11A-11C, the infrared light emitter **310IR** and/or infrared light sensor **210IR** may be included in different pixels (Px) of the OLED display panel **1000** from the one or more pixels (Px) that include one or more visible light sensors **210**, such that a given pixel (Px) and/or sub-pixel of the OLED display panel **1000** that includes an infrared light sensor **210IR** and/or infrared light emitter **310IR** does not include a visible light sensor **210**. It will also be understood that, in some example embodiments, the infrared light emitter **310IR** and/or infrared light sensor **210IR** may be included in a same (common) pixel (Px) of the OLED display panel **1000** as one or more pixels (Px) that include one or more visible light sensors **210**.

[0133] The infrared light emitter **310IR** may include an organic emission layer **311IR** that is configured to emit light

in an infrared wavelength spectrum (e.g., one or more infrared wavelengths in a wavelength spectrum ranging from about 800 nm to about 1500 nm) and a first electrode **313IR** and a second electrode **315IR** formed under and over the organic emission layer **311IR**, respectively (e.g., on opposite surfaces of the organic emission layer **311IR**, as shown in at least FIG. 11A). The organic emission layer **311IR** may be formed of (“may at least partially comprise”) any material that is well-known to be appropriate for emitting light in a desired infrared wavelength. The second electrode **315IR** may be formed as (“may at least partially comprise”) a transparent electrode in order to be configured to enable infrared light emitted from the infrared light emitter **310IR** to exit the OLED display panel **1000**. For example, the second electrode **315IR** may be formed of (“may at least partially comprise”) ITO, IZO, AlZO, AITO, or the like. The first electrode **313IR** may be formed as (“may at least partially comprise”) a reflective electrode configured to enable the emitted infrared light to be emitted toward the second electrode **315IR** through resonance, and the second electrode **315IR** may be a transparent electrode. For example, the second electrode **315IR** may be formed of (“may at least partially comprise”) Al, Ag, Mo, AlNd, Mo/Al/Mo, TiN, ITO/Ag/ITO, ITO/Al/ITO, ITO/Mo/ITO, or the like.

[0134] The infrared light sensor **210IR** may be an organic photodiode including an organic light-absorbing layer **211IR** that is configured to absorb light in an infrared wavelength and a first electrode **213IR** and a second electrode **215IR** formed under and over the organic light-absorbing layer **211IR**, respectively (e.g., on opposite surfaces of the organic light-absorbing layer **211IR**, as shown in at least FIG. 11A). The organic light-absorbing layer **211IR** may be formed of (“may at least partially comprise”) any well-known material appropriate for absorbing (“configured to absorb”) light of an infrared wavelength. In other words, the organic light-absorbing layer **211IR** may be formed of (“may at least partially comprise”) any well-known appropriate material for absorbing (“configured to absorb”) light in a wavelength region (“wavelength spectrum”) of about 800 to about 1500 nm. The second electrode **215IR** of the infrared light sensor **210IR** may at least partially comprise a transparent electrode. In some example embodiments, the second electrode **215IR** may be formed of (“may at least partially comprise”) a transparent electrode having transmittance of about 80% or greater (e.g., equal to or greater than about 80%). For example, the second electrode **215IR** may be formed of (“may at least partially comprise”) ITO, IZO, AITO, carbon nanotube (CNT), graphene, nanosilver (Nano Ag), or the like. The first electrode **213IR** may be formed as (“may at least partially comprise”) a reflective electrode so that the incident infrared light is not transmitted and lost. For example, the first electrode **213IR** may be formed of (“may at least partially comprise”) Al, Ag, Mo, AlNd, Mo/Al/Mo, TiN, ITO/Ag/ITO, ITO/Al/ITO, ITO/Mo/ITO or the like.

[0135] In some example embodiments, in a given pixel (Px) of the OLED display panel **1000** that includes at least one infrared light emitter **310IR**, the infrared light sensor **210IR**, which may also define an infrared sub-pixel, may be included in a same (common) pixel (Px) of the OLED display panel **1000** as red, green, and blue sub-pixels **310R**, **310G**, **310B**. However, it will also be understood that, in some example embodiments, including the example embodiments shown in FIGS. 11A-11C, one or more pixels

(Px) may include an infrared light emitter **310IR** that is included in place of one of the red, green, or blue OLEDs **310** in one of the sub-pixels **310R**, **310G**, **310B**, for example in a position that would otherwise be occupied by the one of the red, green, or blue OLEDs **310** in the one of the sub-pixels **310R**, **310G**, **310B** in a pattern of said red, green, or blue sub-pixels **310R**, **310G**, **310B** in the OLED display panel **1000**. Such pixels (Px) that include an infrared light emitter **310IR** in one of said red, green, or blue sub-pixels **310R**, **310G**, **310B** may be a limited proportion of the total pixels (Px) of the OLED display panel **1000** pixel array, and such pixels (Px) may be included in a limited region of the OLED display panel pixel array.

[0136] FIG. 12 is a schematic view showing various regions of a visible light sensor embedded OLED display panel having different light sensor configurations according to some example embodiments.

[0137] Referring to FIG. 12, the OLED display panel **1000** may include an array of unit pixels (Px) of the OLED display panel **1000**, where each unit pixel (Px) includes at least one OLED light emitter. As shown, the array of unit pixels (Px) may extend through a total area TA of the OLED display panel **1000**. Accordingly, the OLED display panel **1000** may include an array of OLEDs **310** on the substrate **110** and an array of light sensors **210** and/or **210IR**.

[0138] Still referring to FIG. 12, the array of unit pixels (Px) of the OLED display panel **1000** may extend through multiple regions **1201-1206** of the OLED display panel **1000**. Each region **1201-1206** will be understood to be a portion or entirety of the total area of the OLED display panel **1000**.

[0139] As shown, in FIG. 12, the array of unit pixels (Px) may extend through a first region **1201** of the OLED display panel **1000**, where the first region **1201** extends over a total area of the OLED display panel **1000**. Each unit pixel (Px) that extends through the first region **1201** may include at least one OLED **310** of the OLED light emitter stack **300**. Restated, the OLED light emitter stack **300** may be included in each of the pixels (Px) that extend through the first region **1201** and the array of OLEDs **310** may extend throughout the entirety of the first region **1201**.

[0140] Still referring to FIG. 12, the array of unit pixels (Px) may extend through different regions **1202-1206** that are different from the first region **1201** and may be entirely encompassed within the first region **1201**, such that each region **1202-1206** is smaller than the first region **1201** and regions **1202-1206** collectively define the first region **1201**.

[0141] In some example embodiments, different regions **1202-1206** may include different configurations of light emitters and light sensors. For example, each unit pixel (Px) in the second region **1202** of the OLED display panel **1000**, encompassed within the first region **1201**, may include one or more OLEDs **310** and may further include one or more visible light sensors **210/2210**, for example as shown in any of the example embodiments described above with reference to FIGS. 1-8, and furthermore each unit pixel (Px) in the second region **1202** may not include any infrared light emitters **310IR** or infrared light sensors **210IR**. In another example, each unit pixel (Px) in the third region **1204** of the OLED display panel **1000** may include one or more OLEDs **310**, similarly to the unit pixels (Px) in the second region **1202**, and may further include one or more visible light sensors **210** and/or one or more infrared light sensors **210IR**. In some example embodiments, the unit pixels (Px) in the

third region **1204** of the OLED display panel **1000** may include a first pattern of pixels (Px) that include one or more OLEDs **310**, similarly to the unit pixels (Px) in the second region **1202**, and further include one or more infrared light sensors **210IR** and/or one or more infrared light emitters **310IR** but no visible light sensors and a second pattern of pixels (Px) that include one or more OLEDs **310**, similarly to the unit pixels (Px) in the second region **1202**, and further include one or more visible light sensors but not infrared light sensors **210IR** or infrared light emitters **310IR**. In some example embodiments, each unit pixel (Px) in the third region **1204** of the OLED display panel **1000** may include one or more OLEDs **310**, similarly to the unit pixels (Px) in the second region **1202**, and may further include one or more infrared light sensors **210IR** and/or one or more infrared light emitters **310IR** but no visible light sensors **210**. In yet another example, each unit pixel (Px) in the fourth region **1206** of the OLED display panel **1000** may include one or more OLEDs **310**, similarly to the unit pixels (Px) in the second and third regions **1202** and **1204**, but may not include visible or infrared light sensors **210/210IR**. One or more unit pixels (Px) in the third and fourth regions **1204** and **1206** may include one or more infrared light emitters **310IR** in addition to or in place of one or more OLED light emitters that are included in each pixel (Px) in the second region **1202**.

[0142] Restating the above, while the array of OLEDs **310** may extend through the first region **1201**, the array of visible light sensors **210** (which may consist of all of the visible light sensors of the OLED display panel **1000**) may extend through the second region **1202** but may not extend through any of the third and fourth regions **1204**, **1206**. Accordingly, at least the third region **1204** may include at least one OLED **310** and no visible light sensors **210**. In addition, an array of infrared light emitters **310IR** (which may consist of all of the infrared light emitters of the OLED display panel **1000**) and an array of infrared light sensors **210IR** (which may consist of all of the infrared light sensors of the OLED display panel **1000**) may extend through at least a portion of the first region **1201**, for example may not extend through the second region **1202**, may not extend through the third region **1204** and/or fourth region **1206**, may only extend through the third region **1204**, any combination thereof, or the like.

[0143] In some example embodiments, the light emitters and/or light sensors in different regions **1202-1206** of the OLED display panel **1000** may be driven differently during a biometric recognition operation. For example, when a biometric recognition operation is performed at least partially based on a determination that a recognition target (e.g., a fingerprint) has contacted one or more pixels (Px) in the second region **1202**, OLEDs **310** and visible light sensors **210** in one or more, or all, pixels (Px) in the second region **1202** may be driven to emit light or detect incident light, respectively, and some or all of the light emitters and light sensors in the third and fourth regions **1204** and **1206** may be inactive (e.g., not driven), thereby conserving power consumption. In another example, when a biometric recognition operation is performed based on a determination that a recognition target (e.g., a face or iris) is in a proximity (e.g., field of view) of one or more light sensors of the OLED display panel **1000**, the infrared light emitters and infrared light sensors **310IR** and **210IR** in the third region **1204** may be driven to emit light or detect incident light, respectively, and some or all of the OLED light emitters and OLED light

sensors in one or more of the second, third, and fourth regions **1202**, **1204**, and **1206** may be inactive (e.g., not driven), thereby conserving power consumption. It will be understood that example embodiments are not limited to the above examples.

[0144] In some example embodiments, one or more of the regions **1202-1206** may have various shapes and sizes. In FIG. **12**, for example, the second region **1202** includes the center C of the area of the OLED display panel, which is also the center of the area of the first region **1201**, but example embodiments are not limited thereto. Additionally, as shown in FIG. **12**, the second region **1202** does not extend to any of the edges E of the OLED display panel **1000**, but example embodiments are not limited thereto: in some example embodiments, the second region **1202** may extend to one or more of the edges E of the OLED display panel **1000** and/or may not extend through the center C of the OLED display panel **1000**. In some example embodiments, including the example embodiments shown in FIG. **12**, the third region **1204** may extend between at least one side of the second region **1202** and at least one edge of the OLED display panel **1000**. In some example embodiments, including the example embodiments shown in FIG. **12**, the third region **1204** may completely surround the second region **1202** and may be between all sides of the second region **1202** and all edges E of the OLED display panel **1000**, but example embodiments are not limited thereto.

[0145] As shown in FIG. **12**, the third and fourth regions **1204** and **1206** may have a same (common) ring shape and may concentrically surround the second region **1202**, but example embodiments are not limited thereto. For example, the third and fourth regions may have different shapes and may partially surround different portions of the second region **1202**.

[0146] It will be understood that the OLED display panel **1000** may include different quantities of regions than what is shown in FIG. **12**. For example, the OLED display panel **1000** may be limited to a single region **1201** in which all pixels (Px) include identical configurations of OLED light emitters and visible light sensors. In another example, the OLED display panel **1000** may include a greater quantity of separate regions, each having separate sets of pixels (Px) that include separate, respective configurations of light emitters and light sensors, than as shown in FIG. **12**. In another example, in some example embodiments, fourth region **1206** may be absent as a separate region, and the third region **1204** may extend entirely between the second region **1202** as shown in FIG. **12** and the edges E of the OLED display panel **1000**.

[0147] FIG. **13** is a diagram illustrating a display device that includes one or more visible light sensor embedded OLED display panels according to some example embodiments.

[0148] Referring to FIG. **13**, display device **1300** includes a bus **1310**, a processor **1320**, a memory **1330**, and one or more OLED display panels **1340**. As shown, in some example embodiments, the display device **1300** may further include one or more additional devices **1350**. The processor **1320**, a memory **1330**, and one or more OLED display panels **1340** (and where present, the one or more additional devices **1350**) may communicate with one another through the bus **1310**.

[0149] The one or more OLED display panels **1340** may each be any of the visible light sensor embedded OLED display panels included in any of the example embodiments.

[0150] The processor **1320** may include one or more instances of processing circuitry such as hardware including logic circuits; a hardware/software combination such as a processor executing software; or a combination thereof. For example, the processing circuitry more specifically may include, but is not limited to, a central processing unit (CPU), an arithmetic logic unit (ALU), a digital signal processor, a microcomputer, a field programmable gate array (FPGA), a System-on-Chip (SoC), a programmable logic unit, a microprocessor, application-specific integrated circuit (ASIC), etc. In some example embodiments, the processing circuitry may include a non-transitory computer readable storage device, for example a solid state drive (SSD), storing a program of instructions, and a processor configured to execute the program of instructions to implement the functionality of the processor **1320** and/or one or more OLED display panels **1340**.

[0151] Referring back to at least FIGS. 3-8, the processor **1320** may partially or entirely implement the functionality of the OLED display panels **1000** embedded with one or more visible light sensors **210** and/or **2210**, including implementing some or all of the operations illustrated in the operation algorithm in the flowchart of FIG. 3, implementing operations of biometric recognition, for example fingerprint recognition by using of the visible light sensor embedded organic light emitting diode (OLED) display panel according to some example embodiments as shown in FIG. 4, and transmitting and/or receiving signals according to the timing diagram of FIG. 6. Accordingly, the processor **1320** may control display operations of the one or more OLED display panels **1340** to display one or more images and/or may control biometric recognition operations implemented based at least in part upon at least one or more light sensors embedded in one or more OLED display panels **1340**.

[0152] The one or more additional devices **1350** may include one or more communication interfaces (e.g., wireless communication interface, wired interface), user interfaces (e.g., keypad, mouse, button, etc.), power supply and/or power supply interface, any combination thereof, or the like.

[0153] It will be understood that the memory **1330** may store a program of instructions and the processor **1320** may execute the stored program of instructions to implement functionality associated with the display device **1300** and/or one or more OLED display panels **1340**, including performing one or more biometric recognition operations.

[0154] The units and/or modules described herein may be implemented using hardware components and software components. For example, the hardware components may include microphones, amplifiers, band-pass filters, audio to digital convertors, and processing devices. A processing device may be implemented using one or more hardware device configured to carry out and/or execute program code by performing arithmetical, logical, and input/output operations. The processing device(s) may include a processor, a controller and an arithmetic logic unit, a digital signal processor, a microcomputer, a field programmable array, a programmable logic unit, a microprocessor or any other device capable of responding to and executing instructions in a defined manner. The processing device may run an operating system (OS) and one or more software applica-

tions that run on the OS. The processing device also may access, store, manipulate, process, and create data in response to execution of the software. For purpose of simplicity, the description of a processing device is used as singular; however, one skilled in the art will appreciate that a processing device may include multiple processing elements and multiple types of processing elements. For example, a processing device may include multiple processors or a processor and a controller. In addition, different processing configurations are possible, such a parallel processors.

[0155] The software may include a computer program, a piece of code, an instruction, or some combination thereof, to independently or collectively instruct and/or configure the processing device to operate as desired, thereby transforming the processing device into a special purpose processor. Software and data may be embodied permanently or temporarily in any type of machine, component, physical or virtual equipment, computer storage medium or device, or in a propagated signal wave capable of providing instructions or data to or being interpreted by the processing device. The software also may be distributed over network coupled computer systems so that the software is stored and executed in a distributed fashion. The software and data may be stored by one or more non-transitory computer readable recording mediums.

[0156] The methods according to the above-described example embodiments may be recorded in non-transitory computer-readable media including program instructions to implement various operations of the above-described example embodiments. The media may also include, alone or in combination with the program instructions, data files, data structures, and the like. The program instructions recorded on the media may be those specially designed and constructed for the purposes of example embodiments, or they may be of the kind well-known and available to those having skill in the computer software arts. Examples of non-transitory computer-readable media include magnetic media such as hard disks, floppy disks, and magnetic tape; optical media such as CD-ROM discs, DVDs, and/or Blue-ray discs; magneto-optical media such as optical discs; and hardware devices that are specially configured to store and perform program instructions, such as read-only memory (ROM), random access memory (RAM), flash memory (e.g., USB flash drives, memory cards, memory sticks, etc.), and the like. Examples of program instructions include both machine code, such as produced by a compiler, and files containing higher level code that may be executed by the computer using an interpreter. The above-described devices may be configured to act as one or more software modules in order to perform the operations of the above-described example embodiments, or vice versa.

[0157] While this disclosure has been described in connection with what is presently considered to be practical example embodiments, it is to be understood that the inventive concepts are not limited to the disclosed example embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

[0158] It should be understood that example embodiments described herein should be considered in a descriptive sense only and not for purposes of limitation. Descriptions of features or aspects within each device or method according to example embodiments should typically be considered as

available for other similar features or aspects in other devices or methods according to example embodiments. While at least one example embodiment have been particularly shown and described, it will be understood by one of ordinary skill in the art that variations in form and detail may be made therein without departing from the spirit and scope of the claims.

What is claimed is:

1. An OLED display panel, comprising:
 - a substrate;
 - an OLED light emitter on the substrate, the OLED light emitter configured to emit light; and
 - a visible light sensor on the substrate, the visible light sensor configured to detect at least a portion of the emitted light based on reflection of the portion of the emitted light from a recognition target,
 wherein the visible light sensor is
 - in a non-light emitting region adjacent to the OLED light emitter so as to be horizontally aligned with the OLED light emitter in a horizontal direction extending parallel to an upper surface of the substrate, or
 - between the substrate and a non-light emitting region that is adjacent to the OLED light emitter such that the visible light sensor is vertically aligned with the non-light emitting region in a vertical direction extending perpendicular to the upper surface of the substrate.
2. The OLED display panel of claim 1, wherein the visible light sensor is configured to absorb light in an entirety of a wavelength spectrum of visible light.
3. The OLED display panel of claim 1, wherein the visible light sensor includes an organic photodiode including an organic material.
4. The OLED display panel of claim 1, wherein the visible light sensor includes an a-Si-based P-I-N photodiode, a poly-Si-based P-I-N photodiode, a CIGS (Cu—In—Ga—Se) photodiode, or a Cd—Te photodiode.
5. An OLED display panel, comprising:
 - a substrate;
 - an OLED light emitter stack on the substrate, the OLED light emitter stack including a plurality of sub-pixels, including a red OLED sub-pixel, a green OLED sub-pixel, and a blue OLED sub-pixel, each of the red, green, and blue OLED sub-pixels configured to emit light; and
 - a visible light sensor on the substrate, the visible light sensor configured to detect at least a portion of the emitted light based on reflection of the portion of the emitted light from a recognition target, wherein the visible light sensor is
 - in a non-light emitting region of the OLED light emitter stack so as to be horizontally aligned with at least one adjacent OLED sub-pixel of the OLED light emitter stack in a horizontal direction extending parallel to an upper surface of the substrate, or
 - between the substrate and a non-light emitting region of the OLED light emitter stack such that the visible light sensor is vertically aligned with the non-light emitting region of the OLED light emitter stack in a vertical direction extending perpendicular to the upper surface of the substrate.
6. The OLED display panel of claim 5, wherein the visible light sensor is configured to absorb light in an entirety of a wavelength spectrum of visible light.
7. The OLED display panel of claim 5, wherein the visible light sensor includes an organic photodiode including an organic material.
8. The OLED display panel of claim 5, wherein the visible light sensor includes an a-Si-based P-I-N photodiode, a poly-Si-based P-I-N photodiode, a CIGS (Cu—In—Ga—Se) photodiode, or a Cd—Te photodiode.
9. The OLED display panel of claim 5, wherein the visible light sensor is partially overlapped with at least one OLED sub-pixel of the OLED light emitter stack in the vertical direction.
10. The OLED display panel of claim 5, wherein the visible light sensor includes an organic photodiode including a lower electrode, an upper electrode, and a visible light absorption layer between the lower and upper electrodes,
 - the lower electrode is a reflecting electrode, and
 - the upper electrode is a transparent electrode.
11. An OLED display panel, comprising:
 - a substrate;
 - a driver stack on the substrate; and
 - an OLED light emitter stack on the driver stack, the OLED light emitter stack including a plurality of sub-pixels configured to emit light and a visible light sensor, the plurality of sub-pixels including a red OLED sub-pixel, a green OLED sub-pixel, and a blue OLED sub-pixel,
 the visible light sensor is configured to detect at least a portion of the emitted light based on reflection of the portion of the emitted light from a recognition target, wherein the visible light sensor is
 - in a non-light emitting region of the OLED light emitter stack so as to be horizontally aligned with at least one adjacent OLED sub-pixel of the OLED light emitter stack in a horizontal direction extending parallel to an upper surface of the substrate, or
 - in the green OLED sub-pixel.
12. The OLED display panel of claim 11, wherein the visible light sensor is configured to absorb light in an entirety of a wavelength spectrum of visible light.
13. The OLED display panel of claim 11, wherein the visible light sensor includes an organic photodiode including an organic material.
14. The OLED display panel of claim 11, wherein the visible light sensor includes an a-Si-based photodiode, a poly-Si-based P-I-N photodiode, a CIGS (Cu—In—Ga—Se) photodiode, or a Cd—Te photodiode.
15. The OLED display panel of claim 11, wherein the visible light sensor includes an organic photodiode including a lower electrode, an upper electrode, and a visible light absorption layer between the lower and upper electrodes,
 - the lower electrode is a reflecting electrode, and
 - the upper electrode is a transfective electrode.
16. A display device comprising the OLED display panel of claim 1.
17. A display device comprising the OLED display panel of claim 5.
18. A display device comprising the OLED display panel of claim 11.
19. A method for performing biometric recognition of a user of a display device, the display device including a OLED display panel of claim 1, the method comprising:

driving the OLED light emitter to emit light and further driving the visible light sensor to detect at least a portion of the emitted light based on reflection of the portion of the emitted light from a recognition target that is a portion of the user, in response to a determination that the OLED light emitter is turned on, user access to the display device is disabled, and the recognition target is in a certain proximity to the OLED display panel; and

turning off the visible light sensor, granting user access to the display device, and driving the OLED light emitter to display an image, in response to a determination that recognition of the recognition target is completed via comparison of a reference recognition target image with an image of the recognition target generated based on an output signal of the visible light sensor in response to detecting the reflected portion of the emitted light.

20. The method of claim **19**, wherein the determination that the recognition target is in the certain proximity to the OLED display panel is based on receiving a signal from a touch sensor of the OLED display panel.

21. The method of claim **19**, wherein the driving the OLED light emitter includes selectively driving a particular limited set of OLED light emitters of an array of OLED light emitters of the OLED display panel, and

the further driving the visible light sensor includes selectively driving a particular limited set of visible light sensors of an array of visible light sensors of the OLED display panel.

22. The method of claim **21**, wherein the determination that the recognition target is in the certain proximity to the OLED display panel is based on receiving a signal from a touch sensor of the OLED display panel, the signal indicating a limited area, of a total area of a surface of the OLED display panel, that is in contact with the recognition target,

the driving the OLED light emitter includes selectively driving the particular limited set of OLED light emitters that are a limited portion of the array of OLED light emitters that vertically overlap with the limited area in response to a determination that the recognition target is in contact with the limited area, and

the further driving the visible light sensor includes selectively driving the particular limited set of visible light sensors that are a limited portion of the array of visible light sensors that vertically overlap with the limited area in response to the determination that the recognition target is in contact with the limited area.

23. The OLED display panel of claim **1**, further comprising:

an infrared light emitter on the substrate, the infrared light emitter configured to emit infrared light; and

an infrared light sensor on the substrate, the infrared light sensor configured to detect at least a portion of the

emitted infrared light based on reflection of the portion of the emitted infrared light from the recognition target, wherein the infrared light sensor is

in a separate non-light emitting region that is adjacent to the OLED light emitter, or

between the substrate and a separate non-light emitting region that is adjacent to the OLED light emitter.

24. The OLED display panel of claim **1**, further comprising:

an array of OLED light emitters on the substrate, the array of OLED light emitters including the OLED light emitter; and

an array of visible light sensors on the substrate, the array of visible light sensors including the visible light sensor,

wherein the array of OLED light emitters extends through a first region of the OLED display panel, and the array of visible light sensors extends through a second region of the OLED display panel, the second region being smaller than the first region, such that the array of visible light sensors do not extend through at least a third region of the OLED display panel that includes at least one OLED light emitter of the array of OLED light emitters, and no visible light sensors.

25. The OLED display panel of claim **24**, wherein the first region extends over a total area of the OLED display panel,

the second region extends over a limited area of the OLED display panel, and

the third region extends between at least one side of the second region and at least one edge of the OLED display panel.

26. The OLED display panel of claim **25**, wherein the third region completely surrounds the second region and is between all sides of the second region and all edges of the OLED display panel.

27. The OLED display panel of claim **24**, further comprising:

an array of infrared light emitters on the substrate, the array of infrared light emitters configured to emit infrared light; and

an array of infrared light sensors on the substrate, the array of infrared light sensors configured to detect at least a portion of the emitted infrared light based on reflection of the portion of the emitted infrared light from the recognition target,

wherein the array of infrared light emitters and the array of infrared light sensors extend through at least a portion of the first region.

28. The OLED display panel of claim **27**, wherein the array of infrared light emitters and the array of infrared light sensors do not extend through the second region.

29. The OLED display panel of claim **27**, wherein the array of infrared light emitters and the array of infrared light sensors do not extend through the third region.

* * * * *

专利名称(译)	可见光传感器嵌入式有机发光二极管显示面板和包括该面板的显示装置		
公开(公告)号	US20200111851A1	公开(公告)日	2020-04-09
申请号	US16/590886	申请日	2019-10-02
[标]申请(专利权)人(译)	三星电子株式会社		
申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
当前申请(专利权)人(译)	SAMSUNG ELECTRONICS CO. , LTD.		
[标]发明人	PARK KYUNG BAE YUN SUNG YOUNG LEE GAE HWANG JIN YONG WAN HEO CHUL JOON		
发明人	PARK, KYUNG BAE YUN, SUNG YOUNG LEE, GAE HWANG JIN, YONG WAN HEO, CHUL JOON		
IPC分类号	H01L27/32 H01L31/105		
CPC分类号	H01L27/323 H01L27/3234 H01L31/105 H01L27/3211 G06K9/0004 H01L27/3218 H01L27/3227 H01L27/3244 H01L51/5203 G06F21/32 G06K9/2018 G09G2360/147 G06F3/0412 H01L27/307		
优先权	1020180120055 2018-10-08 KR		
外部链接	Espacenet USPTO		

摘要(译)

OLED显示面板可以包括：基板；在基板上的OLED发光器，其被配置为发射光；以及在基板上的可见光传感器，并且被配置为基于至少一部分发射光的反射来检测发射的光的至少一部分。从识别目标发出的光。可见光传感器在与OLED发光器相邻的非发光区域中，以在与基板的上表面平行或在基板与非发光器之间延伸的水平方向上与OLED发光器水平对准。-与OLED发光器相邻的发光区域，使得可见光传感器在垂直于基板的上表面延伸的垂直方向上与非发光区域垂直对准。

