



US 20150171369A1

(19) **United States**

(12) **Patent Application Publication**
XIE

(10) **Pub. No.: US 2015/0171369 A1**

(43) **Pub. Date: Jun. 18, 2015**

(54) **ORGANIC LIGHT EMITTING DISPLAY APPARATUS ENCAPSULATED WITH HYDROPHOBIC ORGANIC FILM AND MANUFACTURING METHOD THEREOF**

Publication Classification

(51) **Int. Cl.**
H01L 51/52 (2006.01)
H01L 51/56 (2006.01)
(52) **U.S. Cl.**
CPC *H01L 51/5256* (2013.01); *H01L 51/56* (2013.01)

(71) Applicants: **Shanghai Tianma AM-OLED Co., Ltd.**, Shanghai (CN); **Tianma Micro-Electronics Co., Ltd.**, Shenzhen (CN)

(72) Inventor: **Zaifeng XIE**, Shanghai (CN)

(57) **ABSTRACT**


(21) Appl. No.: **14/463,569**


(22) Filed: **Aug. 19, 2014**

(30) **Foreign Application Priority Data**

Dec. 18, 2013 (CN) 201310697551.3


An organic light emitting display apparatus is disclosed. The display apparatus includes a substrate, an organic light emitting unit on the substrate, and a film encapsulation layer on the organic light emitting unit. The film encapsulation layer includes a hydrophobic organic layer disposed at an outermost portion of the film encapsulation layer.

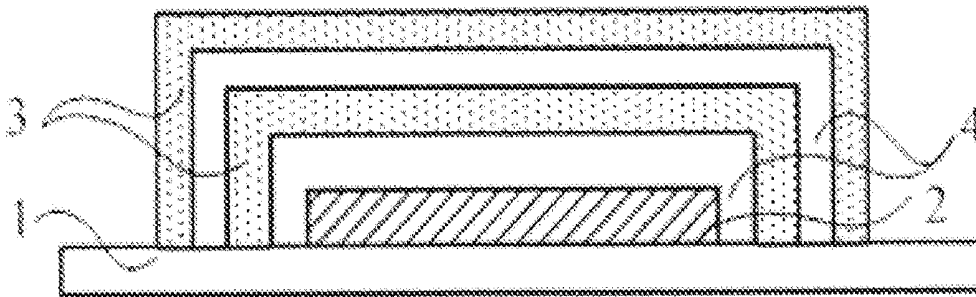

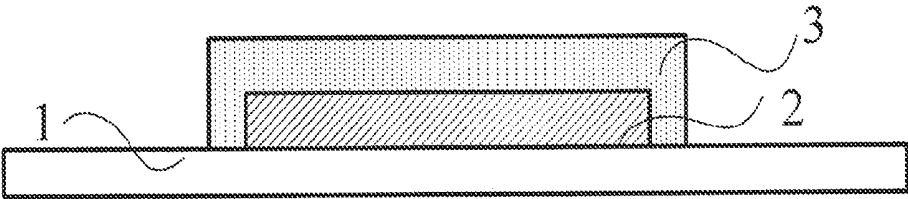


10

FIG. 1

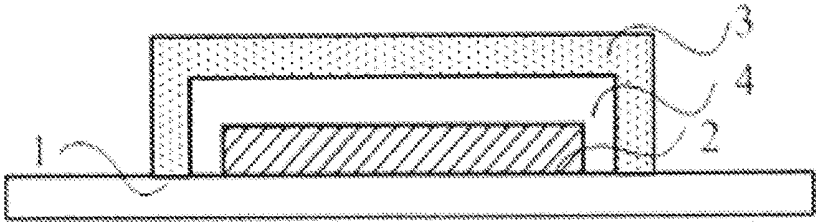

10

FIG. 2

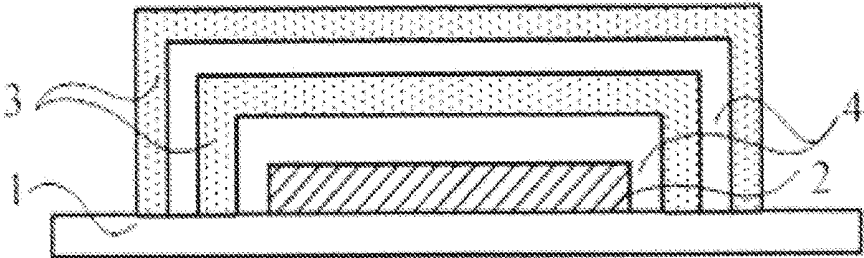

10

FIG. 3

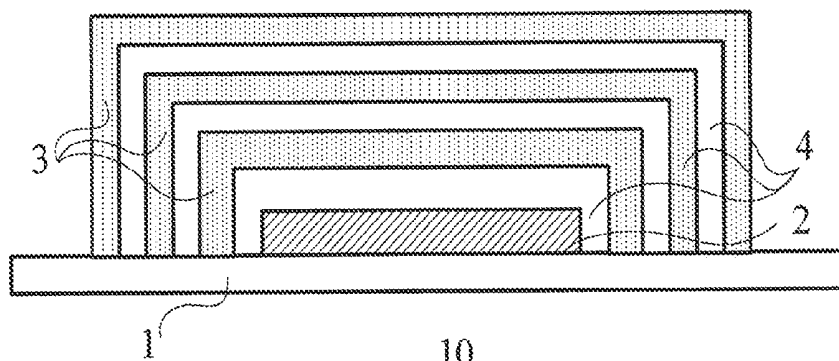


FIG. 4

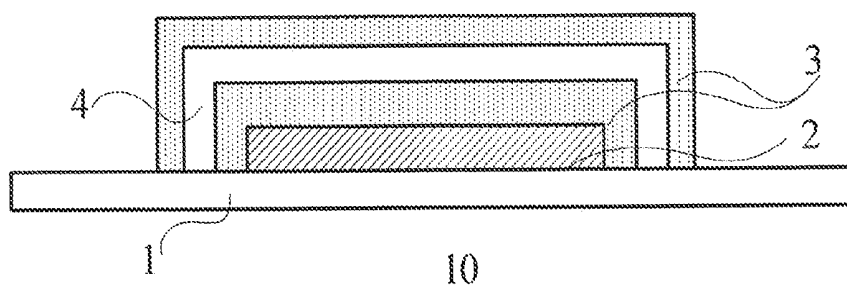


FIG. 5

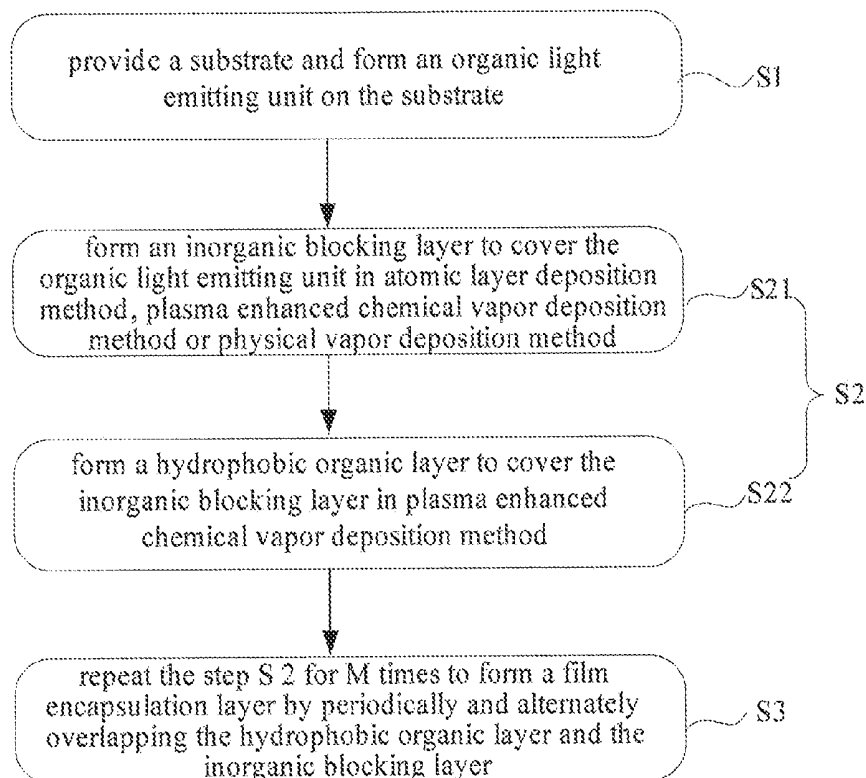


FIG. 6




FIG. 7a



FIG. 7b

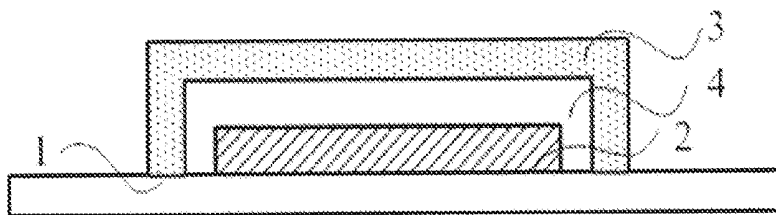


FIG. 7c

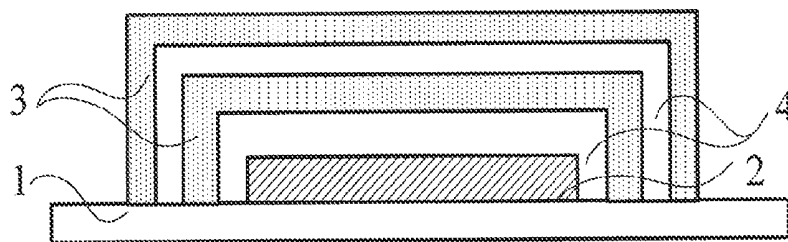


FIG. 7d

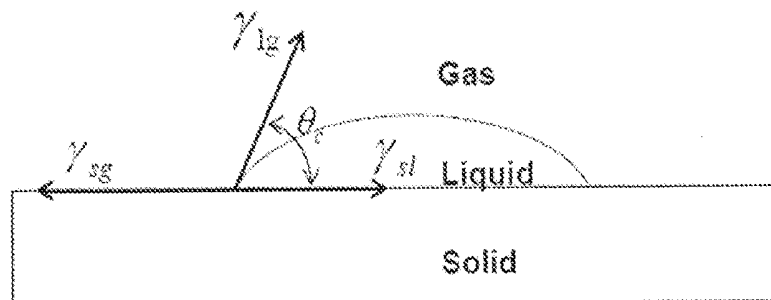


FIG. 8

**ORGANIC LIGHT EMITTING DISPLAY
APPARATUS ENCAPSULATED WITH
HYDROPHOBIC ORGANIC FILM AND
MANUFACTURING METHOD THEREOF**

CROSS-REFERENCES TO RELATED
APPLICATIONS

[0001] This application claims the benefit of priority to Chinese Patent Application No. 201310697551.3, filed with the Chinese Patent Office on Dec. 18, 2013 and entitled "ORGANIC LIGHT EMITTING DISPLAY APPARATUS ENCAPSULATED WITH HYDROPHOBIC ORGANIC FILM AND MANUFACTURING METHOD THEREOF", the content of which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

[0002] The present disclosure relates to the technical field of organic light emitting display, and particularly to an organic light emitting display apparatus encapsulated with a hydrophobic organic film, a manufacturing method thereof, and a hydrophobic organic composite material.

BACKGROUND OF THE INVENTION

[0003] Since an organic light emitting display generally known as an OLED display is self-luminescent, the OLED display has a lower power consumption, a higher brightness and a higher response speed as compared with the conventional liquid crystal display. Thus, the OLED display is studied as a main research object in the field of the display.

[0004] The OLED display includes an organic light emitting layer having a light emitting function, which is very sensitive to external environmental factors such as moisture and oxygen. Thus, if an OLED display stand is exposed to the environment with the moisture or oxygen, the performances of the devices in the OLED display may be significantly deteriorated or be completely damaged. In order to improve a service life of the OLED and a stability of the device, a sealing process must be adopted to encapsulate the device. For example, in an existing organic light emitting diode (OLED) display, an encapsulation structure with multiple blocking layers is configured to isolate the display from moisture and oxygen. However, in the conventional technology, the blocking layer is generally made from an inorganic material, which results in some problems. For example, since each of the film layers is made from an inorganic material, the deposited film has a large internal stress, and the produce has a low reliability. The produce, generated by depositing the inorganic materials, has unavoidable defects such as micro cracks and impurity doping, which may result in an adverse effect for the encapsulation.

BRIEF SUMMARY OF THE INVENTION

[0005] One inventive aspect is an organic light emitting display apparatus. The display apparatus includes a substrate, an organic light emitting unit on the substrate, and a film encapsulation layer on the organic light emitting unit. The film encapsulation layer includes a hydrophobic organic layer disposed at an outermost portion of the film encapsulation layer.

[0006] Another inventive aspect is a method for manufacturing an organic light emitting display apparatus. The method includes providing a substrate, forming an organic

light emitting unit on the substrate, and forming a film encapsulation layer covering the organic light emitting unit. Forming the film encapsulation layer includes forming at least a hydrophobic organic layer covering the organic light emitting unit with a plasma enhanced chemical vapor deposition method. In addition, the film encapsulation layer includes the hydrophobic organic layer, and the hydrophobic organic layer is disposed at an outermost portion of the film encapsulation layer.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] In order to more clearly explain the technical solutions according to the embodiments of the present disclosure, the accompanying drawings used in the description of the embodiments will be briefly described below. It is obvious that the accompanying drawings in the following description are only some embodiments of the present disclosure. For those skilled in the art, other accompanying drawings may be obtained according to these accompanying drawings without any creative work.

[0008] FIG. 1 is a schematic diagram of an organic light emitting display apparatus according to a first embodiment;

[0009] FIG. 2 is a schematic diagram of an organic light emitting display apparatus according to a second embodiment;

[0010] FIG. 3 is a schematic diagram of another organic light emitting display apparatus according to the second embodiment;

[0011] FIG. 4 is a schematic diagram of yet another organic light emitting display apparatus according to the second embodiment;

[0012] FIG. 5 is a schematic diagram of an organic light emitting display apparatus according to a third embodiment;

[0013] FIG. 6 is a schematic diagram of a method for manufacturing an organic light emitting display apparatus according to a fourth embodiment;

[0014] FIG. 7a to FIG. 7d are flowcharts of a method for manufacturing an organic light emitting display apparatus according to the fourth embodiment; and

[0015] FIG. 8 is a principle diagram of forming a liquid droplet on a solid surface by gas.

DETAILED DESCRIPTION OF THE PREFERRED
EMBODIMENTS

[0016] The technical solutions according to the embodiment of the present disclosure will be described clearly and thoroughly below in conjunction with the accompanying drawings. It is obvious that the embodiments described are only a part of and not all of the embodiments according to the present disclosure. All the other embodiments obtained by those skilled in the art based on the embodiments in the present disclosure without any creative work belong to the protection scope of the present disclosure.

[0017] In order to more clearly illustrate the present disclosure, the components not mentioned in the description is omitted in the accompanying drawings, and the same reference indicates similar elements throughout the whole description.

[0018] In addition, sizes and thicknesses of the structural assemblies are shown randomly for convenience of illustrating, the present disclosure is not limited thereto.

[0019] In the accompanying drawings, the thicknesses of a layer, a film, a panel, and a region are enlarged for clarity. It

should be understood that when an element such as a layer, a film, a region or substrate is referred to as being “on” the other element, it can be directly on the other element or an intervening element may also be presented. In contrast, when an element is referred to as “directly on” the other element, there is no an intervening element.

[0020] An organic light emitting display apparatus encapsulated with a hydrophobic organic film, a manufacturing method thereof, and a hydrophobic organic composite material are provided according to the disclosure. The organic light emitting display apparatus includes: a substrate, an organic light emitting unit formed on the substrate; and a film encapsulation layer formed on the organic light emitting unit, wherein the film encapsulation layer includes at least a hydrophobic organic layer disposed at an outermost structure of the film encapsulation layer. Thus, when the moisture enters the OLED, the hydrophobic organic layer, as a first line of defense, may block moisture effectively, by which the OLED is prevented from immersing. Furthermore, the hydrophobic organic layer may eliminate the stress generated by an inorganic blocking layer to minimize the stress of the overall film encapsulation layer.

[0021] In the present disclosure, the plasma is polymerized to form a hydrophobic organic layer in plasma enhanced chemical vapor deposition (PECVD) method by using fluorinated silane and silane as a precursor. The hydrophobic organic layer may include different components due to different process conditions. Therefore, the nature of the hydrophobic organic layer may be easily adjusted as required. In addition, the hydrophobic organic layer includes chemical bonds of C—F, Si—C, Si—O—Si, C—H, and the like.

[0022] As shown in FIG. 1, an organic light emitting display apparatus 10 encapsulated with a hydrophobic organic film is provided according to a first embodiment of the present disclosure, which includes: a substrate 1, an organic light emitting unit 2; and a film encapsulation layer. The film encapsulation layer includes at least a hydrophobic organic layer 3.

[0023] The organic light emitting unit 2 is formed on the substrate 1; and the film encapsulation layer is formed on the organic light emitting unit 2. The film encapsulation layer includes at least the hydrophobic organic layer 3 disposed at the outermost structure of the film encapsulation layer.

[0024] A contact angle between the hydrophobic organic layer 3 and the moisture is 90° to 170°, and more preferably is 110° to 160°.

[0025] FIG. 8 is a principle diagram of forming a liquid-droplet on a solid surface by gas, in which the following equation is satisfied.

$$\gamma_{sg} = \gamma_{sl} + \gamma_{lg} \cos \theta_c$$

[0026] where θ_c is an angle where an interface of liquid and vapor meets a solid surface, which is generally known as a contact angle;

[0027] γ_{sg} is a solid-vapor interfacial energy; γ_{sl} is a solid-liquid interfacial energy; and γ_{lg} is a liquid-vapor interfacial energy.

[0028] When the contact angle θ_c of the moisture (e.g. water) and a surface of a certain material is greater than 90°, the surface of the material would not be wetted by the moisture, i.e., this material is a hydrophobic material. Therefore, in order to prevent the organic light emitting unit 2 from being wetted by moisture and the like, at least the hydrophobic organic layer 3 may be disposed at the outermost of the film

encapsulation layer. Since the contact angle between the hydrophobic organic layer 3 and the moisture is 90° to 170°, which is greater than 90°, the hydrophobic organic layer has a good impermeability. Therefore, the hydrophobic organic layer 3 may prevent moisture from penetrating rapidly into the organic light emitting display device 10, a lag time of moisture penetrating is increased and thus the service life of the devices such as the organic light emitting element 2 is lengthened.

[0029] The hydrophobic organic layer 3 may be a fluorinated hybrid polymer organic film having a good hydrophobicity, which is manufactured in plasma enhanced chemical vapor deposition method by using fluorinated silane and silane with hydrophobicity as a precursor. Preferably, the fluorinated hybrid polymer organic film is manufactured by selecting heptadecafluorodecyl trimethoxysilane (FAS-17) and tetramethoxysilane (TMS) as a precursor. The manufactured fluorinated hybrid polymer organic film includes, in atomic percent, 10 at % to 50 at % of fluorine atom F, 1 at % to 30 at % of silicon atom Si, 1 at % to 30 at % of oxygen atom O, and 15 at % to 50 at % of carbon atom C.

[0030] In addition, the fluorinated hybrid polymer organic film contains chemical bonds of C—F, Si—C, Si—O—Si, C—H, and the like, which makes it having a good hydrophobicity.

[0031] As shown in FIG. 2, an organic light emitting display apparatus 10 encapsulated with a hydrophobic organic film is provided according to a second embodiment of the present disclosure. The second embodiment differs from the first embodiment in that the film encapsulation layer further includes an inorganic blocking layer 4. Other structures in the second embodiment are basically the same as that disclosed according to the first embodiment, which will not be described herein.

[0032] Specifically, the film encapsulation layer further includes an inorganic blocking layer 4 located between the organic light emitting unit 2. and the hydrophobic organic layer 3. The hydrophobic organic layer 3 is disposed at the outermost structure of the film encapsulation layer,

[0033] The inorganic blocking layer 4 is formed in atomic layer deposition (ALD) method, plasma enhanced chemical vapor deposition (PECVD) method or physical vapor deposition (PVD) method. Generally, the inorganic blocking layer 4 is optionally made from one or more of a metal oxide, a metal nitride, a silicon oxide or a silicon nitride, such as, Al₂O₃, TiO₂, ZrO, SiO₂, MON, AlN, SiON, ZnO, ZnS, MgO or MgS.

[0034] The hydrophobic organic layer 3 has a thickness in a range of 500 nm to 3000 nm. The inorganic blocking layer 4 has a thickness in a range of 300 nm to 1000 nm. The thickness of the hydrophobic organic layer 3 is larger than the thickness of the inorganic blocking layer 4, and thus the hydrophobic organic layer 3 may eliminate the stress generated by an inorganic blocking layer 4. The stress is a disadvantage to the organic light emitting unit. in general, the thicker the thickness of the hydrophobic organic layer 3 and the inorganic blocking layer 4 is, the better the impermeability is. However, in practice, it is necessary to consider an effect of a thickness of the whole film encapsulation layer on the lighting and thinning of the organic light emitting display device and other process factors. Thus, above thickness range is generally selected.

[0035] In the film encapsulation layer according to the embodiment, the hydrophobic organic layer 3 is disposed at

the outermost structure of the film encapsulation layer, and the inorganic blocking layer 4 is located between the organic light emitting unit 2 and the hydrophobic organic layer 3. Due to the presence of the inorganic blocking layer 4, as compared with the case that only the single hydrophobic organic layer 3 is used in the film encapsulation layer, a curved path along which the moisture immerses is provided, and thus the lag time is further increased and the impermeability is improved. In this case, the moisture permeability of the film encapsulation layer is smaller than 10^{-6} g/m²/day. In addition, the hydrophobic organic layer 3 may further eliminate the residual rigid stress, which is caused by the inorganic blocking layer 4 in a certain extent and result in an adverse effect on the organic light emitting unit 2.

[0036] Of course, a specific structure of the film encapsulation layer may also be further optimized. Specifically, the film encapsulation layer is formed by periodically and alternately overlapping the hydrophobic organic layer 3 and the inorganic blocking layer 4, and disposing the hydrophobic organic layer 3 at the outermost structure of the film encapsulation layer. The number of layers, each of which includes one hydrophobic organic layer 3 and one inorganic blocking layer 4 which are overlapped, is N, where $1 \leq N \leq 10$, and N is a positive integer, more preferably, $1 < N \leq 5$, and N is a positive integer. The film encapsulation layer has a thickness in a range of 0.5 μm to 10 μm . The thickness of the film encapsulation layer may depend on the number of layers, each of which includes one hydrophobic organic layer 3 and one inorganic blocking layer 4 which are overlapped. However, the above thickness of the film encapsulation layer is preferable in the term of the whole structure of an organic light emitting device.

[0037] As shown in FIG. 3 and FIG. 4, a film encapsulation layer of an organic light emitting display apparatus 10 shown in FIG. 3 differs from that of above described organic light emitting display apparatus shown in FIG. 2 in that: the hydrophobic organic layer 3 and the inorganic blocking layer 4 are periodically and alternately overlapped two times, and the hydrophobic organic layer 3 is disposed at the outermost structure of the film encapsulation layer.

[0038] A film encapsulation layer of an organic light emitting display apparatus 10 shown in FIG. 4 differs from that of above described organic light emitting display apparatus shown in FIG. 2 in that: the hydrophobic organic layer 3 and the inorganic blocking layer 4 are periodically and alternately overlapped three times, and the hydrophobic organic layer 3 is disposed at the outermost structure of the film encapsulation layer.

[0039] The film encapsulation layer may be formed by periodically and alternately overlapping the hydrophobic organic layer 3 and the inorganic blocking layer 4. Thus, the curved path along which the moisture immerses is increased, the lag time is further increased, and thus the impermeability of the whole film encapsulation layer is improved. In addition, as shown in

[0040] FIG. 3 and FIG. 4, the inorganic blocking layer 4 is generally sandwiched between two hydrophobic organic layers 3, and the thickness of the inorganic blocking layer 4 is smaller than the thickness of the hydrophobic organic layer 3. Therefore the stress generated by depositing the inorganic blocking layer 4 may be eliminated.

[0041] The number of layers, each of which includes one hydrophobic organic layer 3 and one inorganic blocking layer 4 which are alternately overlapped, may be adjusted as

required, which will not be described herein and is not shown in the accompanying drawings. The present disclosure is not limited to the above embodiments.

[0042] As shown in FIG. 5, an organic light emitting display apparatus 10 encapsulated with a hydrophobic organic film is provided according to a third embodiment of the present disclosure, which has a structure similar with the structure disclosed according to the first embodiment, which will not be described herein.

[0043] Specifically, the third embodiment differs from the second embodiment in that: the film encapsulation layer includes multiple hydrophobic organic layers 3. One of the hydrophobic organic layers 3 may be disposed at the outermost structure of the film encapsulation layer. Another hydrophobic organic layer 3 may be disposed at the innermost structure of the film encapsulation layer, i.e., the organic light emitting unit 2 may be directly covered by the hydrophobic organic layer 3, as shown in FIG. 5.

[0044] The film encapsulation layer may be formed by periodically and alternately overlapping the hydrophobic organic layers 3 and the inorganic blocking layer 4. One of hydrophobic organic layers 3 may be disposed at the outermost structure of the film encapsulation layer, and another hydrophobic organic layer 3 may be disposed at the innermost structure of the film encapsulation layer. The number of layers, each of which includes one hydrophobic organic layer 3 and one inorganic blocking layer 4 which are alternately overlapped, is N, where $1 \leq N \leq 10$, and N is a positive integer; more preferably $1 \leq N \leq 5$, and N is a positive integer. The film encapsulation layer has a thickness in a range of 0.5 μm to 10 μm .

[0045] The number of layers, each of which includes one hydrophobic organic layer 3 and one inorganic blocking layer 4 which are alternately overlapped, may be adjusted as required, which will not be described herein and is not shown in the accompanying drawings. The present disclosure is not limited to the above embodiments.

[0046] As shown in FIG. 6 and FIGS. 7a to 7d, based on the first, second and third embodiments, a fourth embodiment of the present disclosure discloses a method for manufacturing an organic light emitting display apparatus. The method includes the following Step S1 to Step S3.

[0047] In Step S1, a substrate 1 is provided and an organic light emitting unit 2 is formed on the substrate 1, as shown in FIG. 7a.

[0048] In Step S2, a film encapsulation layer is formed to cover the organic light emitting unit 2. Specifically, Step S2 includes: forming at least a hydrophobic organic layer 3 for covering the organic light emitting unit 2 in plasma enhanced chemical vapor deposition method. The film encapsulation layer includes at least the hydrophobic organic layer 3 disposed at an outermost structure of the film encapsulation layer. A contact angle between the hydrophobic organic layer and moisture is 90° to 170° , and more preferably is 110° to 160° .

[0049] Step S2 includes Step S21 and Step S22.

[0050] Specifically, Step S21 includes: forming an inorganic blocking layer 4 to cover the organic light emitting unit 2 in atomic layer deposition (ALD,) method, plasma enhanced chemical vapor deposition (PECVD) method or physical vapor deposition (CVD) method. The inorganic blocking layer 4 is made from one or more of a metal oxide, a metal nitride, a silicon oxide or a silicon nitride, such as, Al_2O_3 , TiO_2 , ZrO , SiO_2 , AlON , AlN , SiON , ZnO , ZnS , MgO

or MgS. The inorganic blocking layer 4 has a thickness in a range of 300 nm to 1000 nm, as shown in FIG. 7b. It is preferable to form the inorganic blocking layer 4 in plasma enhanced chemical vapor deposition (PECVD) method, because the hydrophobic organic layer 3 in the next step S22 is also formed in PECVD. In this way, the same process is employed in two steps, and the process is simple.

[0051] Specially, Step S22 includes: forming the hydrophobic organic layer 3 to cover the inorganic blocking layer 4 in plasma enhanced chemical vapor deposition method by using fluorinated silane and silane as a precursor, preferably, using heptadecafluorodecyl trimethoxysilane and tetramethoxysilane as a precursor, as shown in FIG. 7c. The hydrophobic organic layer 3 has a thickness in a range of 500 nm. to 3000 nm. The thickness of the hydrophobic organic layer 3 is larger than the thickness of the inorganic blocking layer 4, and thus the stress generated by the inorganic blocking layer 4 can be eliminated.

[0052] Furthermore, the method for manufacturing the organic light emitting display apparatus further includes:

[0053] Step S3, repeating the Step S2 by M times to form the film encapsulation layer by periodically and alternately overlapping the hydrophobic organic layer 3 and the inorganic blocking layer 4, where $0 \leq M \leq 10$, and M is a positive integer. In FIG. 7d, only $M=1$, that is, Step S2 is repeatedly performed for one time, as shown in FIG. 7d. However, the present disclosure is not limited thereto. The repeating times may depend on the actual product and process conditions.

[0054] in Step S2, the film encapsulation layer for covering the organic light emitting unit 2 is formed. The film encapsulation layer includes multiple hydrophobic organic layers 3. One of the hydrophobic organic layers 3 may be disposed at the innermost structure of the film encapsulation layer, i.e., the hydrophobic organic layer 3 directly covers the organic light emitting unit 2. In addition, another hydrophobic organic layer 3 may be disposed at the outermost structure of the film encapsulation layer. The forming sequence of the film encapsulation layer may be adjusted suitably, which is not limited to the method described above.

[0055] In addition, it should be noted that the hydrophobic organic layer 3 is a fluorinated hybrid polymer organic film, which is described in the first embodiment and will be omitted here.

[0056] Based on the first, second, third, and fourth embodiments, a fifth embodiment of the present disclosure discloses a hydrophobic organic composite material, which includes a fluorinated hybrid polymer organic film manufactured in plasma enhanced chemical vapor deposition method (PECVD) by using fluorinated silane and silane as a precursor, more preferably, using heptadecafluorodecyl trimethoxysilane (FAS-17) and tetramethoxysilane (TMS) as a precursor. A contact angle between the hydrophobic organic layer and moisture is 90° to 170° , and more preferably is 110° to 160° .

[0057] The fluorinated hybrid polymer organic film includes, in atomic percent, 10 to 50 at % of fluorine atom F, 1 at % to 30 at % of silicon atom Si, 1 at % to 30 at % of oxygen atom O, and 15 at % to 50 at % of carbon atom C. The fluorinated hybrid polymer organic film contains chemical bonds of C—F, Si—C, Si—O—Si, C—H, and the like, which makes it having a good hydrophobicity. A contact angle between the fluorinated hybrid polymer organic film and the moisture is 110° to 170° .

[0058] This embodiment discloses a method for manufacturing the above hydrophobic organic composite material, which includes:

[0059] providing a substrate in the case that a pressure in a reaction chamber is lower than 100 Pa, more preferably 25 Pa to 50 Pa, where the substrate has a temperature lower than 100 Celsius degree, and more preferably 50 Celsius degree to 70 Celsius degree;

[0060] using fluorinated silane and silane as a precursor, generally using heptadecafluorodecyl trimethoxysilane (FAS-17) and tetramethoxysilane (TMS) as a precursor, and using an inert gas, generally Ar, as a carrier gas, wherein a flow ratio of fluorinated silane to silane is 1:10-10:1, more preferably is 1:1; and

[0061] depositing fluorinated silane and silane on the substrate in plasma enhanced chemical vapor deposition method to form the fluorinated hybrid polymer organic film.

[0062] The hydrophobicities of the fluorinated hybrid polymer organic films formed at different reaction conditions are shown in table 1, where the substrate has a temperature of 70 Celsius degree, the power of the carrier gas Ar is 300 W, and a distance from an upper electrode to the substrate is 100 mm.

TABLE 1

	contact angle	Pressure of Reaction chamber/Pa	Flow ratio (FAS-17/TMS)
First embodiment	118°	25	1/1
Second embodiment	120°	30	1/1
Third embodiment	143°	40	1/1
Fourth embodiment	160°	50	1/1
Comparative example	102°	50	Only FAS-17

[0063] Referring to table 1, a contact angle between the fluorinated hybrid polymer organic film and the moisture is greater than 110° , thus the fluorinated hybrid polymer organic film has a good hydrophobicity.

[0064] Through elemental analysis, the elements in the fluorinated hybrid polymer organic films manufactured at above different conditions are shown in atomic percentages/at % in detail in table 2. Atomic percentage of the elements in the fluorinated hybrid polymer organic film manufactured according to the fourth embodiment is shown in table 2, where the contact angle between the fluorinated hybrid polymer organic film and the moisture is 160° .

TABLE 2

	Si/at %	F/at %	C/at %	O/at %
Fourth embodiment	15	40	35	10
Comparative Example	10	42	29	19

[0065] In addition, the structure of the fluorinated hybrid polymer organic film manufactured is analyzed by an infrared (IR) spectroscopy, to see chemical bonds contained in the manufactured fluorinated hybrid polymer organic film: Si—O—Si (a stretching vibration peak is at 1100 cm^{-1} , 810 cm^{-1} and 420 cm^{-1}), C—Fx (a stretching vibration peak is in a range of 1120 cm^{-1} to 1350 cm^{-1}), Si—CHx. (a stretching vibration peak is in a vicinity of 1270 cm^{-1}).

[0066] The embodiments of the present invention are described herein in a progressive manner, with the emphasis of each of the embodiments on the difference between it and

the other embodiments; hence, for the same or similar parts between the embodiments, one can refer to the other embodiments.

[0067] The above description of the disclosed embodiments enables those skilled in the art to implement or utilize the present invention. It will be apparent for those skilled in the art to modify the embodiments in various ways. The general principles defined herein can be implemented in other embodiments without departing from the spirit and the scope of the present invention. Therefore, the present invention is not limited to these embodiments shown herein, but includes the broadest scope consistent with the principles and the novelty features disclosed herein.

1. An organic light emitting display apparatus, comprising: a substrate, an organic light emitting unit on the substrate; and a film encapsulation layer on the organic light emitting unit, wherein the film encapsulation layer comprises a hydrophobic organic layer disposed at an outermost portion of the film encapsulation layer.
2. The organic light emitting display apparatus according to claim 1, wherein a contact angle between the hydrophobic organic layer and water ranges from 90° to 170°.
3. The organic light emitting display apparatus according to claim 2, wherein a contact angle between the hydrophobic organic layer and water ranges from 110° to 160°.
4. The organic light emitting display apparatus according to claim 1, wherein the hydrophobic organic layer is a fluorinated hybrid polymer organic film, and the fluorinated hybrid polymer organic film comprises, in atomic percent, 10 at % to 50 at % of fluorine atom F, 1 at % to 30 at % of silicon atom Si, 1 at % to 30 at % of oxygen atom O, and 15 to 50 at % of carbon atom C.
5. The organic light emitting display apparatus according to claim 1, wherein the film encapsulation layer further comprises at least an inorganic blocking layer disposed between the organic light emitting unit and the hydrophobic organic layer.
6. The organic light emitting display apparatus according to claim 5, wherein the film encapsulation layer comprises alternately overlapping one or more hydrophobic organic layers and one or more inorganic blocking layers.
7. The organic light emitting display apparatus according to claim 6, wherein the film encapsulation layer comprises a plurality of layers, wherein each layer includes one hydrophobic organic layer and one inorganic blocking layer which are overlapped, and wherein the number of the layers is N, where $1 \leq N \leq 10$, and N is a positive integer.
8. The organic light emitting display apparatus according to claim 7, wherein the film encapsulation layer comprises a plurality of layers, wherein each layer includes one hydrophobic organic layer and one inorganic blocking layer which are overlapped, and the number of the layers is N, where $1 \leq N \leq 5$, and N is a positive integer.
9. The organic light emitting display apparatus according to claim 1, wherein the hydrophobic organic layer has a thickness in a range of 500 nm to 3000 nm.
10. The organic light emitting display apparatus according to claim 5, wherein the inorganic blocking layer has a thickness in a range of 300nm to 1000nm.
11. The organic light emitting display apparatus according to claim 5, wherein the film encapsulation layer has a thickness in a range of 0.5 μm to 10 μm .

12. The organic light emitting display apparatus according to claim 4, wherein the hydrophobic organic layer is made from a precursor comprising fluorinated silane and silane.

13. The organic light emitting display apparatus according to claim 12, wherein the hydrophobic organic layer is made from a precursor comprising heptadecafluorodecyl trimethoxysilane and tetramethoxysilane.

14. The organic light emitting display apparatus according to claim 12, wherein the hydrophobic organic layer is formed with a plasma enhanced chemical vapor deposition method.

15. The organic light emitting display apparatus according to claim 5, wherein the inorganic blocking layer comprises one or more of a metal oxide, a metal nitride, a silicon oxide, and a silicon nitride.

16. The organic light emitting display apparatus according to claim 15, wherein the inorganic blocking layer is formed with an atomic layer deposition method, a plasma enhanced chemical vapor deposition method, or a physical vapor deposition method.

17. A method for manufacturing an organic light emitting display apparatus, comprising:

- providing a substrate;
- forming an organic light emitting unit on the substrate; and
- forming a film encapsulation layer covering the organic light emitting unit, wherein the film encapsulation layer comprises a hydrophobic organic layer disposed at an outermost portion of the film encapsulation layer.

18. The method for manufacturing the organic light emitting display apparatus according to claim 17, where forming the film encapsulation layer comprises:

- forming an inorganic blocking layer covering the organic light emitting unit with an atomic layer deposition method, a plasma enhanced chemical vapor deposition method, or a physical vapor deposition method; and
- forming the hydrophobic organic layer covering the inorganic blocking layer with a plasma enhanced chemical vapor deposition method.

19. The method for manufacturing the organic light emitting display apparatus according to claim 18, further comprising:

- alternately forming hydrophobic organic layers and inorganic blocking layers M times, wherein $0 \leq M \leq 10$, and M is a positive integer.

20. The method for manufacturing the organic light emitting display apparatus according to claim 17, wherein a contact angle between the hydrophobic organic layer and water ranges from 90° to 170°.

21. The method for manufacturing the organic light emitting display apparatus according to claim 17, wherein a contact angle between the hydrophobic organic layer and water ranges from 110° to 160°.

22. The method for manufacturing the organic light emitting display apparatus according to claim 17, wherein the hydrophobic organic layer comprises a fluorinated hybrid polymer organic film, and the fluorinated hybrid polymer organic film comprises, in atomic percent, 10 at % to 50 at % of fluorine atom F, 1 at % to 30 at % of silicon atom Si, 1 at % to 30 at % of oxygen atom O, and 15 at % to 50 at % of carbon atom C.

23. The method for manufacturing the organic light emitting display apparatus according to claim 22, wherein the hydrophobic organic layer is made from a precursor comprising fluorinated silane and silane.

24. The method for manufacturing the organic light emitting display apparatus according to claim **23**, wherein the hydrophobic organic layer is made from a precursor comprising heptadecafluorodecyl trimethoxysilane and tetramethoxysilane.

25. The method for manufacturing the organic light emitting display apparatus according to claim **18**, wherein the inorganic blocking layer comprises one or more of a metal oxide, a metal nitride, a silicon oxide, and a silicon nitride.

* * * * *

专利名称(译)	用疏水性有机膜封装的有机发光显示装置及其制造方法		
公开(公告)号	US20150171369A1	公开(公告)日	2015-06-18
申请号	US14/463569	申请日	2014-08-19
[标]申请(专利权)人(译)	上海天马AM OLED 天马微电子股份有限公司		
申请(专利权)人(译)	上海天马AM-OLED CO., LTD. 天马微电子股份有限公司.		
当前申请(专利权)人(译)	上海天马AM-OLED CO., LTD. 天马微电子股份有限公司.		
[标]发明人	XIE ZAIFENG		
发明人	XIE, ZAIFENG		
IPC分类号	H01L51/52 H01L51/56		
CPC分类号	H01L51/56 H01L51/5256 H01L51/5253 H01L51/0034 H01L51/0094 H01L2251/558		
优先权	201310697551.3 2013-12-18 CN		
其他公开文献	US9252394		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种有机发光显示装置。显示装置包括基板，基板上的有机发光单元，以及有机发光单元上的膜封装层。膜封装层包括设置在膜封装层的最外部分的疏水有机层。

