



US 20190088896A1

(19) **United States**

(12) **Patent Application Publication**
Kim et al.

(10) **Pub. No.: US 2019/0088896 A1**
(43) **Pub. Date: Mar. 21, 2019**

(54) **ORGANIC LIGHT EMITTING DEVICE AND DISPLAY DEVICE INCLUDING THE SAME**

(71) Applicant: **Samsung Display Co., Ltd.**, Yongin-si (KR)

(72) Inventors: **Sung Wook Kim**, Hwaseong-si (KR); **Sung-Soo Bae**, Seoul (KR); **Hye In Jeong**, Suwon-si (KR); **Dong Hyun Kim**, Seongnam-si (KR); **Seul Ong Kim**, Hwaseong-si (KR); **Tsuyoshi Naijo**, Suwon-si (KR); **Hwan Hee Cho**, Hwaseong-si (KR)

(21) Appl. No.: **15/957,667**

(22) Filed: **Apr. 19, 2018**

(30) **Foreign Application Priority Data**

Sep. 20, 2017 (KR) 10-2017-0121288

Publication Classification

(51) **Int. Cl.**
H01L 51/50 (2006.01)
H01L 27/32 (2006.01)
H01L 51/56 (2006.01)

(52) **U.S. Cl.**
CPC **H01L 51/506** (2013.01); **H01L 51/5004** (2013.01); **H01L 2251/552** (2013.01); **H01L 27/3244** (2013.01); **H01L 51/56** (2013.01); **H01L 51/5012** (2013.01)

(57) **ABSTRACT**

An organic light emitting device includes: a first electrode; a second electrode that overlaps the first electrode; and an organic layer that is disposed between the first electrode and the second electrode, wherein the organic layer comprises a hole transport region that includes a hole transport material and a p-dopant, and wherein when a doping amount of the p-dopant doped to the hole transport region exceeds 1 wt %, the following Equation 1 is satisfied, while when the doping amount of the p-dopant is 1 wt % or less than 1 wt %, the following Equation 2 is satisfied:

$$\text{HOMO_HTM-LUMO_p-dopant} < -0.05 \text{ eV} \quad [\text{Equation 1}]$$

$$\text{HOMO_HTM-LUMO_p-dopant} > -0.05 \text{ eV} \quad [\text{Equation 2}]$$

In Equation 1 and Equation 2, HOMO_HTM denotes HOMO energy of the hole transport material and LUMO_p-dopant denotes LUMO energy of the p-dopant.



FIG. 1

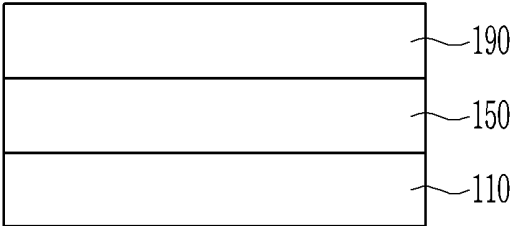


FIG. 2

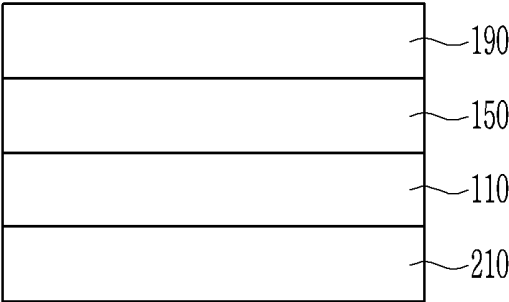


FIG. 3



FIG. 4



FIG. 5


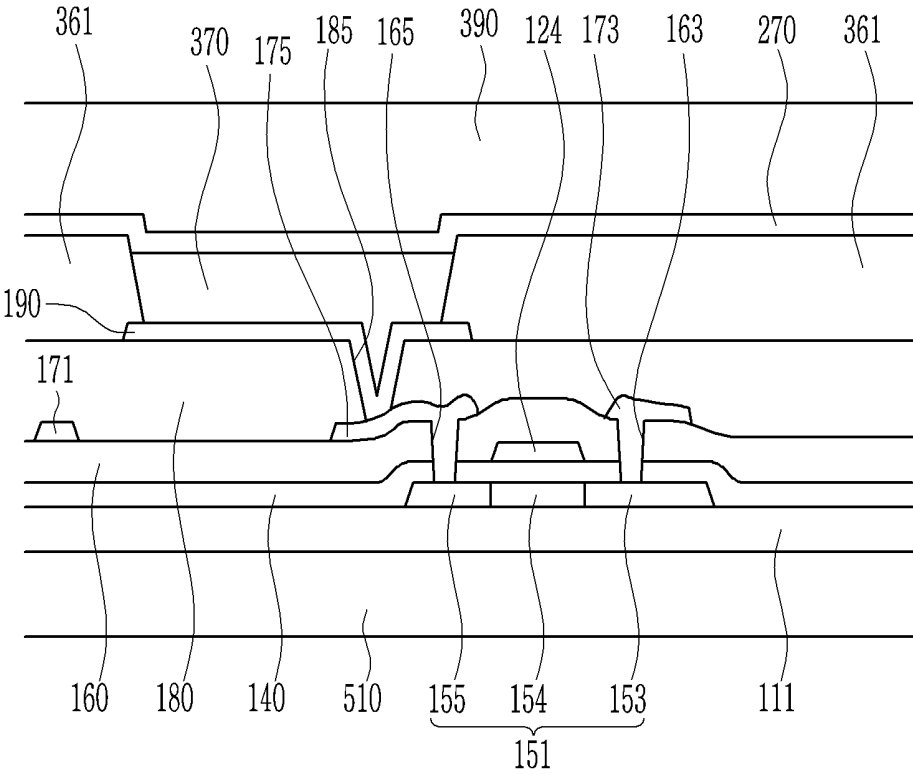


FIG. 6

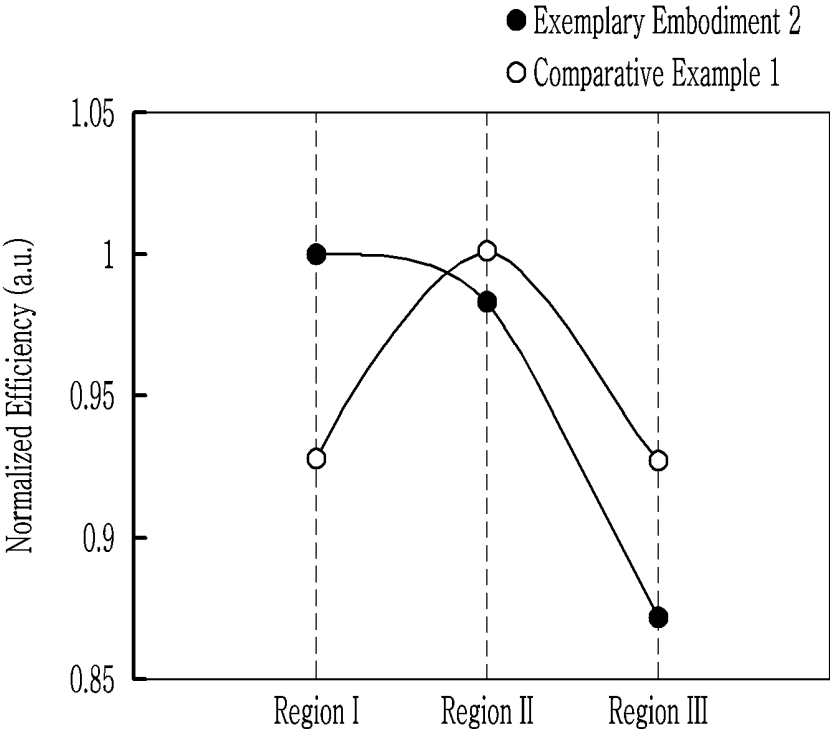

ORGANIC LIGHT EMITTING DEVICE AND DISPLAY DEVICE INCLUDING THE SAME

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims priority to and the benefit of Korean Patent Application No. 10-2017-0121288, filed in the Korean Intellectual Property Office on Sep. 20, 2017, the entire content of which is incorporated herein by reference.

BACKGROUND

1. Field

[0002] The present disclosure relates to an organic light emitting device and a display device including the same.

2. Description of the Related Art

[0003] An organic light emitting device as a self-light emitting device has enhanced features of a large viewing angle, excellent contrast, and/or a fast response time, and is capable of representing various colors, compared to a conventional device.

[0004] The organic light emitting device may have a structure in which a first electrode is disposed on a substrate, and a hole transport region, an emission layer, an electron transport region, and a second electrode are sequentially formed on the first electrode. Holes injected from the first electrode move to the emission layer via the hole transport region, and electrons injected from the second electrode move to the emission layer via the electron transport region. Carriers such as holes and electrons are recombined in an emission region and generate excitons. Light is emitted when the excitons transition from an excited state to a ground state.

[0005] The above information disclosed in this Background section is only for enhancement of understanding of the background of the invention and therefore it may contain information that does not form the prior art that is already known to a person of ordinary skill in the art.

SUMMARY

[0006] The present invention has been made in an effort to provide an organic light emitting device, and a display device including the same.

[0007] An organic light emitting device according to an exemplary embodiment includes: a first electrode; a second electrode that overlaps the first electrode; and an organic layer between the first electrode and the second electrode, wherein the organic layer includes a hole transport region that includes a hole transport material and a p-dopant, and wherein when a doping amount of the p-dopant doped to the hole transport region exceeds 1 wt %, the following Equation 1 is satisfied, and when the doping amount of the p-dopant is 1 wt % or less than 1 wt %, the following Equation 2 is satisfied:

$$\text{HOMO_HTM-LUMO_p-dopant} < -0.05 \text{ eV} \quad \text{Equation 1}$$

$$\text{HOMO_HTM-LUMO_p-dopant} > -0.05 \text{ eV} \quad \text{Equation 2}$$

[0008] wherein, in Equation 1 and Equation 2, HOMO_HTM denotes HOMO energy of the hole transport material and LUMO_p-dopant denotes LUMO energy of the p-dopant.

[0009] The hole transport material may satisfy $-5.3 \text{ eV} < \text{HOMO_HTM} < -4.9 \text{ eV}$, and the p-dopant may satisfy $-5.25 \text{ eV} < \text{LUMO_p-dopant} < -4.85 \text{ eV}$.

[0010] The p-dopant may be included at an amount of about 0.25 wt % to about 20 wt % based on a total content of the hole transport region.

[0011] A thickness of the hole transport region including the p-dopant may be about 10 Å to about 300 Å.

[0012] The organic light emitting device may further include an emission layer, and recombination of holes and electrons in the emission layer may be generated adjacent to the hole transport region.

[0013] When the doping amount of the p-dopant in the hole transport region exceeds 1 wt %, and when an absolute value of a difference between the HOMO_HTM and the LUMO_p-dopant is increased, light emission efficiency of the organic light emitting device may be increased.

[0014] When the doping amount of the p-dopant is 1 wt % or less than 1 wt %, and when a doping concentration of the p-dopant is decreased, light emission efficiency of the organic light emitting device may be increased.

[0015] Light emission efficiency of the organic light emitting device may be increased as a thickness of the hole transport region that includes the p-dopant is decreased.

[0016] A display device according to an exemplary embodiment includes: a transistor on a substrate; and an organic light emitting device connected with the transistor, wherein the organic light emitting device includes: a first electrode; a second electrode that overlaps the first electrode; and an organic layer between the first electrode and the second electrode, wherein the organic layer includes an electron transport region, a hole transport region, and an emission layer where holes and electrons are recombined, the emission layer including a first region adjacent to the hole transport region and a second region adjacent to the electron transport region. The holes and the electrons are recombined in the first region of the emission layer more than the second region of the emission layer.

[0017] The organic light emitting device according to the exemplary embodiments may have high efficiency, high luminance, and long life-span.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIG. 1 is a schematic illustration of a structure of an organic light emitting device according to an exemplary embodiment.

[0019] FIG. 2 is a schematic illustration of a structure of an organic light emitting device according to an exemplary embodiment.

[0020] FIG. 3 is a schematic illustration of a structure of an organic light emitting device according to an exemplary embodiment.

[0021] FIG. 4 is a schematic illustration of a structure of an organic light emitting device according to an exemplary embodiment.

[0022] FIG. 5 is a partial cross-sectional view of a display device including the organic light emitting device of FIG. 1.

[0023] FIG. 6 is a graph illustrating light emission efficiency according to a doping region in an emission layer.

DETAILED DESCRIPTION

[0024] Hereinafter, exemplary embodiments of the present invention will be described in more detail with reference to

the accompanying drawings. As those skilled in the art would realize, the described embodiments may be modified in various different ways, all without departing from the spirit or scope of the present invention.

[0025] The drawings and description are to be regarded as illustrative in nature and not restrictive. Like reference numerals designate like elements throughout the specification.

[0026] In addition, the size and thickness of each configuration shown in the drawings are arbitrarily shown for better understanding and ease of description, but the present invention is not limited thereto. In the drawings, the thickness of layers, films, panels, regions, etc., are exaggerated for clarity.

[0027] It will be understood that when an element such as a layer, film, region, or substrate is referred to as being “on” another element, it can be directly on the other element or intervening elements may also be present. In contrast, when an element is referred to as being “directly on” another element, there are no intervening elements present. The word “on” or “above” means positioned on or below the object portion, and does not necessarily mean positioned on the upper side of the object portion based on a gravitational direction.

[0028] In addition, unless explicitly described to the contrary, the word “comprise” and variations such as “comprises,” “comprising,” “include,” “includes,” or “including” will be understood to imply the inclusion of stated elements but not the exclusion of any other elements.

[0029] Further, in this specification, the phrase “on a plane” means viewing a target portion from the top, and the phrase “on a cross-section” means viewing a cross-section formed by vertically cutting a target portion from the side.

[0030] Hereinafter, an organic light emitting diode according to an exemplary embodiment will be described with reference to FIG. 1. FIG. 1 is a schematic cross-sectional view of the organic light emitting diode according to the exemplary embodiment.

[0031] An organic light emitting diode includes a first electrode **110**, an organic layer **150**, and a second electrode **190**.

[0032] A substrate may be additionally provided below the first electrode **110** or above the second electrode **190**. As the substrate, a glass substrate or a plastic substrate having excellent mechanical strength, thermal stability, transparency, surface flatness, ease of handling, and water resistance may be utilized.

[0033] The first electrode **110** may be formed by depositing or sputtering a material on the substrate, but the present invention is not limited thereto. When the first electrode **110** is an anode, the material may be selected from materials having a high work function. In such a case, holes can be easily injected through the first electrode **110**.

[0034] The first electrode **110** may be a reflective electrode, a transmissive electrode, or a transmissive electrode. In order to form the first electrode **110** as a transmissive electrode, the material utilized to form the first electrode **110** may be selected from indium tin oxide (ITO), indium zinc oxide (IZO), tin oxide (SnO₂), zinc oxide (ZnO), and combinations thereof, but the present invention is not limited thereto. In order to form the first electrode **110** as a transmissive electrode or a reflective electrode, the material utilized to form the first electrode **110** may be selected from magnesium (Mg), aluminum (Al), aluminum-lithium (Al—

Li), calcium (Ca), magnesium-indium (Mg—In), magnesium-silver (Mg—Ag), and combinations thereof, but the present invention is not limited thereto.

[0035] The first electrode **110** may have a single-layered structure or a multi-layered structure having a plurality of layers. For example, the first electrode **110** may have a three-layered structure of ITO/Ag/ITO, but the present invention is not limited thereto.

[0036] The organic layer **150** is disposed on the first electrode **110**. The organic layer **150** includes an emission layer. The organic layer **150** may include a hole transport region disposed between the first electrode **110** and the emission layer, and an electron transport region disposed between the emission layer and the second electrode **190**.

[0037] The hole transport region may have the following structures: i) a single-layered structure of a single layer formed of a single material; ii) a single-layered structure of a single layer formed of a plurality of different materials; or iii) a multi-layered structure formed of a plurality of layers, each formed of a plurality of different materials.

[0038] The hole transport region may include at least one selected from a hole injection layer HIL, a hole transport layer HTL, an auxiliary emission layer, and an electron blocking layer (EBL).

[0039] For example, the hole transport region may have a single-layered structure of a single layer that is made of a plurality of different materials, or a multi-layered structure of hole injection layer/hole transport layer, hole injection layer/hole transport layer/auxiliary emission layer, hole injection layer/auxiliary emission layer, hole transport layer/auxiliary emission layer, or hole injection layer/hole transport layer/electron blocking layer, sequentially stacked from the first electrode **110**, but the present invention is not limited thereto.

[0040] The hole transport region may include a hole transport material and a p-dopant. The hole transport region according to the exemplary embodiment of the present invention may satisfy the following Equation 1 and Equation 2. Specifically, when an amount of the p-dopant doped in the hole transport region exceeds 1 wt %,

[0041] Equation 1 may be satisfied, and when an amount of a p-dopant is 1 wt % or less than 1 wt %, Equation 2 may be satisfied.

$$\text{HOMO_HTM-LUMO_p-dopant} < -0.05 \text{ eV} \quad \text{Equation 1}$$

$$\text{HOMO_HTM-LUMO_p-dopant} > -0.05 \text{ eV} \quad \text{Equation 2}$$

[0042] In Equation 1 and Equation 2, HOMO_HTM denotes the highest occupied molecular orbital (HOMO) energy of the hole transport material, and HOMO energy of the hole transport material satisfies $-5.3 \text{ eV} < \text{HOMO_HTM} < -4.9 \text{ eV}$. In Equation 1 and Equation 2, the LUMO_p-dopant is the lowest unoccupied molecular orbital (LUMO) energy of the p-dopant doped (e.g., injected) into the hole transport region, and LUMO energy of the p-dopant satisfies $-5.25 \text{ eV} < \text{LUMO_p-dopant} < -4.85 \text{ eV}$.

[0043] Here, in the hole transport region according to the exemplary embodiment, the HOMO energy of the hole transport material may satisfy $-5.3 \text{ eV} < \text{HOMO_HTM} < -4.9 \text{ eV}$. As an absolute value of the HOMO energy of the hole transport material is increased, excessive injection of holes into the emission layer can be prevented or reduced. Because an appropriate level (e.g., amount) of holes can be injected into the emission layer, an injection amount of holes and an

injection amount of electrons into the emission layer are balanced, thereby increasing luminous efficiency.

[0044] LUMO energy supplied to the hole transport region may satisfy $-5.25 \text{ eV} < \text{LUMO}_{\text{p-dopant}} < -4.85 \text{ eV}$. When the absolute value of the LUMO energy of the p-dopant supplied to the hole transport region is decreased while satisfying the above-stated range, the injection amount of holes supplied to the emission layer can be controlled. When the absolute value of the LUMO energy of the p-dopant is decreased, a difference with a constant HOMO energy level of the hole transport material may be increased. Accordingly, energy required for holes moving to the emission layer is increased. That is, an excessive amount of holes can be prevented or substantially prevented from being injected into the emission layer to thereby inject an appropriate level of holes into the emission layer.

[0045] When an amount of the p-dopant included in the hole transport region exceeds 1 wt % (i.e., based on a total weight of the hole transport region), the hole transport region that satisfies the above-stated Equation 1 can be provided. Here, as the amount of the p-dopant is increased, an injection amount of holes provided to the emission layer may be increased (e.g., excessively increased). According to the present exemplary embodiment, an inappropriate level of holes can be prevented or substantially prevented from being injected, thereby injecting an appropriate level of holes. Thus, when the amount of the p-dopant included in the hole transport region exceeds 1 wt %, energy required for moving of the holes to the emission layer is controlled to be increased according to Equation 1 to control movement of the holes. Accordingly, the injection amount of holes into the emission layer can be controlled to be at an appropriate level.

[0046] On the contrary, when the amount of the p-dopant supplied to the hole transport region is 1 wt % or less than 1 wt %, the hole transport region that satisfies Equation 2 can be provided. When a small amount of the p-dopant is included in the hole transport region, the amount of the p-dopant is small even through energy required for holes moving to the emission layer is low such that the injection amount of holes into the emission layer can be controlled.

[0047] A method of manufacturing an organic light emitting device may include forming a first electrode; forming a second electrode overlapping with the first electrode; and forming an organic layer between the first electrode and the second electrode, wherein the organic layer comprises a hole transport region, the hole transport region including a hole transport material and a p-dopant, wherein the forming of the organic layer includes: determining a doping amount of the p-dopant in the hole transport region, and selecting the hole transport material according to the doping amount of the p-dopant, wherein when the doping amount of the p-dopant in the hole transport region exceeds 1 wt %, the hole transport material is selected to satisfy the following Equation 1, and when the doping amount of the p-dopant is 1 wt % or less than 1 wt %, the hole transport material is selected to satisfy the following Equation 2:

$$\text{HOMO}_{\text{HTM}} - \text{LUMO}_{\text{p-dopant}} < -0.05 \text{ eV} \quad [\text{Equation 1}]$$

$$\text{HOMO}_{\text{HTM}} - \text{LUMO}_{\text{p-dopant}} > -0.05 \text{ eV} \quad [\text{Equation 2}]$$


[0048] In Equation 1 and Equation 2, HOMO_{HTM} denotes HOMO energy of the hole transport material and LUMO_{p-dopant} denotes LUMO energy of the p-dopant.

[0049] In this case, the amount of the p-dopant supplied to the hole transport region according to the exemplary embodiment of the present invention may be about 0.25 wt % to about 20 wt % with respect to (i.e., based on) a total amount (i.e., total weight) of the hole transport region.

[0050] Meanwhile, a thickness of the hole transport region may be about 300 Å or less and may be greater than or equal to about 10 Å. When the thickness of the hole transport region exceeds about 300 Å, the injection amount of holes to the emission layer may be excessively increased due to a large thickness of the hole transport region, and when the thickness of the hole transport region is about 10 Å or less, the injection amount of holes to the emission layer is too small such the light emission may hardly occur.


[0051] When the thickness of the hole transport region (for example, including the hole injection layer HIL, and the hole transport layer HTL) satisfies the above-stated range, a satisfactory hole transport characteristic can be acquired without causing an actual increase of a driving voltage.

[0052] The hole transport region may include at least one hole transport material selected from m-MTDATA, TDATA, 2-TNATA, NPB(NPD), β-NPB, TPD, Spiro-TPD, Spiro-NPB, metalized-NPB, TAPC, HMTPD, TCTA (4,4',4"-tris (N-carbazolyl)triphenylamine), Pani/DBSA (polyaniline/dodecylbenzenesulfonic acid), PEDOT/PSS (poly(3,4-ethylenedioxythiophene)/poly(4-styrenesulfonate) (poly(3,4-ethylenethiophene)/poly(4-styrenesulfonate))), Pani/CSA (polyaniline/camphor sulfonic acid), PANI/PSS (polyaniline/poly(4-styrenesulfonate)), a compound represented by Chemical Formula 201, and a compound represented by Chemical Formula 202.

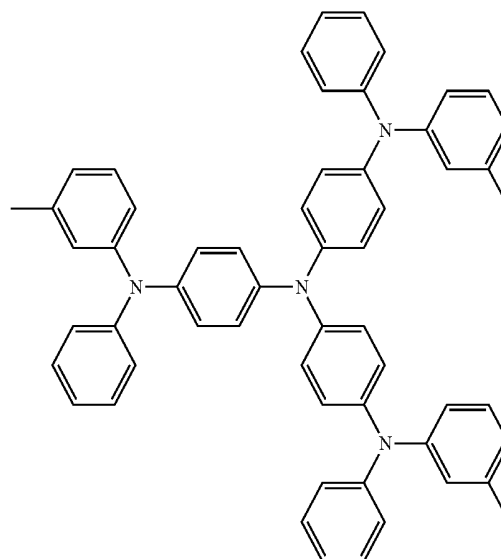


m-MTDATA


-continued

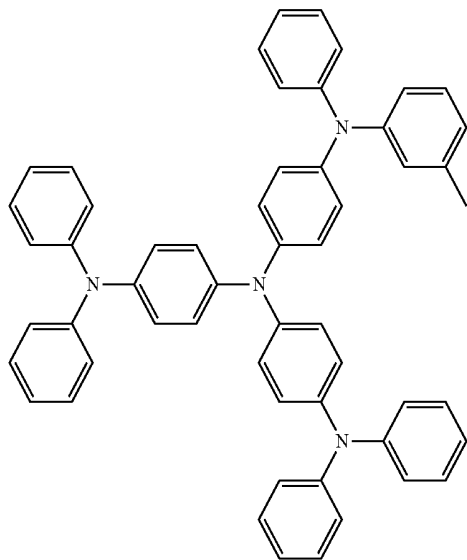

TDATA

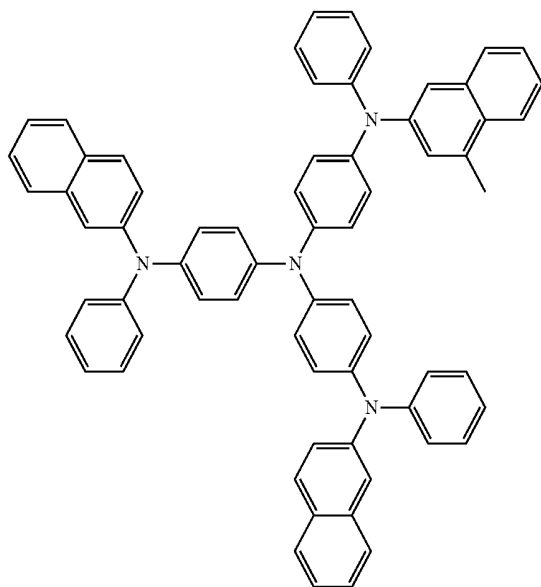


2-TNATA

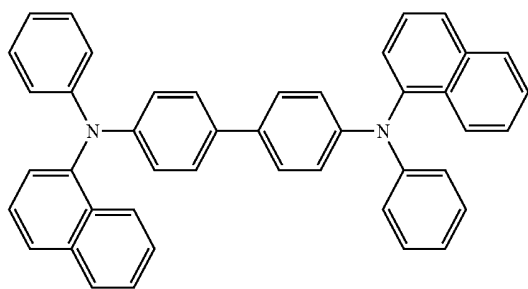


NPB


-continued

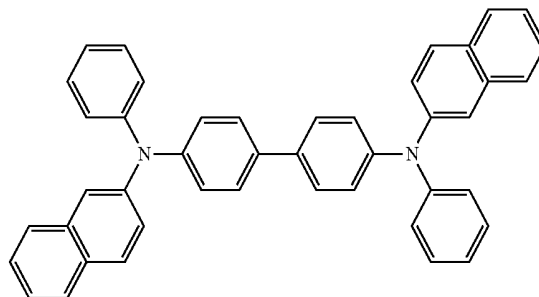


β -NPB

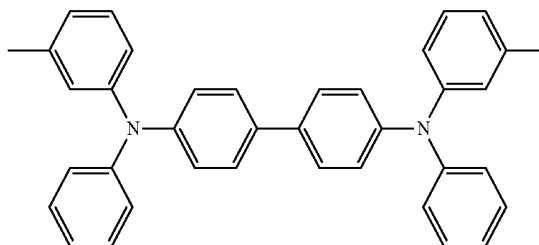


TPD

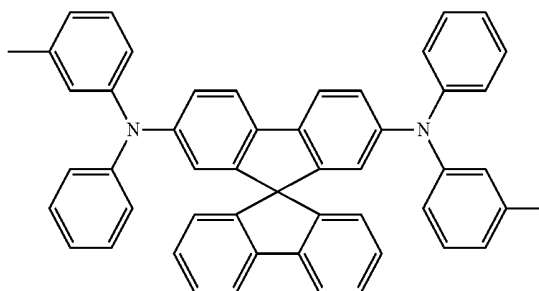

Spiro-TPD




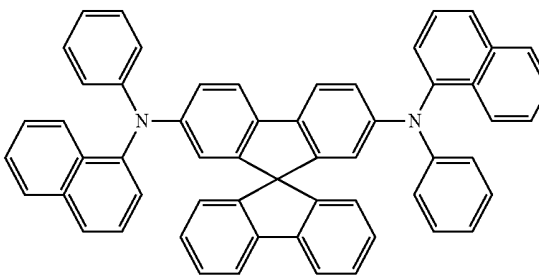


Spiro-NPB

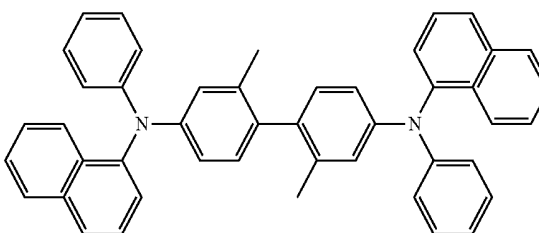

methylated NPB

-continued

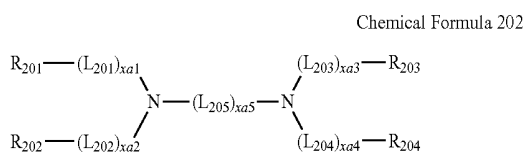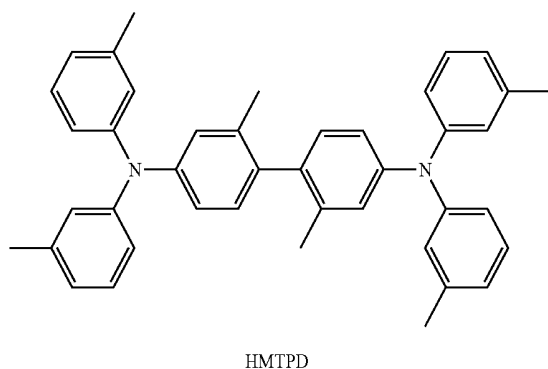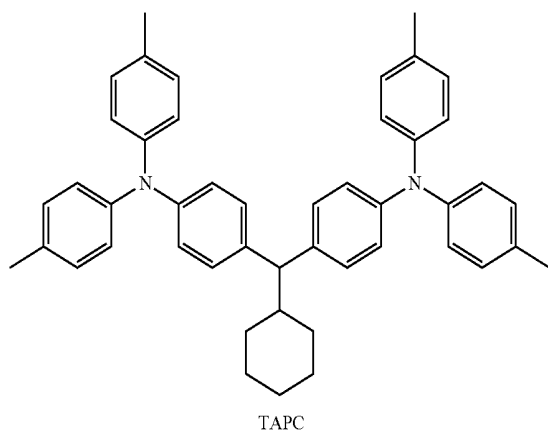


[0053] In Chemical Formula 201 and Chemical Formula 202, L_{201} to L_{204} may be each independently selected from a substituted or non-substituted (i.e., unsubstituted) C_3 - C_{10} cycloalkylene group, a substituted or non-substituted C_1 - C_{10} heterocycloalkylene group, a substituted or non-substituted C_3 - C_{10} cycloalkenyl group, a substituted or non-substituted C_1 - C_{10} heterocycloalkenyl group, a substituted or non-substituted C_6 - C_{60} arylene group, a substituted or non-substituted C_1 - C_{60} heteroarylene group, a substituted or non-substituted divalent non-aromatic condensed polycyclic group, and a substituted or unsubstituted divalent non-aromatic hetero-condensed polycyclic group. L_{205} may be selected from $*-O-*$, $*-S-*$, $*-N$, $Q_{201}-*$, a substituted or unsubstituted C_1 - C_{20} alkylene group, a substituted or unsubstituted C_3 - C_{10} cycloalkylene group, a substituted or unsubstituted C_1 - C_{10} heterocycloalkenyl group, a substituted or unsubstituted C_3 - C_{10} cycloalkenyl group, a substituted or unsubstituted C_1 - C_{10} heterocycloalkenyl group, a substituted or unsubstituted C_6 - C_{60} arylene group, a substi-


tuted or unsubstituted C_1 - C_{60} heteroarylene group, a substituted or unsubstituted divalent non-aromatic condensed polycyclic group, and a divalent non-aromatic hetero-condensed polycyclic group. x_{a1} to x_{a4} may be each independently selected from integers of 0 to 3. x_{a5} may be selected from integers of 1 to 10. R_{201} to R_{204} and Q_{201} may be each independently selected from a substituted or unsubstituted C_3 - C_{10} cycloalkyl group, a substituted or unsubstituted C_1 - C_{10} heterocycloalkyl group, a substituted or unsubstituted C_3 - C_{10} cycloalkylene group, a substituted or unsubstituted C_1 - C_{10} heterocycloalkenyl group, a substituted or unsubstituted C_6 - C_{60} aryl group, a substituted or unsubstituted C_6 - C_{60} aryloxy group, a substituted or unsubstituted C_6 - C_{60} arylthio group, a substituted or unsubstituted C_1 - C_{60} heteroaryl group, a substituted or unsubstituted monovalent non-aromatic condensed polycyclic group, and a substituted or unsubstituted monovalent non-aromatic hetero-condensed polycyclic group.

[0054] The hole transport region may include at least one selected from compound HT1 to compound HT43, but the present invention is not limited thereto.

HT1

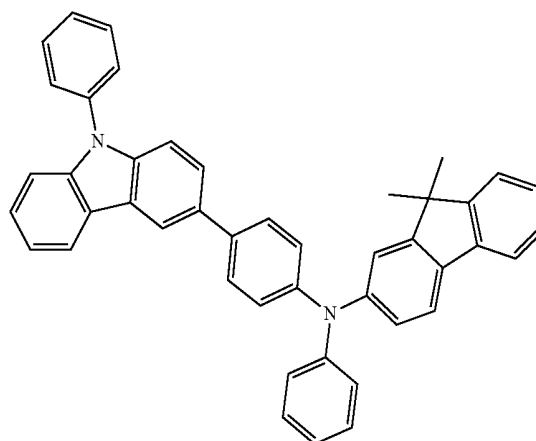

HT2


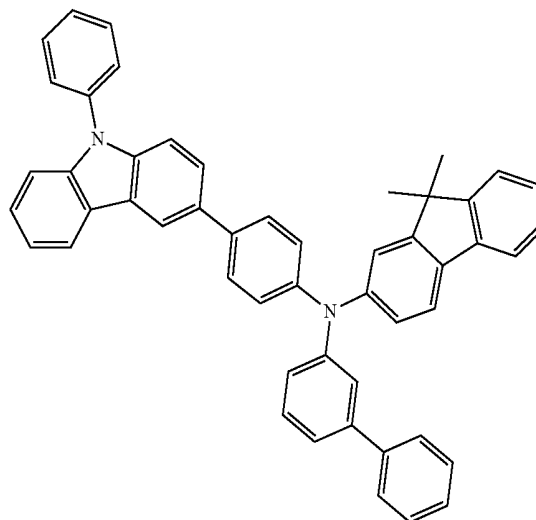


-continued

-continued



HT3

HT5

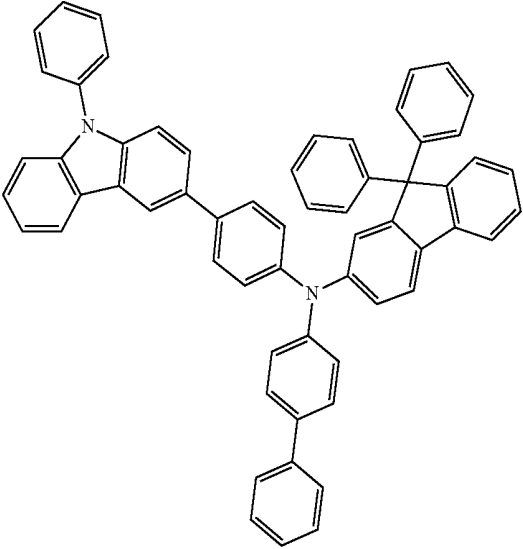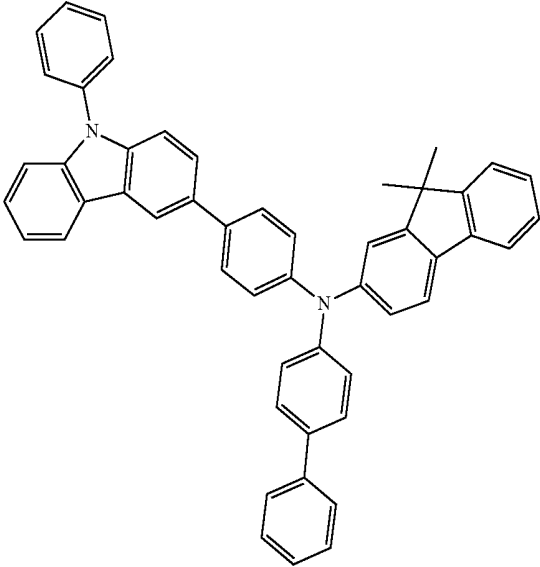


HT4

HT6

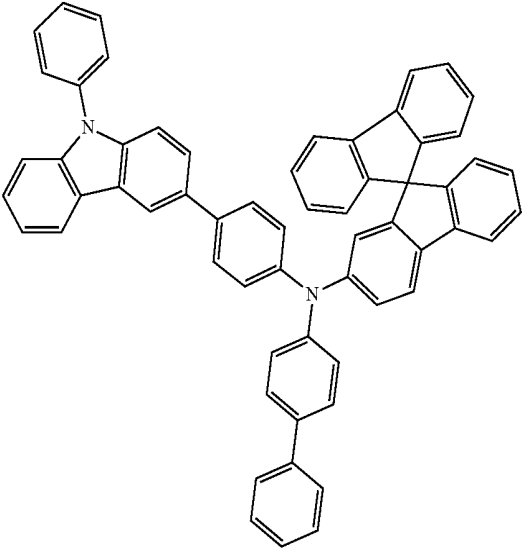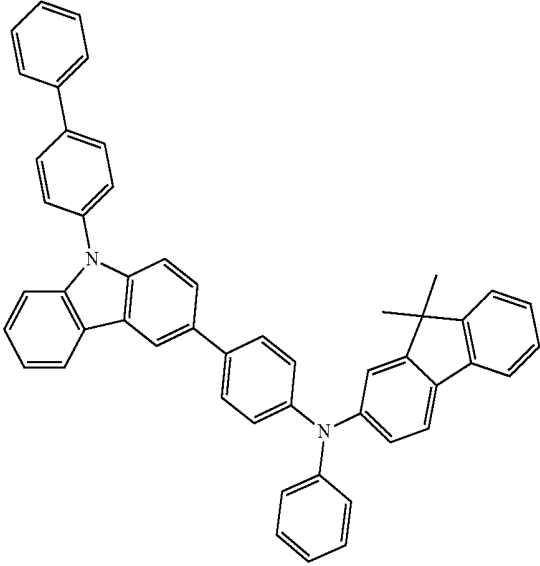


-continued

HT7

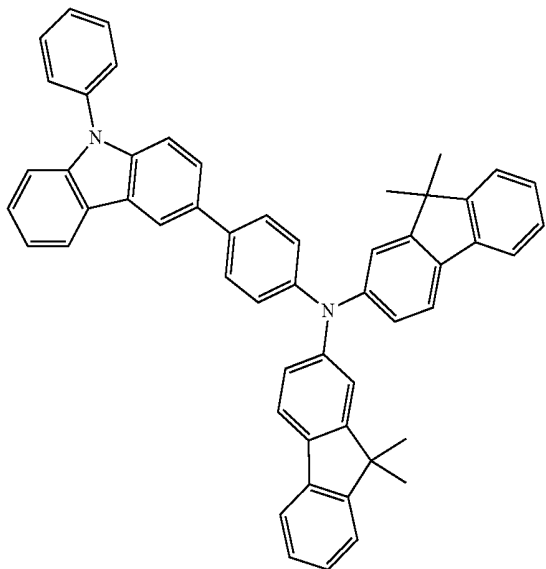



-continued

HT10

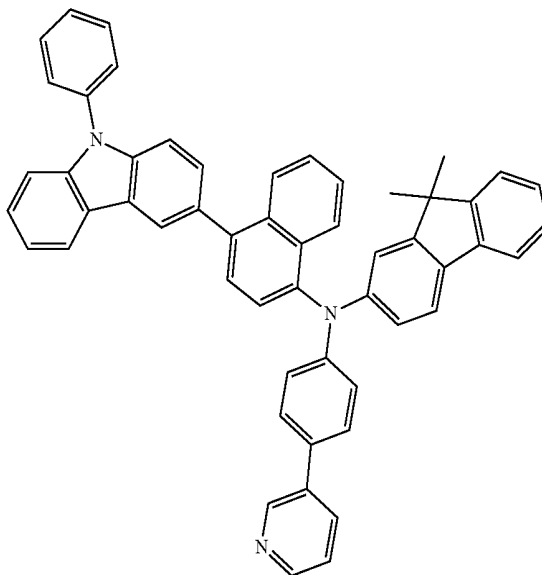



HT8

HT11

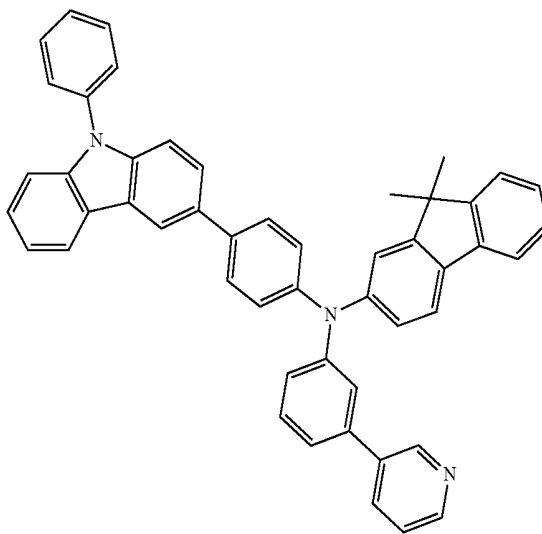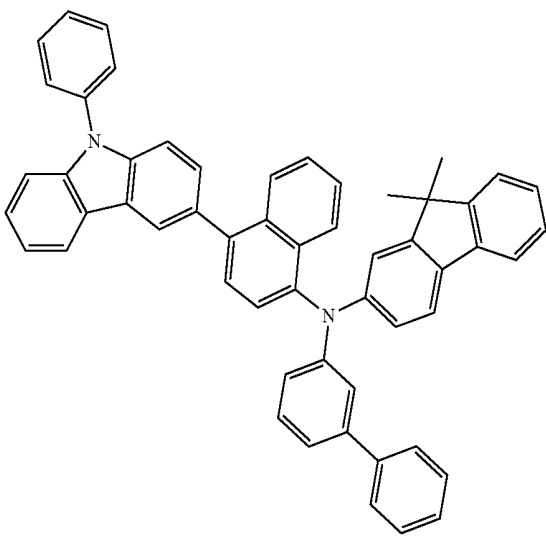


HT9

HT12

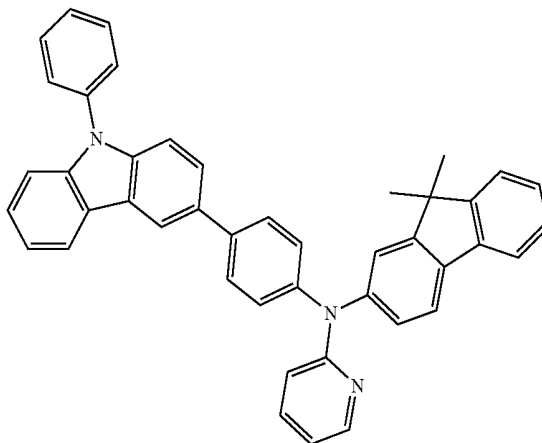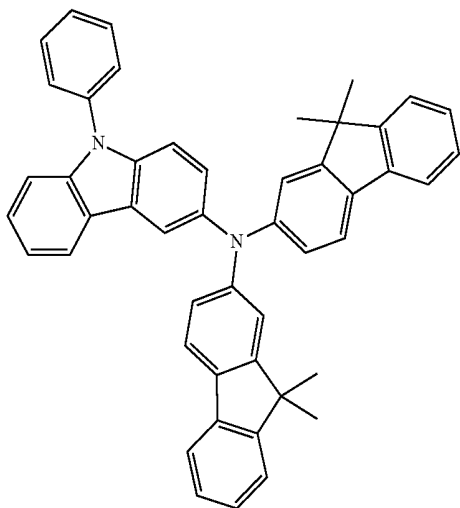


-continued

HT13

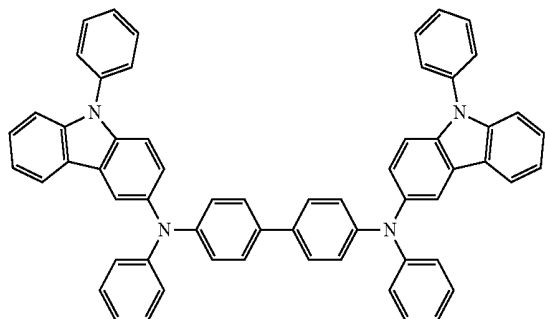


-continued


HT17

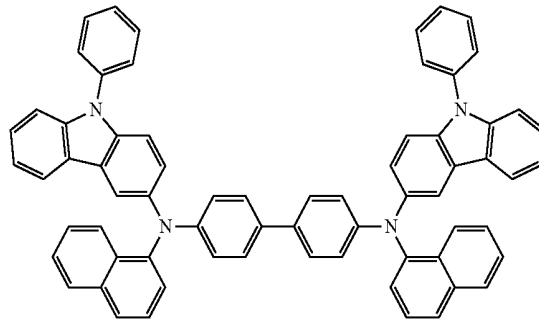


HT14

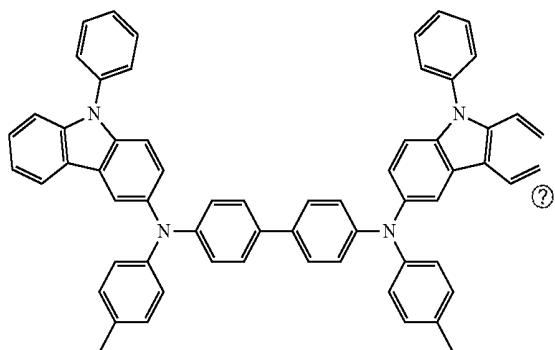


HT18

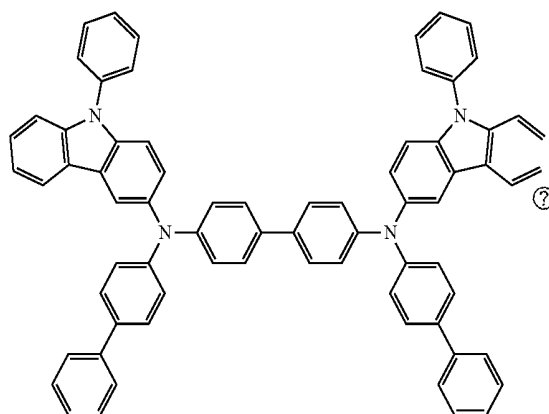


HT15

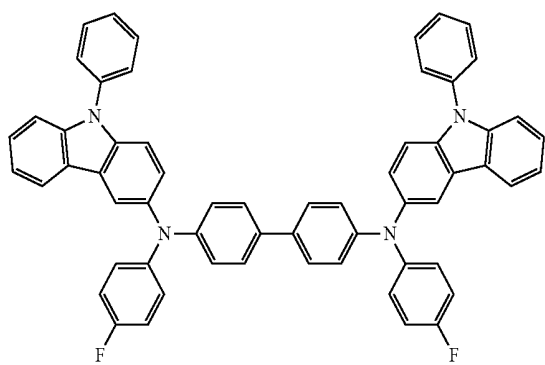


HT19

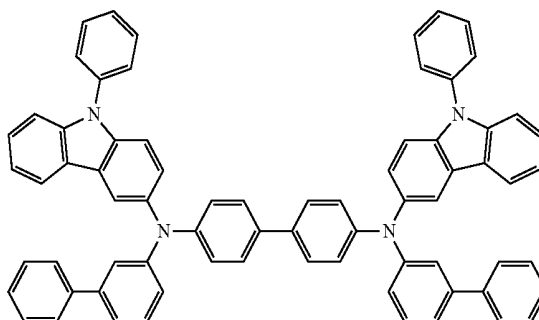


HT16

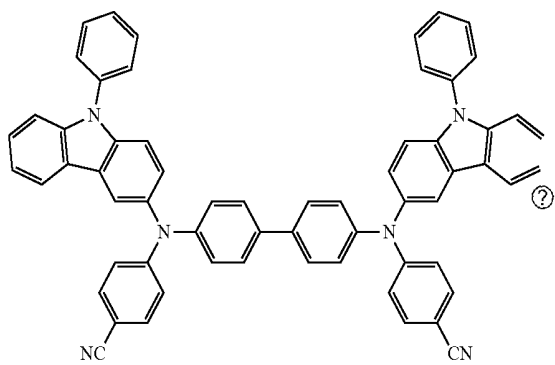

HT20

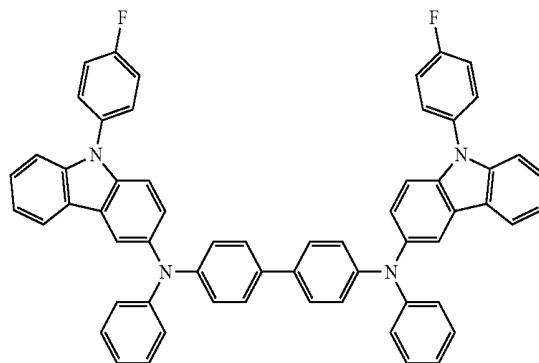


-continued

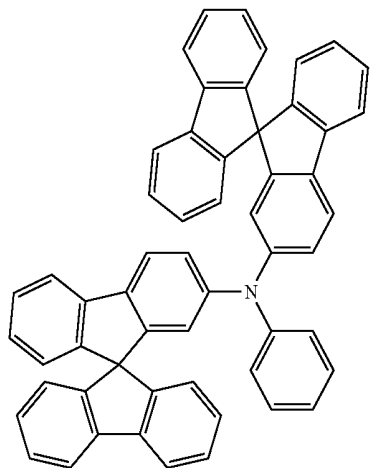


HT21

-continued

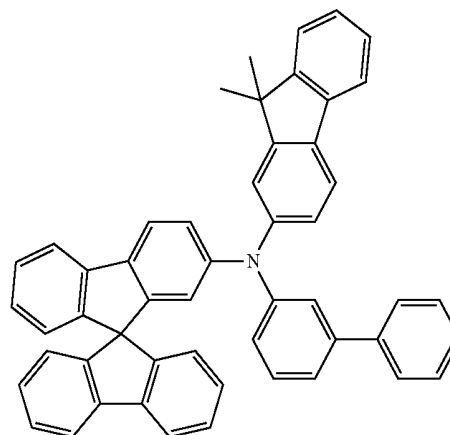


HT24


HT22

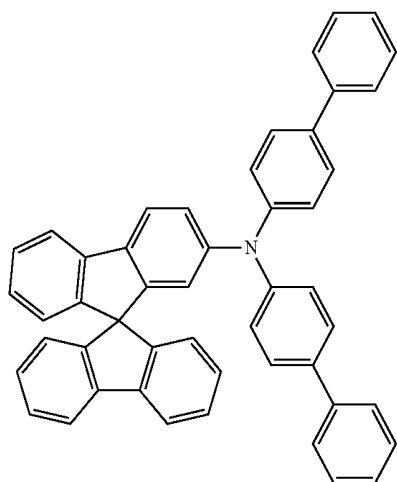


HT25

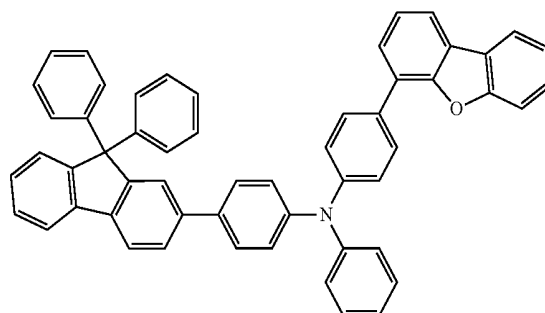

HT23

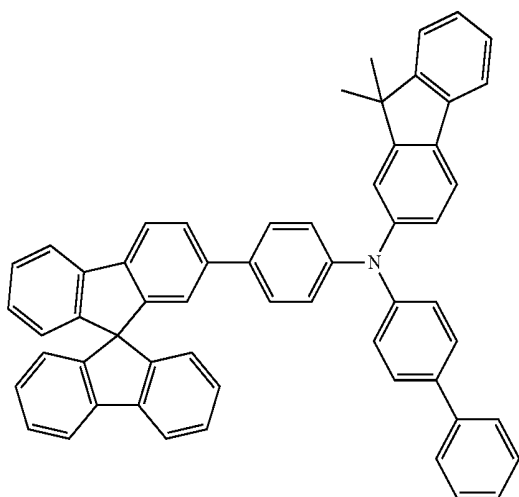


HT26

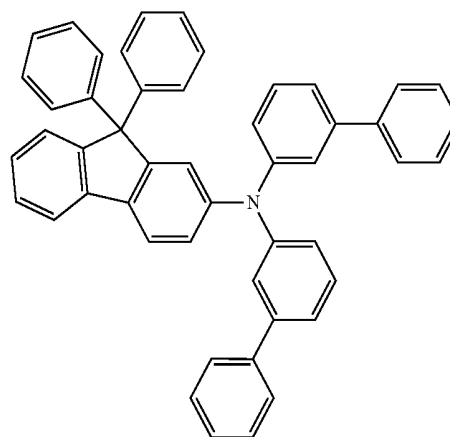


-continued

-continued


HT27

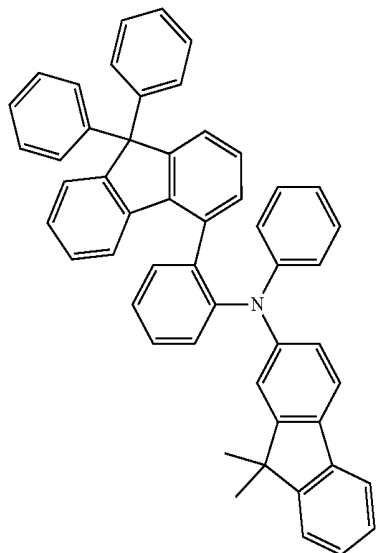


HT30

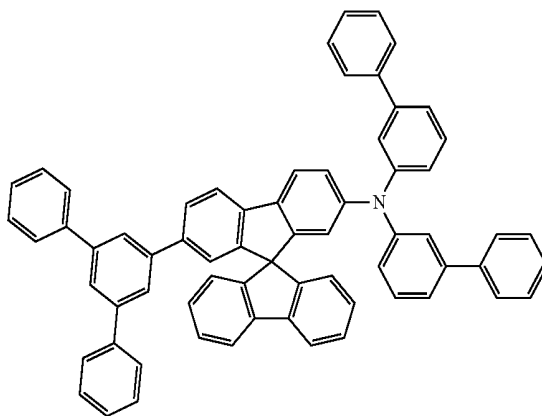


HT28

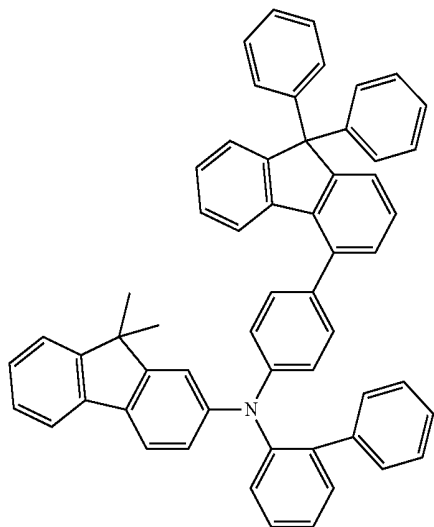


HT31

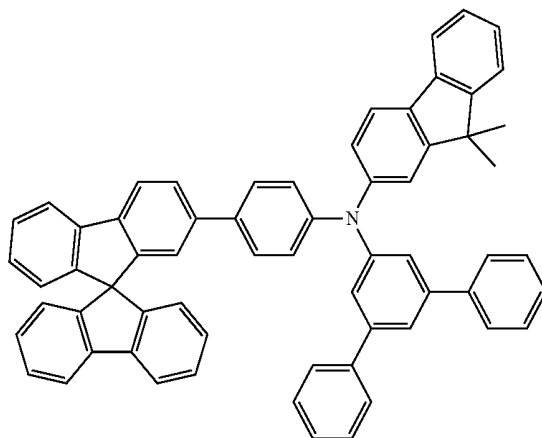


HT29

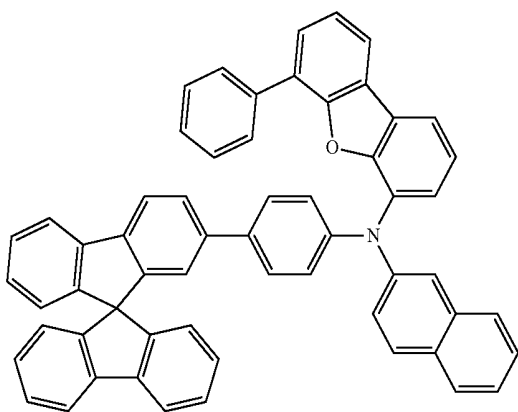

HT32

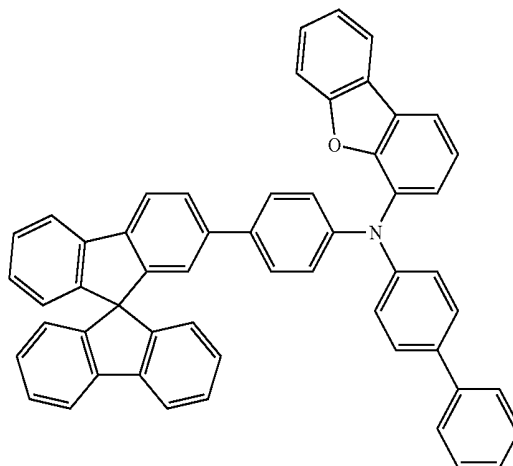


-continued

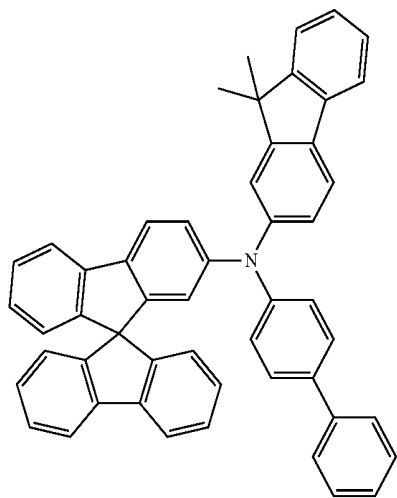


HT33


-continued

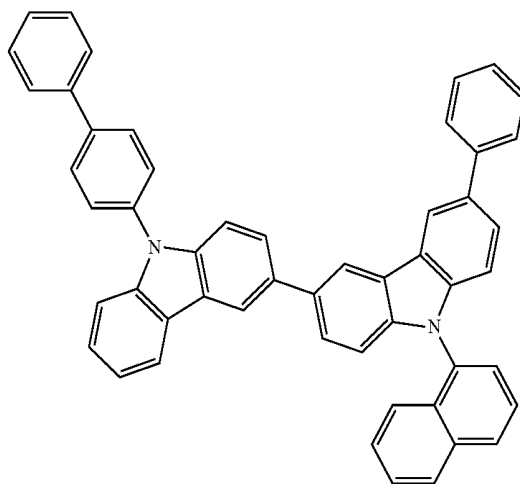


HT37

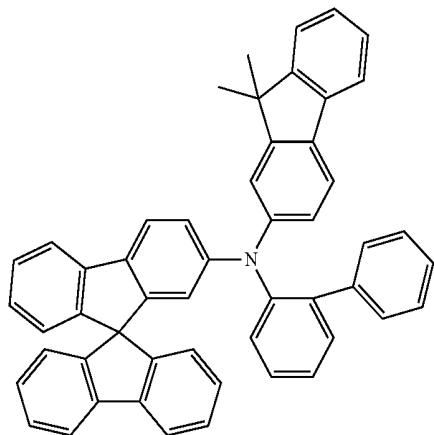


HT34

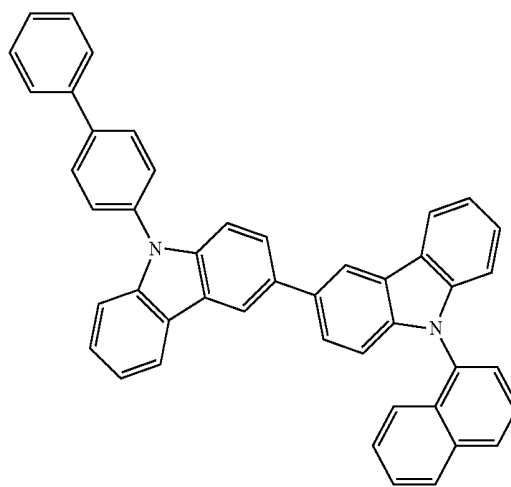


HT38

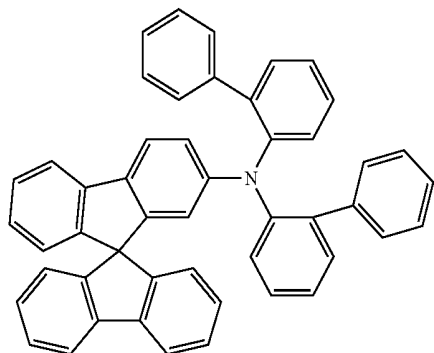

HT35

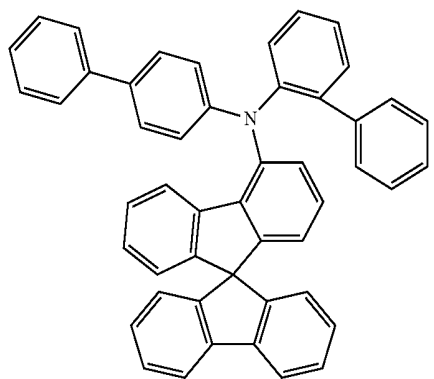

HT36


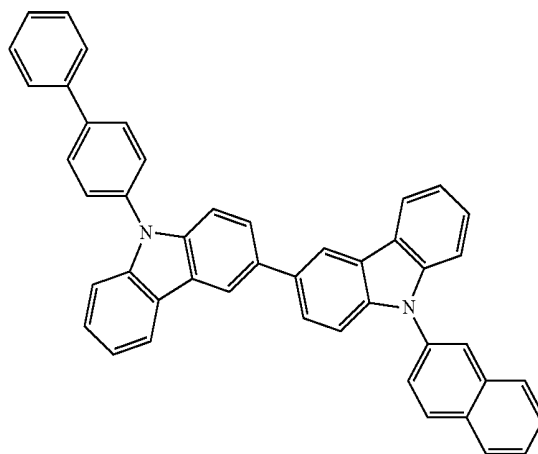


HT39



-continued

-continued

HT43

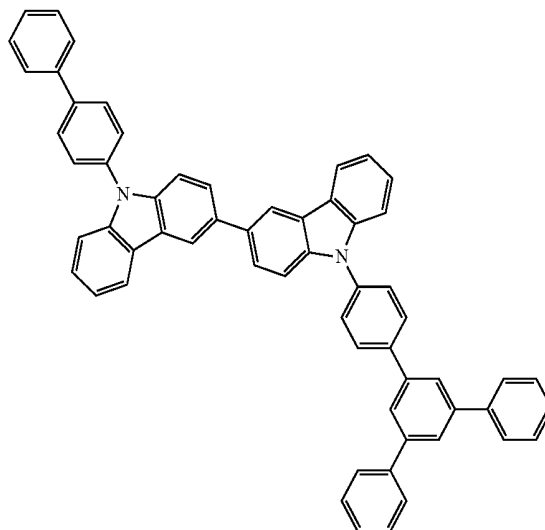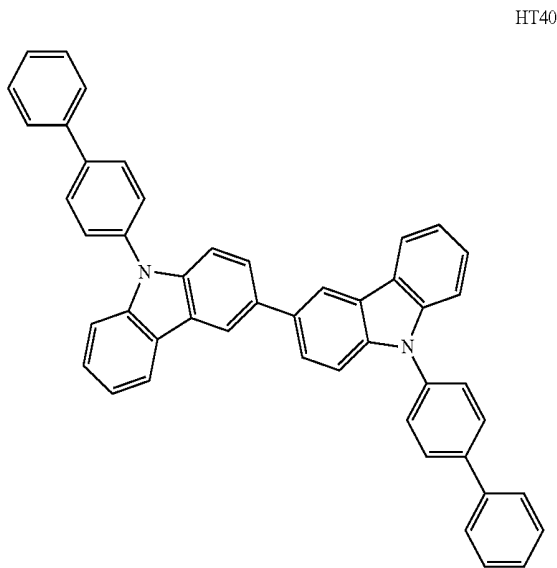


Ⓜ indicates text missing or illegible when filed

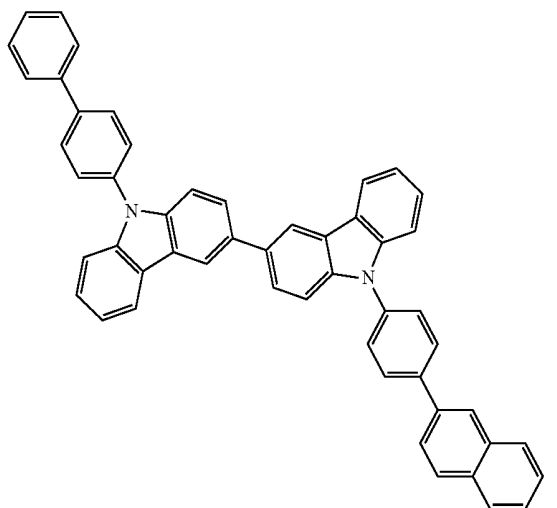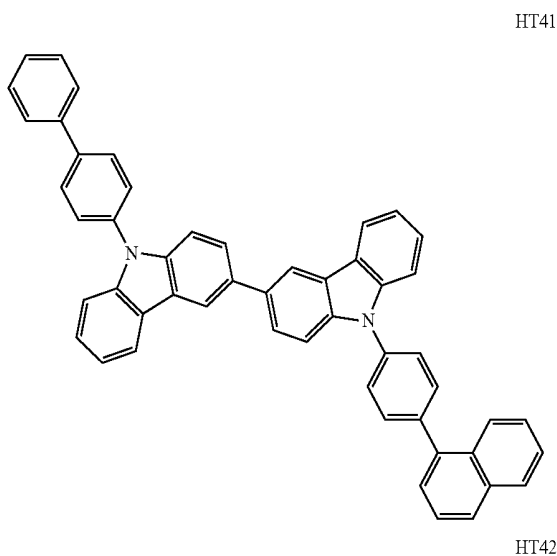





[0055] The auxiliary emission layer (i.e., auxiliary light emission layer) serves to increase light emission efficiency by compensating an optical resonance distance according to a wavelength of light emitted from the emission layer, and the electron blocking layer serves to prevent or reduce electron injection from the electron transport region. The above-stated material may be included in the auxiliary light emission layer and the electron blocking layer.

[0056] The hole transport region may further include a charge-generation material for improving conductivity, in addition the above-stated materials. The charge-generation material may be evenly or unevenly dispersed in the hole transport region. The charge-generation material may be, for example, a p-dopant. The p-dopant may include at least one selected from a quinone derivative, a metal oxide, and a cyano group-containing compound, but the present invention is not limited thereto. For example, the p-dopant may include a quinone derivative (such as tetracyanoquinodimethane (TCNQ), F4-TCNQ (2,3,5,6-tetrafluoro-7,7,8,8-tetracyanoquinodimethane), and the like), a metal oxide (such as a tungsten oxide, a molybdenum oxide, and the like), HAT-CN (1,4,5,8,9,11-hexaazatriphenylene-hexacarbonitrile), a compound represented by Chemical Formula 221, and/or at least one selected from Chemical Formula P1 to Chemical Formula P18, but the present invention is not limited thereto.




<HAT-CN>

-continued

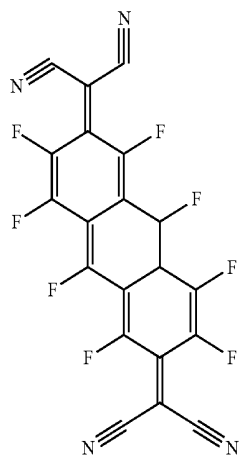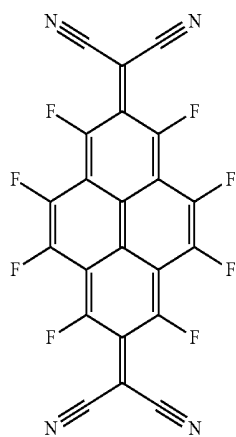


Chemical Formula 221

-continued

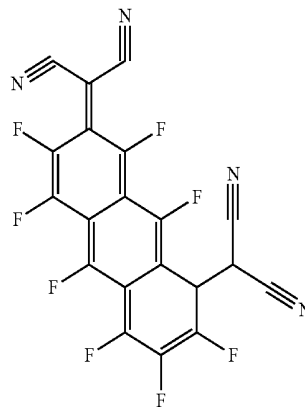


P3

P1

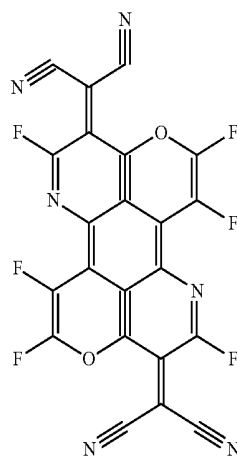




P4

P2

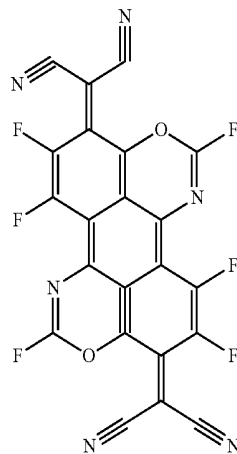


P5

-continued

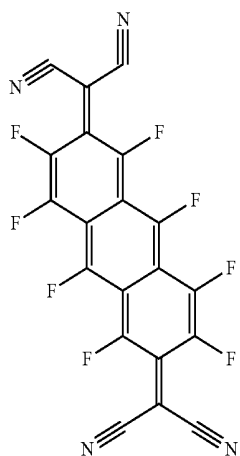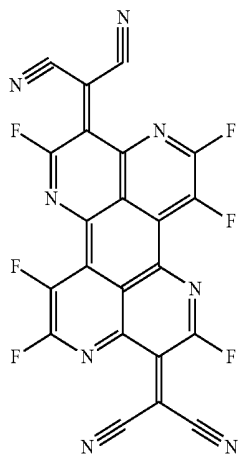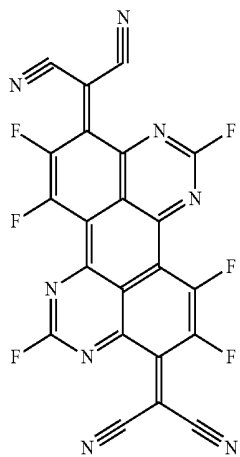


-continued

P6

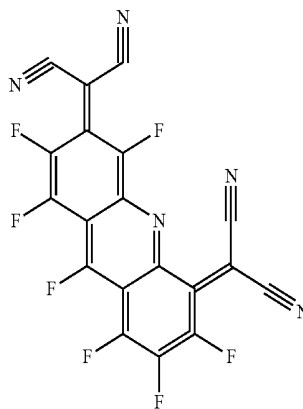


P9

P7

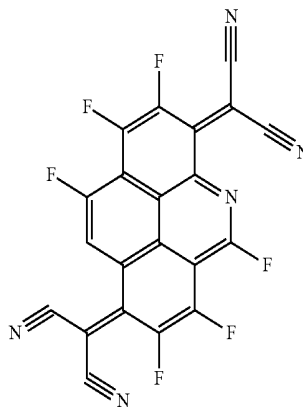


P10

P8

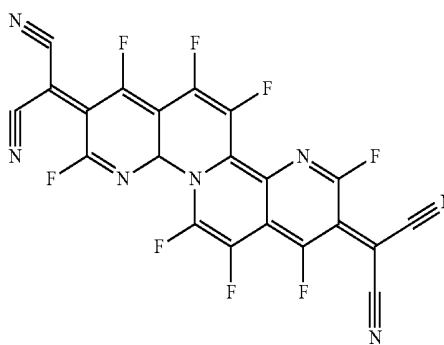


P11

P12

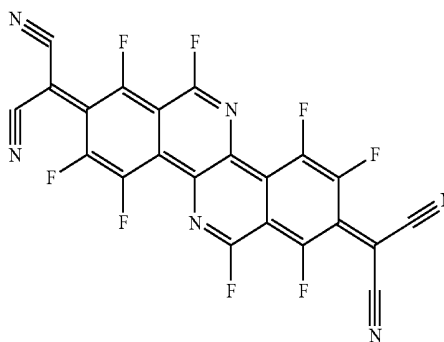


P12

-continued

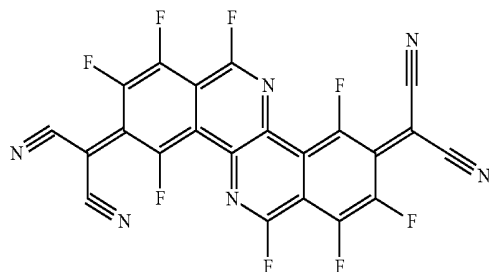


P13


-continued

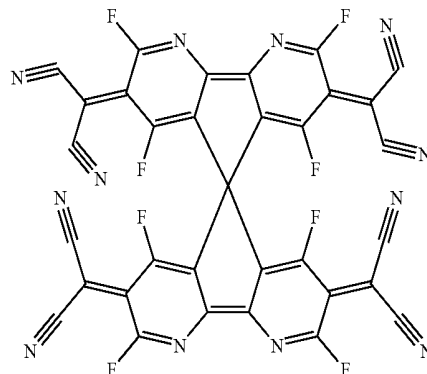


P17

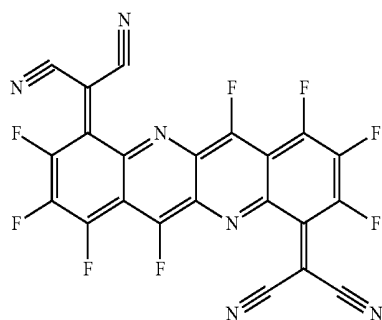


P14

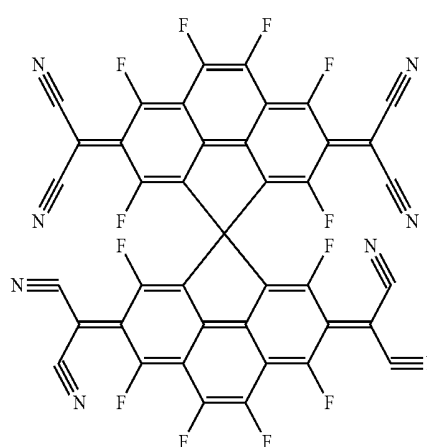

P18

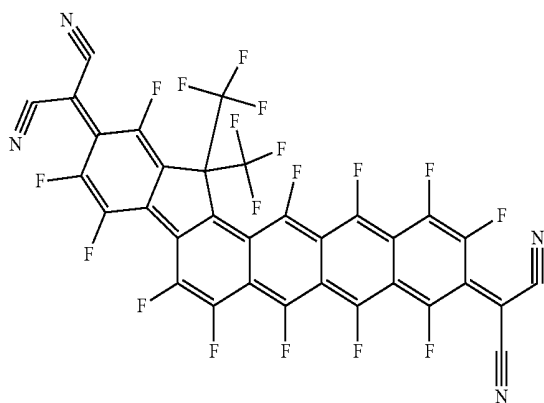

P15

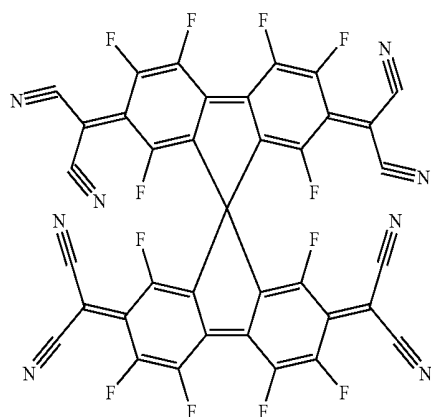

P16

[0057] In Chemical Formula 221, R_{221} to R_{223} may be each independently selected from a substituted or unsubstituted C_3 - C_{10} cycloalkyl group, a substituted or unsubstituted C_1 - C_{10} heterocycloalkyl group, a substituted or unsubstituted C_3 - C_{10} cycloalkenyl group, a substituted or unsubstituted C_1 - C_{10} heterocycloalkenyl group, a substituted or unsubstituted C_6 - C_{60} aryl group, a substituted or unsubstituted C_1 - C_{60} heteroaryl group, a substituted or unsubstituted monovalent non-aromatic condensed polycyclic group, and a substituted or unsubstituted monovalent non-aromatic hetero-condensed polycyclic group. At least one of R_{221} to R_{223} has at least one selected from a cyano group; a C_1 - C_{20} alkyl group substituted with $-F$, $-Cl$, $-Br$, or $-I$; a C_1 - C_{20} alkyl group substituted with $-Cl$; a C_1 - C_{20} alkyl group substituted with $-Br$; and a C_1 - C_{20} alkyl group substituted with $-I$.

[0058] With the above-stated hole transport region, an injection amount of holes into the emission layer can be adjusted. Thus, an appropriate level of holes are provided to the emission layer by preventing or substantially preventing an excessive amount of holes from being injected into the emission layer so that collision between holes and electrons can be increased, thereby increasing the formation of excitons from recombination of the holes and electrons. Accordingly, light emission efficiency of the organic light emitting diode according to the exemplary embodiment of the present invention can be increased.

[0059] When the organic light emitting device is provided as a full-color organic light emitting device, the emission layer may be patterned into a red emission layer, a green emission layer, and a blue emission layer per sub-pixel.

Alternatively, the emission layer may have a structure in which two or more layers selected from the red emission layer, the green emission layer, and the blue emission layer are stacked while contacting each other or stacked apart from each other, or may have a structure in which two or more materials selected from a red light emission material, a green light emission material, and a blue light emission layer are mixed in the same layer such that white light can be emitted.


[0060] According to the exemplary embodiment of the present invention, in the emission layer, holes and electrons can be more actively recombined in a region that is adjacent to (e.g., closer to) the hole transport region than in a region adjacent to (e.g., closer to) an electron transport region. The excitons may be formed in all regions of the emission layer, but a region with the largest light emission may be disposed adjacent to the hole transport region.

[0061] In the above-described hole transport region, because the amount of holes injected into the emission layer can be adjusted, a plurality of holes can be provided at a location adjacent to the hole transport region in the emission layer. Accordingly, excitons formed from recombination of the electrons and holes may be dispersed adjacent to the hole transport region.

[0062] The emission layer may include a host and a dopant. The dopant may include at least one of a phosphorescent dopant and a fluorescent dopant. An amount of the dopant in the emission layer may be included within a range of about 0.01 wt % to about 15 wt % with respect to (i.e., based on) about 100 wt % of the host in general, but the present invention is not limited thereto.

[0063] The emission layer may have a thickness of about 100 Å to about 1000 Å, for example, from about 200 Å to about 600 Å. When the thickness of the emission layer satisfies the above-stated range, excellent light emission characteristics can be achieved without substantially increasing a driving voltage.

[0064] The host may include a compound represented by Chemical Formula 301.




Chemical Formula 301

[0065] In Chemical Formula 301, Ar_{301} may be a substituted or unsubstituted $\text{C}_5\text{-C}_{60}$ carbocyclic group or a substituted or unsubstituted $\text{C}_1\text{-C}_{60}$ heterocyclic group. $\text{Xb}11$ may be 1, 2, or 3. L_{301} may be selected from a substituted or unsubstituted $\text{C}_3\text{-C}_{10}$ cycloalkylene group, a substituted or unsubstituted $\text{C}_1\text{-C}_{10}$ heterocycloalkylene group, a substituted or unsubstituted $\text{C}_3\text{-C}_{10}$ cycloalkenyl group, a substituted or unsubstituted $\text{C}_1\text{-C}_{10}$ heterocycloalkenylene group, a substituted or unsubstituted $\text{C}_6\text{-C}_{60}$ arylene group, a substituted or unsubstituted $\text{C}_1\text{-C}_{60}$ heteroarylene group, a substituted or unsubstituted divalent non-aromatic condensed polycyclic group, and a substituted or unsubstituted divalent non-aromatic hetero-condensed polycyclic group. $\text{xb}1$ is selected from integers of 0 to 5. R_{301} is selected from deuterium, $-\text{F}$, $-\text{Cl}$, $-\text{Br}$, $-\text{I}$, a hydroxyl group, a cyano group, a nitro group, an amidino group, a hydrazino group, a hydrazono group, a substituted or unsubstituted $\text{C}_1\text{-C}_{60}$ alkyl group, a substituted or unsubstituted $\text{C}_2\text{-C}_{60}$ alkenyl group, a substituted or unsubstituted $\text{C}_2\text{-C}_{60}$ alkynyl group, a substituted or unsubstituted $\text{C}_1\text{-C}_{60}$ alkoxy group, a substituted or unsubstituted $\text{C}_3\text{-C}_{10}$ cycloalkyl group, a substi-


tuted or unsubstituted $\text{C}_1\text{-C}_{10}$ heterocycloalkyl group, a substituted or unsubstituted $\text{C}_3\text{-C}_{10}$ cycloalkenyl group, a substituted or unsubstituted $\text{C}_1\text{-C}_{10}$ heterocycloalkenyl group, a substituted or unsubstituted $\text{C}_6\text{-C}_{60}$ aryl group, a substituted or unsubstituted $\text{C}_6\text{-C}_{60}$ aryloxy group, a substituted or unsubstituted $\text{C}_6\text{-C}_{60}$ arylthio group, a substituted or unsubstituted $\text{C}_1\text{-C}_{60}$ heteroaryl group, a substituted or unsubstituted monovalent non-aromatic condensed polycyclic group, a substituted or unsubstituted monovalent non-aromatic hetero-condensed polycyclic group, $-\text{Si}(\text{Q}_{301})(\text{Q}_{302})(\text{Q}_{303})$, $-\text{N}(\text{Q}_{301})(\text{Q}_{302})$, $-\text{B}(\text{Q}_{301})(\text{Q}_{302})$, $-\text{C}(=\text{O})(\text{Q}_{301})$, $-\text{S}(=\text{O})_2(\text{Q}_{301})$, and $-\text{P}(=\text{O})(\text{Q}_{301})(\text{Q}_{302})$. $\text{xb}21$ is selected from integers of 1 to 5, and Q_{301} to Q_{303} may be each independently selected from a $\text{C}_1\text{-C}_{10}$ alkyl group, a $\text{C}_1\text{-C}_{10}$ alkoxy group, a phenyl group, a biphenyl group, a terphenyl group, and a naphthyl group, but the present invention is not limited thereto.

[0066] As another example, the host may include an alkali earth metal complex. For example, the host may be selected from a Be complex (e.g., compound H55), a Mg complex, and a Zn complex.


[0067] The host may include at least one selected from ADN (9,10-di(2-naphthyl)anthracene), MADN (2-methyl-9,10-bis(naphthalen-2-yl)anthracene), TBADN (9,10-di(2-naphthyl)-2-t-butyl-anthracene), CBP (4,4'-bis(N-carbazolyl)-1,1'-biphenyl), mCP (1,3-di-9-carbazolylbenzene), TCP (1,3,5-tri(carbazol-9-yl)benzene), and compounds H1 to H55, but the present invention is not limited thereto.



H1

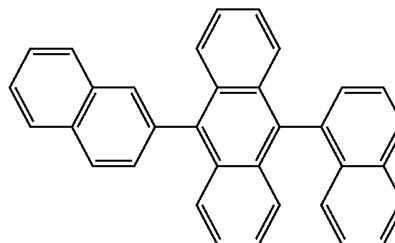


H2

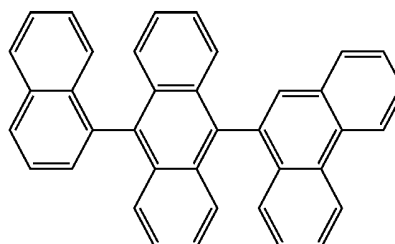


H3


-continued

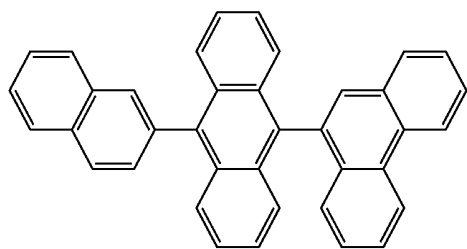


H4

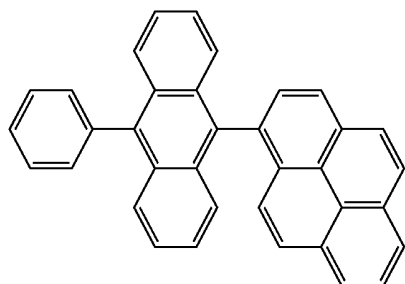


H5

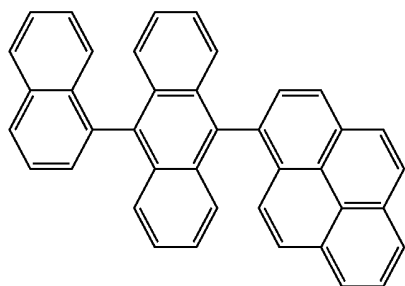


H6

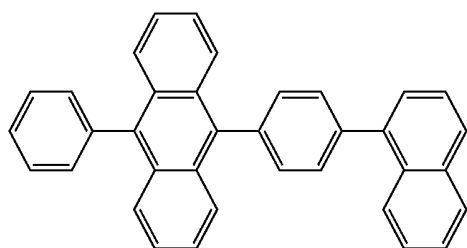

H7

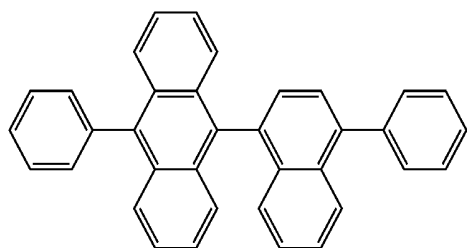


H8

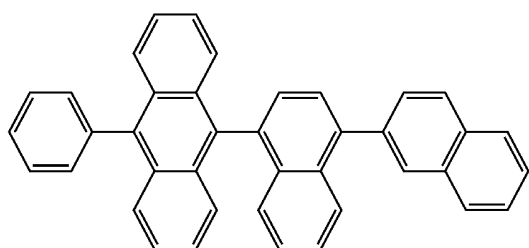


H9


-continued

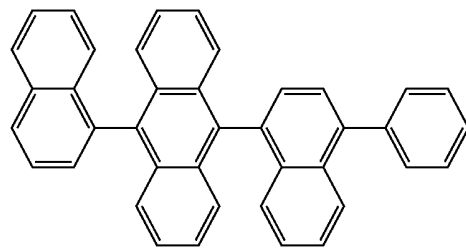


H10

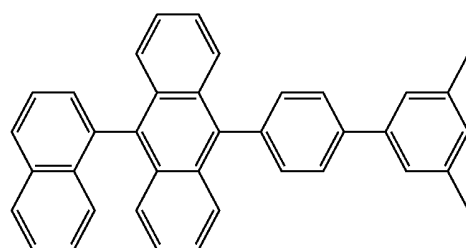


H11

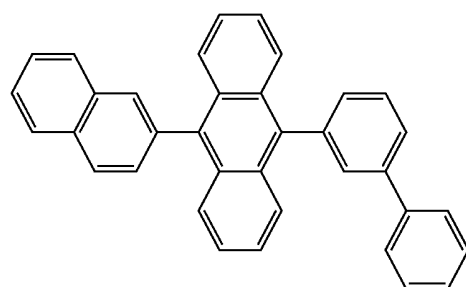

H12

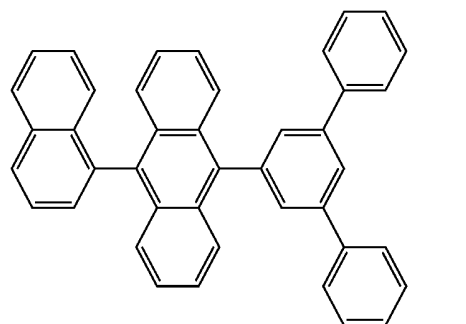



H13

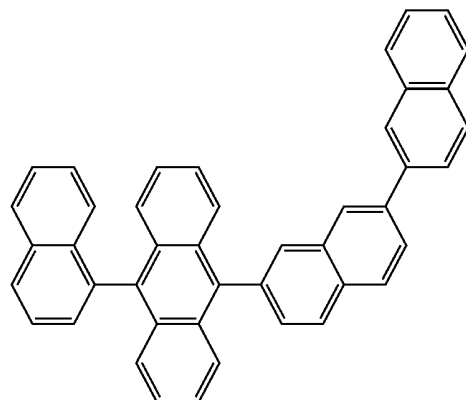


H14

-continued

-continued

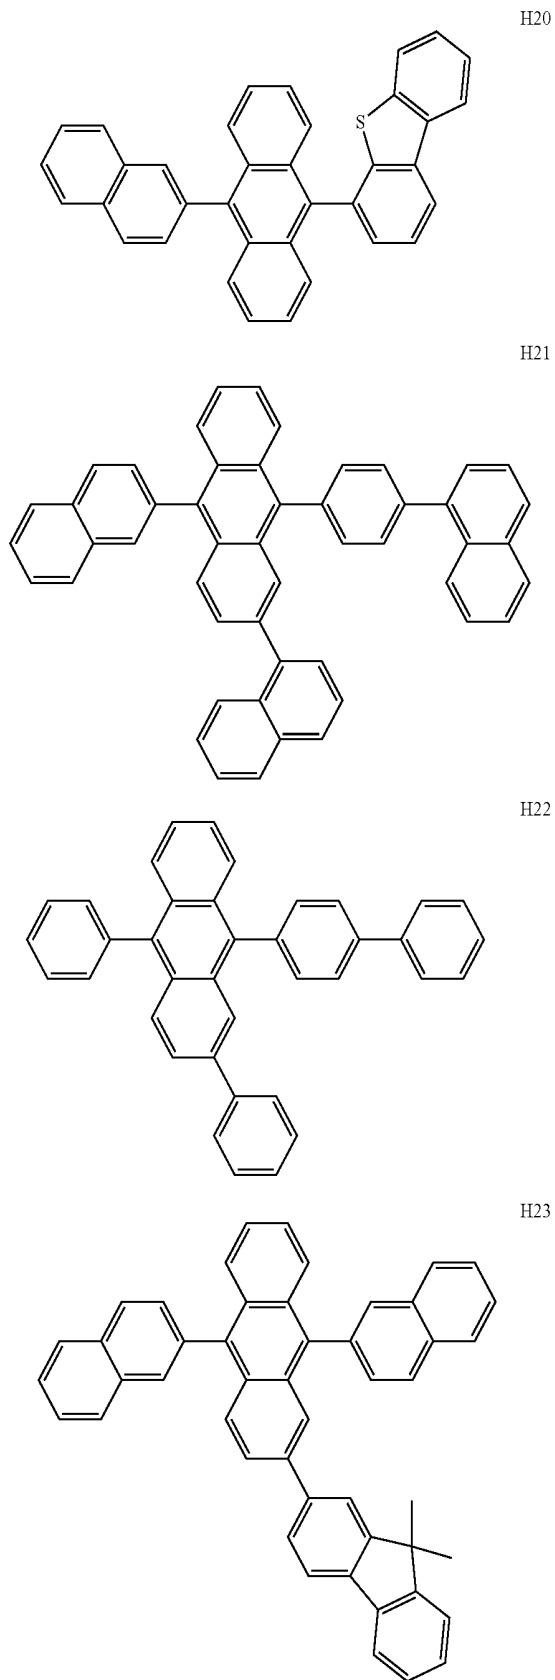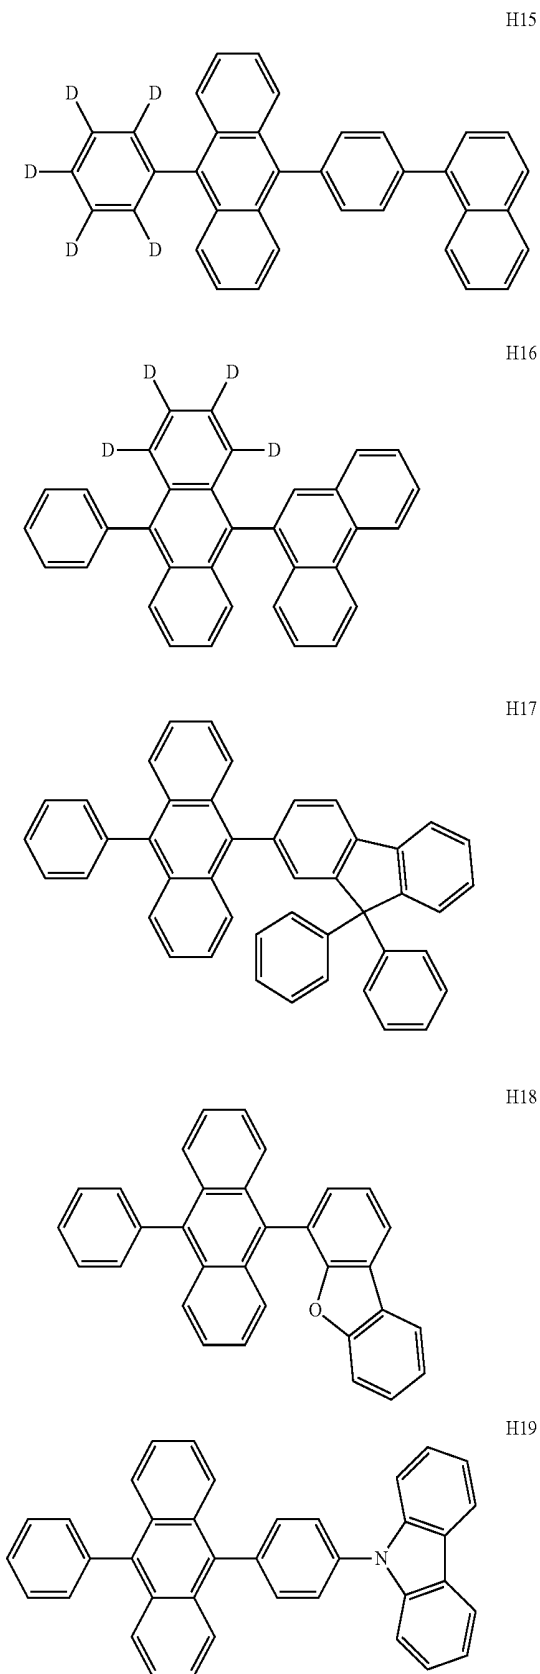


-continued

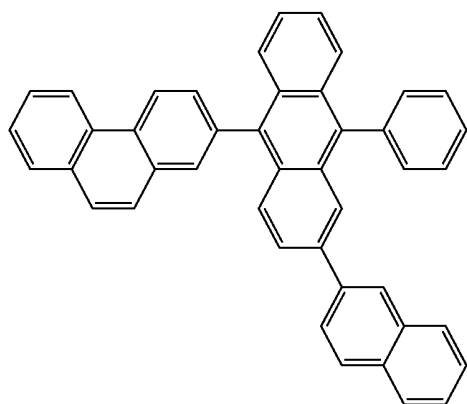


H24

-continued

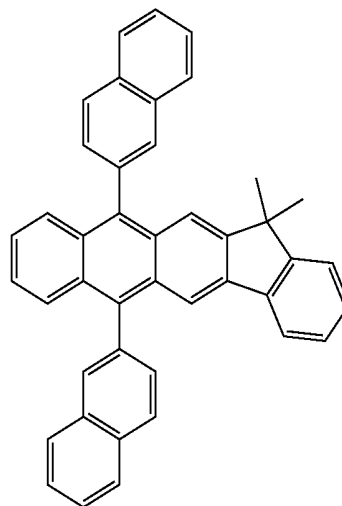


H27


H25

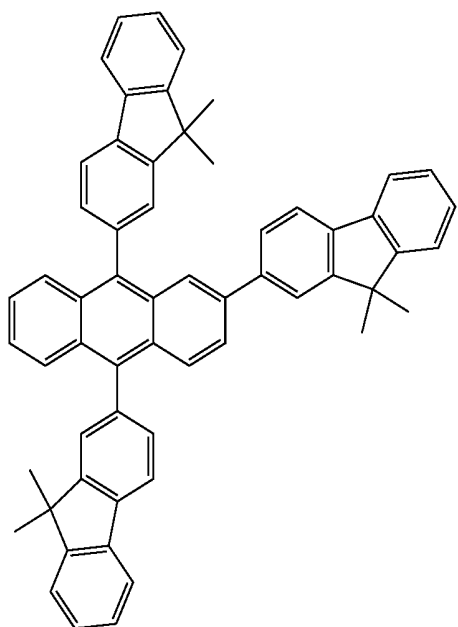


H28

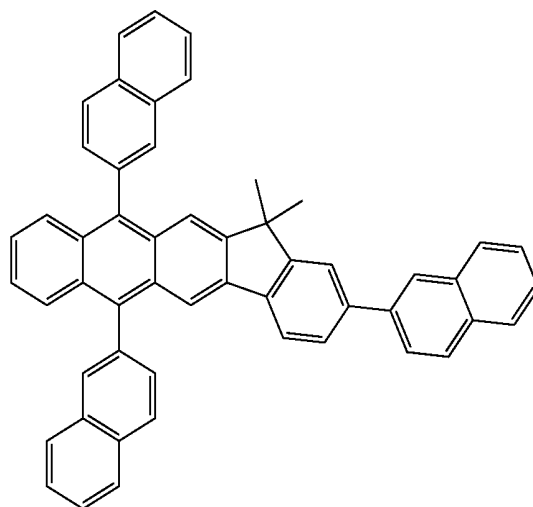

H26

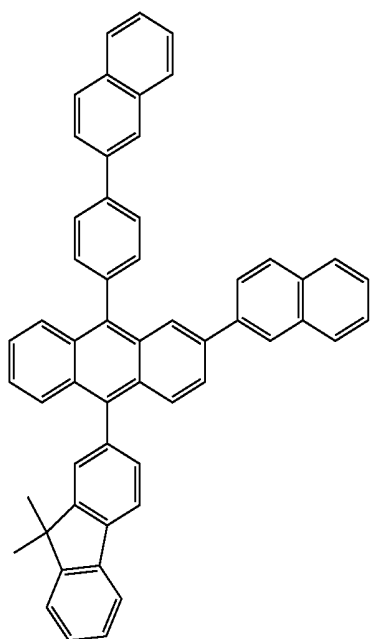

H29


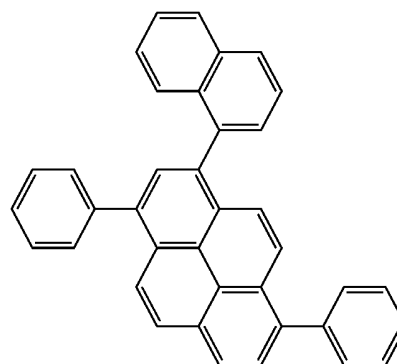


-continued

-continued



H34

H30

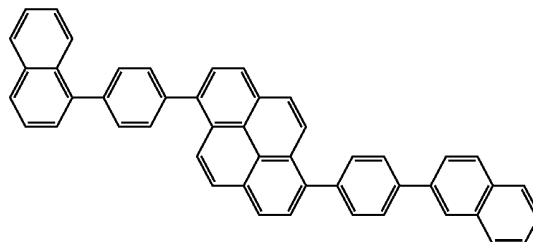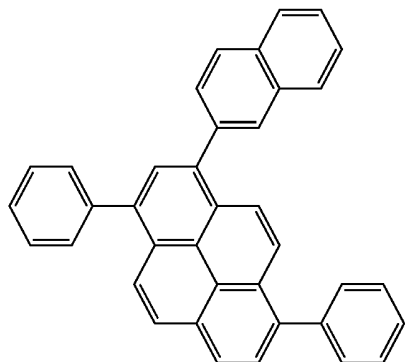



H35

H31

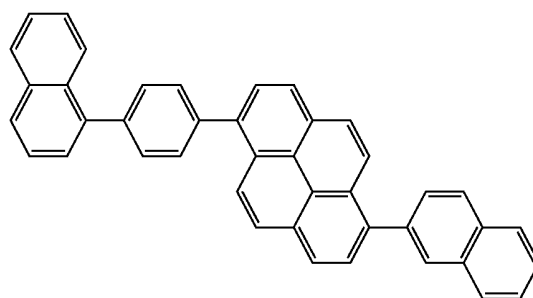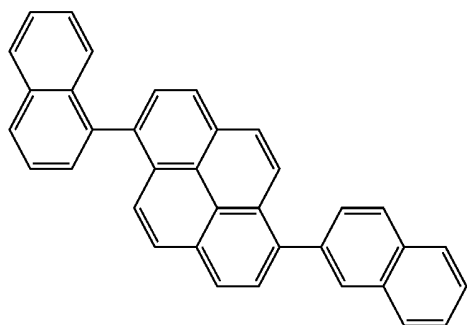


H36


H32

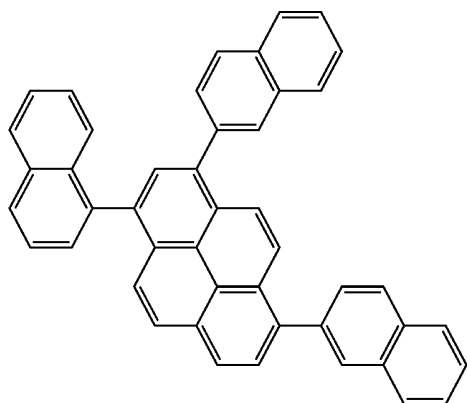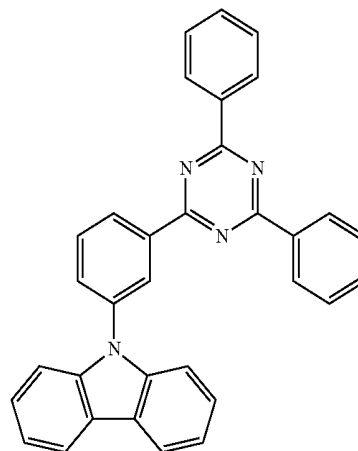




H33

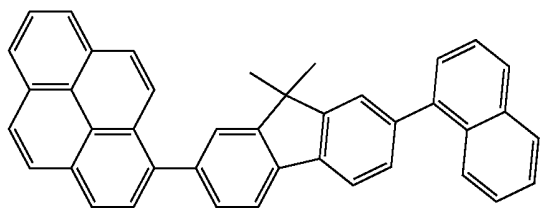




H37

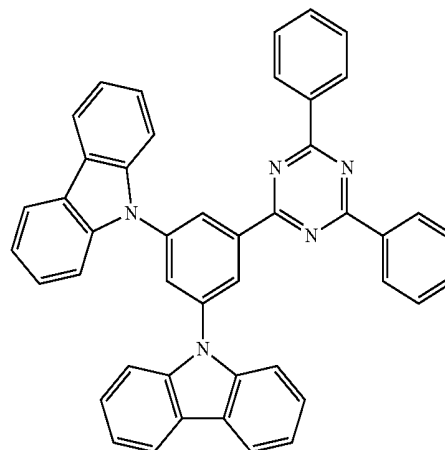


-continued

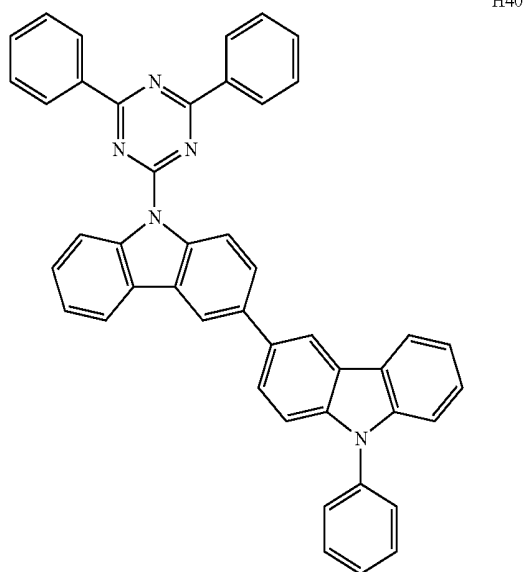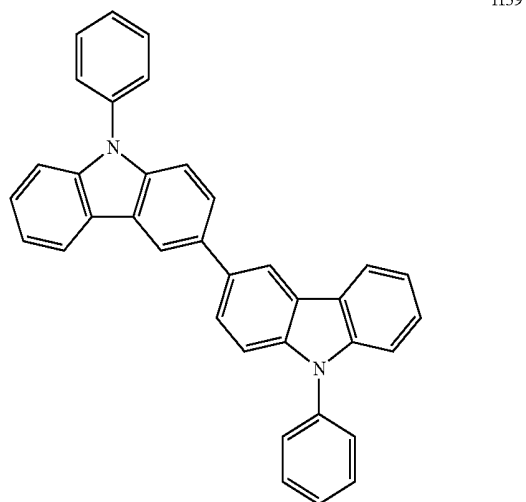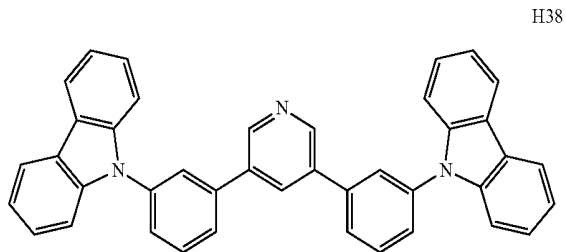


-continued

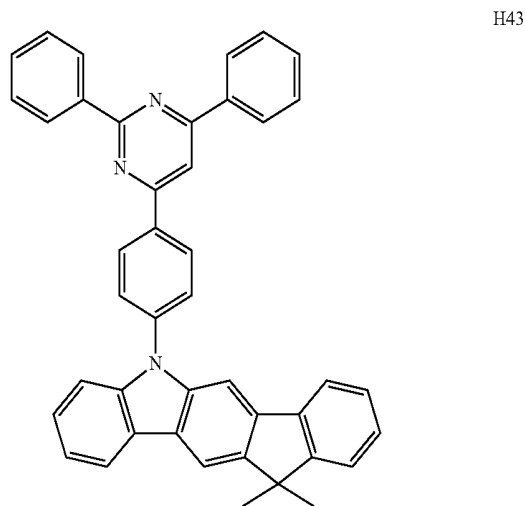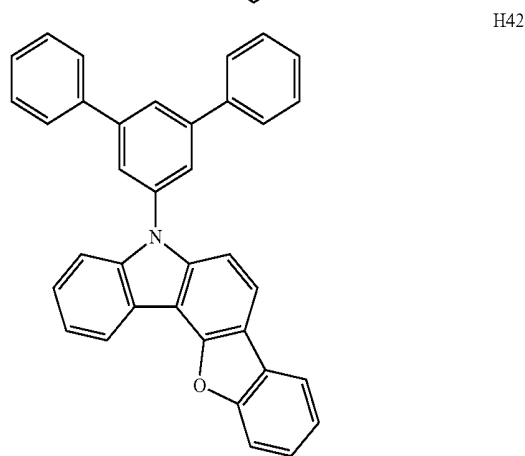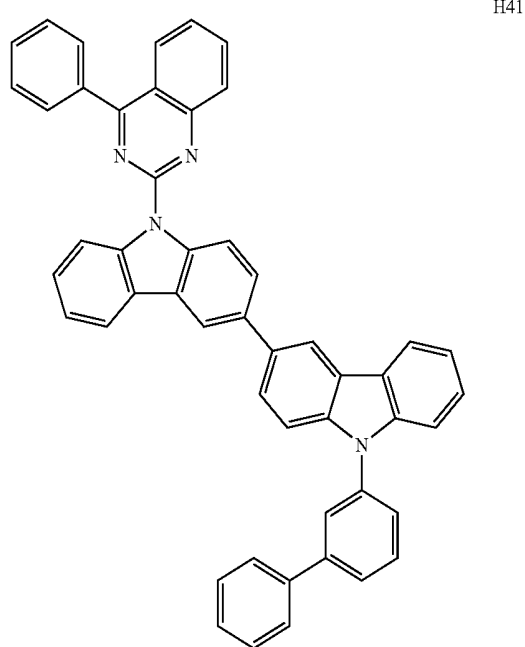


-continued

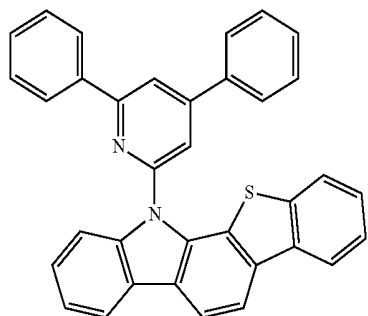


H44

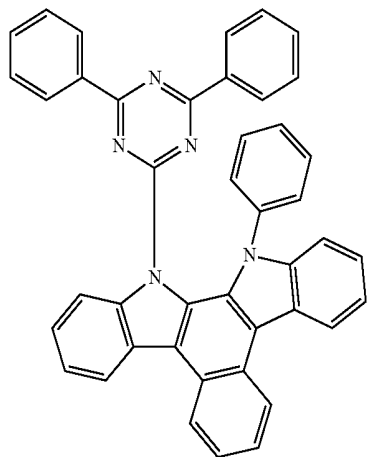

H45

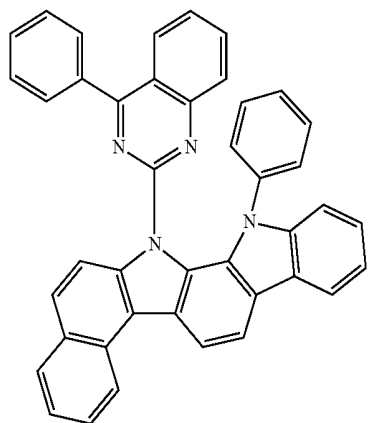


H46

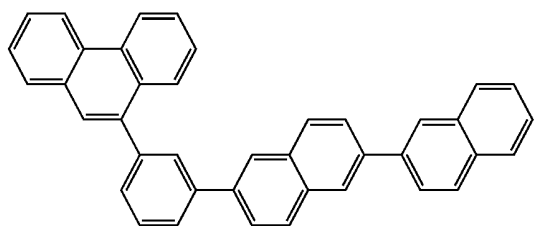


H47


-continued

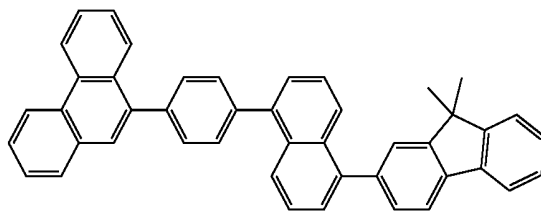


H48

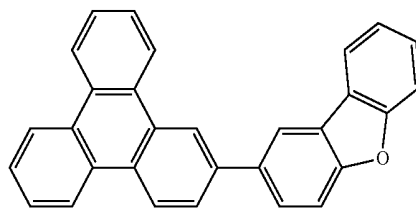


H49

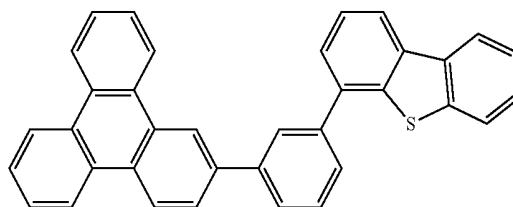


H50

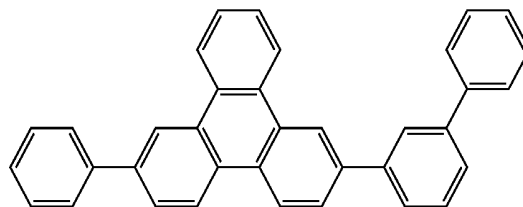

H51

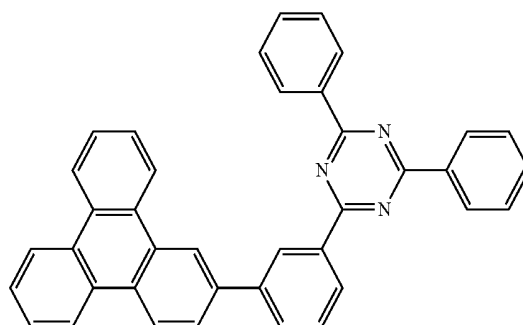


H52

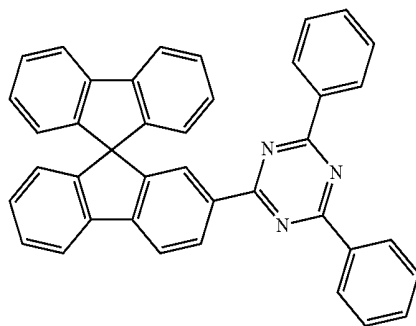


H53

-continued

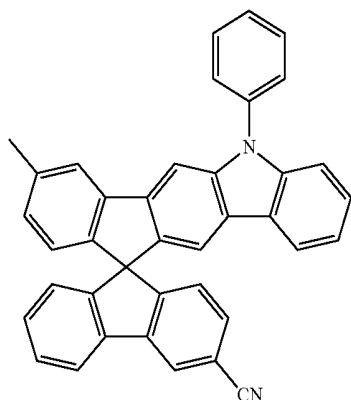


H54

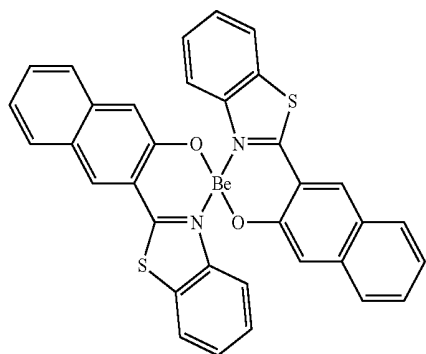


H55

[0068] The phosphor dopant (e.g., the phosphorescent dopant) may include an organic metal complex represented by Chemical Formula 401.



Chemical Formula 401




Chemical Formula 402

[0069] In Chemical Formula 401 and Chemical Formula 402, M may be selected from iridium (Ir), platinum (Pt), palladium (Pd), osmium (Os), titanium (Ti), zirconium (Zr), hafnium (Hf), europium (Eu), terbium (Tb), rhodium (Rh), and thulium (Tm). L_{401} may be selected from a ligand represented by Chemical Formula 402. $xc1$ may be 1, 2, or 3. When $xc1$ is greater than or equal to 2, 2 or more of






$L_{401}(s)$ may be the same as or different from each other. L_{402} may be an organic ligand. $xc2$ may be selected from integers of 0 to 4. When $xc2$ is greater than or equal to 2, 2 or more of $L_{402}(s)$ may be the same as or different from each other. X_{401} to X_{404} may each independently be nitrogen or carbon. X_{401} and X_{403} may be connected with each other through a single bond or a double bond. X_{402} and X_{404} may be connected with each other through a single bond or a double bond. A_{401} and A_{402} may independently be a C_5 - C_{60} carbocyclic group or a C_1 - C_{60} heterocyclic group. X_{405} may be a single bond, $*-O-*$, $*-S-*$, $*-C(=O)-*$, $*-N(Q_{411})-*$, $*-C(Q_{411})(Q_{412})-*$, $*-C(Q_{411})-C(Q_{412})-*$, $*-C(Q_{411})=*$, or $*=C(Q_{411})=*$. Q_{411} and Q_{412} may each independently be hydrogen, deuterium, a C_1 - C_{20} alkyl group, a C_1 - C_{20} alkoxy group, a phenyl group, a biphenyl group, a terphenyl group, or a naphthyl group. X_{406} may be a single bond, O, or S. R_{401} and R_{402} may each independently be hydrogen, deuterium, $-F$, $-Cl$, $-Br$, $-I$, a hydroxyl group, a cyano group, a nitro group, an amidino group, a hydrazino group, a hydrazono group, a substituted or unsubstituted C_1 - C_{20} alkyl group, a substituted or unsubstituted C_1 - C_{20} alkoxy group, a substituted or unsubstituted C_3 - C_{10} cycloalkyl group, a substituted or unsubstituted C_1 - C_{10} heterocycloalkyl group, a substituted or unsubstituted C_3 - C_{10} cycloalkenyl group, a substituted or unsubstituted C_1 - C_{10} heterocycloalkenyl group, a substituted or unsubstituted C_6 - C_{60} aryl group, a substituted or unsubstituted C_6 - C_{60} aryloxy group, a substituted or unsubstituted C_6 - C_{60} arylthio group, a substituted or unsubstituted C_1 - C_{60} heteroaryl group, a substituted or unsubstituted monovalent non-aromatic condensed polycyclic group, a substituted or unsubstituted monovalent non-aromatic hetero-condensed polycyclic group, $-Si(Q_{401})(Q_{402})(Q_{403})$, $-N(Q_{401})(Q_{402})$, $-B(Q_{401})(Q_{402})$, $-C(=O)(Q_{401})$, $-S(=O)_2(Q_{401})$, or $-P(=O)(Q_{401})(Q_{402})$, wherein Q_{401} to Q_{403} may be each independently selected from a C_1 - C_{10} alkyl group, a C_1 - C_{10} alkoxy group, a C_6 - C_{20} aryl group, and a C_1 - C_{20} heteroaryl group. $xc11$ and $xc12$ may be each independently selected from integers of 0 to 10, and $*$ and $*'$ in Chemical Formula 402 each represent a binding site with M in Chemical Formula 401.

[0070] Alternatively, the phosphor dopant may be selected from compound PD1 to compound PD 25, but the present invention is not limited thereto.

PD1

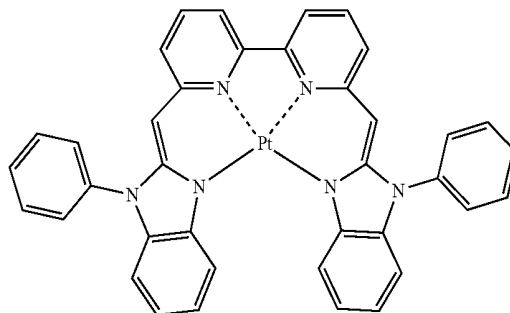


-continued

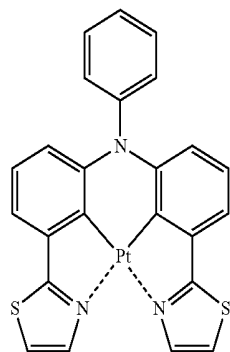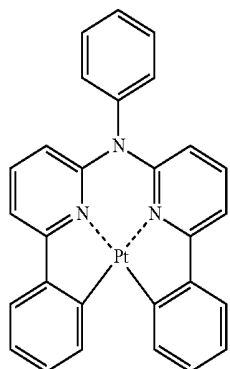


-continued

PD2




PD7

PD3




PD8

PD4




PD9

PD5







PD10

PD6




PD11

-continued

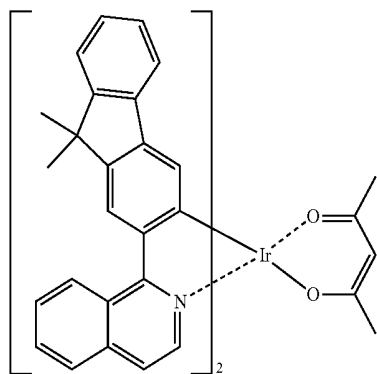


-continued

PD12




PD16

PD13




PD17

PD14




PD18

PD15




PD19



PD20


-continued

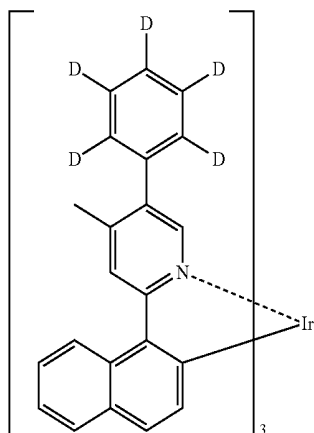

PD21

-continued



PD25

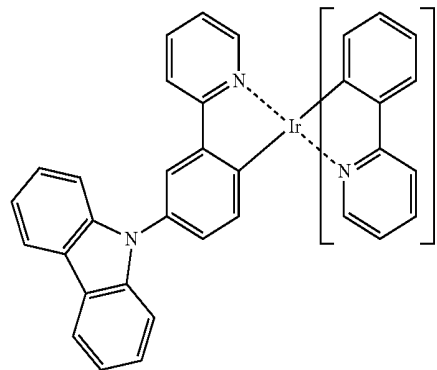


PD22

[0071] The fluorescent dopant may include a compound represented by Chemical Formula 501.


Chemical Formula 501

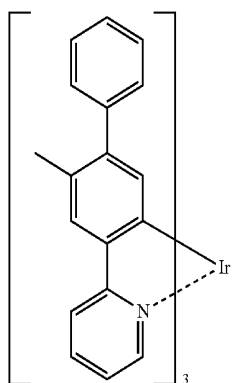

PD23



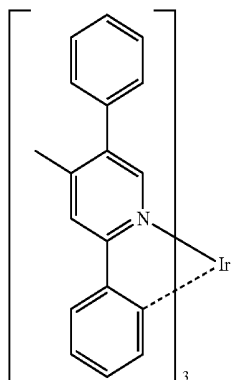


PD24

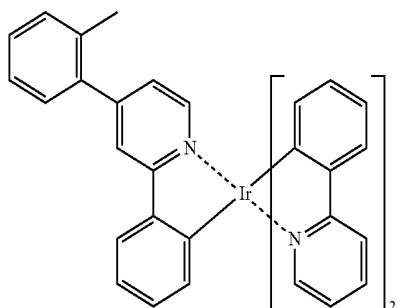

[0072] In Chemical Formula 501, Ar_{501} may be a substituted or unsubstituted $\text{C}_5\text{-C}_{60}$ carbocyclic group or a substituted or unsubstituted $\text{C}_1\text{-C}_{60}$ heterocyclic group. L_{501} to L_{503} may be each independently selected from a substituted or unsubstituted $\text{C}_3\text{-C}_{10}$ cycloalkylene group, a substituted or unsubstituted $\text{C}_1\text{-C}_{10}$ heterocycloalkylene group, a substituted or unsubstituted $\text{C}_3\text{-C}_{10}$ cycloalkenylene group, a substituted or unsubstituted $\text{C}_1\text{-C}_{10}$ heterocycloalkenylene group, a substituted or unsubstituted $\text{C}_6\text{-C}_{60}$ arylene group, a substituted or unsubstituted $\text{C}_1\text{-C}_{60}$ heteroarylene group, a substituted or unsubstituted divalent non-aromatic condensed polycyclic group, and a substituted or unsubstituted divalent non-aromatic hetero-condensed polycyclic group. x_{d1} to x_{d3} may be each independently selected from integers of 0 to 3. R_{501} and R_{502} may be each independently selected from a substituted or unsubstituted $\text{C}_3\text{-C}_{10}$ cycloalkyl group, a substituted or unsubstituted $\text{C}_1\text{-C}_{10}$ heterocycloalkyl group, a substituted or unsubstituted $\text{C}_3\text{-C}_{10}$ cycloalkenyl group, a substituted or unsubstituted $\text{C}_1\text{-C}_{10}$ heterocycloalkenyl group, a substituted or unsubstituted $\text{C}_6\text{-C}_{60}$ aryl group, a substituted or unsubstituted $\text{C}_6\text{-C}_{60}$ aryloxy group, a substituted or unsubstituted $\text{C}_6\text{-C}_{60}$ arylthio group, a substituted or unsubstituted $\text{C}_1\text{-C}_{60}$ heteroaryl group, a substituted or unsubstituted monovalent non-aromatic condensed polycyclic group, and a substituted or unsubstituted monovalent non-aromatic hetero-condensed polycyclic group. x_{d4} may be selected from integers of 1 to 6.


[0073] For example, the fluorescent dopant may be selected from compound FD1 to compound FD22.

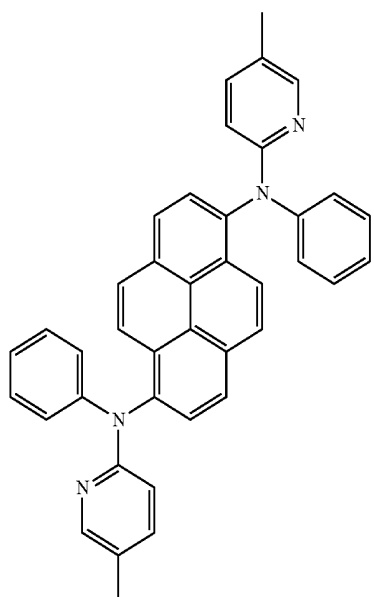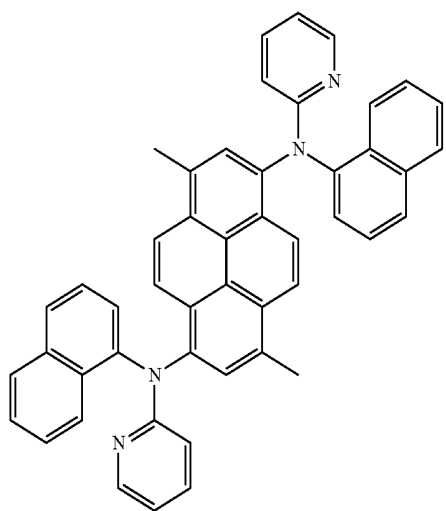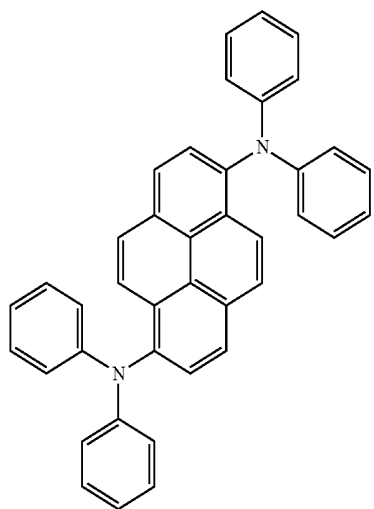

-continued


FD1

FD4

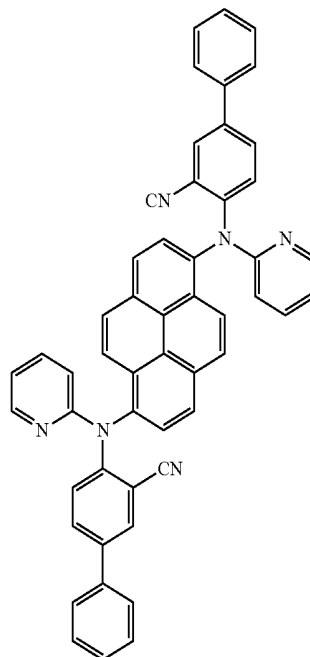


FD2

FD5

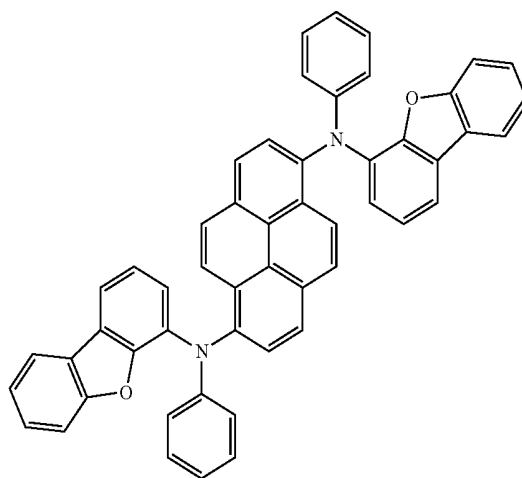


FD3

FD6

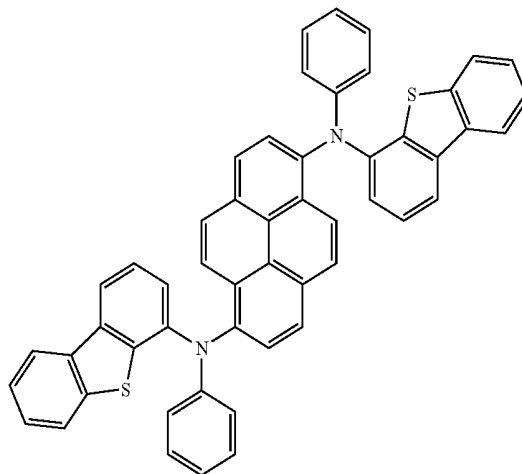


-continued

FD7

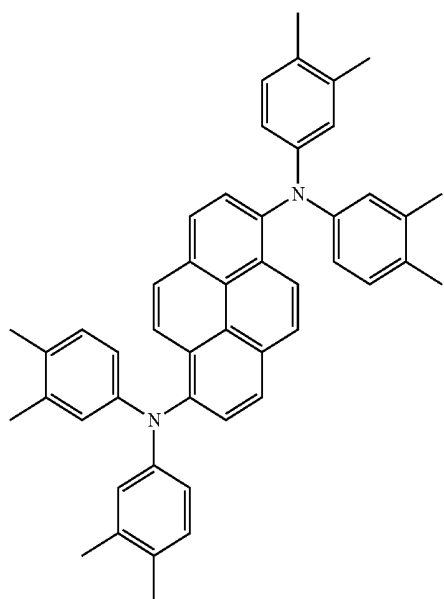


-continued


FD10

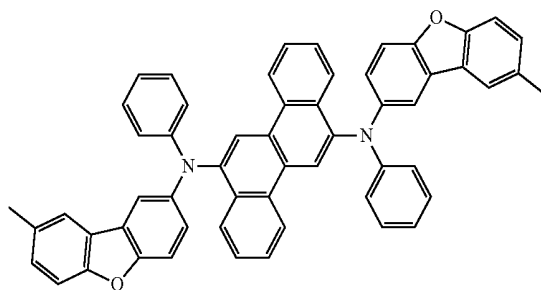


FD11

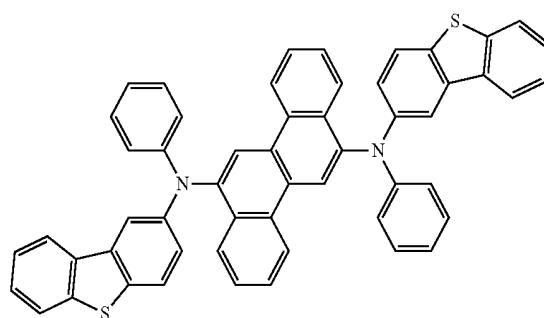

FD8


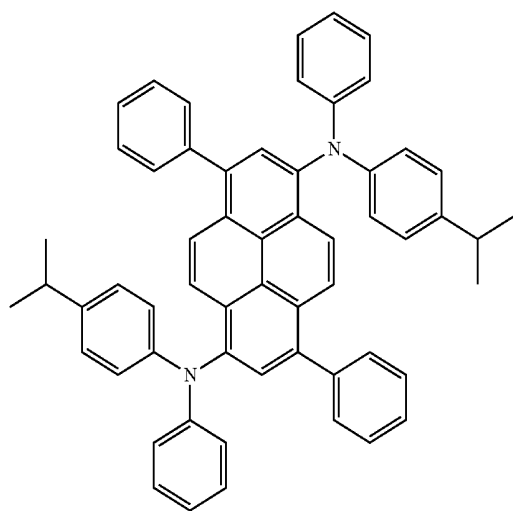


FD12

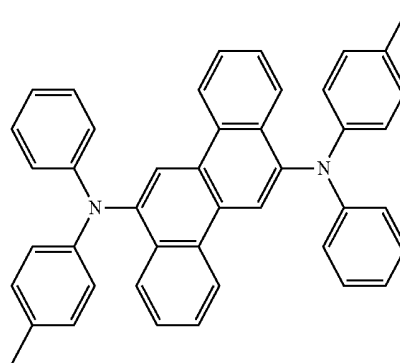


FD13





FD9

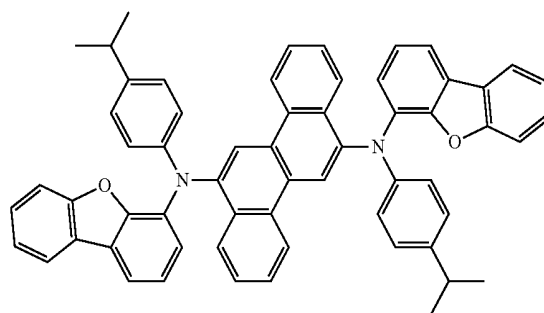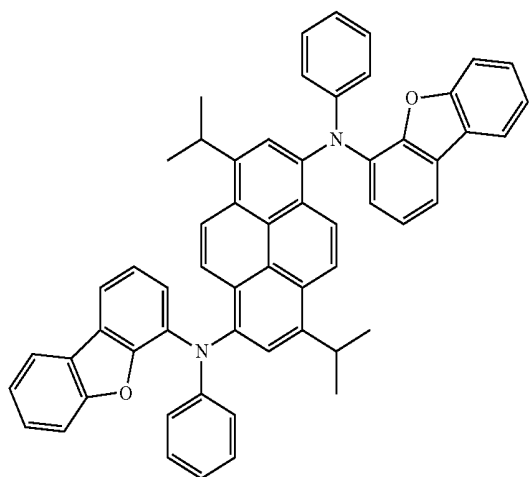

FD14




-continued

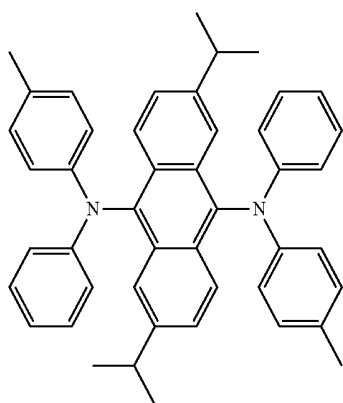

-continued


FD15

FD19

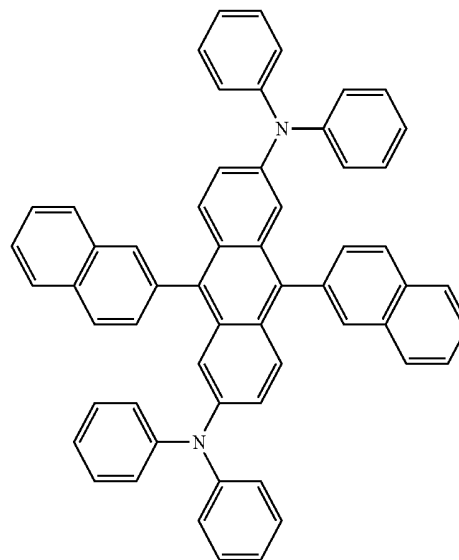


FD16

FD17

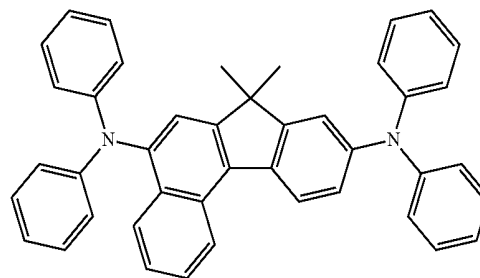


FD20

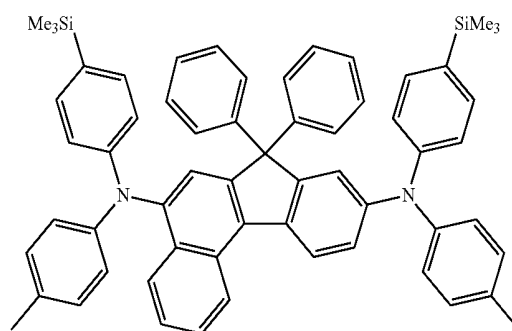


FD21

FD18


FD22

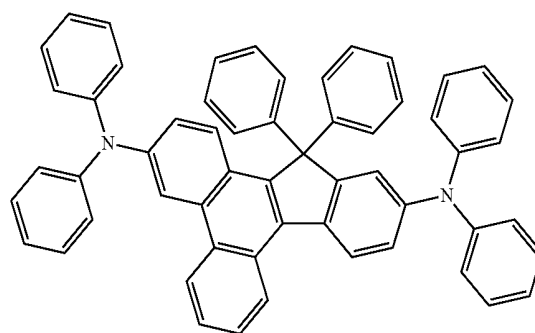


[0074] Alternatively, the fluorescent dopant may be selected from the following compounds, but the present invention is not limited thereto.

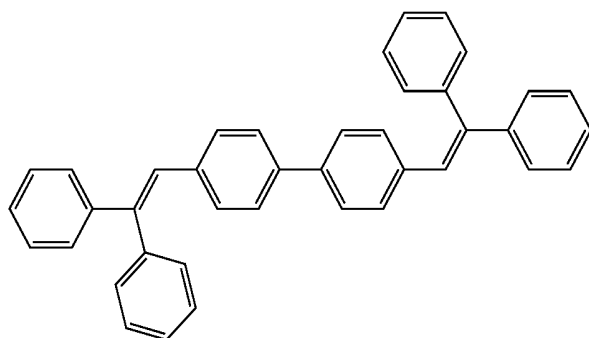


DPVBi

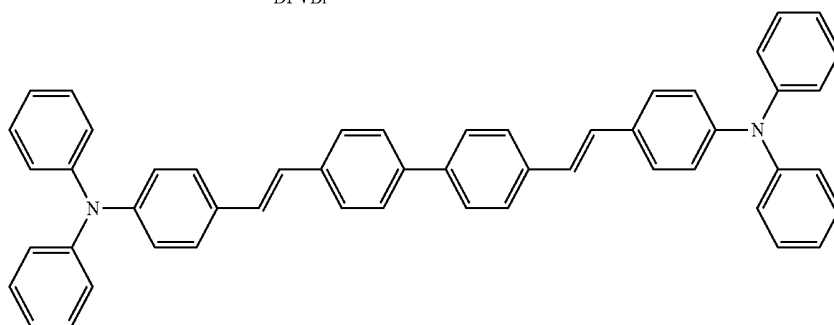


DPAVBi




TBPc

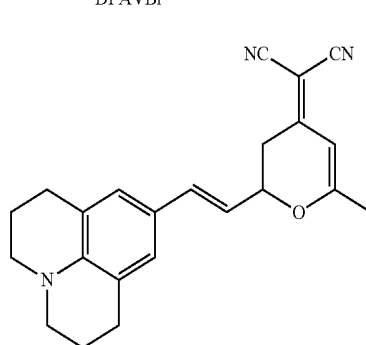


DCM

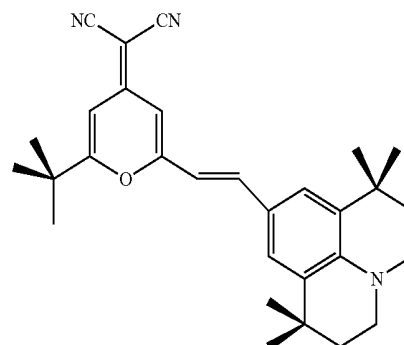

DCJTb

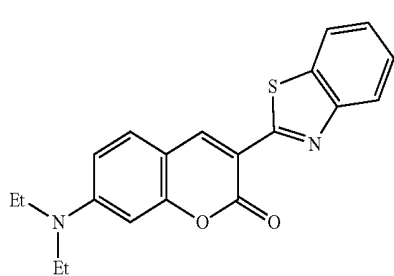

Coumarin 6

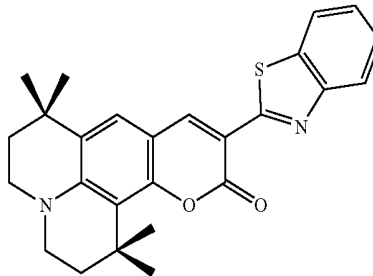

C545T

[0075] The electron transport region according to the exemplary embodiment may have i) a single-layered structure formed of a single layer made of a single material; ii) a single-layered structure formed of a single layer made of a plurality of different materials; or iii) a multi-layered structure formed of a plurality of layers formed of a plurality of different materials.

[0076] The electron transport region may include at least one selected from a buffer layer, a hole blocking layer, an

electron adjusting layer, an electron transport layer (ETL), and an electron injection layer, but the present invention is not limited thereto.

[0077] For example, the electron transport region may have a structure of electron transport layer/electron injection layer, hole blocking layer/electron transport layer/electron injection layer, electron adjusting layer/electron transport layer/electron injection layer, or buffer layer/electron trans-

port layer/electron injection layer, stacked sequentially from the emission layer, but the present invention is not limited thereto.

[0078] The electron transport region (e.g., the buffer layer, the hole blocking layer, the electron adjusting layer, and/or the electron transport layer in the electron transport region) may include a metal-free compound including at least one π electron deficient nitrogen ring.

[0079] The term “ π electron deficient nitrogen ring” refers to that as a ring-forming moiety, a C_1 - C_{60} heterocyclic group having at least one $*-N=*$ moiety. For example, the term “ π electron deficient nitrogen ring” may be i) a 5 to 7-membered heteromonocyclic group having at least one $*-N=*$ moiety; ii) a heteromonocyclic group having two or more of 5 to 7-membered heteromonocyclic groups having at least one $*-N=*$ moiety condensed with each other; or iii) a heteropolycyclic group having at least one of 5 to 7-membered heteromonocyclic groups having at least one $*-N=*$ moiety and at least one C_5 - C_{60} carbocyclic group condensed with each other.

[0080] For example, the π electron deficient nitrogen ring may be imidazole, pyrazon, thiazole, isothiazole, oxazole, isoxazole, pyridine, pyrazine, pyrimidine, pyridazine, indazole, purine, quinoline, isoquinoline, benzoquinoline, phthalazine, naphthyridine, quinoline, quinoxaline, quinazoline, cinnoline, phenanthridine, acridine, phenanthroline, phenazine, benzoimidazole, isobenzothiazole, benzoxazole, isobenzoxazole, triazole, tetrazole, oxadiazole, triazine, thiadiazole, imidazopyridine, imidazopyrimidine, azacavazole, and the like, but the present invention is not limited thereto.

[0081] The electron transport region may include a compound represented by Chemical Formula 601.




[0082] In Chemical Formula 601, Ar_{601} may be a substituted or unsubstituted C_5 - C_{60} carbocyclic group or a substituted or unsubstituted C_1 - C_{60} heterocyclic group. $xe11$ may be 1, 2, or 3. L_{601} may be selected from a substituted or unsubstituted C_3 - C_{10} cycloalkylene group, a substituted or unsubstituted C_1 - C_{10} heterocycloalkylene group, a substituted or unsubstituted C_3 - C_{10} cycloalkenylene group, a substituted or unsubstituted C_1 - C_{10} heterocycloalkenyl group, a substituted or unsubstituted C_6 - C_{60} arylene group, a substituted or unsubstituted C_1 - C_{60} heteroarylene group, a substituted or unsubstituted divalent non-aromatic condensed polycyclic group, and a substituted or unsubstituted divalent non-aromatic hetero-condensed polycyclic group. $xe1$ may be selected from integers of 0 to 5. R_{601} may be selected from a substituted or unsubstituted C_3 - C_{10} cycloalkyl group, a substituted or unsubstituted C_1 - C_{10} heterocycloalkyl group, a substituted or unsubstituted C_3 - C_{10} cycloalkenyl group, a substituted or unsubstituted C_1 - C_{10} heterocycloalkenyl group, a substituted or unsubstituted C_6 - C_{60} aryl group, a substituted or unsubstituted C_6 - C_{60} aryloxy group, a substituted or unsubstituted C_6 - C_{60} arylthio group, a substituted or unsubstituted C_1 - C_{60} heteroaryl group, a substituted or unsubstituted monovalent non-aromatic condensed polycyclic group, a substituted or


unsubstituted monovalent non-aromatic hetero-condensed polycyclic group, $-(SiQ_{601})(Q_{602})(Q_{603})$, $-C(=O)(Q_{601})$, $-S(=O)_2(Q_{601})$, and $-P(=O)(Q_{601})(Q_{602})$, wherein Q_{601} to Q_{603} may each independently be a C_1 - C_{10} alkyl group, a C_1 - C_{10} alkoxy group, a phenyl group, a biphenyl group, a terphenyl group, or a naphthyl group. $xe21$ may be selected from integers of 1 to 5. According to an exemplary embodiment, at least one of the $xe11$ Ar_{601} and $xe21$ R_{601} may include the above-stated π electron deficient nitrogen ring.

[0083] The electron transport region may include at least one selected from compound ET1 to compound ET36, but the present invention is not limited thereto.


ET1

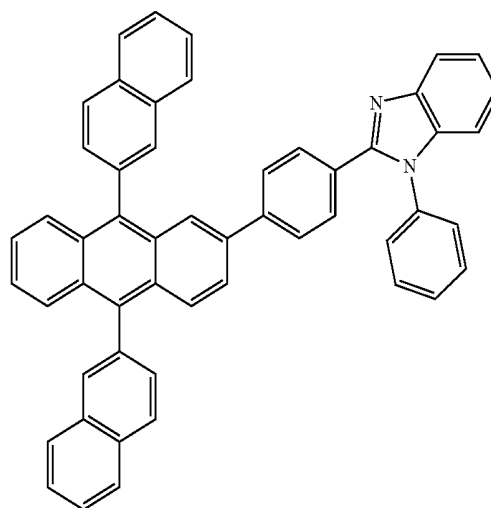






ET2

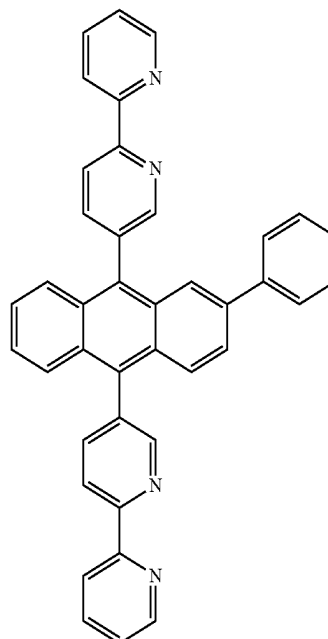


-continued

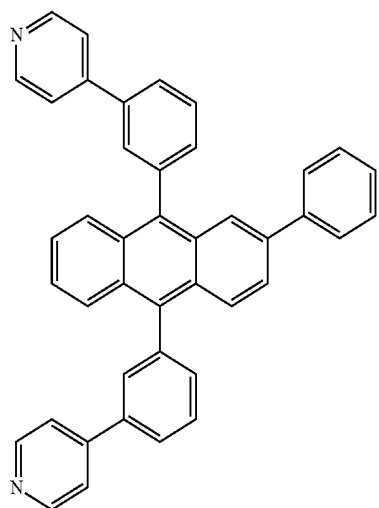

-continued

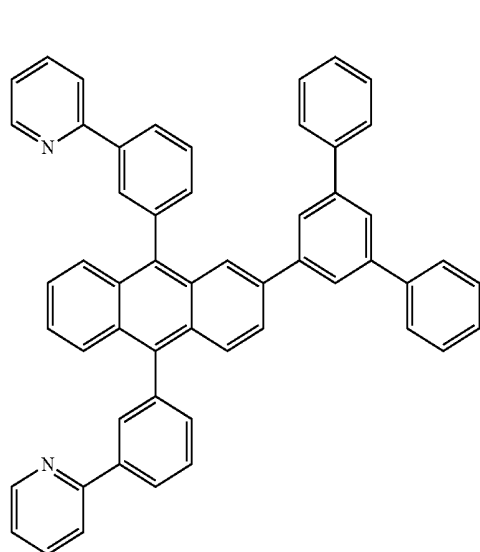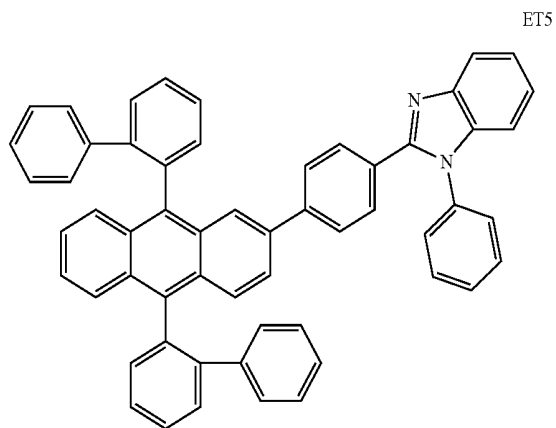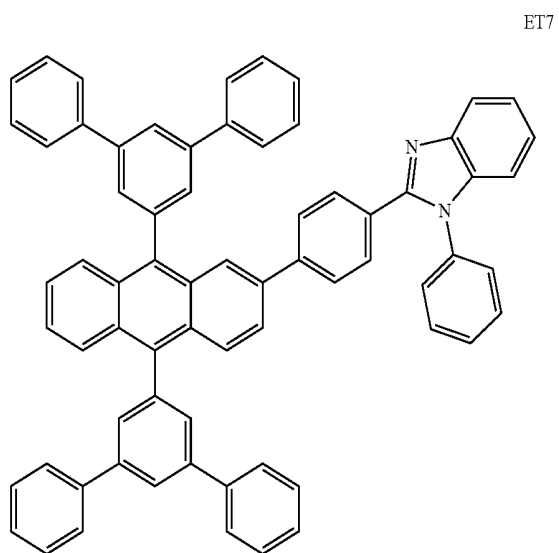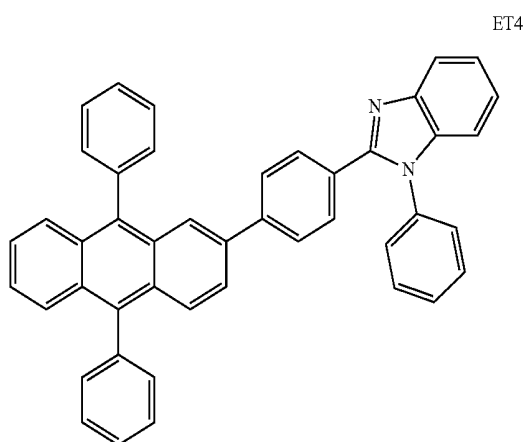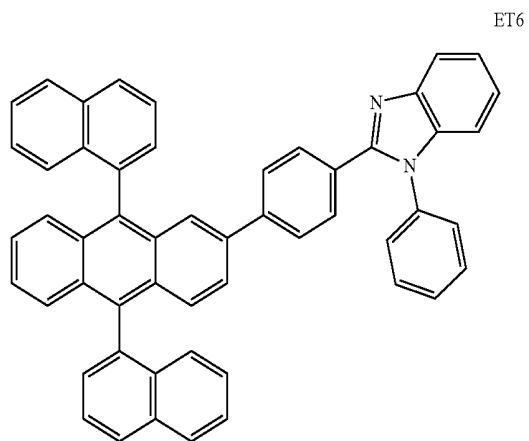


-continued

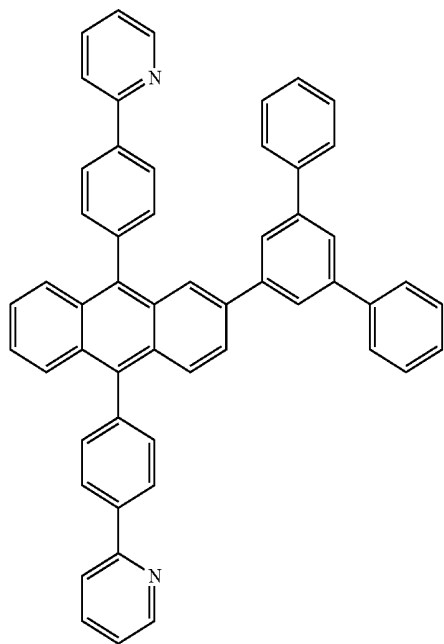


ET9

-continued

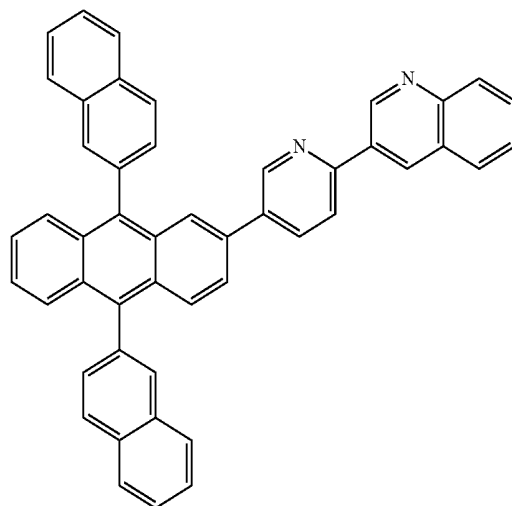



ET11

ET12

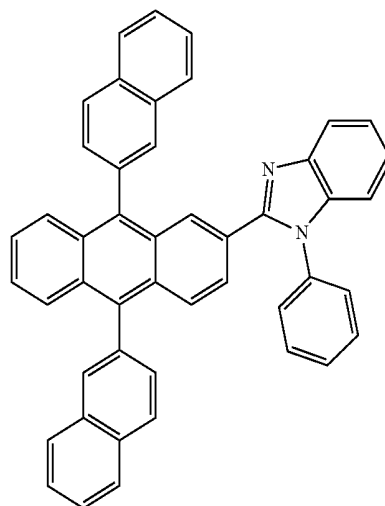


ET10

ET13

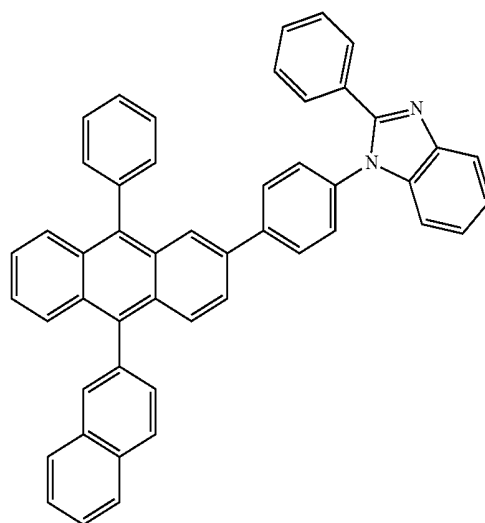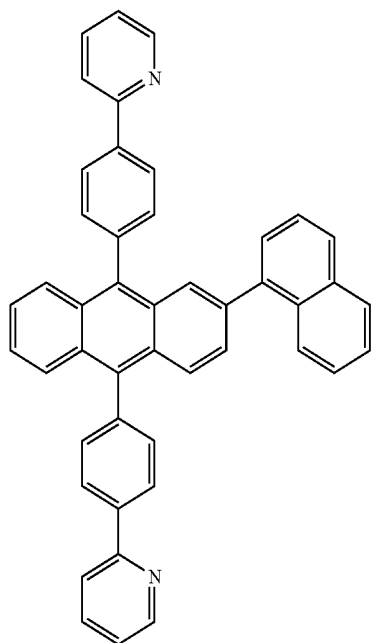


-continued

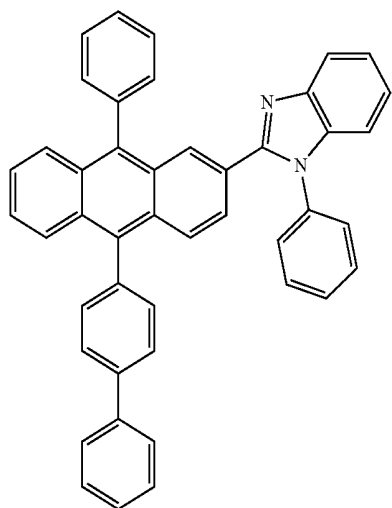


ET14

-continued

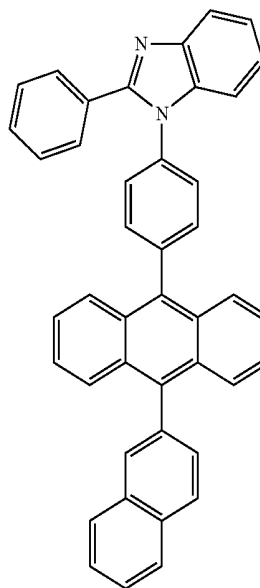


ET17


ET15

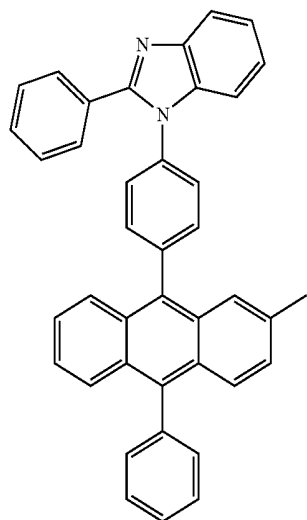


ET18

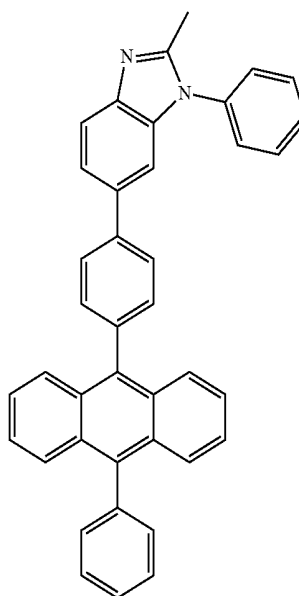


ET16

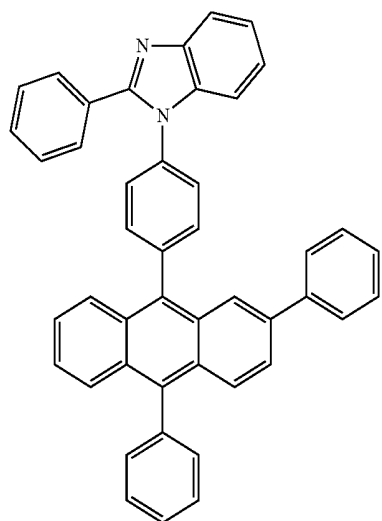

ET19

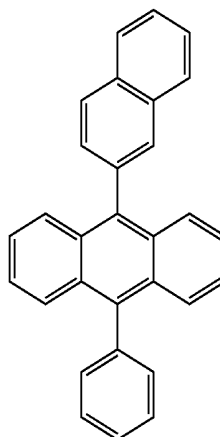


-continued

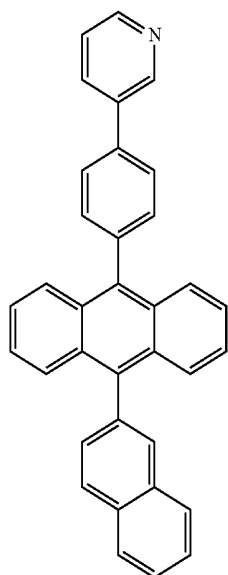


ET20


-continued

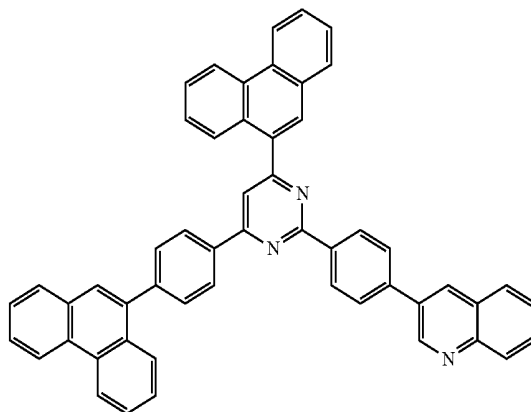


ET23

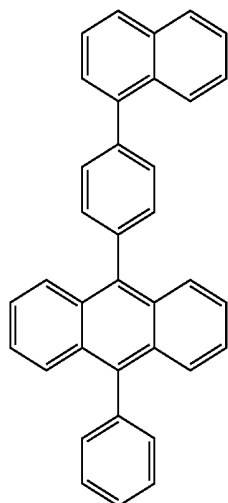


ET21

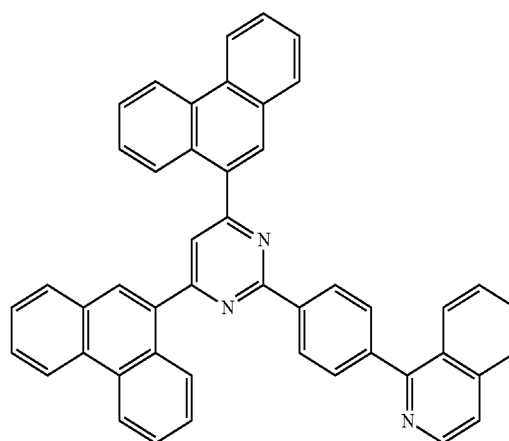

ET24

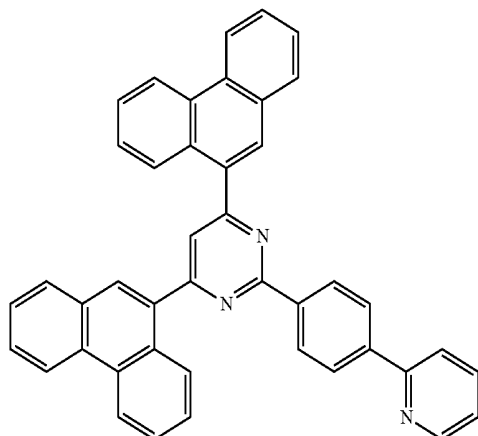


ET22

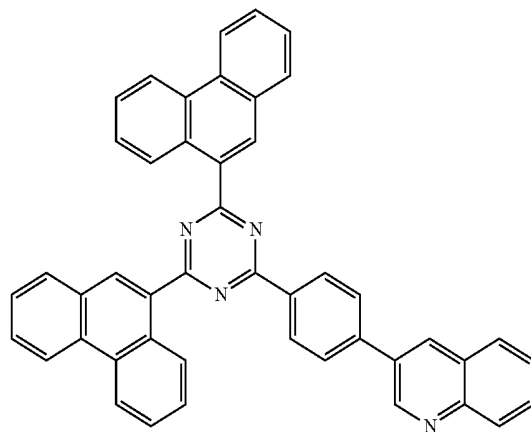


ET25


-continued

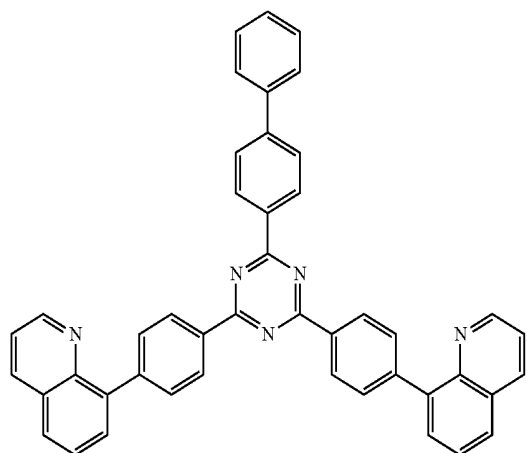


-continued

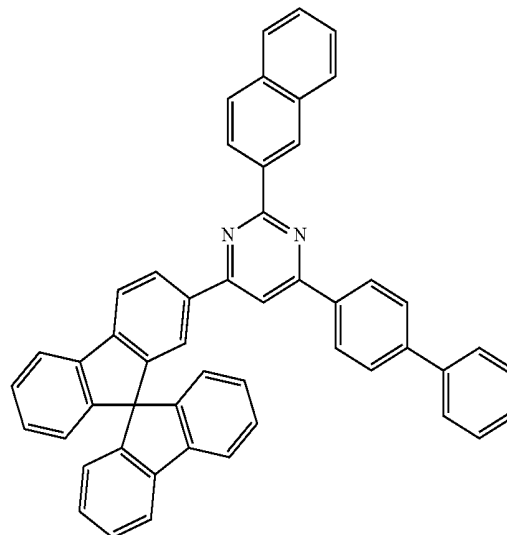


ET27

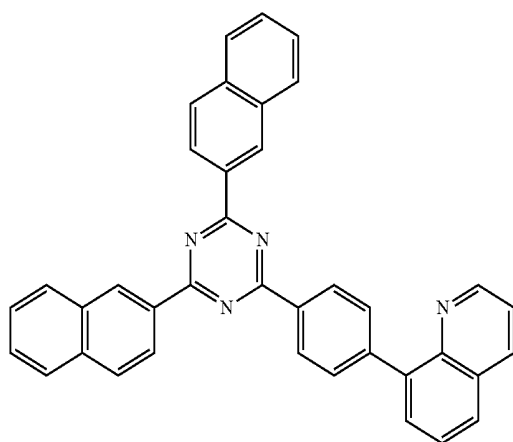


ET30

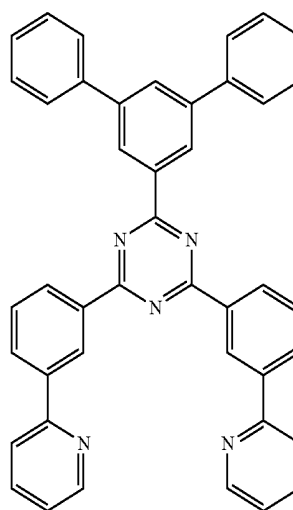


ET28

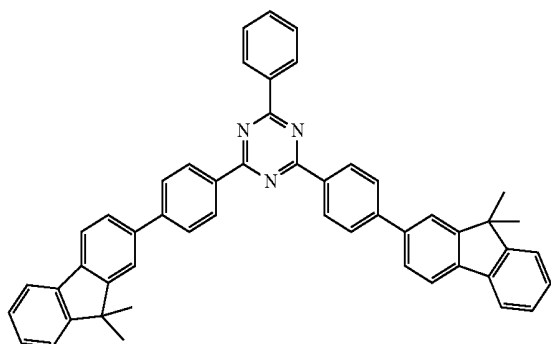

[0084] Alternatively, the electron transport region may include at least one selected from BCP (2,9-dimethyl-4,7-diphenyl-1,10-phenanthroline), BPhen (4,7-diphenyl-1,10-phenanthroline), Alq₃, BALq, TAZ (3-(biphenyl-4-yl)-5-(4-tert-butylphenyl)-4-phenyl-4H-1,2,4-triazole), and NTAZ.

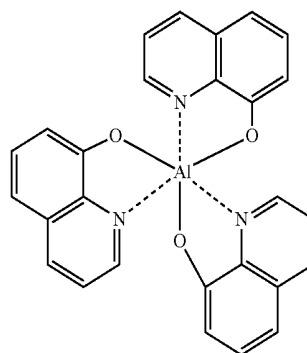

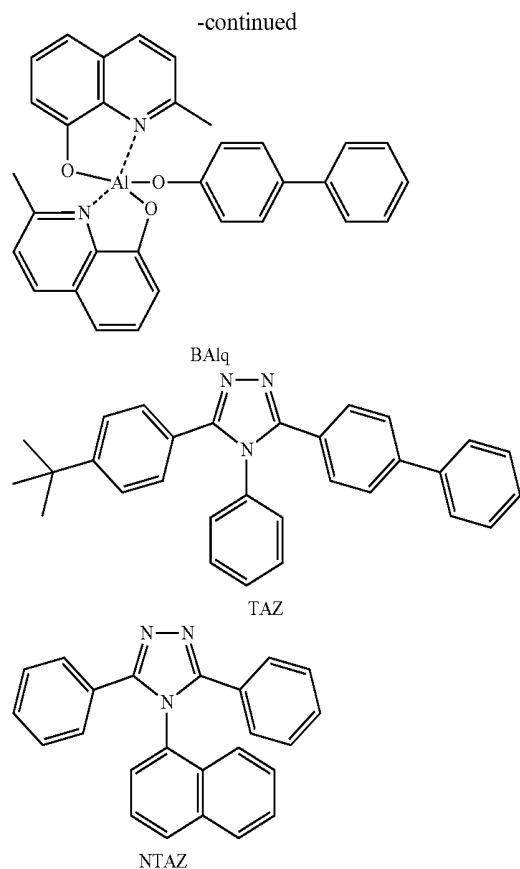

[0085] The buffer layer, the hole blocking layer, or the electron adjusting layer may each independently have a thickness of about 20 Å to about 1000 Å, for example, about 30 Å to about 300 Å. When the thickness of the buffer layer, the hole blocking layer, or the electron adjusting layer satisfies the above-stated ranges, an excellent hole blocking characteristic or electron adjusting characteristic can be acquired without substantially increasing a driving voltage.


[0086] The thickness of the electron transport layer ETL may be about 100 Å to about 1000 Å, for example, about 150 Å to about 500 Å. When the thickness of the electron transport layer ETL satisfies the above-stated ranges, a satisfactory electron transport characteristic can be acquired without substantially increasing a driving voltage.

[0087] The electron transport region (e.g., the electron transport layer ETL in the electron transport region) may further include a metal-containing material in addition to the above-described materials.


[0088] The metal-containing material may include at least one selected from an alkali metal complex and an alkali earth metal complex. Metal ions in the alkali metal complex may be selected from Li ions, Na ions, K ions, Rb ions, and Cs ions, and metal ions of the alkali earth metal complex may be selected from Be ions, Mg ions, Ca ions, Sr ions, and Ba ions. The ligand coordinated to the metal ions of the alkali metal complex and the alkaline earth metal complex may be each independently selected from hydroxyquinoline, hydroxyisoquinoline, hydroxybenzoquinoline, hydroxyacridine, hydroxyphenanthridine, hydroxydiphenyl oxadiazole, hydroxydiphenyl thiadiazole, hydroxyphenyl pyridine, hydroxyphenyl benzimidazole, hydroxyphenyl benzothiaz-

ole, bipyridine, phenanthroline, and cyclopentadiene, but the present invention is not limited thereto.

[0089] For example, the metal-containing material may include a Li complex. The Li complex may include, for example, a compound ET-D1 (lithium quinolate, LiQ) or ET-D2.



ET-D1



ET-D2

[0090] The electron transport region may include an electron injection layer that eases electron injection from the second electrode 190. The electron injection layer may directly contact the second electrode 190.

[0091] The electron injection layer may have i) a single-layered structure formed of a single layer made of a single material; ii) a single-layered structure formed of a single layer made of a plurality of different materials; or iii) a multi-layered structure formed of a plurality of layers formed of a plurality of different materials.

[0092] The electron injection layer may include a reducing dopant. The reducing dopant may include at least one selected from an alkali metal, an alkali earth metal, a rare earth metal, an alkali metal compound, an alkali earth metal compound, a rare earth metal compound, an alkali metal complex, an alkali earth metal complex, and a rare earth metal complex.

[0093] The alkali metal may be selected from Na, K, Rb, and Cs. According to an exemplary embodiment, the alkali metal may be K, Rb, or Cs. According to another exemplary embodiment, the alkali metal may be Rb or Cs, but the present invention is not limited thereto.

[0094] The alkali earth metal may be selected from Ca, Sr, and Ba. The rare earth metal may be selected from Sc, Y, Ce, Tb, Yb, Gd, and Tb. The alkali metal compound, the alkali earth metal compound, and the rare earth metal compound may be selected from an oxide of the alkali metal, the alkali earth metal, and the rare earth metal, and a halide (e.g., fluoride, chloride, bromide, iodide, and the like) of the alkali metal, the alkali earth metal, and the rare earth metal.

[0095] The alkali metal compound may be selected from an alkali metal oxide (such as Li₂O, Cs₂O, K₂O, and the like), and an alkali metal halide (such as LiF, NaF, CsF, KF, LiI, NaI, CsI, KI, and the like). According to an exemplary embodiment, the alkali metal compound may be selected from LiF, Li₂O, NaF, LiI, NaI, CsI, and KI, but the present invention is not limited thereto.

[0096] The alkali earth metal compound may be selected from alkali earth metal compounds such as BaO, SrO, CaO, $Ba_xSr_{1-x}O$ ($0 < x < 1$), $Ba_xCa_{1-x}O$ ($0 < x < 1$), and the like. According to an exemplary embodiment, the alkali earth metal compound may be selected from BaO, SrO, and CaO, but the present invention is not limited thereto.

[0097] The rare earth metal compound may be selected from YbF_3 , ScF_3 , ScO_3 , Y_2O_3 , Ce_2O_3 , GdF_3 , and TbF_3 . According to an exemplary embodiment, the rare earth metal compound may be selected from YbF_3 , ScF_3 , TbF_3 , YbI_3 , ScI_3 , and TbI_3 , but the present invention is not limited thereto.

[0098] The alkali metal complex, the alkali earth metal complex, and the rare earth metal complex may include ions of the above-described alkali metal, alkali earth metal, and rare earth metal, and the ligand coordinate to the metal ion of the alkali metal complex, alkali earth metal complex, and rare earth metal complex may be independently selected from hydroxyquinoline, hydroxyisoquinoline, hydroxybenzoquinoline, hydroxyacridine, hydroxyphenanthridine, hydroxyphenyloxazole, hydroxyphenylthiazole, hydroxydiphenyloxadiazaole, hydroxydiphenyl thiadiazole, hydroxyphenylpyridine, hydroxyphenylbenzimidazole, hydroxyphenylbenzothiazole, bipyridine, phenanthroline, and cyclopentadiene, but the present invention is not limited thereto.

[0099] The electron injection layer may be formed of only the above-described reducing dopant, or may further include an organic material in addition to the reducing dopant. When the electron injection layer includes the reducing dopant and the organic material, the reducing dopant may be evenly or unevenly dispersed in a matrix formed of the organic material.

[0100] The electron injection layer may have a thickness of about 1 Å to about 100 Å, for example, about 3 Å to about 90 Å. When the thickness of the electron injection layer satisfies such a range, a satisfactory electron injection characteristic can be acquired without a substantial increase of a driving voltage.

[0101] The second electrode 190 is disposed on the organic layer 150. The second electrode 190 may be a cathode, which is an electron injection electrode. As a material for the second electrode 190, a metal having a low work function, an alloy, an electrically conductive compound, and a mixture thereof may be utilized.

[0102] The second electrode 190 may include at least one selected from lithium (Li), magnesium (Mg), aluminum (Al), aluminum-lithium (Al—Li), calcium (Ca), magnesium-indium (Mg—In), magnesium-silver (Mg—Ag), ITO, and IZO, but the present invention is not limited thereto. The second electrode 190 may be a transmissive electrode, a transfective electrode, or a reflective electrode.

[0103] The second electrode 190 may have a single-layered structure of a single layer or a multi-layered structure of a plurality of layers.

[0104] Meanwhile, the organic light emitting device of FIG. 2 has a structure in which a first capping layer 210, the first electrode 110, the organic layer 150, and the second electrode 190 are sequentially stacked; the organic light emitting device of FIG. 3 has a structure in which the first capping layer 210, the first electrode 110, the organic layer 150, and the second electrode 190 are sequentially stacked; and the organic light emitting device of FIG. 4 has a structure in which the first capping layer 210, the first

electrode 110, the organic layer 150, the second electrode 190, and a second capping layer 220 are sequentially stacked.

[0105] Descriptions of the first electrode 110, the organic layer 150, and the second electrode 190 of FIG. 2 to FIG. 4 can be found in the description of FIG. 1.

[0106] Light generated from the emission layer of the organic layer 150 may be emitted to the outside through the first electrode 110, which is a transfective electrode or a transmissive electrode, and the first capping layer 210; and/or light generated from the emission layer of the organic layer 150 may be emitted to the outside through the second electrode 190, which is a transfective electrode or a transmissive electrode, and the second capping layer 220.


[0107] The first capping layer 210 and the second capping layer 220 may serve to improve external light emission efficiency based on constructive interference.

[0108] The first capping layer 210 and the second capping layer 220 may each independently be an organic capping layer formed of an organic material, an inorganic capping layer formed of an inorganic material, and a complex capping layer including an organic material and an inorganic material.

[0109] At least one of the first capping layer 210 and the second capping layer 220 may independently include at least one material selected from a carbocyclic compound, a heterocyclic compound, an amine-based compound, porphine derivatives, phthalocyanine derivatives, naphthalocyanine derivatives, an alkali metal complex, and an alkali earth metal complex. The carbocyclic compound, the heterocyclic compound, and the amine-based compound may be selectively substituted with a substituent including at least one selected from O, N, S, Se, Si, F, Cl, Br, and I. According to an exemplary embodiment, at least one of the first capping layer 210 and the second capping layer 220 may independently include an amine-based compound.


[0110] According to another exemplary embodiment, at least one of the first capping layer 210 and the second capping layer 220 may independently include a compound represented by Chemical Formula 201 and a compound represented by Chemical Formula 202.

[0111] According to still another exemplary embodiment, at least one of the first capping layer 210 and the second capping layer 220 may independently include a compound selected from compounds HT1 to HT43 and compounds CP1 to CP5, but the present invention is not limited thereto.

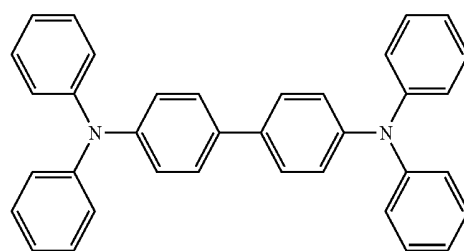

CP1

-continued

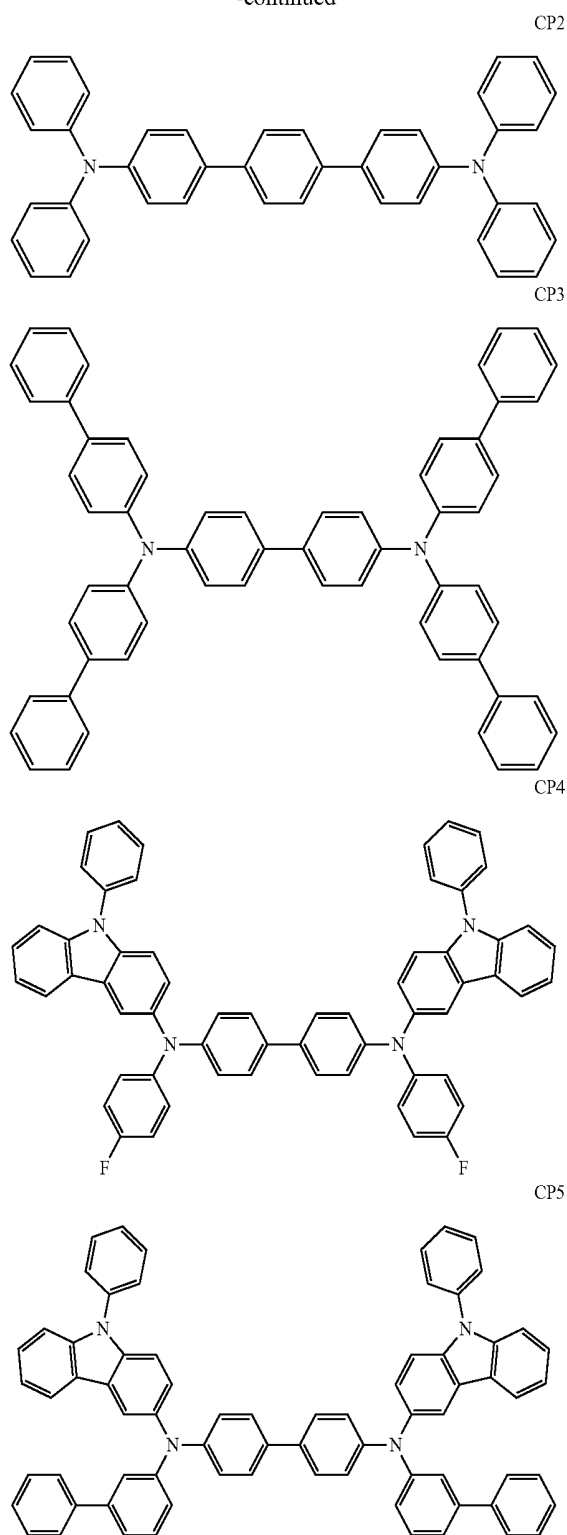

[0112] The organic light emitting device has been described with reference to FIG. 1 to FIG. 4, but the present invention is not limited thereto.

[0113] Each layer included in the hole transport region, the emission layer, and the hole transport region may be formed in a predetermined area utilizing various suitable methods such as vacuum deposition, spin coating, casting, a Langmuir-

Blodgett method, inkjet printing, laser printing, laser induced thermal imaging (LITI), and the like.

[0114] When the respective layers included in the hole transport region, the emission layer, and the electron transport region are formed by vacuum deposition, a deposition condition, for example, a deposition temperature, may be selected within a range of about 100° C. to about 500° C., a vacuum level may be selected within a range of about 10⁻⁸ torr to about 10⁻³ torr, and a deposition speed may be selected within a range of about 0.01 Å/s to about 100 Å/s in consideration of a compound to be included in a layer to be formed and a structure of the layer to be formed.

[0115] When the respective layers included in the hole transport region, the emission layer, and the respective layers included in the electron transport region are formed by spin coating, a coating condition, for example, a coating speed, may be selected within a range of about 2000 rpm to about 5000 rpm, and a heat treatment temperature may be selected within a range of about 80° C. to about 200° C. in consideration of a compound to be included in a layer to be formed and a structure of the layer to be formed.

[0116] Hereinafter, typical substituents among the substituents utilized in the present specification will be described (the number of carbon atoms defining the substituent is not limited and does not limit the characteristic of the substituent, and substituents not defined in this specification are as defined in the general definition).

[0117] In the present specification, a C₁-C₆₀ alkyl group may refer to a linear or branched monovalent aliphatic hydrocarbon group having 1 to 60 carbon atoms, and for example, a methyl group, an ethyl group, a propyl group, an isobutyl group, a sec-butyl group, a tert-butyl group, a pentyl group, and the like are included. In the present specification, a C₁-C₆₀ alkenylene group refers to a divalent group having the same (or substantially the same) structure as the C₁-C₆₀ alkyl group.

[0118] In the present specification, a C₂-C₆₀ alkenyl group refers to a hydrocarbon group including one or more double carbon bonds at a middle or end of the C₂-C₆₀ alkyl group, and includes, for example, an ethynyl group, a propenyl group, a butenyl group, and the like. In the present specification, a C₂-C₆₀ alkenylene group refers to a divalent group having the same (or substantially the same) structure as the C₂-C₆₀ alkenyl group.

[0119] In the present specification, a C₂-C₆₀ alkenyl group refers to one or more triple carbon bonds at a middle or end of the C₂-C₆₀ alkyl group, and includes, for example, an ethynyl group, a propynyl group, and the like. In the present specification, a C₂-C₆₀ alkenylene group refers to a divalent group having the same (or substantially the same) structure as the C₂-C₆₀ alkenyl group.

[0120] In the present specification, a C₁-C₆₀ alkoxy group refers to a monovalent group having a chemical formula of —OA₁₀₁ (where A₁₀₁ represents the C₁-C₆₀ alkyl group), and includes, for example, a methoxy group, an ethoxy group, an iso-propyloxy group, and the like.

[0121] In the present specification, a C₃-C₁₀ cycloalkyl group refers to a C₁ to C₁₀ monovalent saturated hydrocarbon monocyclic group, and for example, includes a cyclopropyl group, a cyclobutyl group, a cyclopentyl group, a cyclohexyl group, or a cycloheptyl group. In the present specification, the C₃-C₁₀ cycloalkylene group refers to a divalent group having the same (or substantially the same) structure as the C₃-C₁₀ cycloalkyl group.

[0122] In the present specification, a C_1 - C_{10} heterocycloalkyl group refers to a C_1 to C_{10} monovalent monocyclic group including at least one heteroatom selected from N, O, Si, P, and S as a ring-forming atom, and includes, for example, a 1,2,3,4-oxatriazolidiny group, a tetrahydrofuran-yl group, and a tetrahydrothiophenyl group. In the present specification, a C_1 - C_{10} heterocycloalkylene group refers to a divalent group having the same (or substantially the same) structure as the C_1 - C_{10} heterocycloalkyl group.

[0123] In the present specification, a C_3 - C_{10} cycloalkenyl group refers to a C_1 to C_3 monovalent monocyclic group that does not have aromaticity while having at least one double bond in a ring, and includes, for example, a cyclopentenyl group, a cyclohexenyl group, a cycloheptenyl group, and the like. In the present specification, a C_3 - C_{10} cycloalkenylene group refers to a divalent group having the same (or substantially the same) structure as the C_3 - C_{10} cycloalkenyl group.

[0124] In the present specification, a C_1 - C_{10} heterocycloalkenyl group refers to a C_1 to C_{10} monocyclic group including at least one heteroatom selected from N, O, Si, P, and S as a ring-forming atom, and at least one double bond in a ring. The C_1 - C_{10} heterocycloalkenyl group includes, for example, a 4,5-dihydro-1,2,3,4-oxatriazolyl group, a 2,3-hydrofuran-yl group, a 2,3-hydrothiophenyl group, and the like. In the present specification, a C_1 - C_{10} heterocycloalkenylene group refers to a divalent group having the same (or substantially the same) structure as the C_1 - C_{10} heterocycloalkenyl group.

[0125] In the present specification, a C_6 - C_{60} aryl group refers to a monovalent group having a C_6 to C_{60} carbocyclic aromatic system, and a C_6 - C_{60} arylene group refers to a divalent group having a C_6 to C_{60} carbocyclic aromatic system. The C_6 - C_{60} aryl group includes, for example, a phenyl group, a naphthyl group, an anthracenyl group, a phenanthrenyl group, a pyrenyl group, a glycenyl group, and the like. When the C_6 - C_{60} aryl group and the C_6 - C_{60} arylene group include two or more rings, the two or more rings may be condensed to each other.

[0126] In the present specification, a C_1 - C_{60} heteroaryl group refers to a monovalent group including at least one heteroatom selected from N, O, Si, P, and S as a ring-forming atom and having a C_1 to C_{60} heterocyclic aromatic system, and a C_1 - C_{60} heteroarylene group refers to a divalent group having at least one heteroatom selected from N, O, Si, P, and S as a ring-forming atom and having a C_1 to C_{60} heterocyclic aromatic system. The C_1 - C_{60} heteroaryl group includes, for example, a pyridinyl group, a pyrimidinyl group, a pyrazinyl group, a pyridazinyl group, a triazinyl group, a quinolinyl group, an isoquinolinyl group, and the like. When the C_1 - C_{60} heteroaryl group and the C_1 - C_{60} heteroarylene group include two or more rings, the two or more rings may be condensed to each other.

[0127] In the present specification, a C_6 - C_{60} aryloxy group may be represented by $—OA_{102}$ (where A_{102} denotes the C_6 - C_{60} aryl group), and the C_6 - C_{60} arylthio group may be represented by $—SA_{103}$ (where A_{103} denotes the C_6 - C_{60} aryl group).

[0128] In the specification, a monovalent non-aromatic condensed polycyclic group refers to a monovalent group having two or more rings condensed to each other, including only carbon as a ring-forming atom, and of which all molecules have non-aromaticity (e.g., having C8 to C60). The monovalent non-aromatic condensed polycyclic group

includes, for example, a fluorenyl group. In the present specification, a divalent non-aromatic condensed polycyclic group refers to a divalent group having the same (or substantially the same) structure as the monovalent non-aromatic condensed polycyclic group.

[0129] In the present specification, the monovalent non-aromatic condensed polycyclic group refers to a monovalent group having two or more rings condensed to each other, including at least one heteroatom selected from N, O, Si, P, and S in addition to carbon atoms as a ring-forming atom, and of which all molecules have non-aromaticity (e.g., having C1 to C60). The monovalent non-aromatic condensed polycyclic group includes, for example, a carbazolyl group. In the present specification, the divalent non-aromatic condensed polycyclic group refers to a divalent group having the same (or substantially the same) structure as the monovalent non-aromatic condensed polycyclic group.

[0130] In the present specification, a C_5 - C_{60} carbocyclic group refers to a C_5 to C_{60} monocyclic or polycyclic group including only carbon atoms as a ring-forming atom. The C_5 - C_{60} carbocyclic group may be an aromatic carbocyclic group or a non-aromatic carbocyclic group. The C_5 - C_{60} carbocyclic group may be a ring such as a benzene ring, a monovalent group such as a phenyl group, or a divalent group such as a phenylene group. Alternatively, depending on the number of substituents connected to the C_5 - C_{60} carbocyclic group, the C_5 - C_{60} carbocyclic group may be variously deformed to a trivalent group or a tetravalent group.

[0131] In the present specification, a C_1 - C_{60} heterocyclic group refers to a group having the same (or substantially the same) structure as the C_5 - C_{60} carbocyclic group, but includes at least one heteroatom selected from N, O, Si, P, and S in addition to carbon (may be C1 to C60) as a ring-forming atom.

[0132] In the present specification, at least one of the substituents of the substituted C_5 - C_{60} carbocyclic group, the substituted C_1 - C_{60} heterocyclic group, the substituted C_3 - C_{10} cycloalkylene group, the substituted C_1 - C_{10} heterocycloalkylene group, the substituted C_3 - C_{10} cycloalkenylene group, the substituted C_1 - C_{10} heterocycloalkenylene group, the substituted C_6 - C_{60} arylene group, the substituted C_1 - C_{60} heteroarylene group, the substituted divalent non-aromatic condensed polycyclic group, the substituted divalent non-aromatic hetero-condensed polycyclic group, the substituted C_1 - C_{60} alkyl group, the substituted C_2 - C_{60} alkenyl group, the substituted C_2 - C_{60} alkynyl group, the substituted C_1 - C_{60} alkoxy group, the substituted C_3 - C_{10} cycloalkyl group, the substituted C_1 - C_{10} heterocycloalkyl group, the substituted C_3 - C_{10} cycloalkenyl group, the substituted C_1 - C_{10} heterocycloalkenyl group, the substituted C_6 - C_{60} aryl group, the substituted C_6 - C_{60} aryloxy group, the substituted C_6 - C_{60} arylthio group, the substituted C_1 - C_{60} heteroaryl group, the substituted monovalent non-aromatic condensed polycyclic group, and the substituted monovalent non-aromatic hetero-condensed polycyclic group is selected from:

[0133] deuterium (-D), —F, —Cl, —Br, —I, a hydroxyl group, a cyano group, a nitro group, an amidino group, a hydrazino group, a hydrazono group, a C_1 - C_{60} alkyl group, a C_2 - C_{60} alkenyl group, a C_2 - C_{60} alkynyl group, and a C_1 - C_{60} alkoxy group;

[0134] a C_1 - C_{60} alkynyl group, a C_2 - C_{60} alkenyl group, a C_2 - C_{60} alkynyl group, and a C_1 - C_{60} alkoxy group, each substituted with at least one selected from deuterium, —F,

—Cl, —Br, —I, a hydroxyl group, a cyano group, a nitro group, an amidino group, a hydrazino group, a hydrazono group, a C₃-C₁₀ cycloalkyl group, a C₁-C₁₀ heterocycloalkyl group, a C₃-C₁₀ cycloalkenyl group, a C₁-C₁₀ heterocycloalkenyl group, a C₆-C₆₀ aryl group, a C₆-C₆₀ aryloxy group, a C₆-C₆₀ arylthio group, a C₁-C₆₀ heteroaryl group, a monovalent non-aromatic condensed polycyclic group, a monovalent non-aromatic hetero-condensed polycyclic group, —Si(Q₁₁)(Q₁₂)(Q₁₃), —N(Q₁₁)(Q₁₂), —B(Q₁₁)(Q₁₂), —C(=O)(Q₁₁), —S(=O)₂(Q₁₁), and —P(=O)(Q₁₁)(Q₁₂);

[0135] a C₃-C₁₀ cycloalkyl group, a C₁-C₁₀ heterocycloalkyl group, a C₃-C₁₀ cycloalkenyl group, a C₁-C₁₀ heterocycloalkenyl group, a C₆-C₆₀ aryl group, a C₆-C₆₀ aryloxy group, a C₆-C₆₀ arylthio group, a C₁-C₆₀ heteroaryl group, a monovalent non-aromatic condensed polycyclic group, and a monovalent non-aromatic hetero-condensed polycyclic group, each substituted with one selected from deuterium, —F, —Cl, —Br, —I, a hydroxyl group, a cyano group, a nitro group, an amidino group, a hydrazino group, a hydrazono group, a C₁-C₆₀ alkyl group, a C₂-C₆₀ alkenyl group, a C₂-C₆₀ alkynyl group, a C₁-C₆₀ alkoxy group, a C₃-C₁₀ cycloalkyl group, a C₁-C₁₀ heterocycloalkyl group, a C₃-C₁₀ cycloalkenyl group, a C₁-C₁₀ heterocycloalkenyl group, a C₆-C₆₀ aryl group, a C₆-C₆₀ aryloxy group, a C₆-C₆₀ arylthio group, a C₁-C₆₀ heteroaryl group, a monovalent non-aromatic condensed polycyclic group, a monovalent non-aromatic hetero-condensed polycyclic group, —Si(Q₂₁)(Q₂₂)(Q₂₃), —N(Q₂₁)(Q₂₂), —B(Q₂₁)(Q₂₂), —C(=O)(Q₂₁), —S(=O)₂(Q₂₁), and —P(=O)(Q₂₁)(Q₂₂); and —Si(Q₃₁)(Q₃₂)(Q₃₃), —N(Q₃₁)(Q₃₂), —B(Q₃₁)(Q₃₂), —C(=O)(Q₃₁), —S(=O)₂(Q₃₁), and —P(=O)(Q₃₁)(Q₃₂), wherein Q₁₁ to Q₁₃, Q₂₁ to Q₂₃, and Q₃₁ to Q₃₃ may be independently selected from hydrogen, deuterium, —F, —Cl, —Br, —I, a hydroxyl group, a cyano group, a nitro group, an amidino group, a hydrazino group, a hydrazono group, a C₁-C₆₀ alkyl group, a C₂-C₆₀ alkenyl group, a C₂-C₆₀ alkynyl group, a C₁-C₆₀ alkoxy group, a C₃-C₁₀ cycloalkyl group, a C₁-C₁₀ heterocycloalkyl group, a C₃-C₁₀ cycloalkenyl group, a C₁-C₁₀ heterocycloalkenyl group, a C₆-C₆₀ aryl group, a C₁-C₆₀ heteroaryl group, a monovalent non-aromatic condensed polycyclic group, a monovalent non-aromatic hetero-condensed polycyclic group, biphenyl group, and a terphenyl group.

[0136] In the present specification, “Ph” refers to a phenyl group, “Me” refers to a methyl group, “Et” refers to an ethyl group, “ter-Bu” or “Bu” refers to a tert-butyl group, and “OMe” refers to a methoxy group.

[0137] In the present specification, the term “biphenyl group” refers to a “phenyl group substituted with a phenyl group”. The term “biphenyl group” is included in a “substituted phenyl group” of which a substituent is a “C₆-C₆₀ aryl group”. In the present specification, the term “terphenyl group” refers to a “phenyl group substituted with a biphenyl group”. The term “terphenyl group” is included in a “substituted phenyl group” of which a substituent is a “C₆-C₆₀ aryl group”. In the present specification, “*” and “**” each refers to a binding site with a neighboring atom in the corresponding chemical formula.

[0138] Next, a display device according to an exemplary embodiment will be described with reference to FIG. 5. FIG. 5 is a cross-sectional view of the display device according to the exemplary embodiment.

[0139] Referring to FIG. 5, a blocking layer 111 that is made of a silicon oxide or a silicon nitride is provided on a substrate 510.

[0140] A semiconductor layer 151 is provided on the blocking layer 111. The semiconductor layer 151 includes a source region 153 and a drain region 155 that are doped with an impurity, and a channel region 154 disposed between the source region 153 and the drain region 155.

[0141] A gate insulation layer 140 is disposed on the semiconductor layer 151 and the blocking layer 111, and may include a silicon oxide or a silicon nitride. A control electrode 124 overlaps the channel region 154 of the semiconductor layer 151, and is disposed on the gate insulation layer 140.

[0142] An interlayer insulation layer 160 is disposed on the control electrode 124 and the gate insulation layer 140. The interlayer insulation layer 160 includes a first contact hole 165 and a second contact hole 163.

[0143] A data conductor that includes a data line 171, an input electrode 173, and an output electrode 175 is disposed on an interlayer insulation layer 160.

[0144] The output electrode 175 is connected with the drain region 155 through the first contact hole 165. In addition, the input electrode 173 is connected with the source region 153 through the second contact hole 163.

[0145] A passivation layer 180 is disposed on the data conductors 171, 173, and 175 and the interlayer insulation layer 160, and the passivation layer 180 includes a contact hole 185.

[0146] The pixel electrode 190 is disposed on the passivation layer 180. The pixel electrode 190 is connected with the output electrode 175 through the contact hole 185. A barrier rib 361 is provided on the passivation layer 180. An emission element layer 370 is disposed to overlap with the pixel electrode 190, and a common electrode 270 is disposed to overlap with the emission element layer 370. A light emitting element includes the pixel electrode 190, the emission element layer 370, and the common electrode 270.

[0147] In this case, the pixel electrode 190 may be an anode, which is a hole injection electrode, and may correspond to the first electrode 110 described with reference to FIG. 1 to FIG. 4, and the common electrode 270 may be a cathode, which is an electron injection electrode, and may correspond to the second electrode 190 described with reference to FIG. 1 to FIG. 4. However, the present invention is not limited thereto. The pixel electrode 190 may be a cathode and the common electrode 270 may be an anode depending on a driving method of the display device.

[0148] The emission element layer 370 may include the organic layer 150 described with reference to FIG. 1, and thus a description of the organic layer 150 will not be repeated.

[0149] An encapsulation layer 390 is disposed to overlap with the common electrode 270. The encapsulation layer 390 may include an organic material or an inorganic material, and alternatively, the organic material and the inorganic material may be alternately stacked. The encapsulation layer 390 may protect the display device from external moisture, heat, and other pollutants.

[0150] The above-described structure of the display device is an example, and the light emitting diode according to an exemplary embodiment of the present disclosure may be applied to a display device having another structure.

[0151] Hereinafter, an effect of the present invention will be described with reference to exemplary embodiments and comparative examples.

[0152] In Exemplary Embodiment 1, a Corning 15 Ω/cm^2 1200 Å ITO glass substrate was cut into a 50 mm×50 mm×0.7 mm size and ultrasonic wave-cleaned utilizing isopropyl alcohol and pure water for 5 minutes, and then the cleaned substrate was irradiated with ultraviolet (UV) light for 30 min and exposed to ozone such that an anode was prepared. The ITO glass substrate was provided to a vacuum deposition device.


[0153] A compound represented by HT22 and a compound represented by P1 at 3 wt % were deposited with a thickness of 100 Å on the substrate, and a known hole transport material was deposited thereon with a thickness of 600 Å such that a hole transport region was formed.

[0154] A blue fluorescent host and DPAVBi, which is a blue fluorescent dopant, were simultaneously deposited (e.g., co-deposited) with a weight ratio of 95:5 on the hole transport region such that an emission layer having a thickness of 20 nm was formed.

[0155] Next, a compound represented by Chemical Formula 6-1 and a compound represented by Chemical Formula 6-2 were vacuum deposited with a weight ratio of 1:1 on the emission layer such that an electron transport region having a thickness of 300 Å was formed.


[0156] LiQ, which is a halogenated alkali metal, was deposited with a thickness of 10 Å on an electron injection region such that an electron injection region was formed, and Al was vacuum-deposited with a thickness of 1000 Å such that a cathode was formed.

Chemical Formula 6-1

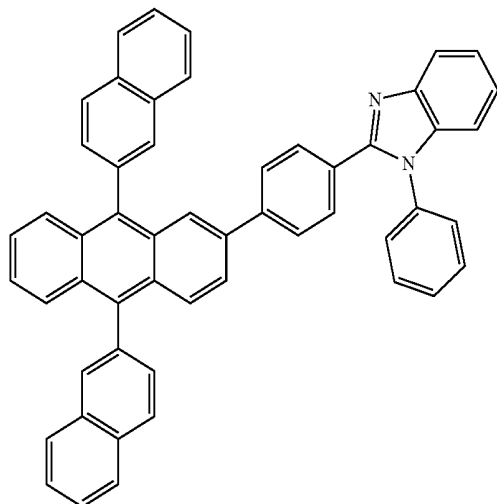

-continued

Chemical Formula 6-2



[0157] Exemplary Embodiment 2 is the same (or substantially the same) as Exemplary Embodiment 1, except that the compound represented by HT22 in Exemplary Embodiment 1 was replaced with a compound represented by HT37.

[0158] Exemplary Embodiment 3 is the same (or substantially the same) as Exemplary Embodiment 1, except that the compound represented by HT22 in Exemplary Embodiment 1 was replaced with a compound represented by HT39.

[0159] Comparative Example 1 is the same (or substantially the same) as Exemplary Embodiment 1, except that the compound represented by HT22 was replaced with a compound represented by HT1.

[0160] Exemplary Embodiments 1 to 3 and Comparative Example 1 are almost the same, except for a difference in a HOMO energy level of a hole transport material.

[0161] Exemplary Embodiments 1 to 3 and Comparative Example 1 will now be described with reference to Table 1. As in the exemplary embodiments of the present invention, when a doping content of a p-dopant exceeds 3 wt %, a difference between HOMO_{HTM} and LUMO_{p-dopant} value may be less than -0.05. When Equation 1 is satisfied, light emission efficiency of an organic light emitting diode according to the exemplary embodiments is increased by up to 40% compared to Comparative Example 1 where Equation 1 is not satisfied.

[0162] According to the exemplary embodiment of the present invention, it is desirable for an amount of a p-dopant that increases an injection amount of holes to be low in order to control the injection amount of holes to the emission layer. However, as in Exemplary Embodiments 1 to 3 and Comparative Example 1, when a content of the p-dopant is somewhat high, energy required for hole movement is increased when Equation 1 is satisfied, and accordingly, the injection amount of holes to the emission layer can be appropriately controlled.

TABLE 1

Organic light emitting device	HOMO _{HTM} (eV)	LUMO _{p-dopant} (eV)	HOMO _{HTM} - LUMO _{p-dopant} (eV)	Doping concentration (wt %)	Efficiency (cd/A)
Exemplary Embodiment 1	-5.20	-5.05	-0.15	3	1.3
Exemplary Embodiment 2	-5.25	-5.05	-0.2	3	1.4
Exemplary Embodiment 3	-5.15	-5.05	-0.10	3	1.1

TABLE 1-continued

Organic light emitting device	HOMO_HTM (eV)	LUMO_p-dopant (eV)	HOMO_HTM – LUMO_p-dopant (eV)	Doping concentration (wt %)	Efficiency (cd/A)
Comparative Example 1	-5.10	-5.05	-0.05	3	1.0

[0163] Exemplary Embodiment 4 is the same (or substantially the same) as Exemplary Embodiment 1, except that a hole transport region includes a compound represented by HT1 and a p-dopant is a compound represented by P2. Exemplary Embodiment 5 is the same (or substantially the same) as Exemplary Embodiment 4, except that a p-dopant is a compound represented by P3. Comparative Example 2 is the same as the Exemplary Embodiment 4, except that a p-dopant is represented by P1. Exemplary Embodiment 4, Exemplary Embodiment 5, and Comparative Example 2 have almost the same (or substantially the same) composition except for a difference in a LUMO energy level of a p-dopant.

[0164] Referring to Table 2, light emission efficiency was improved by about 30% in Exemplary Embodiment 4 and Exemplary Embodiment 5 compared to Comparative Example 2. The LUMO energy level of the p-dopant is high in Exemplary Embodiment 4 and Exemplary Embodiment 5 compared to Comparative Example 2. Accordingly, when HOMO energy of the hole transport material is consistent, a difference (i.e., an absolute value in the difference) between HOMO energy of the hole transport material and LUMO energy of the p-dopant may be increased depending on LUMO energy of the p-dopant. When the energy difference is increased, energy required for hole movement is increased, so that excessive injection of holes can be prevented or substantially prevented and an appropriate amount of holes can be supplied. Accordingly, it was determined that light emission efficiency of the organic light emitting device was increased.

TABLE 2

Organic light emitting device	HOMO_HTM (eV)	LUMO_p-dopant (eV)	HOMO_HTM – LUMO_p-dopant (eV)	Doping concentration (wt %)	Efficiency (cd/A)
Exemplary Embodiment 4	-5.10	-5.01	-0.09	3%	1.3
Exemplary Embodiment 5	-5.10	-4.99	-0.11	3%	1.35
Comparative Example 2	-5.10	-5.05	-0.05	3%	1.0

[0165] Exemplary Embodiment 6 is the same (or substantially the same) as Exemplary Embodiment 1, except that a hole transport region includes a compound represented by HT1 and a p-dopant amount is 1.0%. Exemplary Embodiment 7 is the same (or substantially the same) as Exemplary Embodiment 6, except that a p-dopant amount is 0.5 wt %, and Exemplary Embodiment 8 is the same as (or substantially the same) Exemplary Embodiment 6, except that an injected amount of p-dopant is 0.25%. Comparative Example 3 is the same (or substantially the same) as Exemplary Embodiment 6, except that an injected amount of p-dopant is 3.0 wt %.

[0166] Referring to Table 3, efficiency of a light emission device was increased as the amount of p-dopant doped in the hole transport region according to Exemplary Embodiment 6 to Exemplary Embodiment 8 is decreased. As a doping amount of the p-dopant is increased, an injection amount of holes supplied to the emission layer is increased. According to the exemplary embodiment of the present invention, the injection amount of holes supplied to the emission layer is controlled as the injection amount of p-dopant is decreased, and accordingly, light efficiency was increased in the emission layer. That is, light emission efficiency can be increased

by injecting an appropriate level of holes rather than injecting a large amount of holes.

TABLE 3

Organic light emitting device	HOMO_HTM (eV)	LUMO_p-dopant (eV)	HOMO_HTM – LUMO_p-dopant (eV)	Doping concentration (wt %)	Efficiency (cd/A)
Exemplary Embodiment 6	-5.10	-5.05	-0.05	1.0%	1.05
Exemplary Embodiment 7	-5.10	-5.05	-0.05	0.5%	1.15
Exemplary Embodiment 8	-5.10	-5.05	-0.05	0.25%	1.30
Comparative Example 3	-5.10	-5.05	-0.05	3%	1.0

[0167] Exemplary Embodiment 9 is the same (or substantially the same) as Exemplary Embodiment 1, except that a hole transport region that includes a compound represented by HT1 and a p-dopant has a thickness of 50 Å, Exemplary Embodiment 10 is the same (or substantially the same) as Exemplary Embodiment 9, except that a hole transport region including a p-dopant has a thickness of 30 Å, and Comparative Example 4 is the same (or substantially the same) as Exemplary Embodiment 9, except that a hole transport region including a p-dopant has a thickness of 100 Å.

[0168] Referring to Table 4, it can be determined that as a thickness of a hole transport region including a p-dopant is decreased, light emission efficiency is increased. When a hole transport region including a p-dopant has a thick thickness, an injection amount of holes supplied to an emission layer is increased. However, it can be determined that when a hole transport region having a thin thickness is provided as in the exemplary embodiment of the present invention, rather than injecting a large amount of holes to the emission layer, an appropriate level of holes are injected, thereby increasing light efficiency.

TABLE 4

Organic light emitting device	HOMO_HTM (eV)	LUMO_p-dopant (eV)	HOMO_HTM-LUMO_p-dopant (eV)	Doping concentration (wt %)	Efficiency (cd/A)	Organic light emitting device
Exemplary Embodiment 9	-5.10	-5.05	-0.05	0.5%	50	1.20
Exemplary Embodiment 10	-5.10	-5.05	-0.05	0.5%	30	1.40
Comparative Example 4	-5.10	-5.05	-0.05	0.5%	100	1.15

[0169] According to the above-described exemplary embodiments, the doping concentration of the p-dopant supplied to the hole transport region and the thickness of the hole transport region that includes the p-dopant are controlled to adjust an injection amount of holes supplied to the emission layer, thereby increasing light emission efficiency of the organic light emitting device. In addition, regardless of the doping concentration and the thickness of the hole transport region, energy levels of the hole transport material and the p-dopant are adjusted to prevent or substantially prevent an excessive amount of holes from being injected into the emission layer, thereby supplying an appropriate level of holes. Accordingly, the organic light emitting device can provide improved light efficiency.

[0170] Hereinafter, light emission efficiency in region I to region III according to an exemplary embodiment and a comparative example will be described with reference to FIG. 6. FIG. 6 is a graph illustrating light emission efficiency according to a doping region in an emission layer. Specifically, an emission layer is divided into three regions according to a thickness direction, and light emission efficiency of each region is observed by doping a dopant (e.g., a light-emitting dopant) only to each region. Region 1 is a region adjacent to the hole transport region in the emission layer, region III is a region adjacent to a second electrode in the emission layer, and region II is a region disposed between region I and region III. In the present specification, the term "light emission region" refers to a region where light emission predominates by combination of electrons and holes.

[0171] It can be determined that in the case of the light emitting device according to Comparative Example 1, the

light emission region is disposed in a center (i.e., region II) in the emission layer, but in the case of the light emitting device according to Exemplary Embodiment 2, the light emission region is formed in region I that is adjacent to the hole transport region.

[0172] It can also be determined that, in the case of the light emitting device according to the exemplary embodiment, the light emission region moves to a region adjacent to the hole transport region depending on hole injection control, and as the light emission region is further densified, the probability of the hole and the electron meeting within the light emission region is increased, so that the probability of formation of the exciton in the emission layer is increased. When the probability of formation of the exciton in the emission layer is increased, a large amount of excitons generated from the host is energy-transferred to a dopant, thereby achieving higher light efficiency. The limitation of the hole injection is consequently effective in densifying the light emission region in the emission layer and consequently increasing the efficiency of the light emitting device.

[0173] While this invention has been described in connection with what is presently considered to be practical exem-

plary embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims, and equivalents thereof.

DESCRIPTION OF SOME OF THE SYMBOLS

[0174] 110: first electrode

[0175] 150: organic layer

[0176] 190: second electrode

[0177] 210: first capping layer

[0178] 220: second capping layer

What is claimed is:

1. An organic light emitting device comprising:

a first electrode;

a second electrode that overlaps the first electrode; and an organic layer between the first electrode and the second electrode,

wherein the organic layer comprises a hole transport region, the hole transport region comprising a hole transport material and a p-dopant,

wherein when a doping amount of the p-dopant in the hole transport region exceeds 1 wt %, the following Equation 1 is satisfied, and

when the doping amount of the p-dopant is 1 wt % or less than 1 wt %, the following Equation 2 is satisfied:

$$\text{HOMO_HTM-LUMO_p-dopant} < -0.05 \text{ eV} \quad [\text{Equation 1}]$$

$$\text{HOMO_HTM-LUMO_p-dopant} > -0.05 \text{ eV} \quad [\text{Equation 2}]$$

wherein, in Equation 1 and Equation 2, HOMO_HTM denotes HOMO energy of the hole transport material and LUMO_p-dopant denotes LUMO energy of the p-dopant.

2. The organic light emitting device of claim 1, wherein the hole transport material satisfies $-5.3 \text{ eV} < \text{HOMO_HTM} < -4.9 \text{ eV}$, and the p-dopant satisfies $-5.25 \text{ eV} < \text{LUMO_p-dopant} < -4.85 \text{ eV}$.

3. The organic light emitting device of claim 1, wherein the p-dopant is included at an amount of about 0.25 wt % to about 20 wt % based on a total weight of the hole transport region.

4. The organic light emitting device of claim 1, wherein a thickness of the hole transport region comprising the p-dopant is about 10 Å to about 300 Å.

5. The organic light emitting device of claim 1, wherein the organic layer further comprises an emission layer, and recombination of holes and electrons in the emission layer is generated adjacent to the hole transport region.

6. The organic light emitting device of claim 1, wherein when the doping amount of the p-dopant in the hole transport region exceeds 1 wt %, and when an absolute value of a difference between the HOMO_HTM and the LUMO_p-dopant is increased, light emission efficiency of the organic light emitting device is increased.

7. The organic light emitting device of claim 1, wherein when the doping amount of the p-dopant is 1 wt % or less than 1 wt %, and when a doping concentration of the p-dopant is decreased, light emission efficiency of the organic light emitting device is increased.

8. The organic light emitting device of claim 1, wherein light emission efficiency of the organic light emitting device is increased as a thickness of the hole transport region that includes the p-dopant is decreased.

9. A display device comprising:

a transistor on a substrate; and
an organic light emitting device connected with the transistor,

wherein the organic light emitting device comprises:

a first electrode;
a second electrode that overlaps the first electrode; and
an organic layer between the first electrode and the second electrode,

wherein the organic layer comprises an electron transport region, a hole transport region, and an emission layer where holes and electrons are recombined, the emission layer comprising a first region adjacent to the hole transport region and a second region adjacent to the electron transport region, and

the holes and the electrons are recombined in the first region of the emission layer more than in the second region of the emission layer.

10. The display device of claim 9, wherein the hole transport region comprises a hole transport material and a p-dopant, and

when a doping amount of the p-dopant doped to the hole transport region exceeds 1 wt %, the following Equation 1 is satisfied, and

when the doping amount of the p-dopant is 1 wt % or less than 1 wt %, the following Equation 2 is satisfied:

$$\text{HOMO_HTM-LUMO_p-dopant} < -0.05 \text{ eV} \quad [\text{Equation 1}]$$

$$\text{HOMO_HTM-LUMO_p-dopant} > -0.05 \text{ eV} \quad [\text{Equation 2}]$$

wherein, in Equation 1 and Equation 2, HOMO_HTM denotes HOMO energy of the hole transport material and LUMO_p-dopant denotes LUMO energy of the p-dopant.

11. The display device of claim 10, wherein the hole transport material satisfies $-5.3 \text{ eV} < \text{HOMO_HTM} < -4.9 \text{ eV}$, and the p-dopant satisfies $-5.25 \text{ eV} < \text{LUMO_p-dopant} < -4.85 \text{ eV}$.

12. The display device of claim 10, wherein the p-dopant is included at an amount of about 0.25 wt % to about 20 wt % based on a total content of the hole transport region.

13. The display device of claim 10, wherein a thickness of the hole transport region comprising the p-dopant is about 10 Å to about 300 Å.

14. The display device of claim 10, wherein when the doping amount of the p-dopant in the hole transport region exceeds 1 wt %, and when an absolute value of a difference between the HOMO_HTM and the LUMO_p-dopant is increased, light emission efficiency of the organic light emitting device is increased.

15. The display device of claim 10, wherein when the doping amount of the p-dopant is 1 wt % or less than 1 wt %, and when a doping concentration of the p-dopant is decreased, light emission efficiency of the organic light emitting device is increased.

16. The display device of claim 10, wherein light emission efficiency of the organic light emitting device is increased when a thickness of the hole transport region that includes the p-dopant is decreased.

17. A method of manufacturing an organic light emitting device, the method comprising:

forming a first electrode;

forming a second electrode overlapping with the first electrode; and

forming an organic layer between the first electrode and the second electrode,

wherein the organic layer comprises a hole transport region, the hole transport region comprising a hole transport material and a p-dopant,

wherein the forming of the organic layer comprises:

determining a doping amount of the p-dopant in the hole transport region, and

selecting the hole transport material according to the doping amount of the p-dopant,

wherein when the doping amount of the p-dopant in the hole transport region exceeds 1 wt %, the hole transport material is selected to satisfy the following Equation 1, and

when the doping amount of the p-dopant is 1 wt % or less than 1 wt %, the hole transport material is selected to satisfy the following Equation 2:

$$\text{HOMO_HTM-LUMO_p-dopant} < -0.05 \text{ eV} \quad [\text{Equation 1}]$$

$$\text{HOMO_HTM-LUMO_p-dopant} > -0.05 \text{ eV} \quad [\text{Equation 2}]$$

wherein, in Equation 1 and Equation 2, HOMO_HTM denotes HOMO energy of the hole transport material and LUMO_p-dopant denotes LUMO energy of the p-dopant.

* * * * *

专利名称(译)	有机发光器件和包括其的显示器件		
公开(公告)号	US20190088896A1	公开(公告)日	2019-03-21
申请号	US15/957667	申请日	2018-04-19
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	KIM SUNG WOOK BAE SUNG SOO JEONG HYE IN KIM DONG HYUN KIM SEUL ONG NAIJO TSUYOSHI CHO HWAN HEE		
发明人	KIM, SUNG WOOK BAE, SUNG-SOO JEONG, HYE IN KIM, DONG HYUN KIM, SEUL ONG NAIJO, TSUYOSHI CHO, HWAN HEE		
IPC分类号	H01L51/50 H01L27/32 H01L51/56		
CPC分类号	H01L51/506 H01L51/5004 H01L51/5012 H01L27/3244 H01L51/56 H01L2251/552 B82Y20/00 H01L51/0051 H01L51/006 H01L51/0072		
优先权	1020170121288 2017-09-20 KR		
其他公开文献	US10673006		
外部链接	Espacenet USPTO		

摘要(译)

有机发光装置包括：第一电极；第二电极，与第一电极重叠；以及设置在第一电极和第二电极之间的有机层，其中有机层包括空穴传输区域，该空穴传输区域包括空穴传输材料和p-掺杂剂，并且其中当掺杂的p-掺杂剂的掺杂量时空穴传输区域超过1wt%，满足以下等式1，而当p掺杂剂的掺杂量为1wt%或小于1wt%时，满足以下等式2：HOMO_HTM-LUMO_p-dopant $> -0.05 \text{ eV}$ 20032003 [等式1] HOMO_HTM-LUMO_p-dopant $> -0.05 \text{ eV}$ 20032003 [等式2] 在等式1和等式2中，HOMO_HTM表示空穴传输材料的HOMO能量，LUMO_p-掺杂剂表示p-掺杂剂的LUMO能量。

